



849 NW STATE ROAD 45  
 NEWBERRY, FL 32669 USA  
 PH: 888.472.2424 OR 352.472.5500  
 FAX: 352.472.2030  
 EMAIL: [TEI@TIMCOENGR.COM](mailto:TEI@TIMCOENGR.COM)  
 HTTP://[WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

## FCC PART 27 TEST REPORT

<b>Applicant</b>	WILSON ELECTRONICS, INC.
<b>Address</b>	3301 E. DESERET DRIVE ST. GEORGE UTAH 84790 USA
<b>FCC ID</b>	PWO272570
<b>Model Number</b>	272570
<b>Product Description</b>	WIRELESS, SINGLE BAND SIGNAL BOOSTER
<b>Date Sample Received</b>	4/27/2012
<b>Date Tested</b>	6/25/2012
<b>Tested By</b>	Nam Nguyen
<b>Approved By</b>	Mario de Aranzeta
<b>Report No.</b>	1097AUT12TestReport.doc
<b>Test Results</b>	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
 WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.





**TABLE OF CONTENTS**

ATTESTATION STATEMENT ..... 3
REPORT SUMMARY ..... 4
TEST ENVIRONMENT ..... 4
TEST SETUP ..... 4
DEVICE UNDER TEST INFORMATION ..... 5
EQUIPMENT LIST ..... 6
TEST PROCEDURE ..... 7
RF POWER OUTPUT ..... 10
Test Data Table 1 - Output Power - EVDO 700 - Uplink/Downlink ..... 10
Test Data Table 2 - Output Power - HSPA 700 - Uplink/Downlink ..... 10
Test Data Table 3 - Output Power - LTE 700 - Uplink/Downlink..... 10
Test Data Table 4 - Output Power - EDGE 700 - Uplink/Downlink ..... 10
INPUT/OUTPUT MODULATED AMPLITUDE COMPARISON AND BAND-EDGES COMPLIANCE ..... 11
Test Data Table 5 - EVDO 700 - Uplink/Downlink ..... 12
Test Data Table 6 - HSPA 700 - Uplink/Downlink..... 16
Test Data Table 7 - LTE 700 - Uplink/Downlink ..... 20
Test Data Table 8 - EDGE 700 - Uplink/Downlink ..... 24
INTERMODULATION PRODUCT SPURIOUS EMISSIONS ..... 28
SPURIOUS EMISSIONS AT ANTENNA TERMINALS..... 32
Test Data Table 9 - Conducted Emissions - EVDO 700 - Uplink ..... 32
Test Data Table 10 - Conducted Emissions - EVDO 700 - Downlink..... 32
Test Data Table 11 - Conducted Emissions - EDGE 700 - Uplink..... 33
Test Data Table 12 - Conducted Emissions - EDGE 700 - Downlink..... 33
FIELD STRENGTH OF SPURIOUS EMISSIONS ..... 34
Test Data Table 13 - Radiated Emissions - CW (700 MHz) - Uplink /Downlink... 34
OUT OF BAND REJECTION: FREQUENCY RESPONSE ..... 35

Applicant: WILSON ELECTRONICS, INC.
FCC ID: PWO272570
Report: W\WILSON\_PWO\1097AUT12\1097AUT12TestReport.doc

## ATTESTATION STATEMENT

### Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report  
 not fulfill the general approval requirements as identified in this test report

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report. All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45, Newberry, Florida 32669.

Authorized Signatory Name: Mario de Aranzeta



Signature:

Function: Engineer

Date: July/12/2012

Applicant: WILSON ELECTRONICS, INC.  
FCC ID: PWO272570  
Report: W\WILSON\_PWO\1097AUT12\1097AUT12TestReport.doc

**REPORT SUMMARY**

Disclaimer	The test results relate only to the items tested.
Report Purpose	To demonstrate the DUT comply with FCC Part 22H and Pt 24 and Industry Canada RS-131 requirements for a dual band signal amplifier.
Applicable Rule Part(s)	Pt 27, Pt 15.109
Test Procedure(s)	ANSI/TIA-603-C: 2004

**TEST ENVIRONMENT**

Test Facilities	All required tests were performed by Timco Engineering Inc. that is located at 849 NW State Road 45 Newberry, FL 32669.
Test Conditions	Temperature: 26°C Relative Humidity: 50%

**TEST SETUP**

Deviation to the rules	There was no deviation from the test standards.
Modification to the DUT	No modification was made to the DUT.
Test Exercise (e.g. software description, test signal, etc.)	The DUT was placed in continuous transmit mode of operation.

## DEVICE UNDER TEST INFORMATION

<b>Manufactured by</b>	WILSON ELECTRONICS, INC.
<b>DUT Description</b>	WIRELESS, SINGLE BAND SIGNAL BOOSTER
<b>FCC ID</b>	PWO272570
<b>Model Name</b>	272570
<b>Operating Frequency</b>	Uplink 698 -716 MHz Downlink 728 - 746 MHz
<b>Emission Designators</b>	F9W (EVDO & HSPA), G7W (EDGE), G7D (LTE)
<b>Modulation(s)</b>	HSPA, LTE, EVDO, EDGE
<b>User Power Range &amp; Control</b>	There are NO user power controls
<b>Test Item</b>	Pre-Production
<b>DC Voltage and Current into final amplifier</b>	Power Into Final Amplifier (uplink) Vcc = 4.5Vdc, 0.500A Power Input (downlink) Vcc= 4.5Vdc, 0.500 A
<b>Type of Equipment</b>	Fixed and Mobile

## EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/1/12	5/1/14
AC Voltmeter	HP	400FL	2213A14499	CAL 6/12/11	6/12/13
Antenna: Active Loop	ETS-Lindgren	6502	00062529	CAL 9/23/10	9/23/12
Frequency Counter	HP	5385A	2730A03025	CAL 8/17/11	8/17/13
Hygro-Thermometer	Extech	445703	0602	CAL 6/15/11	6/15/13
Modulation Analyzer	HP	8901A	3435A06868	CAL 7/18/11	7/18/13
Digital Multimeter	Fluke	FLUKE-77	35053830	CAL 9/9/11	9/9/13
Power Meter	Boonton Electronics	4531	11793	CAL 11/12/2010	11/12/2012
EMI Receiver	Rohde & Schwarz	ESIB40	100274	CAL 3/16/2012	3/16/2014
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 10/28/11	10/28/13
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 10/28/11	10/28/13
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 10/28/11	10/28/13
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 10/28/11	10/28/13
Antenna	ETS	3117	35923	12/7/2011	12/7/2013
Antenna	Electro metrics	LPA-25	1122	5/04/2011	5/04/2013
Antenna	Electro metrics	BIA-25	1096	5/04/2011	5/04/2013


Applicant: WILSON ELECTRONICS, INC.  
 FCC ID: PWO272570  
 Report: W\WILSON\_PWO\1097AUT12\1097AUT12TestReport.doc

## TEST PROCEDURE

### RF Power Output

RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal voltage and the amplifier properly adjusted the RF output measures.


RF Output Power Test Setup Diagram

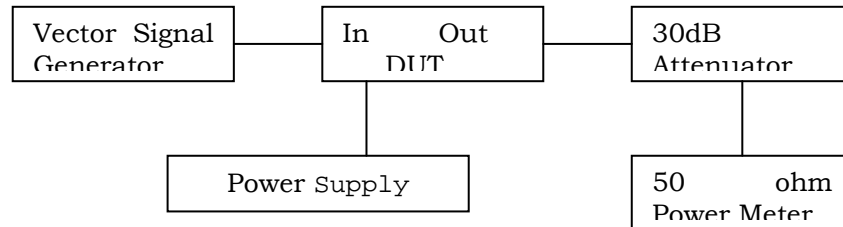

### Input/Output Modulated Amplitude Comparison And Band-Edges Compliance

On the following plot, the reference level was calibrated using a resolution bandwidth wider than the emission bandwidth. First the gain was measured for the maximum output power. Then for each frequency and type of modulation, an attenuation equals to the gain of the amplifier was added on the measurement side of the amplifier, as to overlay the input versus output modulated envelope.

Test Setup Diagram

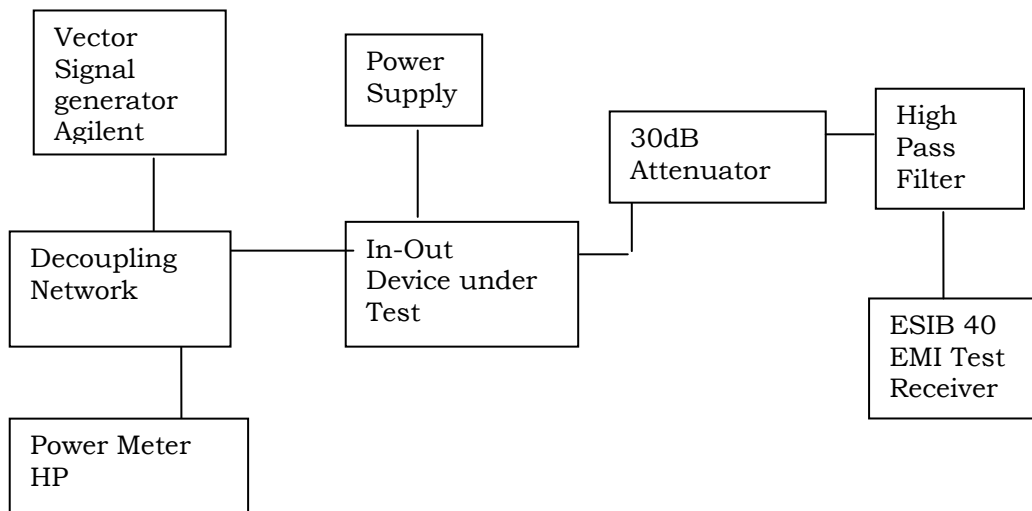


[Continued]

**Intermodulation Product Spurious Emissions**

The procedure used was ANSI/TIA-603-C: 2004. The spectrum was scanned from 9kHz to at least the tenth harmonic of the fundamental using a HP 8566B spectrum analyzer.

The modulation type was tested using the two-tone / three tone test method. The input power to the amplifier was set at maximum drive level by combining the two tones. The two tones were chosen in such a way (1) the third order intermodulation product frequencies are located within the pass band of the DUT and (2) they produce the worst-case emissions out of band.

Setup Diagram

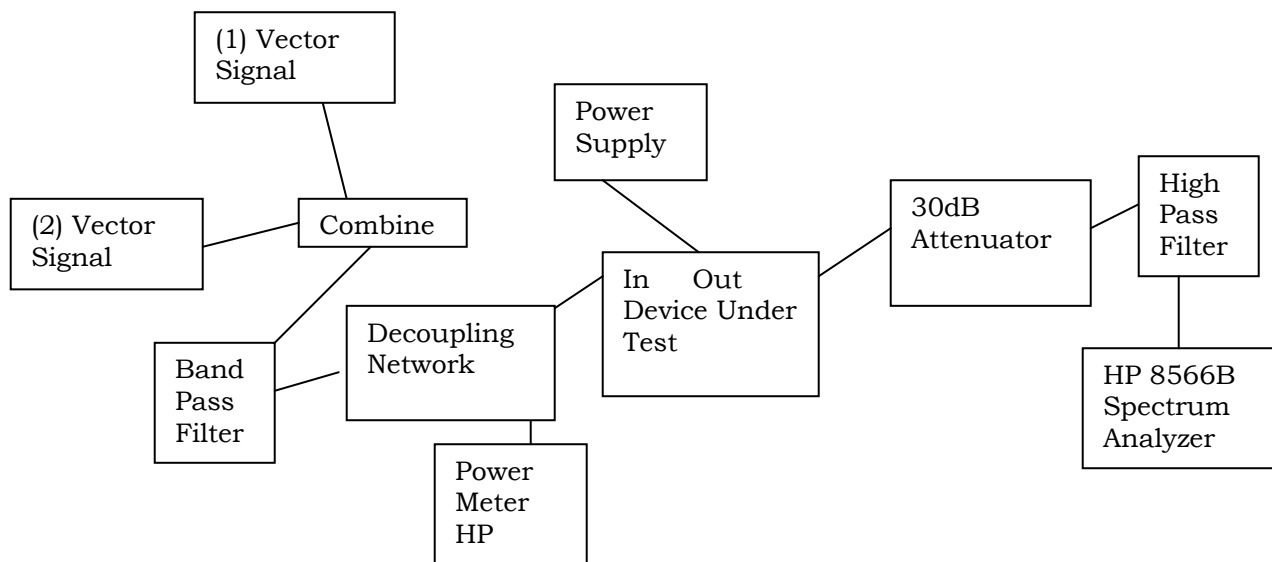

**Spurious Emissions at Antenna Terminals**


The procedure used was ANSI/TIA-603-C: 2004. The spectrum was scanned from 9kHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer.

Data on the following page shows the level of conducted spurious responses. For analog modulation, the carrier was modulated 100% using a 2500 Hz tone. For digital modulation, the carrier is modulated to its maximum extent. The spectrum was scanned from 9 kHz to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA-603-C: 2004. The maximum input power was set for each test.

[Continued]




Conducted Spurious Emissions Test Setup Diagram

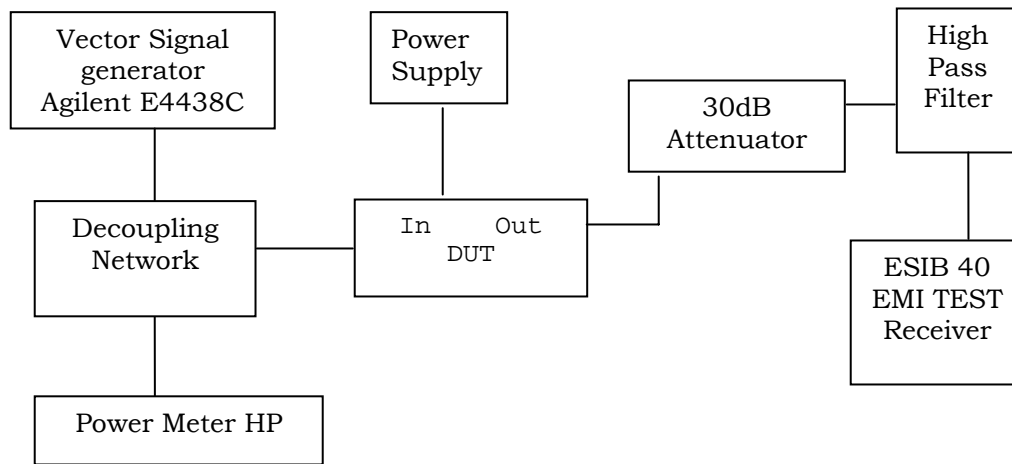

**Radiated Spurious Emissions**

The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. The CW signal was used to perform this test. This test was conducted per ANSI/TIA-603-C: 2004 using the substitution method.

Radiated Spurious Emissions Test Setup Diagram

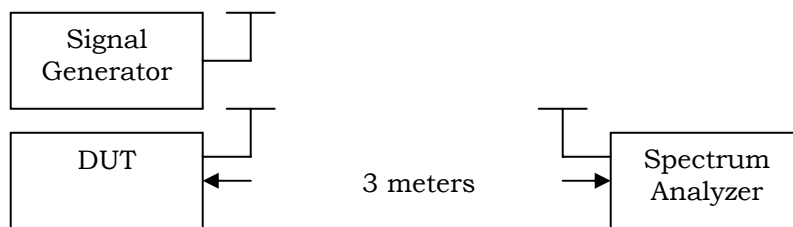

Equipment placed 80 cm above ground on a rotating table platform.

**RF POWER OUTPUT**

**Rule Part(s) No.:** Pt 2.1046(a)

**Requirements:** Pt 2.1046(a)

**Test Result:** As the following table indicates. Notes: the maximum power output value was obtained with EVDO modulation at 707MHz.

Test Data Table 1 – Output Power – EVDO 700 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)	Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
699.25	-43.0	28.0	631	729.25	-48.0	24.5	282
707.00	-45.0	29.3	851	737.00	-49.0	25.5	355
714.75	-43.0	28.1	646	744.75	-47.0	24.2	263

Test Data Table 2 – Output Power – HSPA 700 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)	Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
700.50	-45.0	27.2	525	730.50	-49.0	24.7	295
707.00	-46.0	28.0	631	737.00	-50.0	24.9	309
713.50	-45.0	27.1	513	743.50	-48.0	23.8	240

Test Data Table 3 – Output Power – LTE 700 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)	Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
703.00	-44.0	28.9	776	733.00	-49.0	25.5	355
707.00	-44.0	29.2	832	737.00	-49.0	25.4	347
711.00	-44.0	28.7	741	741.00	-48.0	24.9	309

Test Data Table 4 – Output Power – EDGE 700 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)	Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
698.20	-42.0	28.0	631	728.20	-49.0	22.8	191
707.00	-45.0	28.5	708	737.00	-50.0	23.8	240
715.80	-42.0	28.1	646	745.80	-50.0	20.4	109.6



## **INPUT/OUTPUT MODULATED AMPLITUDE COMPARISON AND BAND-EDGES COMPLIANCE**

**Rule Parts No.:** Pt 2.1049, Pt. 27

**Requirements:** The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

**Test Data:** The DUT meets the requirements.

Applicant: WILSON ELECTRONICS, INC.  
FCC ID: PWO272570  
Report: W\WILSON\_PWO\1097AUT12\1097AUT12TestReport.doc

Bandedge compliance: Measurements were performed in accordance with Part 24.238

The Reference level on the following plots was calibrated using a 3MHz RBW=VBW.

Compensating for RBW (1%) using  $10 \log (12.5/3) = 6.2 \text{ dB}$  we get the following amplitudes at the bandedge:

Test Data Table 5 – EVDO 700 – Uplink/Downlink

Channel (MHz)	Bandedge Frequency (MHz)	Amplitude bandedge (dBm)	Limit (dBm)	Margin (dB)
699.25	697.94	-27.46	-13	14.46
714.75	716.11	-29.24	-13	16.24
729.25	727.96	-33.5	-13	20.5
744.75	746.07	-35.22	-13	22.22

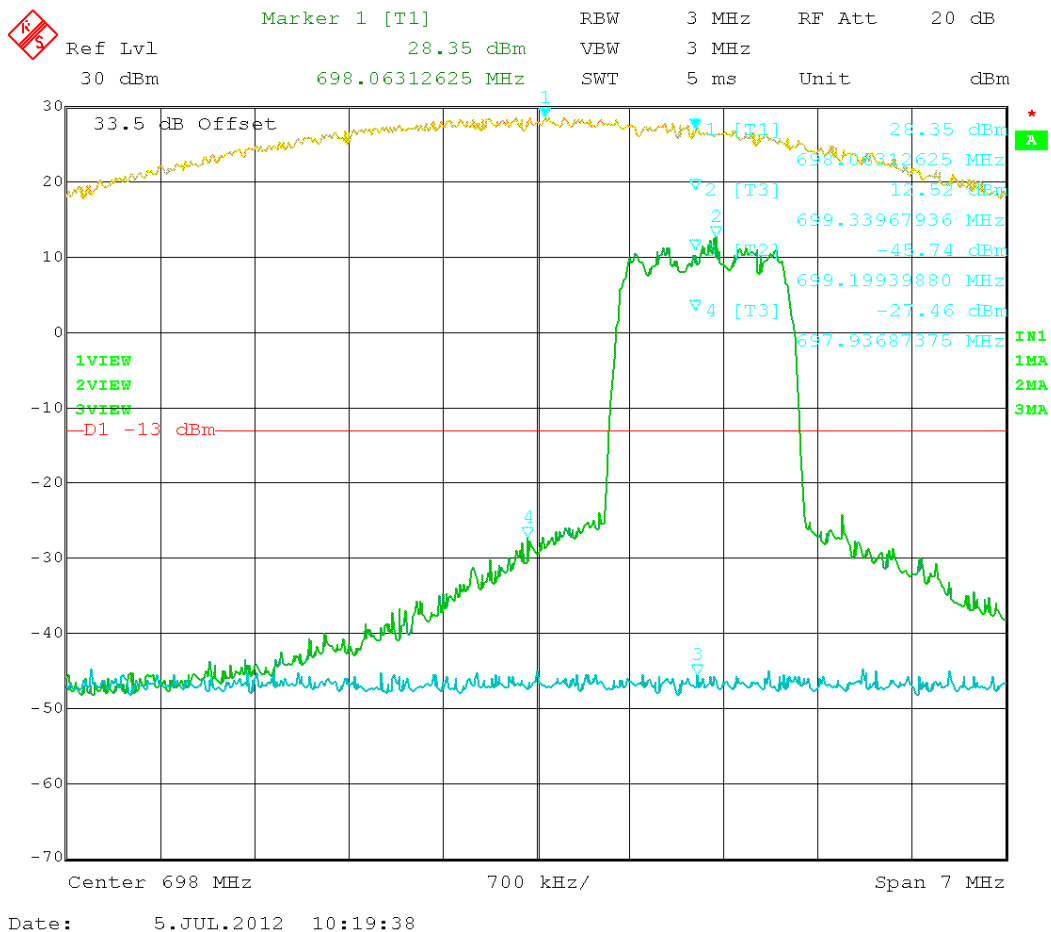


Figure 1: EVDO – In vs. Out 699.25MHz

Applicant: WILSON ELECTRONICS, INC.  
 FCC ID: PWO272570  
 Report: W\WILSON\_PWO\1097AUT12\1097AUT12TestReport.doc

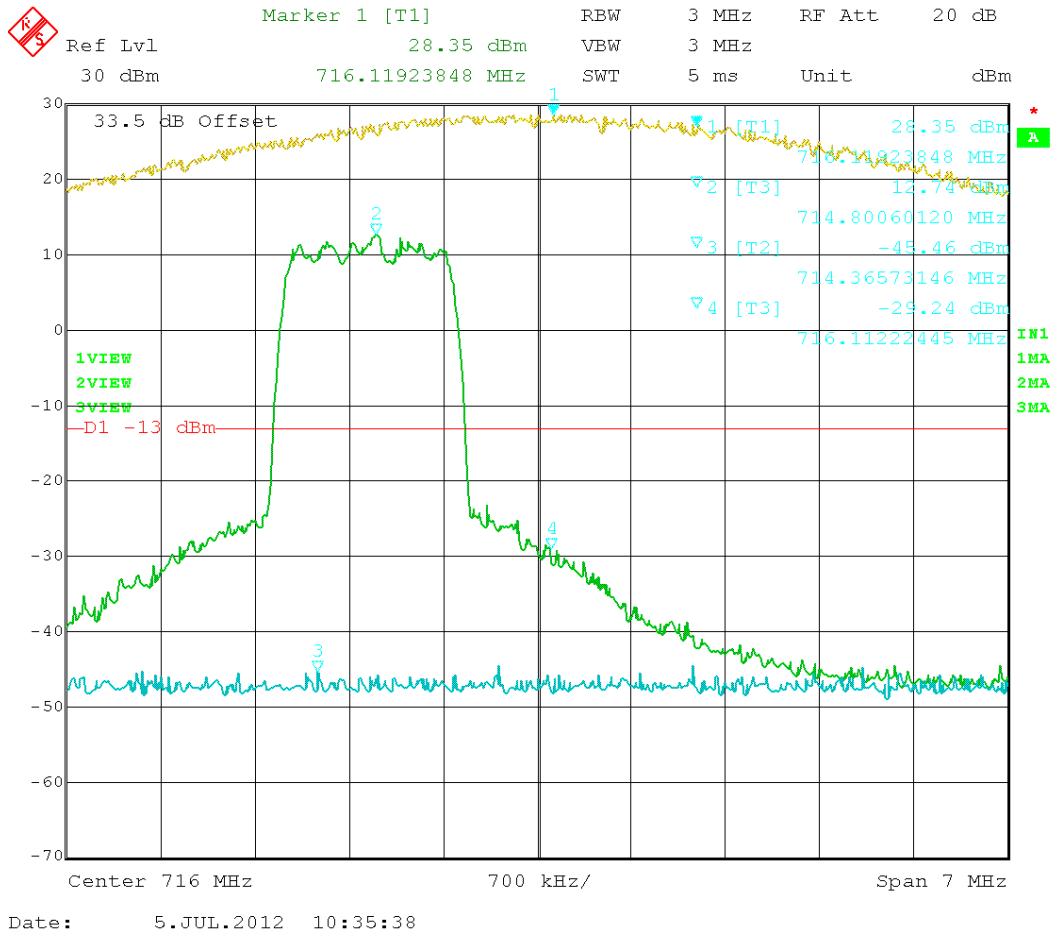


Figure 2: EVDO – In vs. Out 714.75MHz

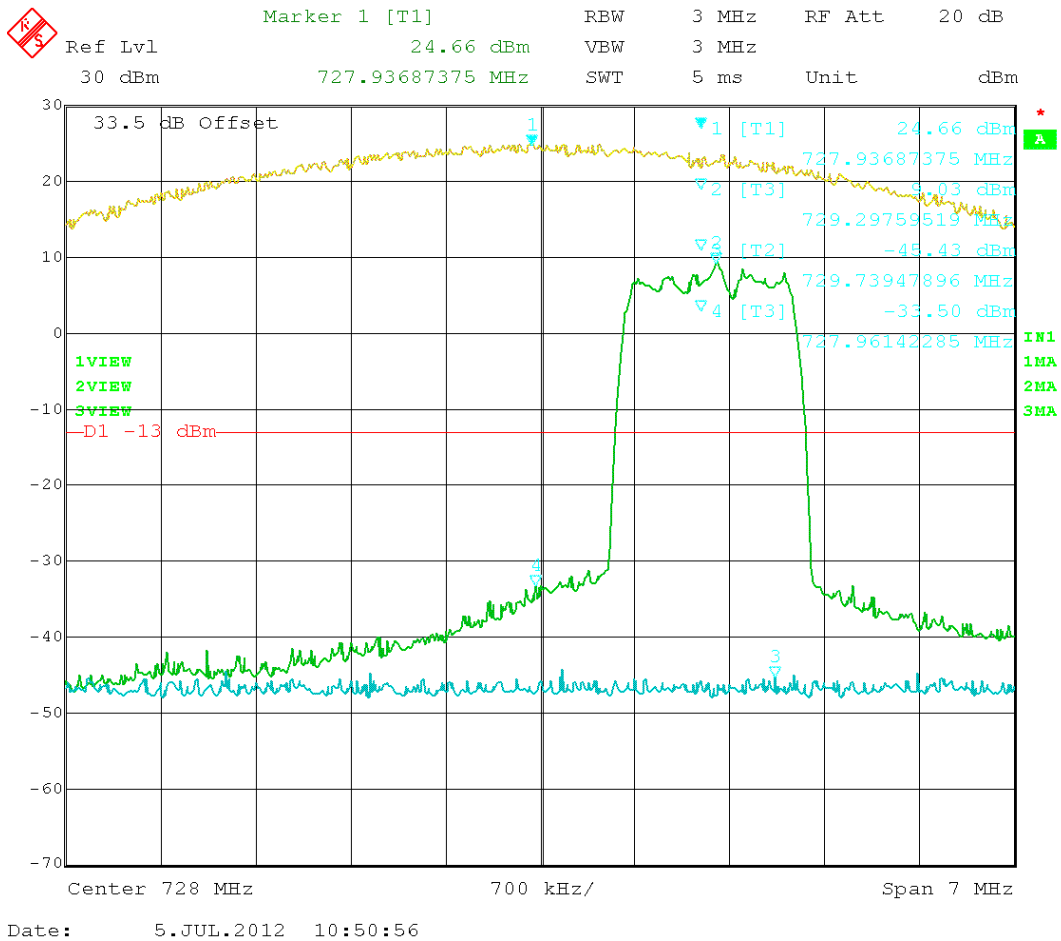


Figure 3: EVDO – In vs. Out 729.25MHz

Applicant: WILSON ELECTRONICS, INC.  
 FCC ID: PWO272570  
 Report: W\WILSON\_PWO\1097AUT12\1097AUT12TestReport.doc

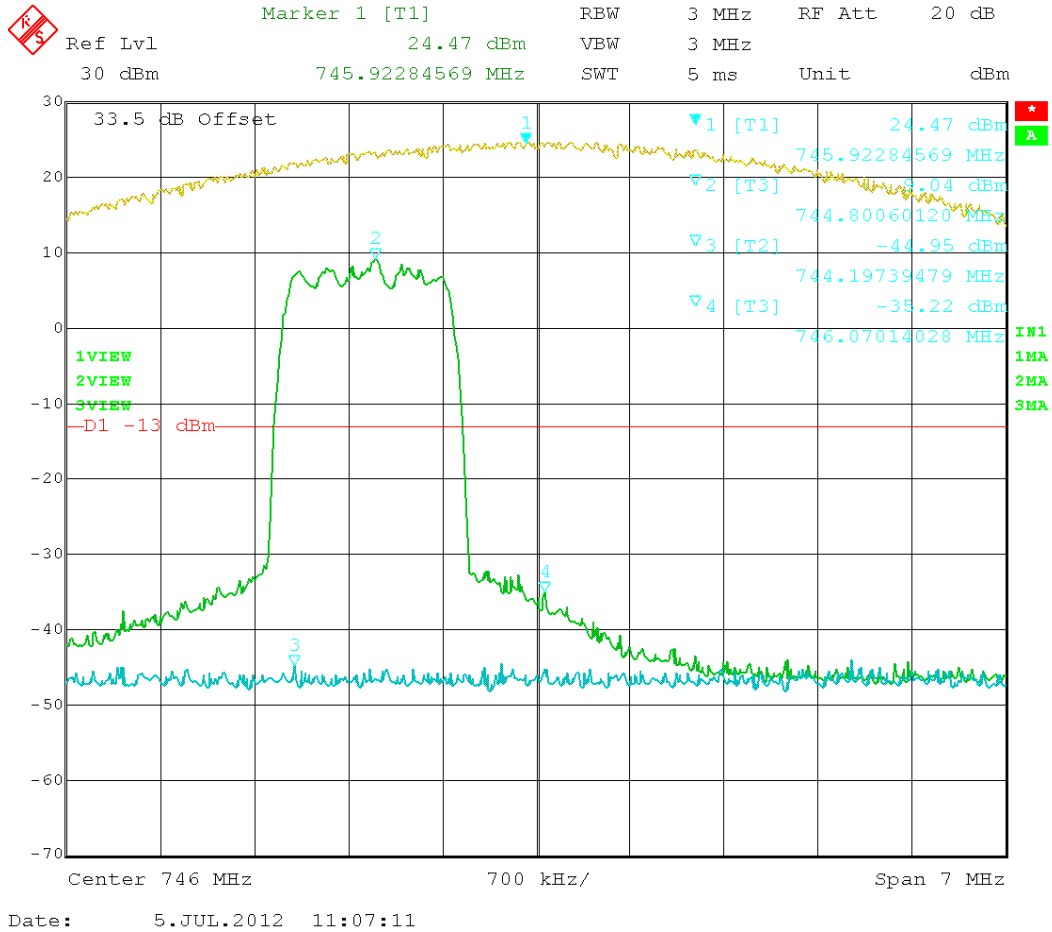


Figure 4: EVDO – In vs. Out 744.75MHz

Test Data Table 6 – HSPA 700 – Uplink/Downlink

Channel (MHz)	Bandedge Frequency (MHz)	Amplitude bandedge (dBm)	Limit (dBm)	Margin (dB)
700.5	697.84	-28.26	-13	15.26
713.5	716.20	-26.13	-13	13.13
730.5	727.84	-35.35	-13	22.35
743.5	746.12	-36.3	-13	23.3

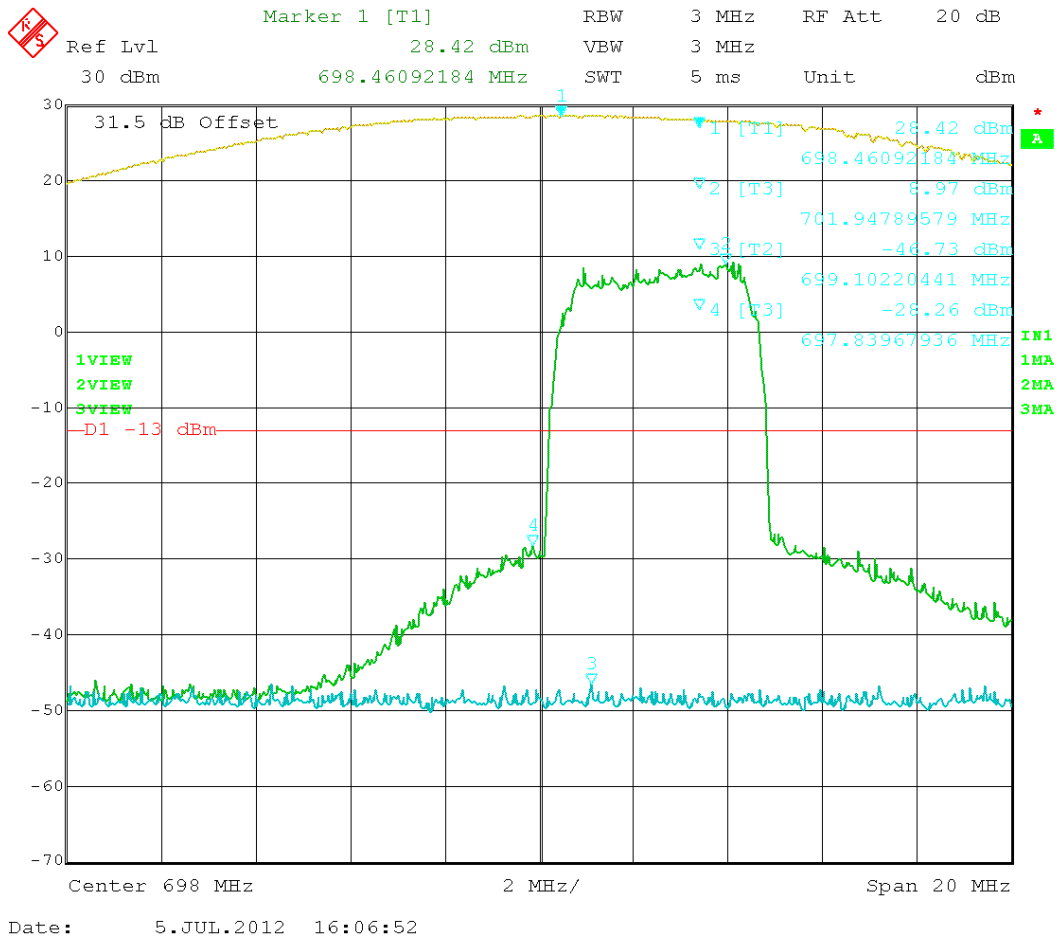


Figure 5: HSPA – In vs. Out 700.50 MHz



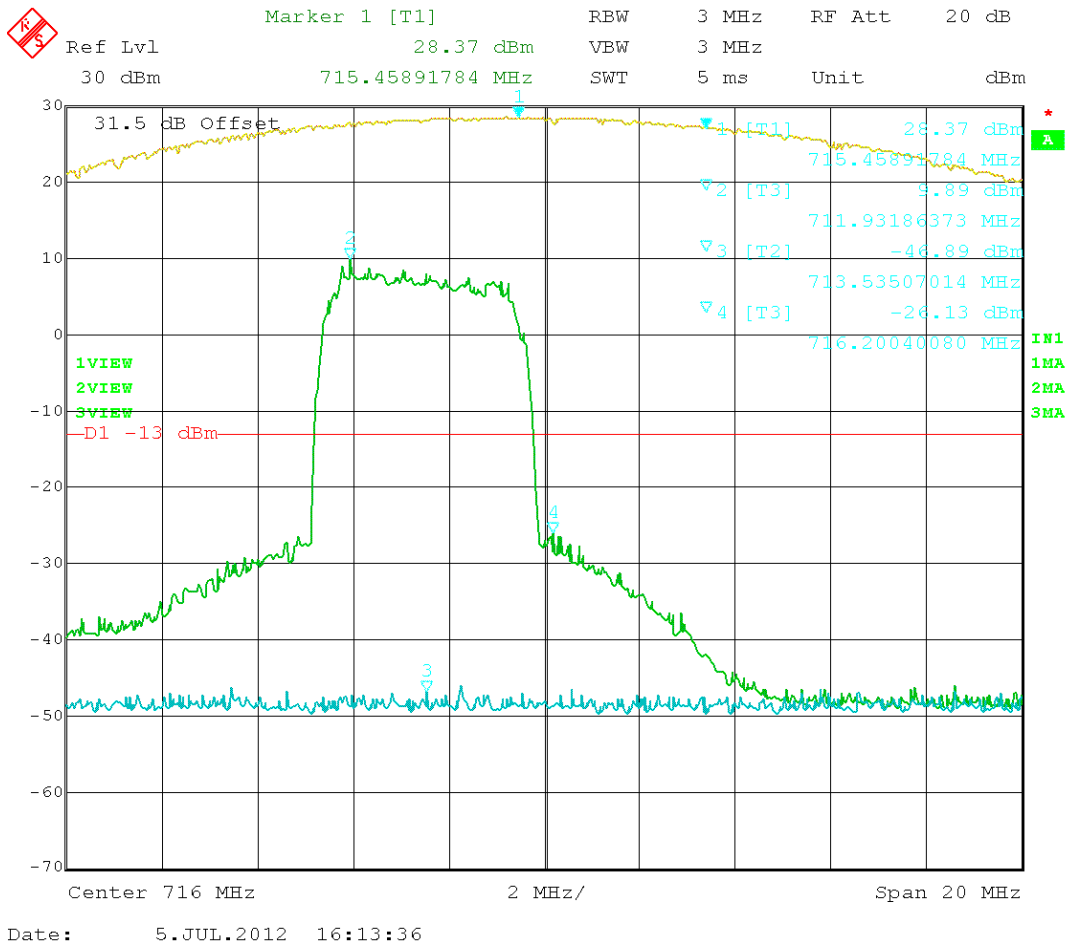


Figure 6: HSPA – In vs. Out 713.50 MHz

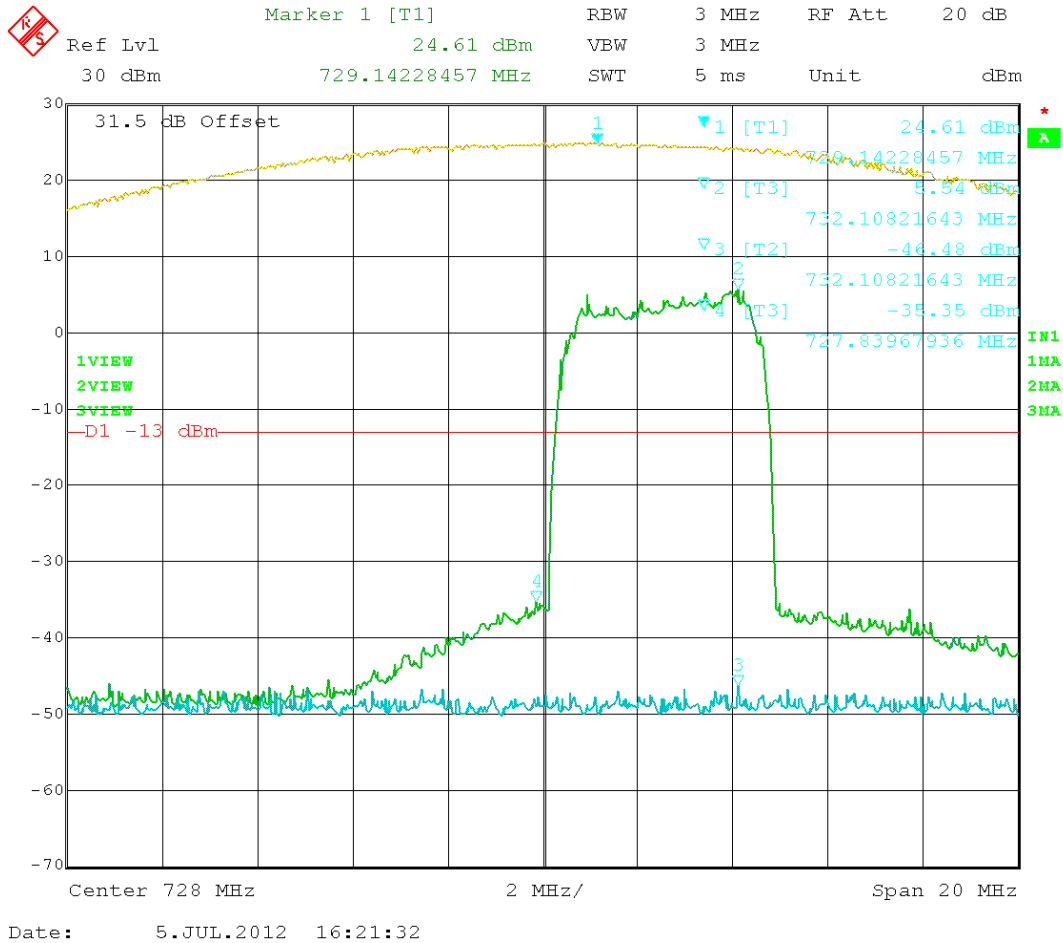


Figure 7: HSPA – In vs. Out 730.50 MHz

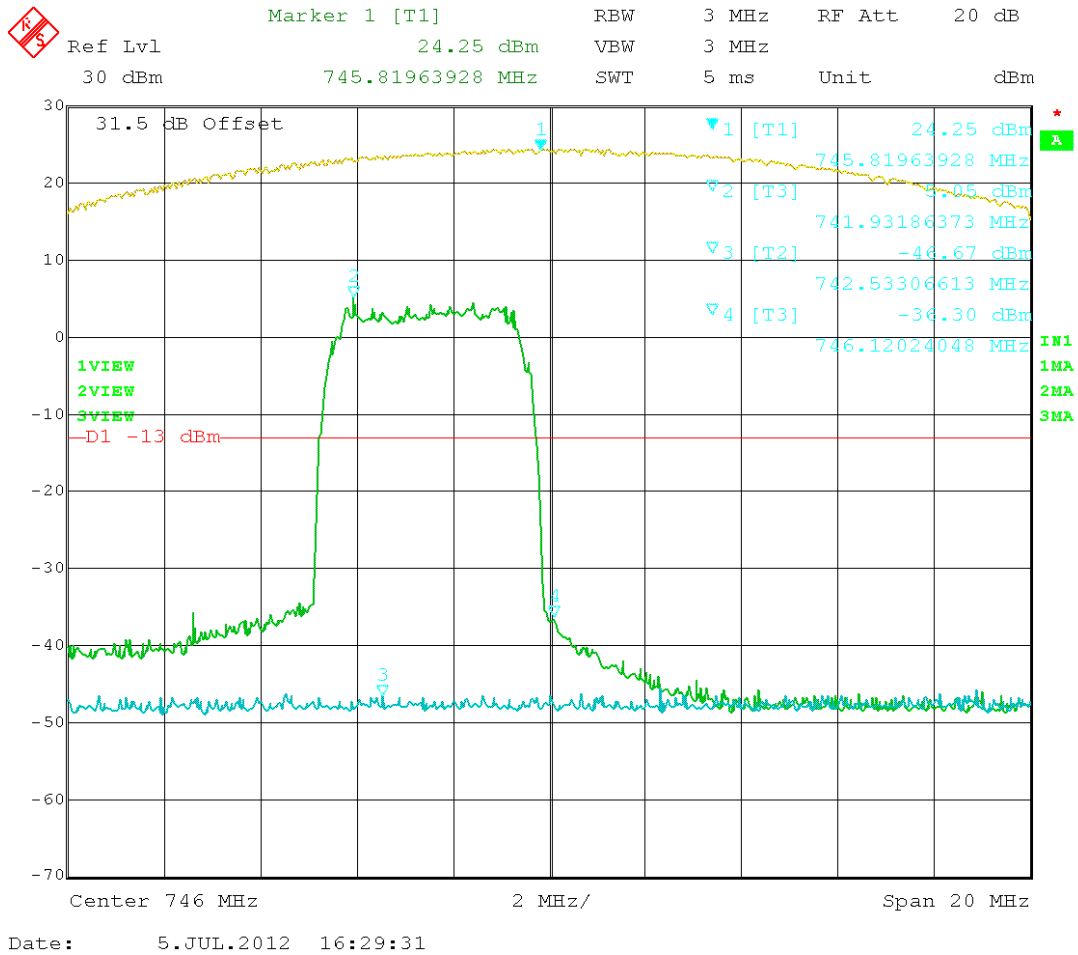


Figure 8: HSPA – In vs. Out 743.50 MHz

Test Data Table 7 – LTE 700 – Uplink/Downlink

Channel (MHz)	Band-edge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
703.0	697.68	-32.22	-13	19.22
711.0	716.4	-27.90	-13	14.9
733.0	727.6	-34.72	-13	21.72
741.0	746.4	-36.44	-13	23.44

The Reference level on the following plots was calibrated using a 3MHz RBW=VBW.

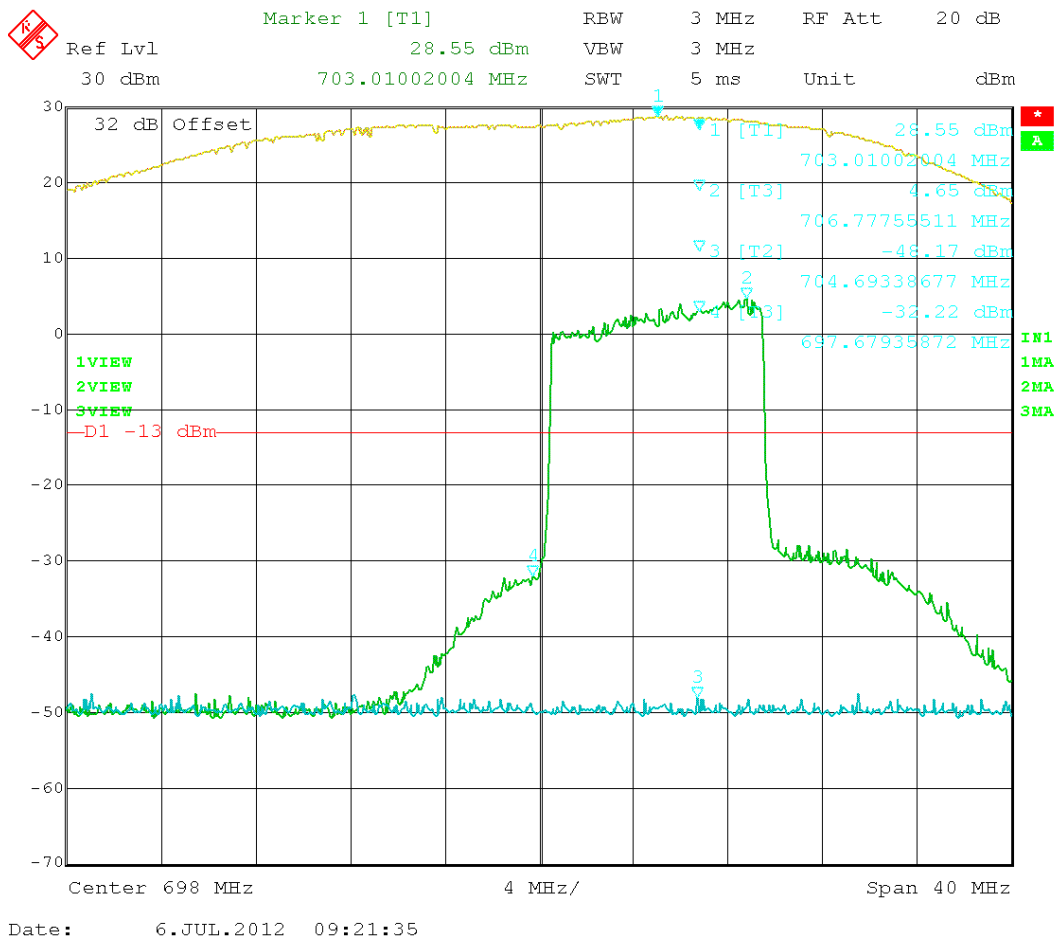


Figure 9: LTE – In vs. Out 703.00MHz

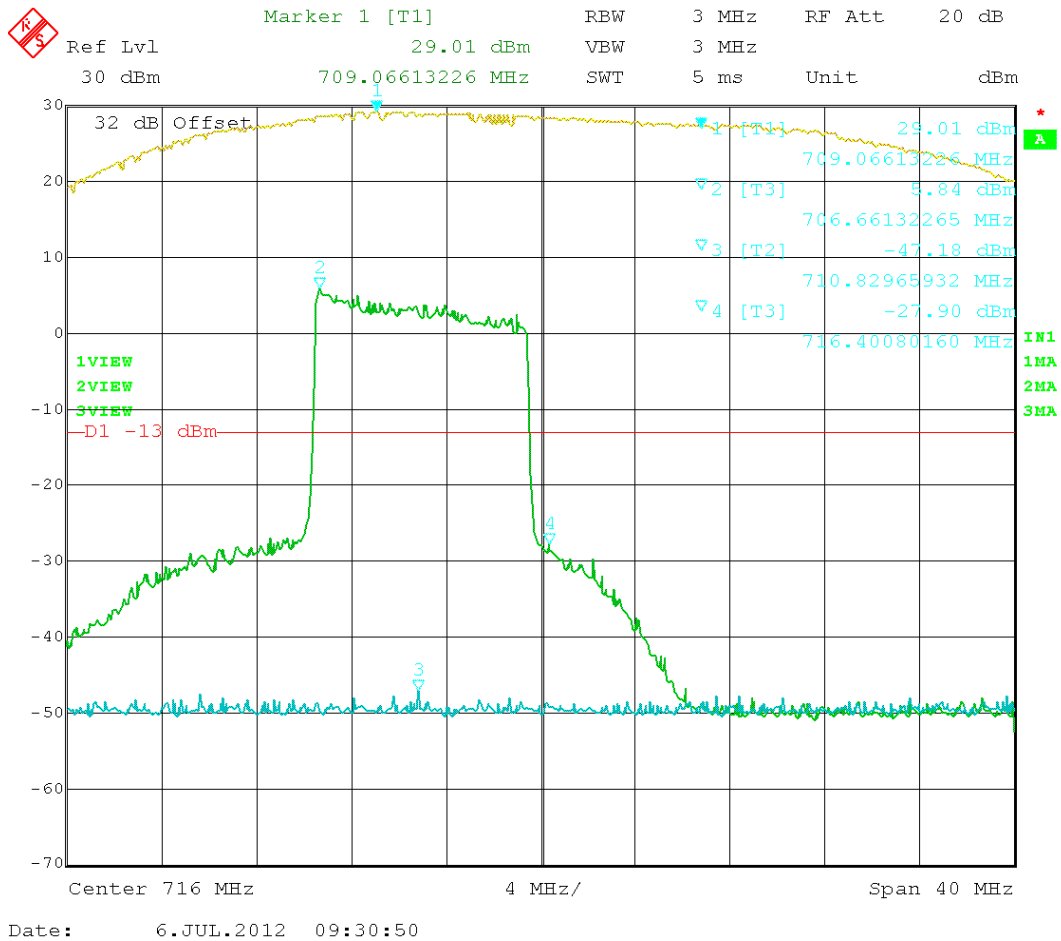


Figure 10: LTE – In vs. Out 711.00MHz

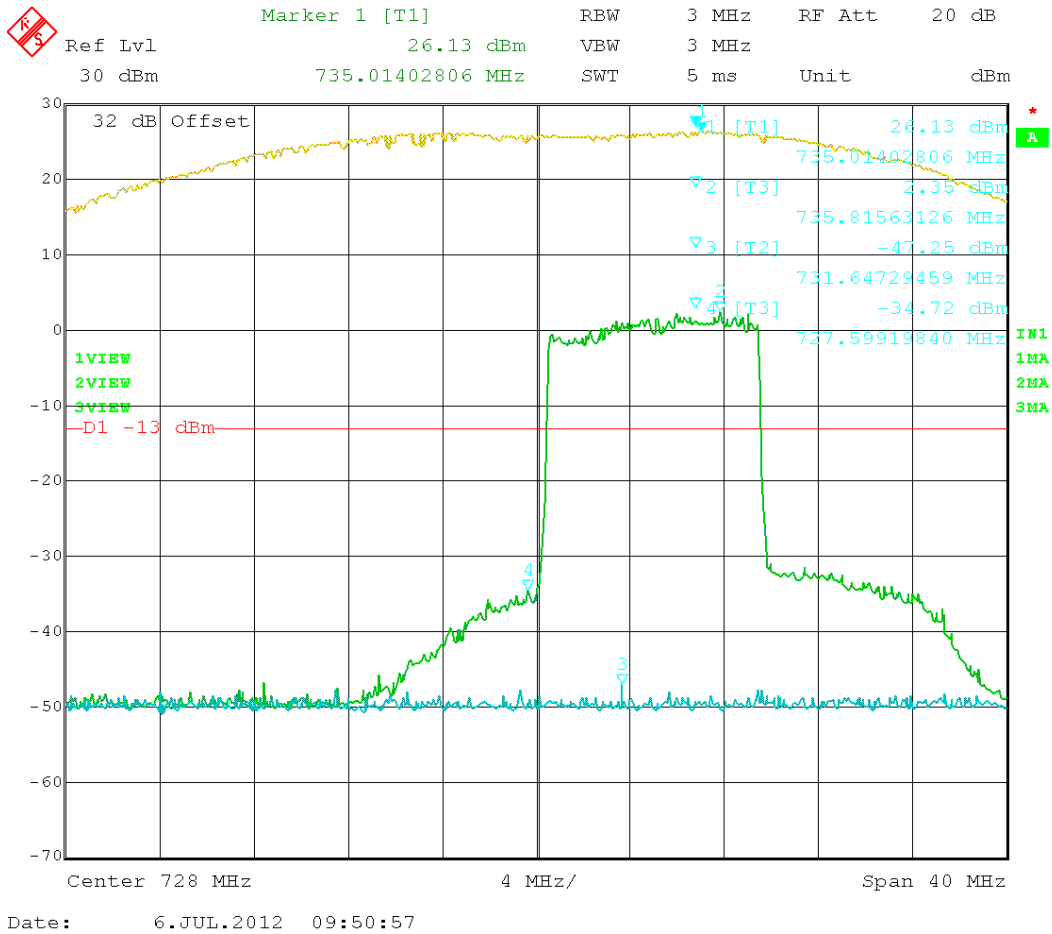


Figure 11: LTE – In vs. Out 733.00MHz

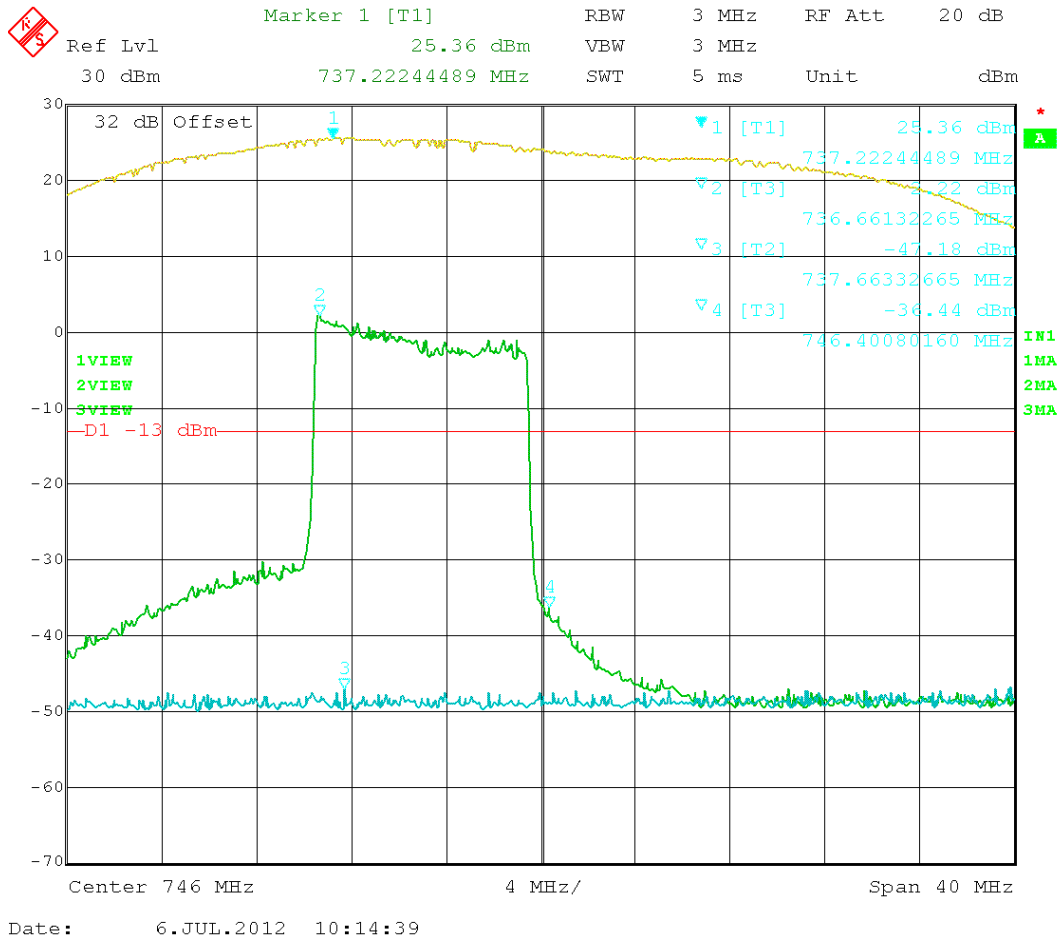


Figure 12: LTE – In vs. Out 741.00MHz

Test Data Table 8 – EDGE 700 – Uplink/Downlink

Channel (MHz)	Band-edge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
698.2	697.98	-16.68	-13	3.68
715.8	716.02	-18.08	-13	5.08
728.2	727.98	-21.84	-13	8.84
745.8	746.02	-26.42	-13	13.42

The Reference level on the following plots was calibrated using a 3MHz RBW=VBW.

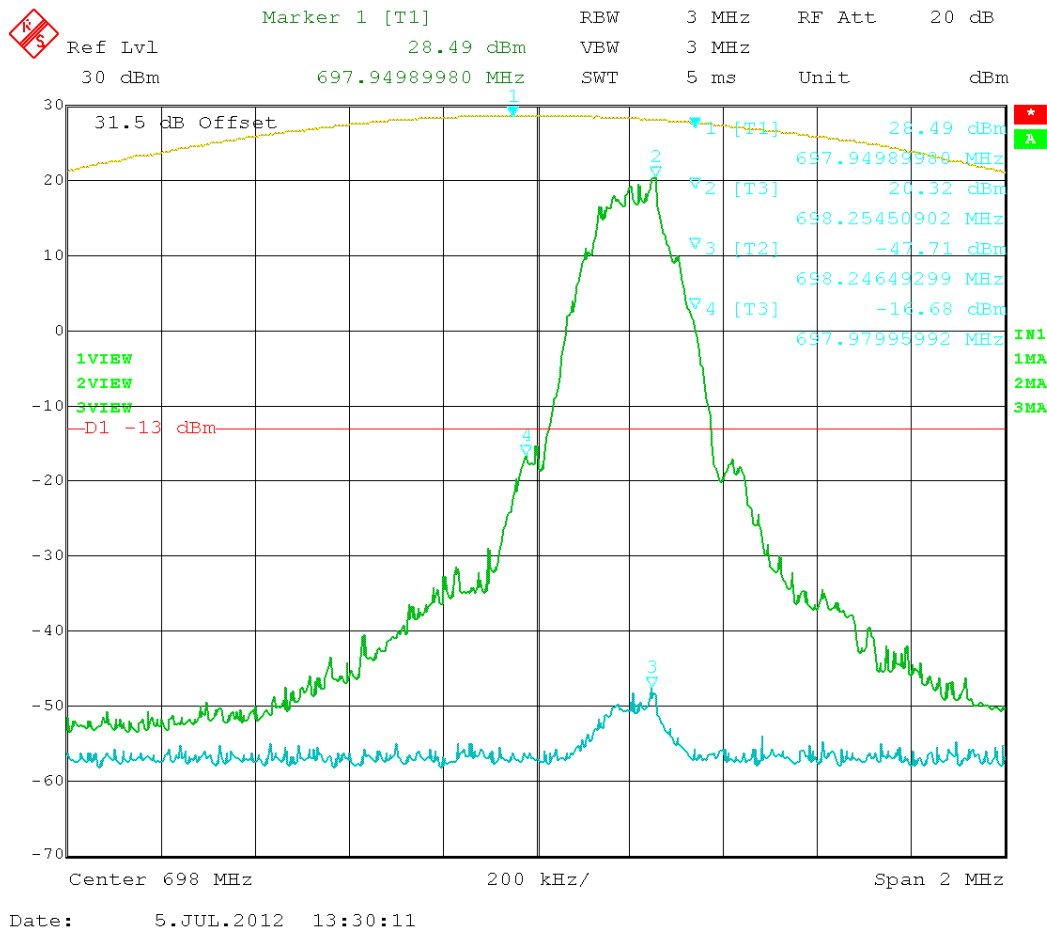


Figure 13: EDGE – In vs. Out 698.20MHz



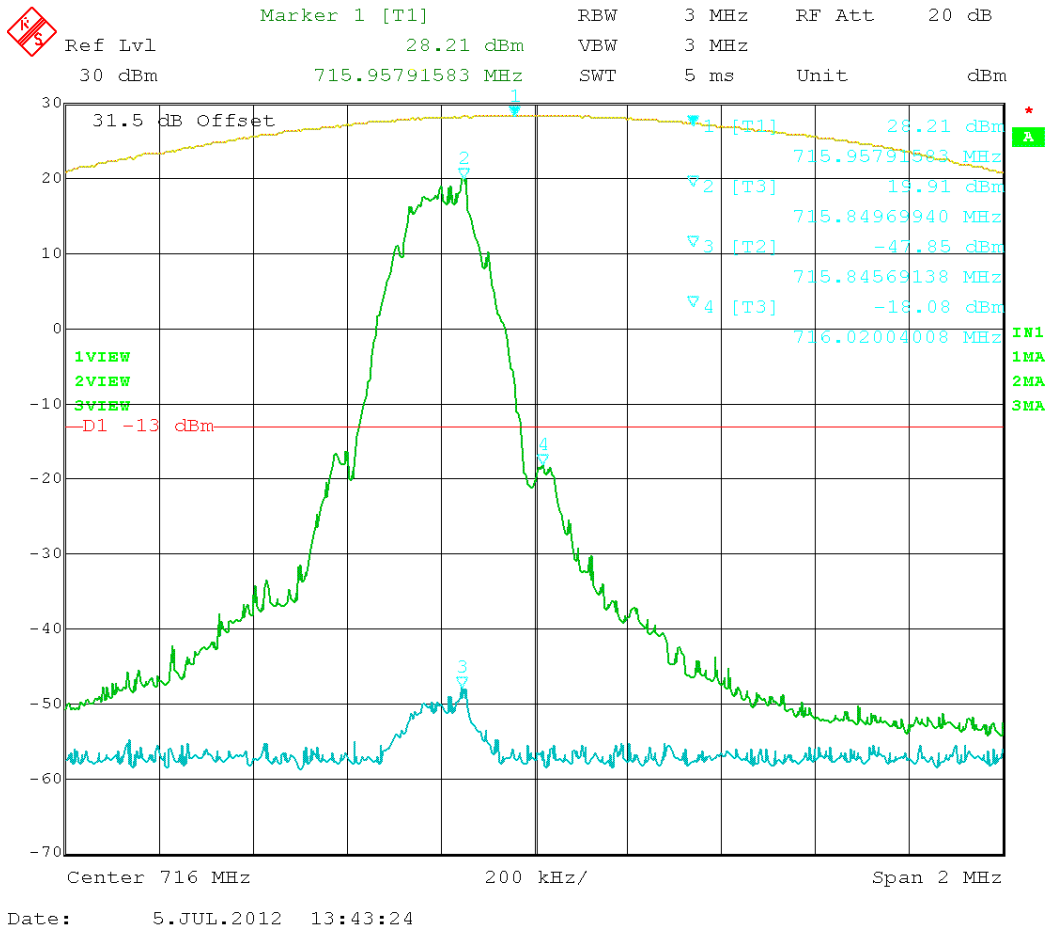


Figure 14: EDGE – In vs. Out 715.80MHz

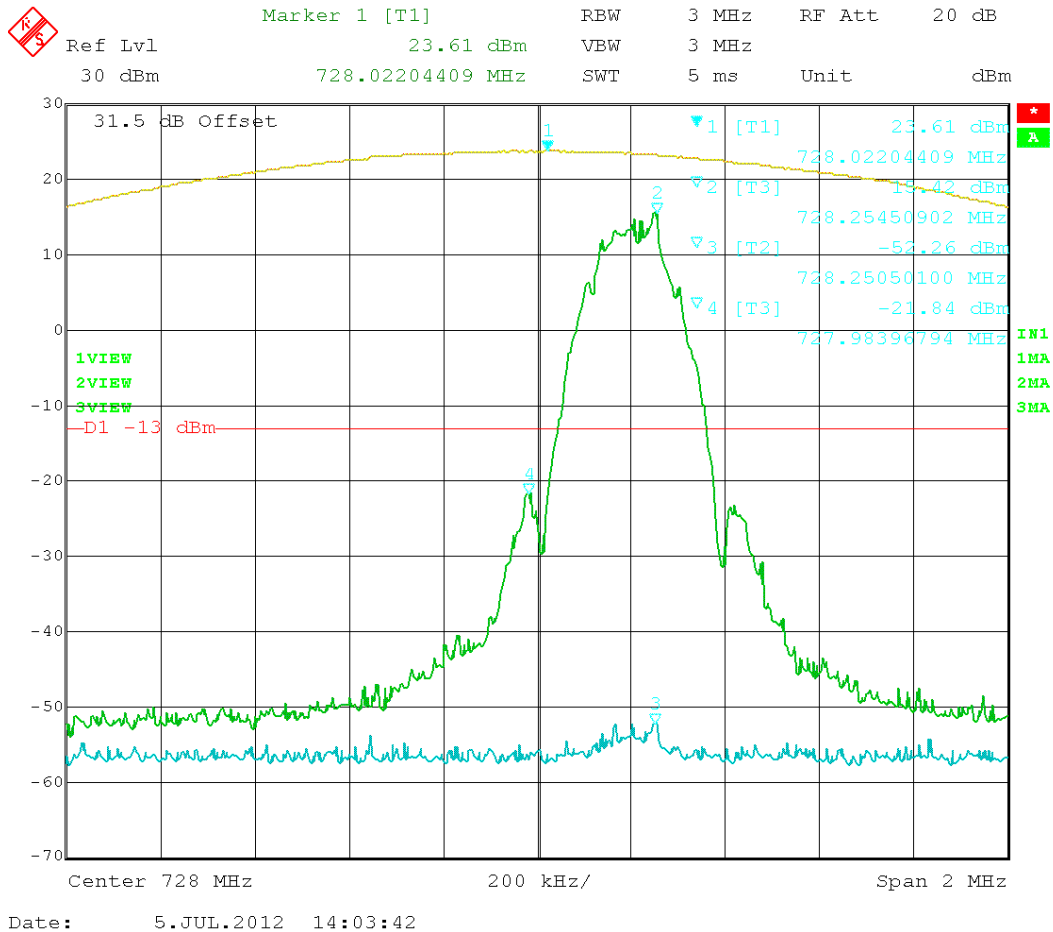


Figure 15: EDGE – In vs. Out 728.20MHz

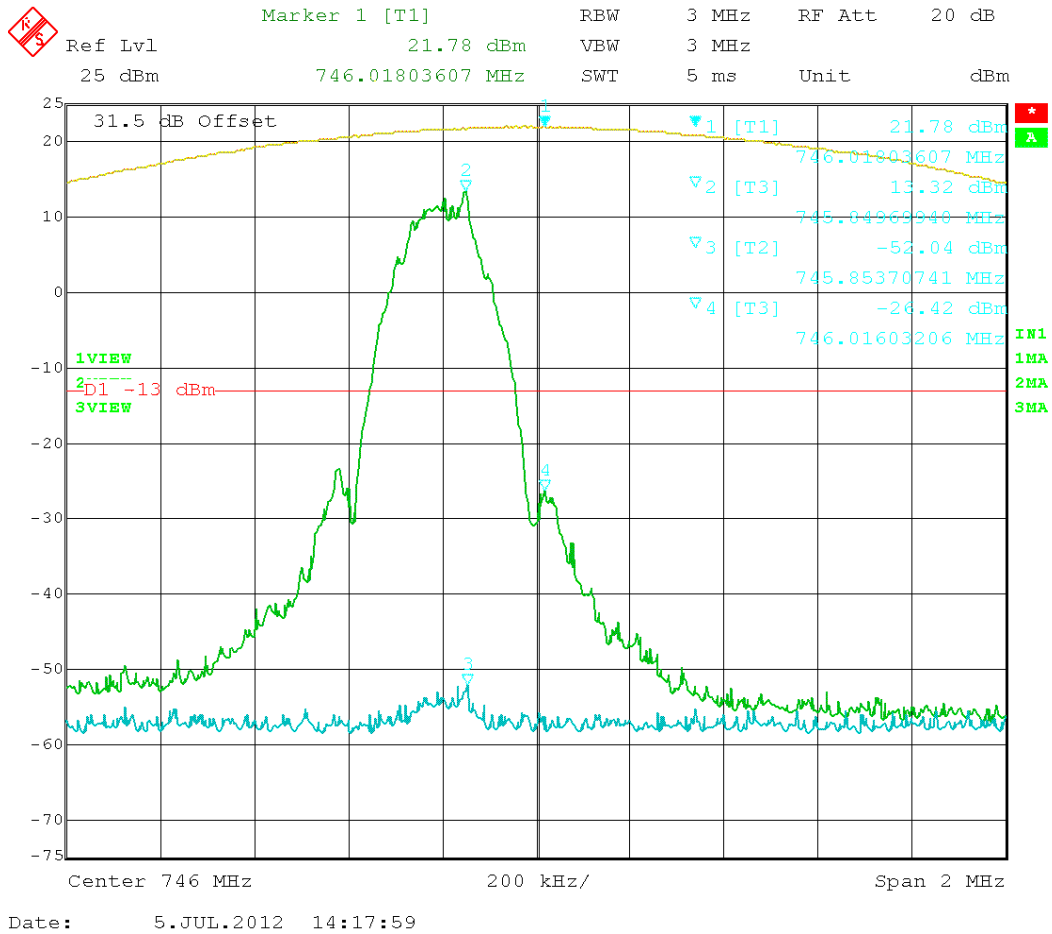


Figure 16: EDGE – In vs. Out 745.80MHz

## INTERMODULATION PRODUCT SPURIOUS EMISSIONS

Rule Parts No.: Pt 2.1051

**Requirements:** Emissions must be  $43 + 10 \log (P_o)$  dB below the mean power output of the transmitter or below the  $-13$ dBm

All the modulation types were tested using the three tone test method. A CW signal was use instead of GSM, EDGE, and F1D modulations. EDGE and GSM provided the same test results and only GSM data are presented in this report. The input power to the amplifier was set at maximum drive level by combining the three tones. The three tones were chosen in such a way (1)the third order intermodulation product frequencies are located within the pass band of the DUT and (2) they produce the worst-case emissions out of band.

**Test Data:** The DUT meets the requirements.

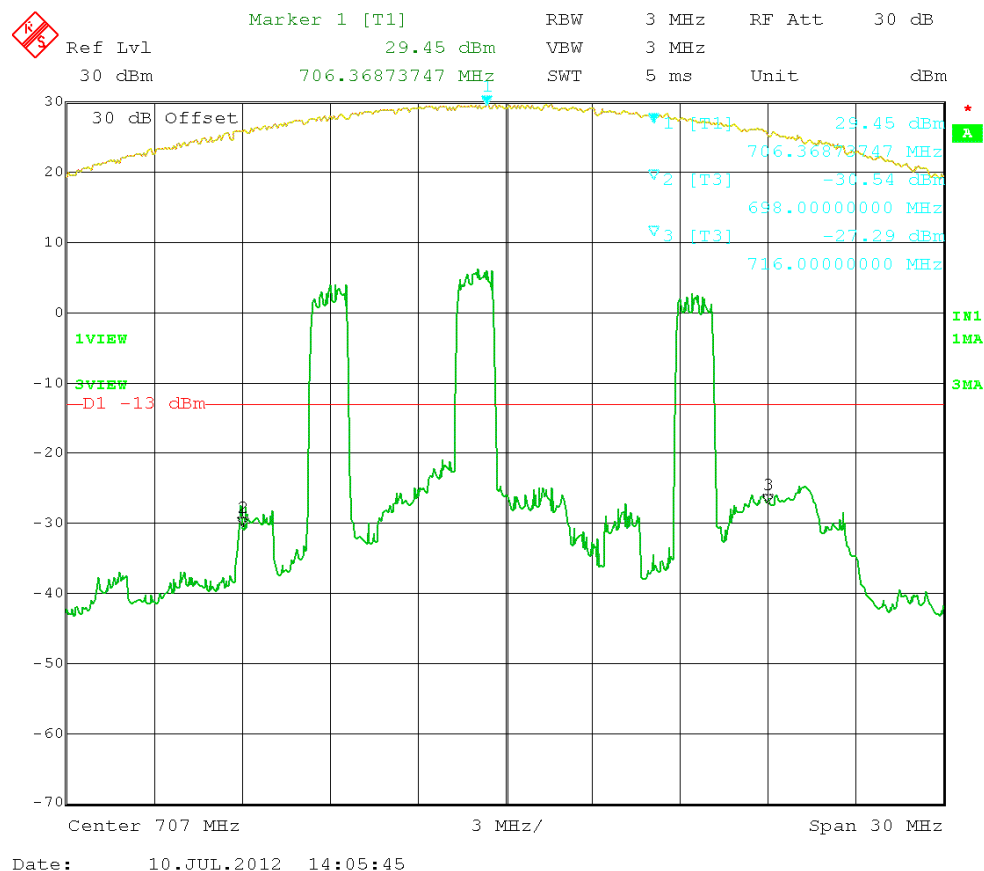


Figure 17: EVDO 3 tones intermodulation – (698 – 716) MHz.

Applicant: WILSON ELECTRONICS, INC.  
 FCC ID: PWO272570  
 Report: W\WILSON\_PWO\1097AUT12\1097AUT12TestReport.doc

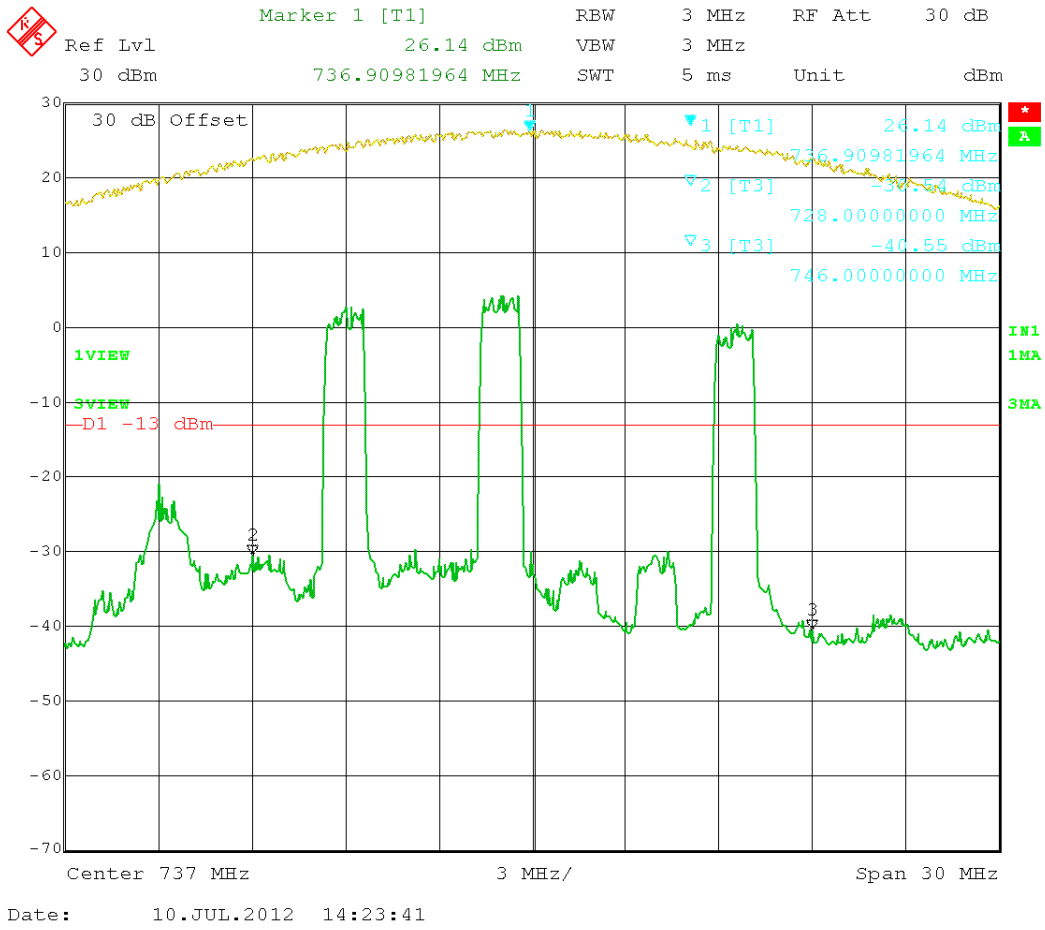


Figure 18: EVDO 3 tones intermodulation - (728 – 746) MHz.

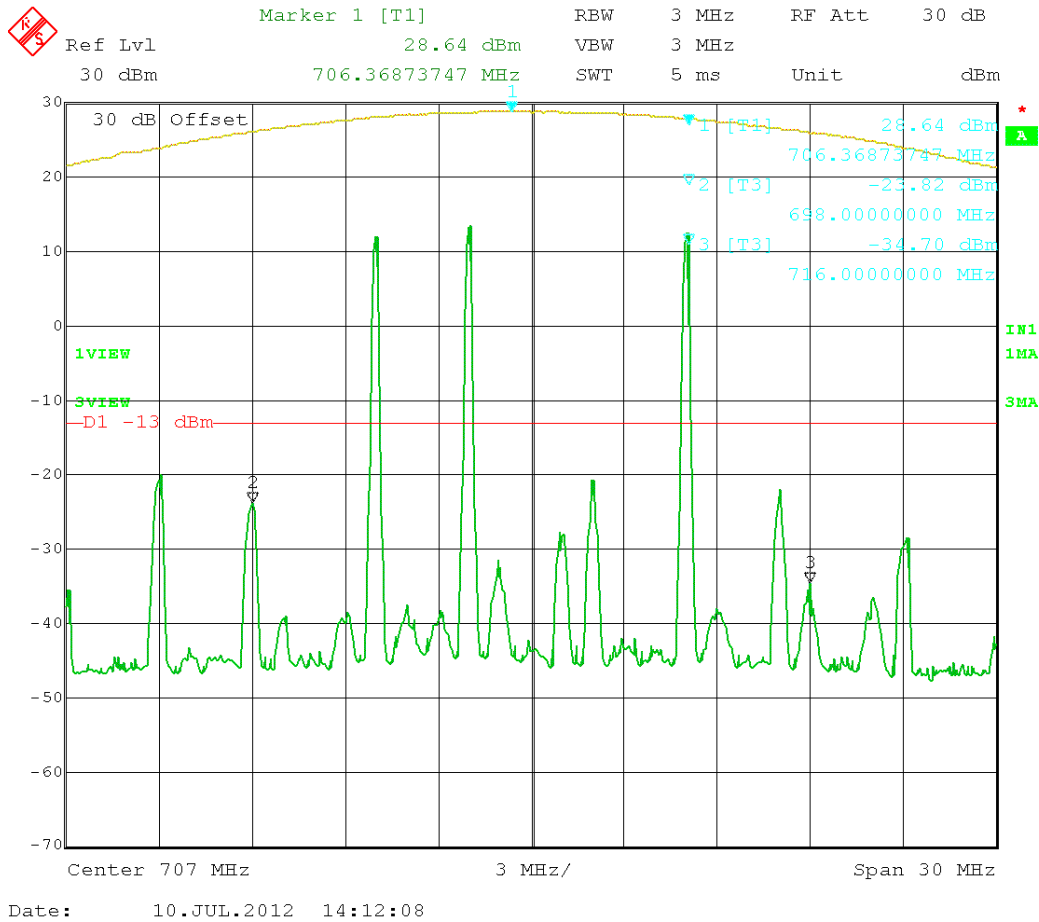


Figure 19: EDGE 3 tones intermodulation - (698 – 716) MHz

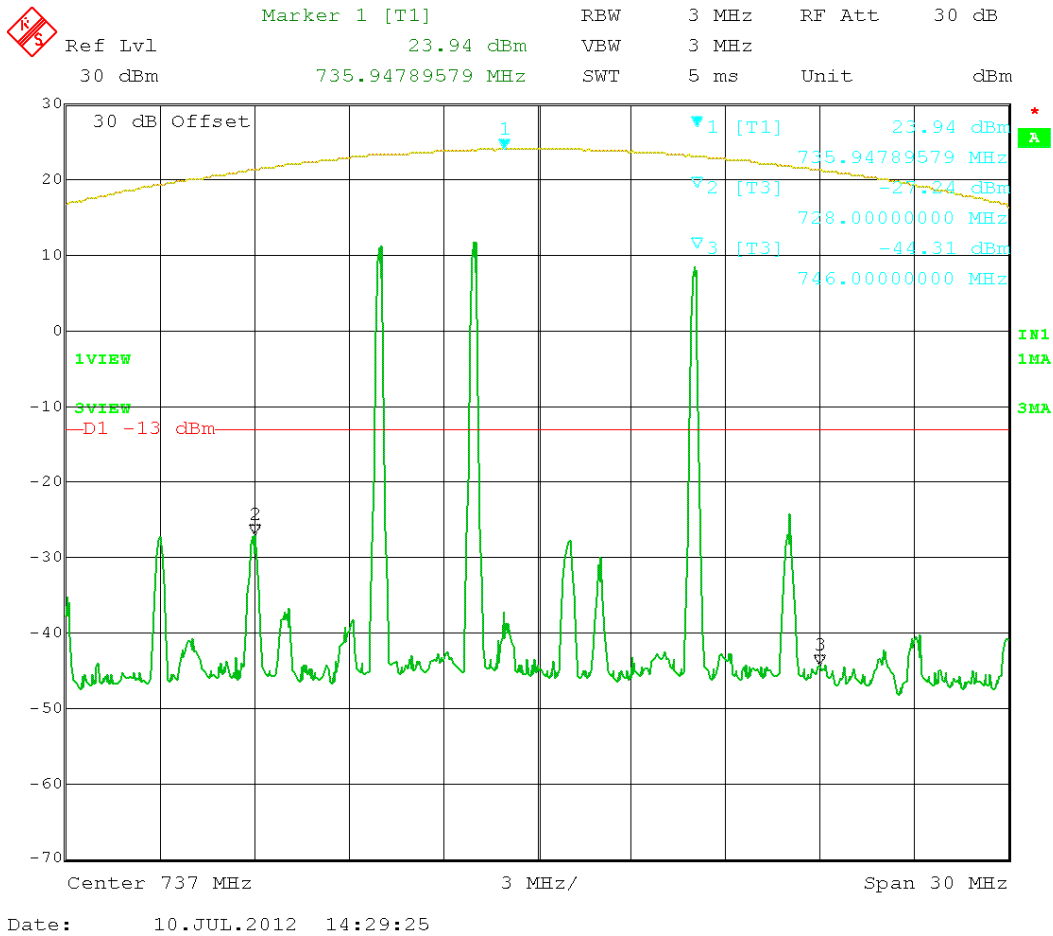


Figure 20: EDGE 3 tones intermodulation - (728 – 746) MHz

## SPURIOUS EMISSIONS AT ANTENNA TERMINALS

**Rule Parts No.:** Pt 2.1051

**Requirements:** Emissions must be  $43 + 10\log(P_o)$  dB below the mean power output of the transmitter:

$$698 - 716 \text{ MHz: } 43 + 10\log(1.00) = 43.0 \text{ dBc}$$

$$728 - 746 \text{ MHz: } 43 + 10\log(0.32) = 38.0 \text{ dBc}$$

**Test Result:** The DUT appears to meet the requirements.

Test Data Table 9 – Conducted Emissions – EVDO 700 - Uplink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
699.25	0	707.00	0	714.75	0
1398.50	76.0	1414.00	77.2	1429.50	75.5
2097.75	77.0	2121.00	78.1	2144.25	76.4
2797.00	74.7	2828.00	77.0	2859.00	73.8
3496.25	75.9	3535.00	76.7	3573.75	75.5
4195.50	NF	4242.00	NF	4288.50	NF
4894.75	NF	4949.00	NF	5003.25	NF
5594.00	NF	5656.00	NF	5718.00	NF
6293.25	NF	6363.00	NF	6432.75	NF
6992.50	NF	7070.00	NF	7147.50	NF

Test Data Table 10 – Conducted Emissions – EVDO 700 - Downlink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
729.25	0	737.00	0	744.75	0
1458.50	71.4	1474.00	75.3	1489.50	71.7
2187.75	72.6	2211.00	74.0	2234.25	72.6
2917.00	72.9	2948.00	74.8	2979.00	72.8
3646.25	72.3	3685.00	74.6	3723.75	72.7
4375.50	NF	4422.00	NF	4468.50	NF
5104.75	NF	5159.00	NF	5213.25	NF
5834.00	NF	5896.00	NF	5958.00	NF
6563.25	NF	6633.00	NF	6702.75	NF
7292.50	NF	7370.00	NF	7447.50	NF

Applicant: WILSON ELECTRONICS, INC.  
 FCC ID: PWO272570  
 Report: W\WILSON\_PWO\1097AUT12\1097AUT12TestReport.doc



Test Data Table 11 – Conducted Emissions – EDGE 700 – Uplink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
698.20		707.00		715.80	
1396.40	82.2	1414.00	85.8	1431.60	85.0
2094.60	82.1	2121.00	85.5	2147.40	83.6
2792.80	84.8	2828.00	83.2	2863.20	78.9
3491.00	87.3	3535.00	87.3	3579.00	84.6
4189.20	NF	4242.00	83.7	4294.80	NF
4887.40	NF	4949.00	NF	5010.60	NF
5585.60	NF	5656.00	NF	5726.40	NF
6283.80	NF	6363.00	83.7	6442.20	NF
6982.00	NF	7070.00	NF	7158.00	NF

Test Data Table 12 – Conducted Emissions – EDGE 700 - Downlink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
728.20		737.00		745.80	
1456.40	80.1	1474.00	82.7	1491.60	79.7
2184.60	81.6	2211.00	83.3	2237.40	79.3
2912.80	81.8	2948.00	83.4	2983.20	79.9
3641.00	83.1	3685.00	81.8	3729.00	79.1
4369.20	81.2	4422.00	81.4	4474.80	80.2
5097.40	NF	5159.00	NF	5220.60	NF
5825.60	NF	5896.00	NF	5966.40	NF
6553.80	NF	6633.00	NF	6712.20	NF
7282.00	NF	7370.00	NF	7458.00	NF

**FIELD STRENGTH OF SPURIOUS EMISSIONS**

**Rule Parts No.:** Pt 2.1053

**Requirements:** Emissions must be 43+10log(Po) dB below the mean power output of the amplifier:

$$43 + 10\log(1.00) = 43.0 \text{ dB}$$

$$43 + 10\log(0.32) = 38.0 \text{ dB}$$

**Test Result:** The test data indicates the DUT meets the requirements

Test Data Table 13 – Radiated Emissions – CW (700 MHz) – Uplink /Downlink

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)	Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
707.00	0	0	737.00	0	0
1414.00	H	82.2	1474.00	V	80.00
2121.00	H	76.2	2211.00	V	76.60
2828.00	V	82.1	2948.00	V	74.40
3535.00	V	79.8	3685.00	V	74.10
4242.00	V	80.6	4422.00	V	73.50
4949.00	H/V	NF	5159.00	H/V	NF
5656.00	H/V	NF	5896.00	H/V	NF
6363.00	H/V	NF	6633.00	H/V	NF
7070.00	H/V	NF	7370.00	H/V	NF

Notes: \*No other emissions were found up to the 10<sup>th</sup> harmonics - NOISE FLOOR

### OUT OF BAND REJECTION: FREQUENCY RESPONSE

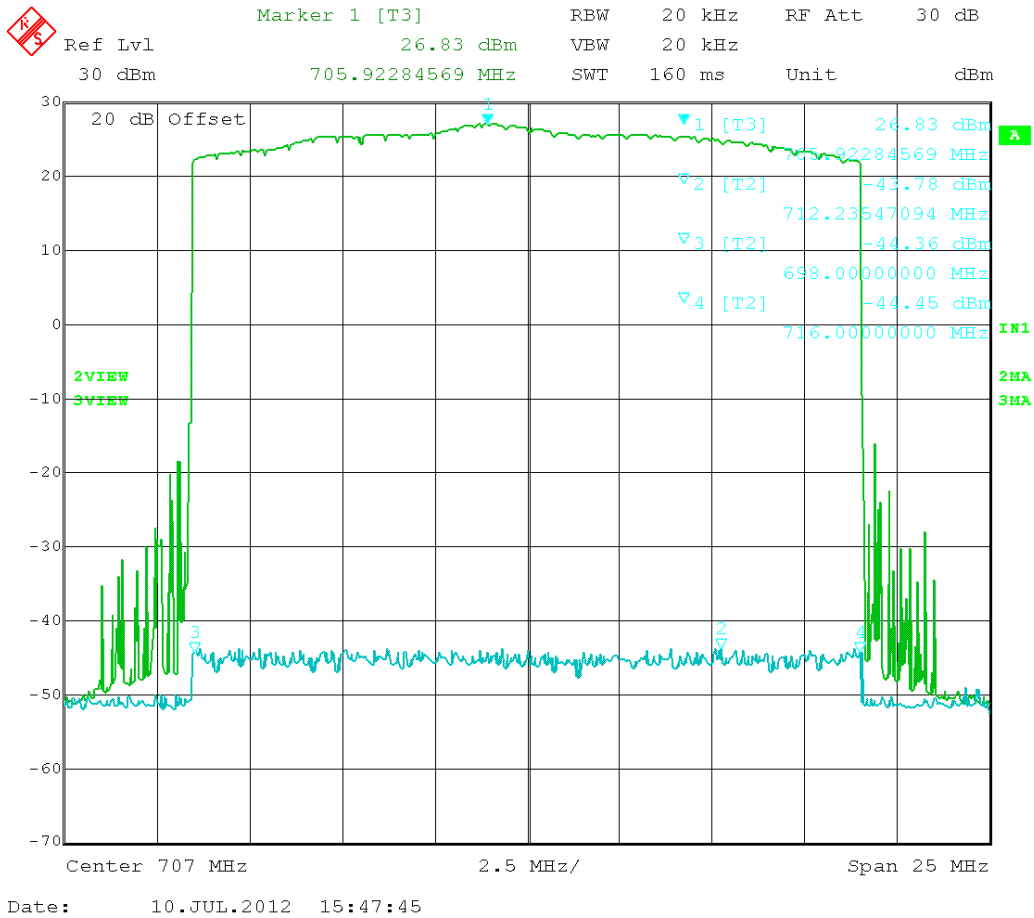


Figure 21. Frequency response (698 – 716) MHz band

Input	-43.78
Output	26.83
Pass Band Gain	70.61

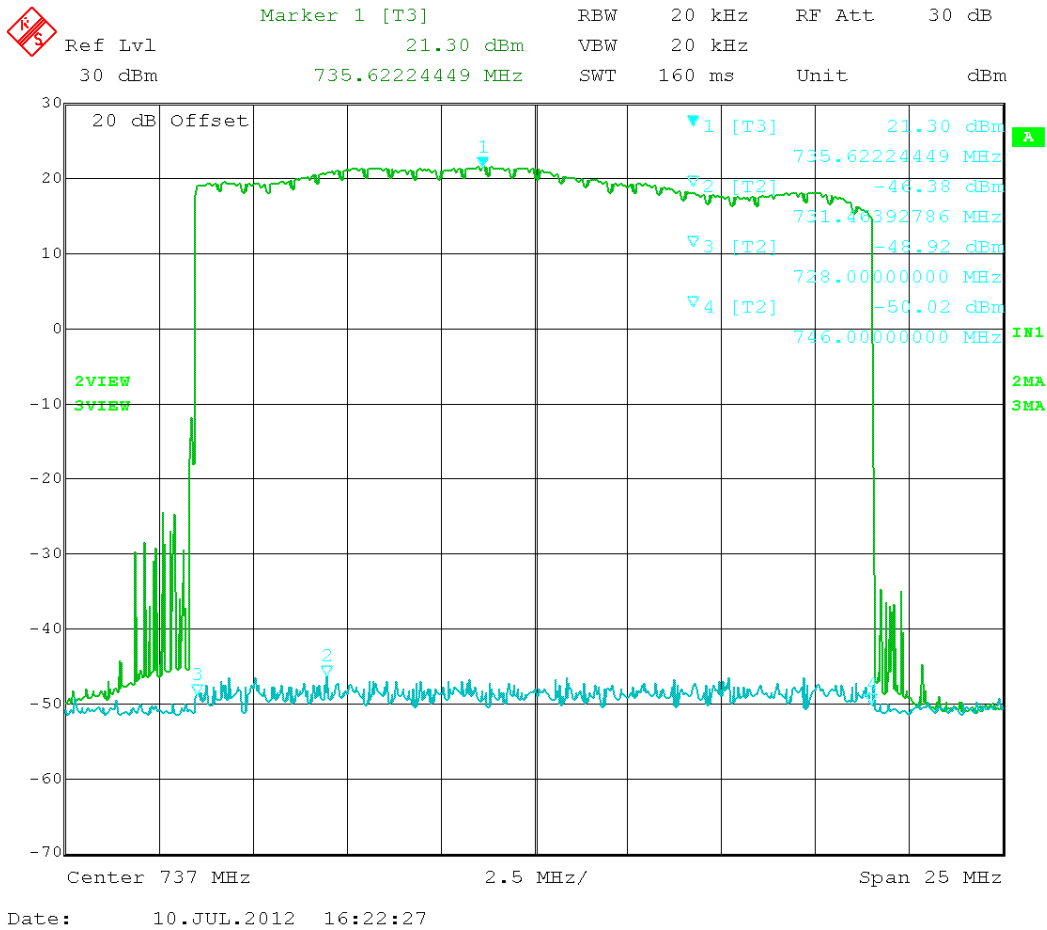


Figure 22. Frequency response (728 - 746) MHz band

Input	-46.38
Output	21.30
Pass Band Gain	67.68