



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: TEI@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

INDUSTRY CANADA RSS-131 AND FCC PART 22H TEST REPORT

Applicant	WILSON ELECTRONICS, INC.
Address	3301 E. DESERET DRIVE ST. GEORGE UTAH 84790 USA
FCC ID	PWO277180
IC Label	IC: 4726A-277180
Model Number	277180
Product Description	BI-DIRECTIONAL SIGNAL BOOSTER AMPLIFIER
Date Sample Received	6/16/2011
Date Tested	6/28/2011
Tested By	Nam Nguyen
Approved By	Mario de Aranzeta
Report No.	1329AT11TestReport.doc
Test Results	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



Test Certificate #0955-01



TABLE OF CONTENTS

ATTESTATION STATEMENT 3

REPORT SUMMARY 4

TEST ENVIRONMENT 4

TEST SETUP 4

DEVICE UNDER TEST INFORMATION 5

EQUIPMENT LIST 6

TEST PROCEDURE 7

RF POWER OUTPUT 10

 Test Data Table 1 – Output Power – CDMA 800 – Uplink/Downlink 10

 Test Data Table 2 – Output Power – EDGE 800 – Uplink/Downlink 10

 Test Data Table 3 – Output Power – GSM 800 – Uplink/Downlink 10

 Test Data Table 4– Output Power – WCDMA 800 – Uplink/Downlink 10

INPUT/OUTPUT MODULATED AMPLITUDE COMPARISON AND BAND-EDGES COMPLIANCE 11

 Test Data Table 5 – CDMA 800 – Uplink/Downlink..... 12

 Test Data Table 6 – WCDMA 800 – Uplink/Downlink..... 16

 Test Data Table 7 – EDGE 800 – Uplink/Downlink 20

 Test Data Table 8 – GSM 800 – Uplink/Downlink 24

INTERMODULATION PRODUCT SPURIOUS EMISSIONS 28

SPURIOUS EMISSIONS AT ANTENNA TERMINALS..... 33

 Test Data Table 9 – Conducted Emissions – CDMA 800 - Uplink..... 33

 Test Data Table 10 – Conducted Emissions – CDMA 800 - Downlink 33

 Test Data Table 11 – Conducted Emissions – GSM 800 – Uplink..... 34

 Test Data Table 12 – Conducted Emissions – GSM 800 - Downlink..... 34

OUT OF BAND REJECTION: FREQUENCY RESPONSE 35

FIELD STRENGTH OF SPURIOUS EMISSIONS 37

 Test Data Table 13 – Radiated Emissions – CW – Uplink /Downlink 37

MEAN OUTPUT POWER FOR MULTI-CHANNEL ENHANCER (FOR IC ONLY) . 38

 Test Data Table 14 – Mean Power 38

PASSBAND GAIN AND BANDWIDTH (FOR IC ONLY) 39

ATTESTATION STATEMENT

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report. All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025:2005 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45, Newberry, Florida 32669.

Authorized Signatory Name: Mario de Aranzeta



Signature:

Function: Engineer

Date: 7/25/2011

REPORT SUMMARY

Disclaimer	The test results relate only to the items tested.
Report Purpose	The DUT comply with FCC Part 22H and Industry Canada RS-131 requirements for a dual band signal amplifier.
Applicable Rule Part(s)	Pt 22, Pt 15.109, RSS-131
Test Procedure(s)	ANSI/TIA-603-C: 2004

TEST ENVIRONMENT

Test Facilities	All required tests were performed by Timco Engineering Inc. that is located at 849 NW State Road 45 Newberry, FL 32669.
Test Conditions	Temperature: 26°C Relative Humidity: 50%

TEST SETUP

Deviation to the rules	There was no deviation from the test standards.
Modification to the DUT	No modification was made to the DUT.
Test Exercise (e.g. software description, test signal, etc.)	The DUT was placed in continuous transmit mode of operation.

DEVICE UNDER TEST INFORMATION

Manufactured by	WILSON ELECTRONICS, INC.
DUT Description	BI-DIRECTIONAL SIGNAL BOOSTER AMPLIFIER
FCC ID	PWO277180
IC Label	IC: 4726A-277180
Model Name	277180
Operating Frequency	Uplink 824 – 845 MHz Downlink 869 – 890 MHz
Emission Designators	F9W (CDMA & WCDMA), GXW (GSM), G7W (EDGE)
Modulation(s)	CDMA, WCDMA, GSM, EDGE, HSPA, EVDO
User Power Range & Control	There are NO user power controls
Test Item	Pre-Production
DC Voltage and Current into final amplifier	Power Into Final Amplifier (uplink) Vcc = 4.5 Vdc, 0.5A Power Input (downlink) Vcc= 4.5 Vdc, 0.3A
Type of Equipment	Fixed and Mobile

EQUIPMENT LIST


Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 3/10/10	3/10/12
AC Voltmeter	HP	400FL	2213A14499	CAL 3/23/09	3/23/12
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 6/10/09	6/10/12
Frequency Counter	HP	5385A	3242A07460	CAL 5/26/09	5/26/12
Hygro-Thermometer	Extech	445703	0602	CAL 1/30/09	1/30/12
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/26/09	5/26/12
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/18/09	5/18/12
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/10	4/25/12

TEST PROCEDURE

RF Power Output

RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal voltage and the amplifier properly adjusted the RF output measures.


RF Output Power Test Setup Diagram

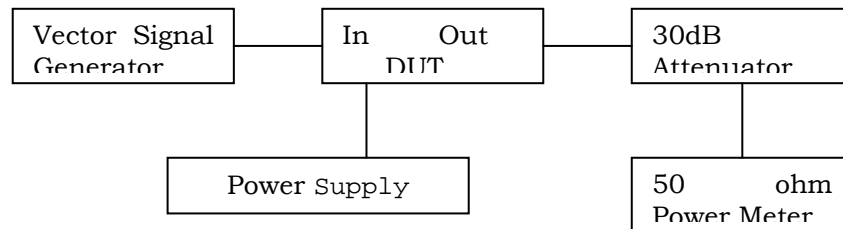

Input/Output Modulated Amplitude Comparison And Band-Edges Compliance

On the following plot, the reference level was calibrated using a resolution bandwidth wider than the emission bandwidth. First the gain was measured for the maximum output power. Then for each frequency and type of modulation, an attenuation equals to the gain of the amplifier was added on the measurement side of the amplifier, as to overlay the input versus output modulated envelope.

Test Setup Diagram

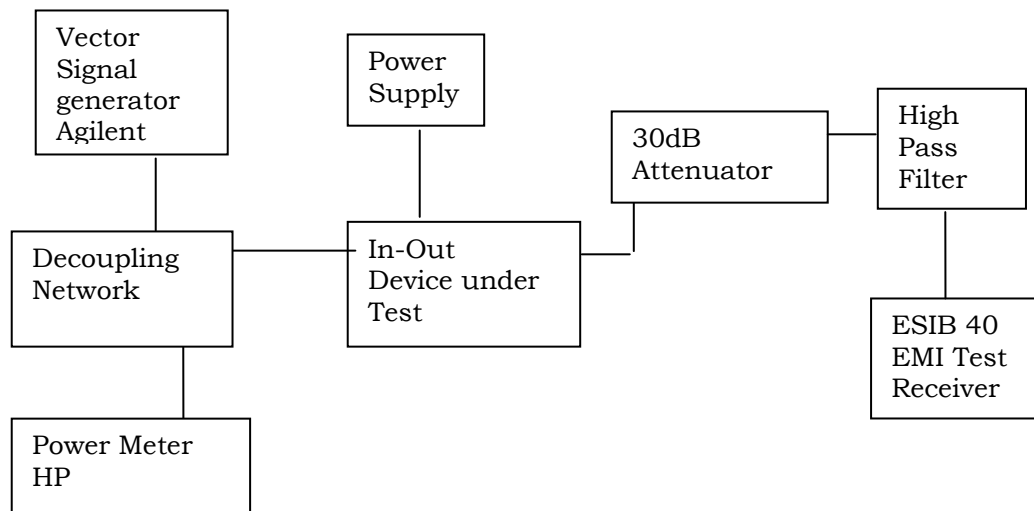


[Continued]

Intermodulation Product Spurious Emissions

The procedure used was ANSI/TIA-603-C: 2004. The spectrum was scanned from 9kHz to at least the tenth harmonic of the fundamental using a HP 8566B spectrum analyzer.

The modulation type was tested using the two-tone / three tone test method. The input power to the amplifier was set at maximum drive level by combining the two tones. The two tones were chosen in such a way (1) the third order intermodulation product frequencies are located within the pass band of the DUT and (2) they produce the worst-case emissions out of band.

Setup Diagram

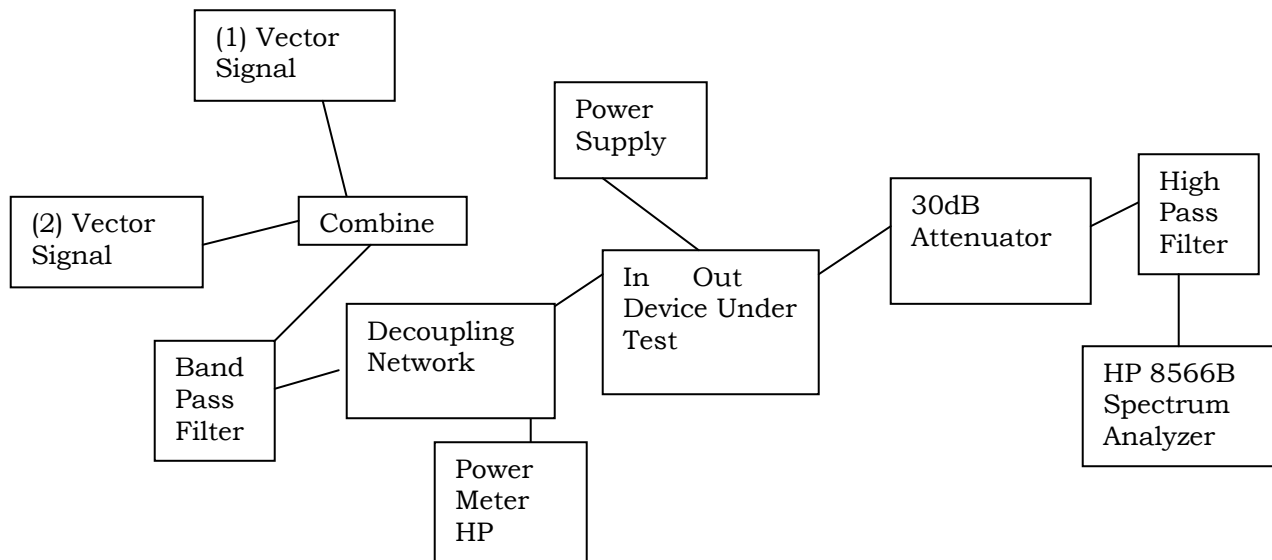


Spurious Emissions at Antenna Terminals

The procedure used was ANSI/TIA-603-C: 2004. The spectrum was scanned from 9kHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer.

Data on the following page shows the level of conducted spurious responses. For analog modulation, the carrier was modulated 100% using a 2500 Hz tone. For digital modulation, the carrier is modulated to its maximum extent. The spectrum was scanned from 9 kHz to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA-603-C: 2004. The maximum input power was set for each test.

[Continued]


Conducted Spurious Emissions Test Setup Diagram

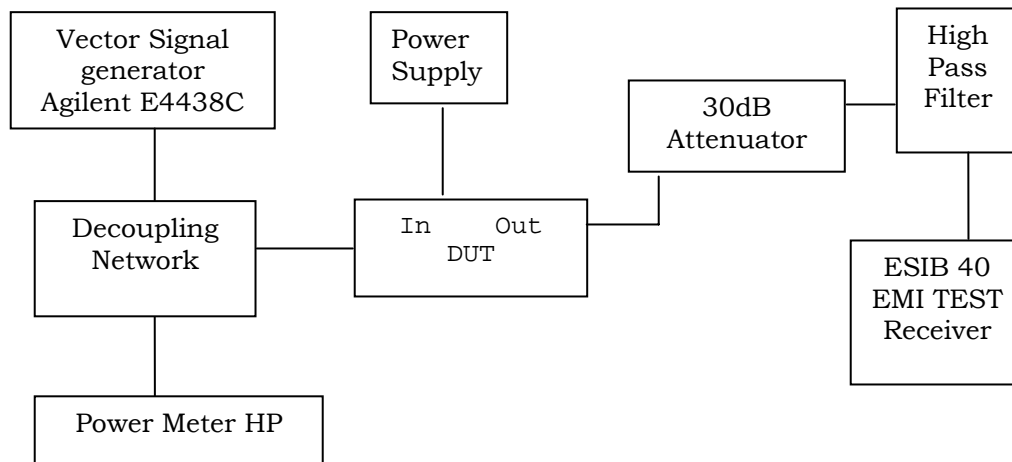

Radiated Spurious Emissions

The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. The CW signal was used to perform this test. This test was conducted per ANSI/TIA-603-C: 2004 using the substitution method.

Radiated Spurious Emissions Test Setup Diagram

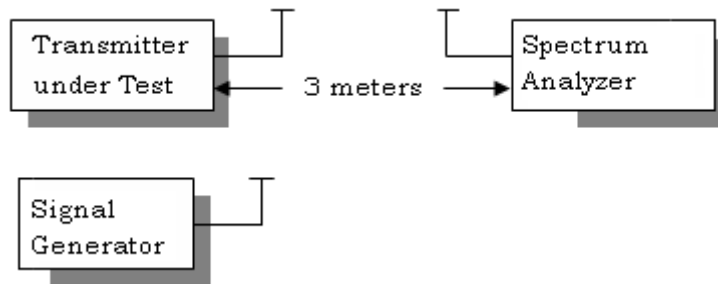

Equipment placed 80 cm above ground on a rotating table platform.

RF POWER OUTPUT

Rule Part(s) No.: Pt 2.1046(a)

Requirements: Pt 2.1046(a)

Test Result: As the following table indicates.

Test Data Table 1 – Output Power – CDMA 800 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)	Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
825.25	-45.4	29.7	933	870.25	-46.2	29.7	933
836.00	-46.6	29.5	891	881.00	-46.7	29.8	955
843.75	-47.6	29.6	912	888.75	-47.7	29.4	871

Test Data Table 2 – Output Power – EDGE 800 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)	Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
824.20	-38.2	28.8	759	869.20	-40.2	28.7	741
836.00	-43.7	29.1	813	881.00	-43.2	29.5	891
844.80	-45.8	28.8	759	889.80	-46.0	29.2	832

Test Data Table 3 – Output Power – GSM 800 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)	Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
824.20	-42.8	28.6	724	869.20	-43.9	29.0	794
836.00	-44.5	29.2	832	881.00	-48.4	29.3	851
844.80	-46.9	29.3	851	889.80	-45.5	29.0	794

Test Data Table 4– Output Power – WCDMA 800 – Uplink/Downlink

Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)	Tuned Frequency (MHz)	Power Input (dBm)	Power Output (dBm)	Power Output (mW)
826.80	-48.2	29.6	912	871.80	-49.1	29.8	955
836.00	-48.3	29.7	933	881.00	-51.8	29.3	851
842.20	-47.5	29.8	955	887.20	-50.9	29.1	813



INPUT/OUTPUT MODULATED AMPLITUDE COMPARISON AND BAND-EDGES COMPLIANCE

Rule Parts No.: Pt 2.1049, Pt 2.1051, 22H

Requirements: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Data: The DUT meets the requirements.

Bandedge compliance:

The Reference level on the following plots was calibrated using a 3MHz RBW=VBW.

Compensating for RBW (1%) using $10 \log (12.5/3) = 6.2 \text{ dB}$ we get the following amplitudes at the bandedge:

Compensating for RBW (1%) using $10 \log (12.5/3) = 6.2 \text{ dB}$ we get the following amplitudes at the bandedge:

Test Data Table 5 – CDMA 800 – Uplink/Downlink

Channel (MHz)	Bandedge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
825.25	823.93	-26.1	-13	13.1
843.75	845.05	-26.27	-13	13.27
870.25	868.94	-26.3	-13	13.3
888.75	890.02	-23.73	-13	10.73


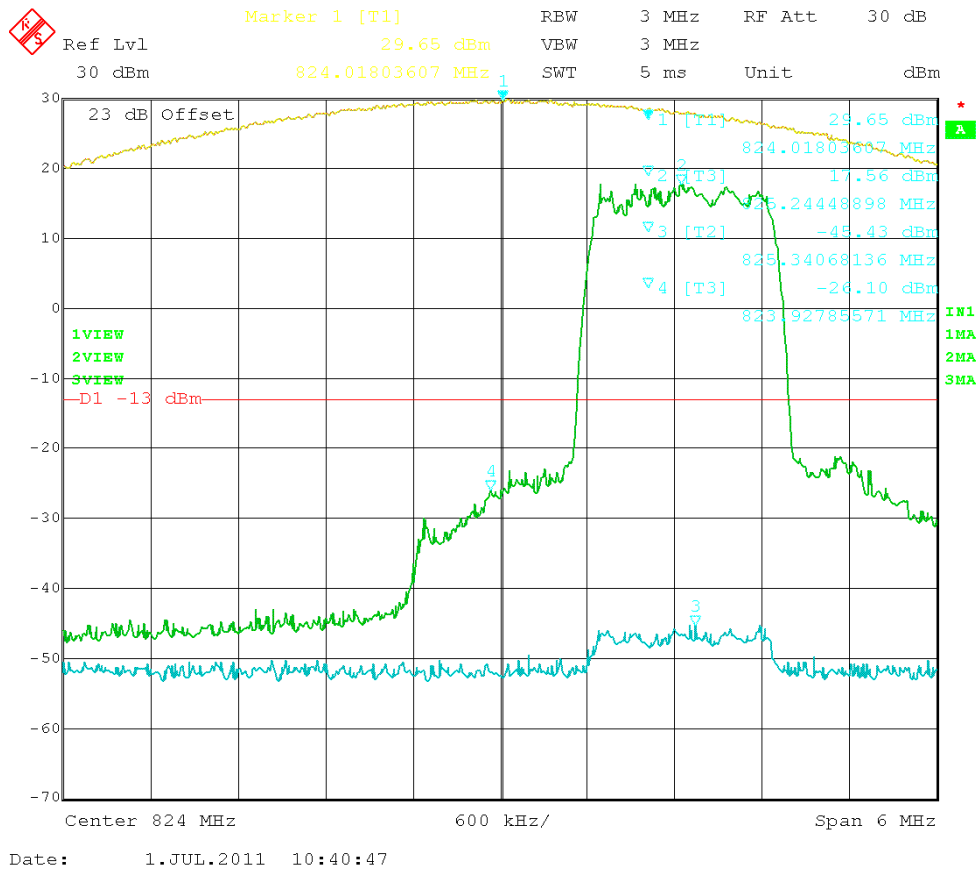


Figure 17: CDMA – In vs. Out 825.25MHz

APPLICANT: WILSON ELECTRONICS, INC.


FCC ID: PWO277180, IC: 4726A-277180

Report #: W\WILSON_PWO\1329AT11\1329AT11TestReport.doc

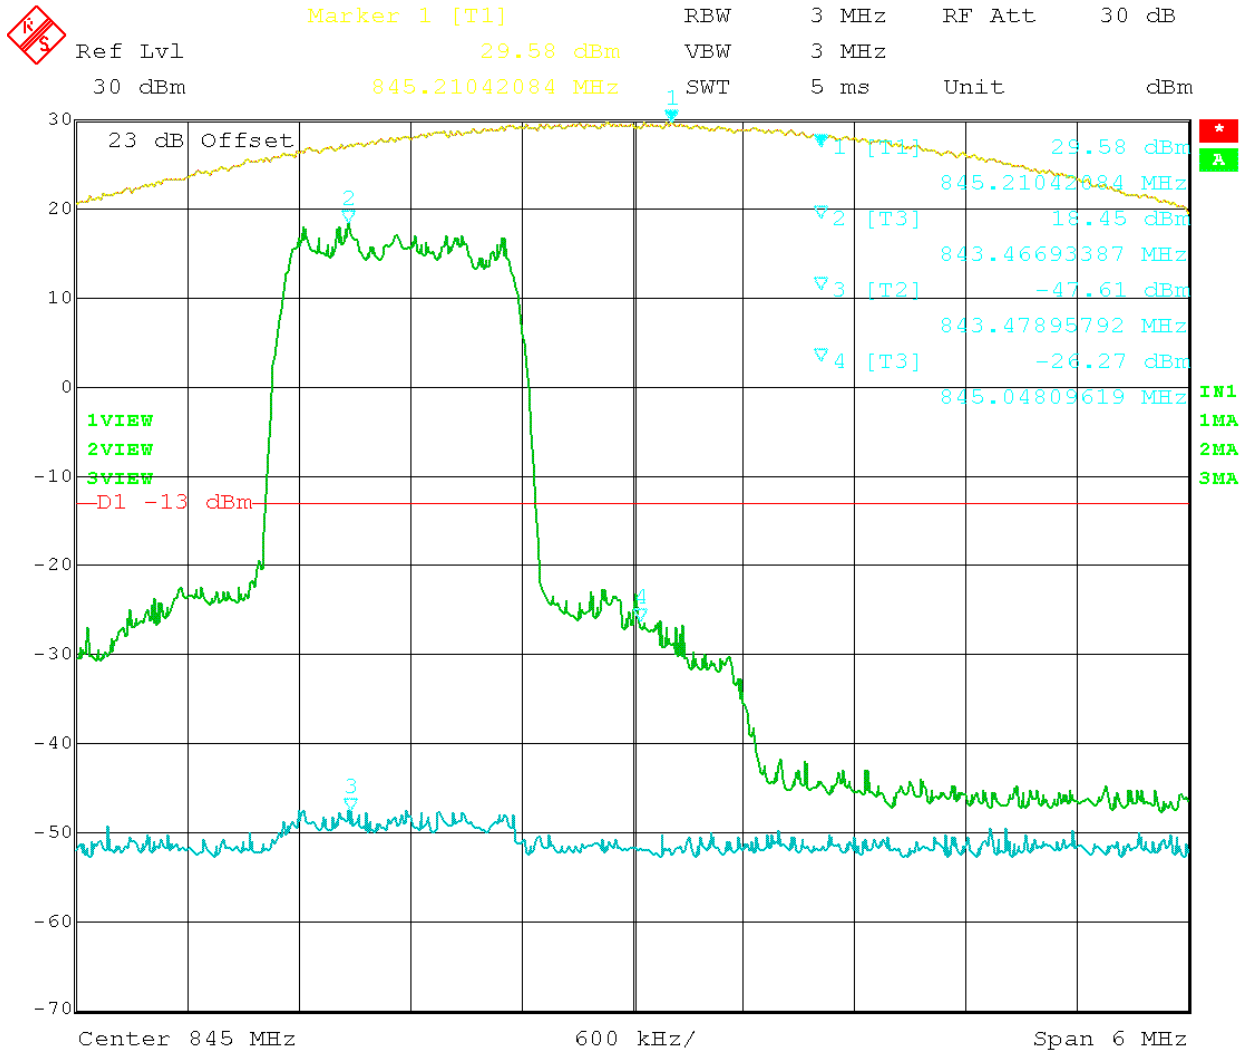


Date: 1.JUL.2011 10:56:25

Figure 18: CDMA – In vs. Out 843.75 MHz

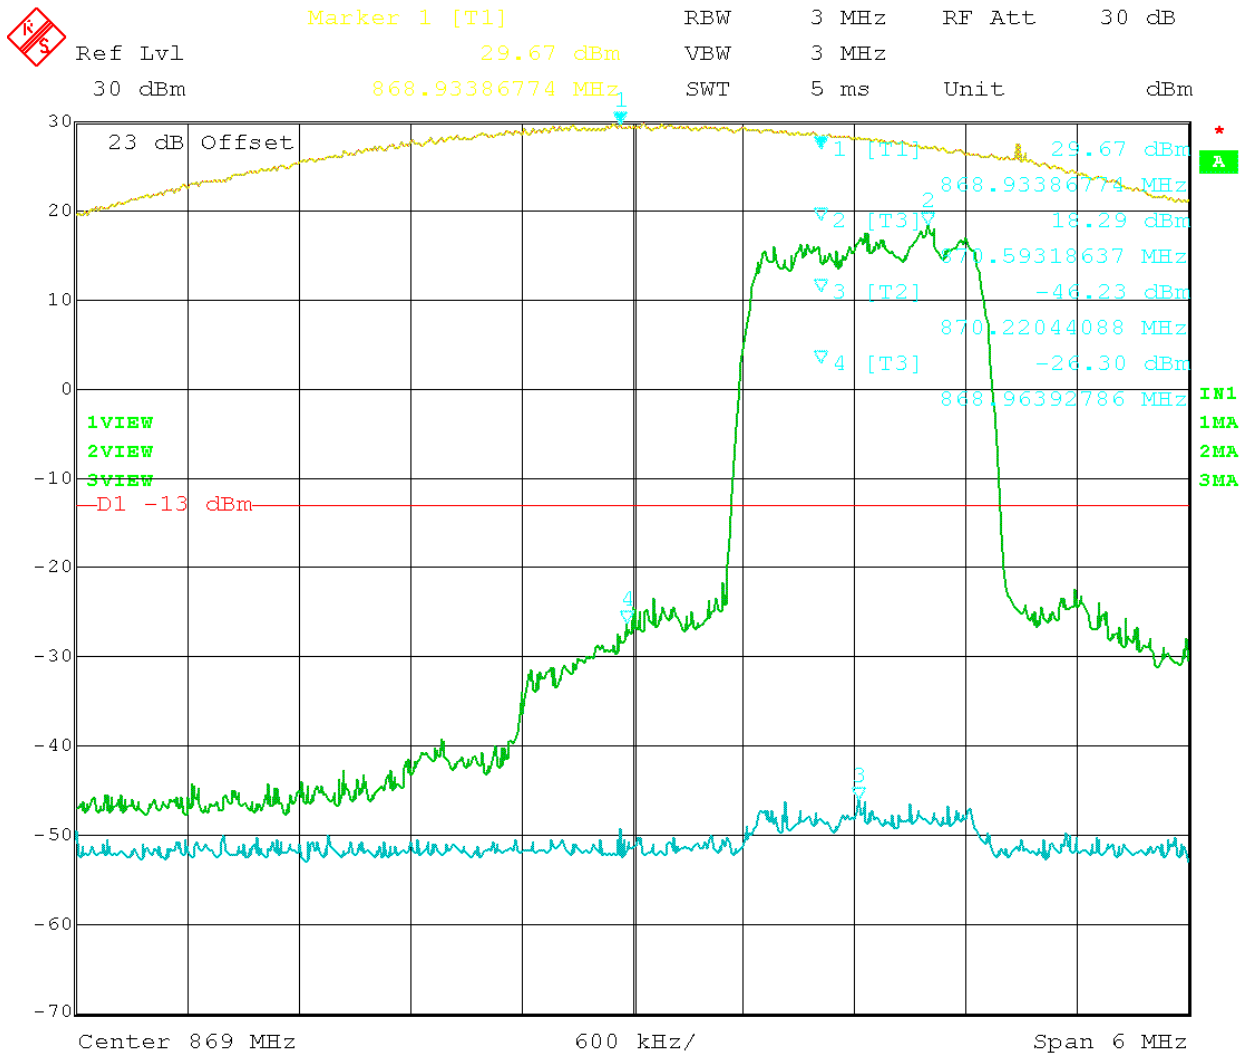

Date: 1.JUL.2011 13:05:09

Figure 19: CDMA – In vs. Out 870.25 MHz

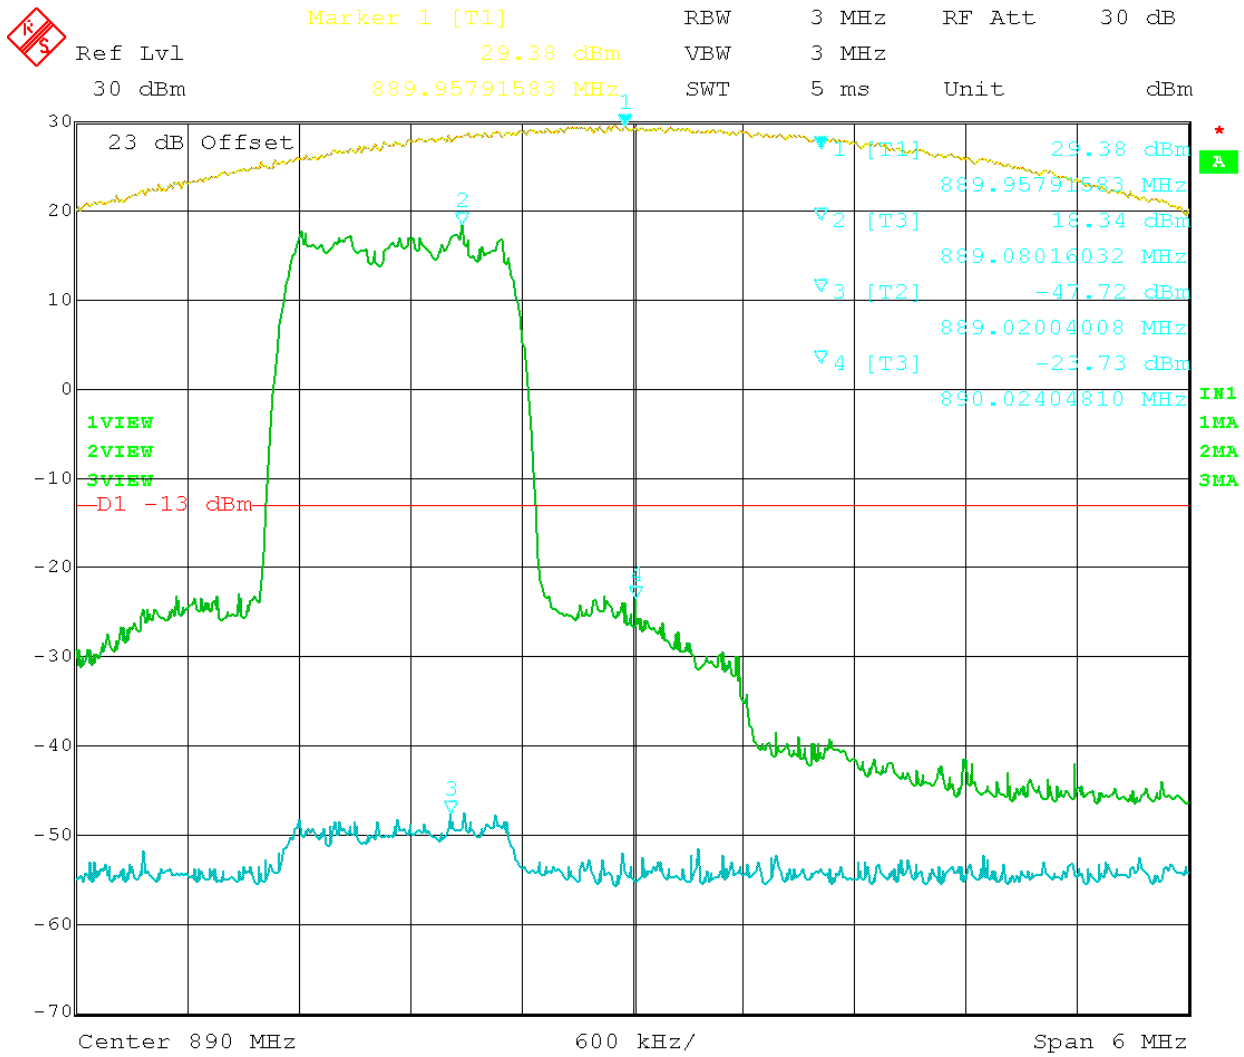


Date: 1.JUL.2011 13:27:09

Figure 20: CDMA – In vs. Out 888.75 MHz


Test Data Table 6 – WCDMA 800 – Uplink/Downlink

Channel (MHz)	Bandedge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
826.80	823.88	-26.37	-13	13.37
842.20	845.15	-29.25	-13	16.25
871.80	868.67	-29.36	-13	16.36
891.20	890.09	-31.82	-13	18.82

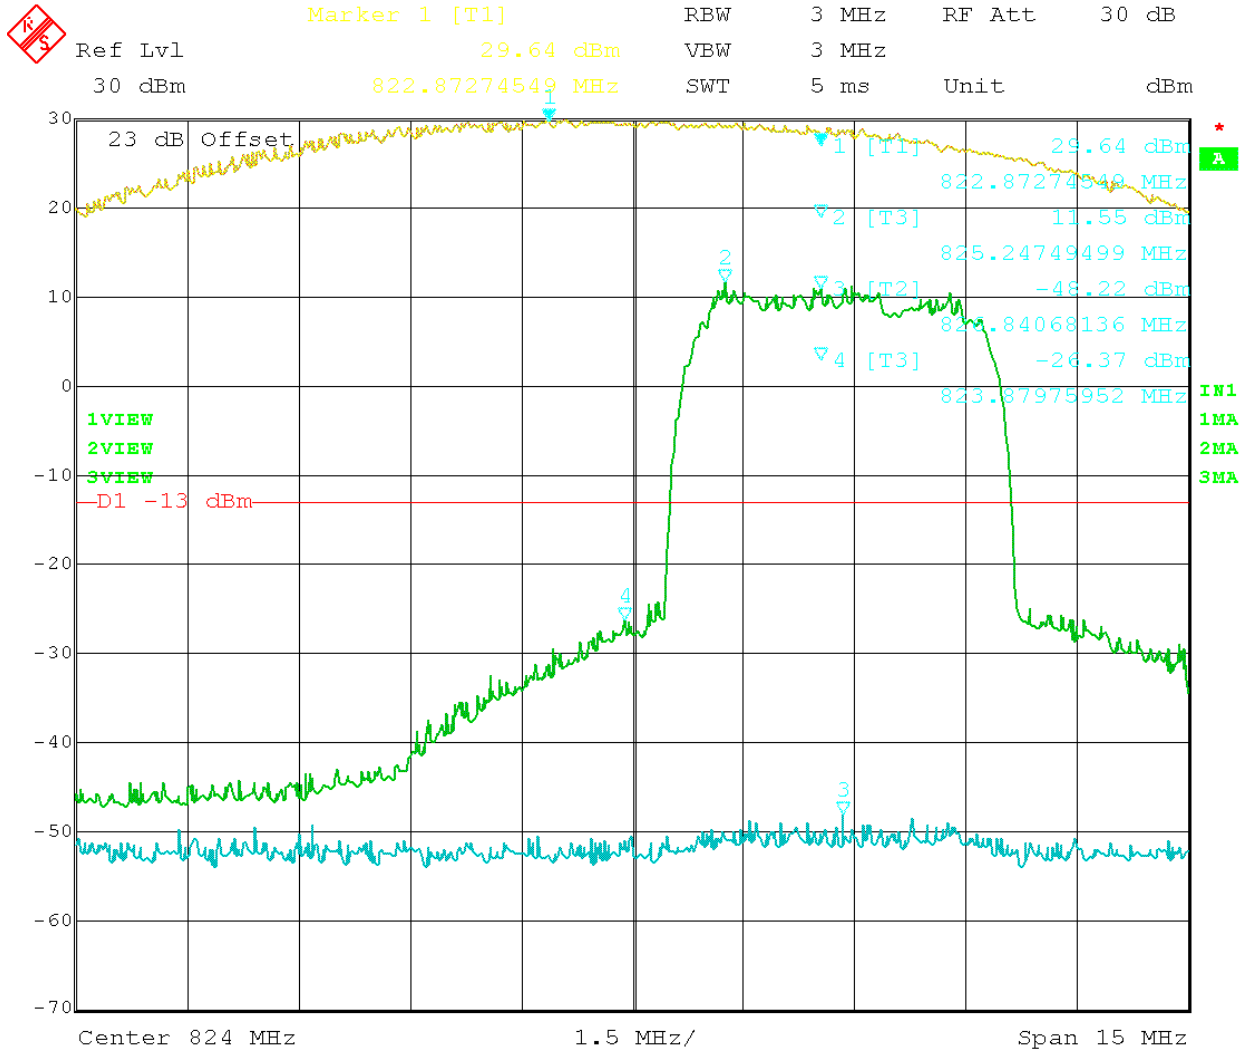


Date: 1.JUL.2011 13:38:43

Figure 21: WCDMA – In vs. Out 826.80 MHz

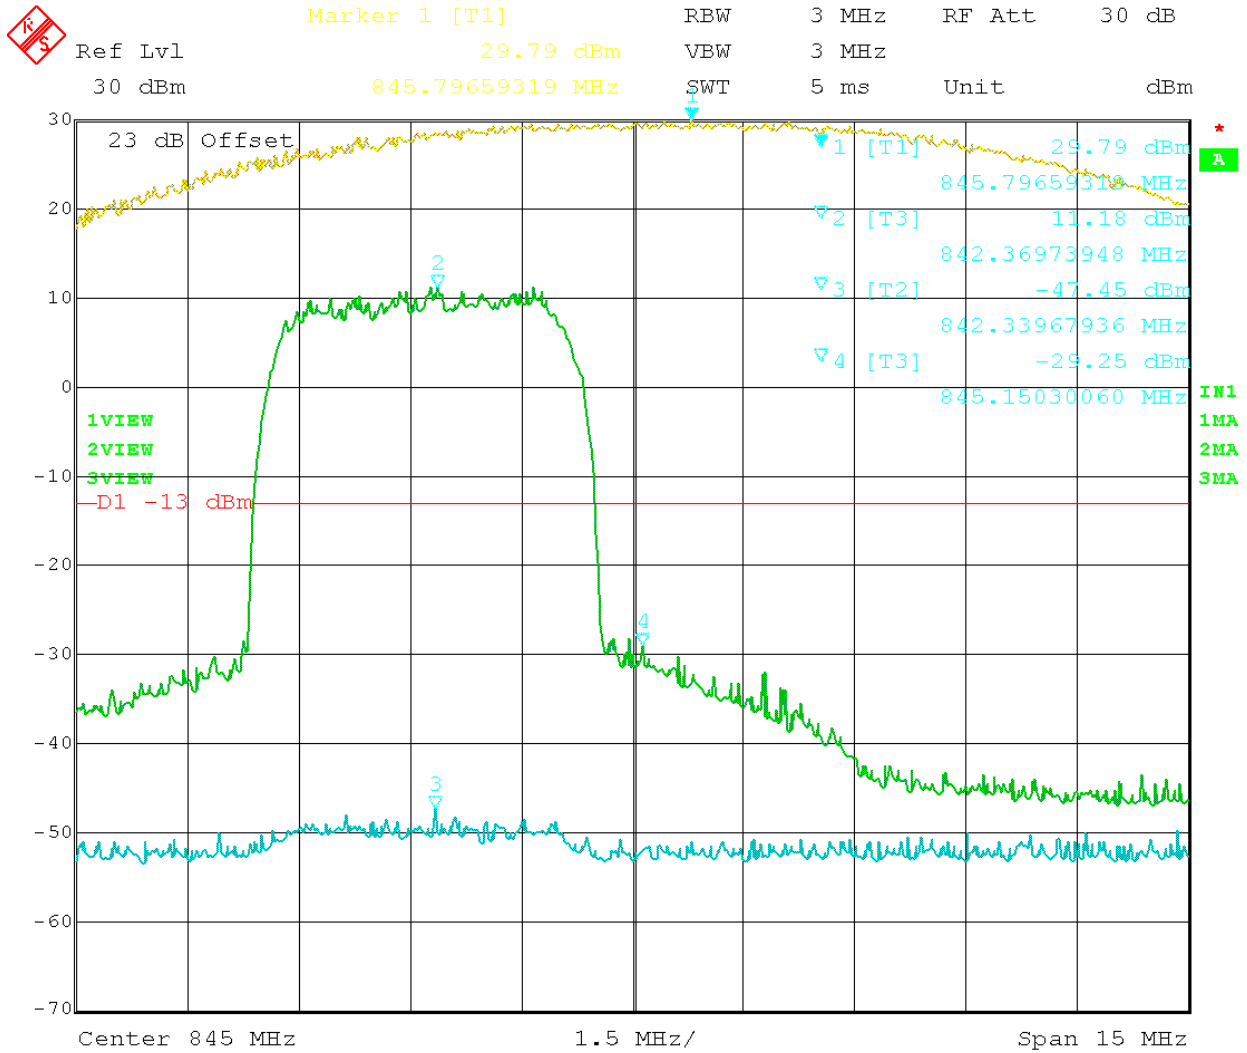


Date: 1.JUL.2011 13:55:11

Figure 22: WCDMA – In vs. Out 842.20 MHz

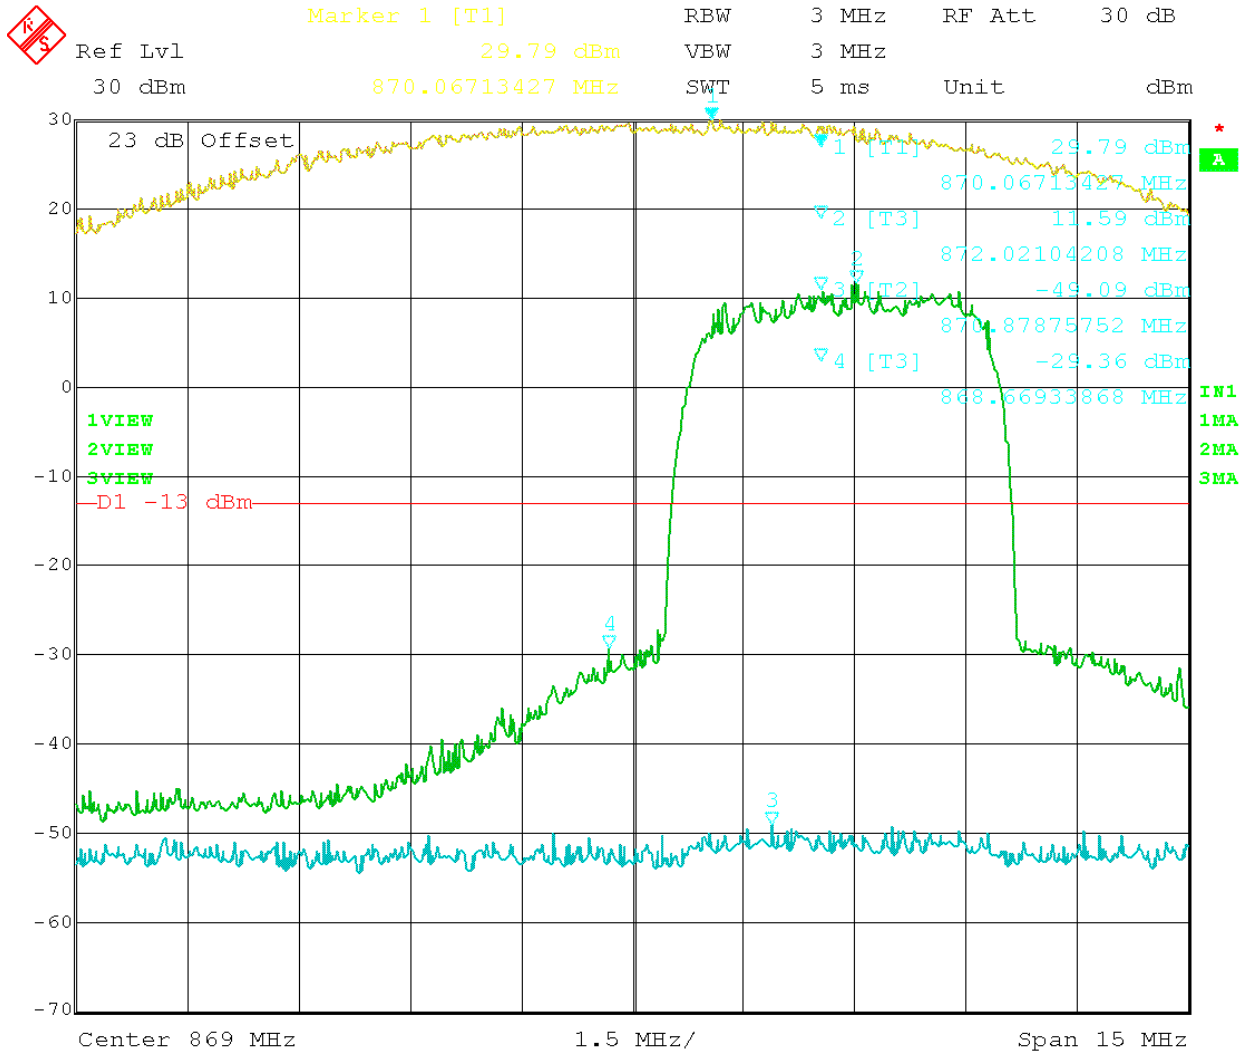

Date: 1.JUL.2011 14:36:35

Figure 23: WCDMA – In vs. Out 871.80 MHz

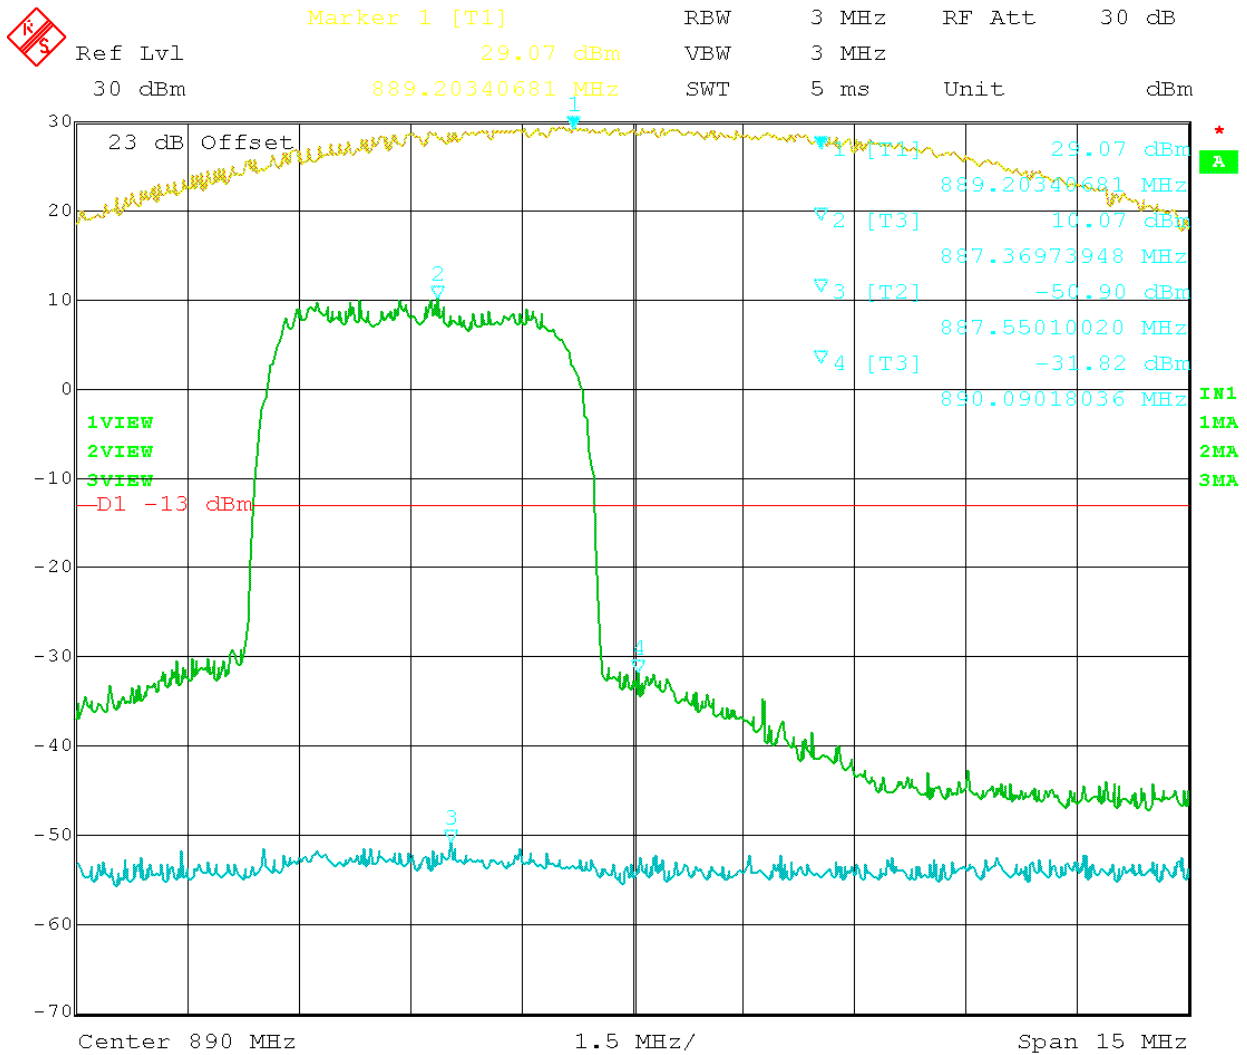


Date: 1.JUL.2011 14:55:47

Figure 24: WCDMA – In vs. Out 887.20 MHz

Test Data Table 7 – EDGE 800 – Uplink/Downlink

Channel (MHz)	Band-edge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
824.2	823.98	-17.41	-13	4.41
844.8	845.02	-22.34	-13	9.34
869.2	868.98	-15.5	-13	2.5
889.8	890.02	-20.6	-13	7.6

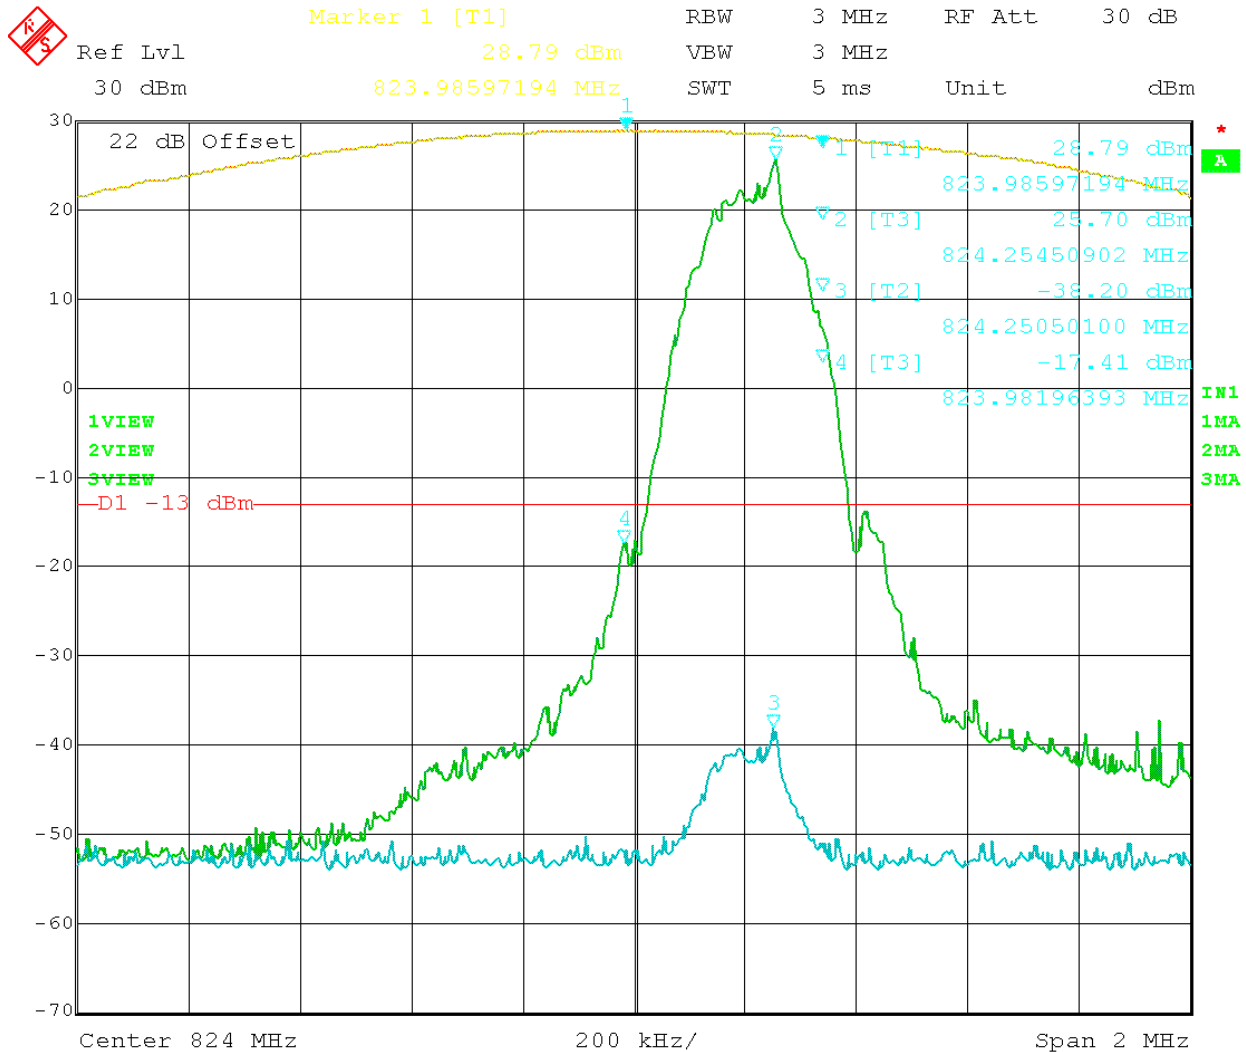

Date: 1.JUL.2011 08:43:06

Figure 25: EDGE – In vs. Out 824.20 MHz



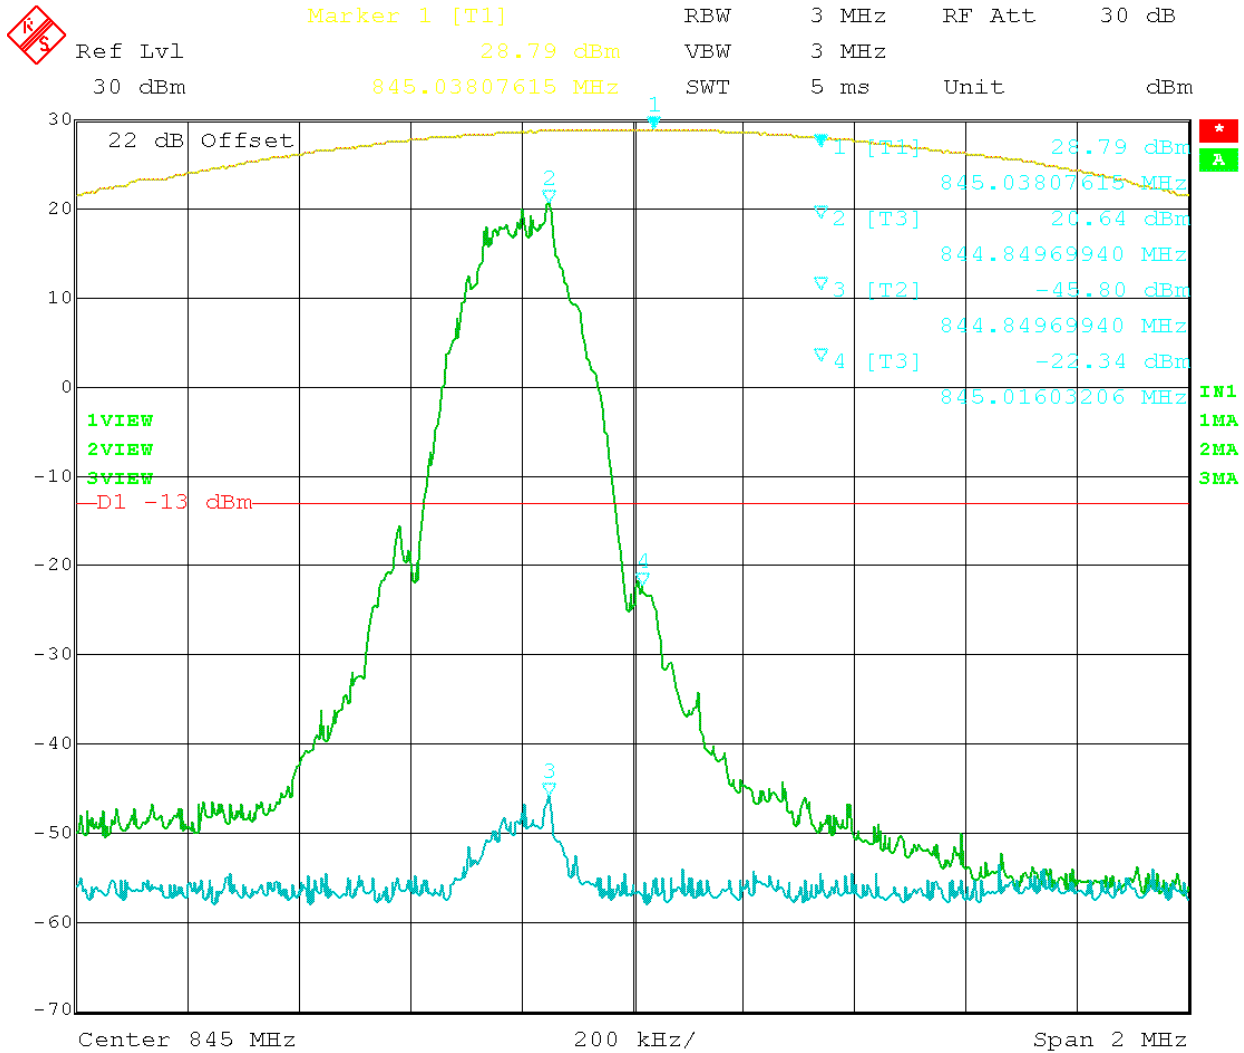


Figure 26: EDGE – In vs. Out 844.80 MHz

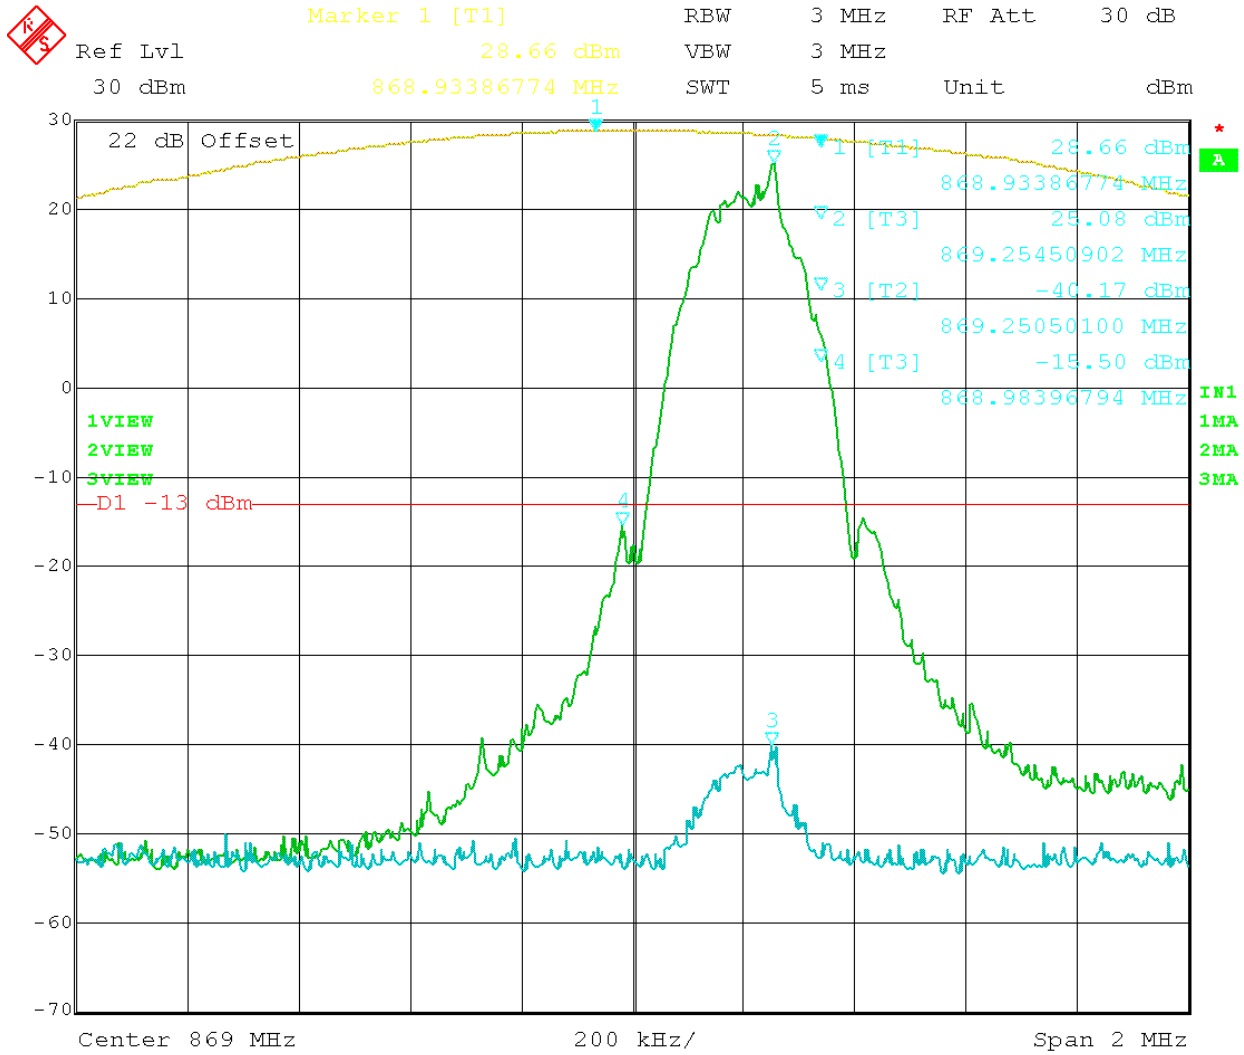

Date: 1.JUL.2011 10:04:32

Figure 27: EDGE - In vs. Out 869.20 MHz

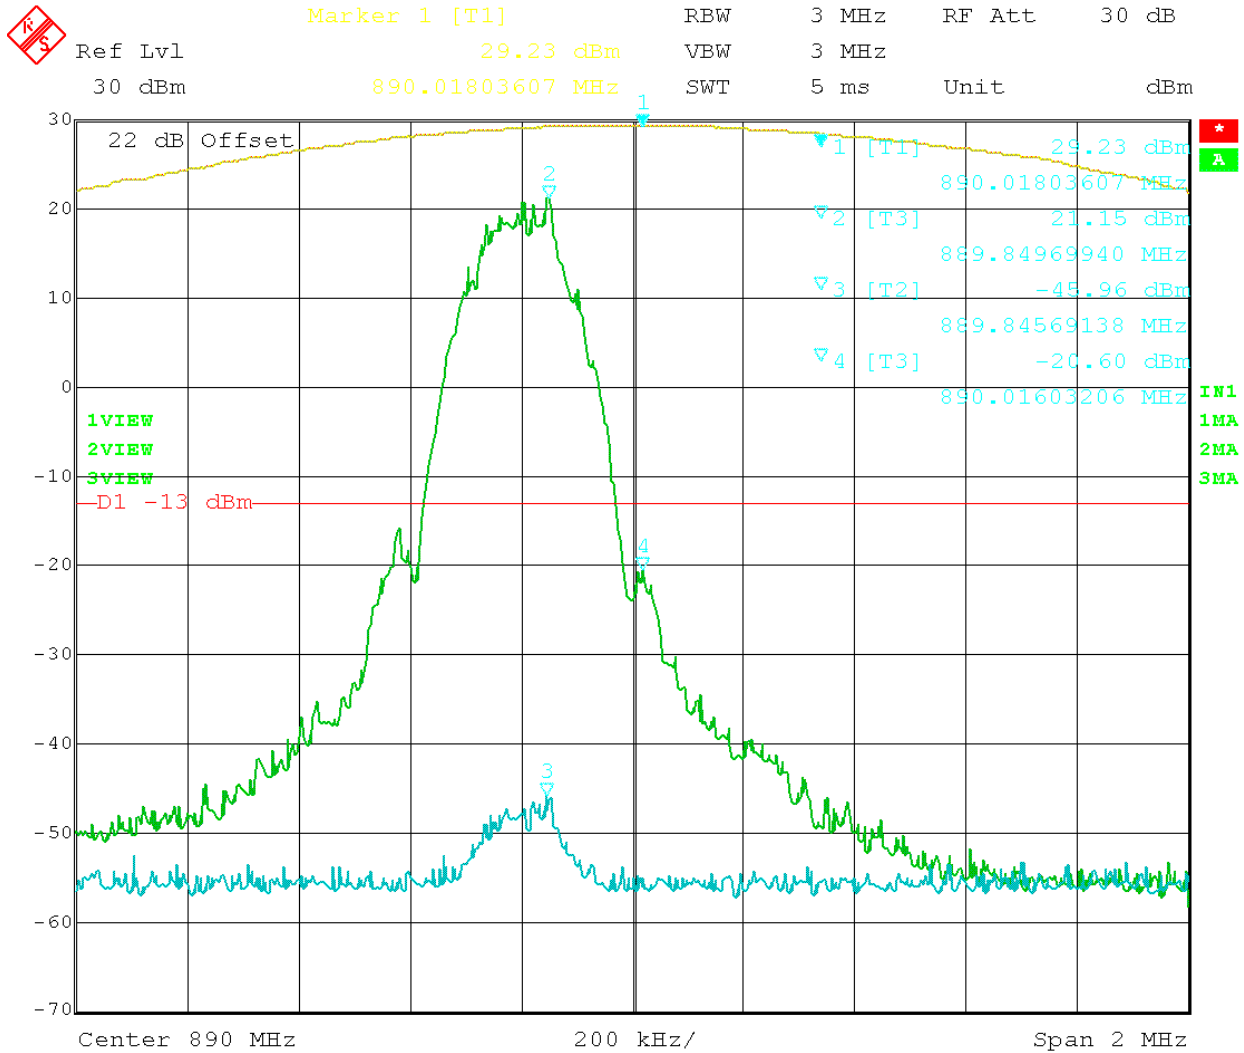


Date: 1.JUL.2011 10:19:18

Figure 28: EDGE - In vs. Out 889.80 MHz

Test Data Table 8 – GSM 800 – Uplink/Downlink


Channel (MHz)	Band-edge Frequency (MHz)	Amplitude level at the band-edge (dBm)	Limit (dBm)	Margin (dB)
824.2	823.98	-21.32	-13	8.32
844.8	845.02	-18.2	-13	5.2
869.2	868.98	-19.32	-13	6.32
889.8	890.02	-18.91	-13	5.91

The Reference level on the following plots was calibrated using a 3MHz RBW=VBW.

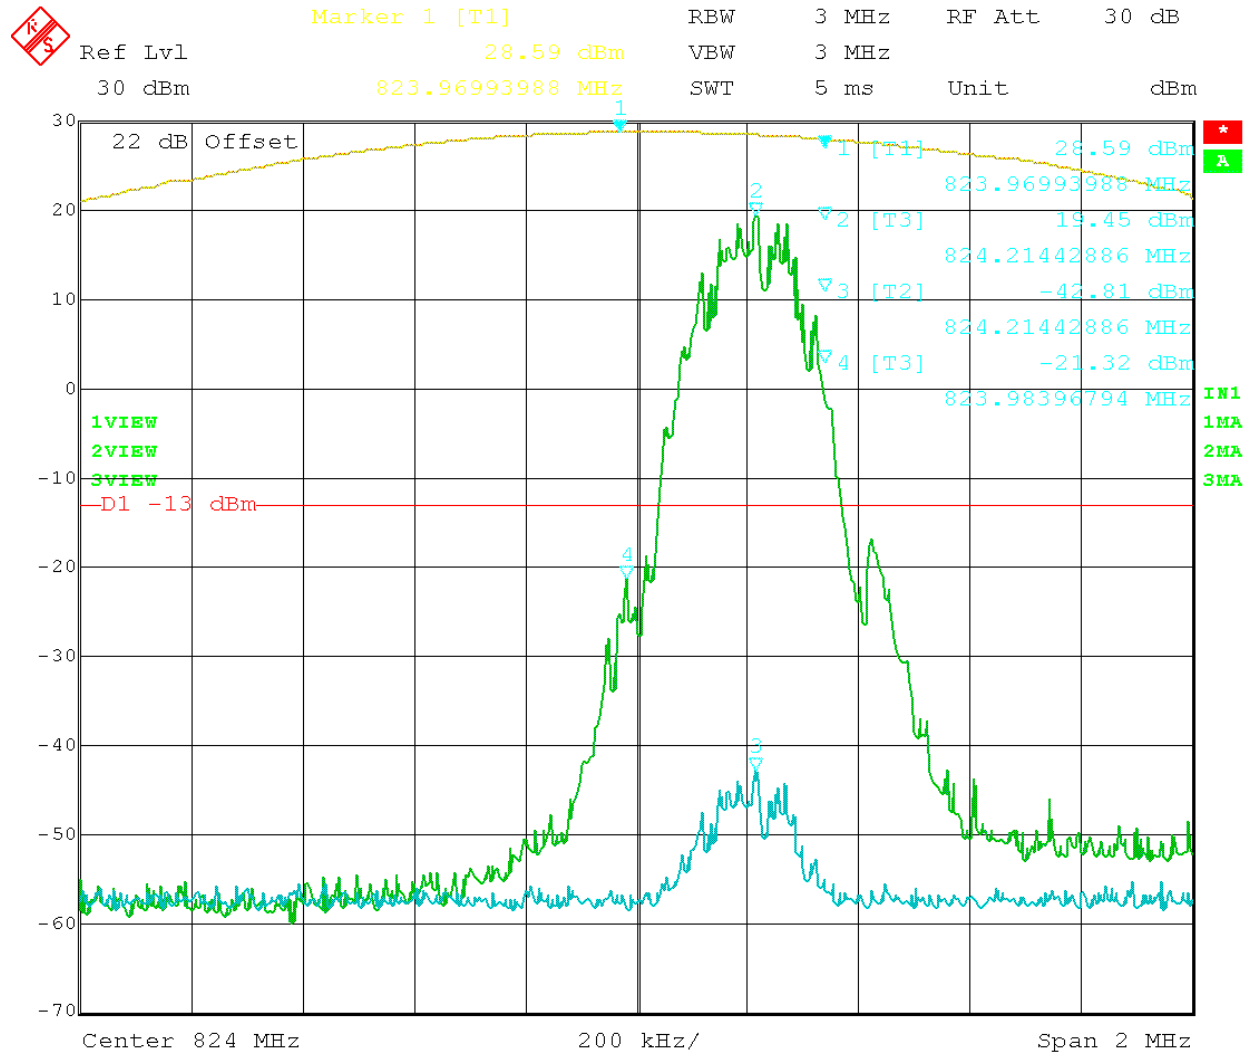


Date: 30.JUN.2011 15:36:55

Figure 29: GSM – In vs. Out 824.2 MHz

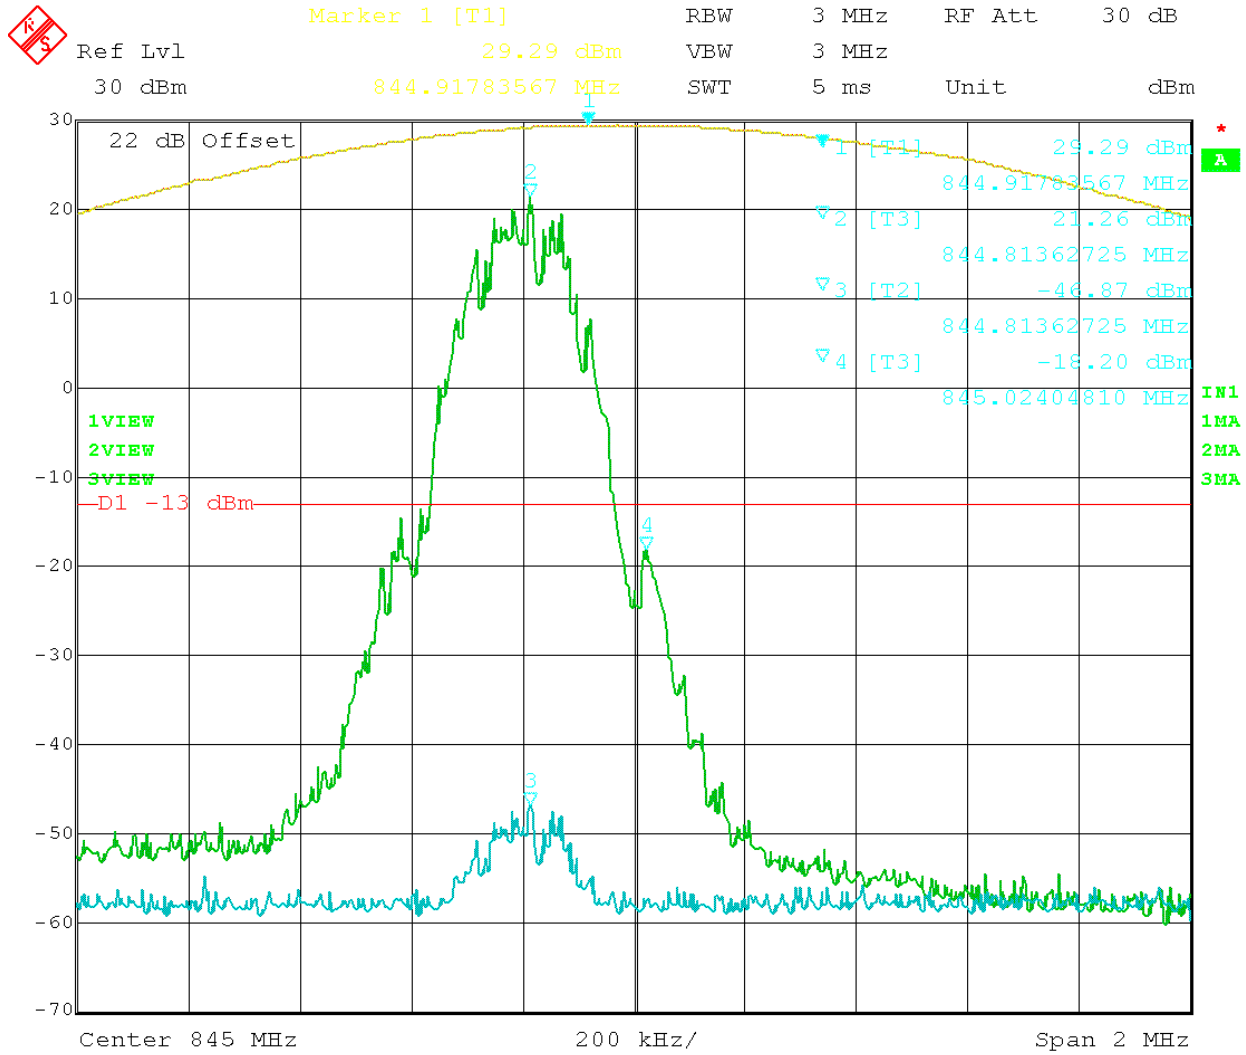


Date: 30.JUN.2011 15:23:48

Figure 30: GSM – In vs. Out 844.8 MHz

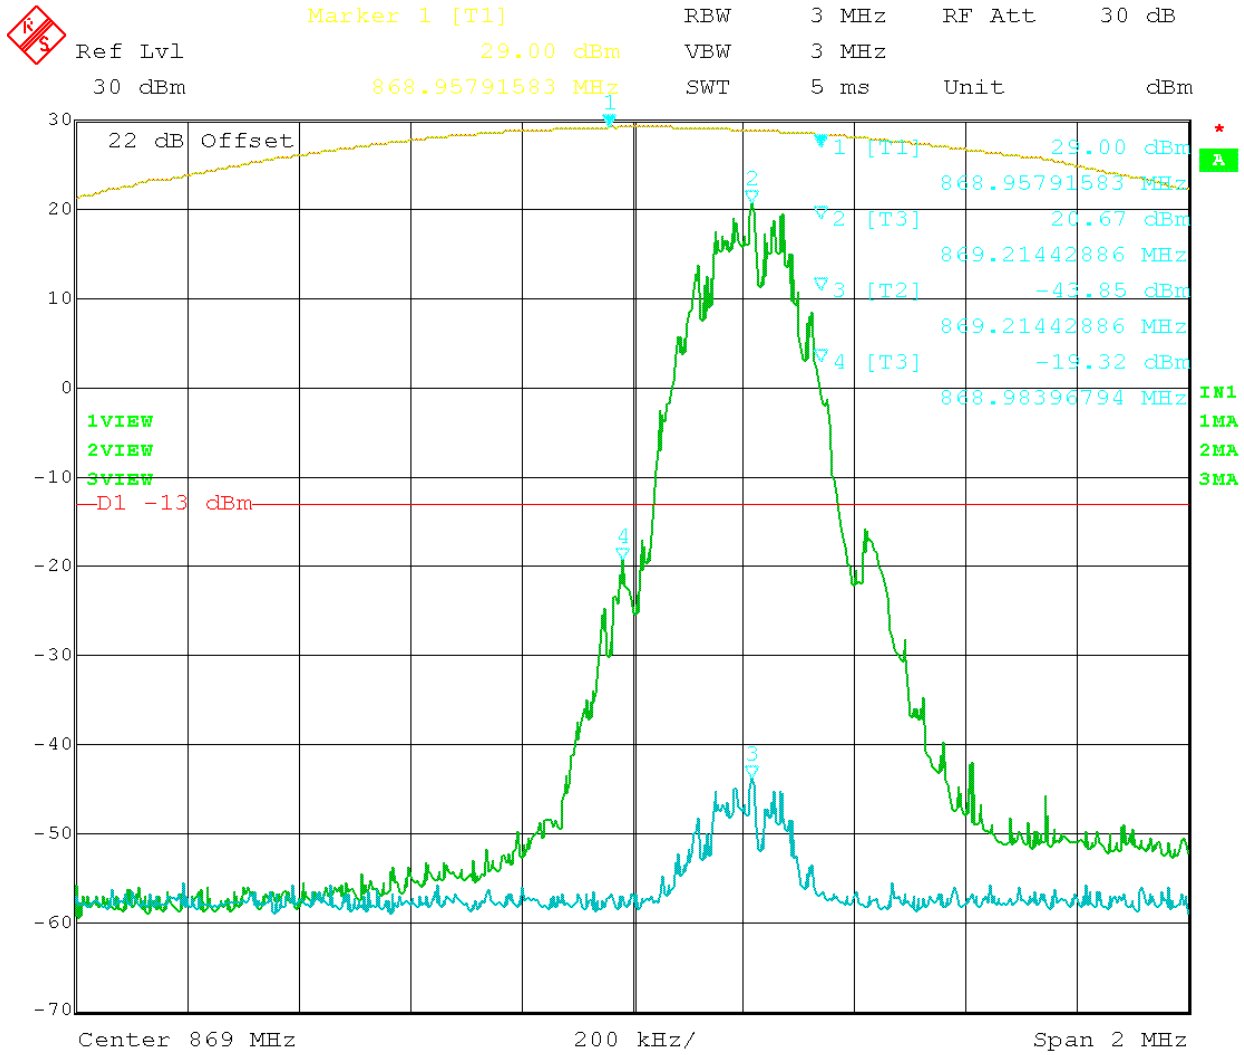

Date: 30.JUN.2011 15:48:32

Figure 31: GSM – In vs. Out 869.2MHz

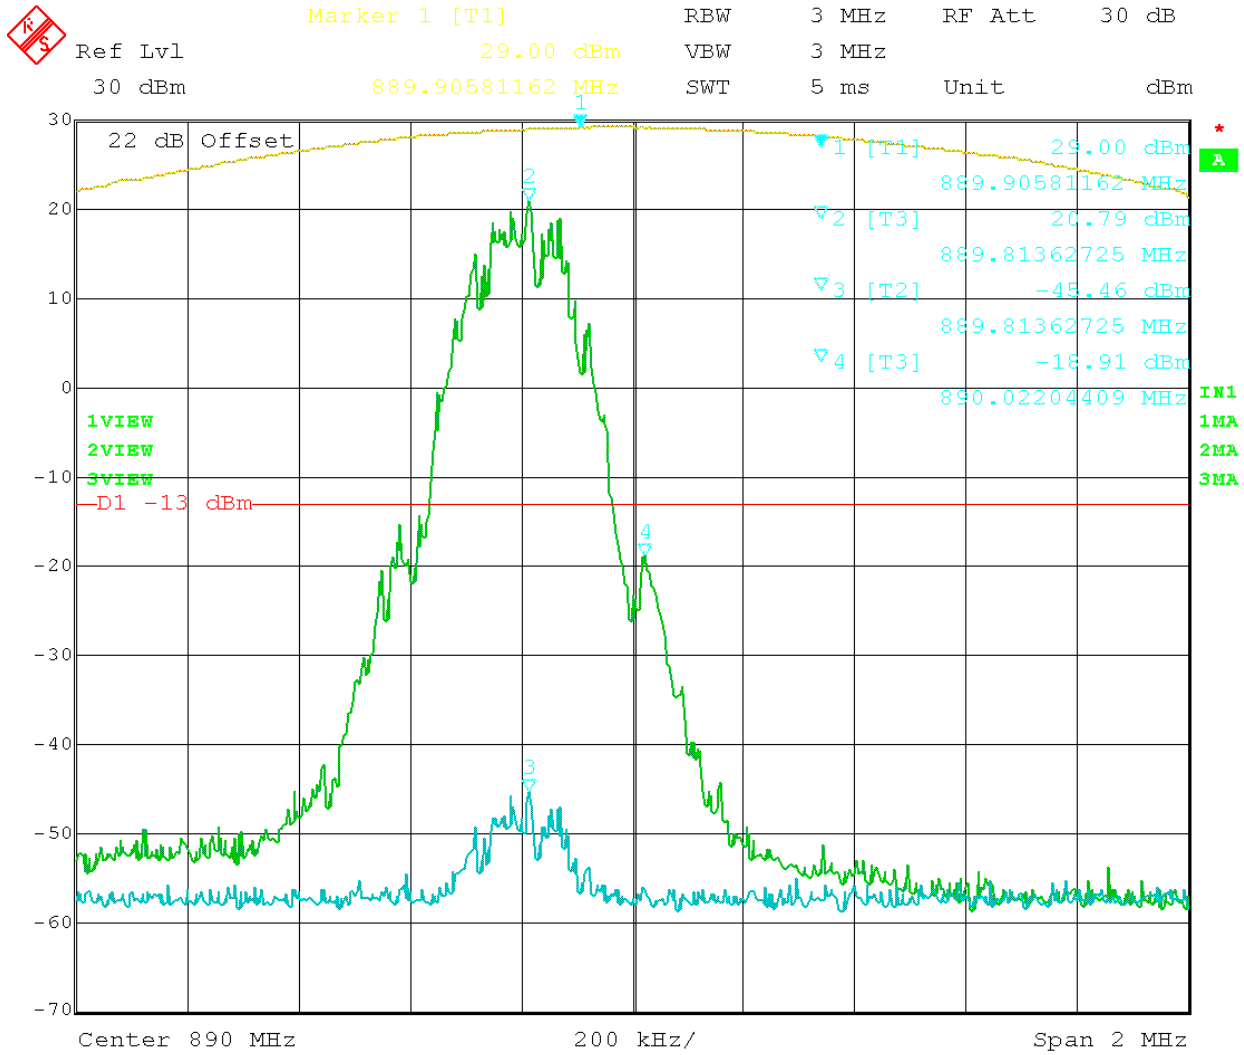

Date: 30.JUN.2011 16:12:23

Figure 32: GSM – In vs. Out 889.8MHz




INTERMODULATION PRODUCT SPURIOUS EMISSIONS

Rule Parts No.: Pt 2.1051

Requirements: Emissions must be $43 + 10 \log (P_o)$ dB below the mean power output of the transmitter or below the -13dBm


All the modulation types were tested using the three tone test method. A CW signal was use instead of GSM, and EDGE. EDGE and GSM provided the same test results and only GSM data are presented in this report. The input power to the amplifier was set at maximum drive level by combining the three tones. The three tones were chosen in such a way (1)the third order intermodulation product frequencies are located within the pass band of the DUT and (2) they produce the worst-case emissions out of band.

Test Data: The DUT meets the requirements.

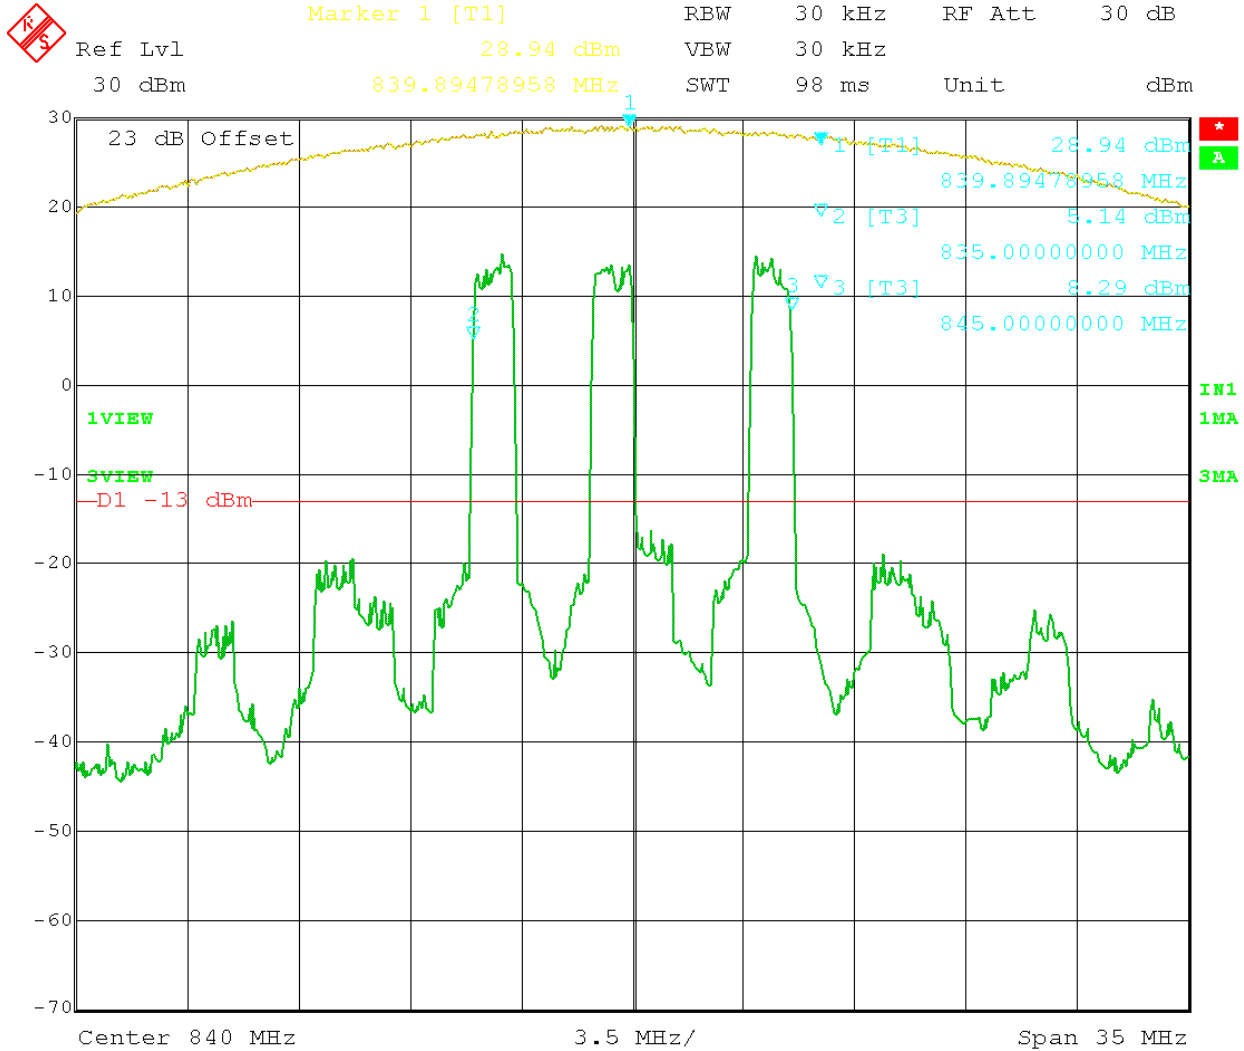


Date: 5.JUL.2011 09:10:30

Figure 36: CDMA 3 tones intermodulation – (824 – 845) MHz.

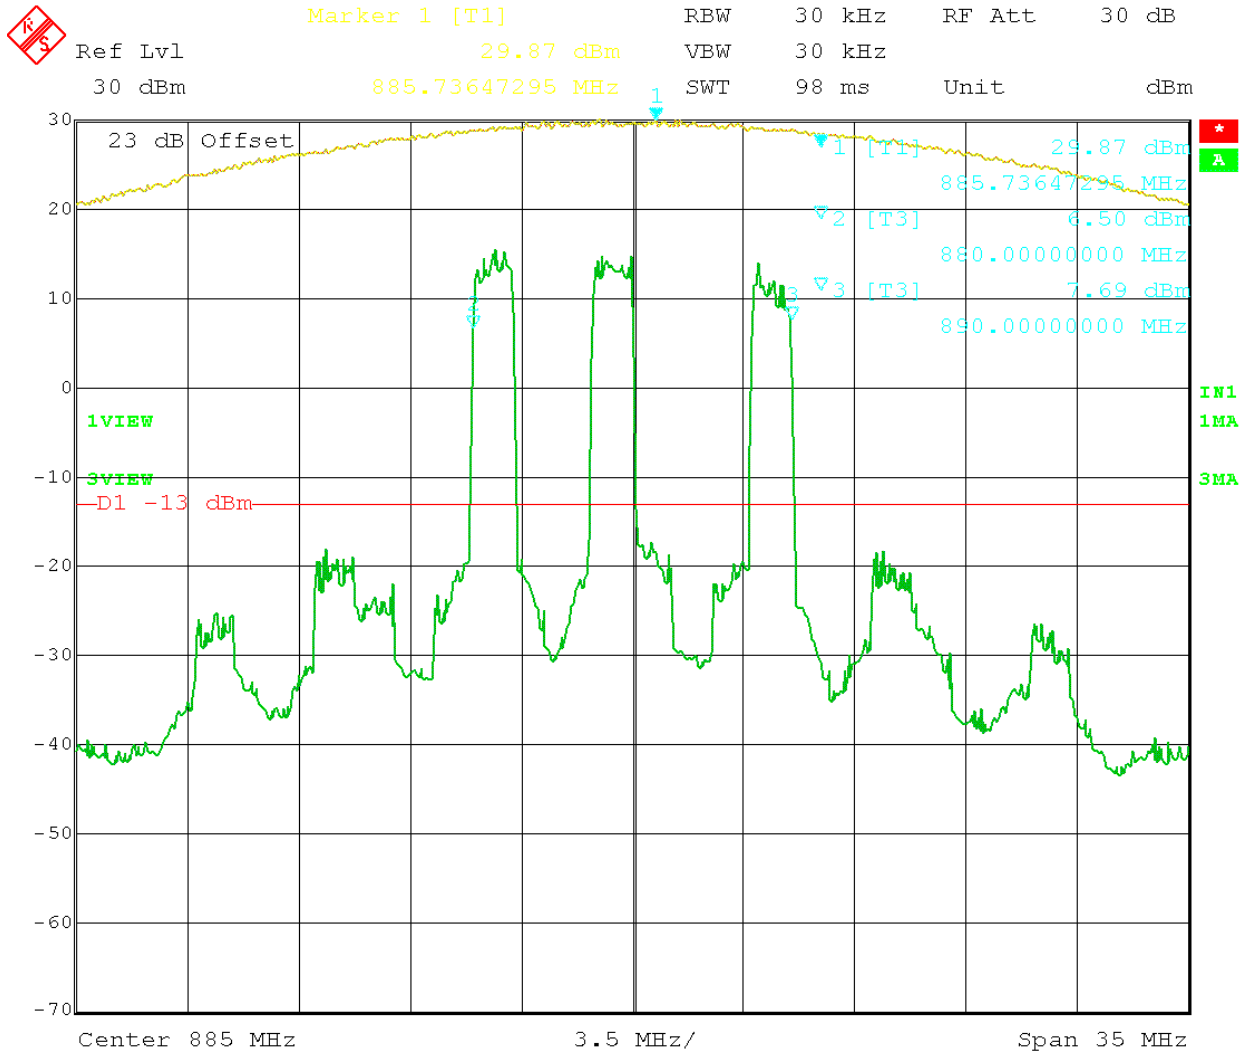


Date: 5.JUL.2011 09:05:33

Figure 37: CDMA 3 tones intermodulation - (869 – 890) MHz.

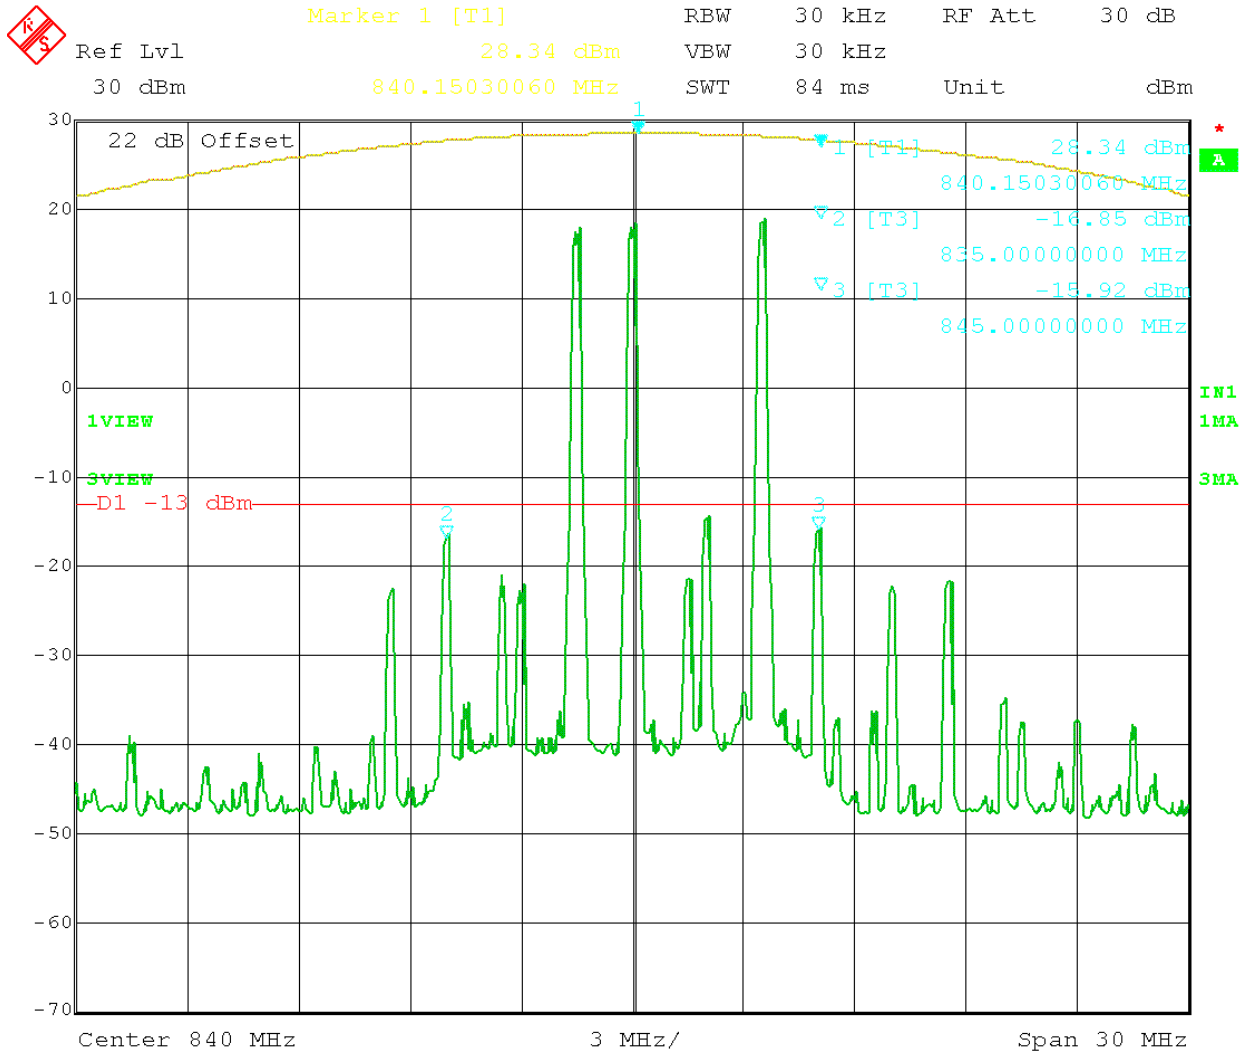

Date: 5.JUL.2011 09:42:00

Figure 40: GSM 3 tones intermodulation - (824 – 845) MHz

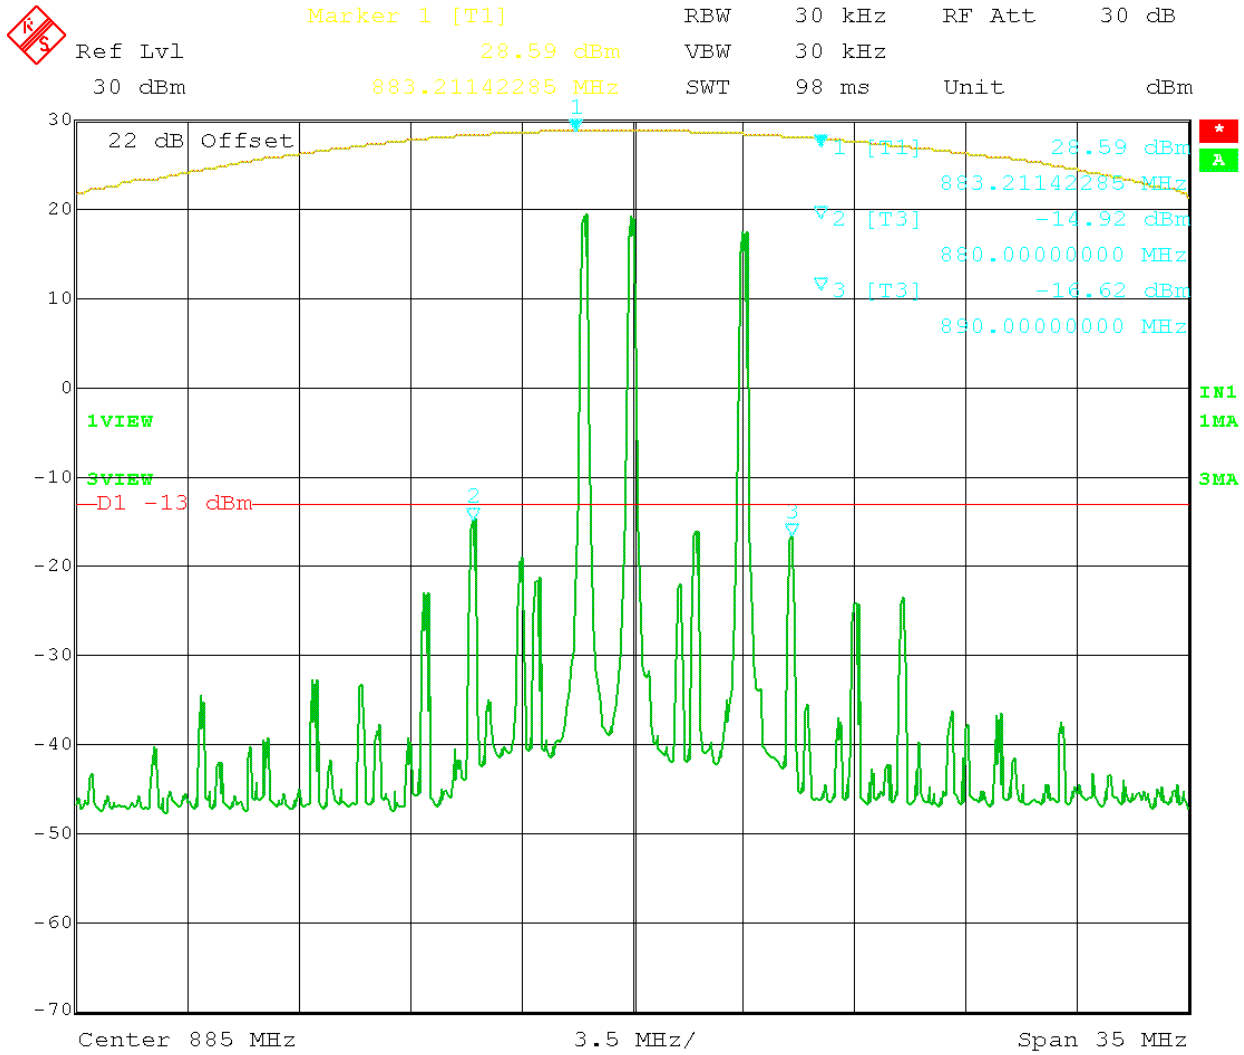

Date: 5.JUL.2011 09:47:45

Figure 41: GSM 3 tones intermodulation - (869 – 890) MHz

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Rule Parts No.: Pt 2.1051

Requirements: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter:

$$824 - 845 \text{ MHz: } 43 + 10\log(1.00) = 43.0 \text{ dBc}$$

$$869 - 890 \text{ MHz: } 43 + 10\log(1.00) = 43.0 \text{ dBc}$$

Test Result: The DUT meets the requirements.

Test Data Table 9 – Conducted Emissions – CDMA 800 - Uplink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
825.25	0	836.50	0	843.75	0
1650.50	84.4	1673.00	88.2	1687.50	84.6
2475.75	83.6	2509.50	84.3	2531.25	83.1
3301.00	93.1	3346.00	87.8	3375.00	84.4
4126.25	89.0	4182.50	85.7	4218.75	87.5
4951.50	88.2	5019.00	85.3	5062.50	85.1
5776.75	NF	5855.50	NF	5906.25	NF
6602.00	NF	6692.00	NF	6750.00	NF
7427.25	NF	7528.50	NF	7593.75	NF
8252.50	NF	8365.00	NF	8437.50	NF

Test Data Table 10 – Conducted Emissions – CDMA 800 - Downlink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
870.25	0	881.50	0	888.75	0
1740.50	69.3	1763.00	70.3	1777.50	68.7
2610.75	91.8	2644.50	93.1	2666.25	90.9
3481.00	90.9	3526.00	93.9	3555.00	91.8
4351.25	93.4	4407.50	92.6	4443.75	91.2
5221.50	93.5	5289.00	92.8	5332.50	92.4
6091.75	NF	6170.50	NF	6221.25	NF
6962.00	NF	7052.00	NF	7110.00	NF
7832.25	NF	7933.50	NF	7998.75	NF
8702.50	NF	8815.00	NF	8887.50	NF

Test Data Table 11 – Conducted Emissions – GSM 800 – Uplink


Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
824.20	0	836.50	0	844.80	0
1648.40	88.2	1673.00	89.3	1689.60	86.6
2472.60	86.2	2509.50	86.6	2534.40	86.5
3296.80	97.5	3346.00	87.2	3379.20	87.4
4121.00	89.0	4182.50	88.6	4224.00	88.3
4945.20	92.5	5019.00	87.2	5068.80	89.0
5769.40	NF	5855.50	NF	5913.60	NF
6593.60	NF	6692.00	NF	6758.40	NF
7417.80	NF	7528.50	NF	7603.20	NF
8242.00	NF	8365.00	NF	8448.00	NF

Test Data Table 12 – Conducted Emissions – GSM 800 - Downlink

Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)	Emission Frequency MHz	dB Below Carrier (dBc)
869.20	0	881.50	0	889.80	0
1738.40	71.5	1763.00	64.8	1779.60	66.0
2607.60	93.2	2644.50	85.1	2669.40	86.7
3476.80	92.0	3526.00	88.1	3559.20	87.9
4346.00	92.2	4407.50	93.1	4449.00	88.6
5215.20	93.2	5289.00	92.6	5338.80	92.7
6084.40	NF	6170.50	NF	6228.60	NF
6953.60	NF	7052.00	NF	7118.40	NF
7822.80	NF	7933.50	NF	8008.20	NF
8692.00	NF	8815.00	NF	8898.00	NF

NF noise floor

OUT OF BAND REJECTION: FREQUENCY RESPONSE

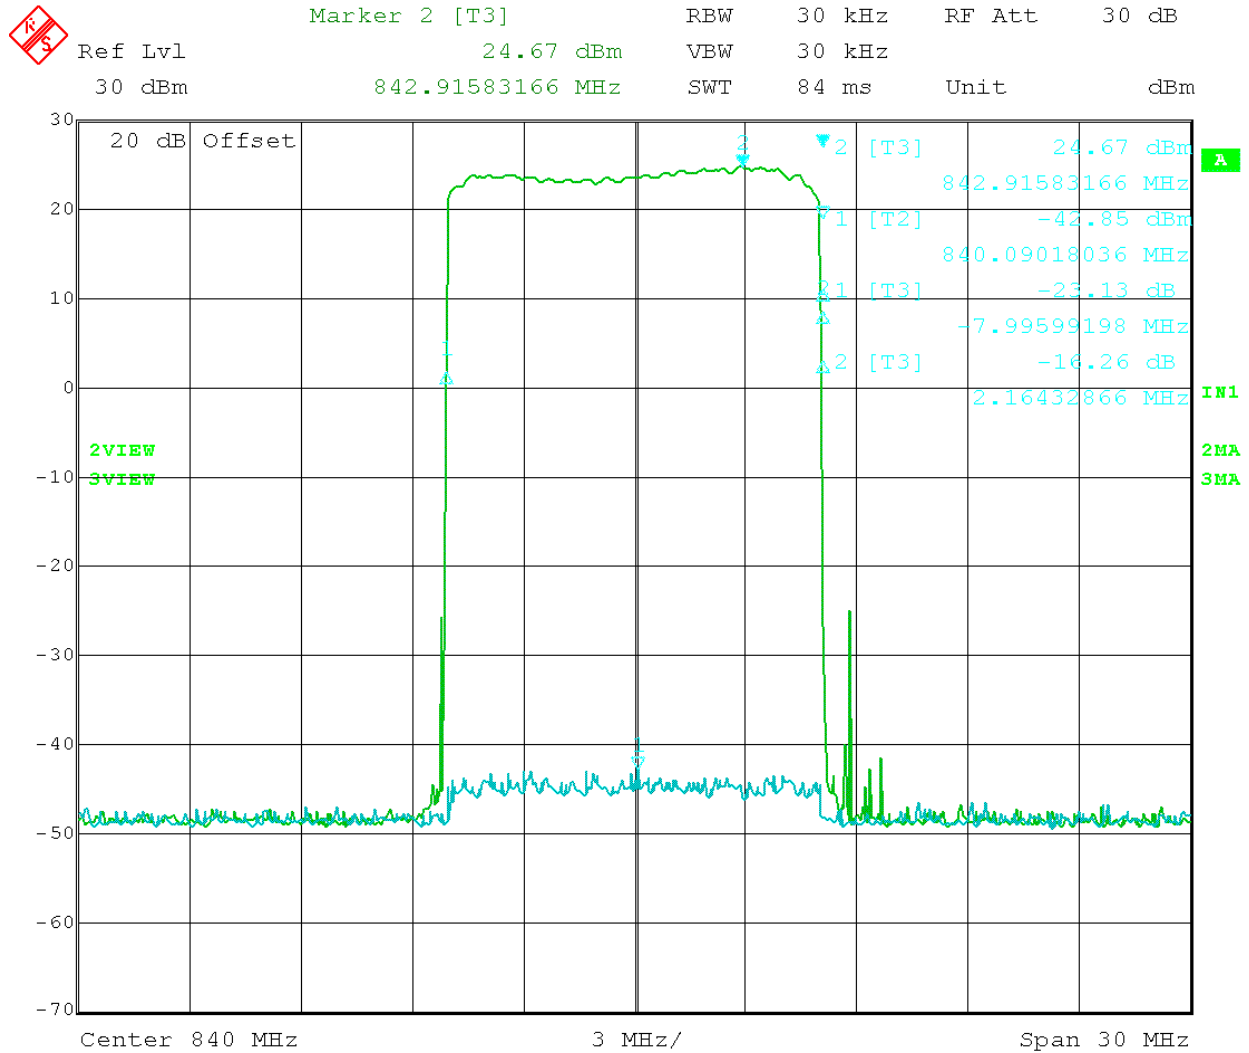


Date: 5.JUL.2011 11:03:57

Figure 44. Frequency response (824 – 845) MHz band



Marker 2 [T3] RBW 30 kHz RF Att 30 dB
 Ref Lvl 24.85 dBm VBW 30 kHz
 30 dBm 881.06212425 MHz SWT 84 ms Unit dBm

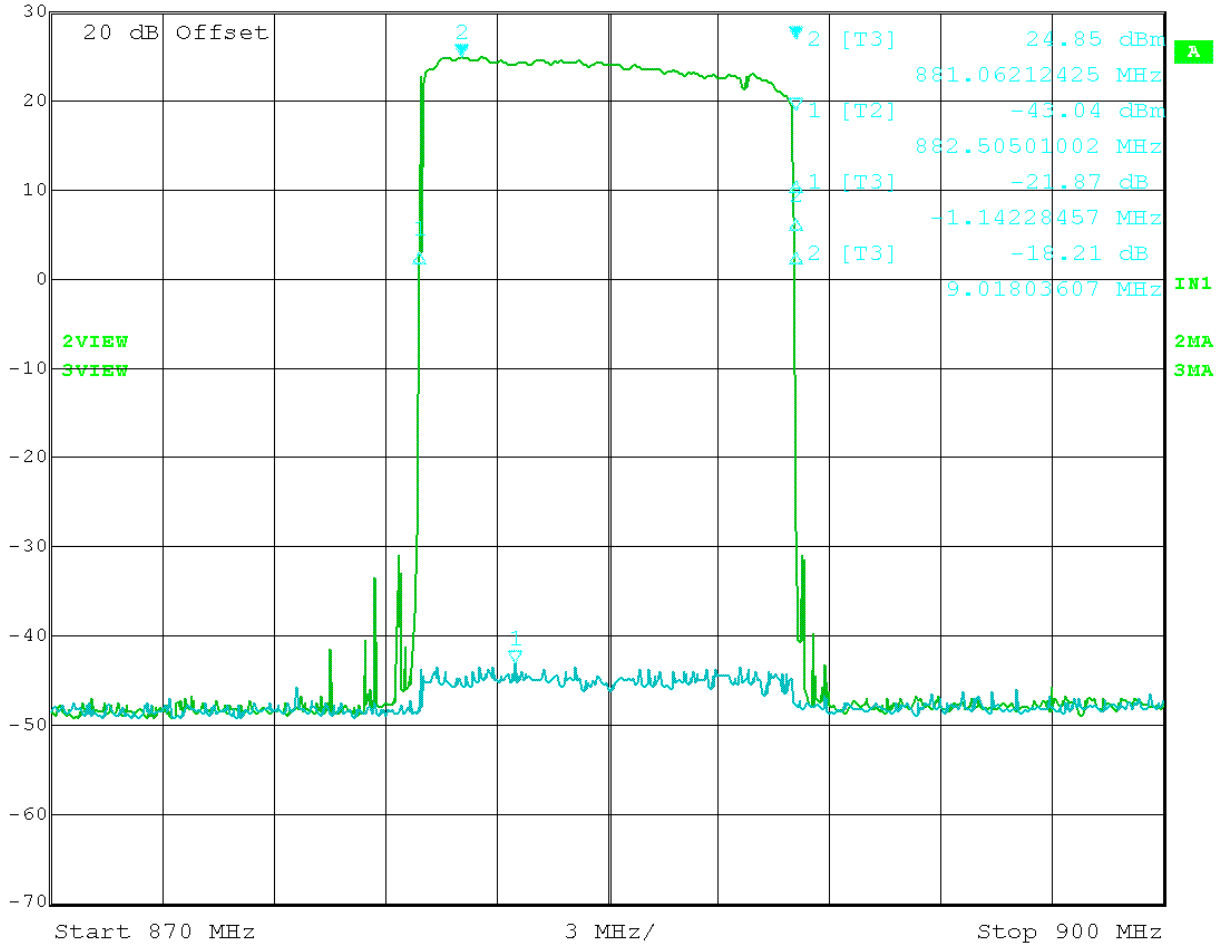

Date: 5.JUL.2011 10:38:56

Figure 45. Frequency response (869 – 890) MHz band

FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Parts No.: Pt 2.1053

Requirements: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the amplifier:

824 – 845 MHz: $43 + 10\log(1.00) = 43.0$ dBc

869 – 890 MHz: $43 + 10\log(1.00) = 43.0$ dBc

Test Result: The test data indicates the DUT meets the requirements

Test Data Table 13 – Radiated Emissions – CW – Uplink /Downlink

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)	Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
836.50	0	0	881.50	0	0
1673.00	V	85.3	1763.00	V	87.8
2509.50	V	65.0	2644.50	V	64.8
3346.00	V	79.3	3526.00	V	68.1
4182.50	V	80.3	4407.50	V	82.2
5019.00	V	84.3	5289.00	V	82.8
5855.50	H/V	NF	6170.50	H/V	NF
6692.00	H/V	NF	7052.00	H/V	NF
7528.50	H/V	NF	7933.50	H/V	NF
8365.00	H/V	NF	8815.00	H/V	NF

Notes: *No other emissions were found up to the 10th harmonics - NOISE FLOOR

MEAN OUTPUT POWER FOR MULTI-CHANNEL ENHANCER (FOR IC ONLY)

Rule Part(s) No.: RSS-131 Issue 2 Para.4.3.1

Requirements: For enhancers rated 500 watts or less: Raise the input level to the DUT until the greater level of the intermodulation products at the enhancer output terminals, Po3 or Po4, equals -43 dBW.

For enhancers rated over 500 watts: Raise the input level to the DUT until the greater level of the intermodulation products at the enhancer output terminals, Po3 or Po4, is 67 dB below the level of either output tone level, Po1 or Po2.

Record all signal levels and their frequencies. Calculate the mean output power (Pmean) under this testing condition using $P_{mean} = P_{o1} + 3 \text{ dB}$.

Test Result: As the following table indicates.

Test Data Table 14 – Mean Power


Channel	Freq (MHz)	dBm	dBW
F1	839.018	20.27	
F2	840.862	19.83	
F3	837.174	-13.27	
F4	842.705	-13.37	
		23.27	6.73
F1	884.018	21.12	
F2	885.140	20.76	
F3	882.896	-13.48	
F4	886.262	-13.33	
		24.12	5.88

PASSBAND GAIN AND BANDWIDTH (FOR IC ONLY)

Rule Part No.: RSS-131 Issue 2 Para 4.2

Requirements: RSS-131 Issue 2 Para 4.2

Test Data: See plots

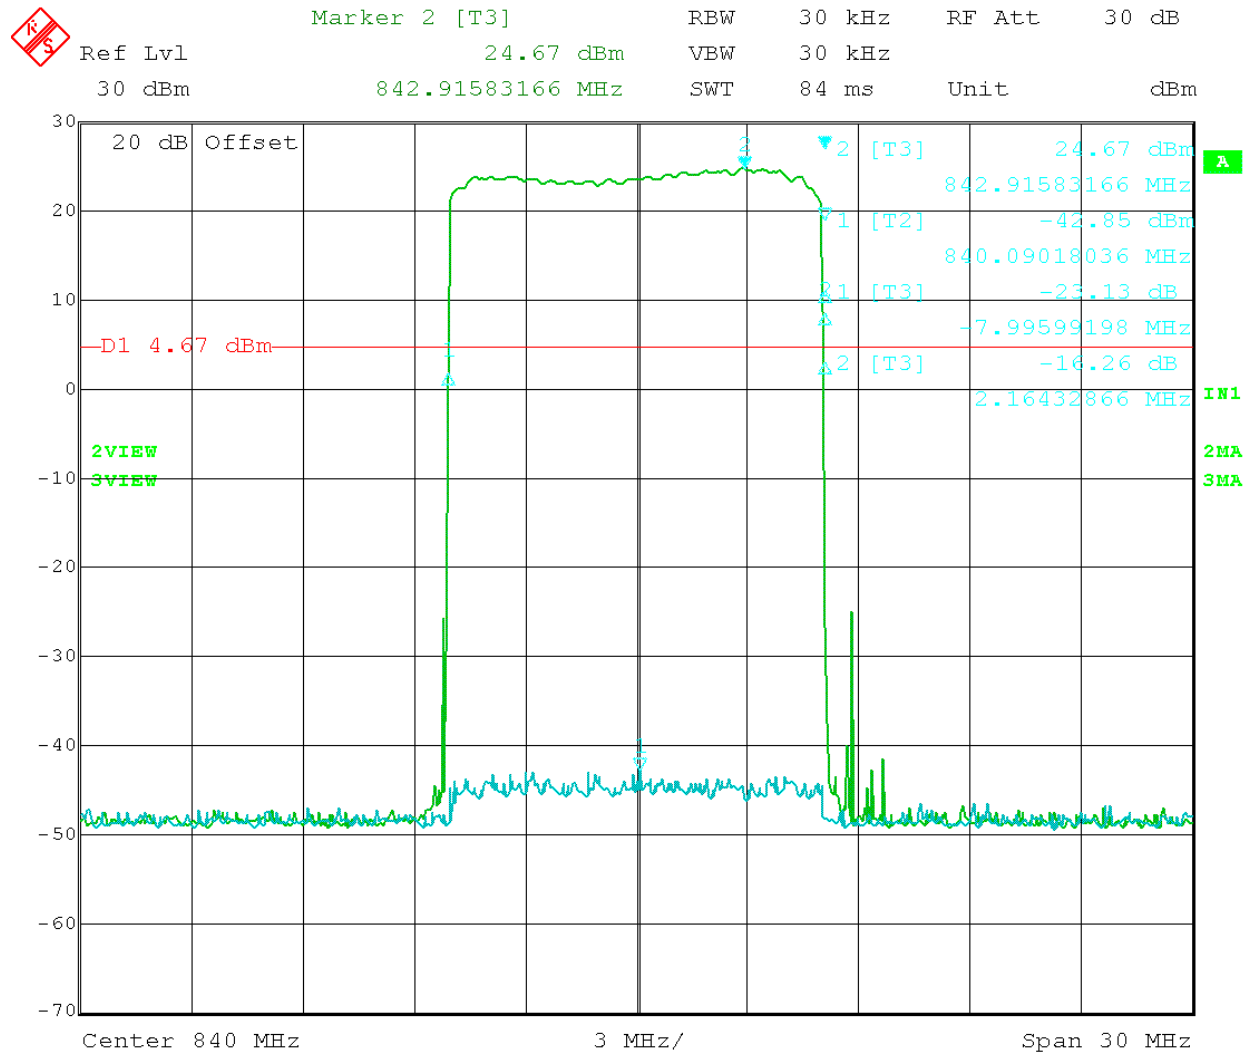


Date: 5.JUL.2011 11:03:02

Figure 46: 20 dB Bandwidth (uplink 800 MHz)



Marker 2 [T3] RBW 30 kHz RF Att 30 dB
 Ref Lvl 24.95 dBm VBW 30 kHz
 30 dBm 881.06212425 MHz SWT 84 ms Unit dBm

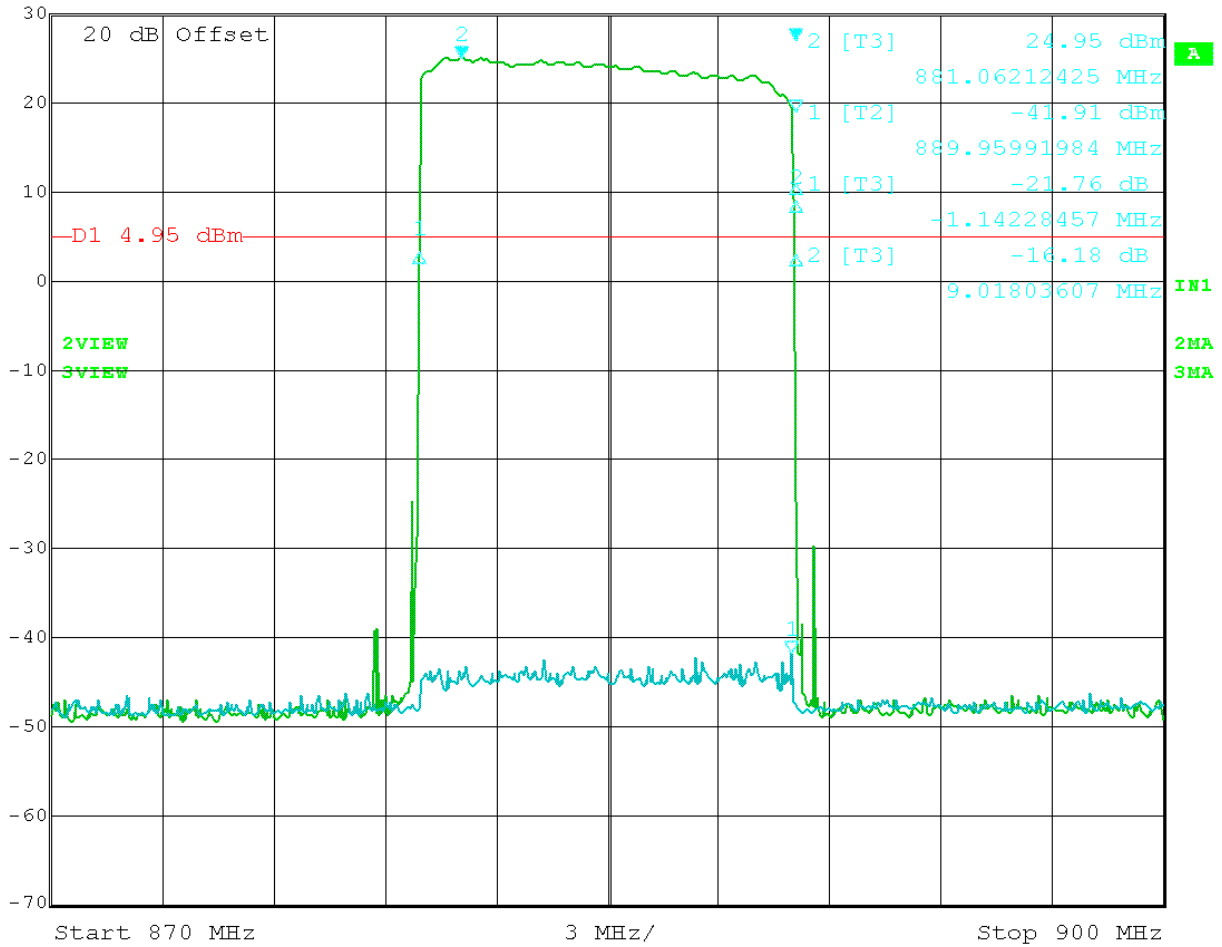

Date: 5.JUL.2011 10:47:11

Figure 48: 20 dB Bandwidth (down link 800 MHz)