

824 - 849 MHz Band


Input

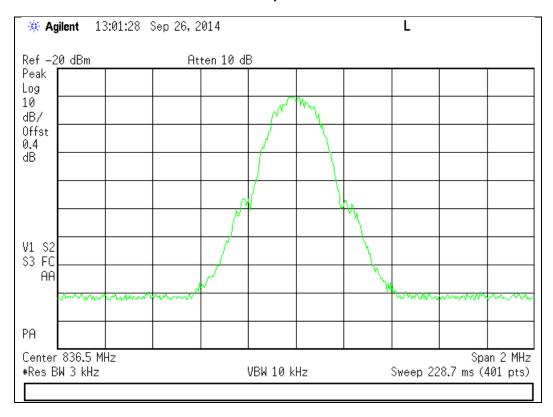


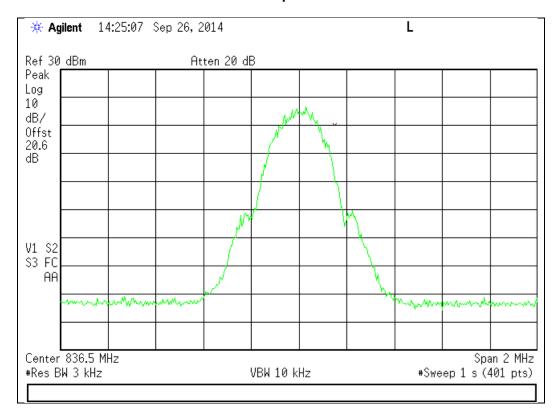

1710 - 1755 MHz Band


Input

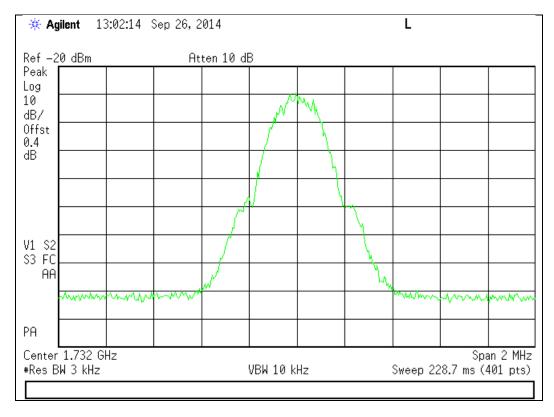


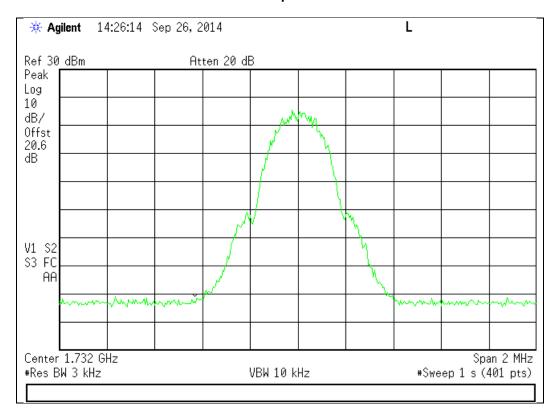

1850 - 1915 MHz Band

Input

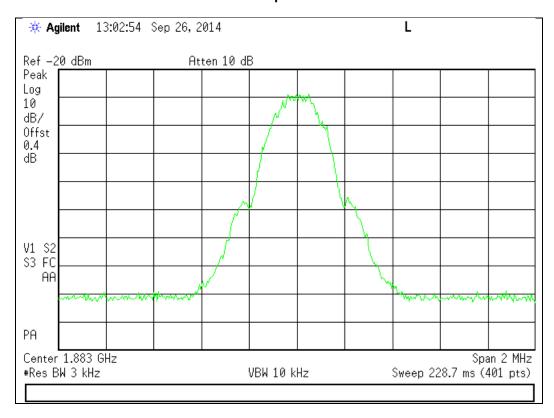

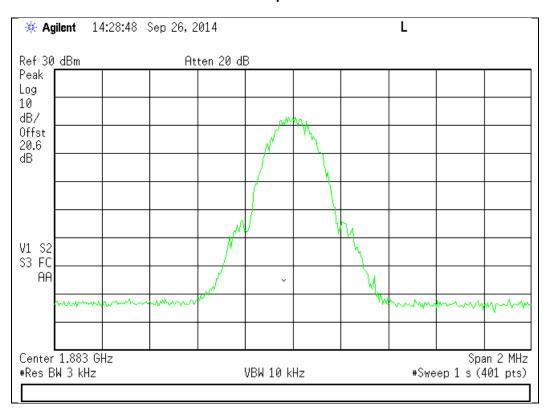





GSM Downlink Test Plots

728 - 746 MHz Band


Input

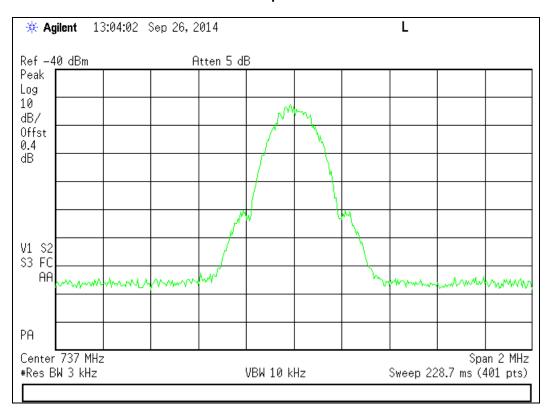


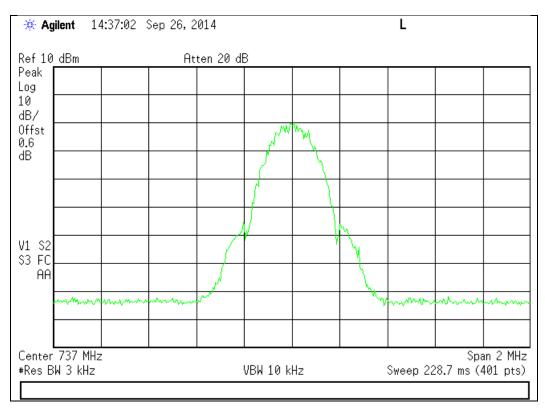

746 - 757 MHz Band


Input

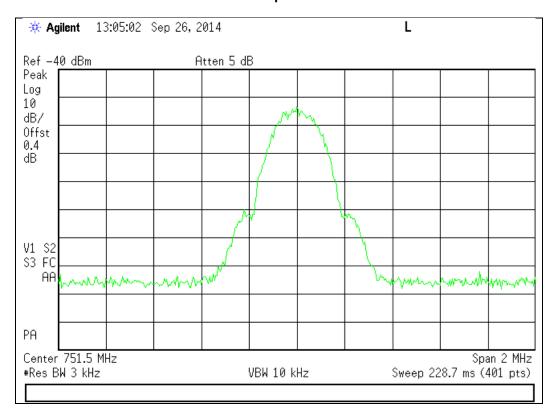


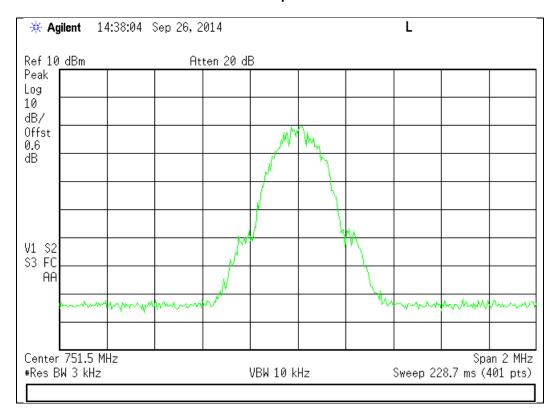

869 - 894 MHz Band


Input

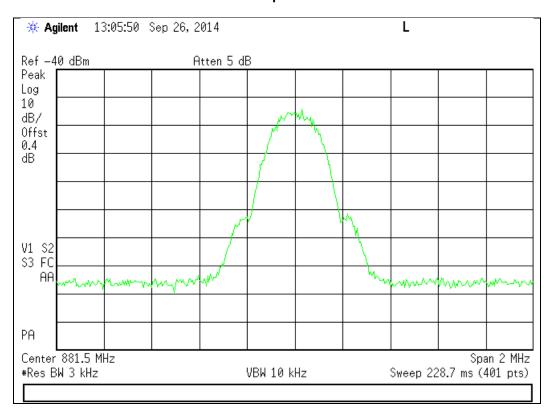


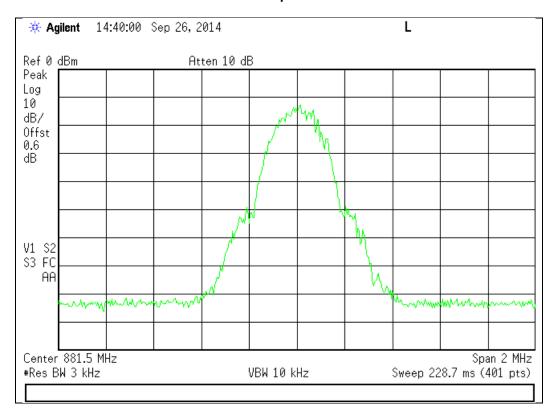

1930 - 1995 MHz Band


Input

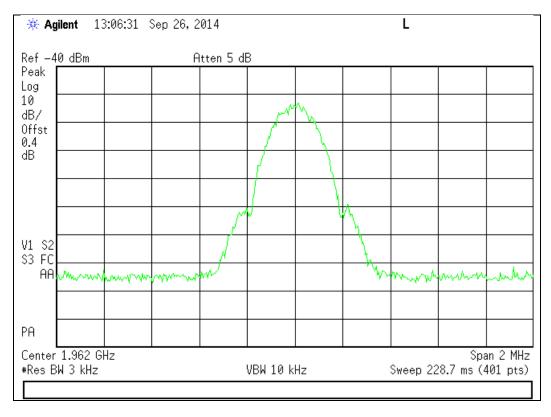


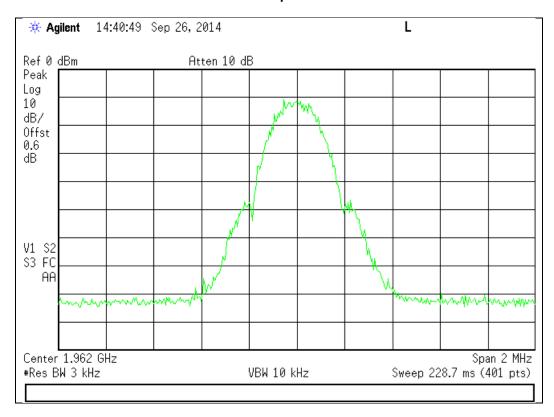

2110 - 2155 MHz Band

Input

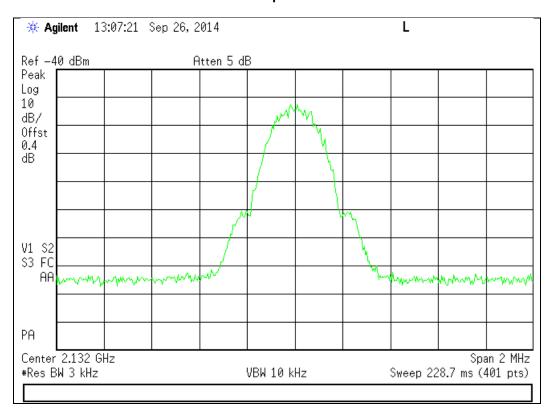

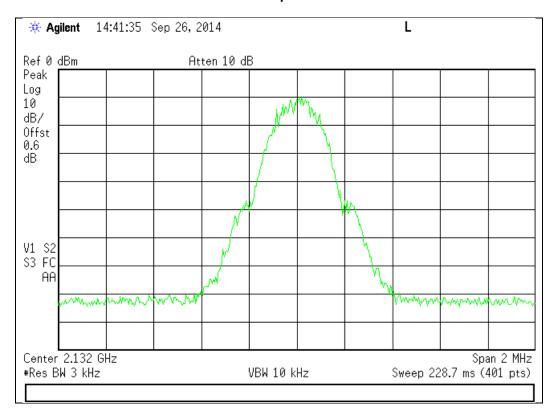





CDMA Uplink Test Plots

698 - 716 MHz Band


Input

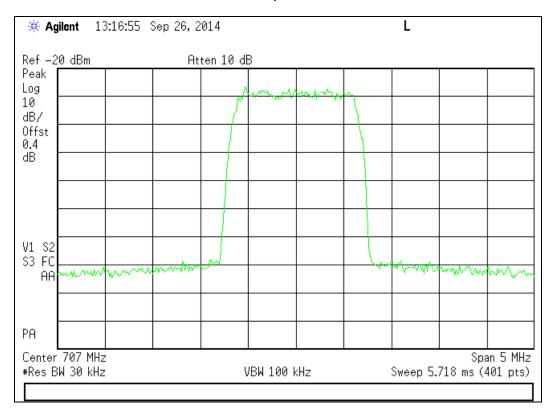


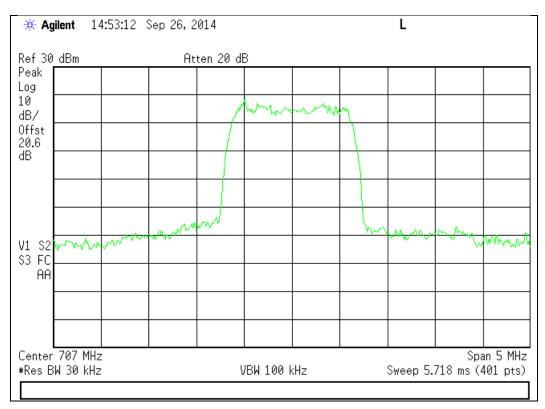

776 - 787 MHz Band


Input

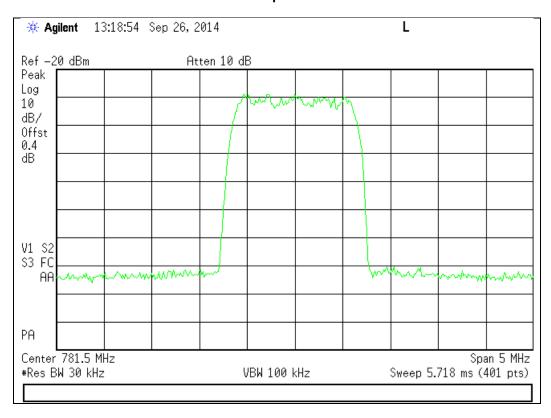


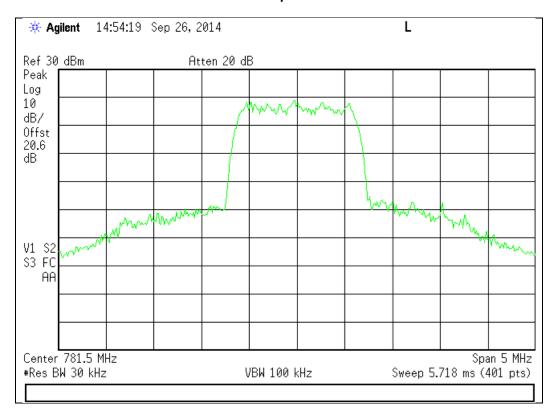

824 - 849 MHz Band


Input

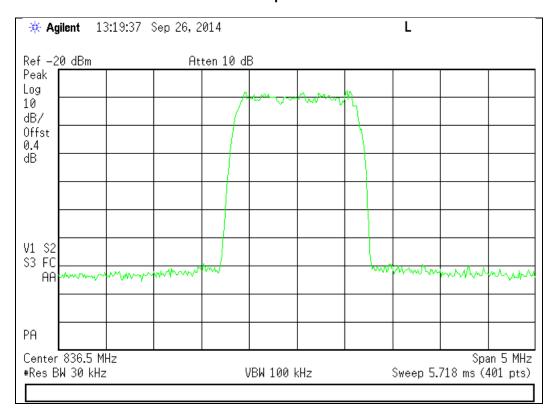


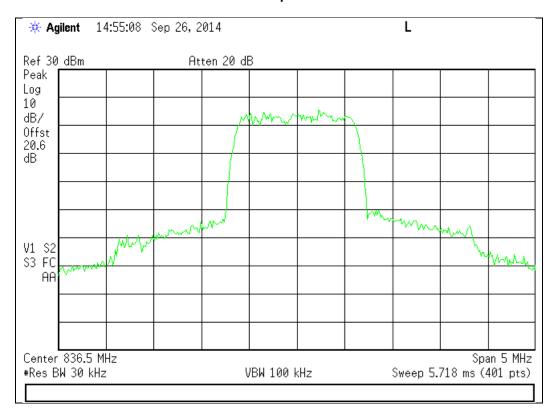

1710 - 1755 MHz Band


Input

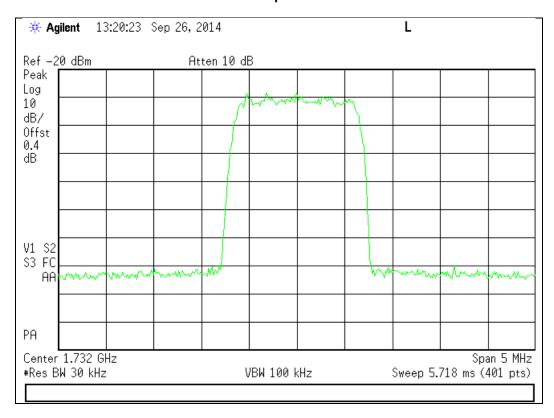


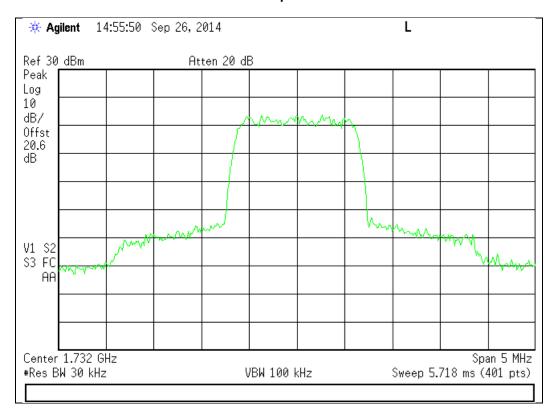

1850 - 1915 MHz Band

Input

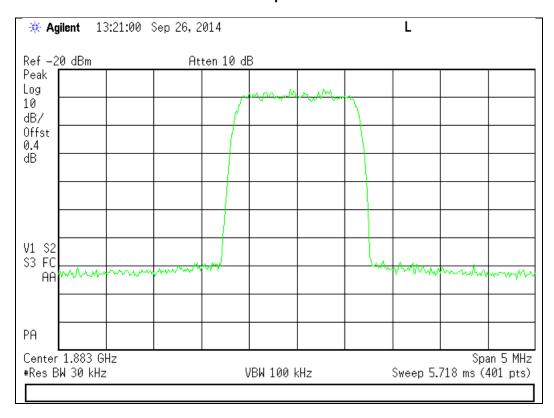

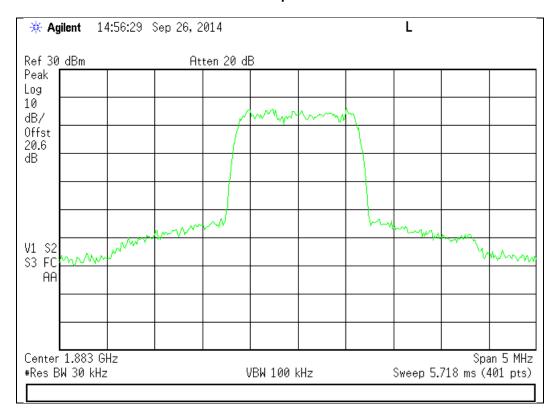





CDMA Downlink Test Plots

728 - 746 MHz Band


Input

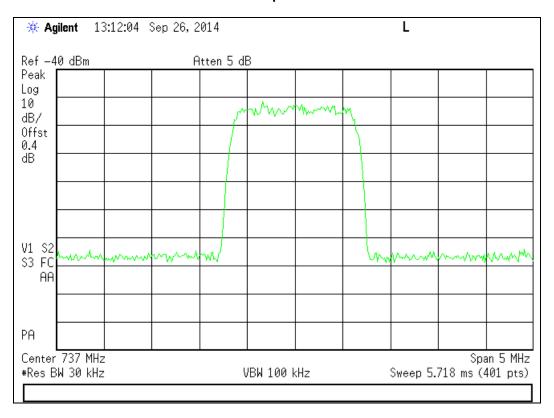


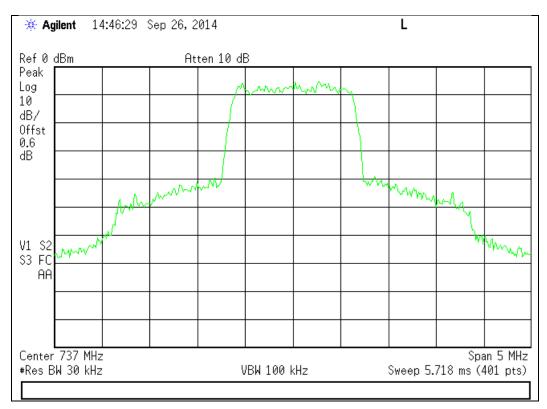

746 - 757 MHz Band


Input

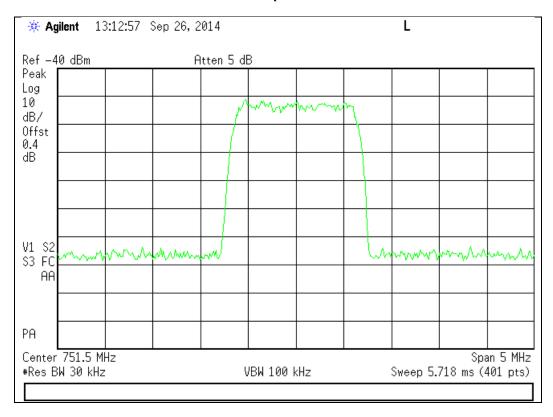


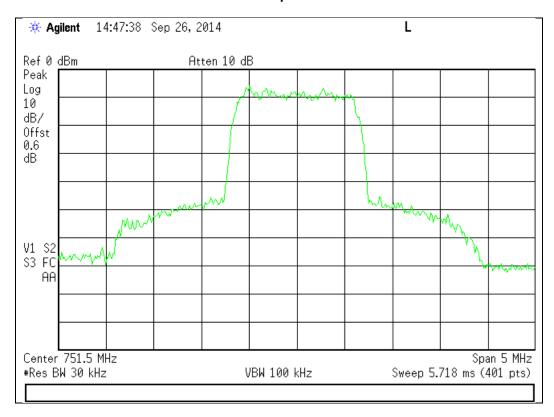

869 - 894 MHz Band


Input

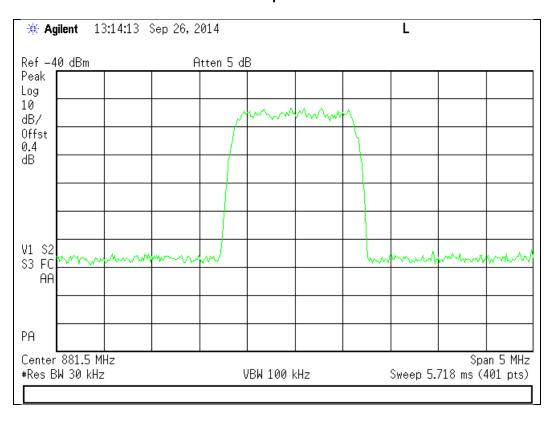


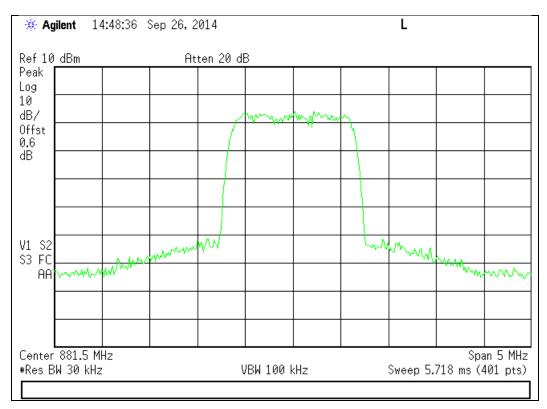

1930 - 1995 MHz Band


Input

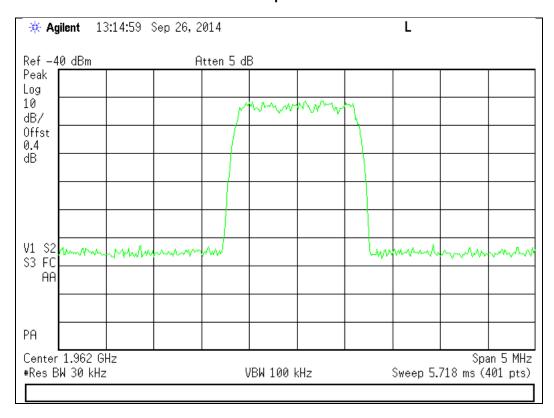


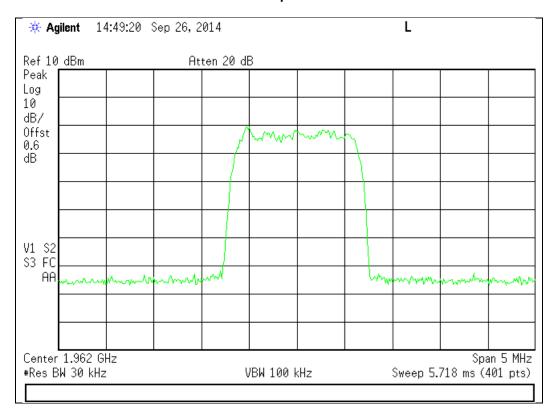

2110 - 2155 MHz Band

Input

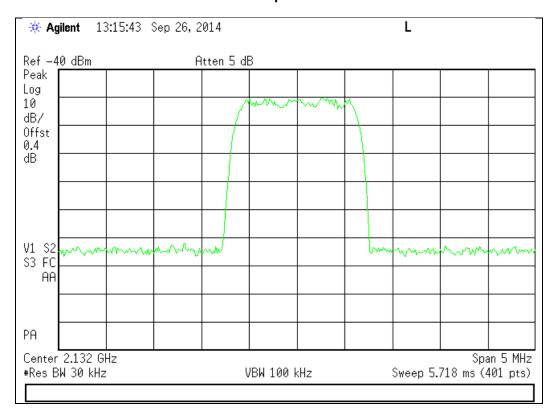

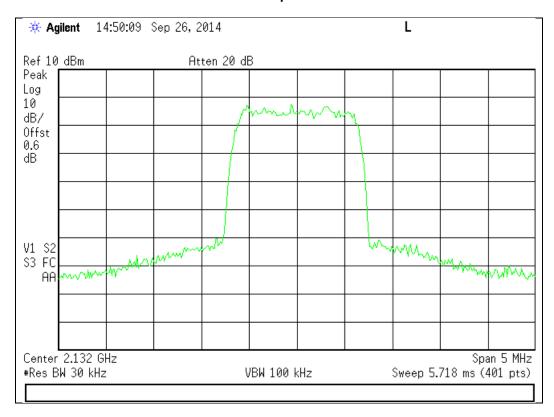





WCDMA Uplink Test Plots

698 - 716 MHz Band


Input

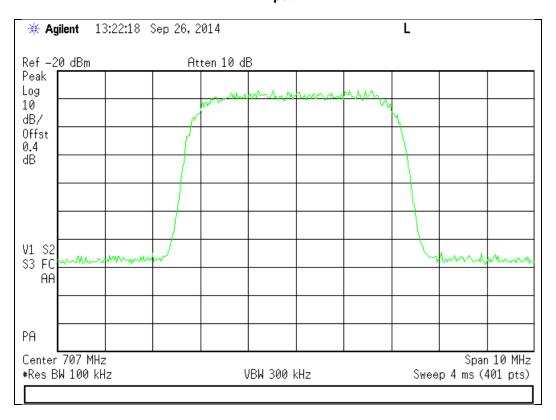


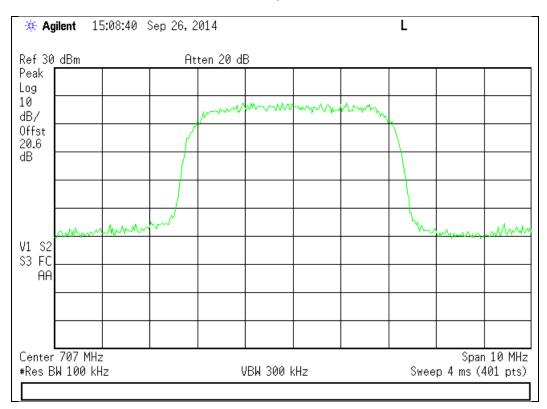

776 - 787 MHz Band


Input

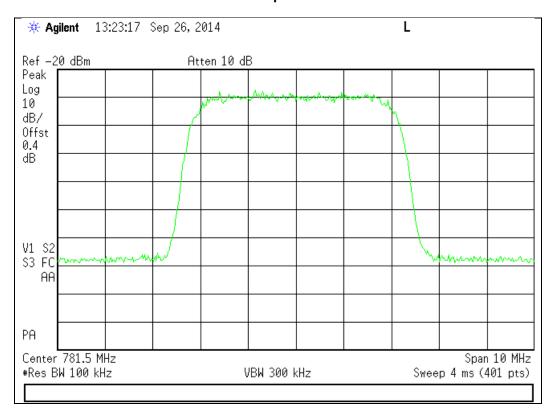


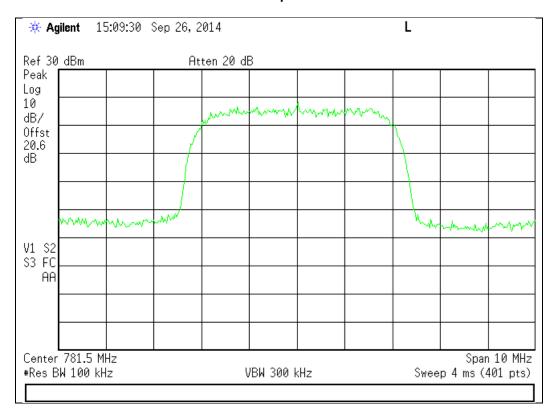

824 - 849 MHz Band


Input

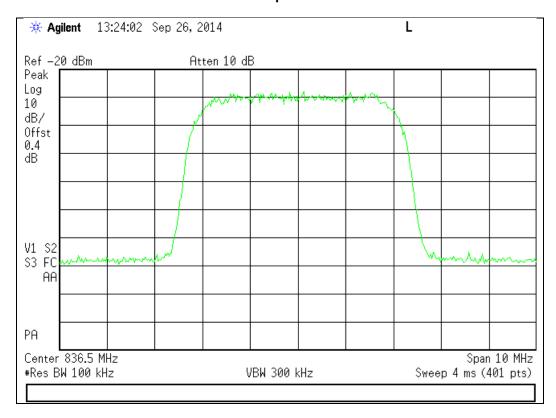


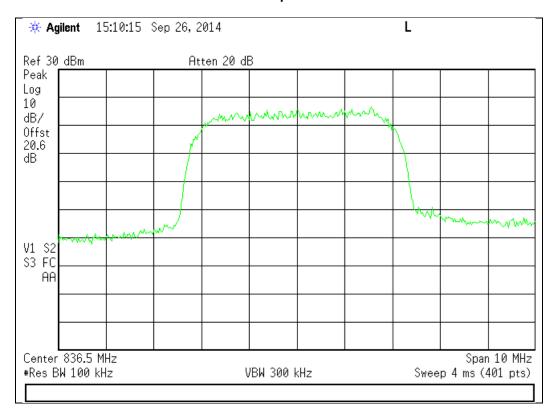

1710 - 1755 MHz Band


Input

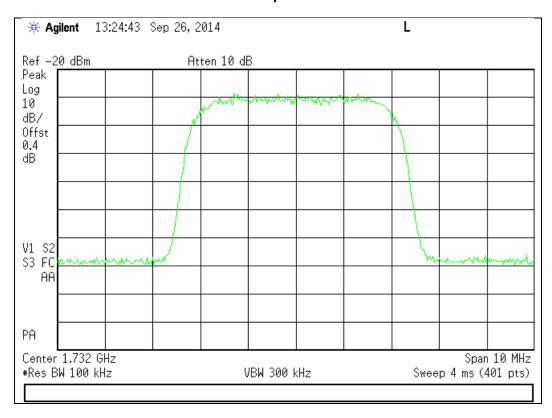


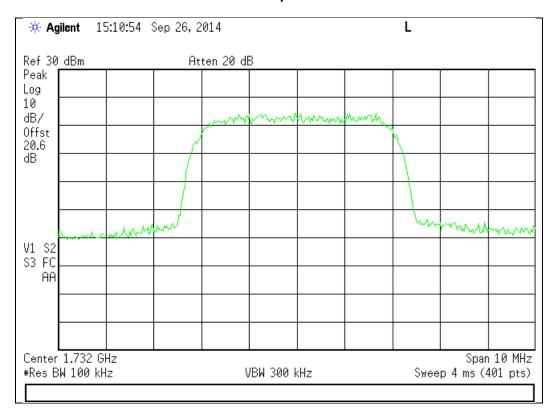

1850 - 1915 MHz Band

Input

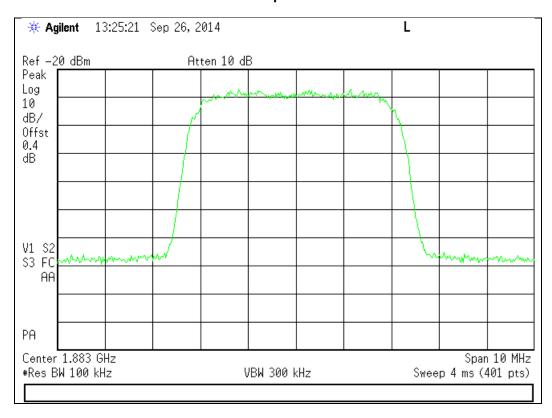

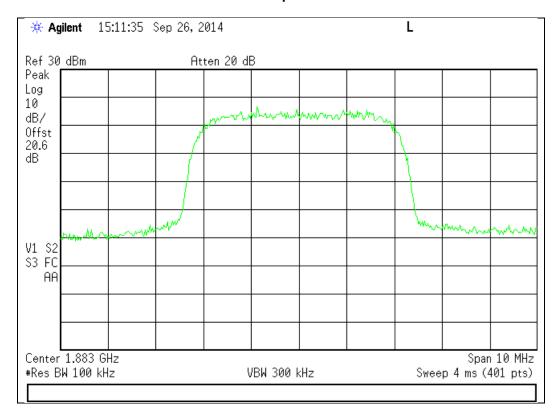





WCDMA Downlink Test Plots

728 - 746 MHz Band


Input

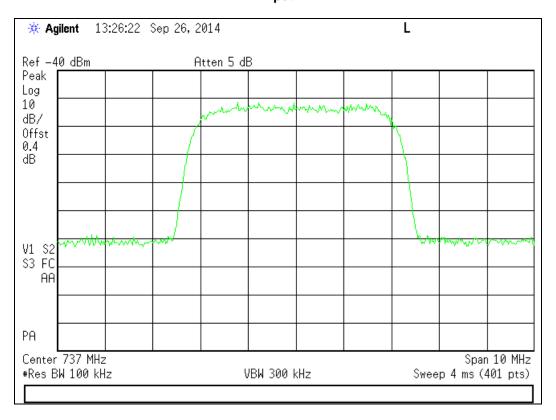


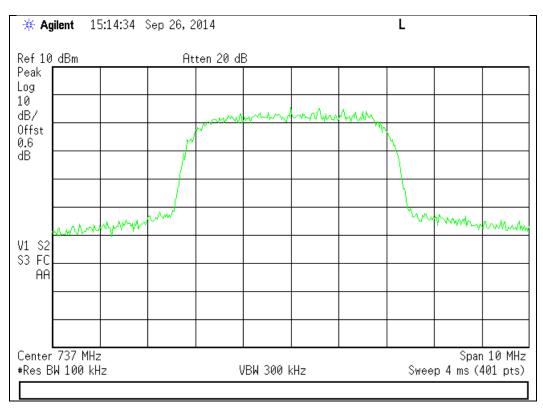

746 - 757 MHz Band


Input

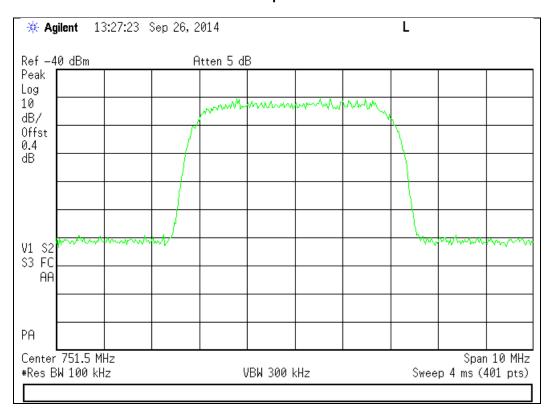


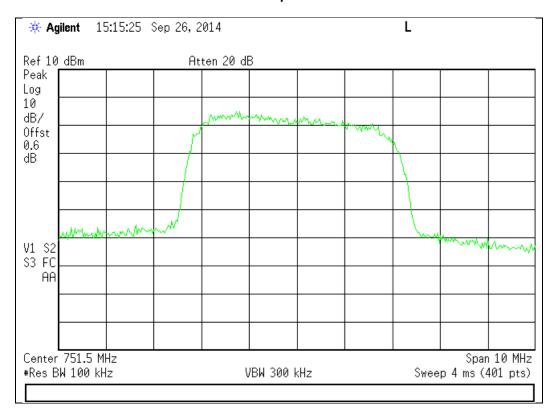

869 - 894 MHz Band


Input

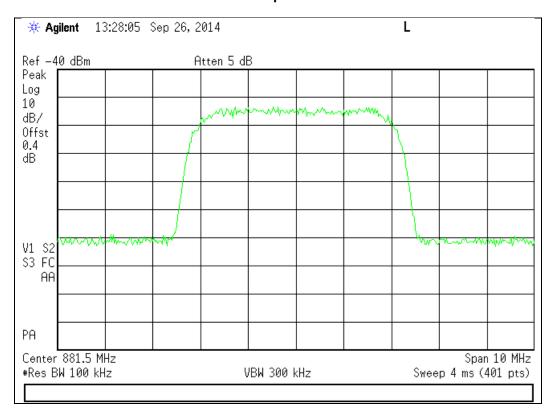


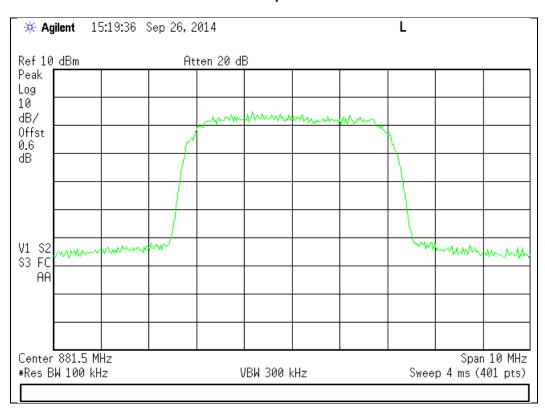

1930 - 1995 MHz Band


Input

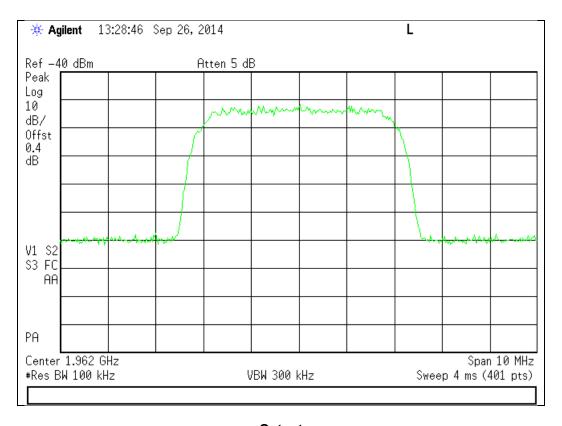


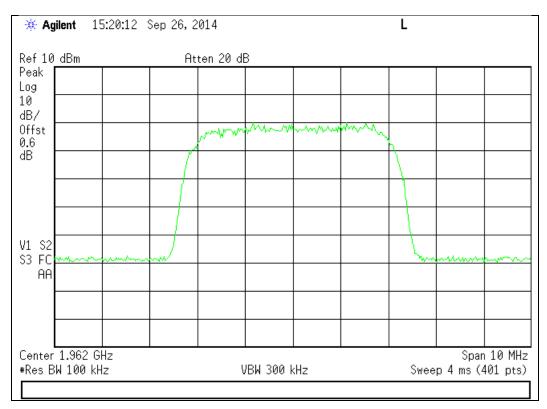

2110 - 2155 MHz Band

Input

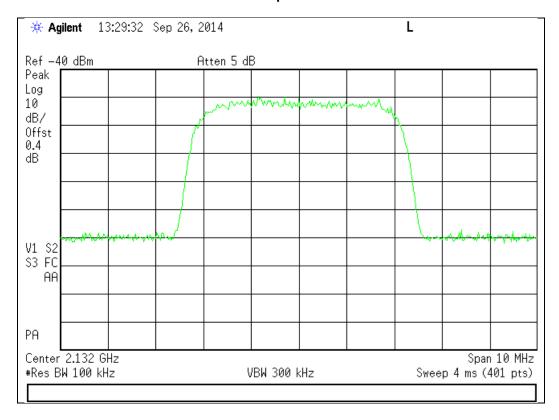

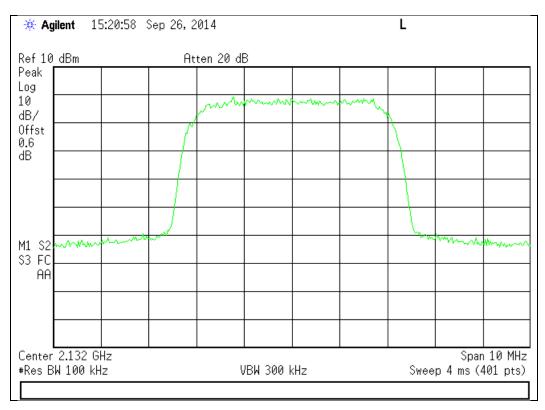




Oscillation Detection Engineer: Mike Graffeo Test Date: 9/24/14

Test Procedure

The EUT was connected to a spectrum analyzer set for 0 Hz operation. The EUT uplink and downlink were fed back upon each other through a selectable band pass filter and variable attenuator. The EUT uplink and downlink were tested to ensure that the presence of oscillation was detected and that the EUT output turned off within 300 mS for the Uplink and 1 second for the Downlink and remained off for 1 minute. A EUT with test software was utilized to ensure that the EUT only had a maximum of 5 attempts at restart from oscillation before permanently shutting off.

Test Setup

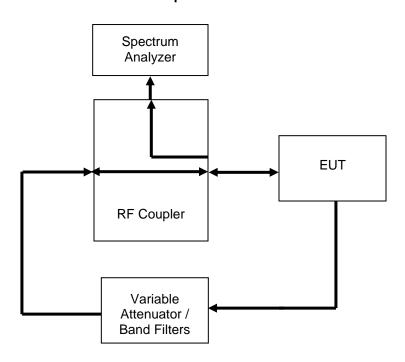

Uplink Detection Time Test Results

Frequency Band (MHz)	Measured Time (mS)	Limit (mS)	Result
698 - 716	26.25	300	Pass
776 - 787	55.12	300	Pass
824 - 849	201.30	300	Pass
1710 - 1755	147.00	300	Pass
1850 - 1915	112.00	300	Pass

Downlink Detection Time Test Results

Frequency Band (MHz)	Measured Time (mS)	Limit (mS)	Result
728 - 746	126.50	1000	Pass
746 - 757	44.00	1000	Pass
869 - 894	49.50	1000	Pass
1930 - 1995	13.75	1000	Pass
2110 - 2155	49.50	1000	Pass

Uplink Restart Time Test Results

Frequency Band (MHz)	Measured Time (S)	Limit (S)	Result
698 - 716	69.8	≥60	Pass
776 - 787	70.0	≥60	Pass
824 - 849	69.8	≥60	Pass
1710 - 1755	69.8	≥60	Pass
1850 - 1915	70.0	≥60	Pass

Downlink Restart Time Test Results

Frequency Band (MHz)	Measured Time (S)	Limit (S)	Result
728 - 746	70.2	≥60	Pass
746 - 757	70.2	≥60	Pass
869 - 894	70.2	≥60	Pass
1930 - 1995	69.8	≥60	Pass
2110 - 2155	70.2	≥60	Pass

Uplink Restart Count Test Results


Frequency Band (MHz)	Restarts	Limit	Result
698 - 716	5	≤5	Pass
776 - 787	5	≤5	Pass
824 - 849	5	≤5	Pass
1710 - 1755	5	≤5	Pass
1850 - 1915	5	≤5	Pass

Downlink Restart Count Test Results


Frequency Band (MHz)	Restarts	Limit	Result
728 - 746	5	≤5	Pass
746 - 757	5	≤5	Pass
869 - 894	5	≤5	Pass
1930 - 1995	5	≤5	Pass
2110 - 2155	5	≤5	Pass

Uplink Detection Time Test Results


698 - 716 MHz Band

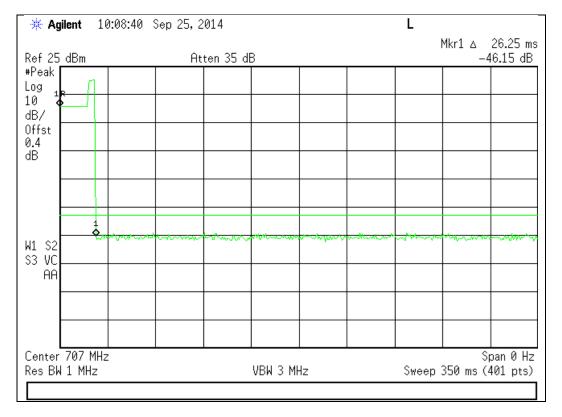


776 - 787 MHz Band

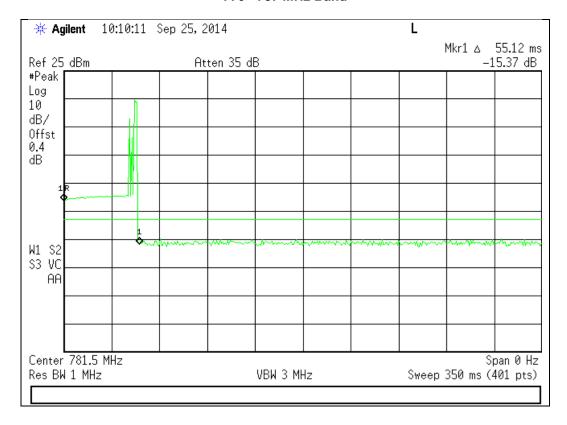


824 - 849 MHz Band

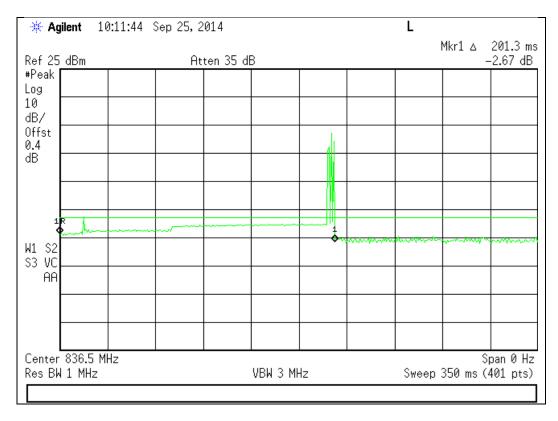

1710 - 1755 MHz Band

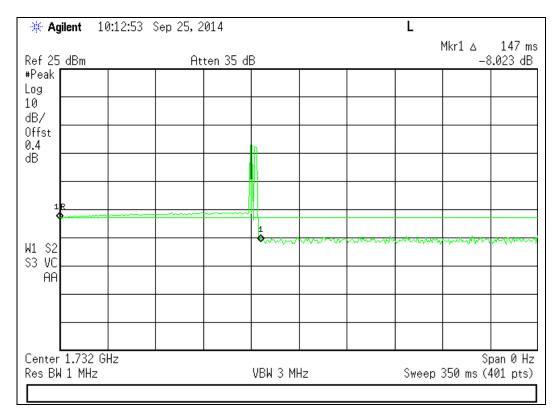


1850 - 1915 MHz Band

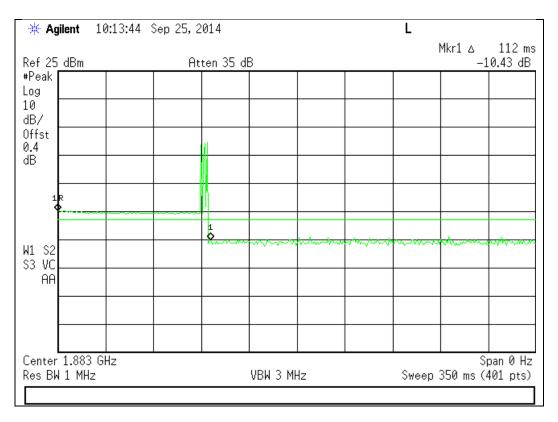


Uplink Restart Time Test Results


698 - 716 MHz Band

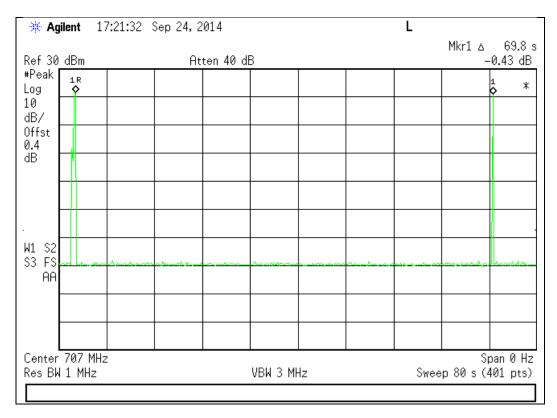


776 - 787 MHz Band

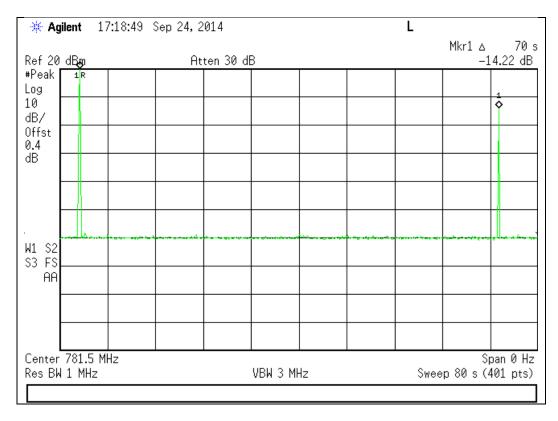


824 - 849 MHz Band

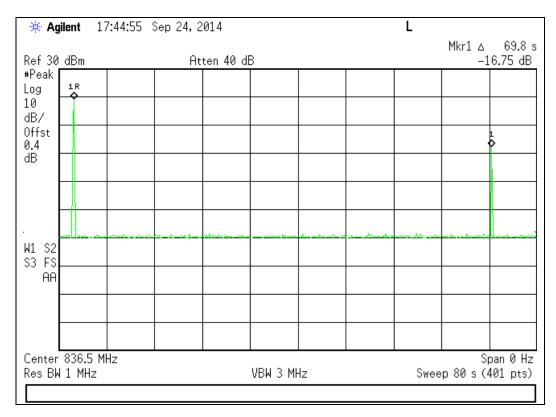

1710 - 1755 MHz Band

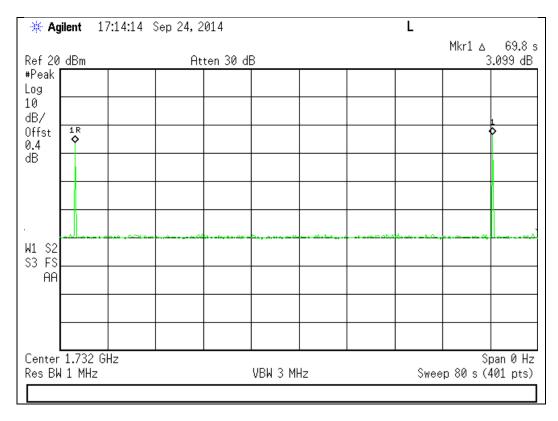


1850 - 1915 MHz Band

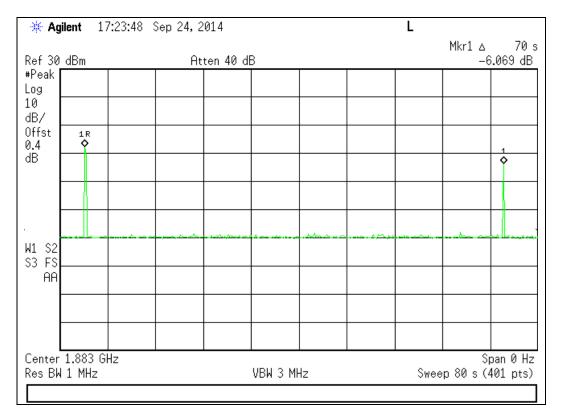


Uplink Restart Count Test Results


698 - 716 MHz Band

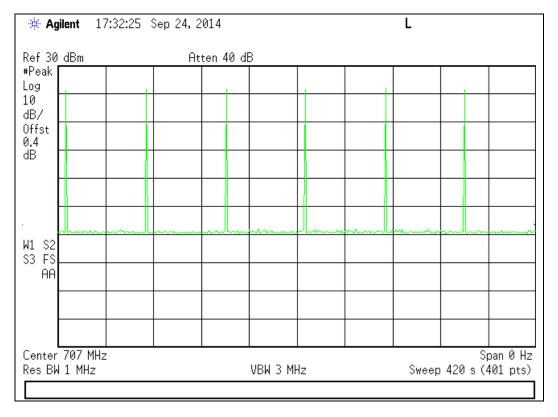


776 - 787 MHz Band

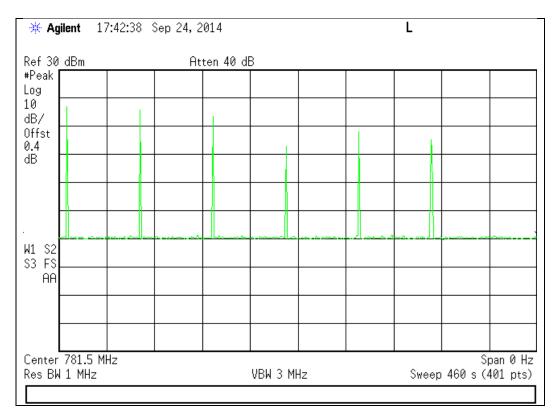


824 - 849 MHz Band

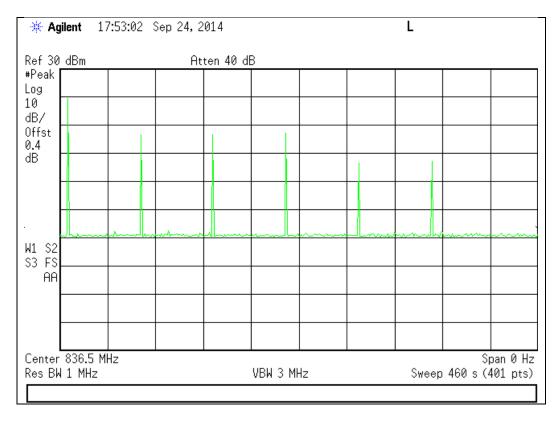

1710 - 1755 MHz Band

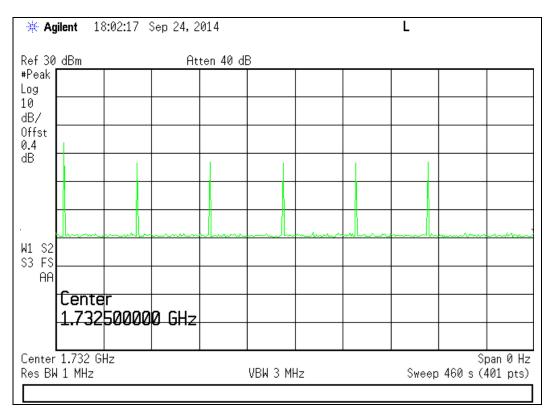


1850 - 1915 MHz Band

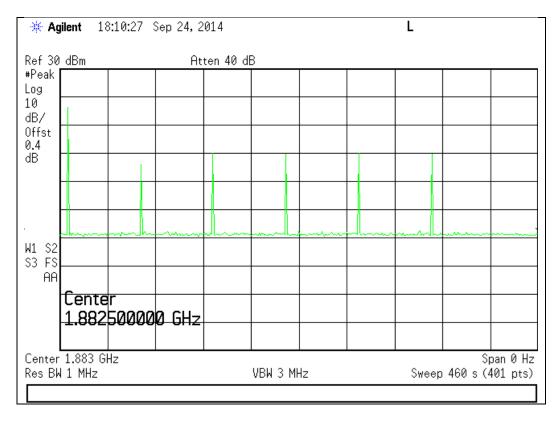


Downlink Detection Time Test Results


728 - 746 MHz Band

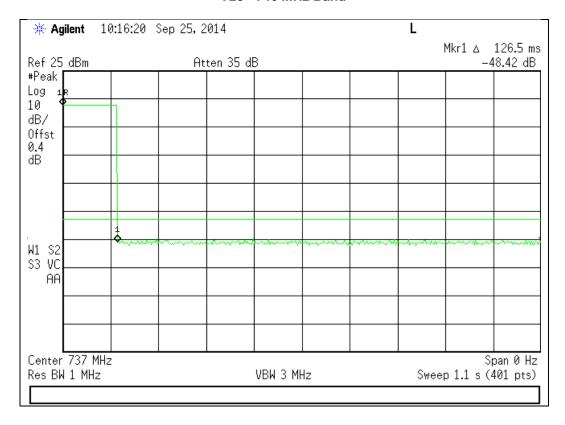


746 - 757 MHz Band

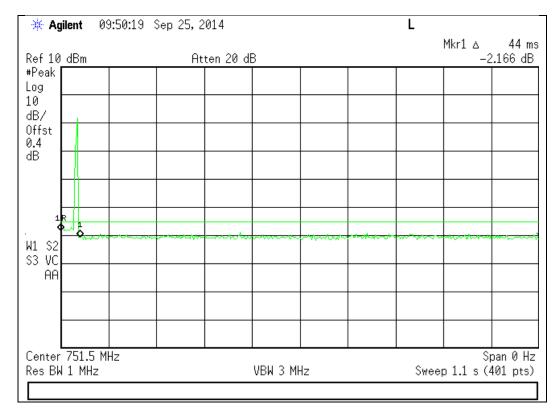


869 - 894 MHz Band

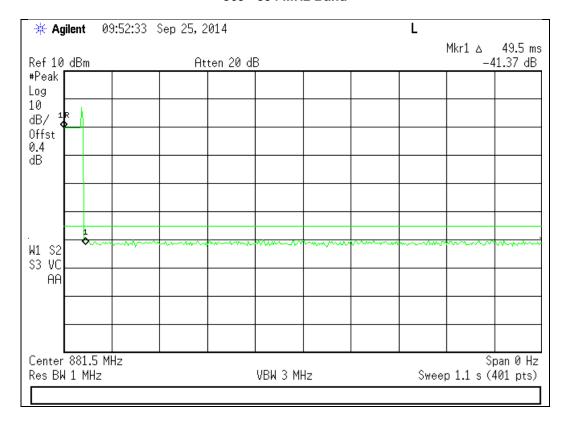

1930 - 1995 MHz Band

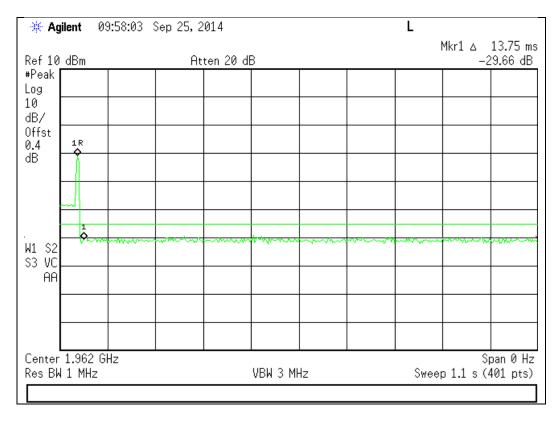


2110 - 2155 MHz Band

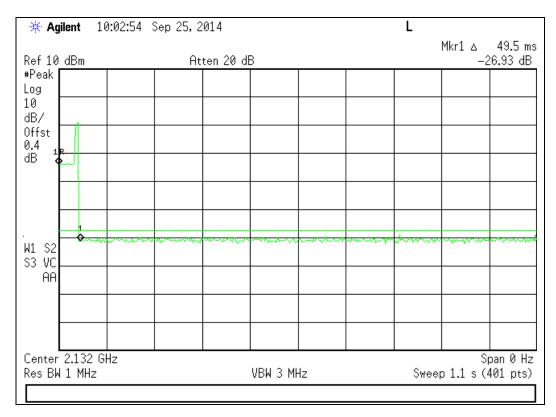


Downlink Restart Time Test Results


728 - 746 MHz Band

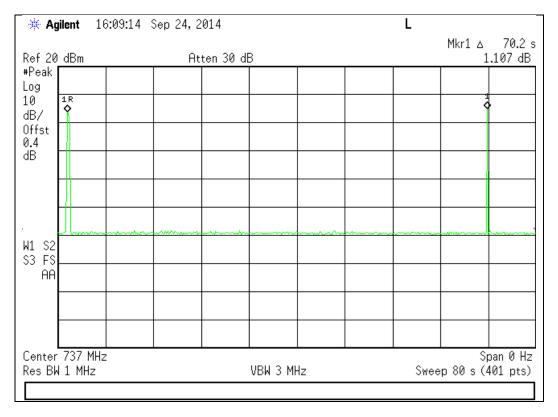


746 - 757 MHz Band

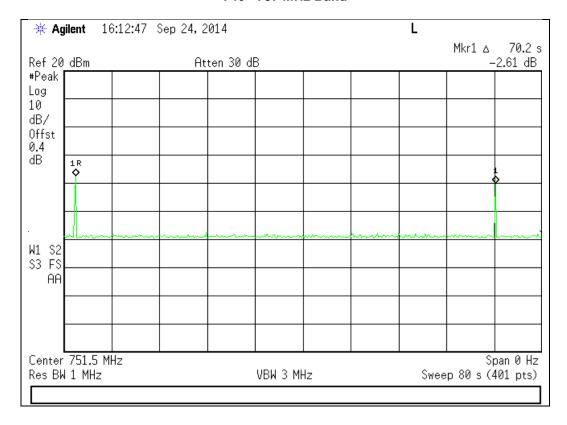


869 - 894 MHz Band

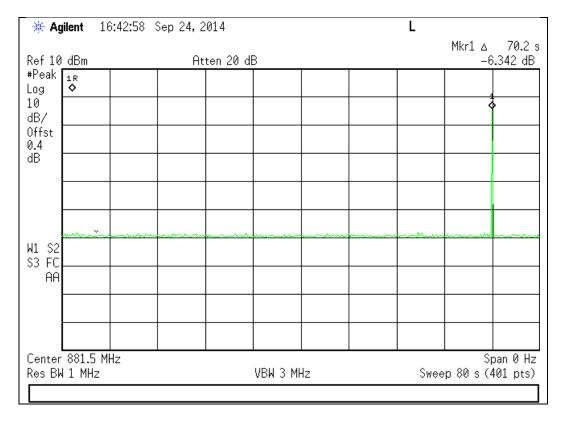

1930 - 1995 MHz Band

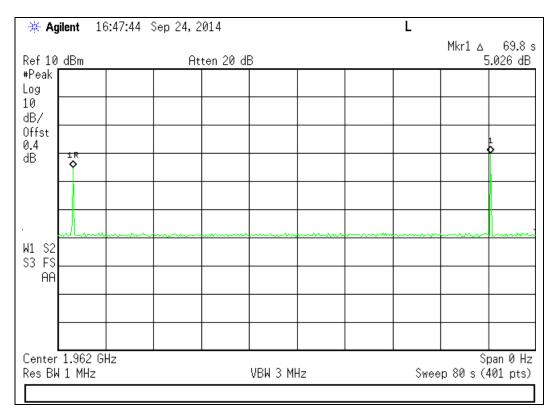


2110 - 2155 MHz Band

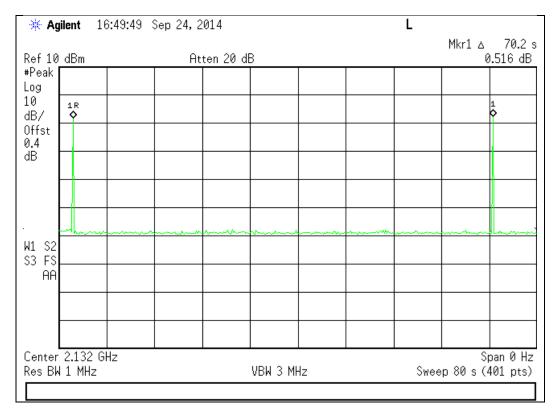


Downlink Restart Count Test Results


728 - 746 MHz Band

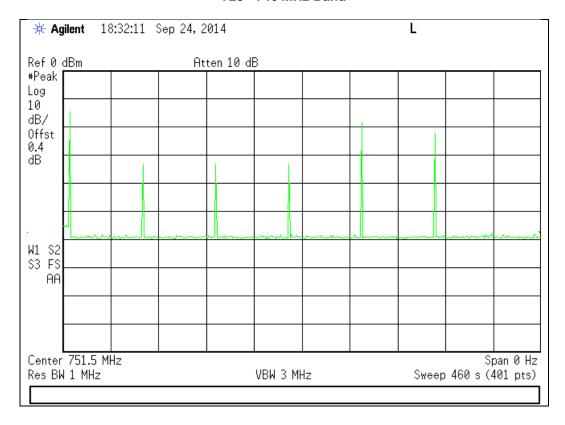


746 - 757 MHz Band

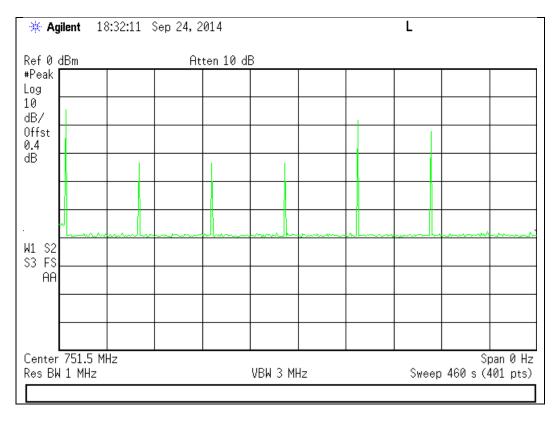


869 - 894 MHz Band

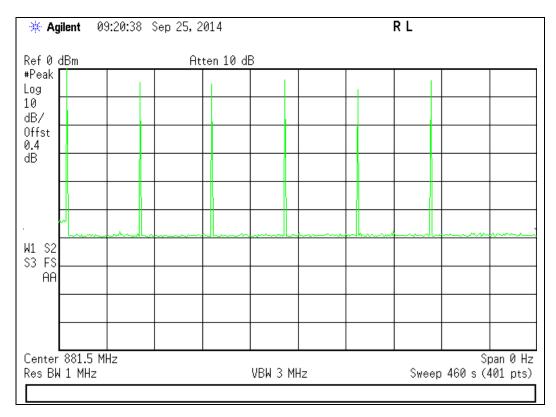

1930 - 1995 MHz Band

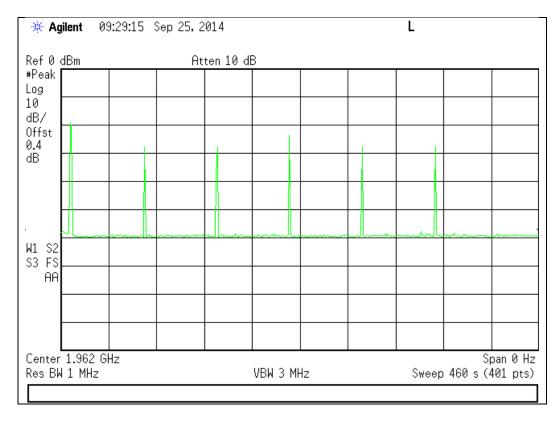

2110 - 2155 MHz Band

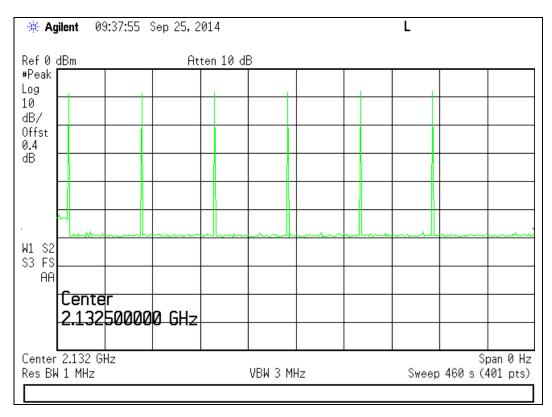




Radiated Spurious Engineer: Mike Graffeo Test Date: 9/26/14

Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure that the signal levels were maximized. All cable and antenna correction factors were input into the spectrum analyzer ensuring an accurate measurement in ERP/EIRP with the resultant power in dBm. A signal generator was used to provide a CW signal centered in each operational uplink and downlink band. The EUT output was terminated into a 50 Ohm non-radiating load.

The following formula was used for calculating the limits:

Radiated Spurious Emissions Limit = P1 - (43 + 10Log(P2)) = -13dBm P1 = power in dBmP2 = power in Watts

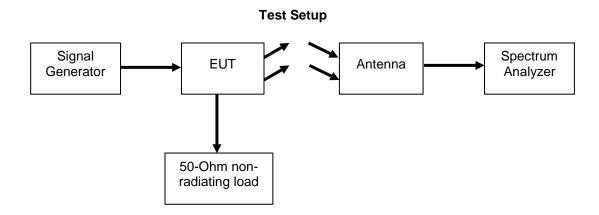

Uplink Test Results

698 - 716 MHz Band 707 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1414	-82.12	-13	Pass
2121	-78.64	-13	Pass
2828	-77.76	-13	Pass

776 - 787 MHz Band 781.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1563	-79.62	-13	Pass
2344.5	-76.93	-13	Pass
3126	-78.32	-13	Pass

824 - 849 MHz Band 836.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1673	-81.29	-13	Pass
2509.5	-74.69	-13	Pass
3344	-76.47	-13	Pass

1710 - 1755 MHz Band 1732.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3465	-62.04	-13	Pass
5197.5	-67.10	-13	Pass
6830	-69.60	-13	Pass

1850 - 1915 MHz Band 1882.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3765	-67.35	-13	Pass
5647.5	-76.39	-13	Pass
7530	-71.64	-13	Pass

Downlink Test Results

728 - 746 MHz Band 737 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1474	-89.62	-13	Pass
2211	-86.69	-13	Pass
2948	-84.37	-13	Pass

746 - 757 MHz Band 751.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1503	-80.72	-13	Pass
2254.5	-78.66	-13	Pass
3006	-79.24	-13	Pass

869 - 894 MHz Band 881.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1763	-78.49	-13	Pass
2644.5	-76.90	-13	Pass
3526	-79.54	-13	Pass

1930 - 1995 MHz Band 1960.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3921	-75.74	-13	Pass
5881.5	-73.92	-13	Pass
7842	-69.28	-13	Pass

2110 - 2155 MHz Band 2132.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
4265	-76.04	-13	Pass
6397.5	-74.37	-13	Pass
8530	-70.33	-13	Pass

No other emissions were detected. All emissions were lower than $-13~\mathrm{dBm}$. All emissions were system noise floor.

Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Horn Antenna, Amplified	ARA	DRG-118/A	i00271	5/8/14	5/8/16
Bi-Log Antenna	Schaffner	CBL 6111D	i00349	10/8/13	10/8/15
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	3/24/14	3/24/15
Voltmeter	Fluke	75111	i00320	3/24/14	3/24/15
EMI Analyzer	Agilent	E7405A	i00379	1/14/14	1/14/15
Spectrum Analyzer *	Tektronix	RSA5126A	i00424	9/22/13	9/22/14
Non-radiating load	Termaline	8201	i00334	Verified o	n: 9/1/14
Signal Generator	Rohde & Schwarz	SMU200A	i00405	12/11/13	12/11/14
RF Directional Coupler	Meca	CS06-1.500V	i00412	Verified o	n: 9/1/14

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT

^{*} Lab Manager has approved a 30 day extension on this piece of equipment