

October 30, 2020

FEDERAL COMMUNICATIONS COMMISSION  
 Authorization and Evaluation Division  
 7435 Oakland Mills Road  
 Columbia, MD 21046


Subject: Tuning and Adjustment of Wilson Model 460065 Signal Booster

Model 460065 Signal Booster					
	Tuned Frequency (MHz)	Target Gain (dB)	Maximum Gain (dB)	Target Power (dBm)	Maximum Power (dBm)
Uplink	698-716	58.7	58.7	24.3	24.3
	777-787	56.7	56.7	23.0	23.0
Downlink	728-746	59.8	59.8	11.7	11.7
	746-756	61.8	61.8	12.9	12.9


There are no external tuning adjustments. The amplifier is factory set to not exceed maximum gains, power levels, and downlink dependent region (RSSI) set points as provided in the test results. It is designed with advanced internal programming, which allows it to automatically adjust for a variety of conditions, while still amplifying weak signals.

**Tune-up Procedure:**

1. Once the antennas and antenna cables are connected, turn the unit on by connecting the power supply cord, at the bottom. A Wilson Lightning Surge Protector is recommended for all building installations. Make sure the protector is installed outside the building. Connect it to suitable ground and in line, between the Outside Antenna and the Signal Amplifier.

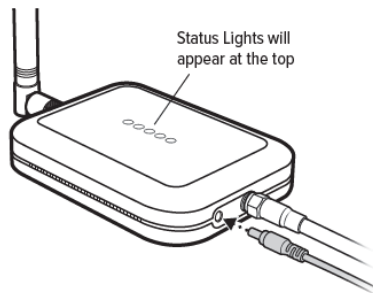

2. Standard installation

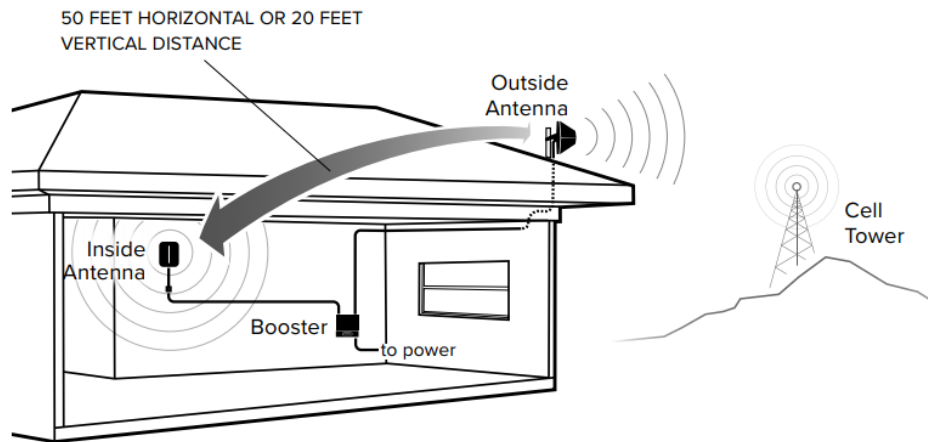

Sincerely,

*Mikel Parry*

Mikel Parry  
Compliance Manager  
Compliance Manager  
3301 E Deseret Dr.  
St. George, UT 84790