

Test Report

Customer:

Trimble Kaiserslautern GmbH

Am Sportplatz 5
67661 Kaiserslautern

Tel.: +49 6301 7114-14
Fax +49 6301 322-13

RF Test Report 150707-AU01+W02



Industry Industrie
Canada Canada

Trimble Kaiserslautern GmbH

Repeater

ST802



The test results refer exclusively to the tested model.

This test report may not be copied or published in a part without the written authorization of the accreditation agency and/or EMV **TESTHAUS** GmbH



Deutsche
Akkreditierungsstelle
D-PL-12155-01-00

EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35
94315 Straubing
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: info@emv-testhaus.com

Accreditation:



FCC facility registration number: 221458
Test Firm Type "2.948 listed": Valid until 2017-04-22
Test Firm Type "accredited": Valid until 2017-06-09
MRA US-EU, FCC designation number: DE0010
BnetzA-CAB-02/21-02/04 Valid until 2018-11-27

Industry Canada test site numbers with registration expiry date:
3472A-1, expiring 2018-11-09
3472A-2, expiring 2018-11-12

Test Laboratory:

EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

The technical accuracy is guaranteed through the quality management of the
EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 2 of 73

Table of contents

1	Test regulations	7
2	Equipment under Test (EUT)	9
3	6 dB bandwidth	12
4	Maximum peak conducted output power	16
5	Power spectral density	21
6	Band-edge compliance	27
7	Spurious RF Conducted Emission	32
8	Radiated emission measurement (<1 GHz)	43
9	Radiated emission measurement (> 1 GHz)	52
10	Radio frequency radiation exposure evaluation for mobile devices	68
11	Equipment calibration status	70
12	Measurement uncertainty	71
13	Summary	72



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 3 of 73

List of pictures

Picture 1: Test setup for 6 dB bandwidth measurement.....	13
Picture 2: 6dB bandwidth, channel low	14
Picture 3: 6dB bandwidth, channel mid.....	14
Picture 4: 6dB bandwidth, channel high.....	15
Picture 5: Test setup for conducted output power measurement	17
Picture 6: Conducted output power, channel low	19
Picture 7: Conducted output power, channel mid.....	19
Picture 8: Conducted output power, channel high.....	20
Picture 9: Test setup for power spectral density measurement.....	22
Picture 10: Power spectral density, channel low - complete carrier	24
Picture 11: Power spectral density, channel low - zoom to maximum.....	24
Picture 12: Power spectral density, channel mid - complete carrier	25
Picture 13: Power spectral density, channel mid - zoom to maximum.....	25
Picture 14: Power spectral density, channel high - complete carrier	26
Picture 15: Power spectral density, channel high - zoom to maximum.....	26
Picture 16: Test setup for band-edge compliance measurement	28
Picture 17: Band edge compliance – lower edge with channel low	29
Picture 18: Band edge compliance – upper edge with channel high	29
Picture 19: lower edge (PK) with channel low	30
Picture 20: lower edge (AV) with channel low	30
Picture 21: upper edge (PK) with channel high.....	31
Picture 22: upper edge (AV) with channel high.....	31
Picture 23: Test setup for conducted spurious emission measurement	33
Picture 24: spurious emission, channel low (9 kHz - 30 MHz).....	34
Picture 25: spurious emission, channel mid (9 kHz - 30 MHz)	35
Picture 26: spurious emission, channel high (9 kHz - 30 MHz)	35
Picture 27: spurious emission, channel low (30 MHz - 1 GHz).....	36
Picture 28: spurious emission, channel mid (30 MHz - 1 GHz)	37
Picture 29: spurious emission, channel high (30 MHz - 1 GHz)	38
Picture 30: spurious emission, channel low (1 GHz - 26 GHz).....	39
Picture 31: spurious emission, channel mid (1GHz - 26 GHz)	40
Picture 32: spurious emission, channel high (1 GHz - 26 GHz)	41
Picture 33: spurious emission, channel high (1 GHz - 26 GHz), zoom to carrier.....	42



Picture 34: Test setup for radiated emission measurement (< 30 MHz).....	45
Picture 35: Test setup for radiated emission measurement (< 1 GHz).....	45
Picture 36: Radiated emission 9 kHz – 30MHz (Channel low)	47
Picture 37: Radiated emission 9 kHz – 30MHz (Channel mid).....	47
Picture 38: Radiated emission 9 kHz – 30MHz (Channel high).....	48
Picture 39: Radiated emission 30 MHz – 1000MHz (Channel low)	49
Picture 40: Radiated emission 30 MHz – 1000MHz (Channel mid).....	50
Picture 41: Radiated emission 30 MHz – 1000MHz (Channel high).....	51
Picture 42: Test setup for radiated emission measurement (> 1 GHz).....	54
Picture 43: spurious emission, Channel low - PK.....	56
Picture 44: spurious emission, Channel low - AV.....	56
Picture 45: spurious emission, Channel low - PK.....	57
Picture 46: spurious emission, Channel low – AV.....	57
Picture 47: spurious emission, Channel low - PK.....	58
Picture 48: spurious emission, Channel low - AV.....	58
Picture 49: spurious emission, Channel low - PK.....	59
Picture 50: spurious emission, Channel low – AV.....	59
Picture 51: spurious emission, Channel mid - PK.....	61
Picture 52: spurious emission, Channel mid - AV.....	61
Picture 53: spurious emission, Channel mid - PK.....	62
Picture 54: spurious emission, Channel mid – AV.....	62
Picture 55: spurious emission, Channel mid - PK.....	63
Picture 56: spurious emission, Channel mid - AV.....	63
Picture 57: spurious emission, Channel high - PK.....	65
Picture 58: spurious emission, Channel high - AV.....	65
Picture 59: spurious emission, Channel high - PK.....	66
Picture 60: spurious emission, Channel high - AV.....	66
Picture 61: spurious emission, Channel mid - PK.....	67
Picture 62: spurious emission, Channel mid - AV.....	67



List of tables

Table 1: Cable corrections for conducted measurements at temporary antenna connector 11
Table 2: Equipment calibration status..... 70
Table 3: Measurement uncertainty 71



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 6 of 73

1 Test regulations

47 CFR Part 2 October 2015	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
47 CFR Part 15 October 2015	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
KDB Publication no. 558074 June 5, 2014	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
ANSI C63.10 June 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
FCC KDB 174176 D01 June 3, 2015	AC power-line conducted emissions Frequently Asked Questions
FCC KDB 447498 D01 February 7, 2014	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
RSS-Gen Issue 4, November 2014	General Requirements for Compliance of Radio Apparatus
RSS-102 Issue 5, March 2015	Radio Frequency Exposure Compliance of Radiocommunications Apparatus
RSS-247 Issue 1, May 2015	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 7 of 73

1.1 Cross reference of FCC and Industry Canada standards

47 CFR Part and section	Test	Page	Result	Equivalent to IC
15.207	AC power-line conducted emission 150 kHz to 30 MHz	---	Not applicable (see note 1)	RSS-Gen Issue 4 section 8.8
15.247(a)(2) KDB 558074, section 8	6 dB bandwidth	12	Passed	RSS-247 Issue 1, section 5.2
15.247(b) KDB 558074, section 9	Maximum peak conducted output power	16	Passed	RSS-Gen Issue 4, section 6.12 RSS-247 Issue 1, section 5.4
15.247(d)	Band-edge compliance	27	Passed	RSS-247 Issue 1, section 5.5
15.247(e) KDB 558074, section 10	Power spectral density	21	Passed	RSS-Gen Issue 4, section 6.12 RSS-247 Issue 1, section 5.2
15.247(d)	Spurious RF conducted emission	32	Passed	RSS-247 Issue 1, section 5.5
15.247(d)	Radiated emission 9 kHz to 10 th harmonic	43	Passed	RSS-Gen Issue 4, section 6.13 RSS-247 Issue 1, section 5.5
2.1093	Radio frequency radiation exposure evaluation for portable devices	68	Exempted from SAR and RF evaluation	RSS-Gen Issue 4, section 3.2

Note1: EUT is battery supplied and has no possibility to connect a charging device.

1.2 Summary of test results

Standard	Test result
FCC 47 CFR Part 15, section 15.247	Passed
RSS-247 Issue 1 and RSS-Gen Issue 4	Passed



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 8 of 73

2 Equipment under Test (EUT)

Product type:	Repeater
Model Name:	ST802
Manufacturer:	Trimble Kaiserslautern GmbH
Serial number(s):	Sample #3 for radiated measurements Sample #2 with temporary antenna connector for conducted measurements
FCC ID:	PWR-TK46BL
IC:	4131A-TK46BL
Application frequency band:	2400 MHz to 2483.5 MHz
Frequency range:	2410M Hz to 2470 MHz
Operating frequency:	2410M Hz to 2470 MHz
Channel spacing ¹⁾ :	3 MHz
Number of RF-channels ¹⁾ :	16
Type of modulation ¹⁾ :	DSSS
Antenna type ¹⁾ :	SMD antenna, not detachable, g = 1.0 dBi
Antenna connectors:	None (temporary antenna connector for testing purposes only)
Antenna diversity:	<input type="checkbox"/> yes <input checked="" type="checkbox"/> no
Power supply ¹⁾ :	Battery supplied Nominal voltage: 3.00 V DC
Temperature range ¹⁾ :	-20°C to +50°C

¹⁾ As declared by manufacturer.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 9 of 73

2.1 Photo documentation

For photos taken during testing see annex A.
For photos of the EUT see annex B.
For internal photos of the EUT see annex C.

2.2 Short description of the EUT

The EUT is a repeater for increasing wireless range. It supports BLE-protocol.

During pre-measurements it was investigated which EUT position is the respective worst-case. The EUT positions are documented in annex A.

2.3 Operation mode

The EUT was set to the measured channels. Further the following adjustments were set:

Tx-mode: Channel low -> 2410 MHz
 Channel mid -> 2440 MHz
 Channel high -> 2470 MHz
 continuous carrier, modulated

For all conducted measurements reference point is plug of temporary antenna connector. Therefore all reading values were corrected by the attenuation of the test cable and the cable of the temporary antenna connector (see Table 1).



2.4 Configuration

The following peripheral devices and interface cables were connected during the tests:

Device	Model:	S/N
Repeater	ST802	Sample #3 (for radiated measurements)
Repeater	ST802	Sample #2 (for conducted measurements)

Used cables

Count:	Description: (type / lengths / remarks)	Serial No
1	Adapter antenna cable (MMCX / SMA-connector) / 0.1 m / coax for attenuation see Table 1	N/A

Channel	Frequency [GHz]	test cable attenuation [dB]	antenna cable attenuation [dB]	cable correction [dB]
Low	2.410	0.7	No antenna cable used	0.7
Mid	2.440	0.8		0.8
High	2.470	0.8		0.8

Table 1: Cable corrections for conducted measurements at temporary antenna connector



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 11 of 73

3 6 dB bandwidth

according to 47 CFR Part 15, section 15.247(a), and
KDB Publication no. 558074, section 8

3.1 Test location

- Conducted measurement
- Scan with peak detector in 3 m CDC
- CISPR measurement with quasi peak detector on 10 m open area test site.
- Measurement with peak detector on 3 m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site	EMV TESTHAUS GmbH	E00354

3.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCI 3 (OATS)	Rohde & Schwarz	E00552
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI 3 (CDC)	Rohde & Schwarz	E00001
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/>	VULB 9163 (OATS)	Schwarzbeck	E00013
<input type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011

3.3 Limits

The minimum 6 dB bandwidth shall be at least 500 kHz

3.4 Test procedure

1. The test is performed in accordance with FCC KDB publication no. 558074
2. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
3. The unit was operated in continuous transmit mode with modulation.
4. The resolution bandwidth was set to 100 kHz with video bandwidth at least equal to three times the resolution bandwidth.
5. The maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission were recorded.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 12 of 73

3.5 Test setup

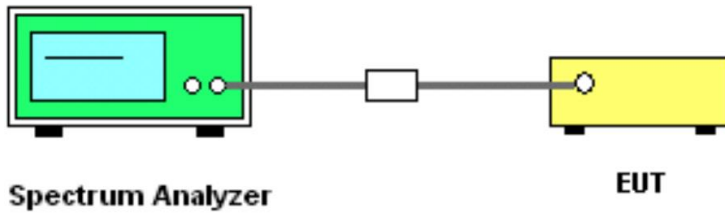

Picture 1: Test setup for 6 dB bandwidth measurement

3.6 Test deviation

There is no deviation from the original standard.


3.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode.


3.8 Test results

Temperature:	19°C	Humidity:	44%
Tested by:	M. Müller	Test date:	2015-12-10

Channel	Frequency (GHz)	6 dB bandwidth (MHz)
Low	2.40974	0.6442
Mid	2.43998	0.6442
High	2.46974	0.6394

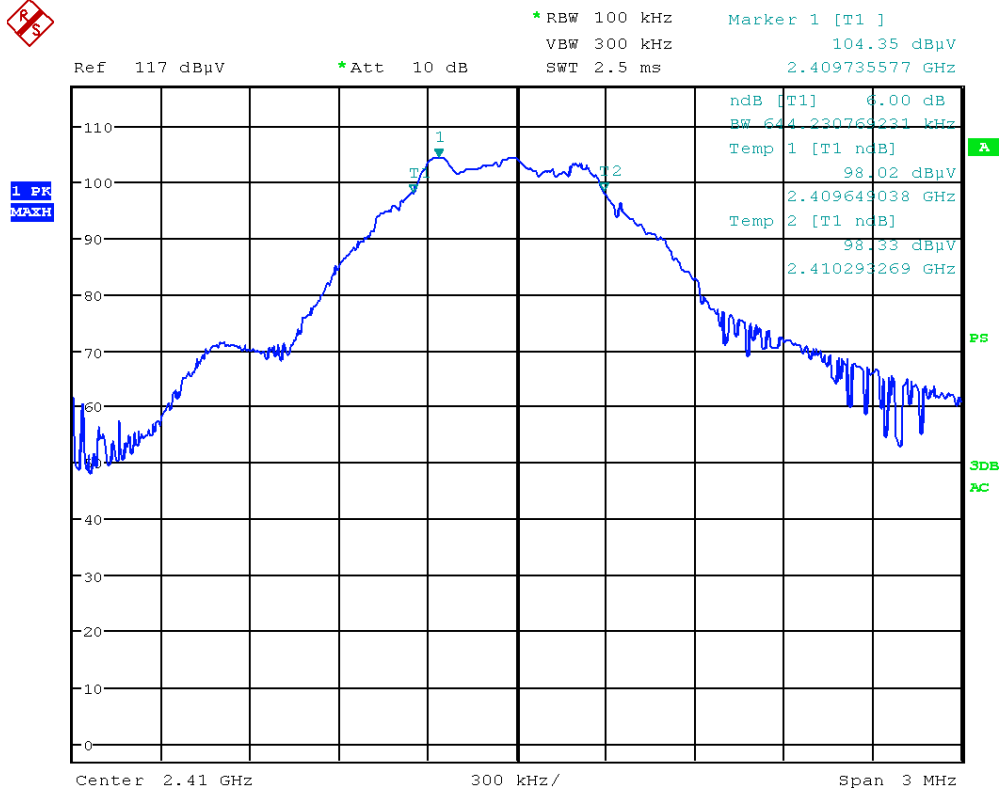

Picture 2: 6dB bandwidth, channel low

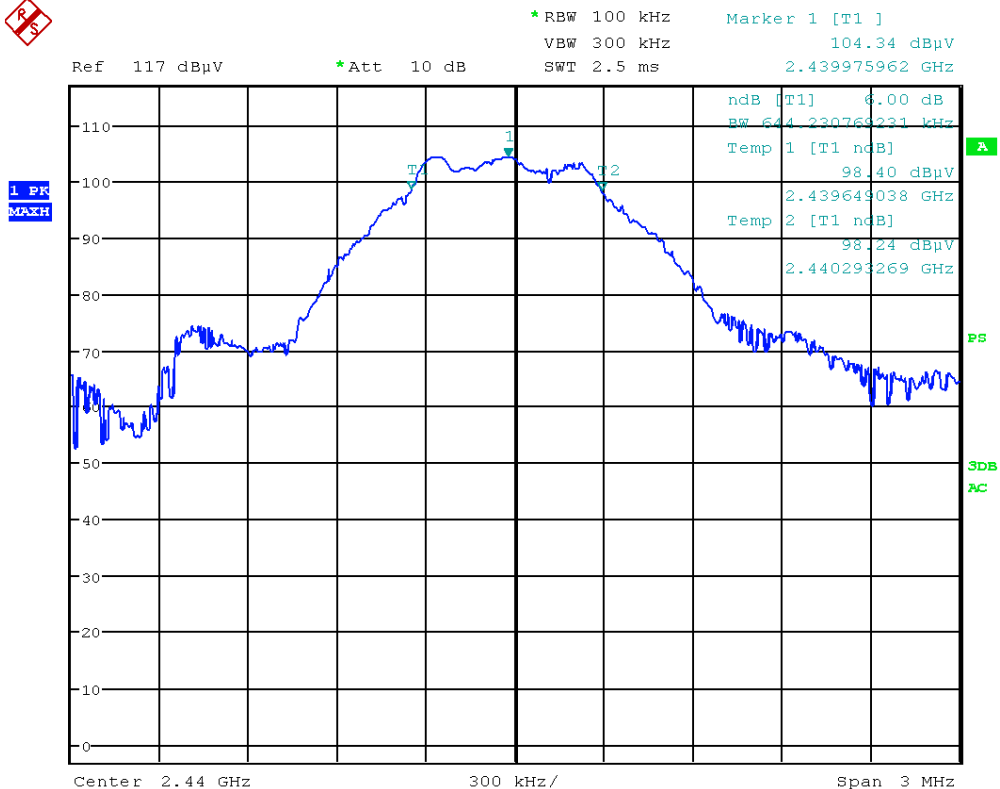

Picture 3: 6dB bandwidth, channel mid



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 104.37 dBμV
SWT 2.5 ms 2.469735577 GHz

Ref 117 dBμV

*Att 10 dB

L PR
MAXH

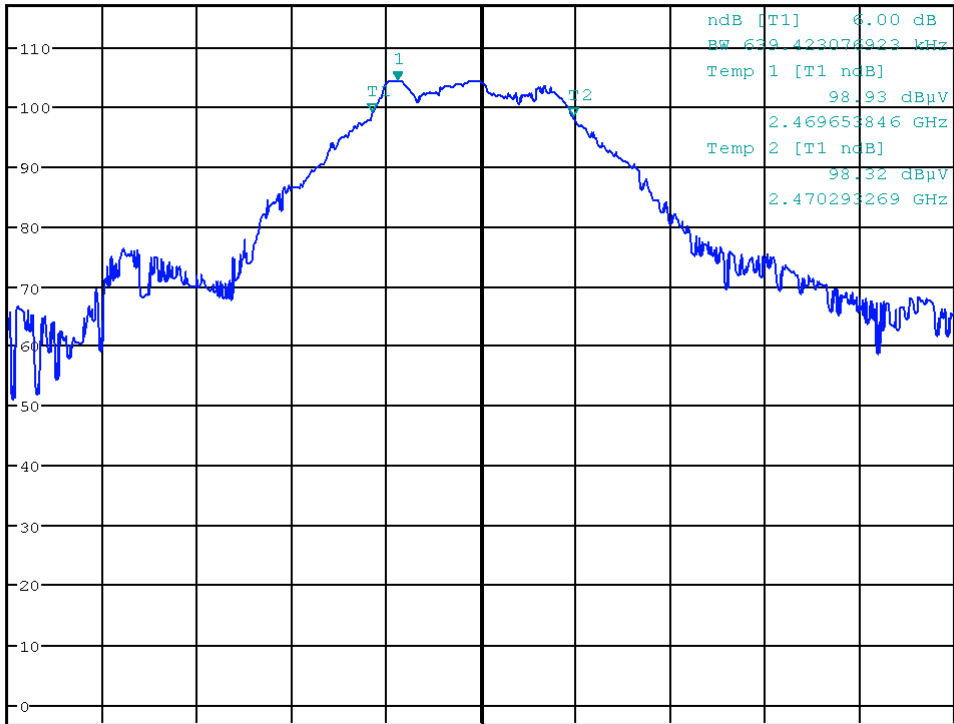

Center 2.47 GHz 300 kHz/ Span 3 MHz

Picture 4: 6dB bandwidth, channel high



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 15 of 73

4 Maximum peak conducted output power

according to 47 CFR Part 15, section 15.247(b), and KDB 558074, section 9

4.1 Test location

- Conducted measurement
- Scan with peak detector in 3 m CDC
- CISPR measurement with quasi peak detector on 10 m open area test site.
- Measurement with peak detector on 3 m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site	EMV TESTHAUS GmbH	E00354

4.2 Test instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCI 3 (OATS)	Rohde & Schwarz	E00552
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI 3 (CDC)	Rohde & Schwarz	E00001
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/>	VULB 9163 (OATS)	Schwarzbeck	E00013
<input type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011

4.3 Limits

For systems using digital modulation: 1 Watt (30 dBm).

As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level.

The conducted output power limit is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802


150707-AU01+W02

Page 16 of 73

4.4 Test procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with measurement of Digital Transmission Systems operating under Section 15.247 and FCC KDB publication no. 558074, section 9.1.1 with detector set to peak (max hold) and the following settings:
 - a) $RBW \geq DTS$ bandwidth (6 dB bandwidth)
 - b) $VBW \geq 3 \times RBW$.
 - c) $Span \geq 3 \times RBW$
 - d) Sweep time = auto couple.

4.5 Test setup

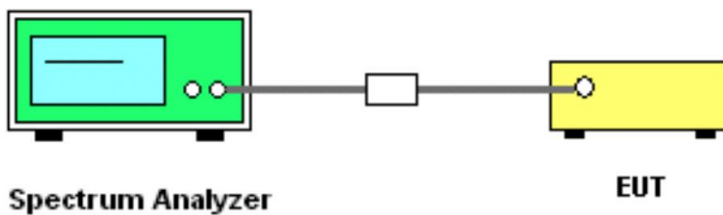

Picture 5: Test setup for conducted output power measurement

4.6 Test deviation

There is no deviation from the original standard.

4.7 EUT operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.8 Test results

Temperature:	20°C	Humidity:	43%
Tested by:	M. Müller	Test date:	2015-12-10

Channel	Frequency (GHz)	Detector	Conducted power		Limit (dBm)	Result
			reading (dBm)	final (dBm)		
Low	2.40994	PK	-2.60	-1.90	30	Passed
Mid	2.43993	PK	-2.50	-1.70	30	Passed
High	2.46981	PK	-2.47	-1.67	30	Passed

Comments: Final conducted power value is reading value + cable correction according to Table 1.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany


Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 18 of 73

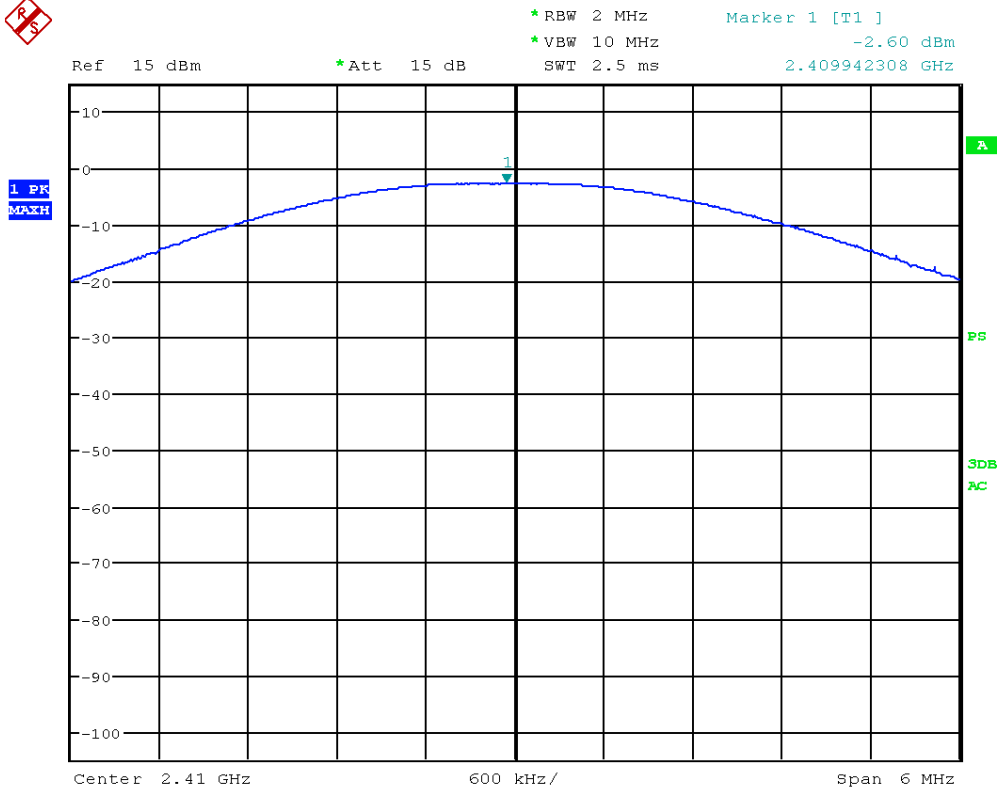

Picture 6: Conducted output power, channel low

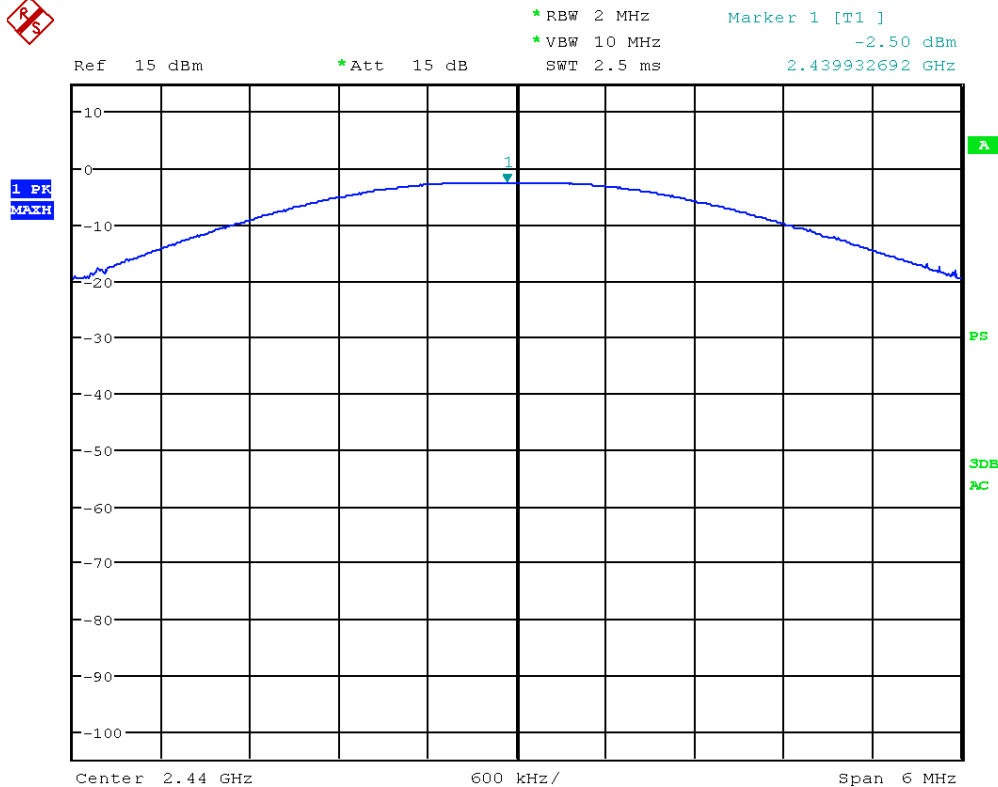

Picture 7: Conducted output power, channel mid



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany


Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 19 of 73



Ref 15 dBm *Att 15 dB *RBW 2 MHz Marker 1 [T1] -2.47 dBm
*VBW 10 MHz SWT 2.5 ms 2.469807692 GHz

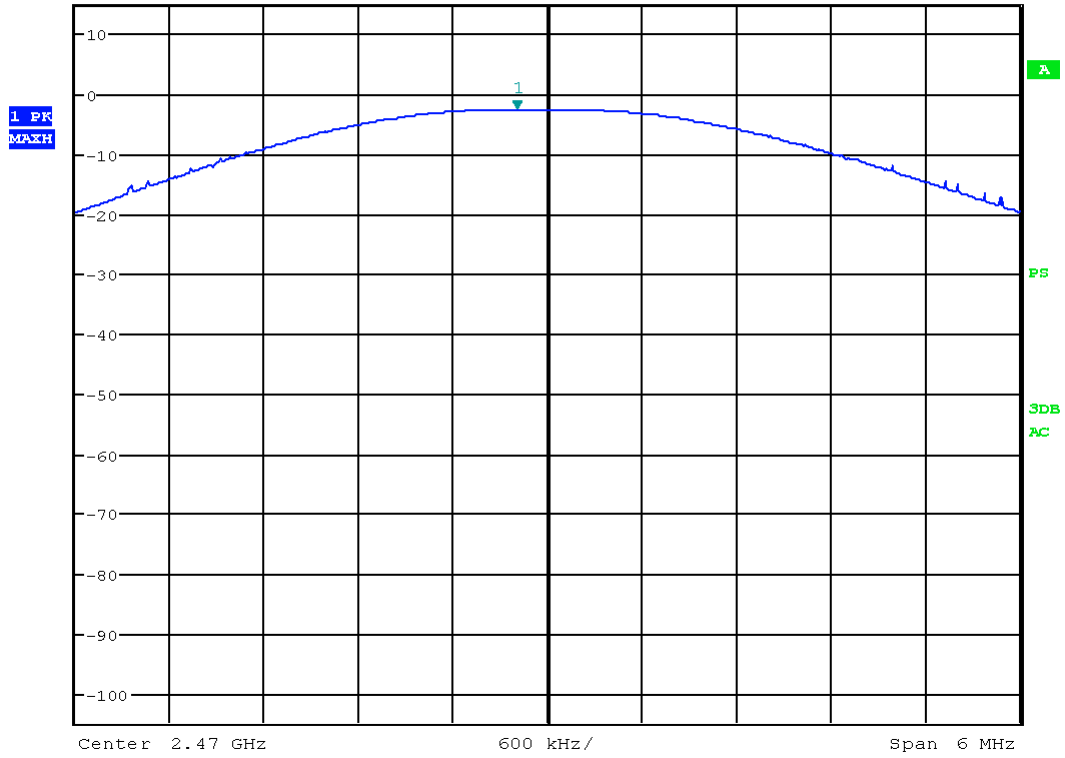

Picture 8: Conducted output power, channel high



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 20 of 73

5 Power spectral density

according to 47 CFR Part 15, section 15.247(e), and KDB 558074, section 10

5.1 Test location

- Conducted measurement
- Scan with peak detector in 3 m CDC
- CISPR measurement with quasi peak detector on 10 m open area test site
- Measurement with peak detector on 3 m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site	EMV TESTHAUS GmbH	E00354

5.2 Test instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCI 3 (OATS)	Rohde & Schwarz	E00552
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI 3 (CDC)	Rohde & Schwarz	E00001
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/>	VULB 9163 (OATS)	Schwarzbeck	E00013
<input type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011

5.3 Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of section 15.247.

The same method of determining the conducted output power shall be used to determine the power spectral density.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802


150707-AU01+W02

Page 21 of 73

5.4 Test procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with measurement of Digital Transmission Systems operating under Section 15.247 and FCC KDB publication no. 558074, section 10 with detector set to peak (max hold) and the following settings:
 - a) Span = 1.5 x DTS bandwidth (6 dB bandwidth)
 - b) $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
 - c) $\text{VBW} \geq 3 \times \text{RBW}$.
 - d) Sweep time = auto couple for prescans, $\geq \text{span} / \text{RBW}$ for final scan

5.5 Test setup

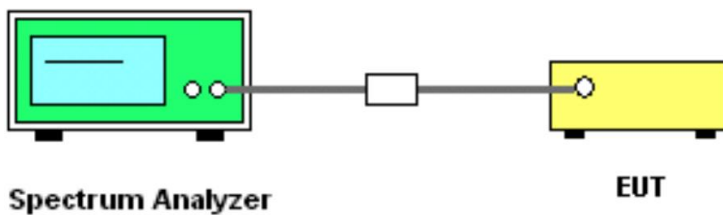

Picture 9: Test setup for power spectral density measurement

5.6 Test deviation

There is no deviation from the original standard.

5.7 EUT operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.8 Test results

Temperature:	21°C	Humidity:	46%
Tested by:	M. Müller	Test date:	2015-12-10

Channel	Detector	Frequency (GHz)	PSD @ 3kHz RBW		Limit (dBm)	Result
			reading (dBm)	final (dBm)		
Low	PK	2.40997	-13.97	-13.27	8	Passed
Mid	PK	2.43999	-15.56	-14.76	8	Passed
High	PK	2.46998	-14.89	-14.09	8	Passed

Comments: Final PSD value is reading value + cable correction according to Table 1.




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 23 of 73

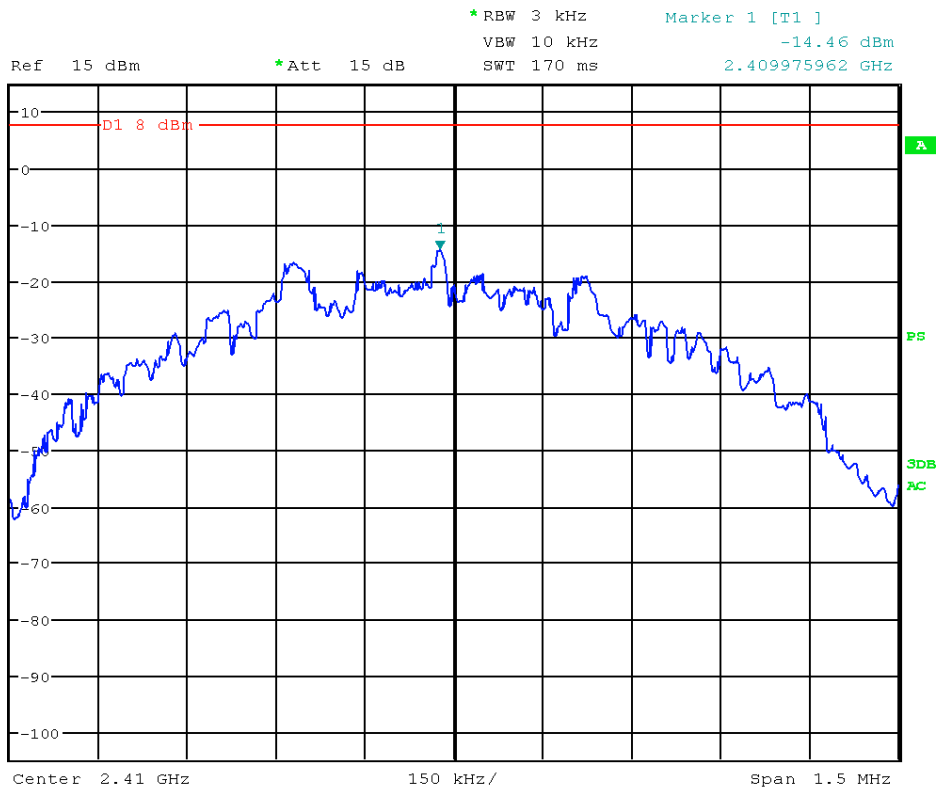

Picture 10: Power spectral density, channel low - complete carrier

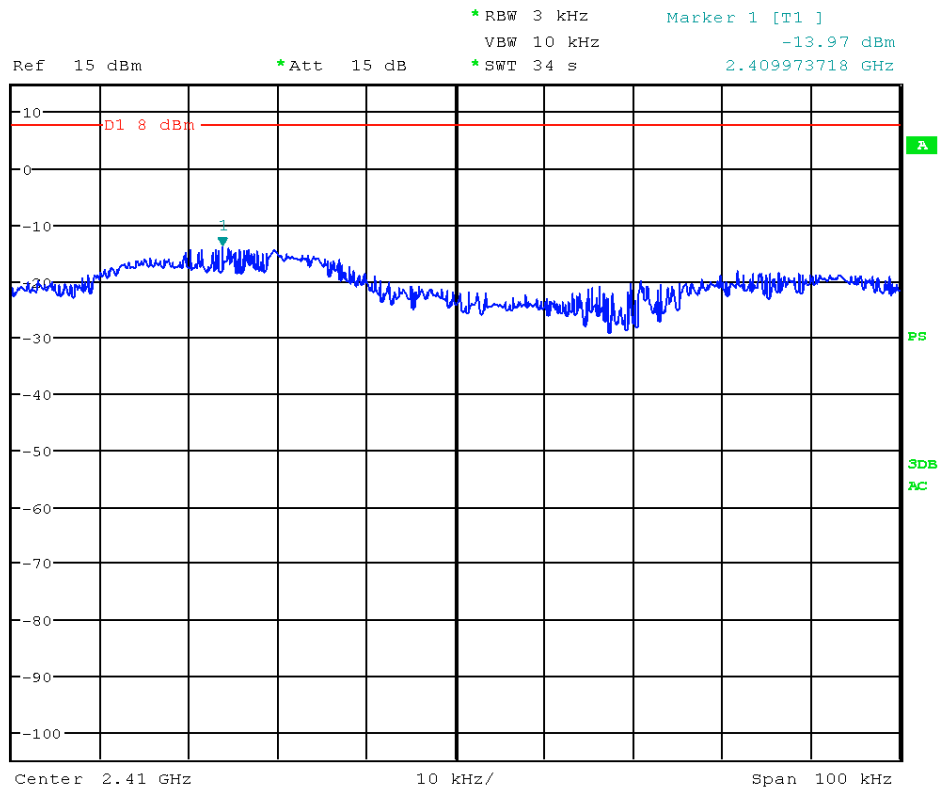

Picture 11: Power spectral density, channel low - zoom to maximum




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 24 of 73

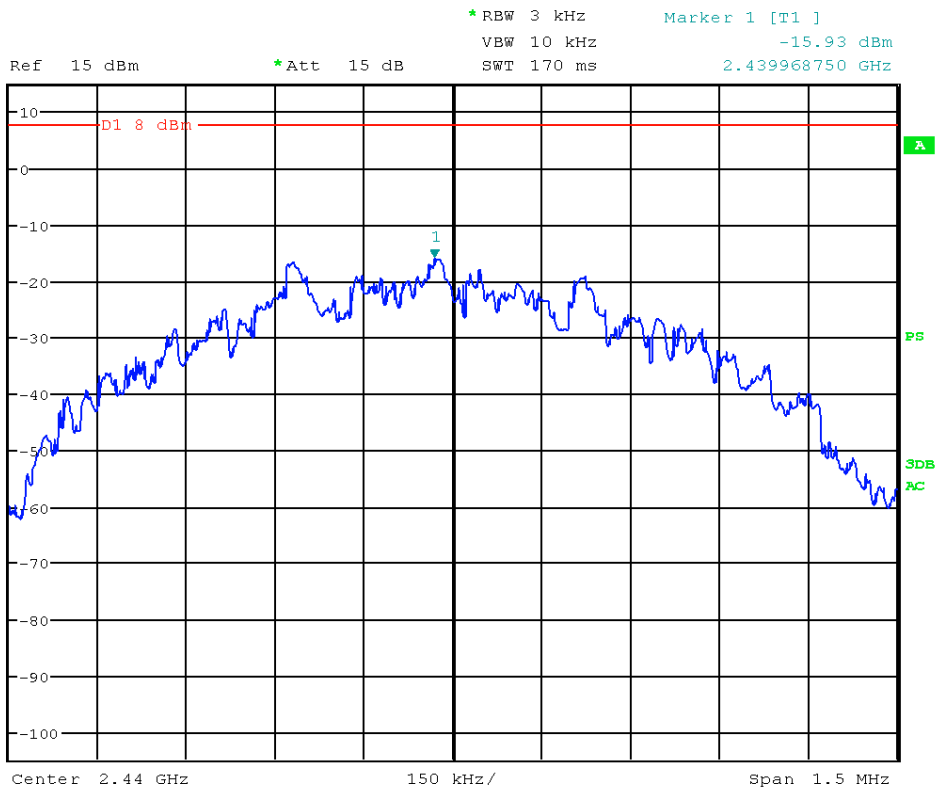

Picture 12: Power spectral density, channel mid - complete carrier

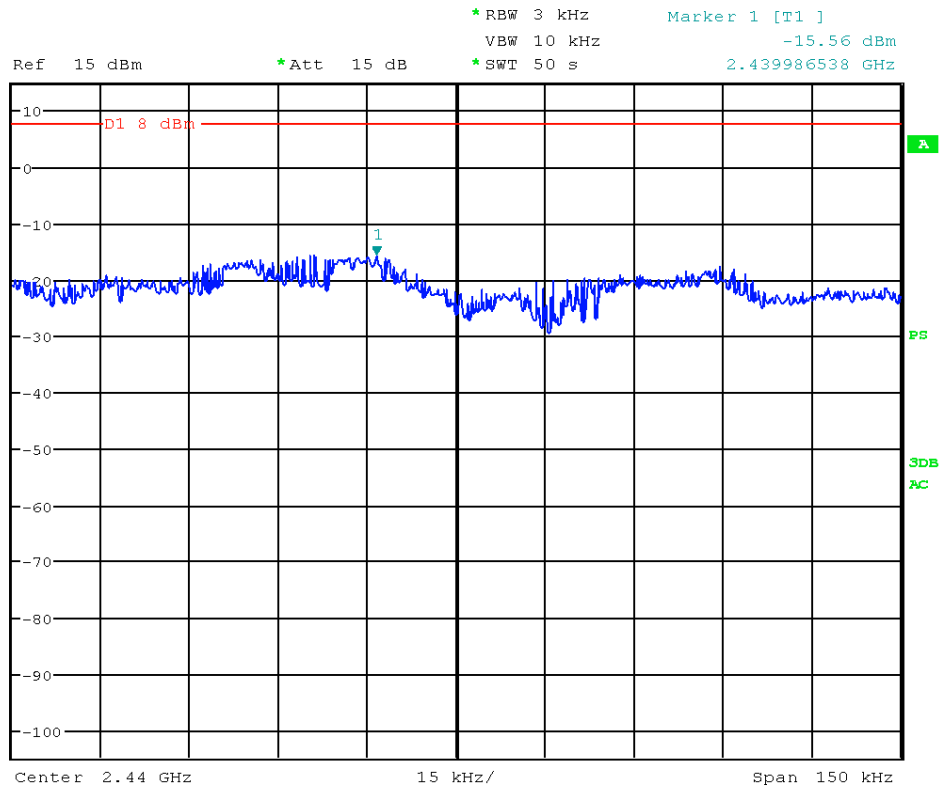

Picture 13: Power spectral density, channel mid - zoom to maximum




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 25 of 73

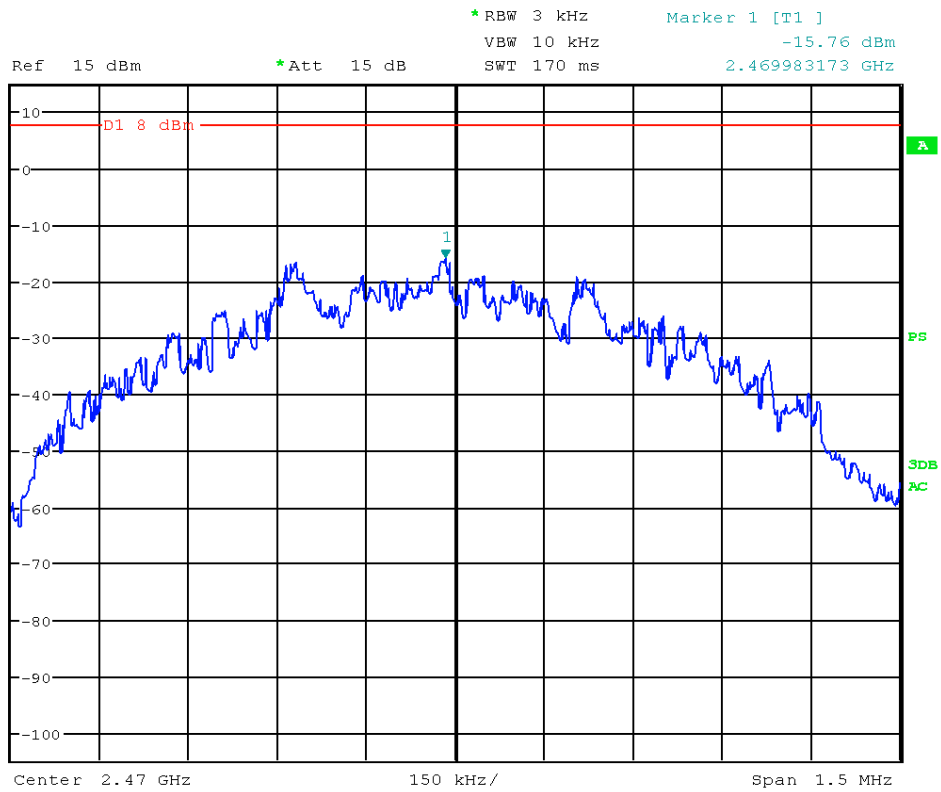

Picture 14: Power spectral density, channel high - complete carrier

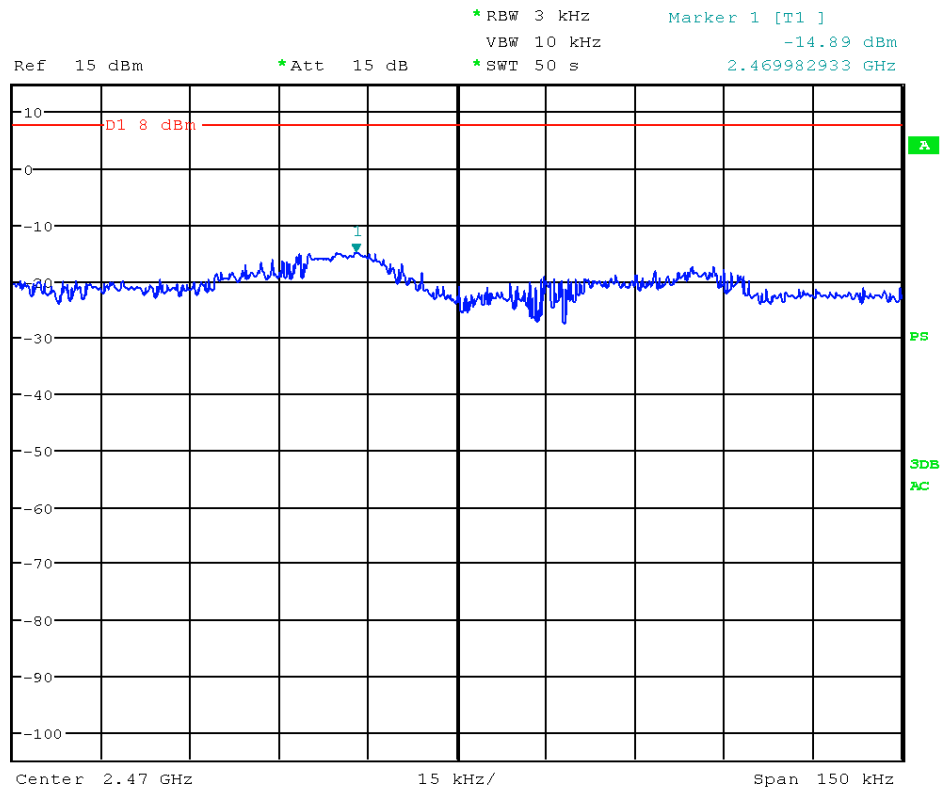

Picture 15: Power spectral density, channel high - zoom to maximum

6 Band-edge compliance

according to 47 CFR Part 15, section 15.247(d)

6.1 Test location

Description	Manufacturer	Inventory No.
Anechoic chamber	EMV TESTHAUS GmbH	E00100

6.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESU26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/>	AMF-5D-00501800-28-13P	Miteq	W00089
<input type="checkbox"/>	AMF-6F-16002650-25-10P	Miteq	W00090
<input checked="" type="checkbox"/>	BBHA 9170	Schwarzbeck	W00054
<input type="checkbox"/>	BBHA 9170	Schwarzbeck	W00055
<input type="checkbox"/>	COSB 4-1-26	Conformitas	W00091

6.3 Limits

- < -20dBc outside restricted bands
- < 54dB μ V (video average) inside restricted bands
- < 74dB μ V (peak detector) inside restricted bands

6.4 Test procedure

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The receiving antenna was placed 3 meters from the turntable. The test setup was placed inside a fully anechoic chamber.
2. Power on the EUT and all peripherals.
3. Set frequency to lowest channel
4. Maximize radiated emission at band edges by moving turntable and antenna height with horizontal and vertical antenna polarization.
5. Record this trace(s) and set appropriate markers
6. Set frequency to highest channel
7. Repeat steps 4 and 5




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 27 of 73

6.5 Test setup

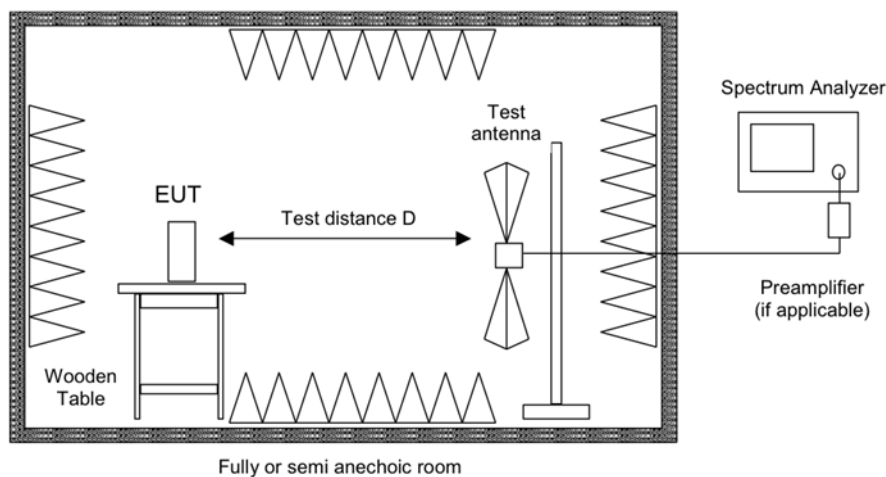

Picture 16: Test setup for band-edge compliance measurement

6.6 Test deviation

There is no deviation from the original standard.

6.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode. It was investigated that for this test EUT-position3 in combination with measurement-antenna polarised to horizontal is the respective worst-case.

6.8 Test results

Temperature:	22°C	Humidity:	44%
Tested by:	M. Müller	Test date:	2015-12-18

f[GHz]	E _{meas} [dB μ V/m]	Detector	Restricted Band	Limit [dB μ V/m]	Result
2.41002	92.64	PK	No	----	Carrier
2.40984	92.18	AV (1 kHz)		----	Carrier
2.39000	46.85	PK	Yes	74	Pass
2.39000	28.25	AV (1 kHz)		54	Pass
2.37261	53.86	PK		74	Pass
2.33446	29.26	AV (1 kHz)		54	Pass
2.31622	53.24	PK		74	Pass
2.31000	28.08	AV (1 kHz)		54	Pass

Picture 17: Band edge compliance – lower edge with channel low

Note: Frequency lines in charts are set to the edges of the restricted band closest to the carrier:

F1 = 2.3100 GHz

F2 = 2.3900 GHz

f[GHz]	E _{meas} [dB μ V/m]	Detector	Restricted Band	Limit [dB μ V/m]	Result
2.46995	91.57	PK	No	----	Carrier
2.46995	91.14	AV (1 kHz)		----	Carrier
2.48350	52.46	PK	Yes	74	Pass
2.48350	28.51	AV (1 kHz)		54	Pass
2.48819	54.89	PK		74	Pass
2.49499	57.00	PK		74	Pass
2.49513	29.39	AV (1 kHz)		54	Pass
2.50000	28.44	AV (1 kHz)		54	Pass

Picture 18: Band edge compliance – upper edge with channel high

Note: Frequency lines in charts are set to the edges of the restricted band closest to the carrier:

F1 = 2.4835 GHz

F2 = 2.5000 GHz




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany


Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 29 of 73

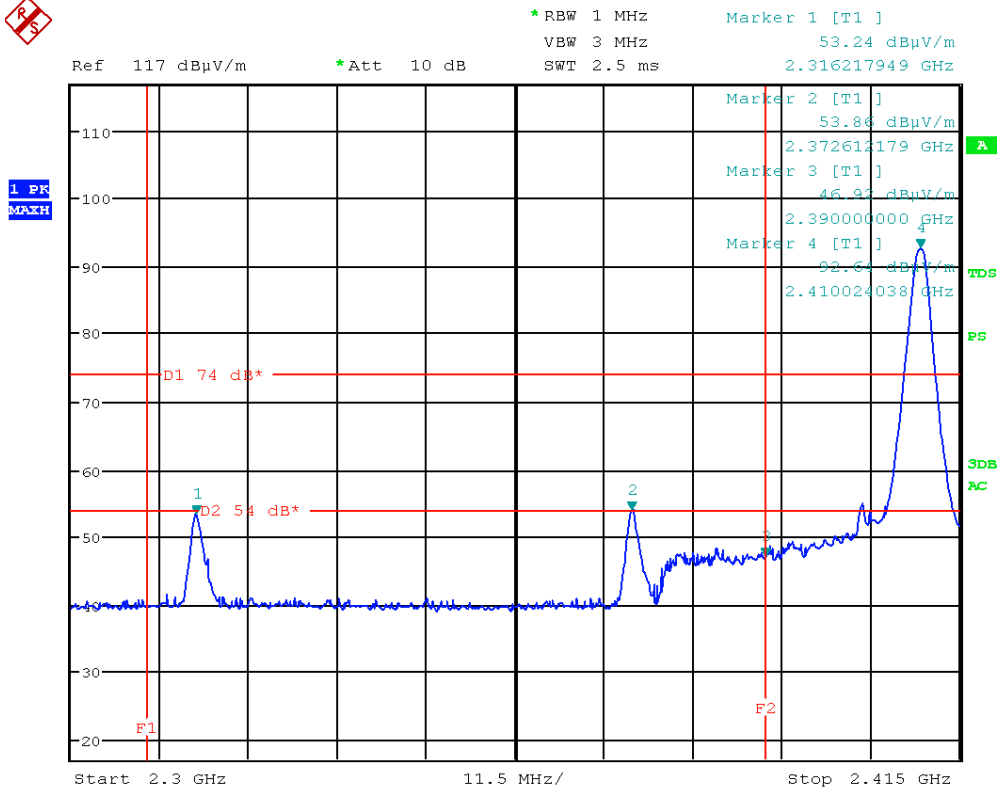

Picture 19: lower edge (PK) with channel low

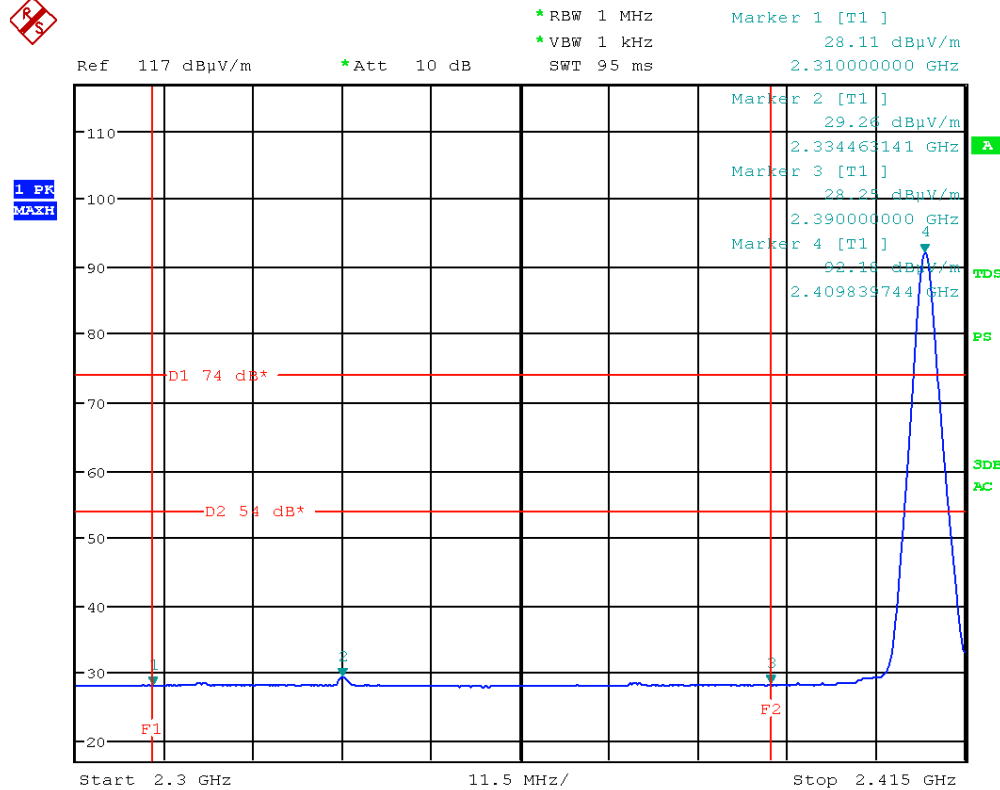


Picture 20: lower edge (AV) with channel low




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

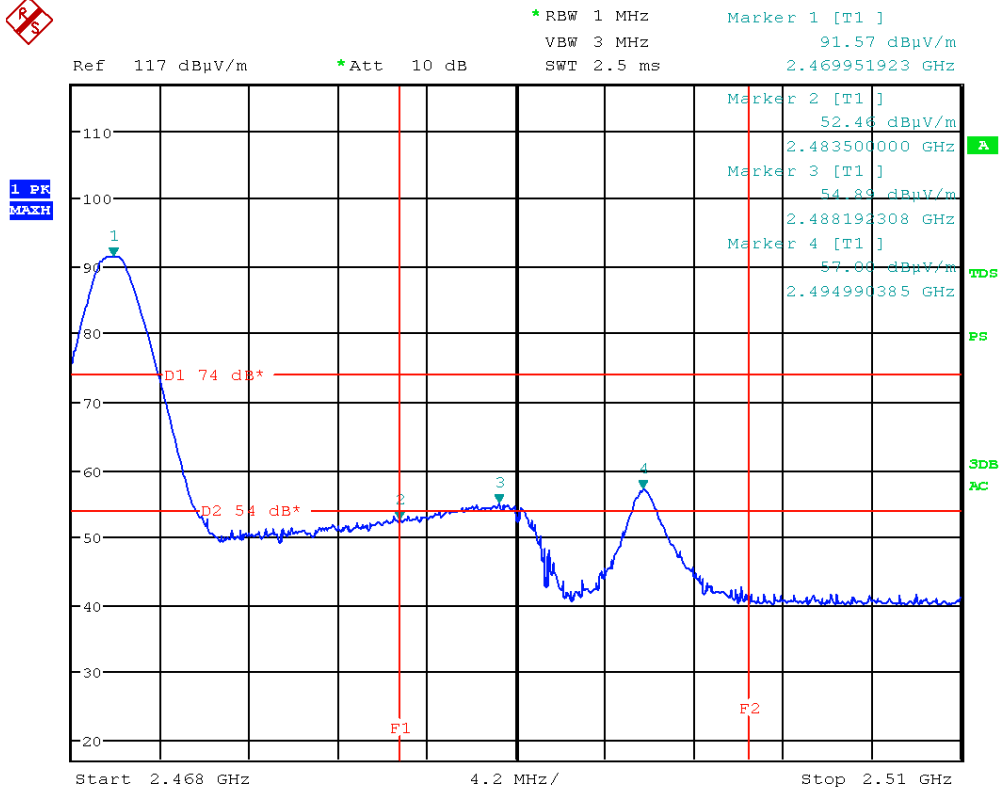

Picture 21: upper edge (PK) with channel high

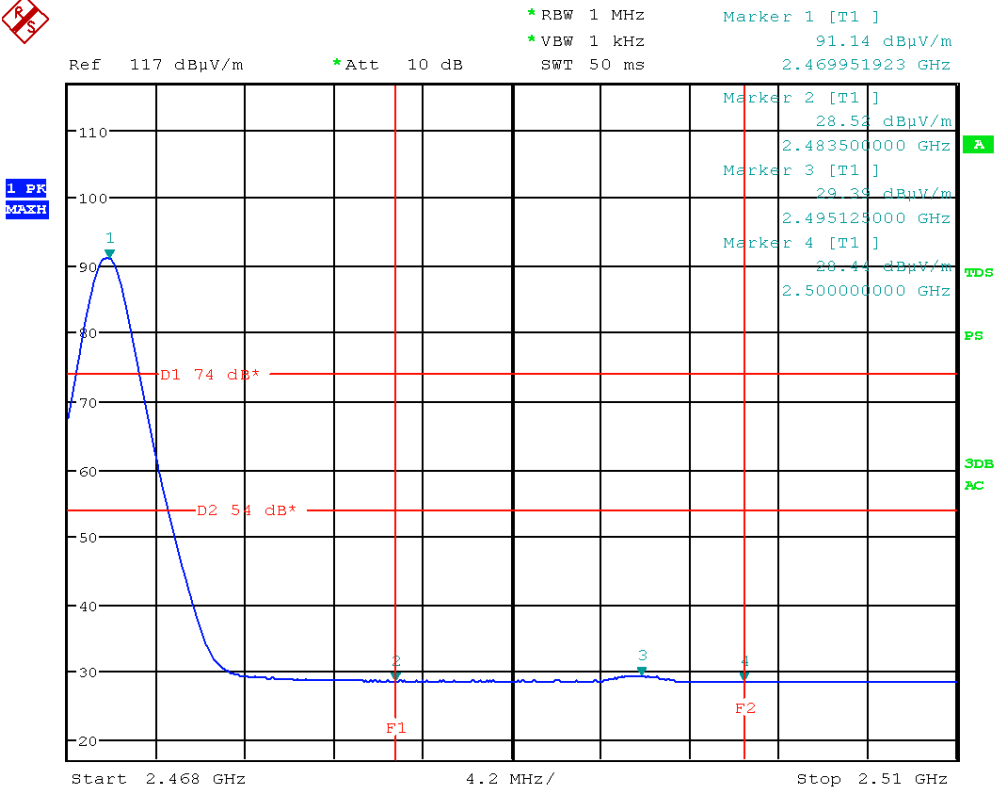

Picture 22: upper edge (AV) with channel high



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802

7 Spurious RF Conducted Emission

according to 47 CFR Part 15, section 15.247(d)

7.1 Test location

- Conducted measurement
- Scan with peak detector in 3 m CDC
- CISPR measurement with quasi peak detector on 10 m open area test site
- Measurement with peak detector on 3 m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site	EMV TESTHAUS GmbH	E00354

7.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCI 3 (OATS)	Rohde & Schwarz	E00552
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI 3 (CDC)	Rohde & Schwarz	E00001
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/>	VULB 9163 (OATS)	Schwarzbeck	E00013
<input type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011

7.3 Limits

- < -20dBc outside restricted bands
- < 54dB μ V (video average) inside restricted bands
- < 74dB μ V (peak detector) inside restricted bands

7.4 Test procedure

1. The test is performed in accordance with FCC KDB publication no. 558074.
2. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
3. The unit was operated in continuous transmit mode with modulation.
4. Minimum resolution bandwidths of 200 Hz for measurement frequencies below 150 kHz, 10 kHz between 150 kHz and 30 MHz, 100 kHz between 30 MHz and 1 GHz and 1 MHz above 1 GHz were used.
5. Measure the spectrum from the lowest frequency generated in the EUT up through the 10th harmonic.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 32 of 73

7.5 Test setup

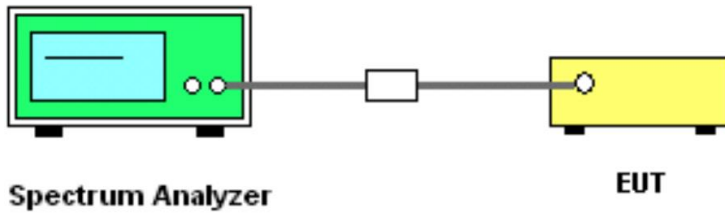

Picture 23: Test setup for conducted spurious emission measurement

7.6 Test deviation

There is no deviation from the original standard.


7.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode.


7.8 Test results

Temperature:	21°C	Humidity:	46%
Tested by:	M. Müller	Test date:	2015-12-11


7.9 Test results 9 kHz – 30 MHz

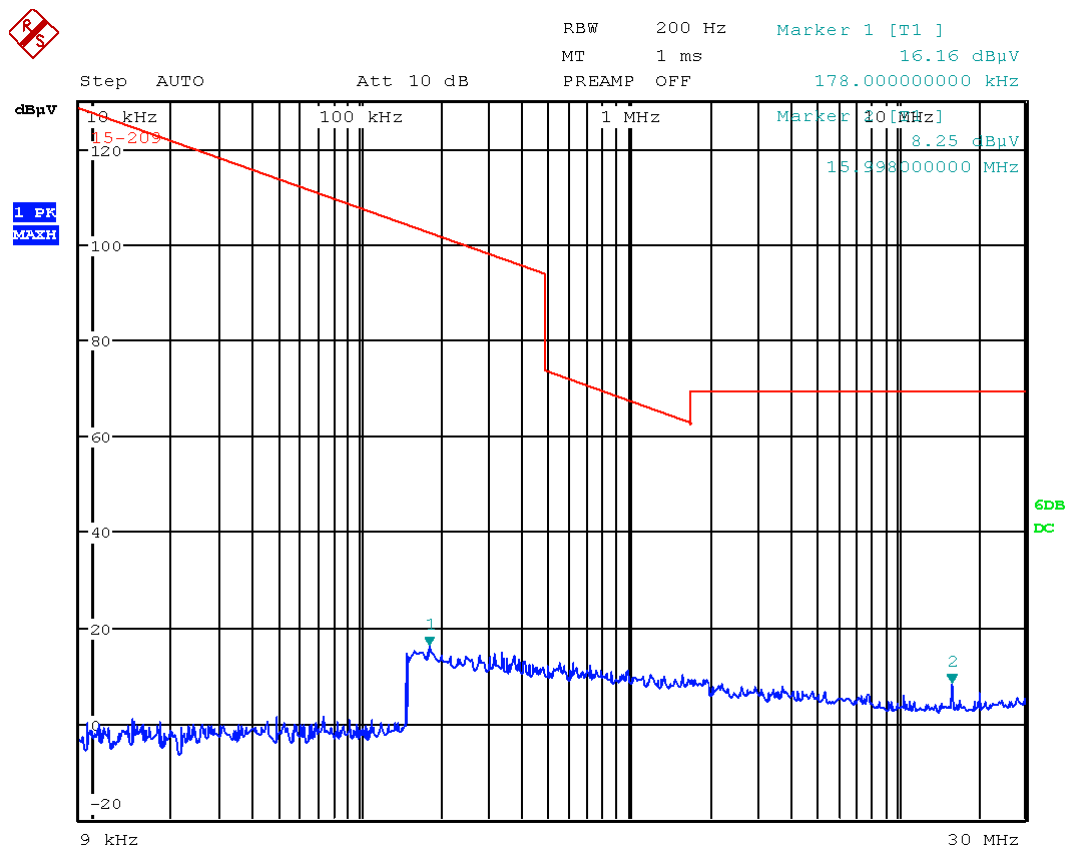

Picture 24: spurious emission, channel low (9 kHz - 30 MHz)

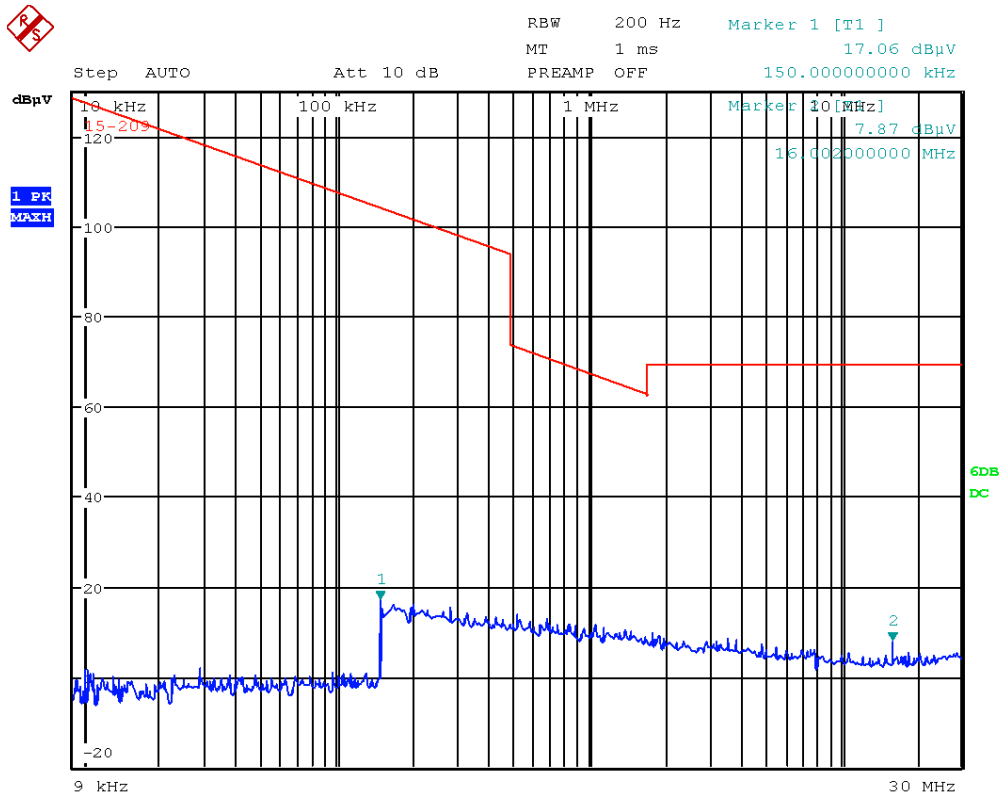

Picture 25: spurious emission, channel mid (9 kHz - 30 MHz)

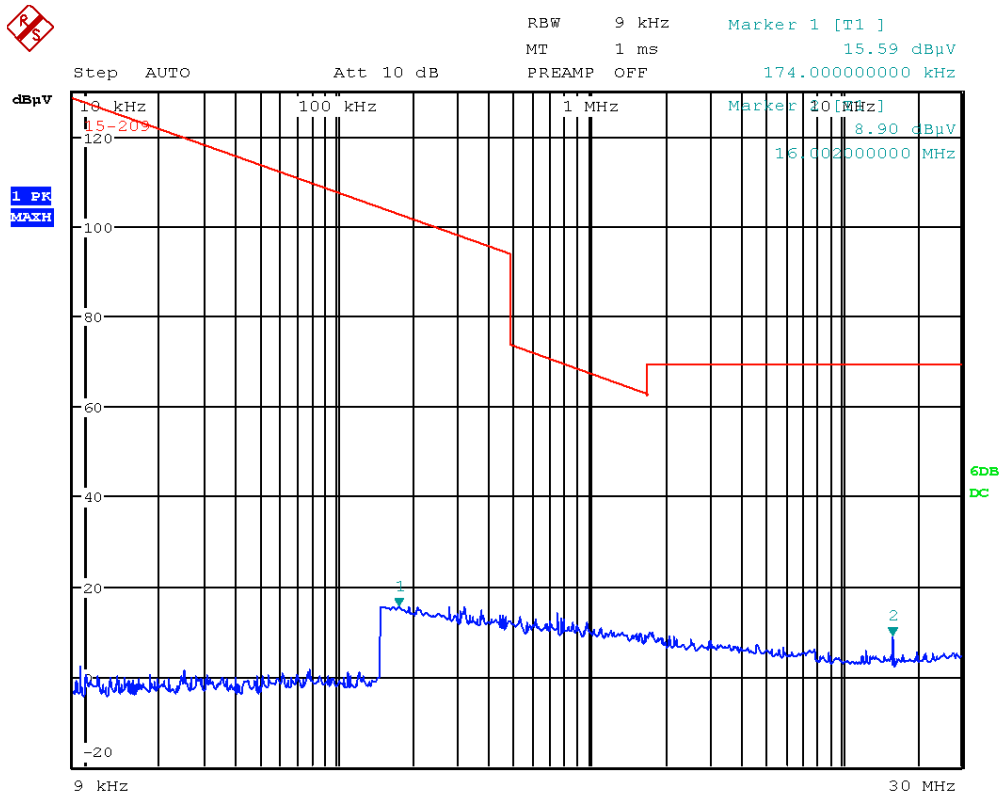


Picture 26: spurious emission, channel high (9 kHz - 30 MHz)



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802

7.10 Test results 30 MHz – 1 GHz

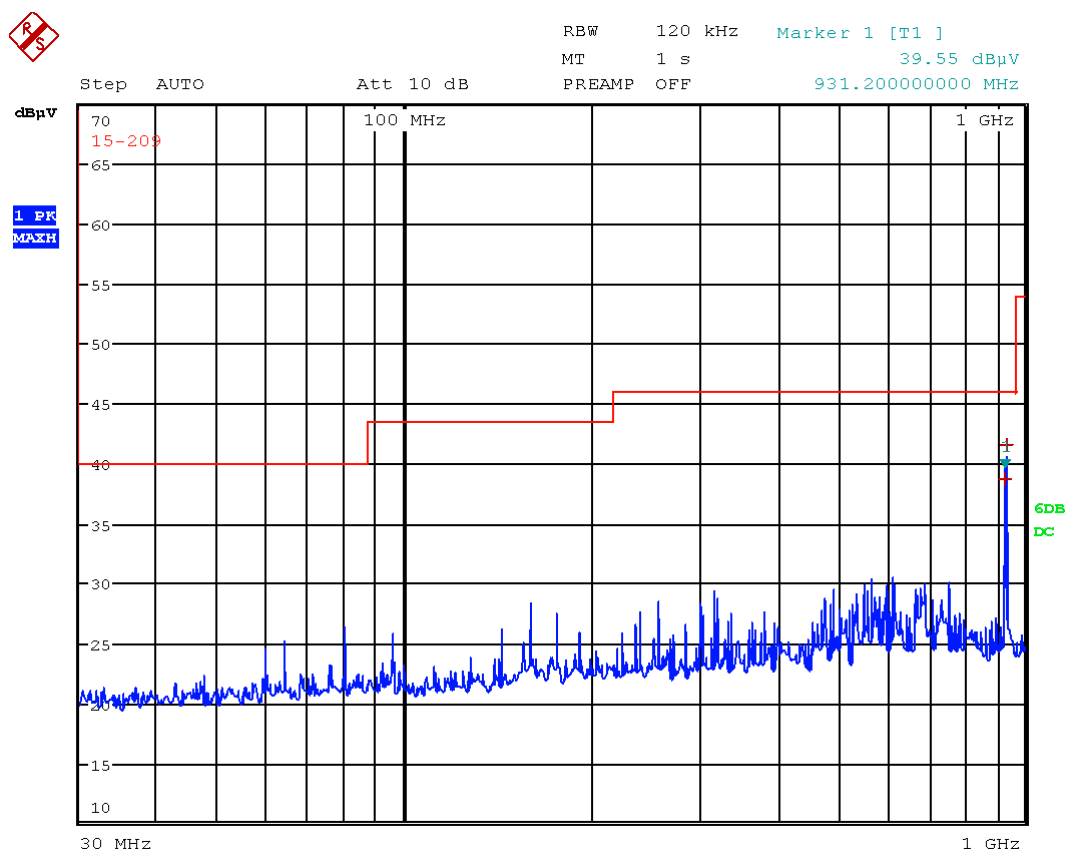


Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	931.20000000 MHz	38.70	Quasi Peak	-7.32
1	933.72000000 MHz	41.53	Quasi Peak	-4.49

Picture 27: spurious emission, channel low (30 MHz - 1 GHz)



RBW 120 kHz Marker 1 [T1]
 MT 1 s 40.15 dBµV
 PREAMP OFF 933.72000000 MHz

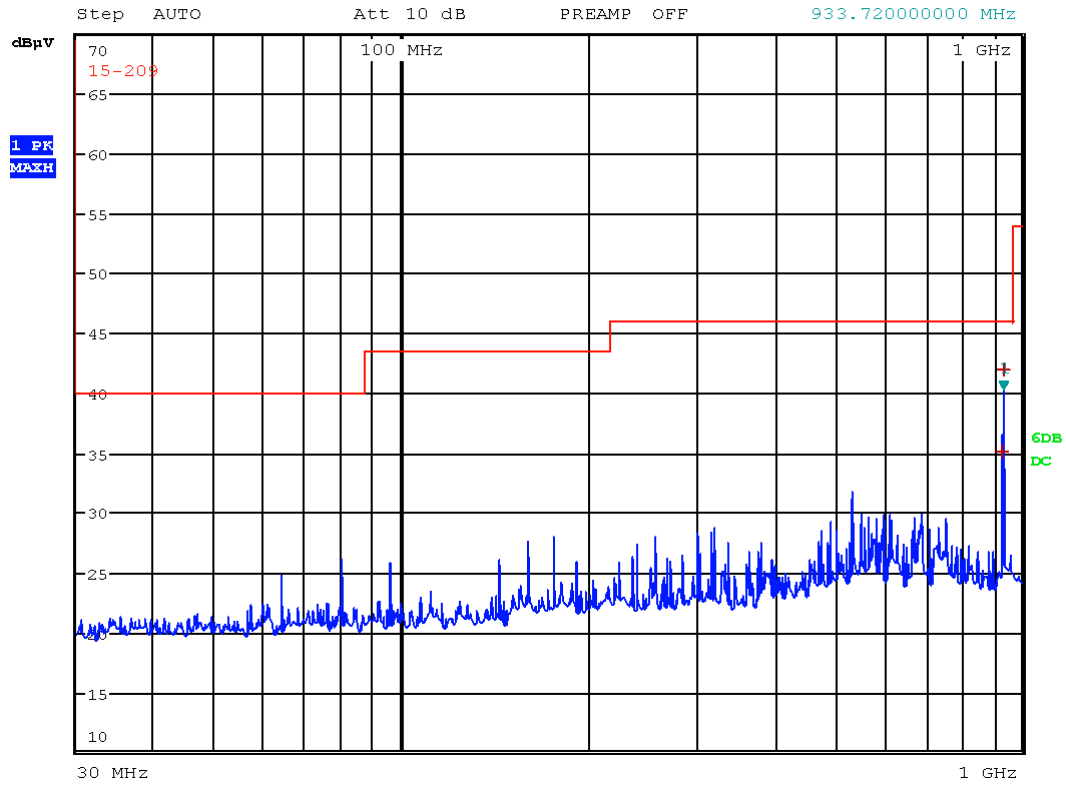

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	931.080000000 MHz	35.12	Quasi Peak	-10.90
1	933.720000000 MHz	41.99	Quasi Peak	-4.03

Picture 28: spurious emission, channel mid (30 MHz - 1 GHz)




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802



RBW 120 kHz Marker 1 [T1]
 MT 1 s 40.54 dBµV
 PREAMP OFF 932.960000000 MHz

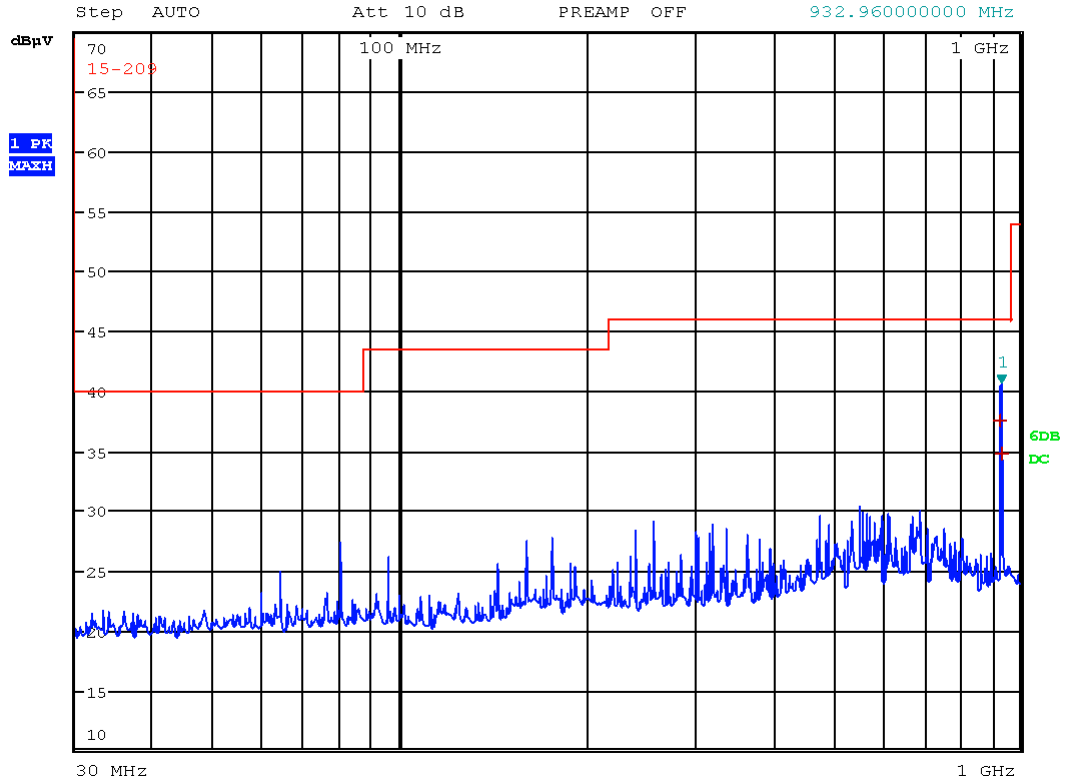

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	931.120000000 MHz	37.49	Quasi Peak	-8.53
1	932.960000000 MHz	34.72	Quasi Peak	-11.30


Picture 29: spurious emission, channel high (30 MHz - 1 GHz)



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802

7.11 Test results 1 GHz – 26 GHz

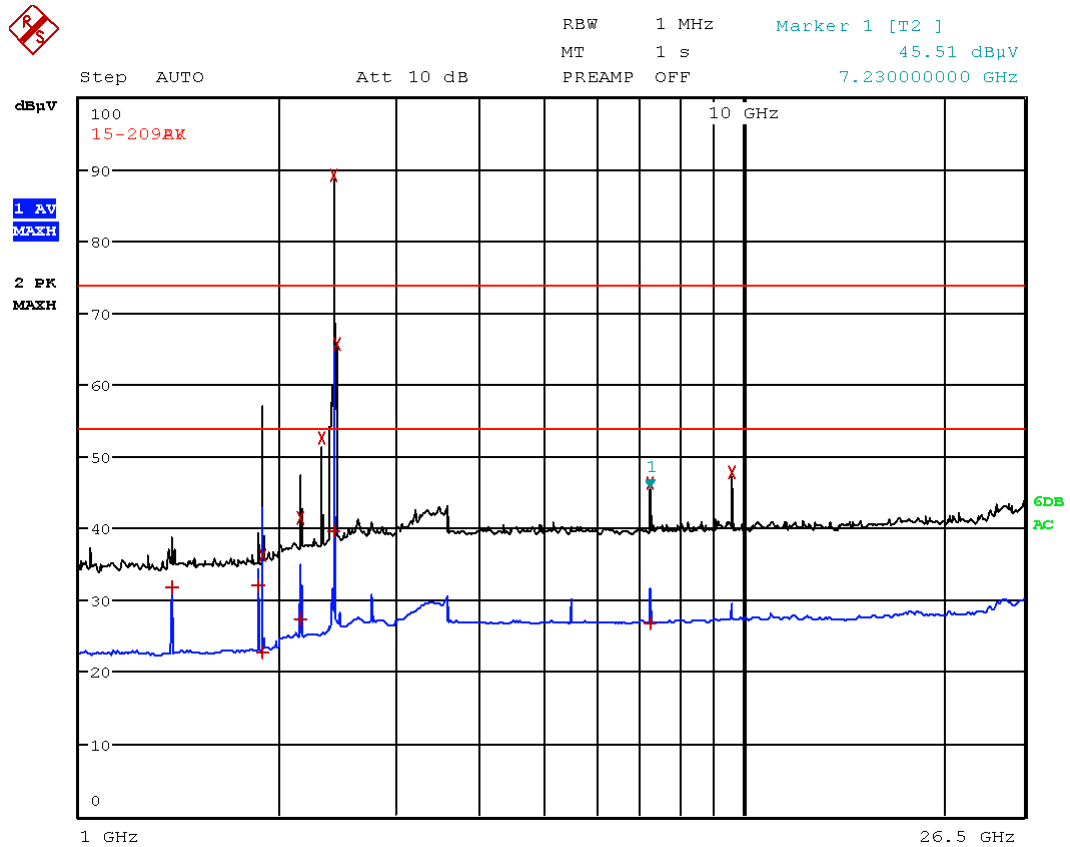

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	1.378400000 GHz	31.83	Average	-22.15
1	1.855200000 GHz	31.97	Average	-22.01
1	1.886400000 GHz	22.76	Average	-31.22
2	1.886400000 GHz	36.20	Max Peak	-37.78
2	2.156000000 GHz	41.48	Max Peak	-32.50
1	2.156400000 GHz	27.49	Average	-26.49
2	2.314800000 GHz	52.52	Max Peak	-21.46
1	2.411200000 GHz	39.59	Average	-14.39
2	2.411200000 GHz	89.14	Max Peak	15.16
2	2.446800000 GHz	65.72	Max Peak	-8.26
1	7.230000000 GHz	26.81	Average	-27.17
2	7.230000000 GHz	46.22	Max Peak	-27.76
2	9.638800000 GHz	47.89	Max Peak	-26.09

Picture 30: spurious emission, channel low (1 GHz - 26 GHz)

Note: Frequency of 2.4112 GHz is excluded from the test -> carrier.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 39 of 73



RBW 1 MHz Marker 1 [T2]
 MT 1 s 104.17 dBµV
 PREAMP OFF 2.439600000 GHz

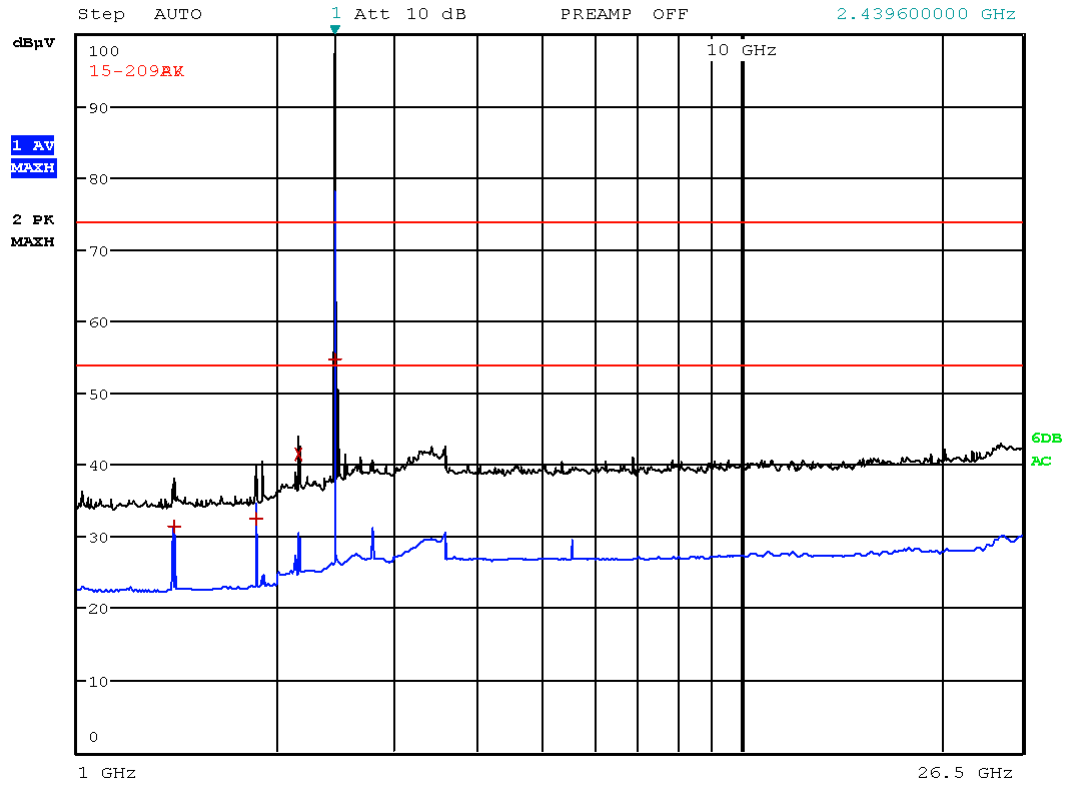

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	1.395600000 GHz	31.41	Average	-22.57
1	1.855200000 GHz	32.38	Average	-21.60
2	2.156000000 GHz	41.52	Max Peak	-32.46
1	2.439200000 GHz	54.67	Average	0.69
2	2.439600000 GHz	104.08	Max Peak	30.10

Picture 31: spurious emission, channel mid (1GHz - 26 GHz)

Note: Frequencies of 2.4392 GHz and 2.4396 GHz are excluded from the test -> carrier.




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802



RBW 1 MHz Marker 1 [T2]
 MT 1 s 38.12 dBµV
 PREAMP OFF 1.41240000 GHz

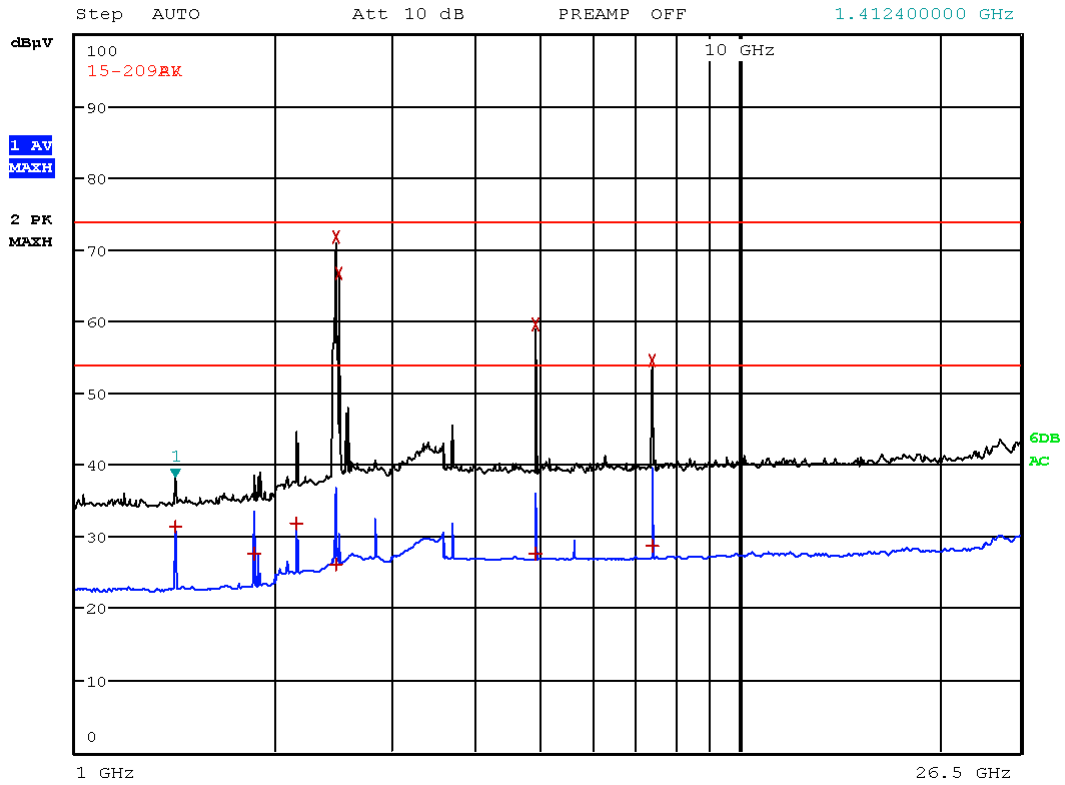

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	1.412400000 GHz	31.45	Average	-22.53
1	1.855200000 GHz	27.58	Average	-26.40
1	2.156400000 GHz	31.91	Average	-22.07
2	2.472400000 GHz	71.73	Max Peak	-2.25
1	2.472400000 GHz	26.09	Average	-27.89
2	2.494800000 GHz	66.67	Max Peak	-7.31
1	4.941200000 GHz	27.59	Average	-26.39
2	4.941200000 GHz	59.57	Max Peak	-14.41
1	7.409600000 GHz	28.73	Average	-25.25
2	7.409600000 GHz	54.59	Max Peak	-19.39

Picture 32: spurious emission, channel high (1 GHz - 26 GHz)




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802



RBW 1 MHz Marker 1 [T1]
 MT 1 s 32.55 dBµV
 PREAMP OFF 2.825200000 GHz

Step AUTO Att 10 dB

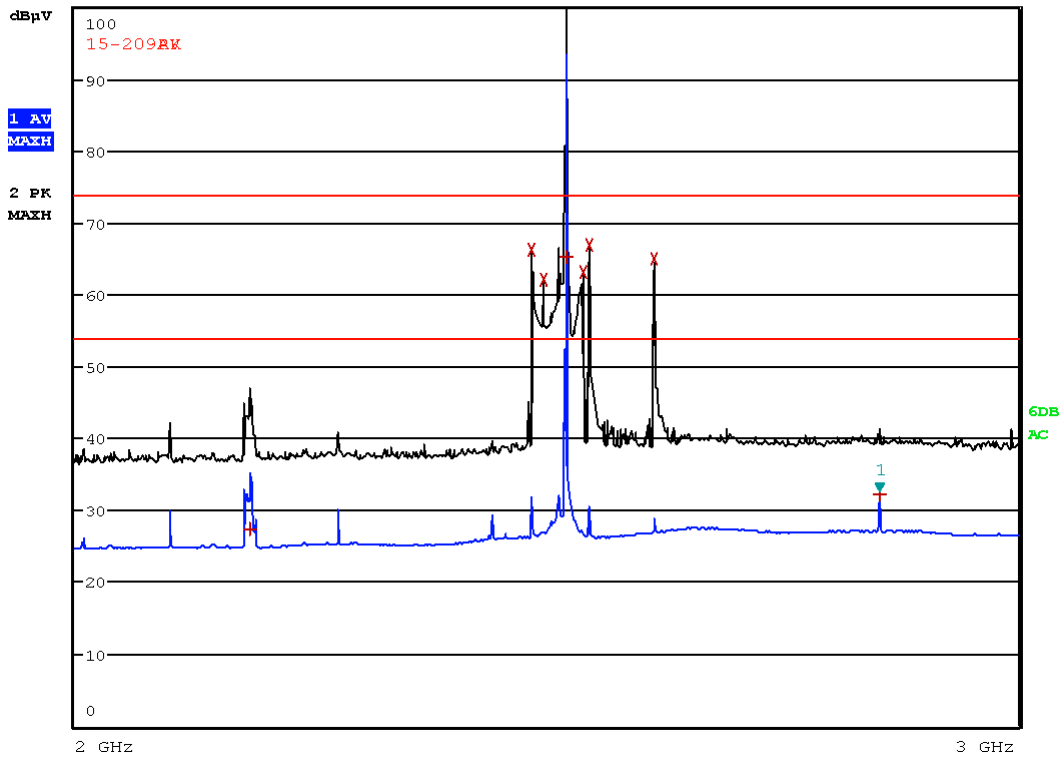

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	2.156400000 GHz	27.50	Average	-26.48
2	2.432800000 GHz	66.18	Max Peak	-7.80
2	2.446000000 GHz	62.02	Max Peak	-11.96
1	2.470000000 GHz	65.13	Average	11.15
2	2.470000000 GHz	104.34	Max Peak	30.36
2	2.488000000 GHz	63.19	Max Peak	-10.79
2	2.494400000 GHz	66.93	Max Peak	-7.05
2	2.564400000 GHz	65.08	Max Peak	-8.90
1	2.825200000 GHz	32.25	Average	-21.73

Picture 33: spurious emission, channel high (1 GHz - 26 GHz), zoom to carrier

Note: Frequency of 2.4700 GHz is excluded from the test -> carrier.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802

8 Radiated emission measurement (<1 GHz)

according to 47 CFR Part 15, sections 15.205(a), 15.209(a), 15.247(d), and KDB 558074

8.1 Test Location

- Scan with peak detector in 3 m CDC.
- Final CISPR measurement with quasi peak detector on 3 m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site (OATS)	EMV TESTHAUS GmbH	E00354

8.2 Test instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESCI 3 (OATS)	Rohde & Schwarz	E00552
<input type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/>	VULB 9163 (OATS)	Schwarzbeck	E00013
<input checked="" type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011
<input checked="" type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input checked="" type="checkbox"/>	Feedline OATS	Huber & Suhner	200024



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 43 of 73

8.3 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency [MHz]	Field strength Fs [$\mu\text{V/m}$]	Field strength [dB $\mu\text{V/m}$]	Measurement distance d [m]
0.009 – 0.490	266.6 – 4.9	48.5 – 13.8	300
0.490 – 1.705	48.98 – 14.08	33.8 – 22.97	30
1.705 – 30.0	30	29.54	30
30 – 88	100	40	3
88 – 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

8.4 Test procedure

1. Configure the EUT according to ANSI C63.10. The EUT is placed on the top of the turntable 0.8 meter above ground. The receiving antenna is placed 3 meters from the turntable. For prescan measurements the test setup is placed inside a compact diagnostic chamber.
2. Power on the EUT and all peripherals.
3. The broadband antenna is set to vertical polarization.
4. The EMI receiver performs a scan from 9 kHz to 30 MHz or 30MHz to 1000MHz with the detector set to peak. Appropriate CISPR measurement bandwidths are used, i. e. 200 Hz for the frequency range 9 kHz to 150 kHz, 10 kHz for 150 kHz to 30 MHz and 120 kHz for 30MHz to 1000MHz.
5. The turn table is rotated to 6 different positions ($360^\circ / 6$) and the antenna polarization is changed to horizontal.
6. Repeat the test procedure at step 4 and 5.
7. Then the test setup is placed in an OATS at 3 m distance and all peak values over or with less than 6dB margin to the limit are re-measured with quasi-peak detector (except for the frequency bands 9–90 kHz and 110–490 kHz where average detector is used). If the margin of all emissions recorded prescan in the compact diagnostic chamber is more than 6 dB no final test in OATS is performed.
8. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
9. The height of the broadband receiving antenna is varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization. The highest value is recorded.
10. For emissions below 30MHz, measurements are performed with a loop antenna. The antenna height is not changed during this test.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802


150707-AU01+W02

Page 44 of 73

8.5 Test setup

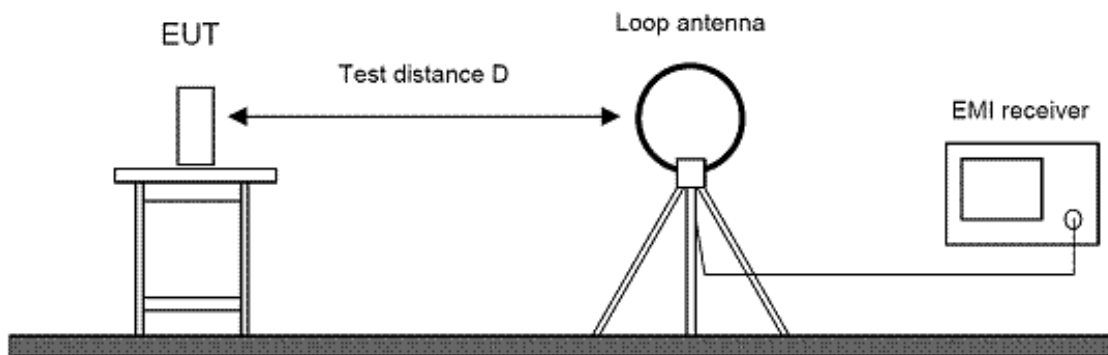

Picture 34: Test setup for radiated emission measurement (< 30 MHz)

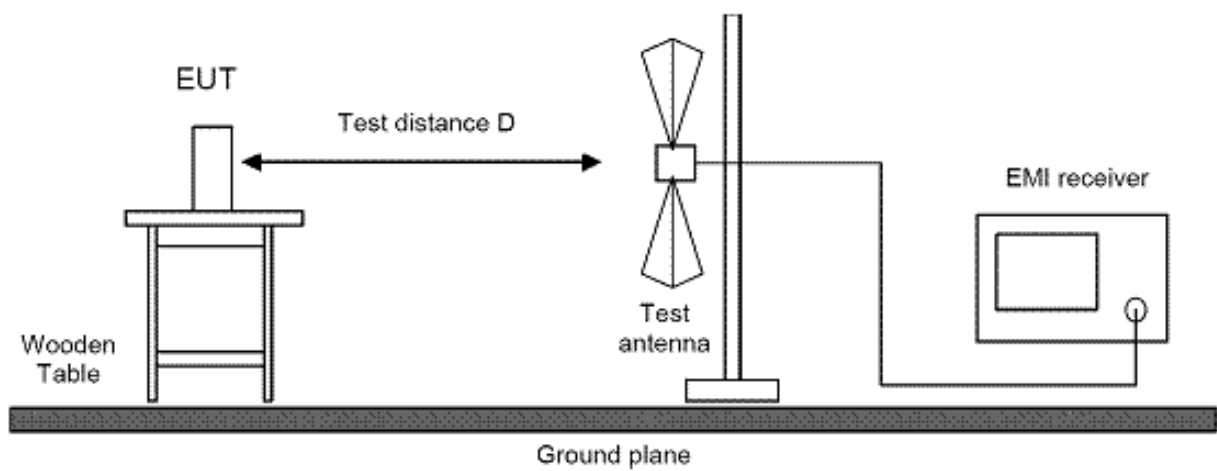

Picture 35: Test setup for radiated emission measurement (< 1 GHz)

8.6 Test deviation

There is no deviation from the original standard.

8.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode.

8.8 Test results

Transmit mode

Temperature:	22°C	Humidity:	46%
Tested by:	M. Müller	Test date:	2015-12-19

Radiated Emission Measurement 9 kHz – 30 MHz

Note:

Measured value = dB μ V/m @ 3 m

Recalculation factor = 40 dB / decade

Recalculated value1 = dB μ V/m @ 3 m - 40 dB = **dB μ V/m @ 30 m**

Recalculated value2 = dB μ V/m @ 30 m - 40 dB = **dB μ V/m @ 300 m**

During pre-measurements it was investigated that for the radiated emission measurement from 9 kHz to 30MHz the worst-case-position is EUT-position 3 in combination with the loop-antenna in line.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany


Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 46 of 73

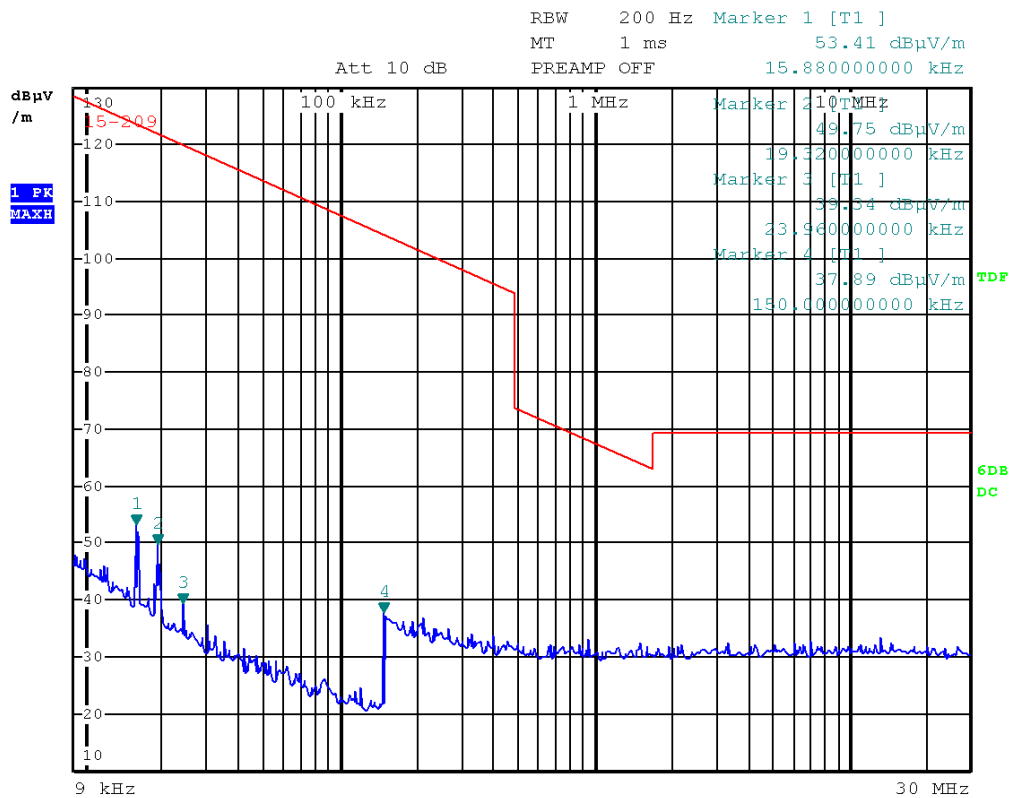

Picture 36: Radiated emission 9 kHz – 30MHz (Channel low)

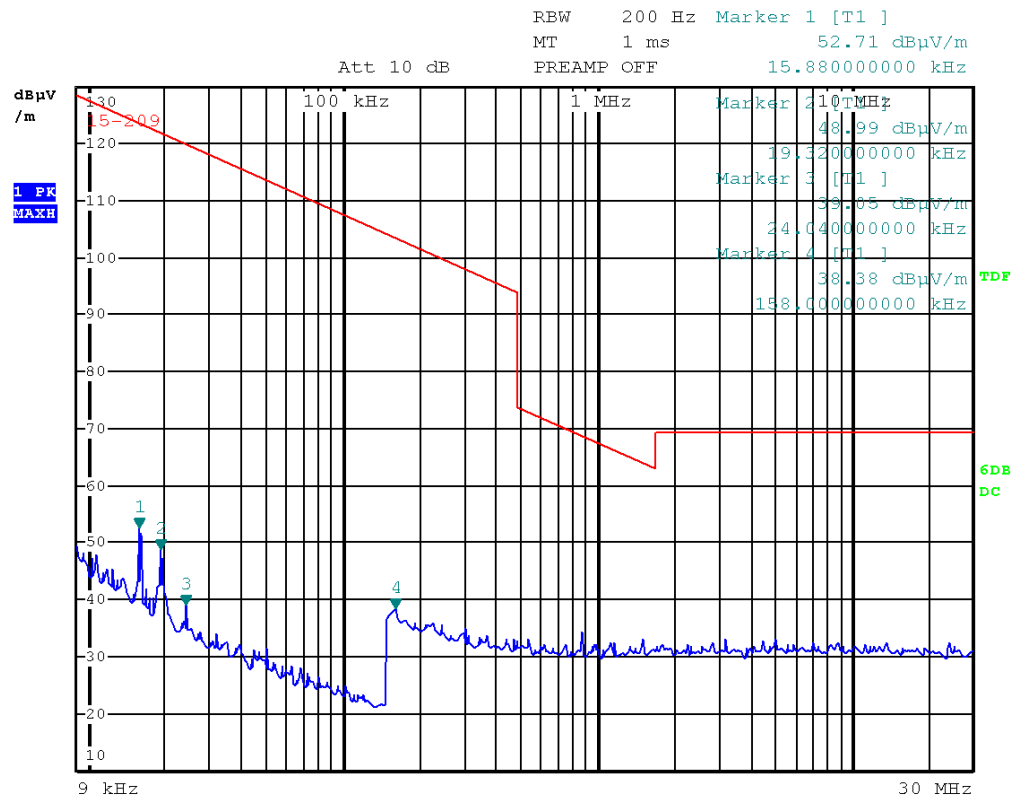


Picture 37: Radiated emission 9 kHz – 30MHz (Channel mid)



EMV TESTHAUS GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
 ST802

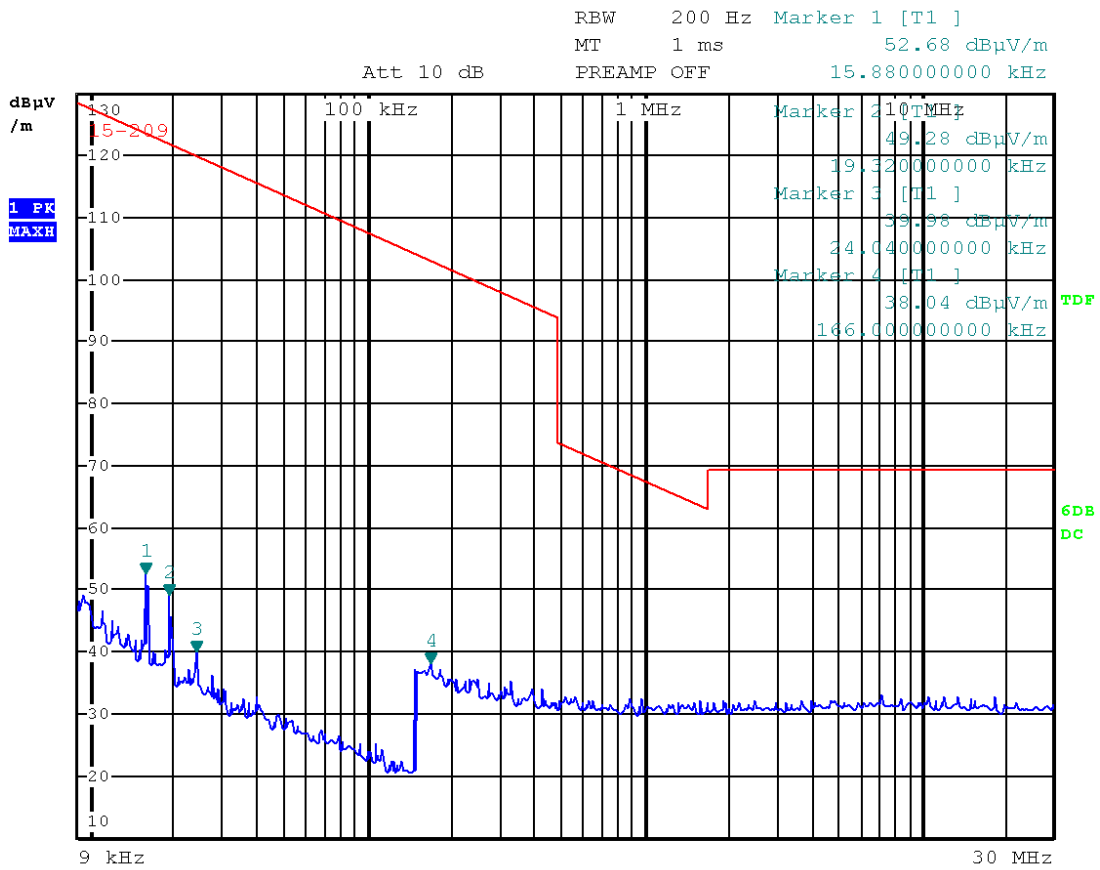

Picture 38: Radiated emission 9 kHz – 30MHz (Channel high)



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

Transmit mode

Temperature:	21°C	Humidity:	48%
Tested by:	M. Müller	Test date:	2015-12-10

Radiated Emission Measurement 30 MHz - 1 GHz

It was investigated that EUT position 3 is the respective worst-case.

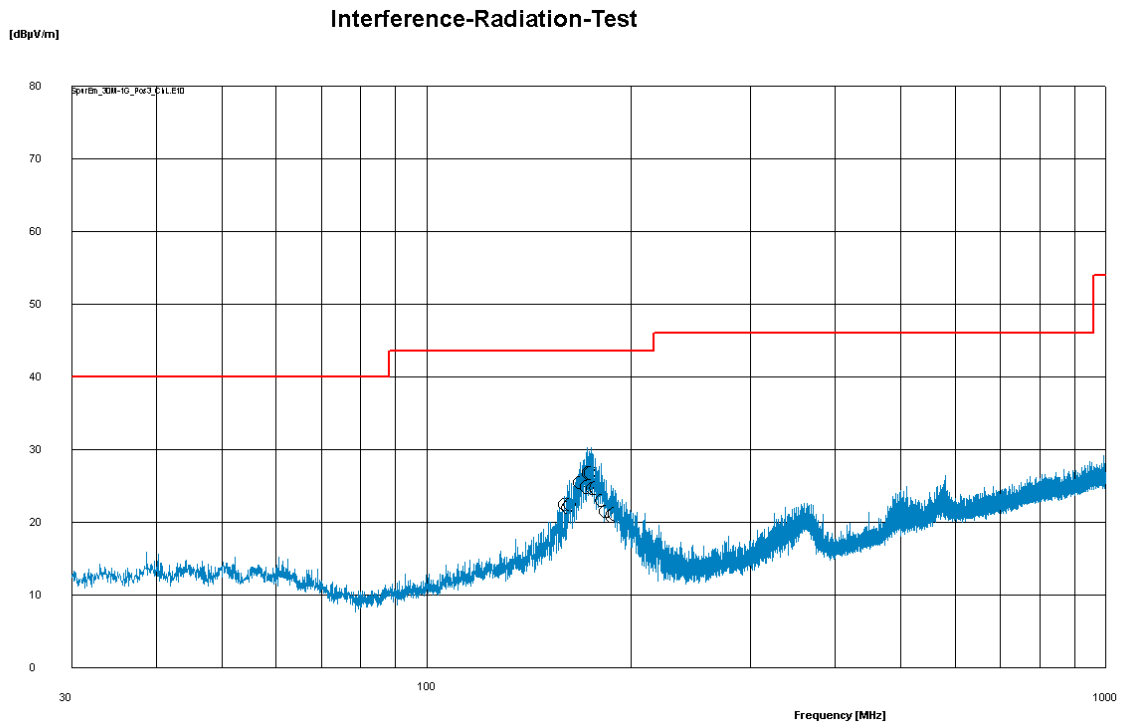


Freq. [MHz]	U_Rec [dBµV/m]	Limit [dBµV/m]	Corr. [dB]	U_Ant. [dBµV]	delta_U [dB]	Turn-table	Antenna	Pol.
159,66	22,5	43,5	15,2	7,3	21,1	195°	200 cm	H
161,04	22,1	43,5	15,2	6,9	21,4	340°	200 cm	H
162,24	22,4	43,5	15,1	7,3	21,1	10°	200 cm	H
168,24	25,5	43,5	14,6	10,9	18,0	350°	200 cm	H
172,26	24,9	43,5	14,1	10,8	18,7	2°	200 cm	H
173,34	26,8	43,5	13,9	12,9	16,7	358°	200 cm	H
174,54	26,8	43,5	13,8	13,0	16,7	0°	200 cm	H
175,56	24,7	43,5	13,6	11,1	18,8	358°	200 cm	H
177,18	24,8	43,5	13,4	11,4	18,8	358°	200 cm	H
180,78	23,1	43,5	12,9	10,2	20,5	341°	200 cm	H
183,60	21,5	43,5	12,5	9,0	22,0	10°	200 cm	H
186,90	20,9	43,5	12,2	8,8	22,6	350°	200 cm	H
189,18	21,2	43,5	12,0	9,2	22,4	2°	200 cm	H

Picture 39: Radiated emission 30 MHz – 1000MHz (Channel low)




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802

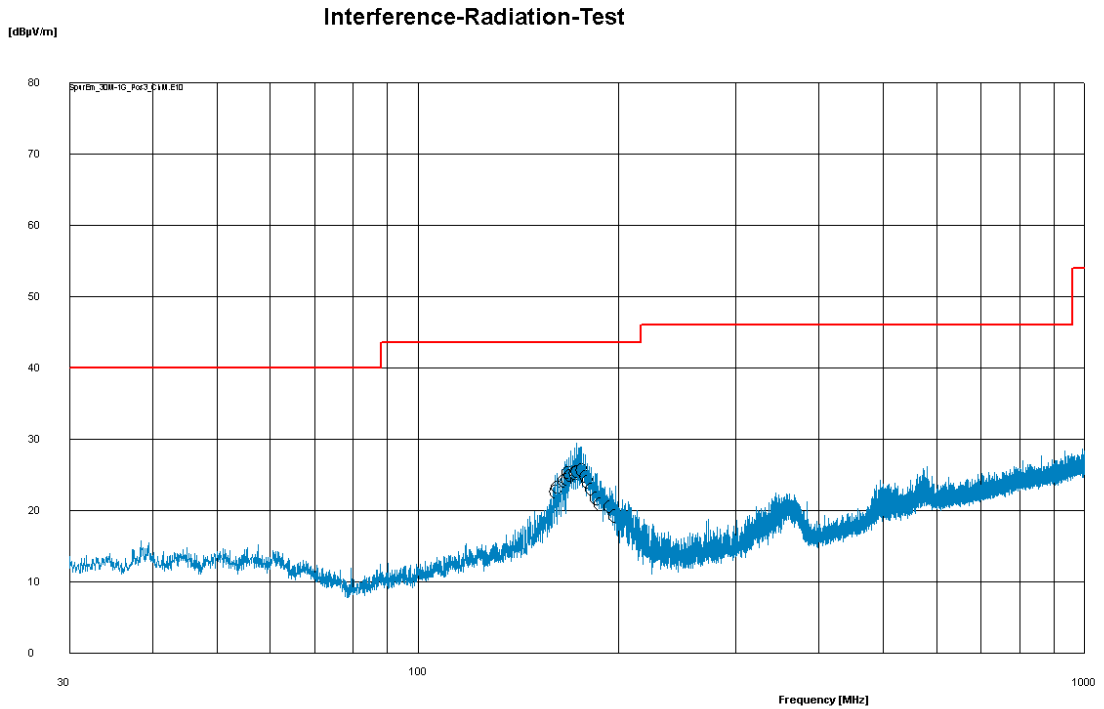

Freq. [MHz]	U_Rec [dBµV/m]	Limit [dBµV/m]	Corr. [dB]	U_Ant. [dBµV]	delta_U [dB]	Turn-table	Antenna	Pol.
160,68	22,7	43,5	15,2	7,5	20,8	360°	200 cm	H
161,94	23,3	43,5	15,1	8,2	20,2	2°	200 cm	H
165,96	24,2	43,5	14,8	9,4	19,3	358°	200 cm	H
167,22	24,4	43,5	14,7	9,7	19,2	2°	200 cm	H
168,18	25,4	43,5	14,6	10,8	18,2	2°	200 cm	H
169,32	24,9	43,5	14,5	10,4	18,6	10°	200 cm	H
171,84	25,3	43,5	14,2	11,1	18,3	350°	200 cm	H
173,10	25,5	43,5	14,0	11,5	18,0	358°	200 cm	H
175,86	25,7	43,5	13,6	12,2	17,8	341°	200 cm	H
178,26	24,8	43,5	13,2	11,6	18,7	2°	200 cm	H
179,64	24,1	43,5	13,0	11,1	19,4	360°	200 cm	H
182,28	23,0	43,5	12,7	10,4	20,5	2°	200 cm	H
185,46	21,7	43,5	12,3	9,4	21,8	360°	200 cm	H
187,80	20,9	43,5	12,1	8,8	22,6	358°	200 cm	H
194,22	20,6	43,5	11,6	8,9	23,0	2°	200 cm	H
197,82	19,3	43,5	11,4	7,9	24,2	20°	200 cm	H

Picture 40: Radiated emission 30 MHz – 1000MHz (Channel mid)

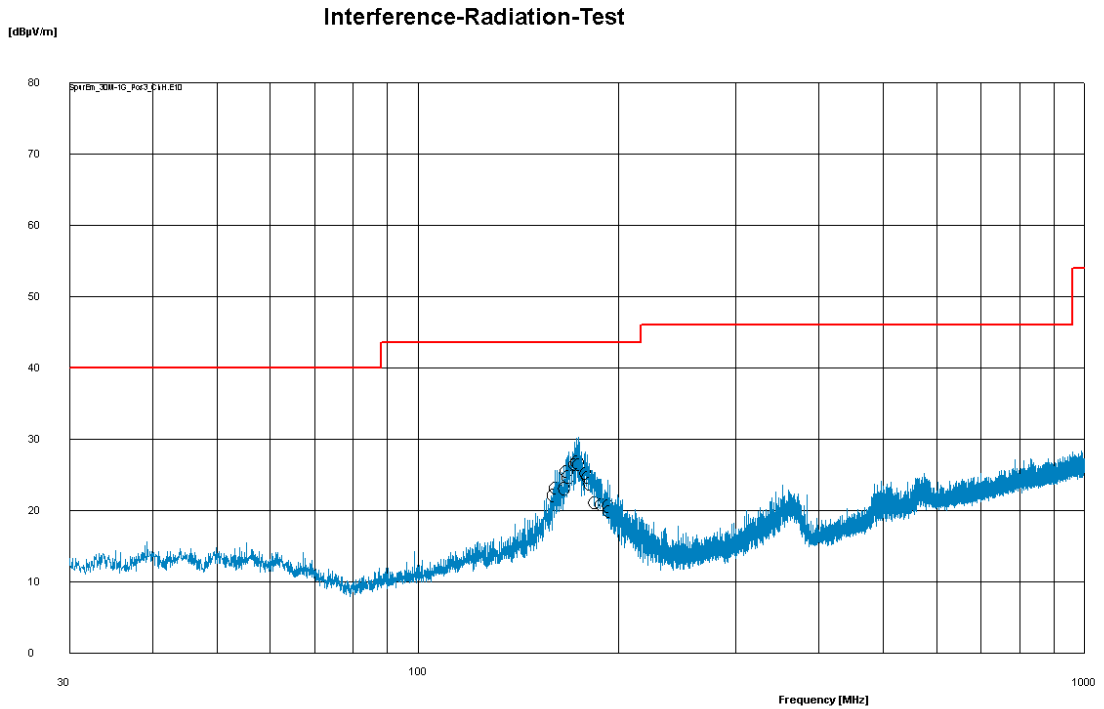

Freq. [MHz]	U_Rec [dBµV/m]	Limit [dBµV/m]	Corr. [dB]	U_Ant. [dBµV]	delta_U [dB]	Turn- table	Antenna	Pol.
159,84	22,1	43,5	15,2	6,9	21,4	11°	200 cm	H
160,80	23,1	43,5	15,2	8,0	20,4	20°	200 cm	H
165,54	23,1	43,5	14,8	8,3	20,4	2°	200 cm	H
166,98	25,5	43,5	14,7	10,8	18,0	0°	200 cm	H
168,12	24,8	43,5	14,6	10,2	18,8	350°	200 cm	H
172,02	26,4	43,5	14,1	12,3	17,1	0°	200 cm	H
173,28	26,8	43,5	13,9	12,8	16,8	358°	200 cm	H
174,42	26,5	43,5	13,8	12,7	17,0	0°	200 cm	H
178,26	25,2	43,5	13,2	12,0	18,3	340°	200 cm	H
179,40	24,7	43,5	13,0	11,6	18,9	0°	200 cm	H
180,66	23,8	43,5	12,9	10,9	19,7	358°	200 cm	H
183,90	21,1	43,5	12,5	8,6	22,4	350°	200 cm	H
188,46	20,8	43,5	12,0	8,8	22,7	358°	200 cm	H
192,84	20,6	43,5	11,7	8,9	22,9	10°	200 cm	H
193,86	19,9	43,5	11,6	8,3	23,6	350°	200 cm	H

Picture 41: Radiated emission 30 MHz – 1000MHz (Channel high)

9 Radiated emission measurement (> 1 GHz)

according to 47 CFR Part 15, sections 15.205(a), 15.209(a), 15.247(d), and KDB 558074

9.1 Test location

- Scan with peak detector in 3 m anechoic chamber
- Final measurement with average and max peak detector.

Description	Manufacturer	Inventory No.
Anechoic chamber	EMV TESTHAUS GmbH	E00100

9.2 Test instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESU26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/>	AMF-5D-00501800-28-13P	Miteq	W00089
<input checked="" type="checkbox"/>	AMF-6F-16002650-25-10P	Miteq	W00090
<input checked="" type="checkbox"/>	BBHA 9120D	Schwarzbeck	W00053
<input checked="" type="checkbox"/>	BBHA 9170	Schwarzbeck	W00055
<input type="checkbox"/>	COSB 4-1-26	Conformitas	W00091

9.3 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 52 of 73

Frequency [MHz]	Field strength Fs [$\mu\text{V/m}$]	Field strength [$\text{dB}\mu\text{V/m}$]	Measurement distance d [m]
30 – 88	100	40	3
88 – 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

9.4 Test procedure

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The receiving antenna was placed 3 meters from the turntable. The test setup was placed inside a fully anechoic chamber.
2. Power on the EUT and all peripherals.
3. The broadband antenna was set to vertical polarization.
4. The EMI receiver performed a scan from 1000 MHz to 10th harmonic of the fundamental frequency with the detector set to peak and the measurement bandwidth set to 1 MHz (VBW \geq 3 MHz). The trace data was recorded with the receiver Max Hold function.
5. The turn table was rotated in intervals of 15°.
6. After a full 360°-turn the antenna polarization was changed to horizontal and the test was repeated at step 4 and 5.
7. After the scan suspicious frequencies were selected and maximized by moving turntable and variation of antenna height until maximum of emission was found.
8. Then the RBW was set to 1 MHz and the VBW was reduced to a minimum of 10 Hz (1 kHz by default) to get average values determined by video averaging.
9. The receiving antenna was set to vertical polarization.
10. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
11. The receiving antenna was then set to horizontal polarization and the measurement was repeated at step 9.
12. The highest recorded level was noted.




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 53 of 73

9.5 Test setup

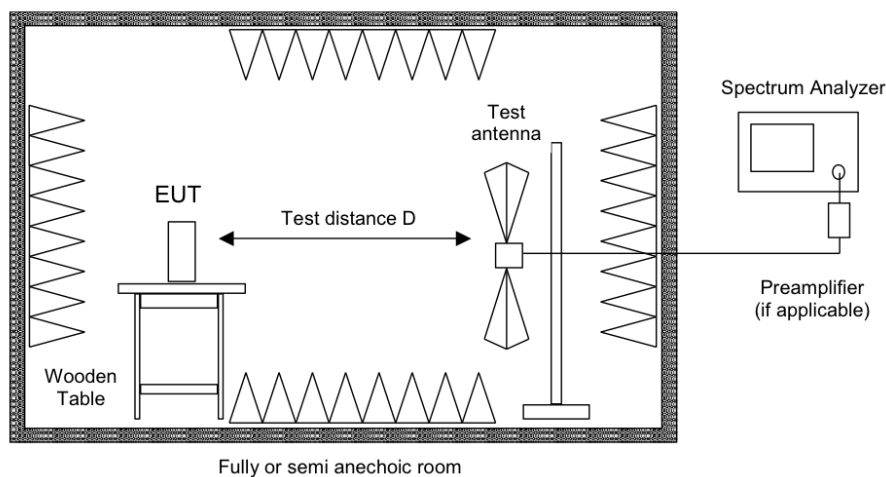

Picture 42: Test setup for radiated emission measurement (> 1 GHz)

9.6 Test deviation

There is no deviation from the original standard.

9.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode. For these measurements it was investigated that EUT-position3 is the respective worst-case.

9.8 Test results

Temperature:	19°C	Humidity:	47%
Tested by:	M. Müller	Test date:	2015-12-22

Final Results:

Channel low									
f[GHz]	E _{meas} [dB μ V/m]	EUT Pos.	Polarization	Table [°]	Height [cm]	Detector	Restr. Band	Limit [dB μ V/m]	Result
2.4099	92.44	1	V	286.0	147	PK	No	----	Carrier
2.4099	91.44					AV		----	Carrier
4.8196	65.78	2	V	341.0	157	PK	Yes	74	Pass
4.8198	47.16					AV		54	Pass
7.2294	53.41	2	V	302.9	197	PK	No	-20 dBc	Pass
7.2296	45.09					AV		-20 dBc	Pass
9.6396	60.06	3	V	79.6	181	PK	No	-20 dBc	Pass
9.6393	53.10					AV		-20 dBc	Pass



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 55 of 73




Ref 117 dBµV/m *Att 10 dB *RBW 1 MHz Marker 1 [T1] 92.44 dBµV/m
 VBW 3 MHz 2.409924000 GHz
 SWT 10 ms

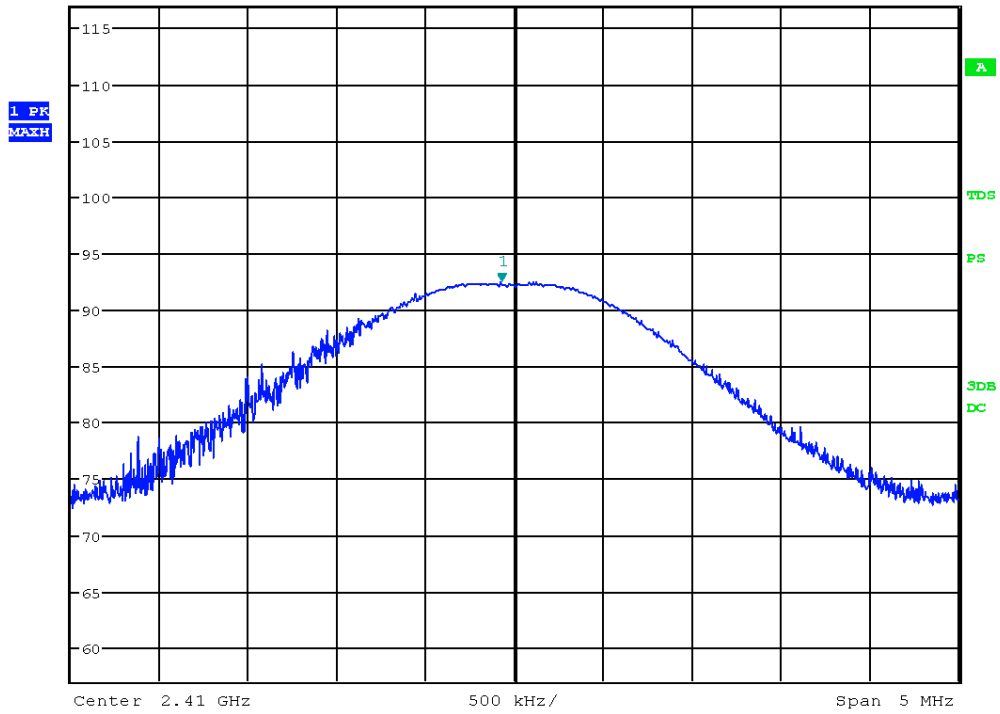

Picture 43: spurious emission, Channel low - PK



Ref 117 dBµV/m *Att 10 dB *RBW 1 MHz Marker 1 [T1] 91.44 dBµV/m
 *VBW 1 kHz 2.409871795 GHz
 *SWT 40 ms

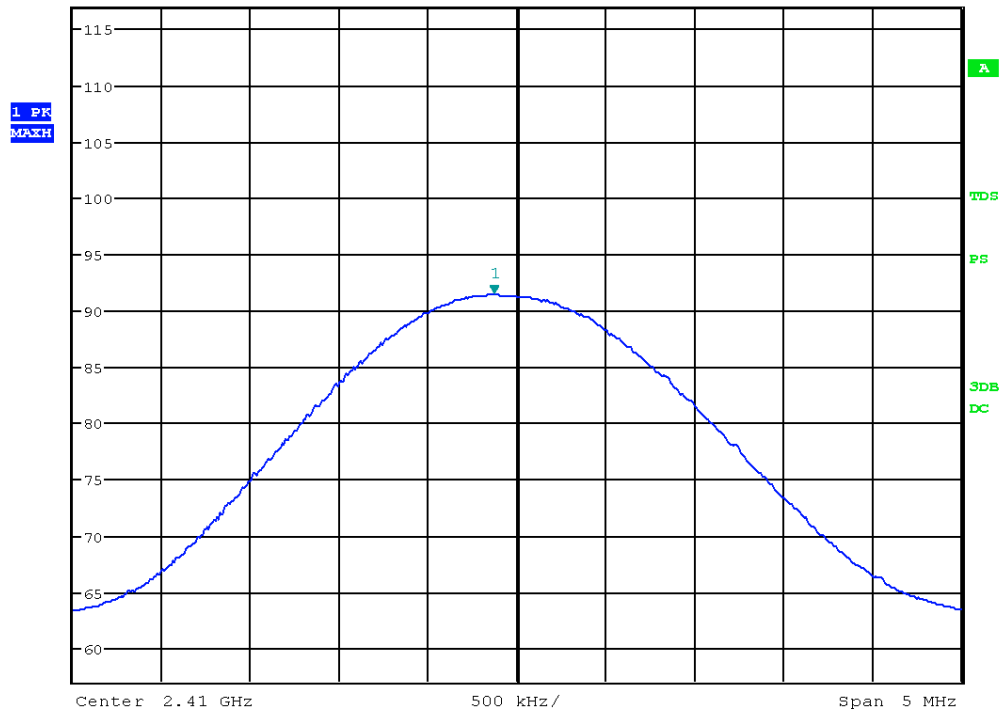

Picture 44: spurious emission, Channel low - AV



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 56 of 73




*RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 65.78 dBμV/m
 SWT 20 ms 4.819631410 GHz

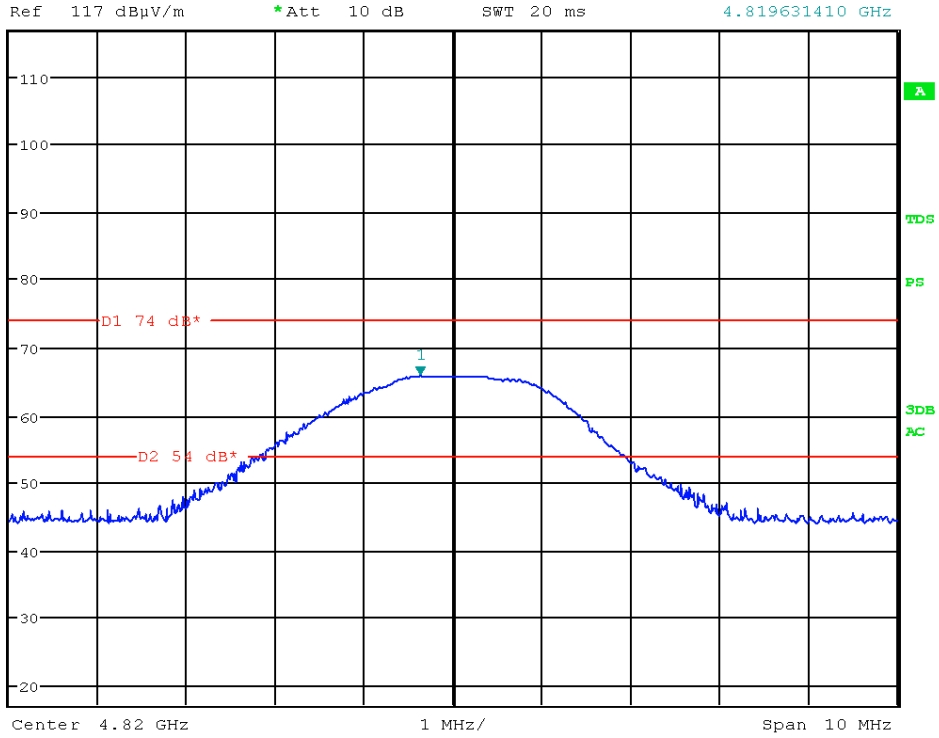

Picture 45: spurious emission, Channel low - PK



*RBW 1 MHz Marker 1 [T1]
 *VBW 100 Hz 47.16 dBμV/m
 SWT 250 ms 4.819768000 GHz

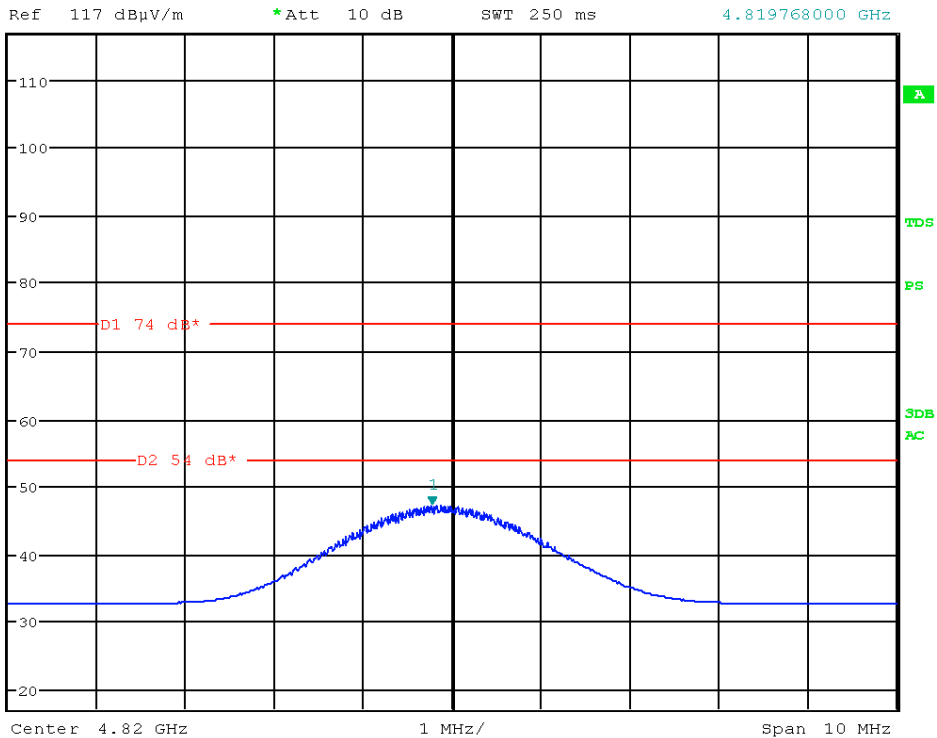

Picture 46: spurious emission, Channel low – AV



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 57 of 73




*RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 53.41 dBμV/m
 SWT 20 ms 7.229439103 GHz

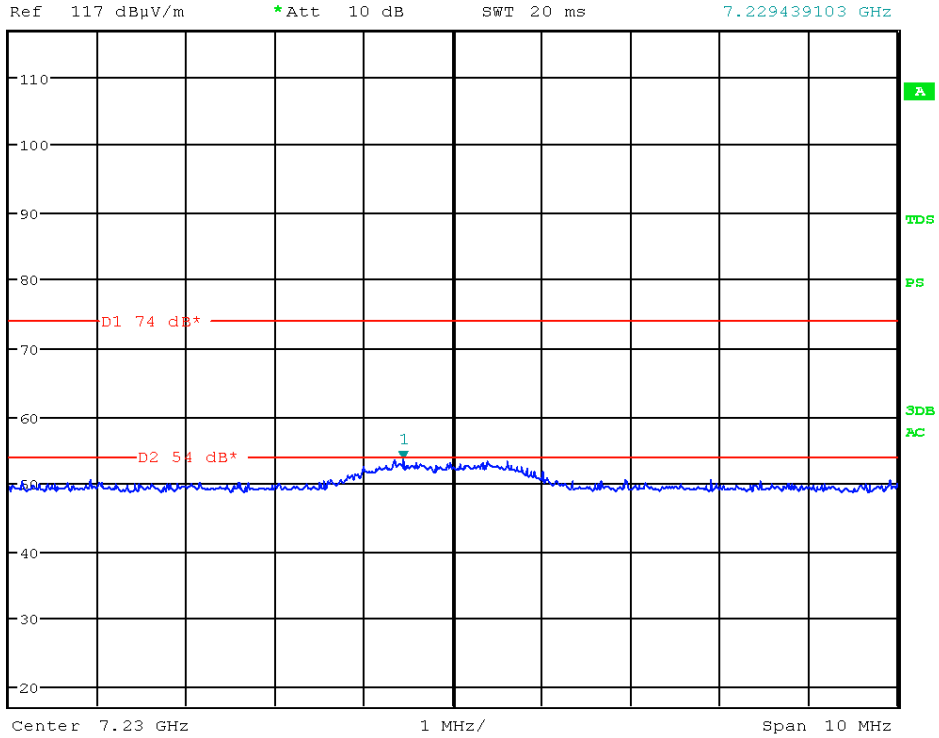

Picture 47: spurious emission, Channel low - PK



*RBW 1 MHz Marker 1 [T1]
 *VBW 1 kHz 45.09 dBμV/m
 SWT 25 ms 7.229568000 GHz

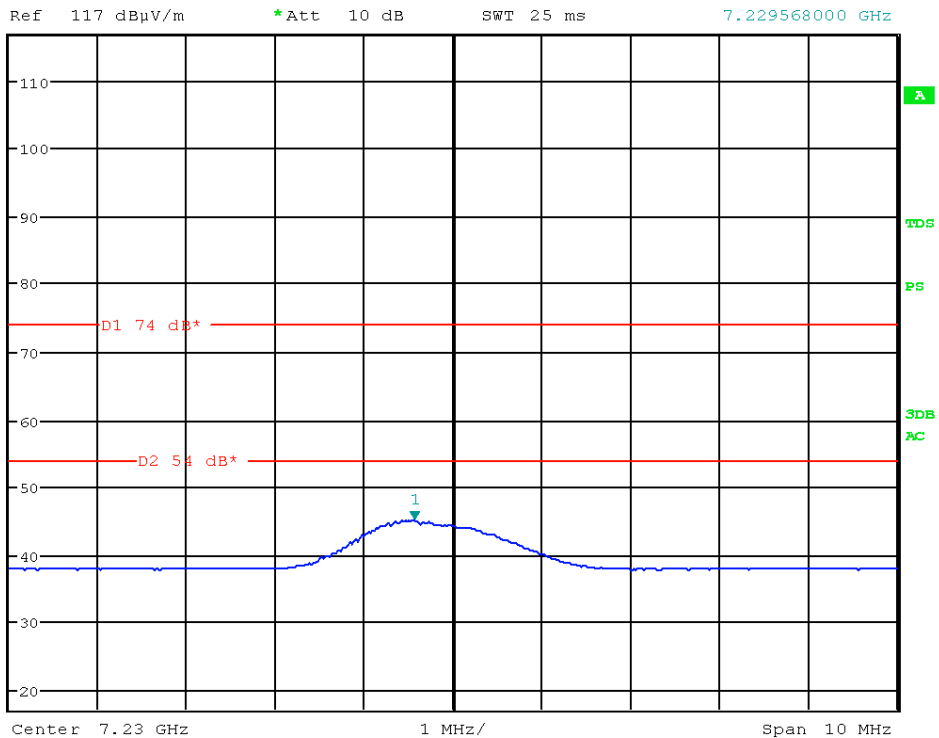

Picture 48: spurious emission, Channel low - AV



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 58 of 73




Ref 117 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 60.06 dB μ V/m
 SWT 20 ms 9.639551282 GHz

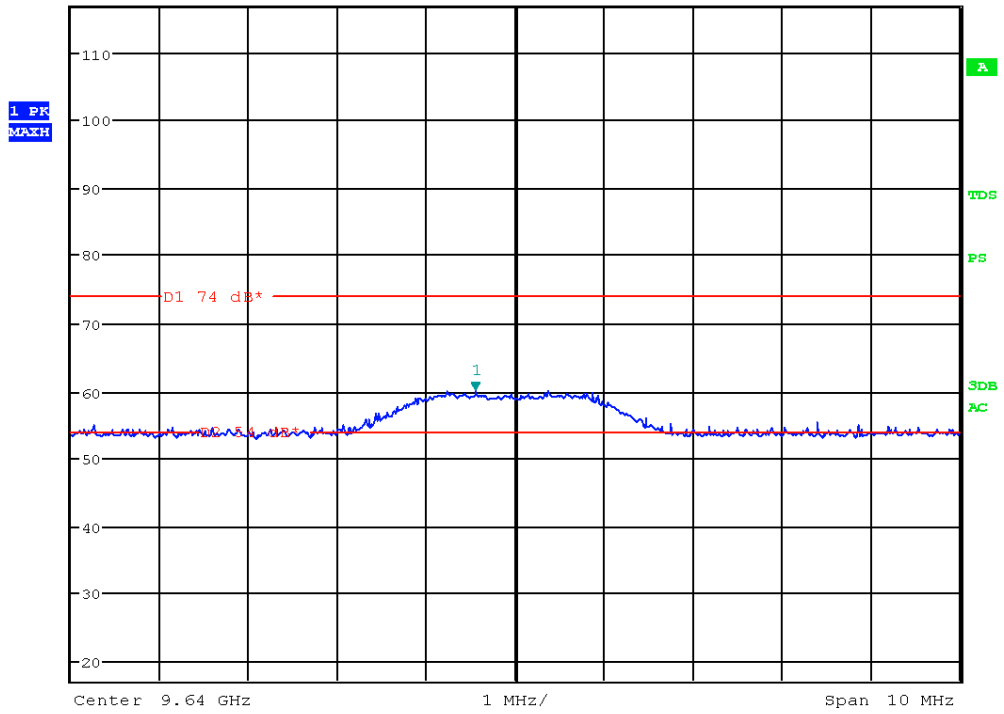

Picture 49: spurious emission, Channel low - PK



Ref 117 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 *VBW 1 kHz 53.10 dB μ V/m
 SWT 25 ms 9.639288000 GHz

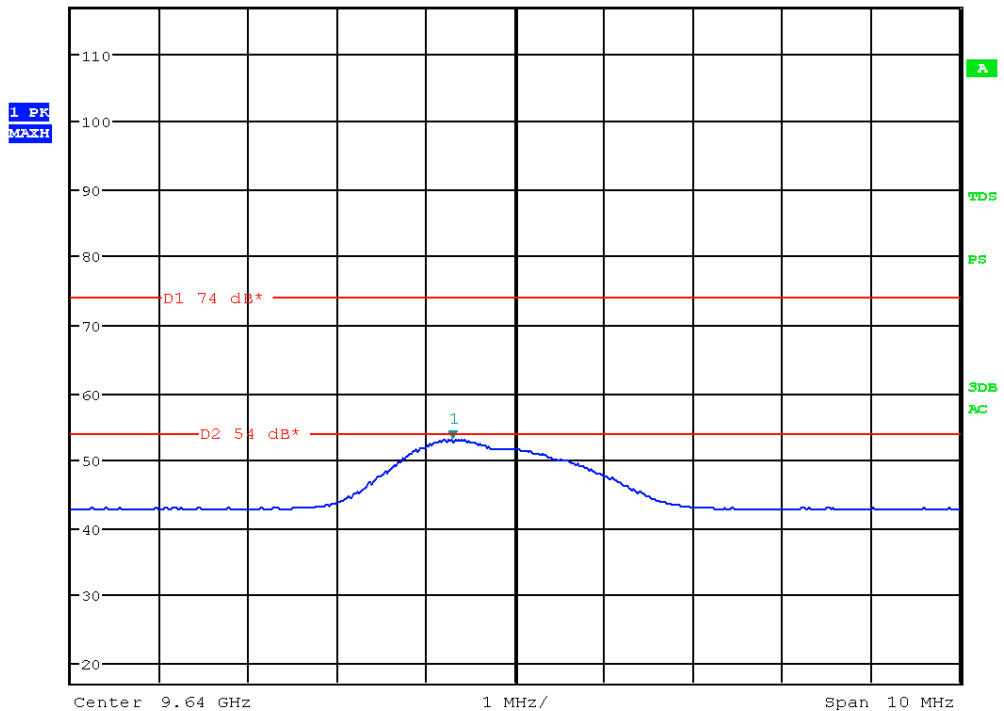

Picture 50: spurious emission, Channel low - AV



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 59 of 73

Channel mid									
f[GHz]	E _{meas} [dB μ V/m]	EUT-Pos	Polarization	Table [°]	Height [cm]	Detector	Restr. Band	Limit [dB μ V/m]	Result
2.4398	92.27	1	V	286.0	147	PK	No	----	Carrier
2.4399	91.06					AV		----	Carrier
4.8796	63.62	2	H	330.1	144	PK	Yes	74	Pass
4.8798	46.33					AV		54	Pass
9.7604	61.77	2	H	192.9	159	PK	No	-20 dBc	Pass
9.7593	55.40					AV		-20 dBc	Pass




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802




Ref 117 dBµV/m *Att 10 dB *RBW 1 MHz Marker 1 [T1] 92.27 dBµV/m
 *VBW 3 MHz *SWT 10 ms 2.439820000 GHz

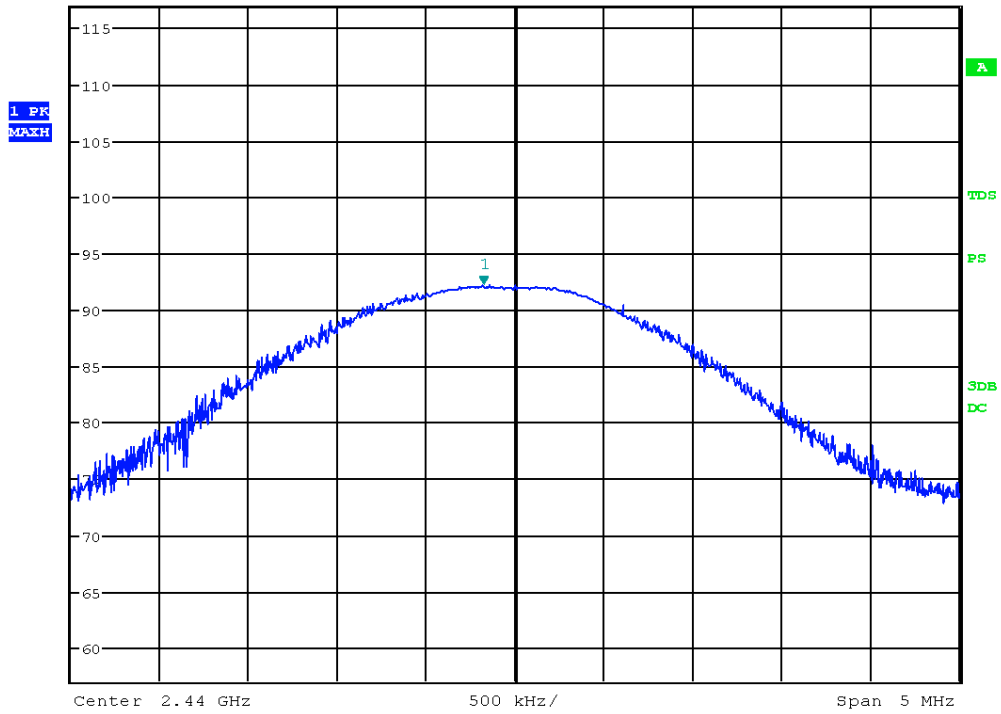

Picture 51: spurious emission, Channel mid - PK



Ref 117 dBµV/m *Att 10 dB *RBW 1 MHz Marker 1 [T1] 91.06 dBµV/m
 *VBW 1 kHz *SWT 40 ms 2.439863782 GHz

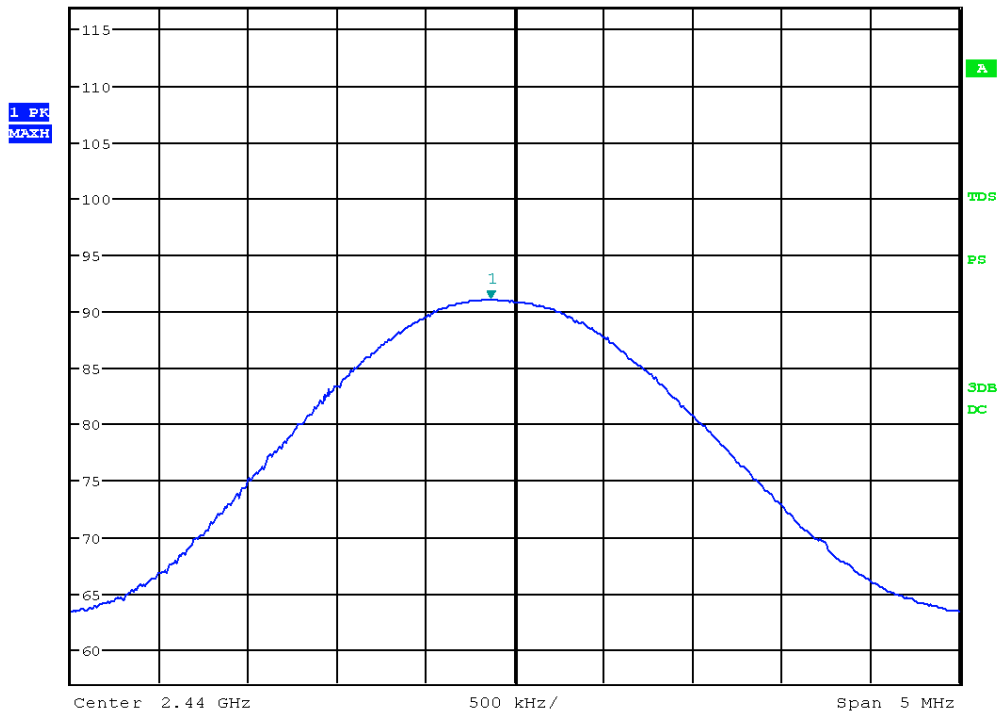

Picture 52: spurious emission, Channel mid - AV



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 61 of 73




*RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 63.62 dBµV/m
 SWT 20 ms 4.879615385 GHz

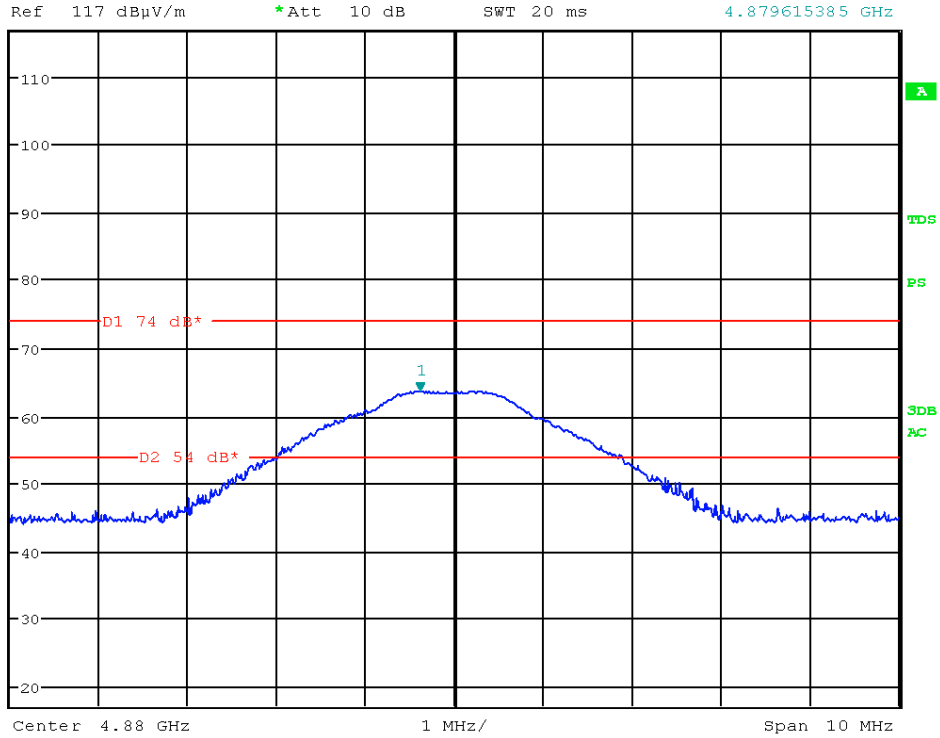

Picture 53: spurious emission, Channel mid - PK



*RBW 1 MHz Marker 1 [T1]
 *VBW 100 Hz 46.33 dBµV/m
 SWT 250 ms 4.879808000 GHz

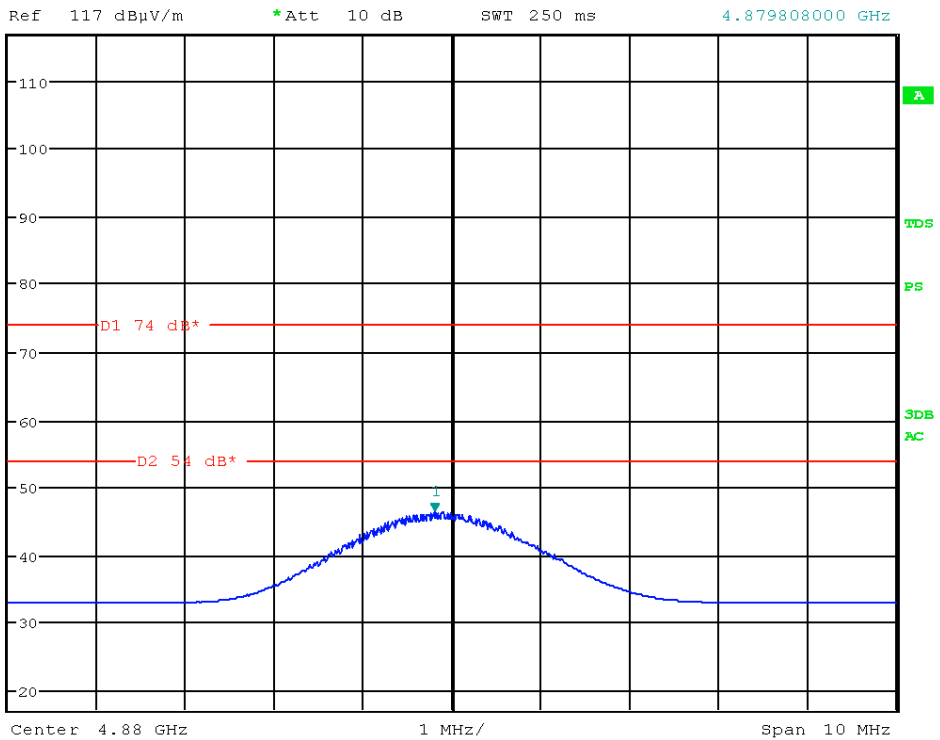

Picture 54: spurious emission, Channel mid – AV



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 62 of 73




*RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 61.77 dBμV/m
 SWT 20 ms 9.760384615 GHz

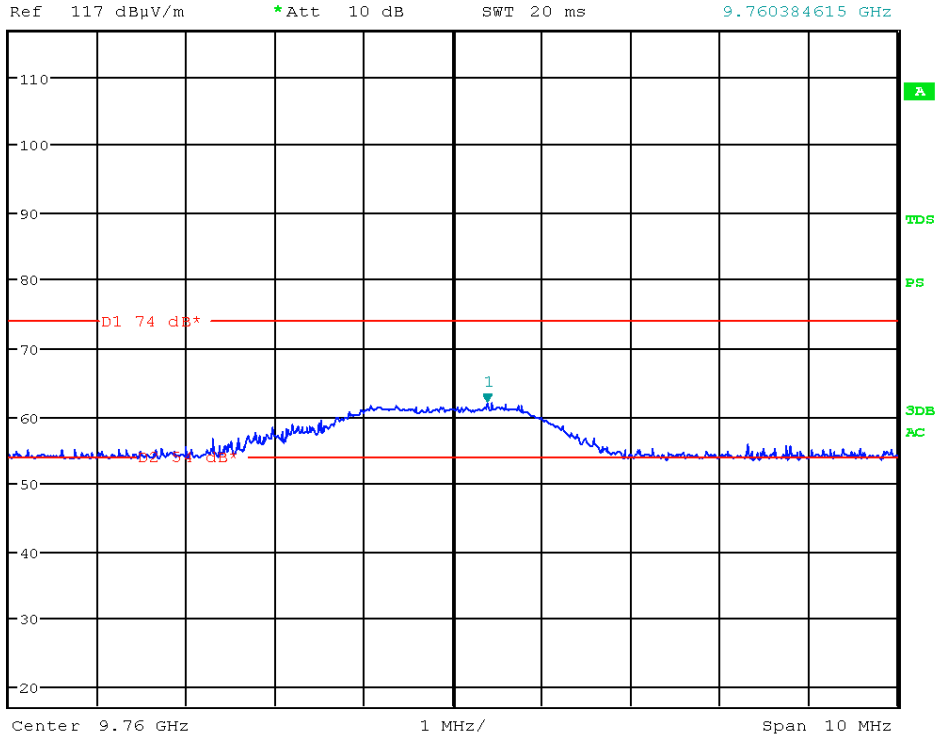

Picture 55: spurious emission, Channel mid - PK



*RBW 1 MHz Marker 1 [T1]
 *VBW 1 kHz 55.40 dBμV/m
 SWT 25 ms 9.759328000 GHz

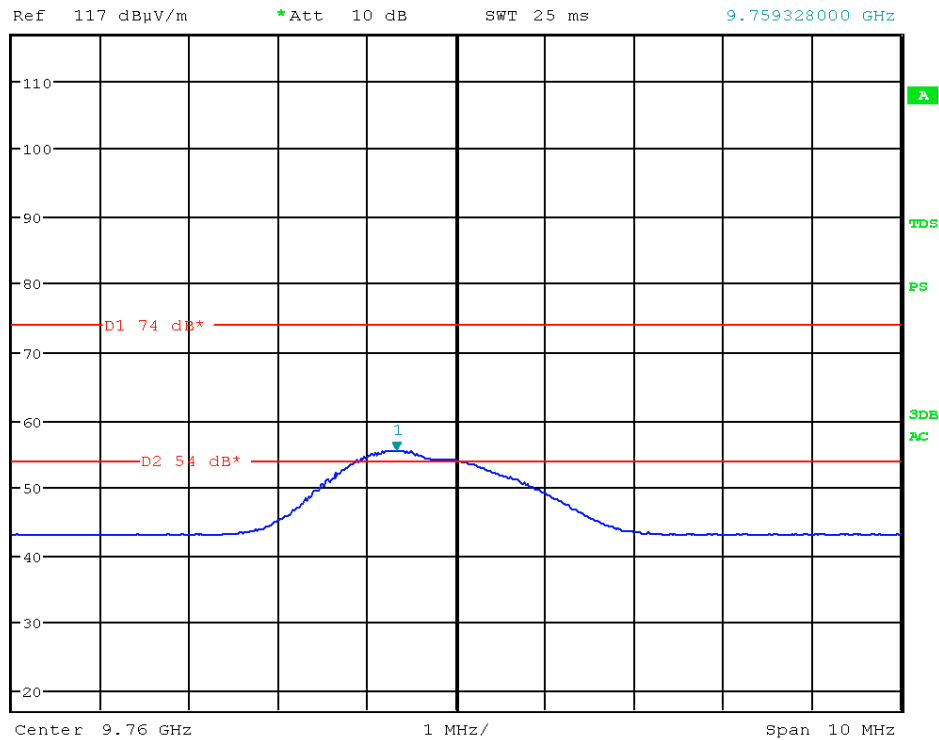

Picture 56: spurious emission, Channel mid - AV



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 63 of 73

Channel high									
f[GHz]	E _{meas} [dBμV/m]	EUT-Pos	Polarization	Table [°]	Height [cm]	Detector	Restr. Band	Limit [dBμV/m]	Result
2.4701	91.26	1	V	286.0	147	PK	No	----	Carrier
2.4699	90.04					AV		----	Carrier
4.9396	63.33	2	H	322.8	143	PK	Yes	74	Pass
4.9400	45.91					AV		54	Pass
9.8794	61.06	2	H	190.2	163	PK	No	-20 dBc	Pass
9.8793	54.82					AV		-20 dBc	Pass



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 64 of 73




Ref 117 dBµV/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 91.26 dBµV/m
 SWT 10 ms 2.470080000 GHz

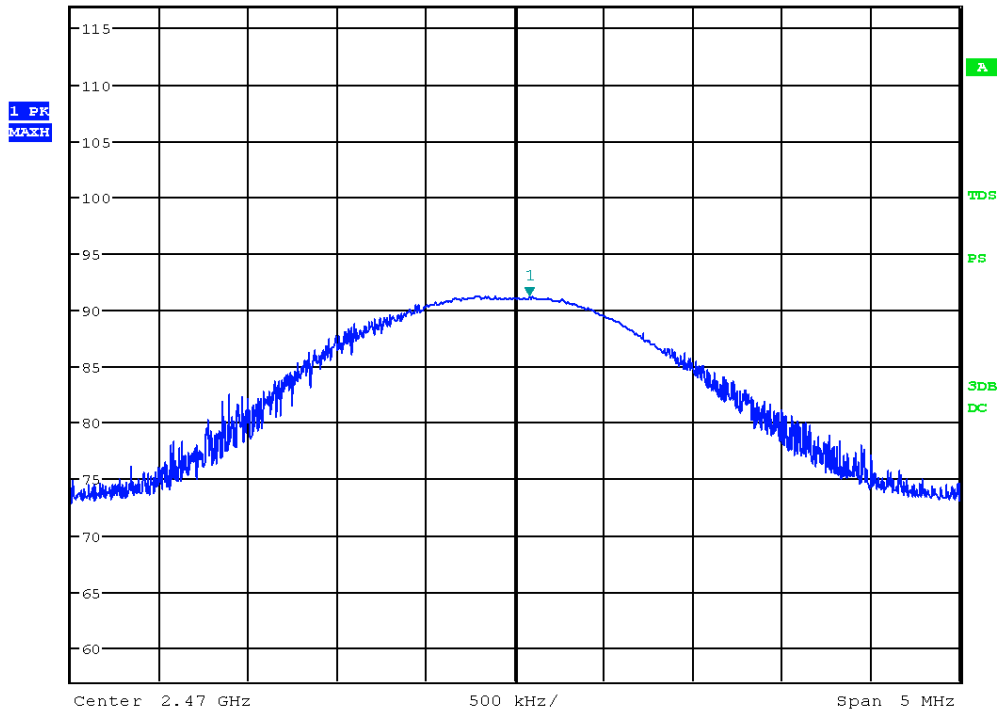

Picture 57: spurious emission, Channel high - PK



Ref 117 dBµV/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 1 kHz 90.04 dBµV/m
 *SWT 40 ms 2.469855769 GHz

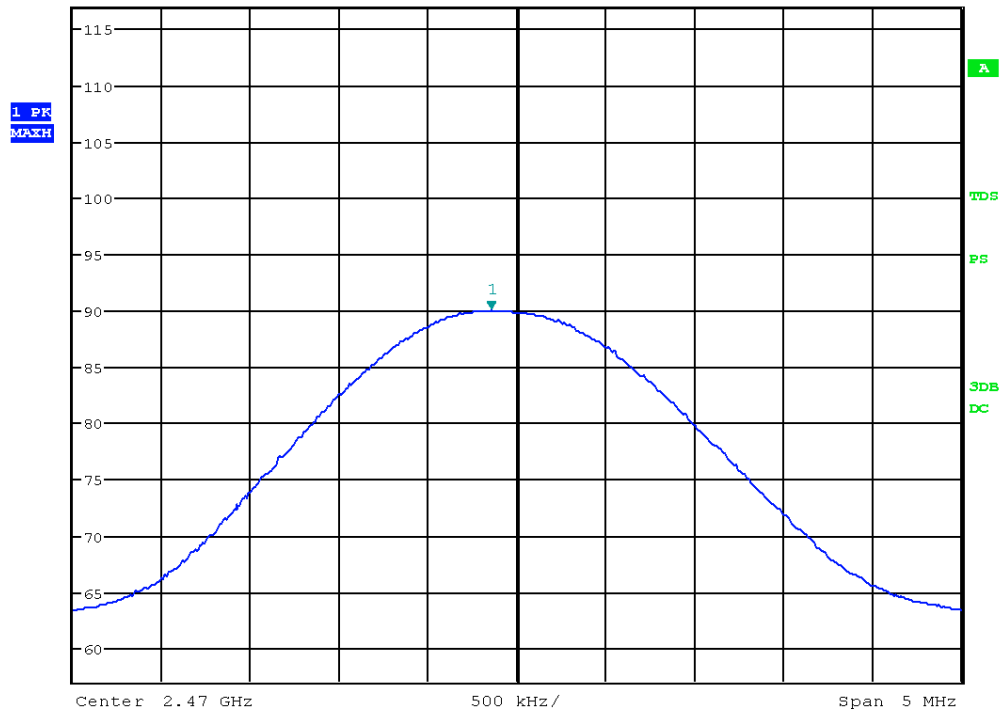

Picture 58: spurious emission, Channel high - AV



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 65 of 73




Ref 117 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 3 MHz 63.33 dB μ V/m
 SWT 20 ms 4.939599359 GHz

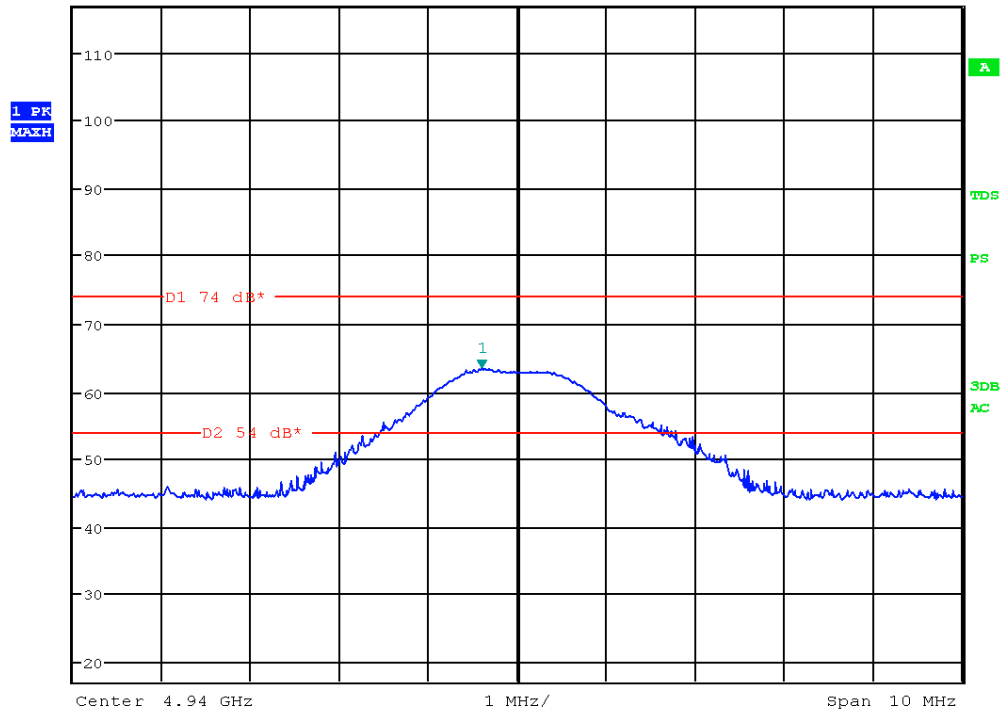

Picture 59: spurious emission, Channel high - PK



Ref 117 dB μ V/m *Att 10 dB *RBW 1 MHz Marker 1 [T1]
 VBW 100 Hz 45.91 dB μ V/m
 SWT 250 ms 4.939952000 GHz

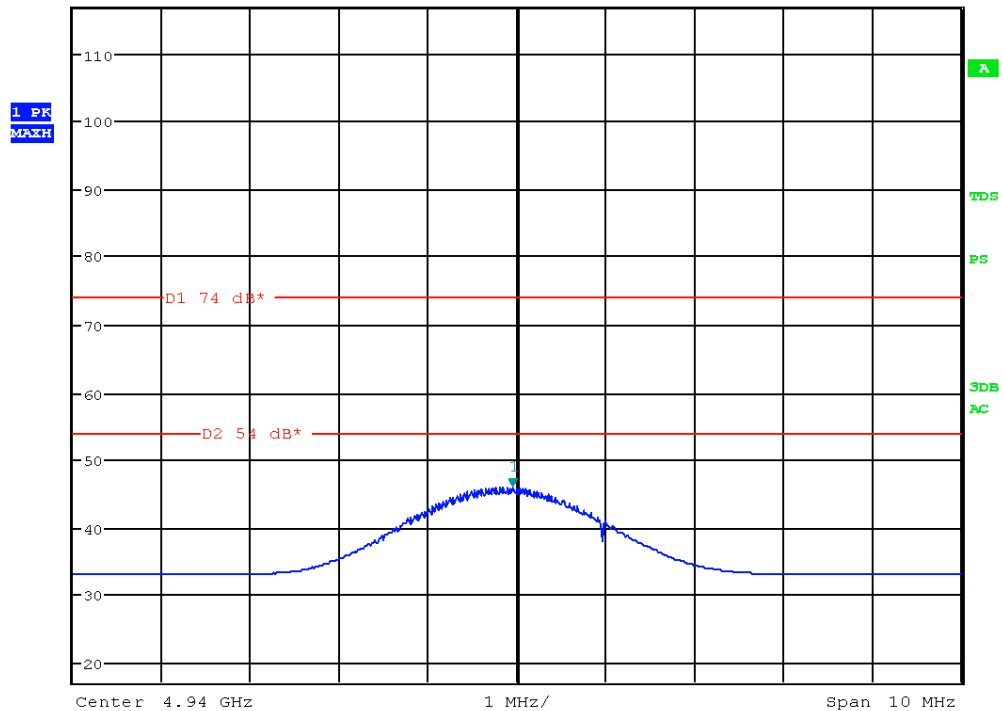

Picture 60: spurious emission, Channel high - AV




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany


Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 66 of 73

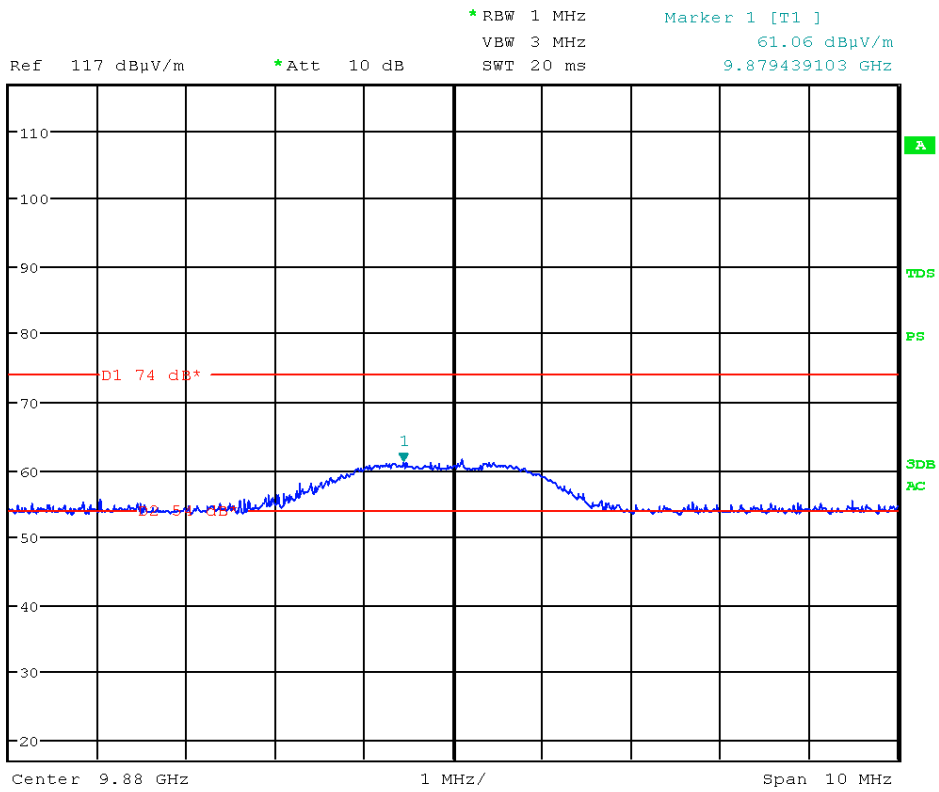

Picture 61: spurious emission, Channel mid - PK

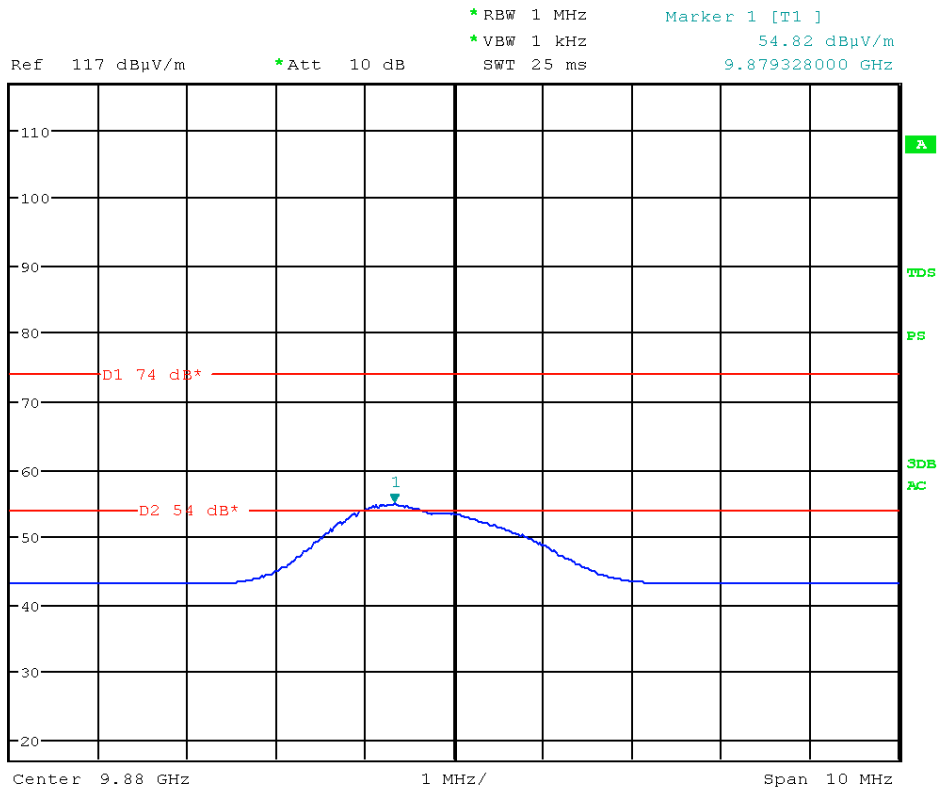

Picture 62: spurious emission, Channel mid - AV



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 67 of 73

10 Radio frequency radiation exposure evaluation for mobile devices

according to 47 CFR Part 2, section 2.1093,
KDB 447498 D01, section 4.3.1,
RSS-Gen Issue 4, section 3.2, and RSS-102 Issue 5, section 2.5.1

10.1 Equipment data

Antenna detachable (see antenna specifications):	<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no
Temporary antenna connector:	<input checked="" type="checkbox"/> yes	<input type="checkbox"/> no
Tune-up function:	<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no
Antenna gain G referring to isotropic radiator:	1.0 dBi	
	Numeric gain:	1.259
Conducted output power CP (maximum):	-1.67 dBm	
	Numeric power:	0.681 mW
Separation distance between user and transmitting device:	<input checked="" type="checkbox"/> R ≤ 20 cm	<input type="checkbox"/> R > 20 cm
Test separation distance Δ_{min} between user and:	<input checked="" type="checkbox"/> antenna	<input type="checkbox"/> outer surface

10.2 SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm and < 5 mm according to KDB 447498 D01 section 4.3.1.1:

$$\frac{P_{conducted}(mW) \cdot \sqrt{f(GHz)}}{\Delta_{min}} \leq 3.0$$

Calculation: $\frac{1mW \times \sqrt{2.47}}{5mm} = 0.314 < 3.0$

Note: According to section 4.3.1.1 for a minimum test separation distance < 5 mm, worst case distance of 5 mm is applied to determine SAR test exclusion.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 68 of 73

10.3 Exemption Limits for SAR Evaluation according to RSS-102 Issue 5, section 2.5.1:

Limit according to table1:

Frequency (MHz)	Exemption Limits (mW) at separation distance of ≤ 5 mm
2450	4



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 69 of 73

11 Equipment calibration status

Description	Modell number	Serial number	Inventory number(s)	Last calibration	Next calibration
Test receiver	ESU 26	100026	W00002	2014-02	2016-02
Test receiver	ESCI 3	100013	E00001	2013-12	2015-12
Test receiver	ESCI 3	100328	E00552	2014-07	2016-07
Test receiver	ESCS 30	825442/0002	E00003	2014-02	2016-02
LISN	ESH2-Z5	881362/037	E00004	2015-06	2017-06
LISN	ESH2-Z5	893406/009	E00005	2014-01	2016-01
Loop antenna	HFH2-Z2	871398/0050	E00004	2014-07	2016-07
Broadband antenna	VULB 9163	9163-114	E00013	2015-09	2017-09
Broadband horn antenna	BBHA 9120D	9120D-593	W00053	2014-03	2016-03
Broadband horn antenna	BBHA 9170	9170-331	W00055	2014-03	2016-03
Shielded room	P92007	B83117C1109T211	E00107	N/A	
Compact Diagnostic Chamber (CDC)	VK041.0174	D62128-A502-A69-2-0006	E00026	N/A	
Open area test site (OATS)	---	---	E00354	2015-10	2016-10
Climatic chamber 340 I	VC ³ 4034	58566123250010	C00015	2014-09	2016-09
Cable set shielded room	Cable no. 30	---	E00424	2015-07	2016-07
Cable set CDC	Cables no. 37 and 38	---	E00459 E00460	2015-05	2016-05
Cable set OATS 3 m	Cables no. 19, 34 and 36	---	E00453 E00456 E00458	2015-10	2016-10
Cable set OATS 10 m	Cables no. 19, 33 and 36	---	E00453 E00455 E00458	2015-10	2016-10
Cable set anechoic chamber 01	Cables no. 01, 09, 11 and 13	---	W00095 E00307 E00319 E00436	2015-04	2016-04
Cable set anechoic chamber 02	Cables no. 01, 09, 12 and 14	---	W00095 E00307 E00320 E00437	2015-04	2016-04

Table 2: Equipment calibration status

Note: Expiry date of measurement facility registration by
 - FCC (registration number 221458): 2017-04
 - Industry Canada (test site numbers 3472A-1 and 3472A-2): 2018-11



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Trimble Kaiserslautern GmbH
 Repeater
ST802

150707-AU01+W02

Page 70 of 73

12 Measurement uncertainty

Description	Max. deviation	k
Conducted emission AMN (9kHz to 30 MHz)	± 4.0 dB	2
Radiated emission open field (30 MHz to 1 GHz)	± 4.5 dB	2
Radiated emission absorber chamber (> 1000 MHz)	± 5.4 dB	2

Table 3: Measurement uncertainty

Comment: The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. If k=2 the value of the measurements lies within the assigned range of values with a probability of 95 %.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 71 of 73

13 Summary

The EMC Regulations according to the marked specifications are


KEPT

The EUT does fulfill the general approval requirements mentioned.

NOT KEPT

The EUT does not fulfill the general approval requirements mentioned.


Place, Date: Straubing, February 2nd, 2016



Martin Müller

Test engineer

EMV **TESTHAUS** GmbH

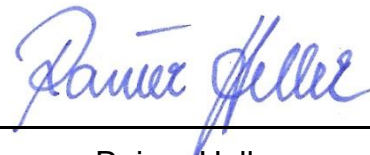

Rainer Heller

Head of EMC / radio department

EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 72 of 73

14 Revision History

<i>Revision</i>	<i>Date</i>	<i>Issued by</i>	<i>Description of modifications</i>
0	2016-02-02	Martin Müller	First edition



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Trimble Kaiserslautern GmbH
Repeater
ST802

150707-AU01+W02

Page 73 of 73