

Prüfbericht - Nr.: 21127623_002 <i>Test Report No.:</i>		Seite 1 von 23 <i>Page 1 of 23</i>	
Auftraggeber: <i>Client:</i>		Trimble Kaiserslautern GmbH D-67661 Kaiserslautern Am Sportplatz 5	
Gegenstand der Prüfung: Intentional Radiator <i>Test item:</i>			
Bezeichnung: <i>Identification:</i>		Serien-Nr.: 06432071 <i>Serial No.:</i>	
GL-422 RC-402			
Wareneingangs-Nr.: <i>Receipt No.:</i>		Eingangsdatum: 2006.10.30 <i>Date of receipt:</i>	
74033			
Prüfort: <i>Testing location:</i>			
TÜV Rheinland Product Safety GmbH, Köln, Germany			
Prüfgrundlage: <i>Test specification:</i>		FCC 47 CFR Ch.1 Part 15 2006-08-14 Emission	
		Section 15.107 (a), limits same as IEC/CISPR 22:1997 (EN 55022:1998) Class B Section 15.109 (a) Class B Section 15.109 (g), i.e. IEC/CISPR 22:1997 (EN 55022:1998) Class B Section 15.209 (Intentional radiator) Section 15.249 (Intentional radiator) Section 15.31 (e) and Section 15.215 (c)	
Prüfergebnis: <i>Test Result:</i>		Der Prüfgegenstand entspricht oben genannten Prüfgrundlagen <i>The test item passed the test specification(s)</i>	
Prüflaboratorium: <i>Testing Laboratory:</i>		TÜV Rheinland Product Safety GmbH, Köln, Germany	
geprüft / tested by:		kontrolliert / reviewed by:	
2007-01-23 O.Schaefer, SV		2007-01-23s K. W. Friedrich, LL	
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>
			Name / Stellung <i>Name / Position</i>
			Unterschrift <i>Signature</i>
Sonstiges / Other Aspects: FCC Registration No. 91096, 2004-07-27			
Anhang / Annex: Messdiagramme / Measurement Diagrams Fotodokumentation / Photo Documentation			
Abkürzungen:		Abbreviations:	
P(ass) = entspricht Prüfgrundlage	F(ail) = entspricht nicht Prüfgrundlage	P(ass) = passed	F(ail) = failed
N/A = nicht anwendbar	N/T = nicht getestet	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>			

Verwendete Messgeräte [used testequipment]

Störaussendung [emission]					Kal. bis
Test / Gerät	Type	Hersteller [manuf.]	Ser. / Inv. – Nr.		[cal. till]
Funkstörspannung und –strom [conducted disturbance]					
Empfänger [Rx] 9kHz-30MHz	FMLK 1518 D	Schwarzbeck	14200382		2007-06
Netznachbildung [AMN]	ESH 3-Z5	Rohde & Schwarz	14200683		2008-04
Schirmkabine [shielded room]	B 83102 S1-X10	Siemens			
Elektrische Funkstörfeldstärke [radiated disturbance]					
EMI Test Receiver	ESCS 30	Rohde & Schwarz	14201360		2007-01
BiConiLog-Ant. 26-3000MHz	3142B	EMCO	14201363		2007-06
EMI Receiver < 26,5GHz	ESMI	Rohde & Schwarz	14200550		2007-01
Horn-Ant 1-10GHz	BBHA 9120B 202	Schwarzbeck	14200694		2006-11
Horn-Ant 1-10GHz	BBHA 9120B 204	Schwarzbeck	14200695		2009-10
Horn-Ant 2-18GHz	BBHA 9120C 376	Schwarzbeck	30401857		2009-07
Horn-Ant 2-18GHz	BBHA 9120C 377	Schwarzbeck	30401858		2008-03
Horn-Ant 15-26,5GHz	BBHA 9170 311	Schwarzbeck	30401855		2009-03
Horn-Ant 15-26,5GHz	BBHA 9170 312	Schwarzbeck	30401856		2009-03
Absorberkabine [shielded room]		ETS	14201372		2007-05
Frequenzablage [frequency error]					
Frequency counter	HP 5351B	Hewlett Packard	14200466		2007-12
Temperature chamber	130RB/40-180 DU	Weis	94310113		2008-01
Horn-Ant 2-18GHz	BBHA 9120C 376	Schwarzbeck	30401857		2009-07
Weitere Messgeräte [other testequipment]					
Digital-Multimeter	Metra Hit 16	ABB	14200346		2008-05
Temperature / Humidity	615	testo	30401660		2007-07

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

All measurement equipment calibrations are traceable to DKD or where calibration is performed outside Germany, to equivalent nationally recognized standards organizations.

The measurement facilities for conducted and for radiated disturbances of TRPS GmbH in Cologne, Am Grauen Stein, has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules. Measurement data will be accepted in conjunction with applications for Certification under Parts 15 and 18 of the Commission's Rules.

Registration-Number: 91096

Date of Listing: 2004-July-27

Messunsicherheit [measurement uncertainty]

Where relevant, following measurement uncertainty levels have been estimated for tests performed on the apparatus.

	Expanded Uncertainty	
	U_{Lab}	U_{CISPR}
Conducted Emission 0,15 to 30 MHz, Power Line	2,70 dB	3,6 dB
Radiated Emission 9kHz to 30MHz, Magnetic Field 3m	4,16 dB	5,2 dB
Radiated Emission 30 to 300MHz, OATS 3m or 10m	5,11 dB	5,2 dB
Radiated Emission 300 to 1000MHz, OATS 3m	4,71 dB	5,2 dB
Radiated Emission 30 to 1000MHz, Semi Anechoic Chamber 3m	4,91 dB	5,2 dB
Radiated Emission 1000 to 2750MHz, Semi Anechoic Chamber 3m	4,89 dB	under consid.

Calculated in accordance with UKAS LAB 34
Uncertainty figures are valid to a confidence level of 95%

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark.

This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

1. **Vereinbarungen** [requirements and agreements]

Auftragsgemäß wurde an dem vorgestellten Prüfling eine EMV-Prüfung durchgeführt. Die Prüfung erfolgte nach den folgenden Grundlagen.

[The tested device got investigated by the following requirements and standards]

Störaussendung [Emission] **FCC 47 CFR Ch.1 Part 15**

Section 15.107 (a) limits same as IEC/CISPR 22:1997 Class B (EN 55022:1998 Kl. B)	Störspannung, AC-Eingang [conducted noise, AC power input]
Section 15.109 (a) Class B	El. Störfeldstärke [radiated el. noise]
Section 15.209	El. Störfeldstärke [radiated el. noise]
Section 15.249	
Section 15.31 (e) and Section 15.215 (c)	Voltage Variation Bandedge Compliance
ANSI C63.4:2003	Test Procedures

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark.

This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

1.1. Übersicht der Prüfergebnisse [Summary of test results]

Elektromagnetische Aussendung [Emission tests]	Ergebnis [result]
Funktörspannung am Netzanschluss [Mains terminal disturbance voltage]	Pass
Funktörspannung, Knackstörungen [Disturbance voltage, clicks]	N/A
Funktörspannung/-strom [conducted cont. disturbance]	N/A
Funktörleistung [Disturbance power]	N/A
Funktörfeldstärke [Radiated disturbance] „Unintentional“	N/A
Funktörfeldstärke [Radiated disturbance] „Intentional“	Pass
Oberschwingungsströme [Harmonic current emissions]	N/A
Spannungsschwankungen [Voltage fluctuations]	N/A

Elektromagnetische Beeinflussbarkeit [Immunity tests]	Ergebnis [result]
Leitungsgeführte Störgrößen, induziert durch HF-Felder [Conducted disturbances, induced by radio frequency fields]	N/A
Hochfrequente elektromagnetische Felder [Radiated, radio-frequency electromagnetic fields]	N/A
Schnelle transiente elektrische Störgrößen/Burst [Electrical fast transient/burst]	N/A
Spannungseinbrüche, Kurzzeitunterbrechungen und Spannungsschwankungen [Voltage dips, short interruptions and voltage variations]	N/A
Stoßspannungen [Surge]	N/A
Entladung statischer Elektrizität [Electrostatic discharge]	N/A
Magnetfelder mit energietechn. Freq. [Power frequent magnetic fields]	N/A

Abkürzungen [abbreviations]:

Pass	Anforderungen erfüllt	[requirements fulfilled or test passed]
Fail	Anforderungen nicht erfüllt	[requirements not fulfilled or test failed]
N/A	Nicht anwendbar/gefordert	[not applicable/requested]
A/nT	Anwendbar, nicht getestet	[applicable, not tested]

Begründung für anwendbare, jedoch nicht durchgeführte Prüfungen

[Reason for applicable but not executed tests]

Nr. [No.]	Begründung [Reason]
---	---

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark.

This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

1.2. Einteilung des Prüflings [classification of EUT]

Der Prüfling wird klassifiziert in Kategorie
[The EUT is classified into category]

FCC 47CFR Part 15 Subpart C Section 15.201
Intentional Radiator

Certification

2. Informationen zum Prüfling [information about EUT]

Geräteart [kind of device]: Siehe Seite 1 dieses Berichtes [refer to page 1 of this report]
Type: Siehe Seite 1 dieses Berichtes [refer to page 1 of this report]
Ser. Nr.: Siehe Seite 1 dieses Berichtes [refer to page 1 of this report]

Gerätevarianten [EUT variants]: Keine [none]

Andere Bezeichnung
[brandname]: NN

Nennspannung [rated voltage]: AC 120 V
Netzfrequenz [frequency]: 60 Hz
Nennstrom [rated current]: 700 mA
Nennleistung [rated power]: Keine spezif. Daten vorhanden [no specific data available]
Schutzklasse [protection class]: I

Konstruktion/Aufbau:
[constructional details] Siehe Foto- bzw. System-Dokumentation
[refer to photo and system documentation]
Abmessungen [dimensions]

Schnittstellen [interfaces, ports]
Eingang [input]: AC_In

Intern [internal]: ---

Ausgang [output]: ---

Ein/Ausgang [bidir. I/O] ---

EMV relevante Daten
[EMC relevant data] Weitere Daten siehe System-Dokumentation in Anhang 3
[for further information refer to appendix 3]
Systemfreq. [system freq.]: 2,402 GHz

Filter [filter]: ---

Erdung [grounding]: ---

Schirmung [shielding]: Keine [None]

Besondere EMV-Massnahmen
[special EMC measures]: ---

Sonstiges [other aspects]: The Power Supply is only for charging the basestation.
The EUT's are powered by battery.

Betriebsart während der
Prüfungen [EUT mode]: 1 Standby
2 System in Funktion und interaktive Funktionstests
[system operating and interactively functional tests]

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark.

This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

3. Prüfaufbau [EUT configuration]

Der Prüfaufbau erfolgte entsprechend den Angaben der genannten EMV-Normen.

Die Messungen und Tests wurden unter "worst case"-Bedingungen durchgeführt, d.h., es wurden typische Anordnungen und Betriebszustände gewählt bzw. angenommen und für maximale Störaussendung optimiert (sogenannte "Ungünstigste Konfiguration").

Die maximalen Störaussendungswerte wurden dokumentiert.

Einzelheiten sind (auch) der Fotodokumentation zu entnehmen, in der die Konfigurationen maximaler Störaussendung dargestellt sind.

Soweit nicht anders angegeben, gelten diese Angaben für alle nachfolgenden Messungen.

[The test setup was made in accordance with mentioned EMC standards.

Measurements and tests were executed under "worst case" conditions. Typical EUT arrangements or operating modes were chosen or assumed and for maximum emission optimized (a so called "unfavourable configuration").

Maximum emissions are reported.

Details of test setup or adjustments are (also) shown inside the photo documentation, in which configurations of maximum emission are displayed.

As far as not mentioned otherwise these statements are valid for all following tests.]

Testkonfiguration [tested configuration]

Prüfling EUT: GL-422

[Equipment Under Test EUT] RC-402

Verwendete Zusatzgeräte AE: ---
[Auxiliary Equipment AE]

Versorgung [supply]: Wie in Kap. 2 [same as in chapter 2]

Testsoftware [testsoftware]: ---

Überwachung während Prüfung: ---
[supervision during test]

Abkürzungen [abbreviations]	N/A	Nicht anwendbar [not applicable]
	NN	Nicht bekannt [not named]
	NC	Nicht bestückt [not connected]

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark.

This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4. Prüfungen [EMC tests]

4.1. Funkstörspannung an Netzanschlüssen 0,15 – 30 MHz [conducted cont. disturbance at mains terminals]

Prüfgrundlage [test bases]: FCC Part 15 Class B Section 15.107 (a)
IEC/CISPR 22 Class B
EN 55022 Klasse B

Grenzwerte [limits]		Quasi-Peak QP	Mittelwert Av
FCC Part 15.107 (a) Class B	0,15 - 0,5 MHz	66 - 56 dB μ V	56 - 46 dB μ V
FCC Part 15.207	0,5 - 5 MHz	56 dB μ V	46 dB μ V
IEC/CISPR 22 Class B	5 - 30 MHz	60 dB μ V	50 dB μ V
EN 55022 Klasse B			

Detektor [detector]	QP, 9 kHz	Av, 9kHz
---------------------	-----------	----------

Messung auf [tested port]: AC_In

Länge der Versorg.-leitung [length]: ca. 2m

Betriebsart [EUT mode]: siehe Kap. 2 [refer to chapter 2]

Prüfaufbau [test setup]: siehe Kap. 3 [refer to chapter 3]

Messergebnis [test data]: siehe Anhang 1 [refer to appendix 1]

Anmerkungen [comments]: ---

Prüfergebnis [test result]:
X Anforderungen erfüllt [Req. fulfilled, Passed]
 --- Anforderungen nicht erfüllt [Req. not fulfilled, Failed]
 --- Nicht anwendbar/gefordert [Not Applicable/Requested]
 --- Nicht getestet [Not tested]

Datum [date]: siehe Messwertediagramme [refer to test result diagrams]

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4:2003. The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak. Line conducted data is recorded for both NEUTRAL and HOT lines. A 50 μ H/50 ohms line impedance stabilization network (LISN) was used.

4.2. EI. Funkstörfeldstärke, [radiated disturbance, intentional radiator]

Prüfgrundlage [test bases]: FCC Part 15.209
FCC Part 15.249

Grenzwerte [limits]		L2	L3
FCC Part 15.209	0.009 – 0.490 MHz		2400/F(kHz) 300m !
	0.490 – 1.705 MHz		2400/F(kHz)
	1.705 - 30 MHz	70 dBµV/m	30 dBµV/m
Detektor [detector] Messentfernung [distance]:		QP, 120 kHz d2 = 3 m	QP, 120 kHz d3 = 30 m
Entf.-Formel [distance formula] by FCC Part 15.31 (f) (2)	L2 = L3 + 40 dB/dec.		

Grenzwerte [limits]		L2	L1
FCC Part 15.209	30 - 88 MHz	40 dBµV/m	29,5 dBµV/m
	88 – 216 MHz	43,5 dBµV/m	33 dBµV/m
	216 – 960 MHz	46 dBµV/m	35,5 dBµV/m
	> 960 MHz	54 dBµV/m	43,5 dBµV/m
Detektor [detector]	< 1000 MHz	QP, 120 kHz	
	> 1000 MHz	Av, 1 MHz	
Messentfernung [distance]:		d2 = 3 m	d1 = 10 m
Entf.-Formel [distance formula] by FCC Part 15.31 (f) (1) by EN 55022 10.6	$L2 = L1 + 20 \text{ dB/dec.}$ $L2 = L1 * (d1/d2) = L1 + 20 * \lg d1/d2 = L1 + 10,46 \text{ dB}$		

Grenzwerte [limits]			
FCC Part 15.249 (b) (1)	902 – 928 MHz	N/A	
	2400 - 2483,5 MHz	50 mV/m	
	5725 – 5875 MHz	N/A	
	outside these bands	Limits as	FCC Part 15.209
Detektor [detector] Messentfernung [distance]:		Pk d2 = 3 m	

Obere Messfrequenz [upper freq. of measurement] FCC Part 15 Section 15.33 (a)	from 30 MHz To 25 GHz
---	--------------------------

Messort [location]: Absorberkammer [semi anechoic chamber]

Prüftisch [turn table]
Dimension 1,5m, Höhe [height] 0,8m
Material Holz, nichtleitend [wood, non-conductive]
Messentfernung [distance]: 3 m

Messmethode [method] According ANSI C63.4:2003

Betriebsart [EUT mode]: siehe Kap. 2 und Anhang 1
[refer to chapter 2 and appendix 1]
Prüfaufbau [test setup]: siehe Kap. 3 [refer to chapter 3]
Messergebnis [test data]: siehe Anhang 1 [refer to appendix 1]
Freq. = 2,402016 GHz
4.79 mV/m (Limit is 50 mV/m)
Messunsicherheit [measurement uncertainty]: Erweiterte Messunsicherheit [expanded uncertainty] = 4,89 dB
Anmerkungen [comments]: The transmitter was modulated.

Prüfergebnis [test result]:
X Anforderungen erfüllt [Req. fulfilled, Passed]
--- Anforderungen nicht erfüllt [Req. not fulfilled, Failed]
--- Nicht anwendbar/gefordert [Not Applicable/Requested]
--- Nicht getestet [Not tested]

Field Strength Calculations: The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured level. The basic equation with a sample calculation is as follows:

Where: Field Strength = Measured Level + Antenna Factor + Cable Attenuation Factor – Amplifier Gain

Example: FS = 30,0 + 7,4 + 1,1 - 0 = 38,5dBuV/m

Level in uV/m = Common Antilogarithm [(38,5dBuV/m)/20] = 84,1uV/m

Datum [date]: 2007-01-12

Frequency / GHz	Peak	Average
2.4044	4.79 mV	4.79 mV
4.8155	281.18 µV	281.18 µV
9.6133	46.4 µV	46.4 µV

X, Y and Z positions were tested and “X” position was found to be worst case.

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4:2003.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. The Analyser was set to max. hold. All test was performed with Peak and Average detector. All values are the same. The Res.Bw and Vid.Bw for the above table is 1 MHz. The report shows the mas. value we found from both EUT’s.

After switch on GL-402 or RC-402 they try to connect each other. The transmitter switch on approximately all 250 msec. This will be done until you switch off the EUT. In this case we have a nearly continue transmission.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark.

This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

Remote Control

Frequency error or frequency drift					
Measurement uncertainty: $\pm 1 \times 10^{-7}$ Limit: ± 60 ppm					
Tx Freq. (GHz)	Temp. (°C)	Voltage (V)	Error (kHz)	Verdict	Remark
2,402016	23	3	0	Pass	---
	-20	3	0,661	Pass	
		3	1,110	Pass	
50					

Base

Frequency error or frequency drift					
Measurement uncertainty: $\pm 1 \times 10^{-7}$ Limit: ± 60 ppm					
Tx Freq. (GHz)	Temp. (°C)	Voltage (V)	Error (kHz)	Verdict	Remark
2,402016	23	4,6	0	Pass	---
	-20	4,6	0,673	Pass	
		4,6	0,992	Pass	
50					

(2) The frequency tolerance of the carrier signal shall be maintained within + 0.001% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. **For battery operated equipment, the equipment tests shall be performed using a new battery.**


Bandedge	
Measurement uncertainty: $\pm 1 \times 10^{-7}$ Limit: ± 60 ppm	
Low frequency at 20 db bandwidth (GHz)	High frequency at 20 db bandwidth (GHz)
2,40183	2,40222

Anhang 1 [Appendix 1]

Messdiagramme [Test Data]

Funkstörspannung an Netzanschlüssen 0,15 – 30 MHz


[conducted cont. disturbance at mains terminals]

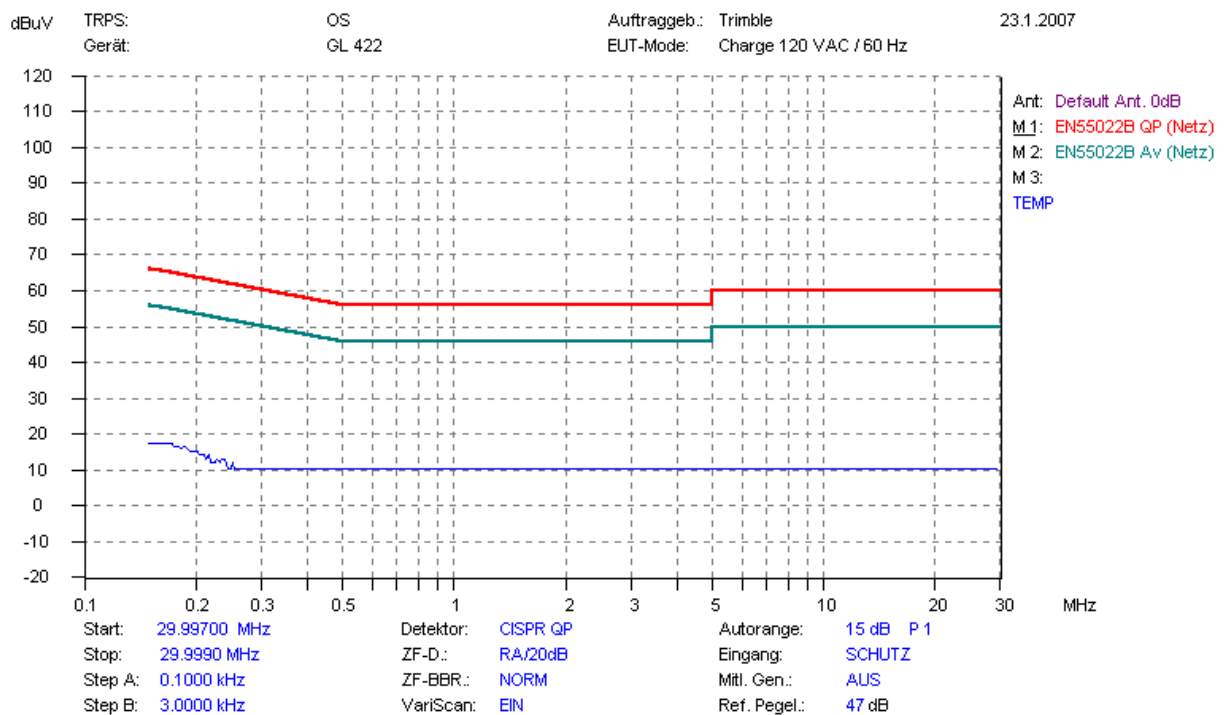

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark.
This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

Funkstörspannung an Netzanschlüssen 0,15 – 30 MHz


[conducted cont. disturbance at mains terminals]

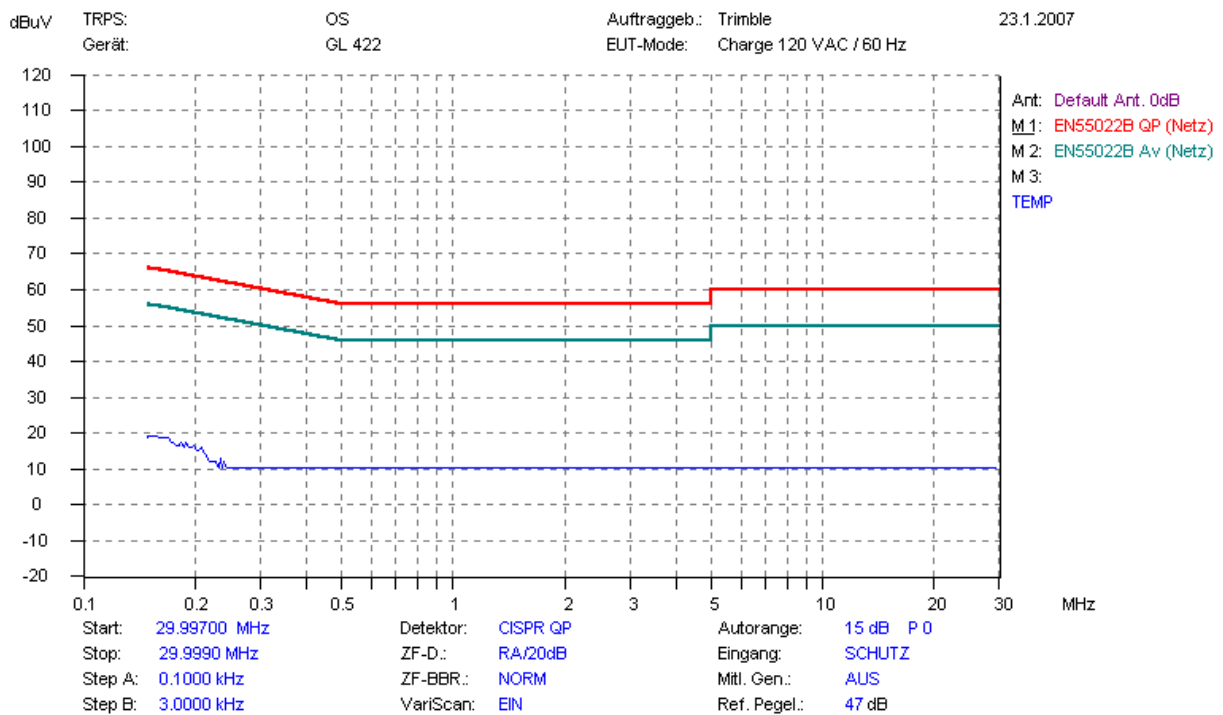

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

El. Funkstörfeldstärke,
[radiated disturbance, intentional radiator]


Including Antenna factor and cable lost

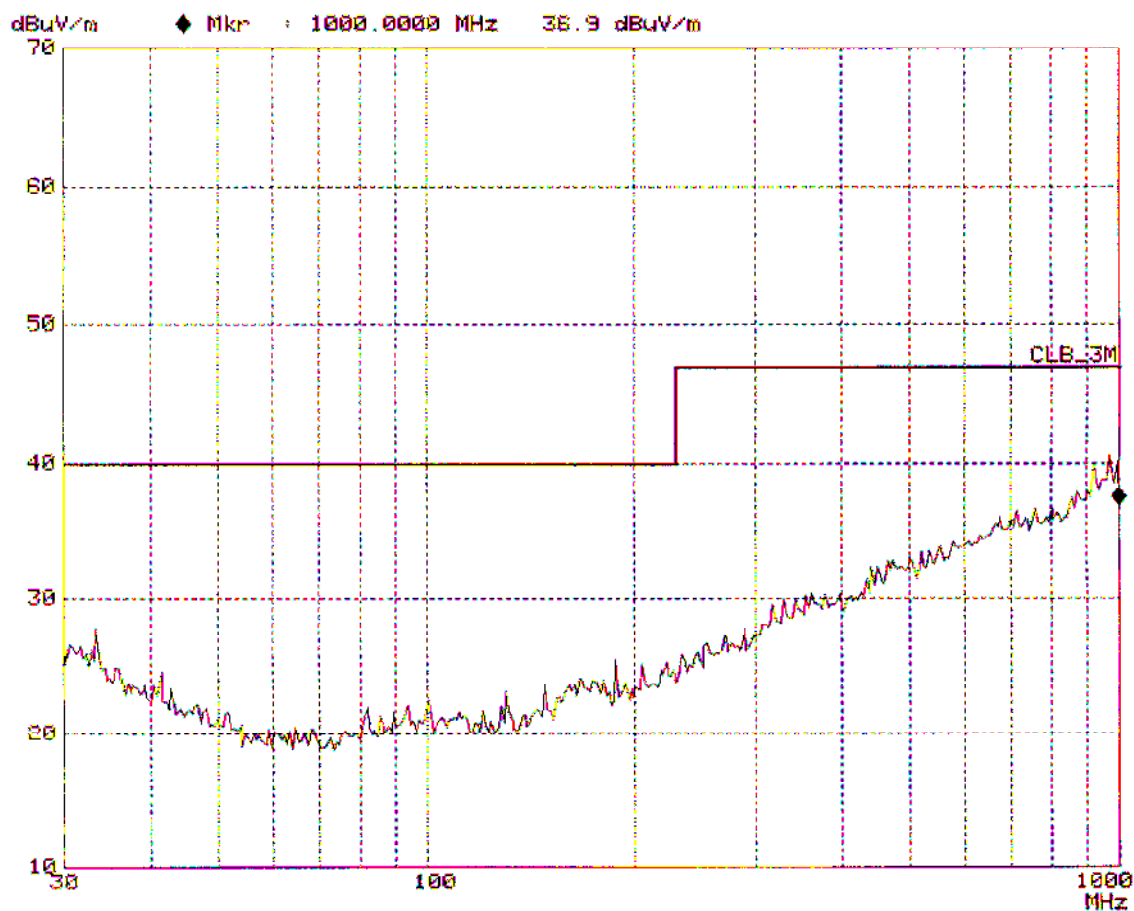

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.



El. Funkstörfeldstärke, [radiated disturbance, intentional radiator]

overview

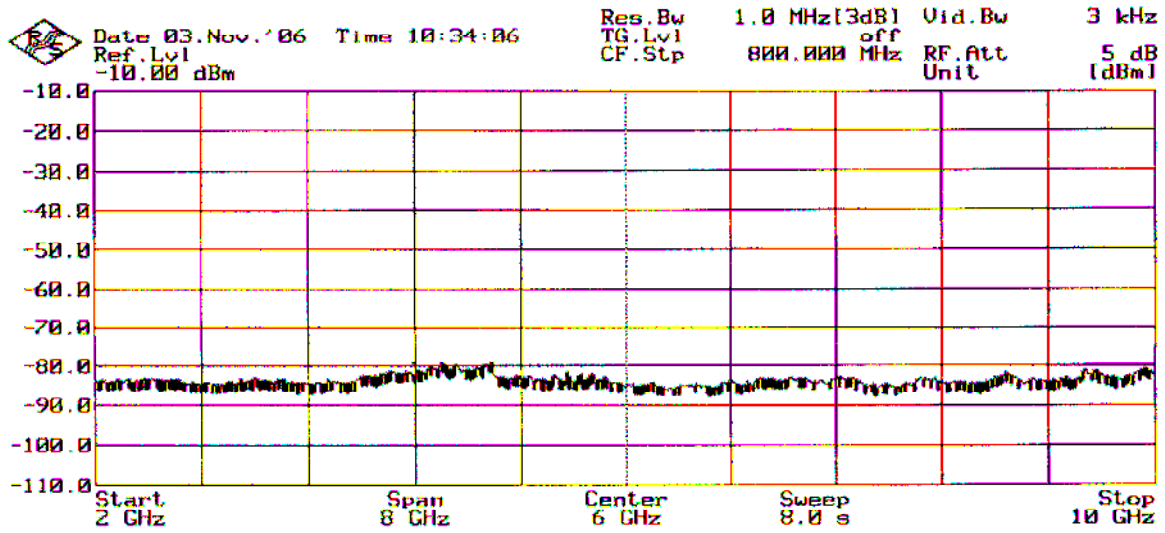



The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark.
This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

Including Antenna factor and cable lost

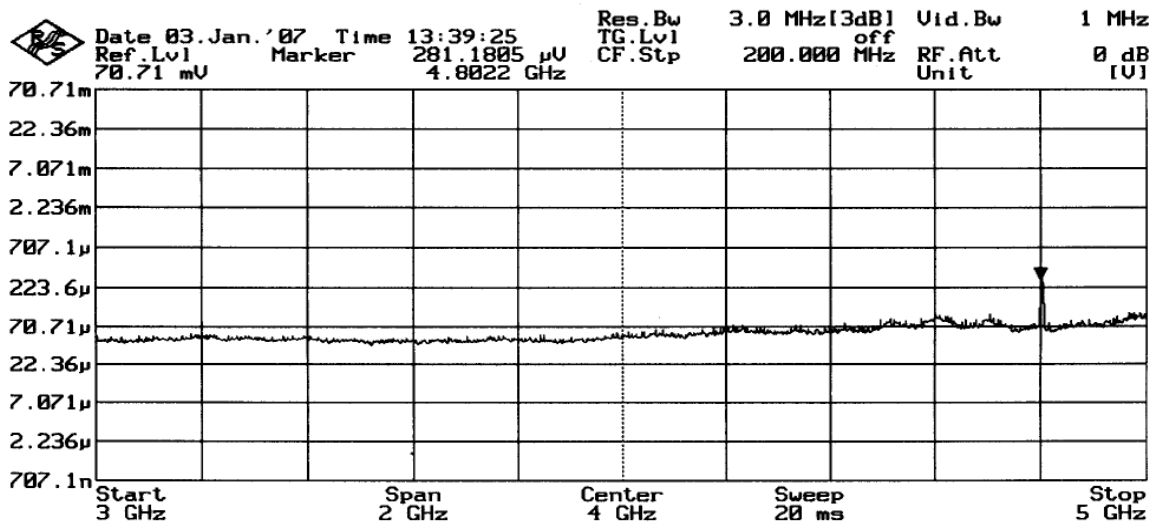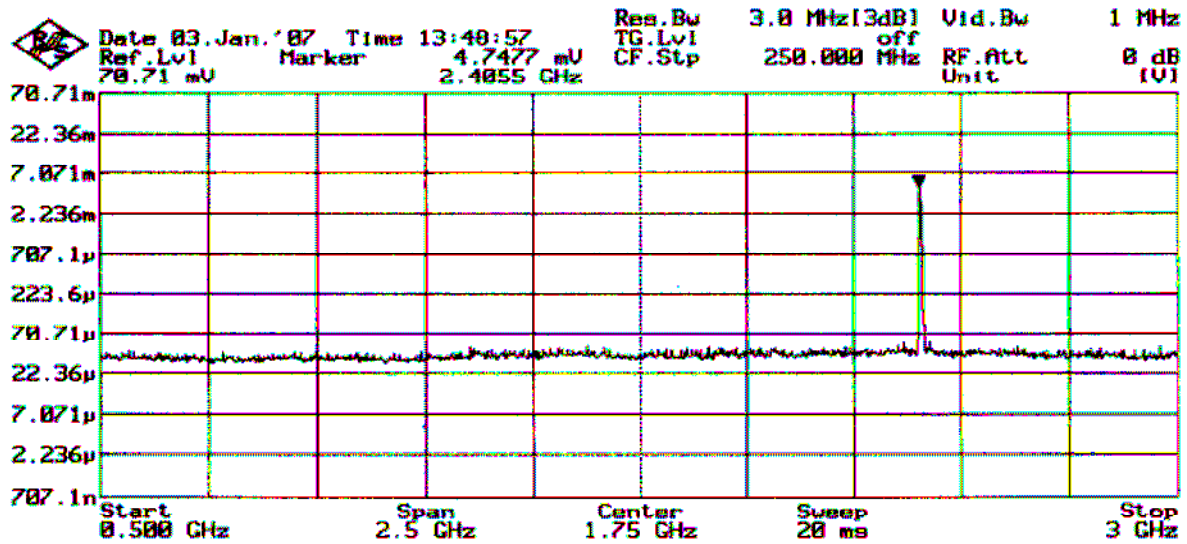

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.



Including Antenna factor and cable lost

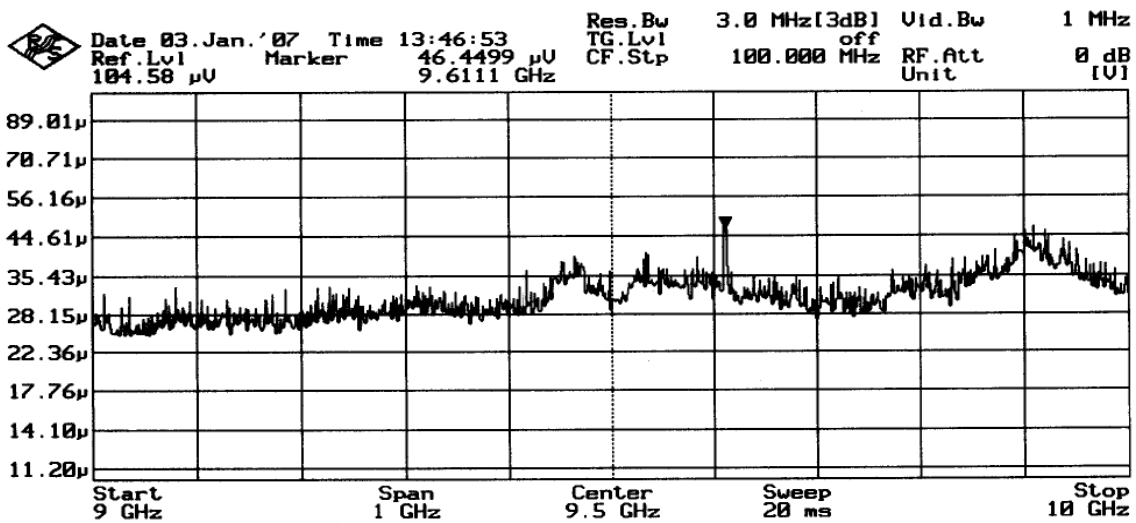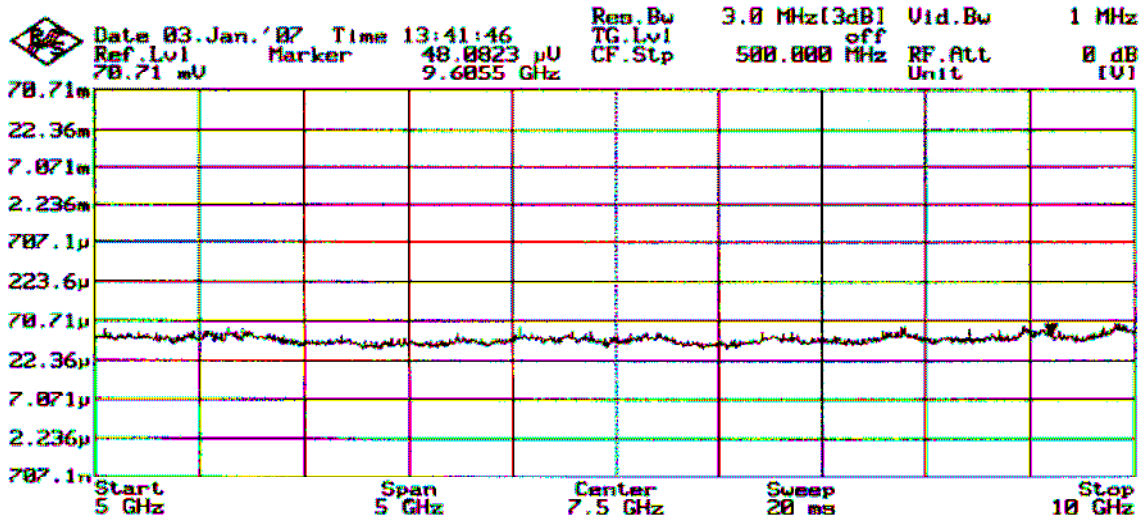

Up to 25 GHz there was no more harmonics found.



The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

Including Antenna factor and cable lost

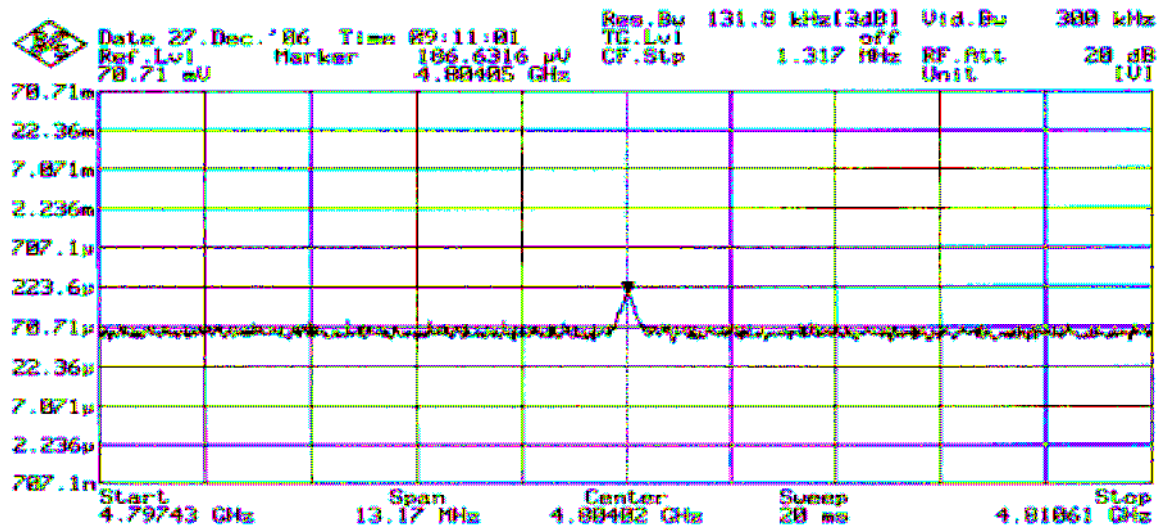
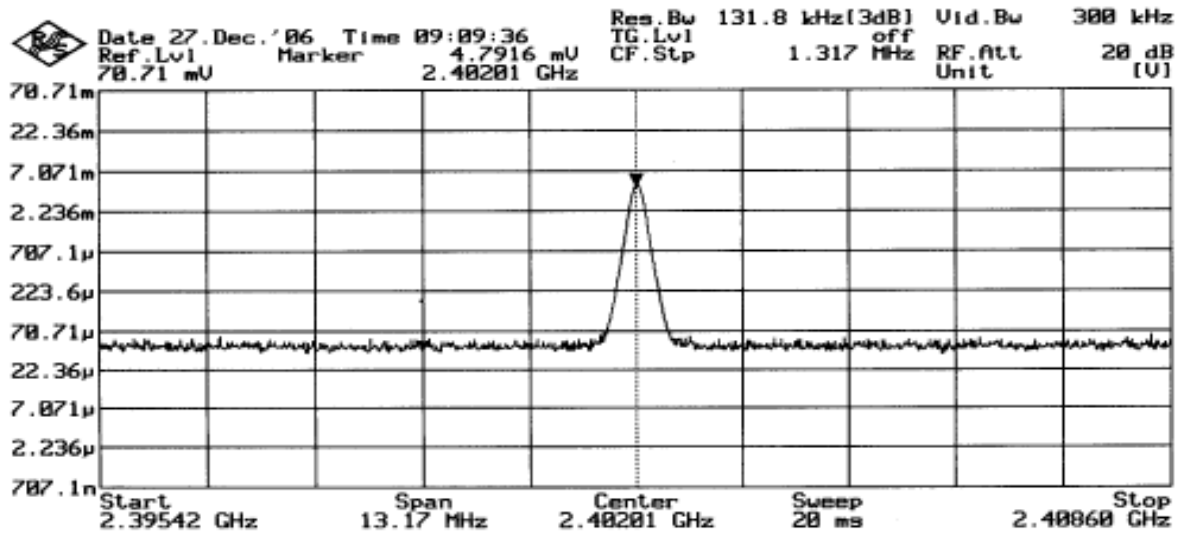


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

Including Antenna factor and cable lost

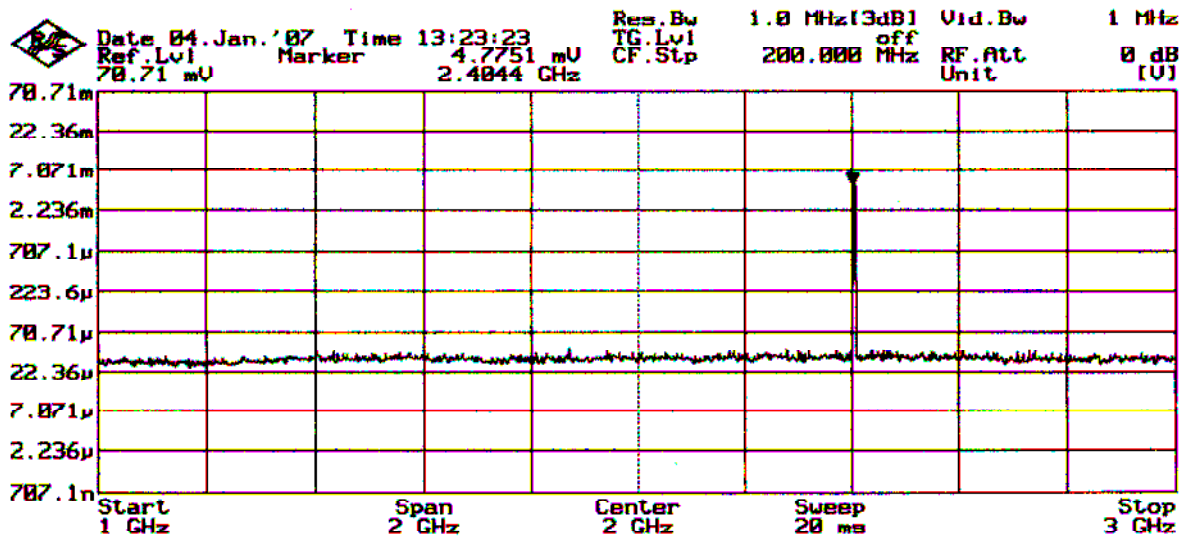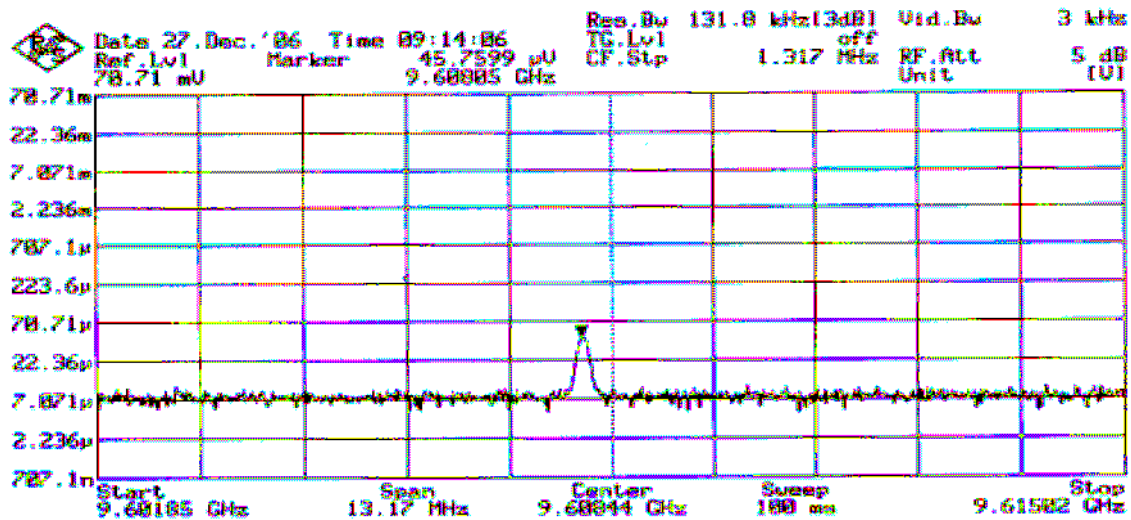

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

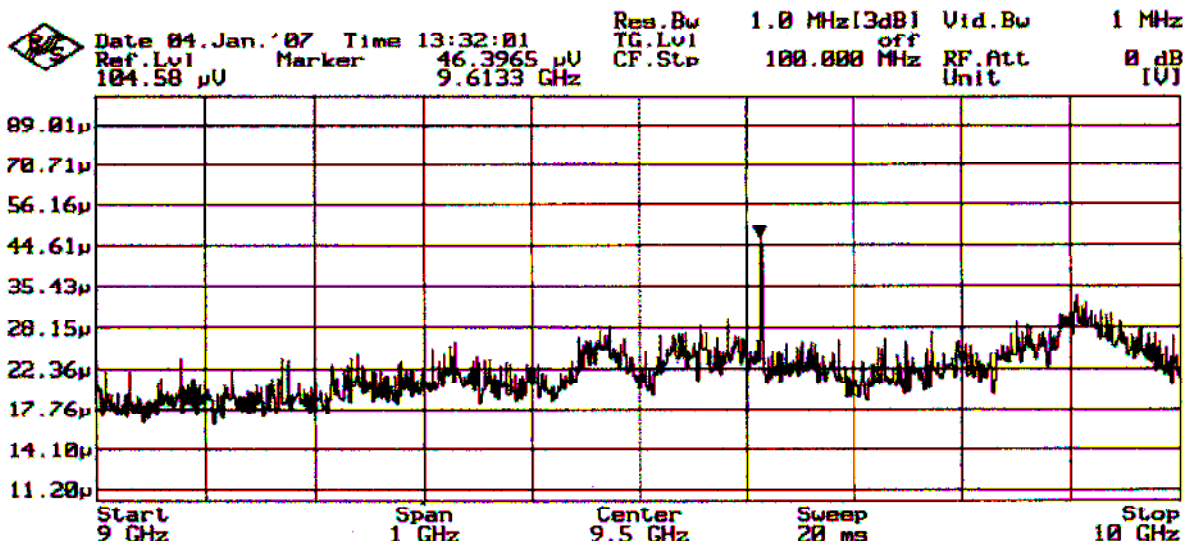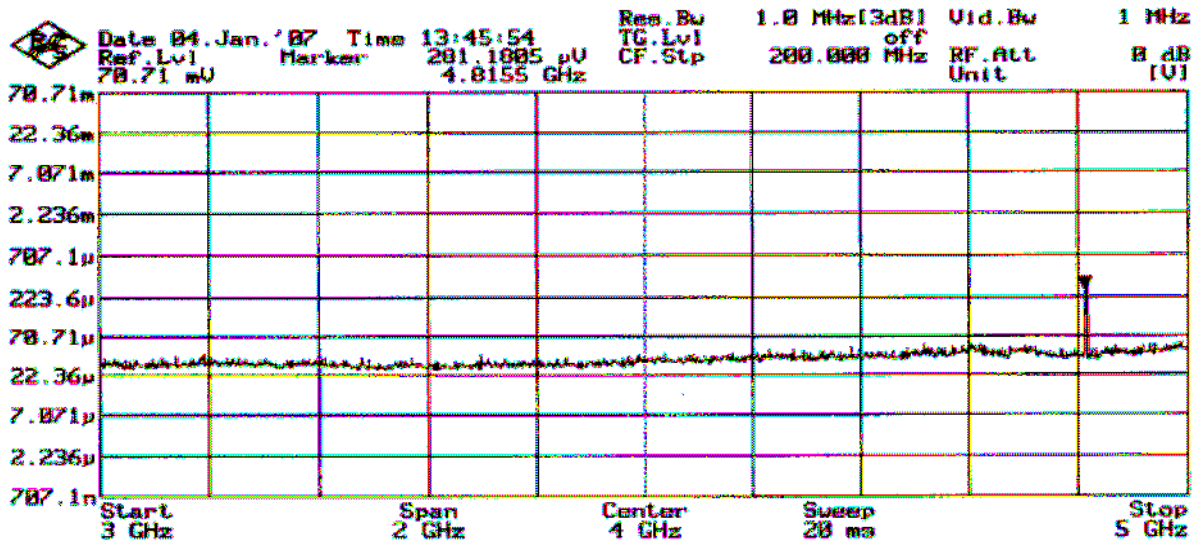

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This testreport may not be published or duplicated in part without permission of the testing body. This testreport by itself does not constitute authorization for the use of any test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

Ende des Prüfberichtes / *End of Testreport*