



Test Report

Test Report No.:	KTI01E-F1039		
Registration No.:	99058		
Applicant:	Finedigital Inc.		
Applicant Address:	4 th FL., BomiBldg. 661, Deung Chon Dong, KangSeoGu, Seoul, Korea 157-033		
Product:	PDA		
FCC ID:	PWSE-SCRIPTOR	Model No.	E-scriptor
Receipt No.:	KTI20010928	Date of receipt:	Sep, 28, 2001
Date of Issue:	Oct, 4, 2001		
Testing location	Korea Technology Institute Co., Ltd. 51-19, Sanglim3-Ri, Docheok-Myeun, Gwangju-Shi, Gyeongki-Do, Korea		
Test Standards:	ANSI. C63.4 : 1992		
Rule Parts:	FCC Part 15, Subpart B		
Equipment Class:	Class B		
Test Result:	The above mentioned product has been tested and passed.		
Prepare by: J. H. Lee		Tested by: S. B. Kim/ Engineer	
Approved by: G. C. Min/ President			
Signature	Date	Signature	Date
Signature	Date	Signature	Date
Other Aspects :			
Abbreviations :	OK, Pass=passed Fail=failed N/A=not applicable		

- ♣ This test report is not permitted to copy partly without our permission.
- ♣ This test result is dependent on only equipment to be used.
- ♣ This test result is based on a single evaluation of one sample of the above mentioned.
- ♣ This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.
- ♣ We certify this test report has been based on the measurement standards that is traceable to the national or international standards.



Contents

	Contents	2
	List of Tables	2
	List of Figures	2
	List of Photographs	3
1.	General	3
2.	Test Site	3
	2.1 Location	4
	2.2 List of Test and Measurement Instruments	4
	2.3 Test Data	4
	2.4 Test Environment	5
3.	Description of the tested samples	5
	3.1 Rating and Physical characteristics	5
	3.2 Submitted documents	6
4.	Measurement conditions	6
	4.1 Modes of operation	6
	4.2 Additional equipments	6
	4.3 Uncertainty	6
	4.4 Test Setup	7
5.	Emission Test	8
	5.1 Conducted Emissions	11
	5.2 Radiated Emissions	12
6.	Photographs of the Test Set-up	14
Annex1	Label	15
Annex2	Photographs of EUT	16~19

List of Tables

Table 1	List of test and measurement equipment	4
Table 2	Test Data. Conducted Emissions	11
Table 3	Test Data. Radiated Emissions	13

List of Figures

Figure 1	Spectral Diagram, LINE-PE	9
Figure 2	Spectral Diagram, Neutral-PE	10

List of Photographs

Photograph 1	Setup for Conducted Emissions	16
Photograph 2	Setup for Radiated Emissions	17



1. General

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. All measurements reported herein were performed by Korea Technology Institute Co., LTD. And were made under Chief Engineer's supervision. We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. Test Site

Korea Technology Institute Co., LTD

2.1 Location

51-19, Sanglim3-Ri, Docheok-Myeun, Gwangju-Shi, Gyeongki-Do, Korea

The Test Site is in compliance with ANSI C63.4/1992 for measurement of radio Interference.



2.2 List of Test and Measurement Instruments

Table 1 : List of Test and Measurement Equipment

• Conducted Emissions

Kind of Equipment
Type
S/N

Calibrated until

Spectrum Analyzer
R3261C
61720427
11.2001

Field Strength Meter
ESPC
832827/011
11.2001

LISN
ESH3-Z5
8254601019
5.2002

LISN
KNW407
8-1097-7
11.2001

Pulse limiter
ESH3Z2
357.8810.52
11.2001

Conducted Cable
N/A
N/A
11.2001

• Radiated Emissions

Kind of Equipment
Type
S/N

Calibrated until

Field Strength Meter
ESPC
832827/011
11.2001

Spectrum Analyzer
R3261C
61720427
11.2001

Pre Amplifier
8447D
2944A06874
11.2001



3. Description of the tested samples

The EUT is PDA.

3.1 Rating and Physical Characteristics

Specifications

Size

65(H) x 95(W) x 18(D) mm

Weight

115g (4.1 oz.) with 2 batteries

Battery

2 x AAA(DC 3V) batteries

0.22F back-up condenser

Data Cable

109 mm (4.29 in)

Battery Life

About 15 hours at continuous display

About 4 1/2 hours at continuous communication

Operating Temperature

0 ~ 40°C

Display

Mode

Mono FSTN LCD, 4 gray scale Display

Dimension

240 x 160 dots

Number of Characters

20 columns X 13 lines

Input

Input Methods

Touch Panel, Software Keyboard

Alphabetic /Numeric keyboard and etc

Input Letters

Facemarks/Common Phrases



4. Measurement Conditions

Testing Input Voltage: DC3V.

4.1 Modes of Operation

The EUT was in the following operation mode during all testing;

4.2 Additional Equipment

DEVICE TYPE
Manufacturer
M/N
S/N
FCC ID

Cellular Phone
Sewon Telecom
IM-2000
006467
-

4.3 Uncertainty

1) Radiated disturbance

UC (Combined standard Uncertainty) = $\pm 1.8\text{dB}$

Expanded uncertainty $U=Kuc$

$K = 2$

$4 U = \pm 3.6\text{dB}$


2) Conducted disturbance

UC = $\pm 0.88\text{dB}$

$U = Kuc=2xUc = \pm 1.8\text{dB}$



4.4 Test setup

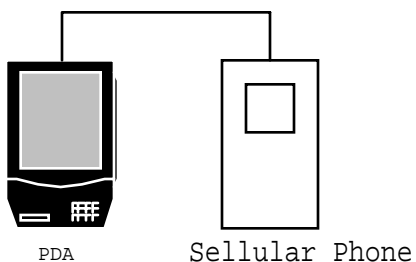



5. EMISSION Test

5.1 Conducted Emissions

Result : **Not Applicable**

The line-conducted facility is located inside a 2.3M x 3.5M x 5.5M shielded closure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 605-05.

A 1m x 1.5m wooden table 80cm. High is placed 80cm away from the vertical wall and 1.5m away from the side wall of the shielded room. R&S Model ESH3-Z5(10kHz-30MHz)

50ohm/50 uH line-Impedance Stabilization Networks(LISN) are bonded to the shielded room.

The EUT is powered from the R&S LISN and the support equipment is powered from the Kyoritsu LISN.

Power to the LISN are filtered by a high-current high-insertion loss shield enclosures power line filters(100dB 14kHz-1Ghz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2".

If the EUT is a DC-Powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the Kyoritsu LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, Support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 450kHz to 30MHz with 100sec. sweep time.

The frequency producing the maximum level was reexamined using EMI field Intensity meter (ESPC). The detector function was set to CISPR Q.P. mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.



Figure 1 : Spectral Diagram, LINE – PE



Figure 2 : Spectral Diagram, NEUTRAL – PE



Table 2 : Test Data, Conducted Emissions

Frequency (MHz)	(1)Reading (dB V) Line	(2)Limit (dB V)	(3)Margin (dB)
--------------------	------------------------------	--------------------	-------------------

NOTES:

1. All modes of operation were investigated
And the worst-case emission are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. Line H = LINE-PE, Line N = NEUTRAL-PE
6. C/F = Correction Factor
7. C/L = Cable Loss
8. The limit for Class B digital device is 250 uV (48dBuV)



5.2 Radiated Emissions

Result: **Pass**

Preliminary measurements were made indoors at 3 meter using B.C & L.P antennas, broadband Amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and Investigated. The system configurations, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 300 MHz using biconical antenna and from 300 to 1000 MHz using log-periodic antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using EMCO antennas. The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with Polyethylene film. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter (ESPC) R & S. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1 MHz depending on the frequency or type or signal.

The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8meter high non-metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test. Each EME reported was calibrated using self-calibrating mode.



Table 3 : Test Data, Radiated Emissions

Frequency (MHz)
Pol.
Height [m]
Angle [°]
(1)
Reading (dB V)
(2)
AFCL (dB/m)
(3)
Actual (dB V/m)
(4)
Limit (dB V/m)
(5)
Margin (dB)
36.65
H
3.27
135
4.5
18.29
22.79
40
17.21
53.45
H
3.95
138
3.8
11.60
15.40
24.6
63.3
H
3.64
195
3.6
9.17
12.77
27.23
73.15
H
2.64
264
4.2
8.50
12.70

