


White label with black lettering

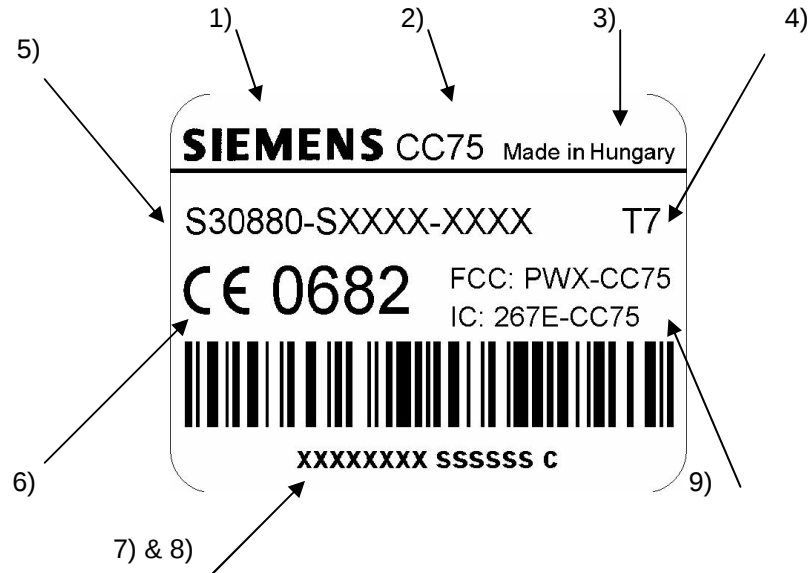

- | | | |
|----|----------|---|
| 8) | XXXXXXXX | Typ-Approval Code TAC |
| 8) | SSSSSS | Current serial number (6 digits),
Assigned by PICS |
| 8) | C | CHECK DIGIT 15. digit
space between TAC, serial no. and 15.digit |

Ink ribbon:

TTR-Band Ricoh 110-C

Font:

Title blocks concentric

- 1) Corporate logo:
- 2) Product name:
- 3) Made in Hungary
- 4) Code of date:

1.5 SN 66324
Internal font D, size 4
Internal font B, size 3 / Depending on production location
Internal font D, size 4
e.g. F3 — March
 └─1995

5) Code number:

Internal font D, size 4
Corresponding to the number of the transceiver unit part list

- 6) CE- identification:
- 7) Barcode IMEI-No.:

Height: 5 mm
Code: 128 Size: 2 Ratio: 3.0 Height: 3 mm
Typ 128, table **C** and **B**

Characteristic:

IMEI-No. has 15 digits
Digit 1-14 is generated as Barcode with table **C**.
Digit 15 is printed with table **B**.

- 8) IMEI-No. (plain writing):
- 9) FCC and IC identification:

Internal font D, size 4, space between TAC, serial no. and 15.digit
Internal font D, size 2

PWB protection foil

