



# FCC Test Report

## FCC Part 22 & 24 / RSS 132 & 133

**FOR:**

**Dual-band GSM Mobile Phone**

**MODEL #: A31a**

**BENQ MOBILE  
HAIDENAUPLATZ 1  
81667 MUNCHEN  
GERMANY**

**FCC ID: PWX-A31a  
IC ID: 6175C-A31a**

**TEST REPORT #: EMC\_BENQ0-004-05001\_FCC22\_24  
DATE: March 8<sup>th</sup>, 2006**



*TTI-P-G 081/94-A0*

Accredited according to **ISO/IEC 17025**



**FCC listed # 101450  
IC recognized # 3925**

**CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

## **Table of Contents**

<b>1</b>	<b>ASSESSMENT .....</b>	<b>4</b>
<b>2</b>	<b>ADMINISTRATIVE DATA.....</b>	<b>5</b>
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT .....	5
2.2	IDENTIFICATION OF THE CLIENT .....	5
2.3	IDENTIFICATION OF THE MANUFACTURER.....	5
<b>3</b>	<b>EQUIPMENT UNDER TEST (EUT).....</b>	<b>6</b>
3.1	IDENTIFICATION OF THE EQUIPMENT UNDER TEST .....	6
<b>4</b>	<b>SUBJECT OF INVESTIGATION.....</b>	<b>7</b>
<b>5</b>	<b>MEASUREMENTS.....</b>	<b>8</b>
5.1	RF POWER OUTPUT .....	8
5.1.1	<i>FCC 2.1046 Measurements required: RF power output.....</i>	8
5.1.2	<i>Limits: .....</i>	8
5.1.2.1	FCC 22.913 (a) Effective radiated power limits. ....	8
5.1.2.2	FCC 24.232 (b)(c) Power limits.....	8
5.1.3	<i>Radiated Output Power Measurement procedure:.....</i>	8
5.1.4	<i>ERP Results 800 MHz band: .....</i>	10
5.1.5	<i>EIRP Results 1900 MHz band:.....</i>	10
5.2	OCCUPIED BANDWIDTH/EMISSION BANDWIDTH .....	17
5.2.1	<i>FCC 2.1049 Measurements required: Occupied bandwidth.....</i>	17
5.2.2	<i>Occupied / emission bandwidth measurement procedure:.....</i>	17
5.2.3	<i>Occupied / Emission bandwidth results 800 MHz band: .....</i>	18
5.2.4	<i>Occupied / Emission bandwidth results 1900 MHz band: .....</i>	18
5.2.5	<i>Frequency Stability .....</i>	31
5.2.6	<i>Limit .....</i>	31
5.2.7	<i>FREQUENCY STABILITY .....</i>	32
5.3	SPURIOUS EMISSIONS CONDUCTED.....	33
5.3.1	<i>FCC 2.1051 Measurements required: Spurious emissions at antenna terminals. ....</i>	33
5.3.2	<i>Limits: .....</i>	33
5.3.2.1	FCC 22.917 Emission limitations for cellular equipment.....	33
5.3.2.2	FCC 24.238 Emission limitations for Broadband PCS equipment.....	33
5.3.3	<i>Conducted out of band emissions measurement procedure:.....</i>	34
5.3.4	<i>Bandedge Results GSM 850 .....</i>	35
5.3.5	<i>Conducted Spurious Results GSM 850.....</i>	37
5.3.6	<i>Bandedge Results PCS-1900.....</i>	41
5.3.7	<i>Conducted Spurious Results PCS-1900 .....</i>	43
5.4	SPURIOUS EMISSIONS RADIATED .....	47
5.4.1	<i>FCC 2.1053 Measurements required: Field strength of spurious radiation.....</i>	47
5.4.2	<i>Limits: .....</i>	47
5.4.2.1	FCC 22.917 Emission limitations for cellular equipment.....	47
	FCC 24.238 Emission limitations for Broadband PCS equipment.....	47
5.4.3	<i>Radiated out of band measurement procedure: .....</i>	49
5.5	RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 & 133 .....	77
5.5.1	<i>Receiver Spurious on EUT.....</i>	78
5.6	AC POWERLINE CONDUCTED EMISSIONS § 15.107/207.....	82
5.6.1	<i>Results EUT.....</i>	83



6    **TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS ..... 85**

7    **REFERENCES ..... 86**

8    **BLOCK DIAGRAMS ..... 87**

## 1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 2, and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS132 and RSS133.

Company	Description	Model #
BENQ MOBILE	DUAL BAND GSM MOBILE PHONE	A31a



---

Michael Grings  
Deputy Test Lab Manager

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

## **2 Administrative Data**

### **2.1 Identification of the Testing Laboratory Issuing the EMC Test Report**

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Pete Krebill
Date of test:	2/7/2006 to 2/21/2006

### **2.2 Identification of the Client**

Applicant's Name:	BENQ MOBILE
Street Address:	HAIDENAUPLATZ 1
City/Zip Code	81667 MUNCHEN
Country	GERMANY
Contact Person:	MARTIN WEINBERGER
Phone No.	+49.89.722.37148
Fax:	+49.89.722.24799
e-mail:	Martin.weinberger@benq.com

### **2.3 Identification of the Manufacturer**

Manufacturer's Name:	BENQ SHA MOBILE
Manufacturers Address:	CHUAN QIAO RD. 777, PUDONG
City/Zip Code	SHANGHAI 201206
Country	CHINA

### **3 Equipment under Test (EUT)**

#### **3.1 Identification of the Equipment under Test**

Marketing Name:	A31a
Description:	DUAL-BAND GSM MOBILE PHONE
Model No:	A31a
FCC ID:	PWX-A31a
IC ID:	6175C-A31a
Frequency Range:	824.2 MHz – 848.8 MHz 1850.2 MHz – 1909.8 MHz
Type(s) of Modulation:	GMSK
Number of Channels:	124 for 850 band 298 for 1900 band
Antenna Type:	INTERNAL
Output Power:	1.016 ERP@ MHz for 850 band 0.895W EIRP@ MHz for 1900 band

#### **4 Subject of Investigation**

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS132 and RSS133.

## 5 Measurements

### 5.1 RF Power Output

#### 5.1.1 FCC 2.1046 Measurements required: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

#### 5.1.2 Limits:

##### 5.1.2.1 FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

##### 5.1.2.2 FCC 24.232 (b)(c) Power limits.


(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

#### 5.1.3 Radiated Output Power Measurement procedure:

Based on TIA-603B November 2002

##### 2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

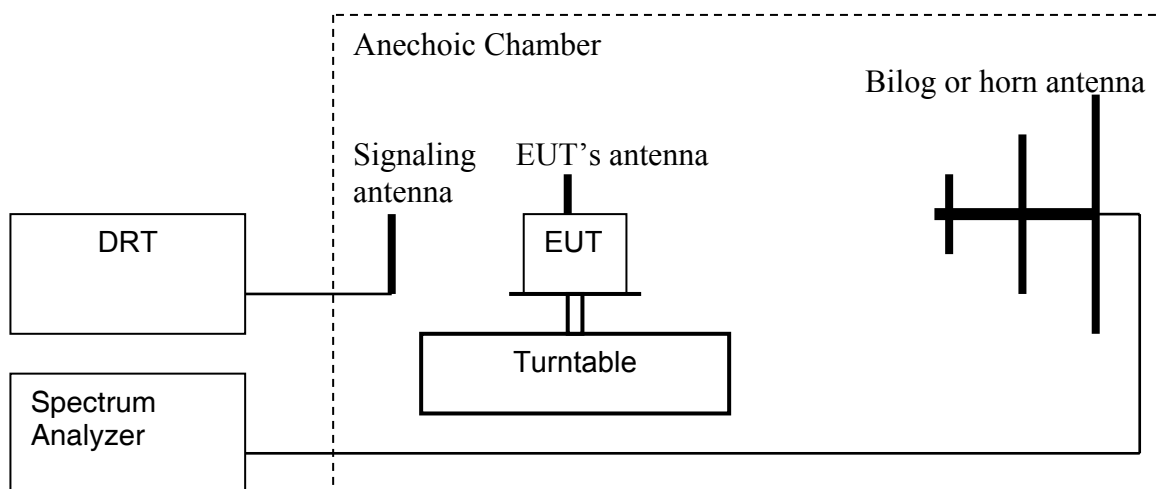

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.



2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the ERP using the following equation:  
**ERP (dBm) = LVL (dBm) + LOSS (dB)**
8. Determine the EIRP using the following equation:  
**EIRP (dBm) = ERP (dBm) + 2.15 (dB)**
9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(**note:** Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)

**Spectrum analyzer settings:**

Res B/W: 3 MHz

Vid B/W: 3 MHz

**5.1.4 ERP Results 800 MHz band:**

Frequency (MHz)	Effective Radiated Power (dBm)
824.2	27.81
836.6	29.17
848.8	30.07

**5.1.5 EIRP Results 1900 MHz band:**

Frequency (MHz)	Effective Isotropic Radiated Power (dBm)
1850.2	29.42
1880.0	29.52
1909.8	28.19

**EIRP (GSM 850)****CHANNEL 128****CETECOM Inc.**

§22.913(a)

**411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: af31a

Customer: BENQ

Operating Mode: tx 128

Antenna: V

EUT: V


Test operator: NEELESH

Voltage: NORMAL

Comment: eirp

**SWEEP TABLE: "EIRP 850 CH 128 V"**

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
819.2 MHz	829.2 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

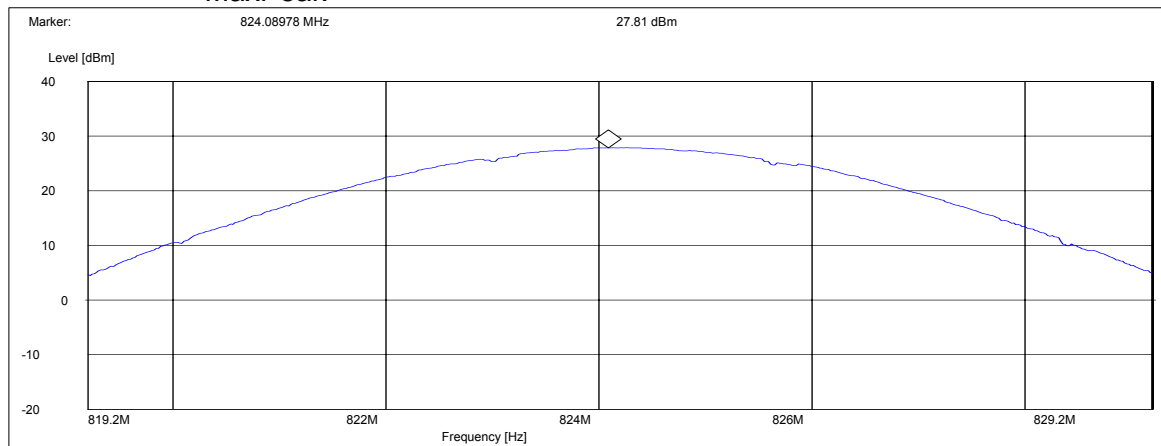

**EIRP (GSM 850)****CHANNEL 190****CETECOM Inc.****§22.913(a)****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: af31a

Customer: BENQ

Operating Mode: tx 192

Antenna: V

EUT: V


Test operator: NEELESH

Voltage: NORMAL

Comment: eirp

**SWEEP TABLE: "EIRP 850 CH 190 V"**

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
831.6 MHz	841.6 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

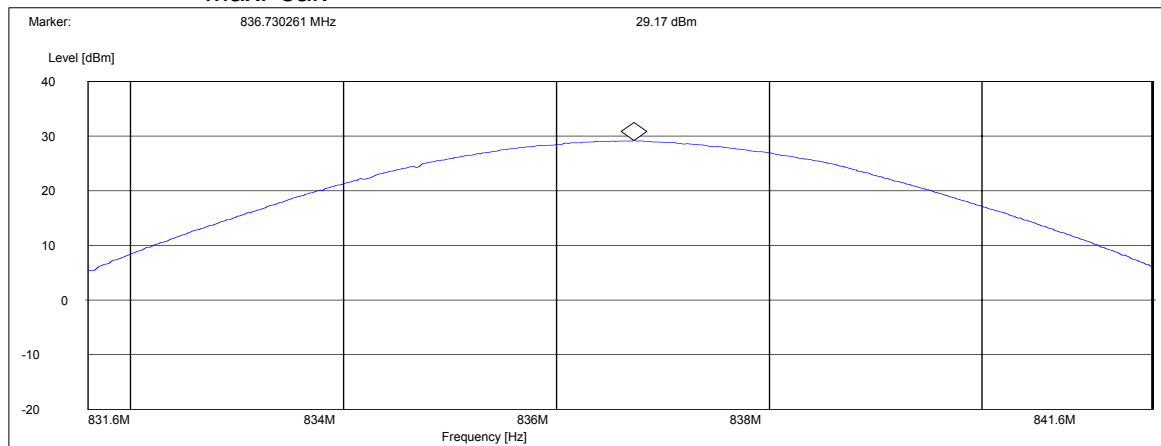

**EIRP (GSM 850)**  
**CHANNEL 251**  
**CETECOM Inc.**


§22.913(a)

**411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: af31a  
Customer: BENQ  
Operating Mode: tx 251  
Antenna: V  
EUT: V  
Test operator: NEELESH  
Voltage: NORMAL  
Comment: eirp

**SWEEP TABLE: "EIRP 850 CH 251 V"**

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

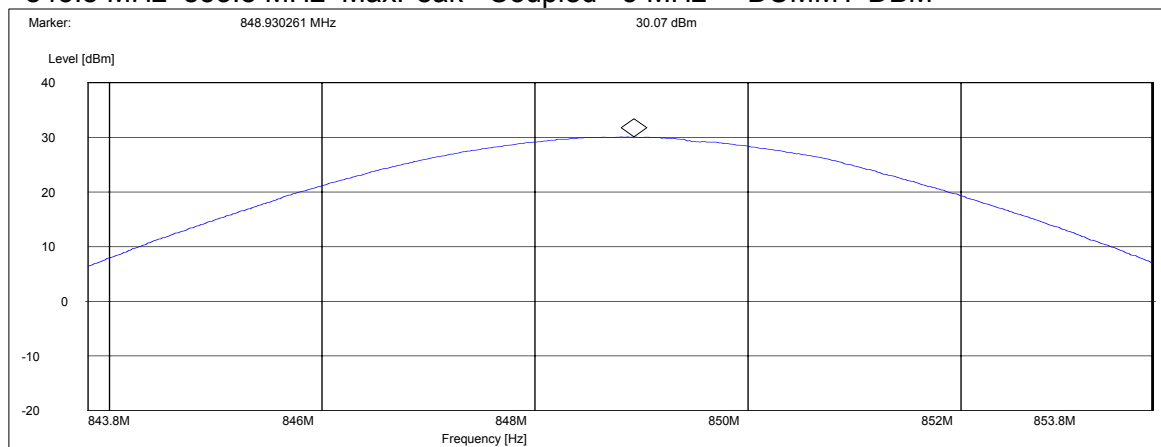

**EIRP (PCS-1900)****CHANNEL 512****CETECOM Inc.****§24.232(b)****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: af31a

Customer: BENQ

Operating Mode: tx 512

Antenna: V

EUT: V

Test operator: NEELESH

Voltage: NORMAL

Comment: eirp


**SWEEP TABLE: "EIRP 1900 CH512"**

Short Description: EIRP PCS 1900 for channel-512

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.8 GHz 1.9 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

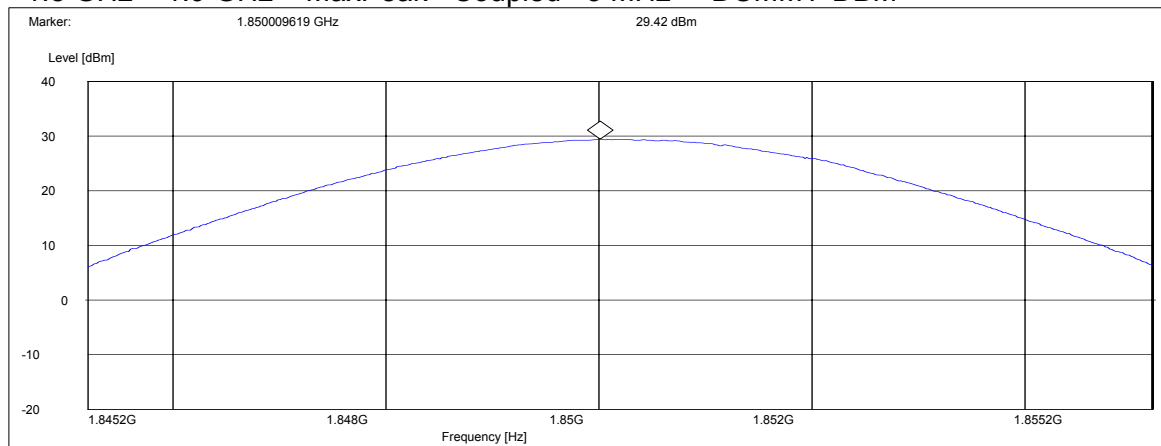

**EIRP (PCS-1900)****CHANNEL 661****CETECOM Inc.****§24.232(b)****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: af31a

Customer: BENQ

Operating Mode: tx 661

Antenna: V

EUT: V

Test operator: NEELESH

Voltage: NORMAL

Comment: eirp

**SWEEP TABLE: "EIRP 1900 CH661"**


Short Description: EIRP PCS 1900 for channel-661

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.9 GHz 1.9 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

MaxPeak

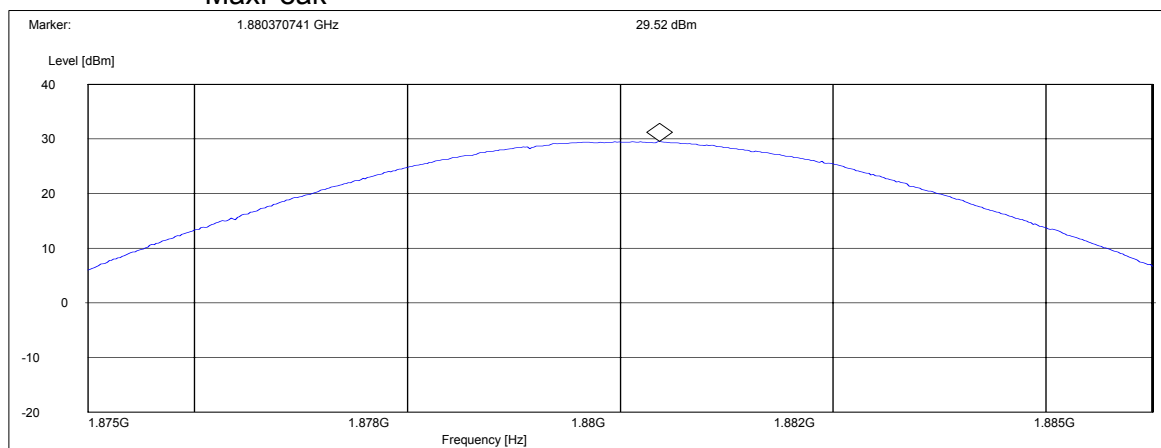

**EIRP (PCS-1900)**  
**CHANNEL 810**  
**CETECOM Inc.**


§24.232(b)

**411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: af31a  
Customer: BENQ  
Operating Mode: tx 810  
Antenna: V  
EUT: V  
Test operator: NEELESH  
Voltage: NORMAL  
Comment: eirp

**SWEEP TABLE: "EIRP 1900 CH810"**

Short Description: EIRP PCS 1900 for channel-810  
Start Stop Detector Meas. IF Transducer  
Frequency Frequency Time Bandw.  
1.9 GHz 1.9 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

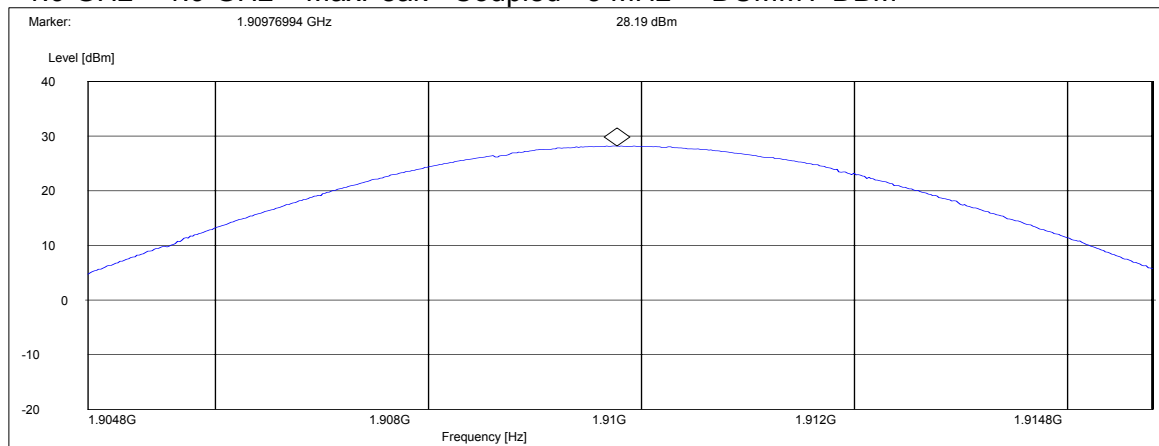




## 5.2 Occupied Bandwidth/Emission Bandwidth

### 5.2.1 FCC 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.

(h) Transmitters employing digital modulation techniques-when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated.

### 5.2.2 Occupied / emission bandwidth measurement procedure:

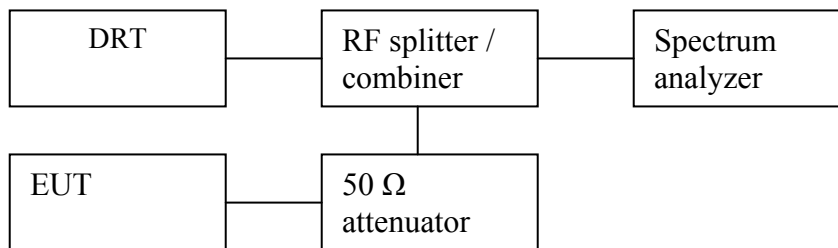

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure the 99% (-20 dB) occupied bandwidth. Record the value.
4. Set the spectrum analyzer to measure the 99.5% (-26 dB) emission bandwidth. Record the value.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

**5.2.3 Occupied / Emission bandwidth results 800 MHz band:**


Frequency (MHz)	Occupied B/W -20 dB	Emission B/W -26 dB
824.2	278.587	314.629
836.6	284.569	316.633
848.8	264.529	310.621

**5.2.4 Occupied / Emission bandwidth results 1900 MHz band:**

Frequency (MHz)	Occupied B/W -20 dB (KHz)	Emission B/W -26 dB (KHz)
1850.2	278.557	308.617
1880.0	282.565	314.629
1909.8	274.549	314.629

**-20dB (GSM 850)****CHANNEL 128**


Delta 1 [T1] RBW 3 kHz RF Att 20 dB  
Ref Lvl -1.41 dB VBW 3 kHz  
26.2 dBm 278.55711423 kHz SWT 280 ms Unit dBm

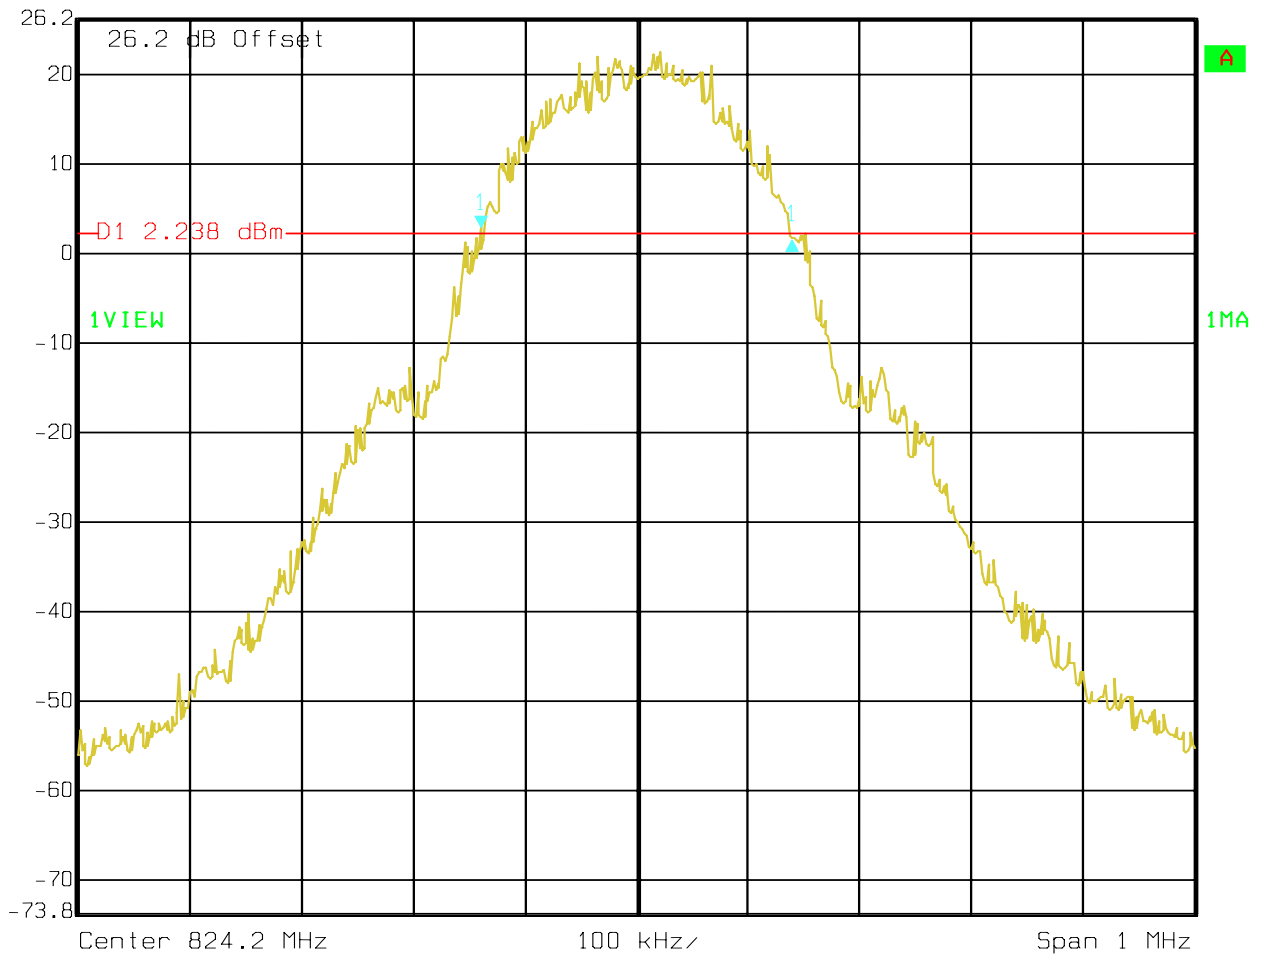

Date: 14.FEB.2006 12:18:24

**-20dB (GSM 850)****CHANNEL 190**


Ref Lvl 26.2 dBm  
Delta 1 [T1] -0.59 dB  
284.56913828 kHz  
RBW 3 kHz  
VBW 3 kHz  
SWT 280 ms  
RF Att 20 dB  
Unit dBm

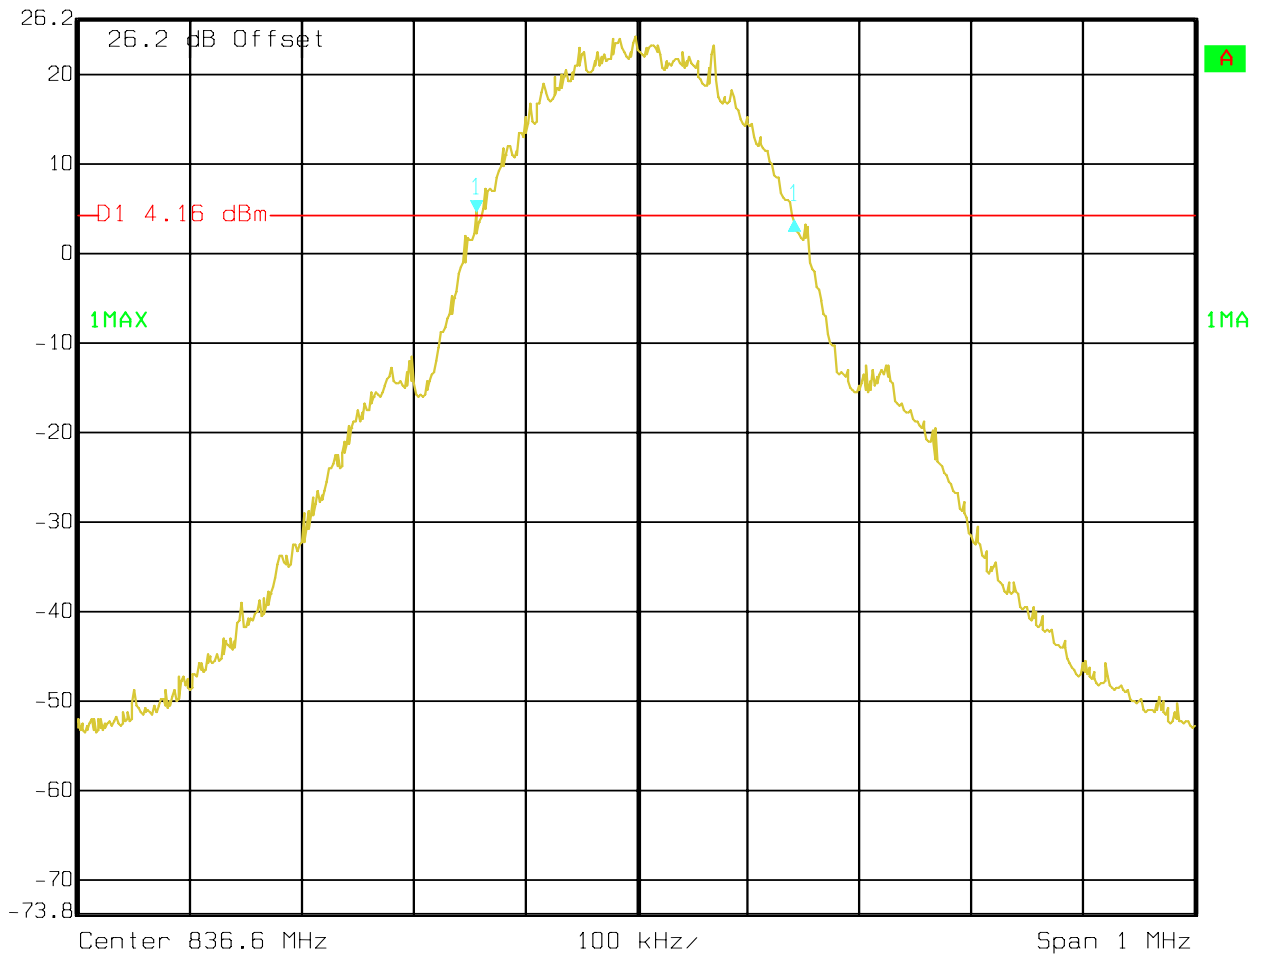

Date: 14.FEB.2006 12:26:28

**-20dB (GSM 850)****CHANNEL 251**


Delta 1 [T1] RBW 3 kHz RF Att 20 dB  
Ref Lvl 0.00 dB VBW 3 kHz  
26.2 dBm 264.52905812 kHz SWT 280 ms Unit dBm

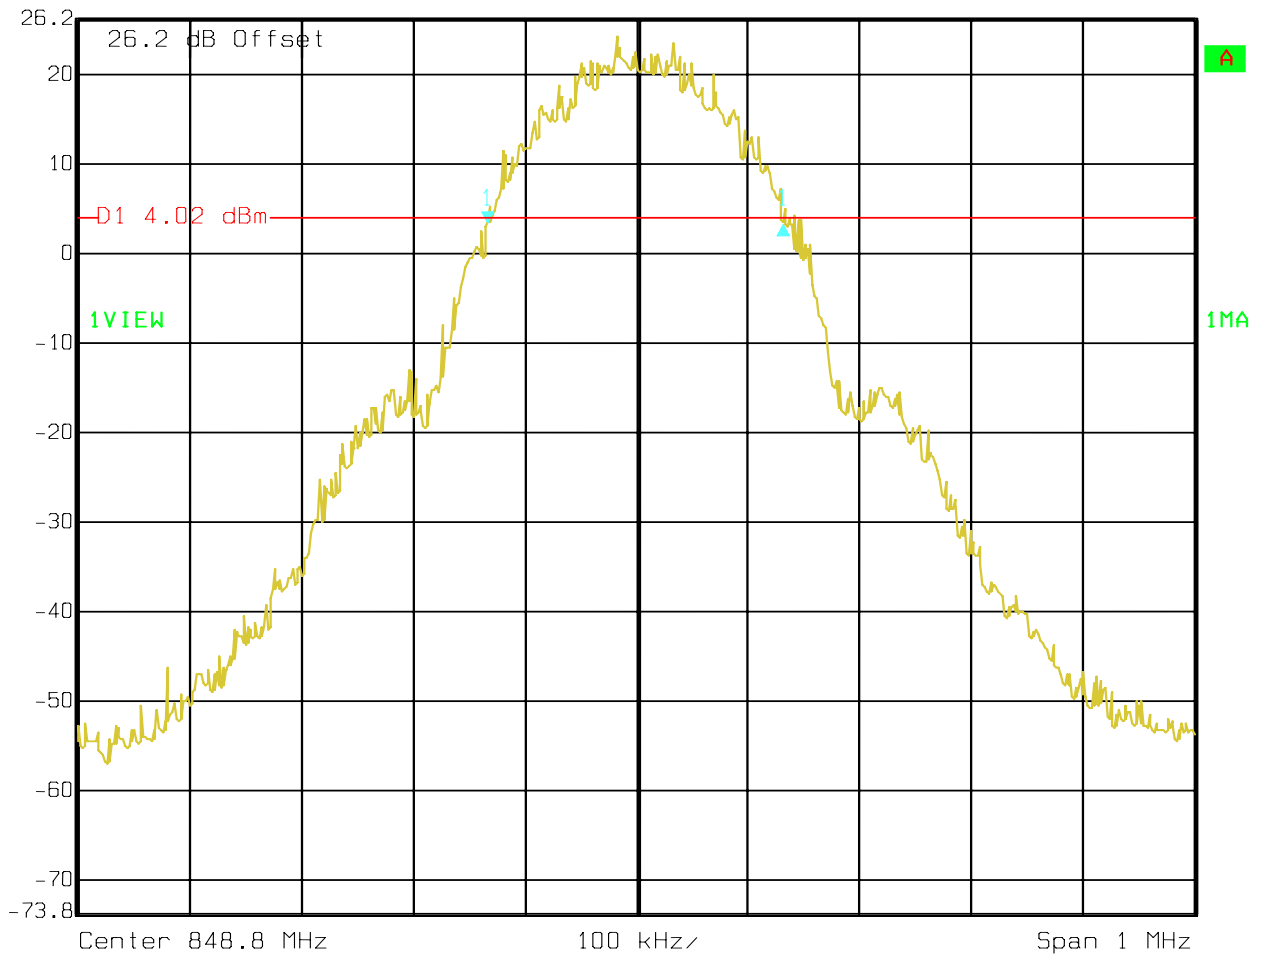

Date: 14.FEB.2006 12:14:13

**-26dB (GSM 850)****CHANNEL 128**


Marker 1 [T1] RBW 3 kHz RF Att 20 dB  
Ref Lvl 4.46 dBm VBW 3 kHz  
26.2 dBm 836.45671343 MHz SWT 280 ms Unit dBm

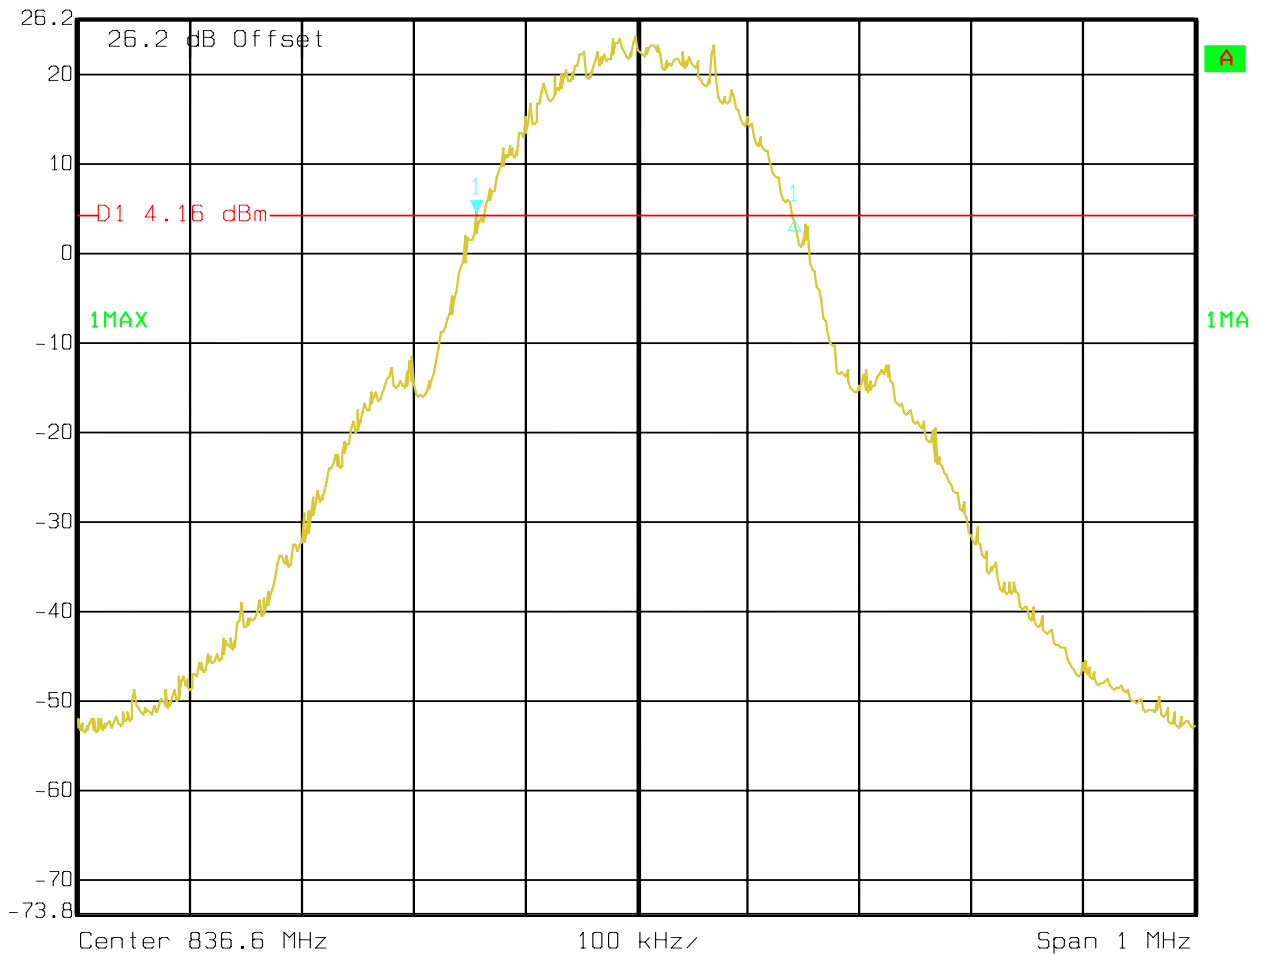

Date: 14.FEB.2006 12:26:01

**-26dB (GSM 850)****CHANNEL 190**


Ref Lvl 26.2 dBm  
Delta 1 [T1] -0.43 dB  
316.63326653 kHz  
RBW 3 kHz  
VBW 3 kHz  
SWT 280 ms  
RF Att 20 dB  
Unit dBm

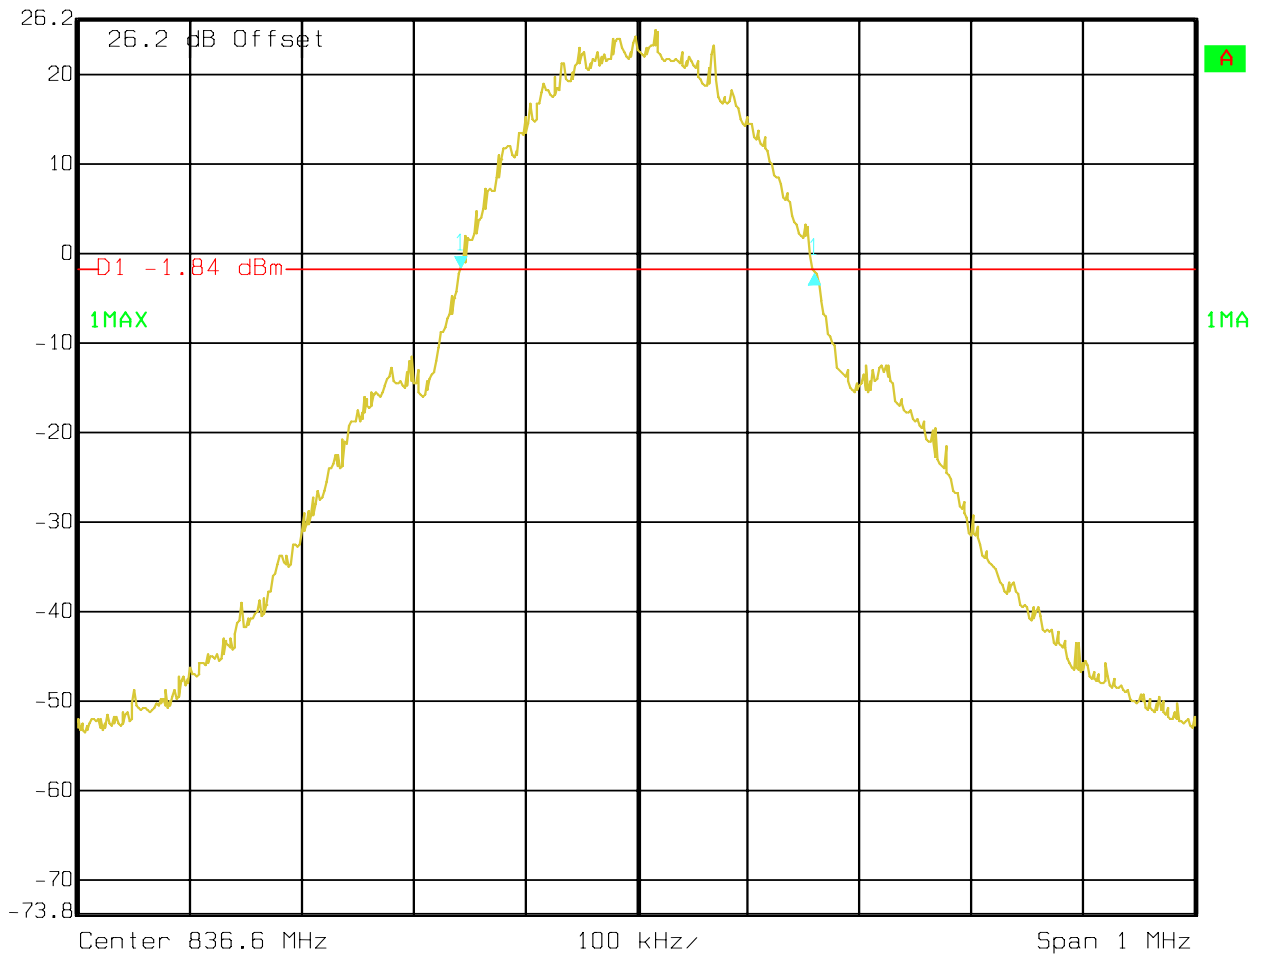

Date: 14.FEB.2006 12:28:09

**-26dB (GSM 850)****CHANNEL 251**

Delta 1 [T1] RBW 3 kHz RF Att 20 dB  
Ref Lvl -1.14 dB VBW 3 kHz  
26.2 dBm 310.62124248 kHz SWT 280 ms Unit dBm

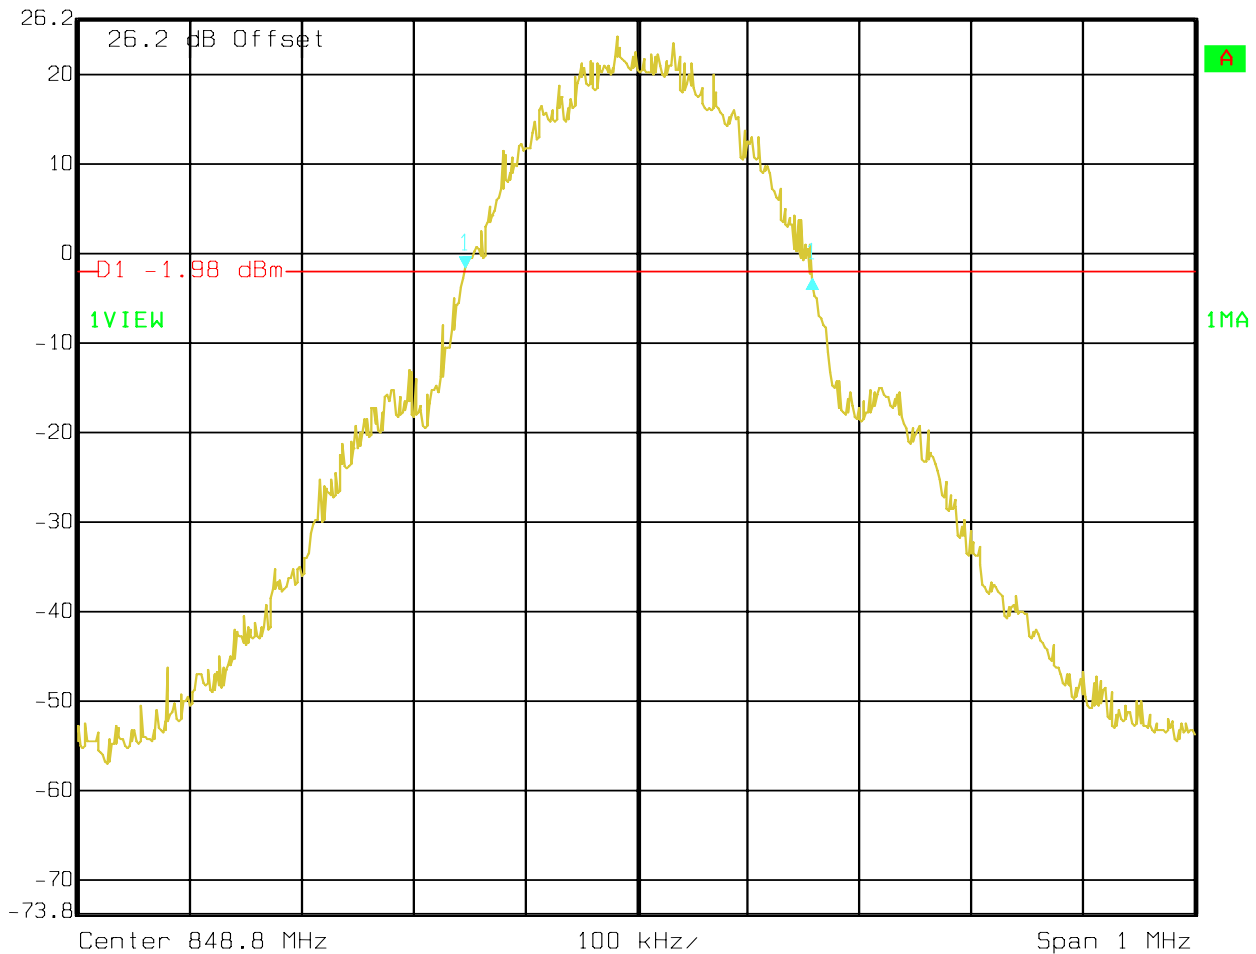


Date: 14.FEB.2006 12:15:41



**-20dB (PCS-1900)****CHANNEL 512**


Delta 1 [T1] RBW 3 kHz RF Att 20 dB  
Ref Lvl -1.68 dB VBW 3 kHz  
26.7 dBm 278.55711423 kHz SWT 280 ms Unit dBm

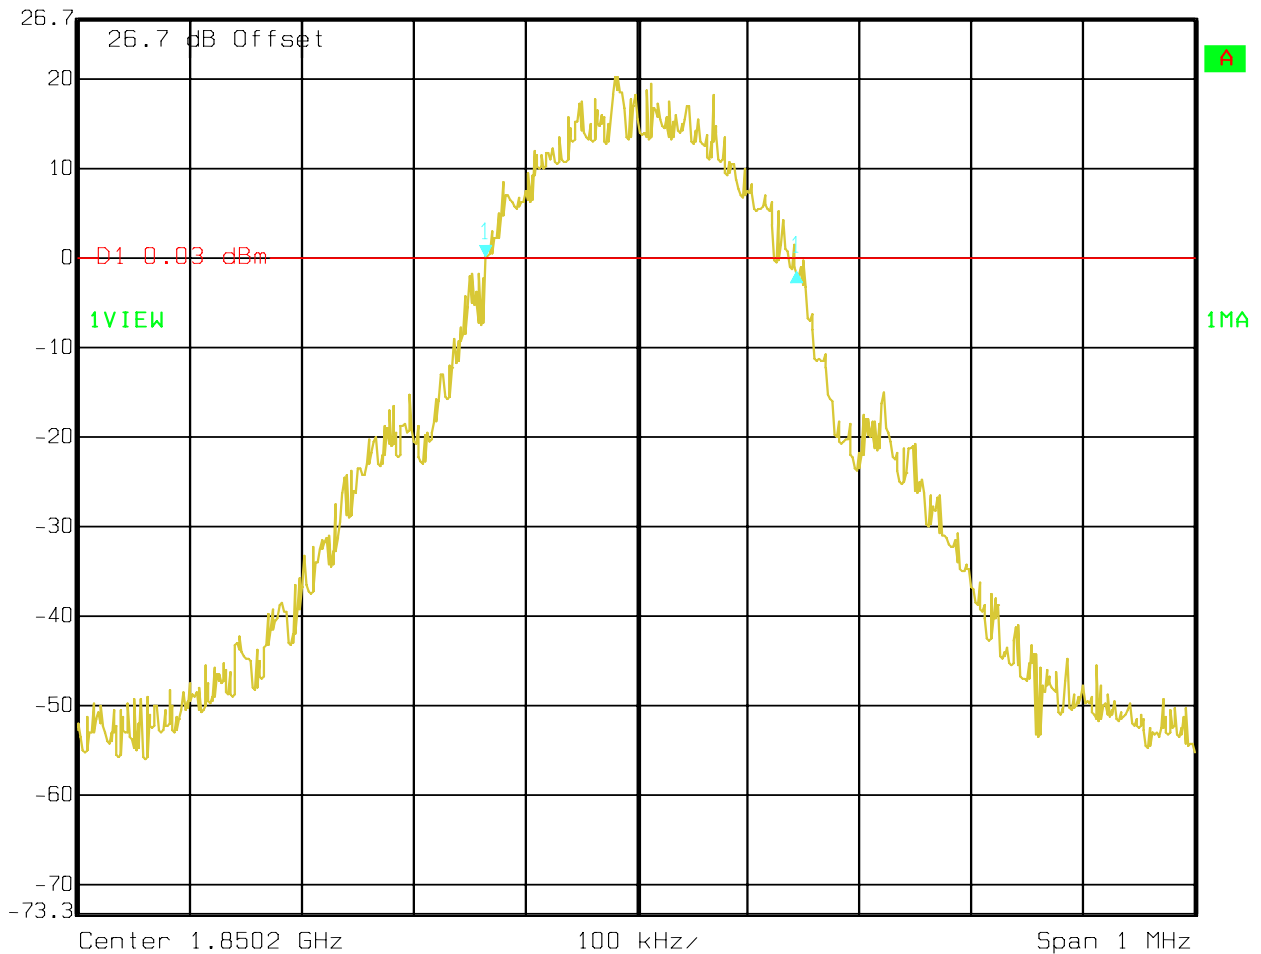

Date: 14.FEB.2006 13:57:54

**-20dB (PCS-1900)****CHANNEL 661**


Delta 1 [T1] RBW 3 kHz RF Att 20 dB  
Ref Lvl 0.61 dB VBW 3 kHz  
26.7 dBm 282.56513026 kHz SWT 280 ms Unit dBm

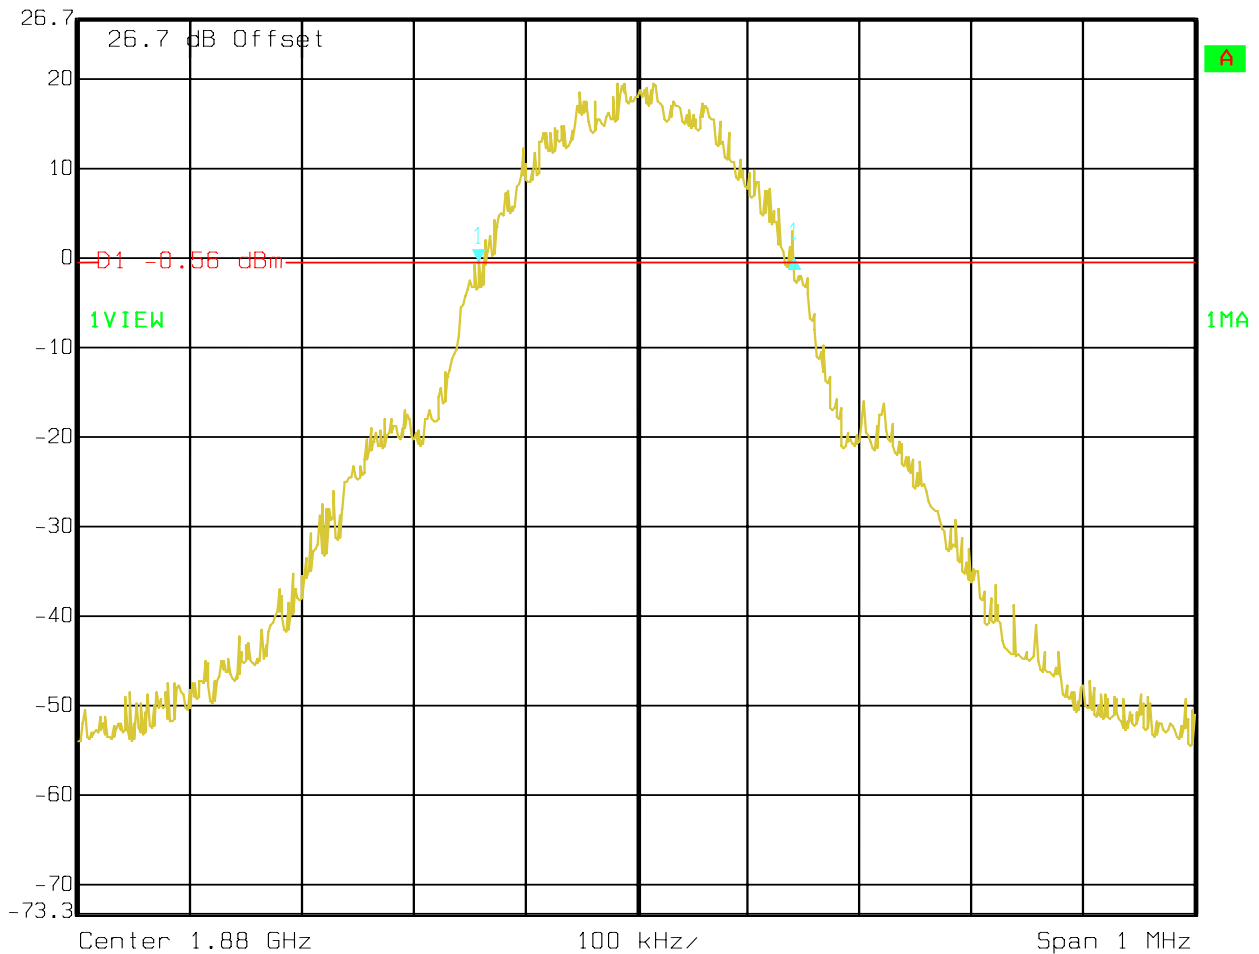

Date: 14.FEB.2006 14:01:02

**-20dB (PCS-1900)****CHANNEL 810**


Delta 1 [T1] RBW 3 kHz RF Att 20 dB  
Ref Lvl 1.98 dB VBW 3 kHz  
26.7 dBm 274.54909820 kHz SWT 280 ms Unit dBm

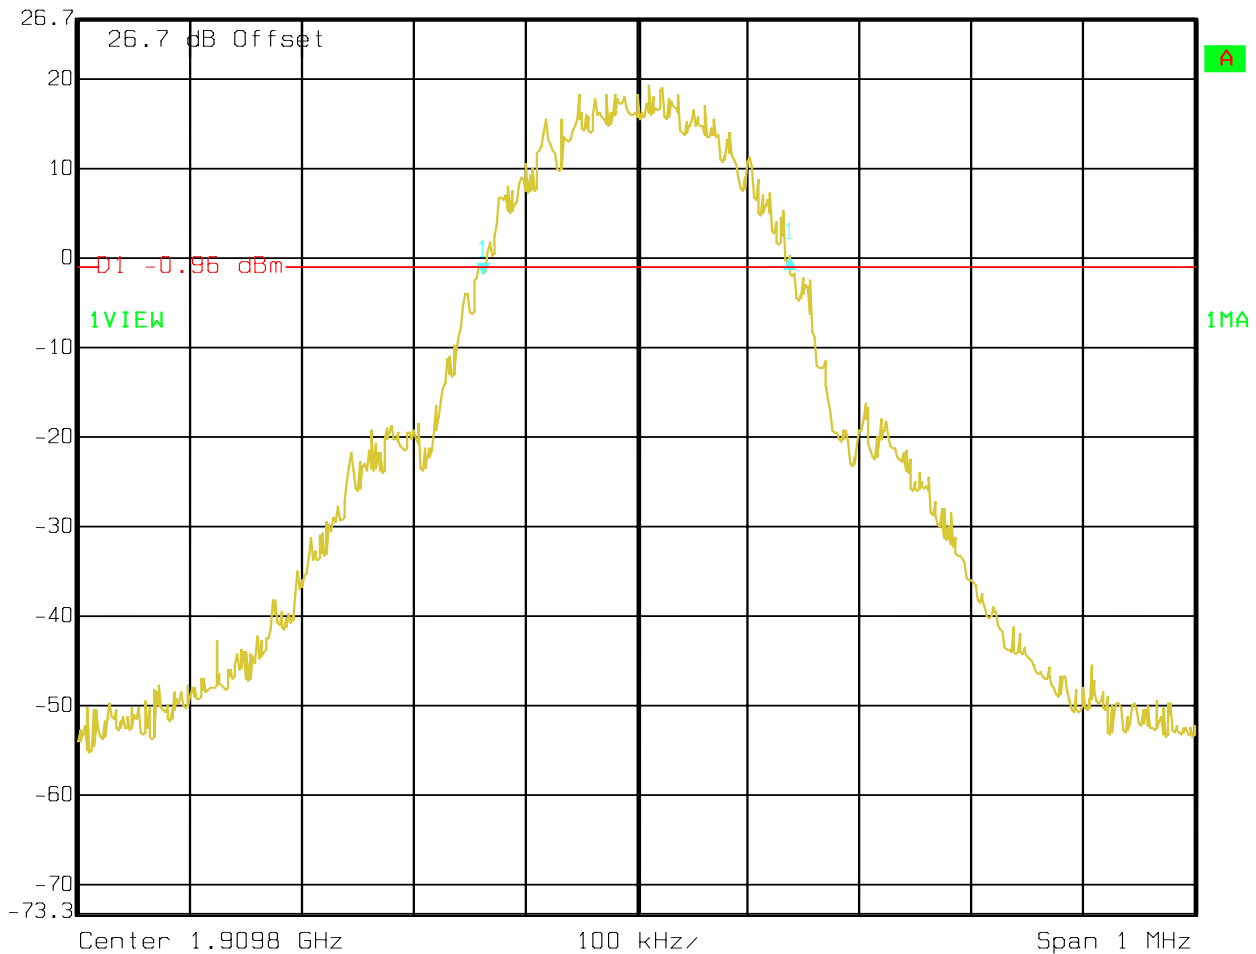

Date: 14.FEB.2006 14:04:02

**-26dB (PCS-1900)****CHANNEL 512**


Delta 1 [T1] RBW 3 kHz RF Att 20 dB  
Ref Lvl -2.61 dB VBW 3 kHz  
26.7 dBm 308.61723447 kHz SWT 280 ms Unit dBm

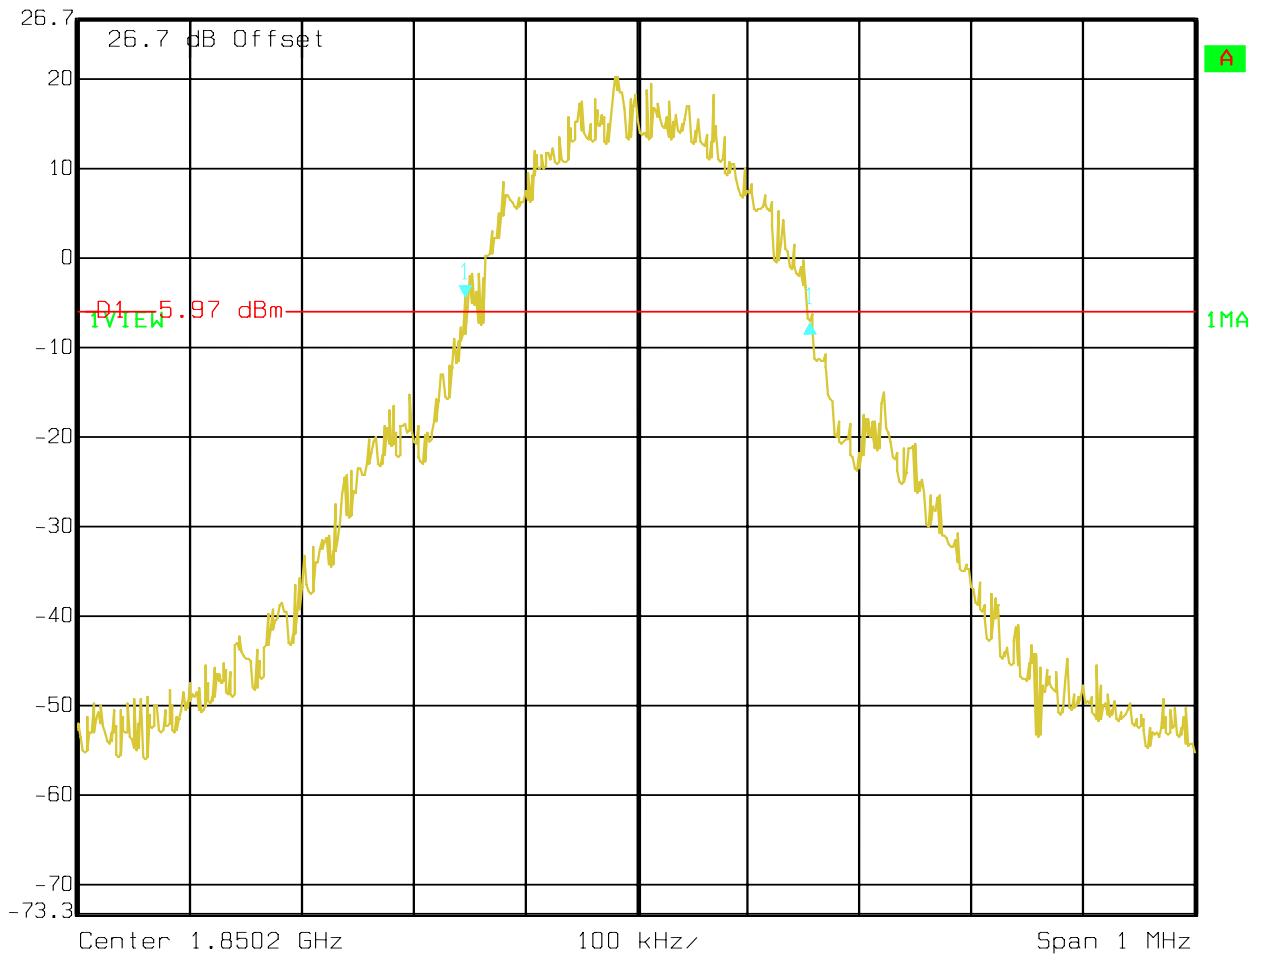

Date: 14.FEB.2006 13:59:02

**-26dB (PCS-1900)****CHANNEL 661**


Delta 1 [T1] RBW 3 kHz RF Att 20 dB  
Ref Lvl -1.69 dB VBW 3 kHz  
26.7 dBm 314.62925852 kHz SWT 280 ms Unit dBm

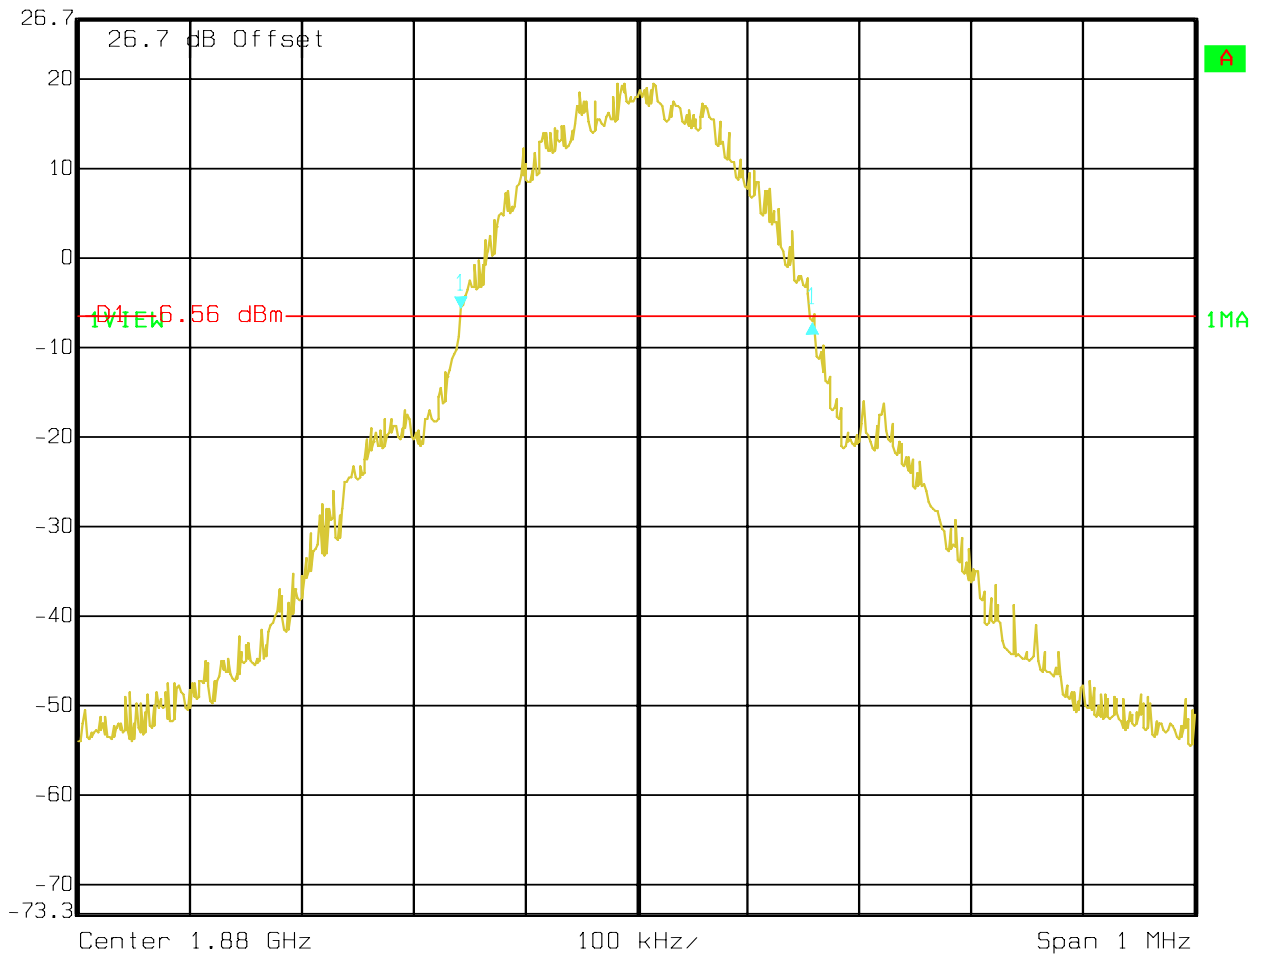

Date: 14.FEB.2006 14:02:15

**-26dB (PCS-1900)****CHANNEL 810**

Delta 1 [T1] RBW 3 kHz RF Att 20 dB  
Ref Lvl 1.13 dB VBW 3 kHz  
26.7 dBm 314.62925852 kHz SWT 280 ms Unit dBm

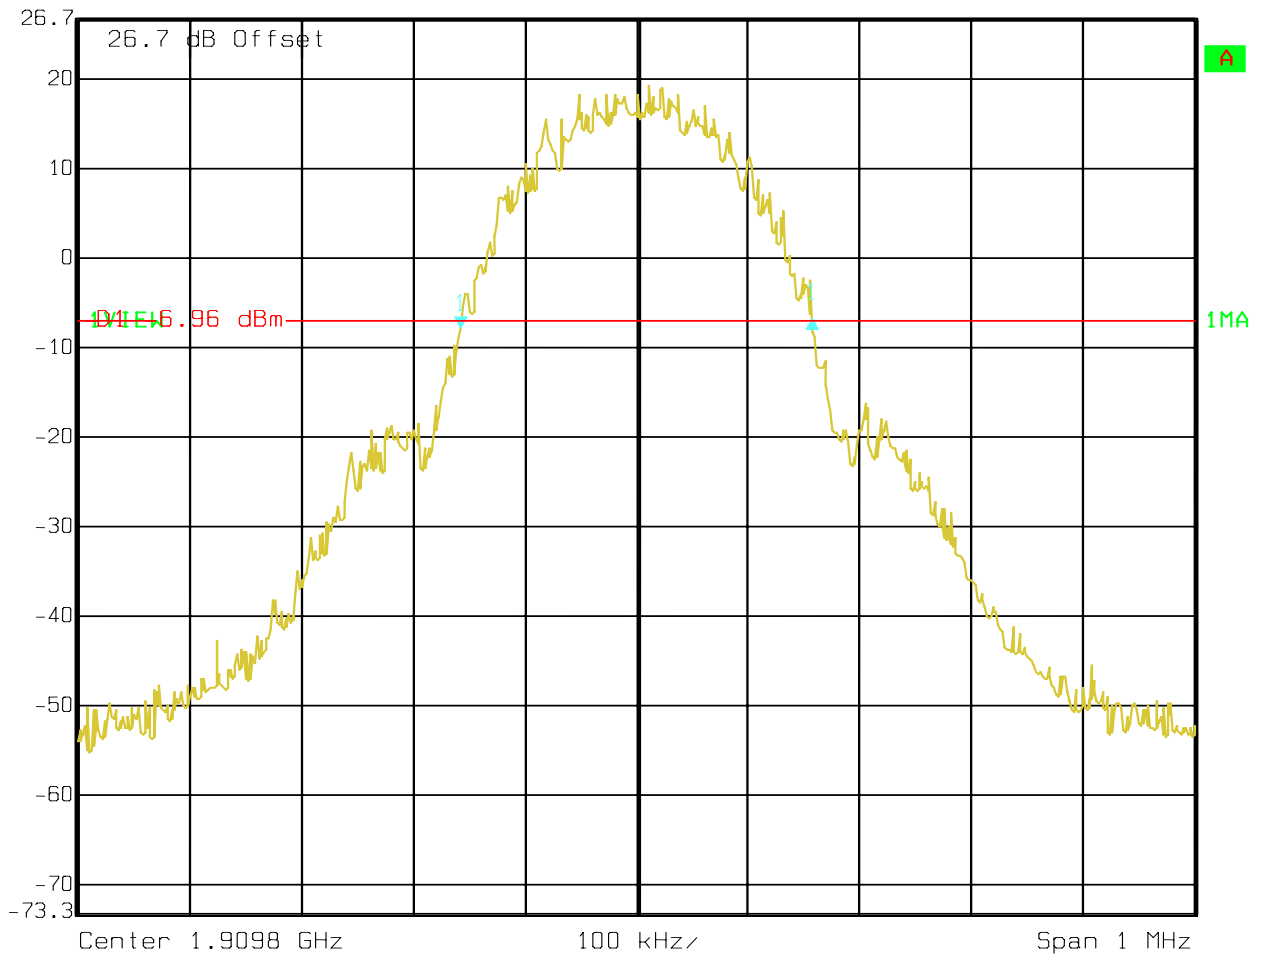

Date: 14.FEB.2006 14:04:43

## **5.2.5 Frequency Stability**

### **5.2.6 Limit**

#### **For Hand carried battery powered equipment:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.5VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -2.7% and +21.62%. For the purposes of measuring frequency stability these voltage limits are to be used.

#### **Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU 200 UNIVERSAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30 C.
3. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 661 for PCS-1900), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1V increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50 C.
7. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 661 for PCS-1900), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

#### **For equipment powered by primary supply voltage:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

For this EUT section 2.1055(d)(1) applies. This requires to vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

**5.2.7 FREQUENCY STABILITY****850 Band AFC FREQ ERROR vs. VOLTAGE**

Voltage (VDC)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	-11	.013
4.5	-14	.017

**AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-11	.013
-20	-11	.013
-10	-11	.013
0	-11	.013
+10	-11	.013
+20	-9	.011
+30	-10	.012
+40	-10	.012
+50	-9	.011

**1900 Band AFC FREQ ERROR vs. VOLTAGE**

Voltage (VDC)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	-10	0.005
4.5	-13	0.007

**AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-17	0.009
-20	-11	0.006
-10	-11	0.006
0	-11	0.006
+10	-11	0.006
+20	-10	0.005
+30	-10	0.005
+40	-10	0.005
+50	-11	0.006



### **5.3 Spurious Emissions Conducted**

#### **5.3.1 FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.**

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

#### **5.3.2 Limits:**

##### **5.3.2.1 FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

##### **5.3.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required

measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### **5.3.3 Conducted out of band emissions measurement procedure:**

**Based on TIA-603B November 2002**

#### **2.2.13 Unwanted Emissions: Conducted Spurious**

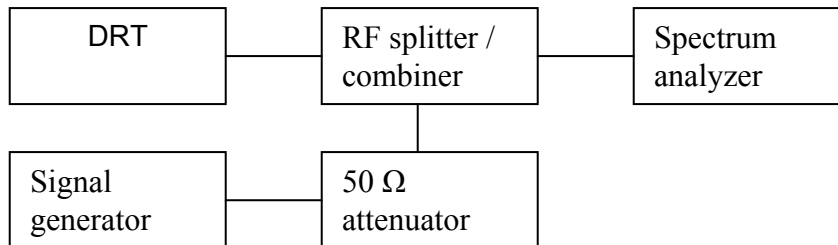


1. Connect the equipment as shown in the above diagram.
2. Set the spectrum analyzer to measure peak hold with the required settings.
3. Set the signal generator to a known output power and record the path loss in dB (**LOSS**) for frequencies up to the tenth harmonic of the EUT's carrier frequency. **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
4. Replace the signal generator with the EUT.
5. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.

(**note:** Step 3 above is performed prior to testing and **LOSS** is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)

**5.3.4 Bandedge Results GSM 850****(Channel 128)**

 Ref Lvl 26.2 dBm  
Marker 1 [T1] -16.32 dBm  
823.97795591 MHz  
RBW 5 kHz  
VBW 5 kHz  
SWT 200 ms  
RF Att 20 dB  
Unit dBm

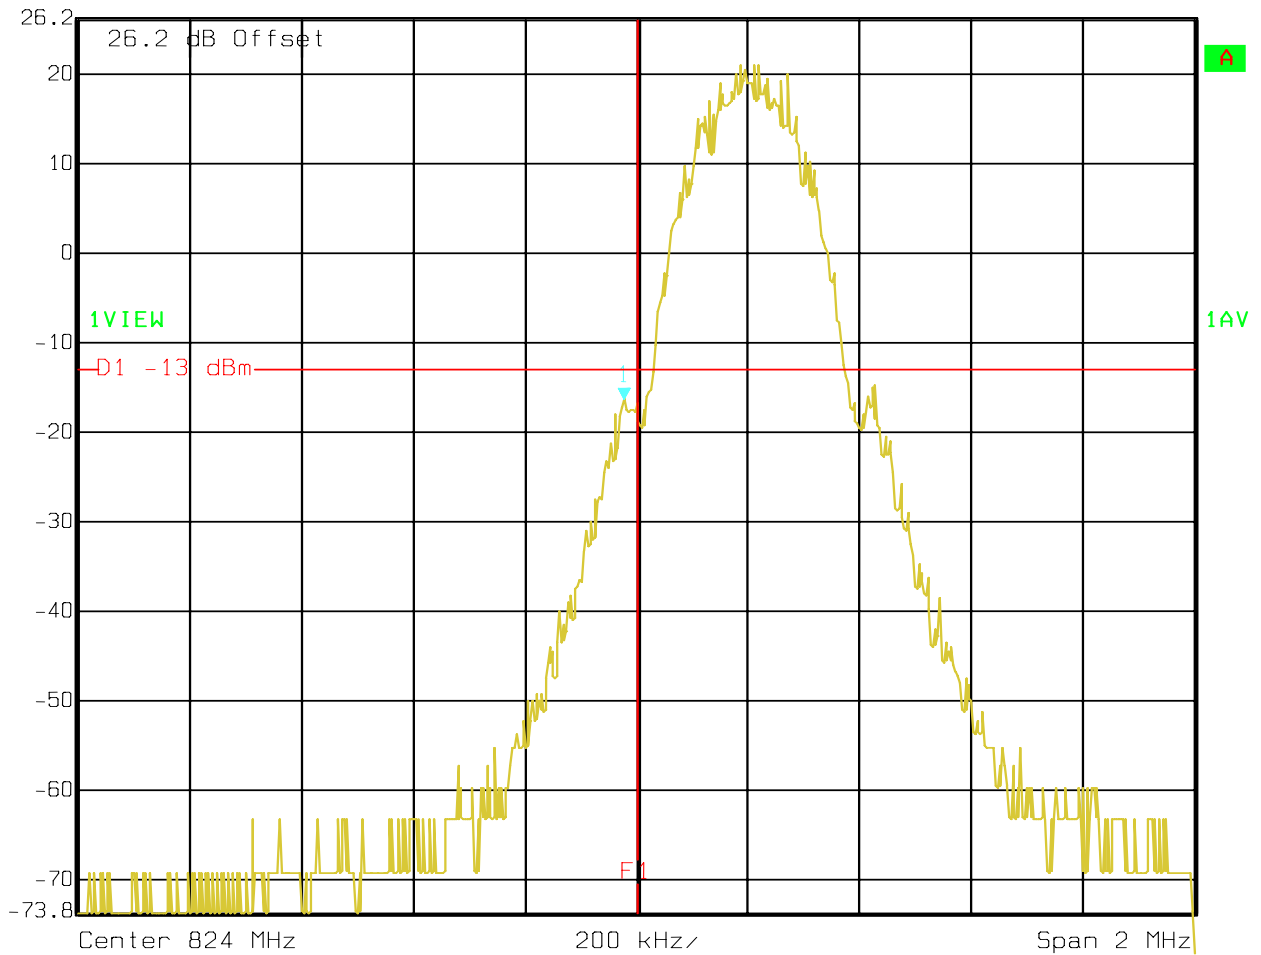

Date: 14.FEB.2006 12:35:18

**(Channel 251)**

Ref Lvl

26.2 dBm

Marker 1 [T1]

-15.51 dBm

849.03006012 MHz

RBW

5 kHz

RF Att

20 dB

VBW


5 kHz

SWT

200 ms


Unit


dBm

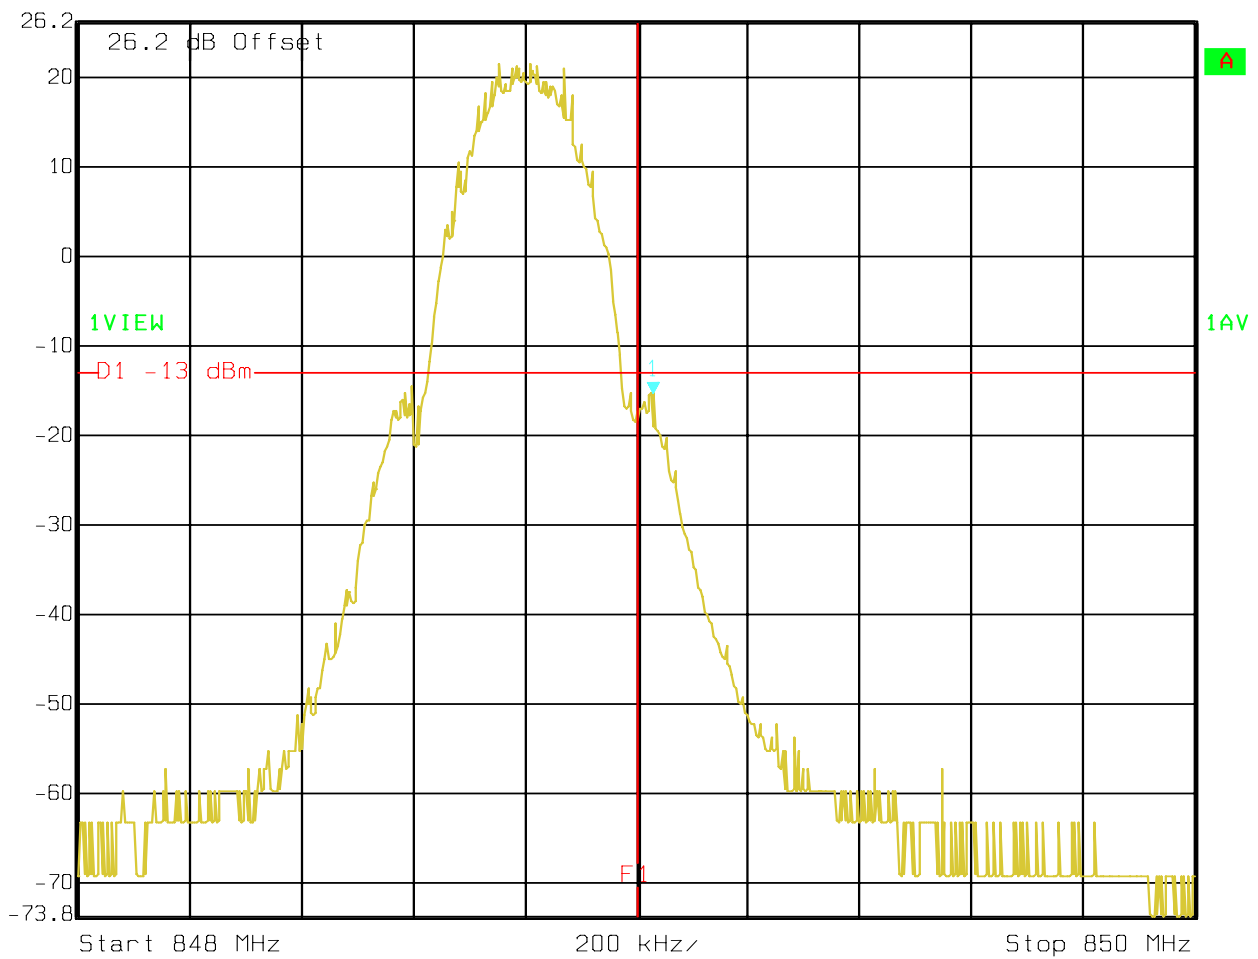

Date: 14.FEB.2006 12:38:07

**5.3.5 Conducted Spurious Results GSM 850****CHANNEL 128****30 MHz – 9 GHz****Note: The peak above the limit line is the carrier freq. at ch-128**


 Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl 31.45 dBm VBW 1 MHz  
36.2 dBm 824.2000000 MHz SWT 52 ms Unit dBm

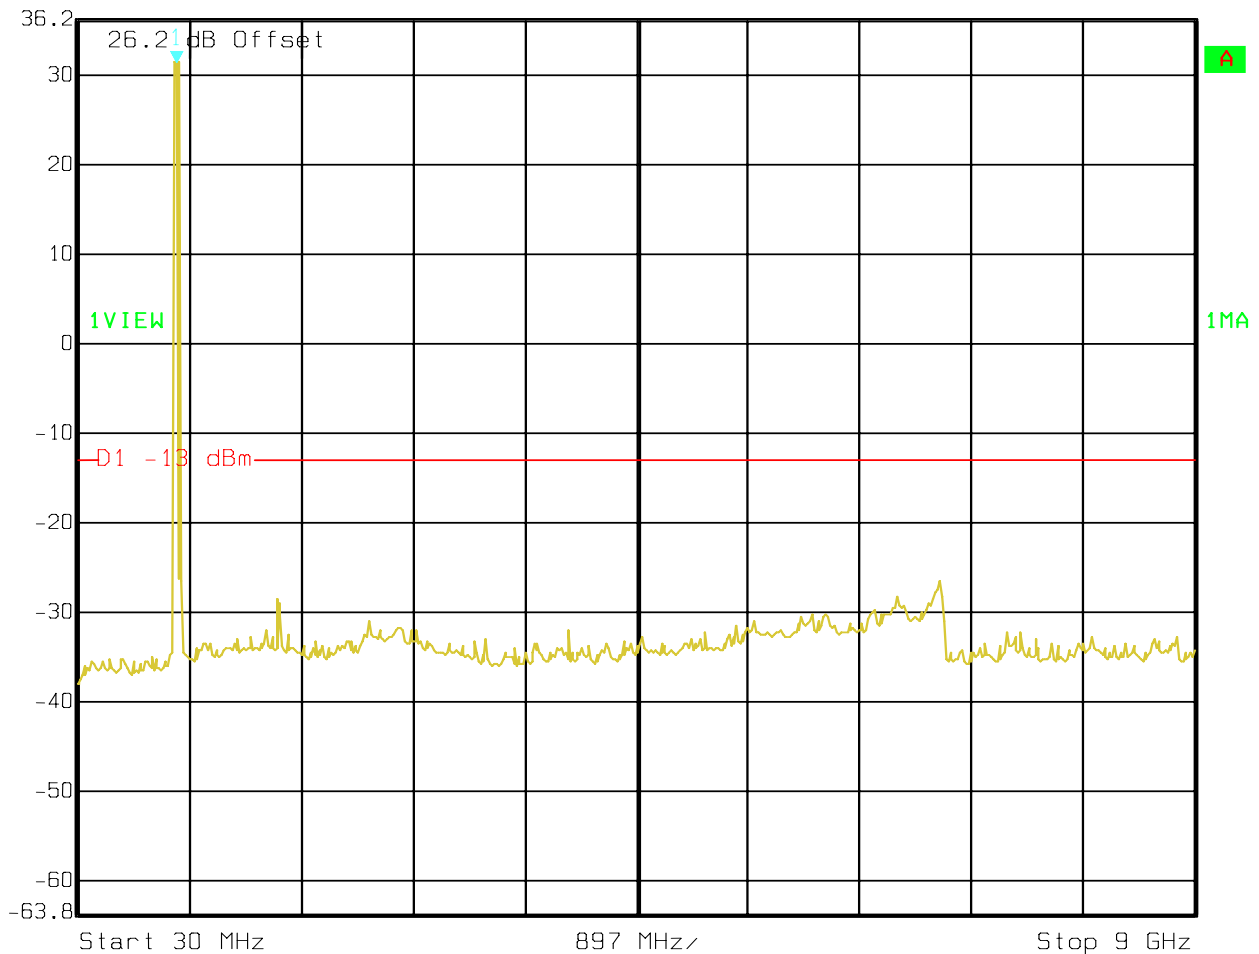

Date: 14.FEB.2006 12:04:47

**CHANNEL 190****30MHz – 9GHz****Note: The peak above the limit line is the carrier freq. at ch-190**


 Ref Lvl 36.2 dBm Marker 1 [T1] 31.11 dBm RBW 1 MHz RF Att 20 dB  
36.2 dBm 836.60000000 MHz VBW 1 MHz Unit dBm  
SWT 52 ms

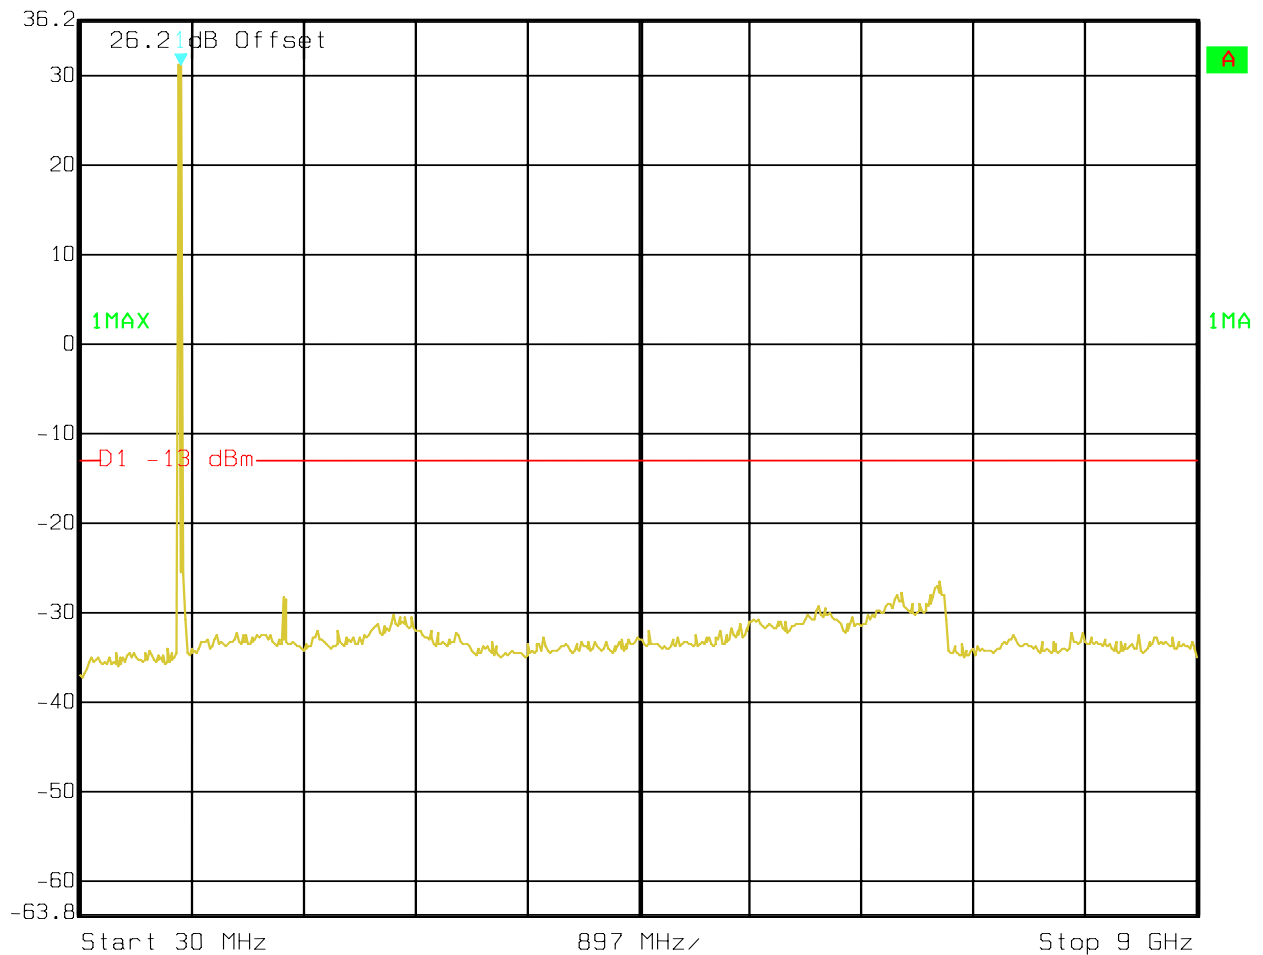

Date: 14.FEB.2006 12:02:15

**CHANNEL 251**  
**30MHz – 9GHz****Note: The peak above the limit line is the carrier freq. at ch-251**


 Ref Lvl 36.2 dBm  
Marker 1 [T1] 31.02 dBm  
848.80000000 MHz  
RBW 1 MHz RF Att 20 dB  
VBW 1 MHz  
SWT 52 ms Unit dBm

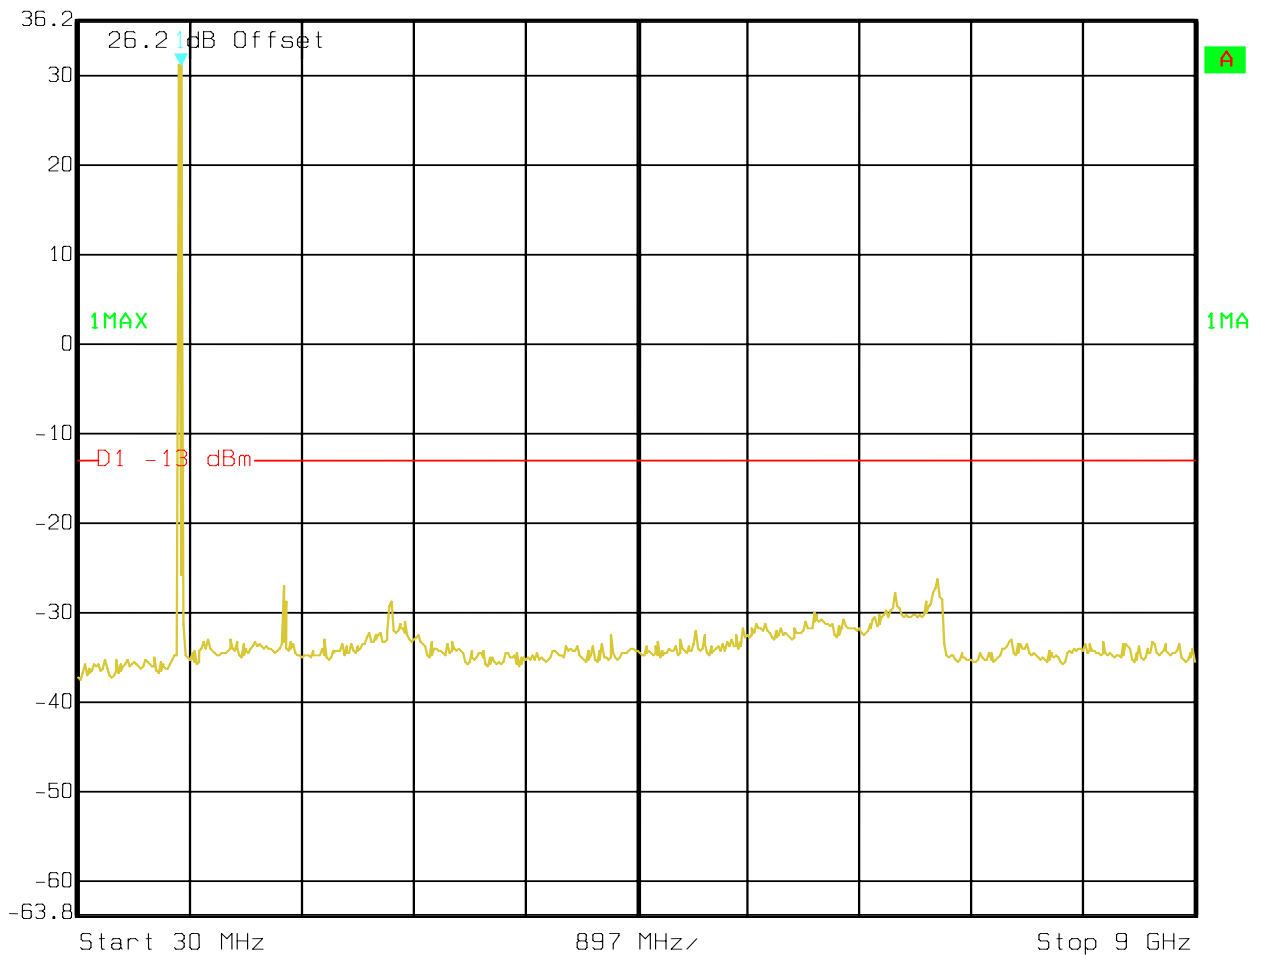

Date: 14.FEB.2006 12:05:24

**IDLE (GSM 850)****30MHz – 9GHz**

Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl -38.00 dBm VBW 1 MHz  
26.2 dBm 6.93276553 GHz SWT 52 ms Unit dBm

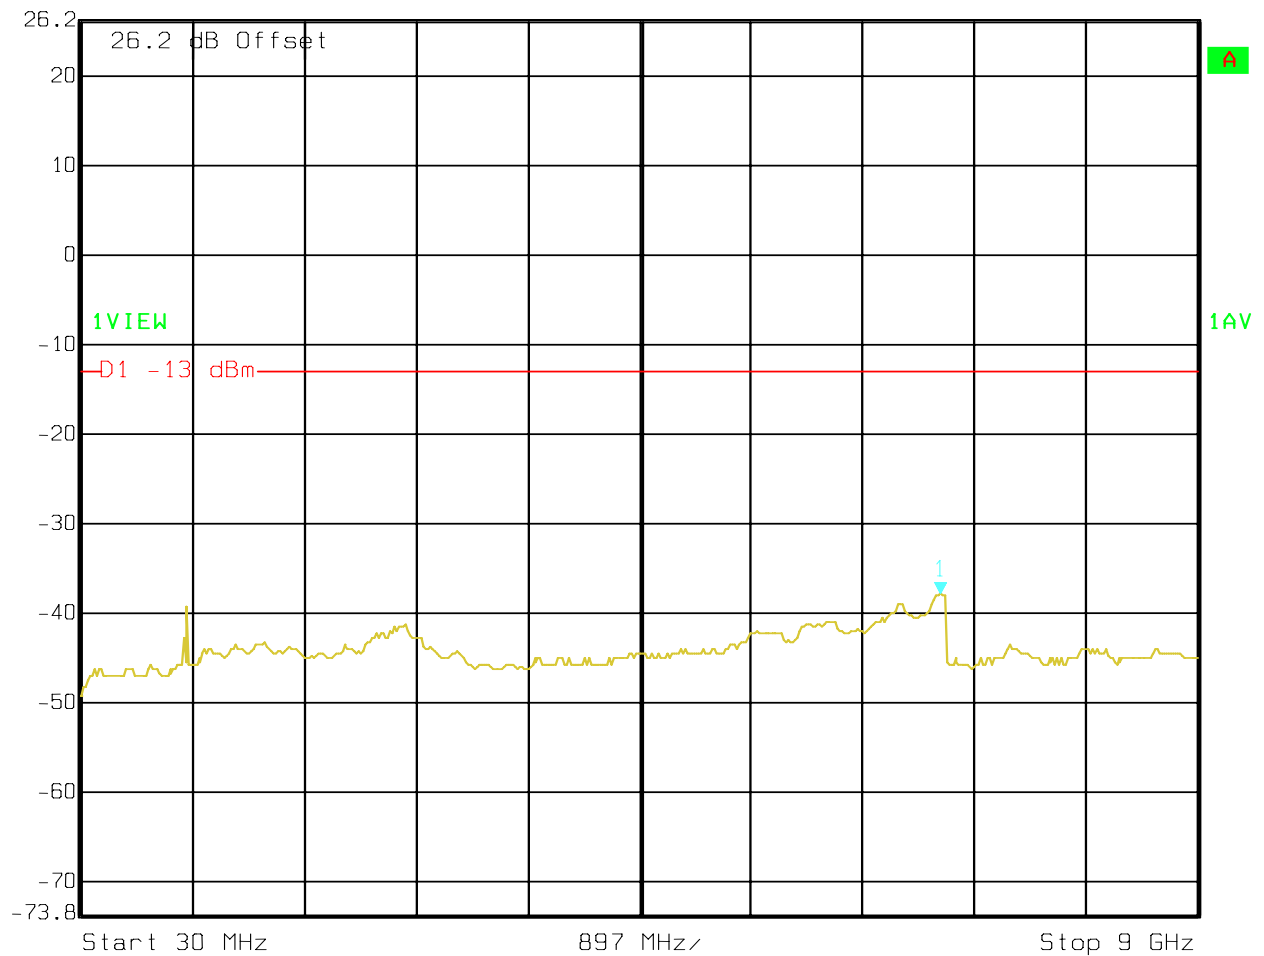


Date: 14.FEB.2006 13:34:54



**5.3.6 Bandedge Results PCS-1900****PCS-1900 (Channel 512)**

 Ref Lvl 26.7 dBm  
Marker 1 [T1] -19.98 dBm  
1.84998196 GHz  
RBW 5 kHz  
VBW 5 kHz  
SWT 200 ms  
RF Att 20 dB  
Unit dBm

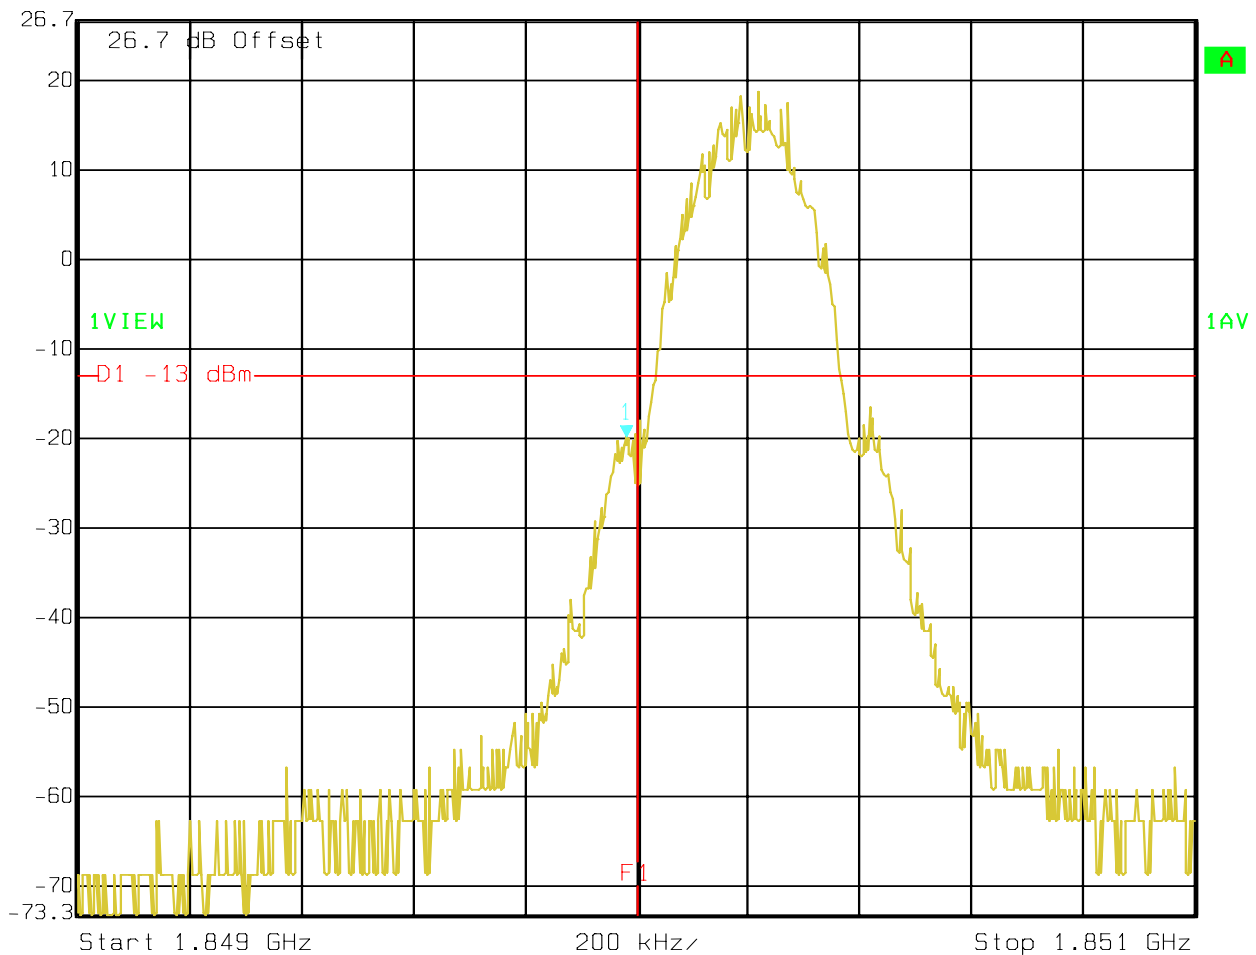

Date: 14.FEB.2006 14:08:02

**PCS-1900 (Channel 810)**

Ref Lvl

26.7 dBm

Marker 1 [T1]

-18.21 dBm

1.91002345 GHz

RBW

5 kHz

RF Att

20 dB

VBW


5 kHz

SWT

200 ms

Unit


dBm

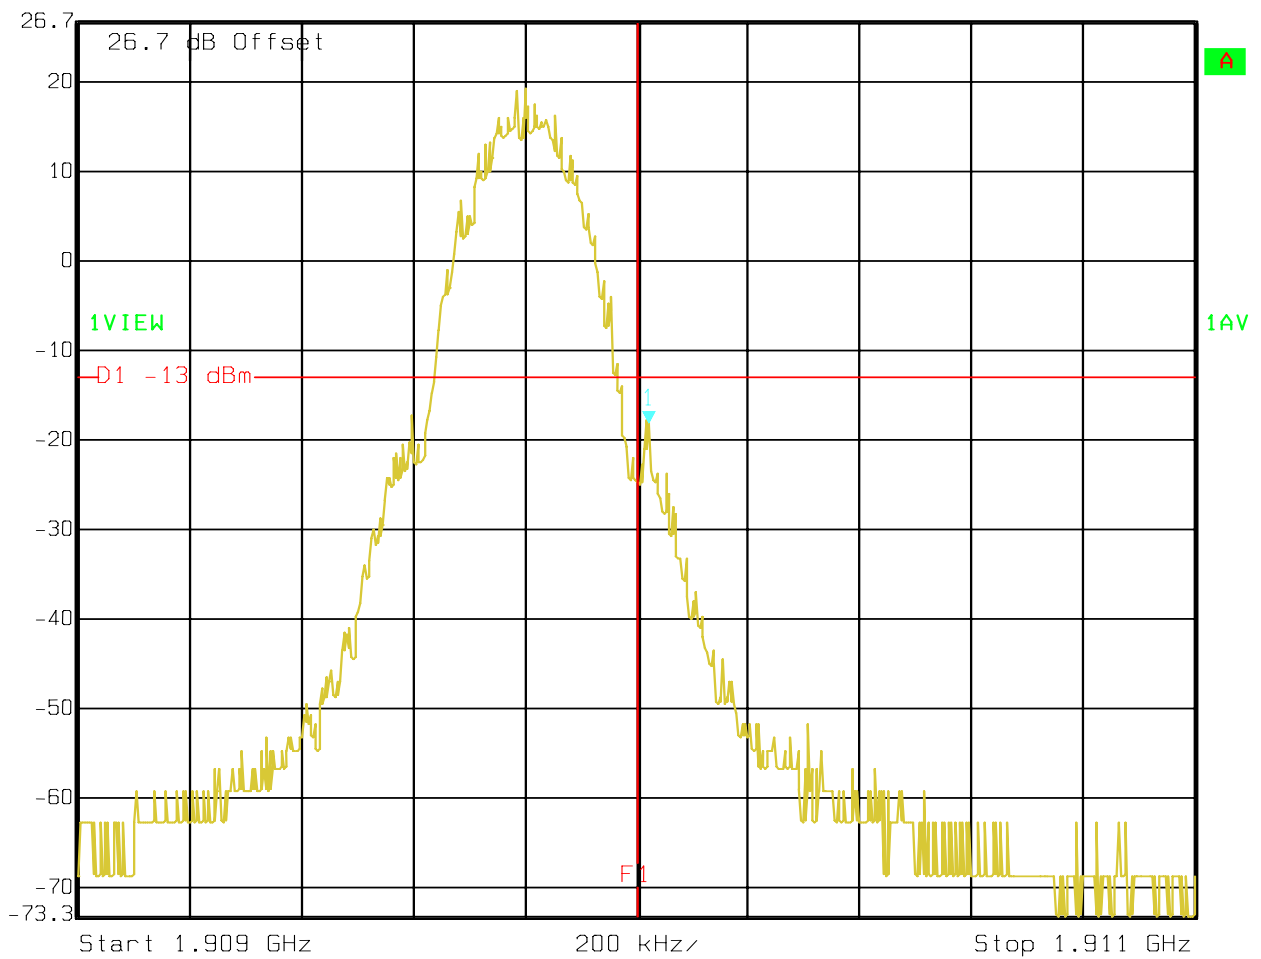

Date: 14.FEB.2006 14:06:35

**5.3.7 Conducted Spurious Results PCS-1900****CHANNEL 512 (PCS-1900)****30MHz – 20GHz****Note: The peak above the limit line is the carrier freq. at ch-512**


 Ref Lvl 36.7 dBm Marker 1 [T1] 28.54 dBm RBW 1 MHz RF Att 20 dB  
1.85020000 GHz VBW 1 MHz Unit dBm  
SWT 115 ms

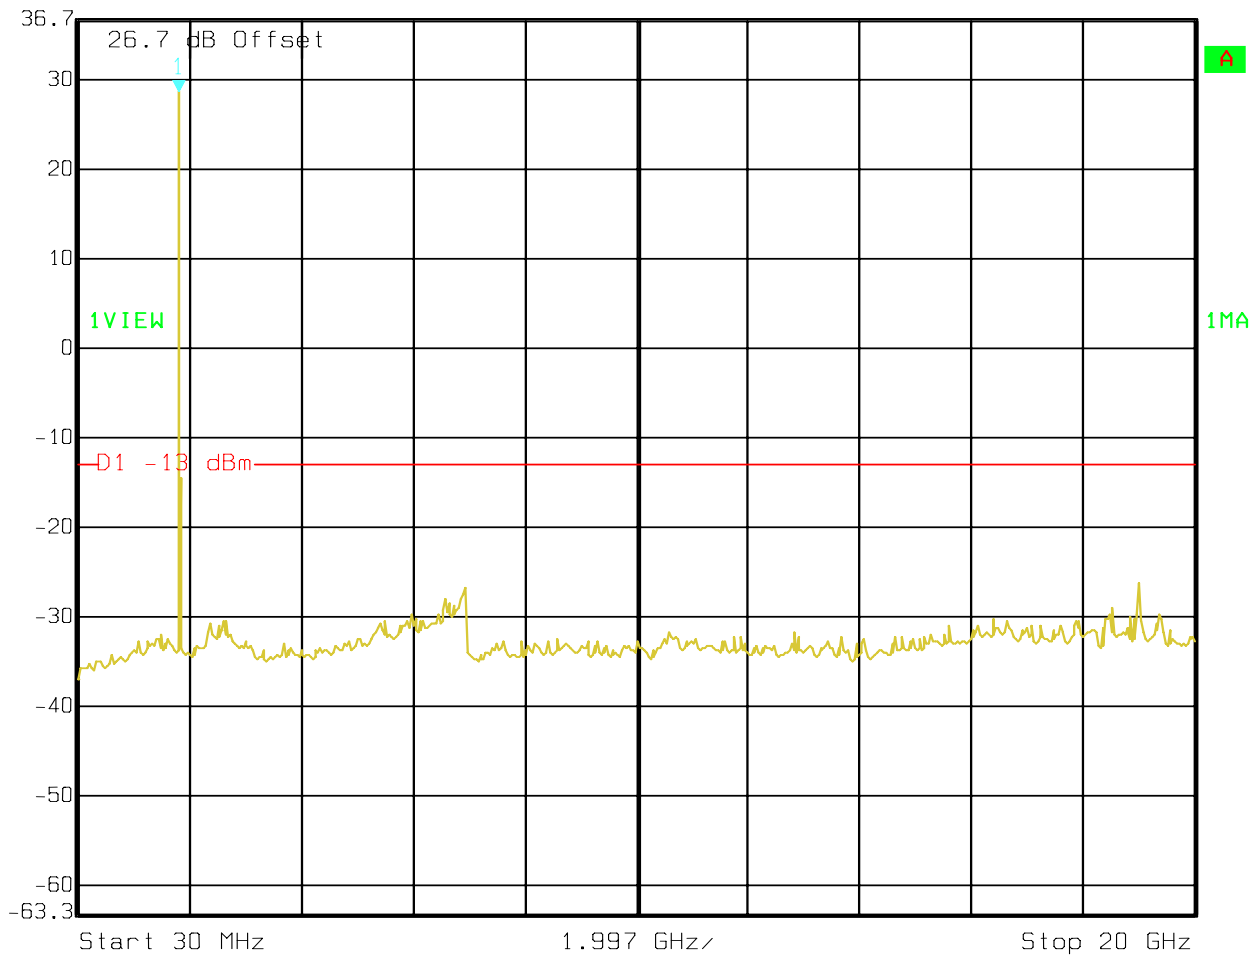

Date: 14.FEB.2006 13:54:23

**CHANNEL 661 (PCS-1900)**  
**30MHz – 20GHz****Note: The peak above the limit line is the carrier freq. at ch-661**


Ref Lvl 36.7 dBm  
Marker 1 [T1] 28.07 dBm  
1.88000000 GHz  
RBW 1 MHz RF Att 20 dB  
VBW 1 MHz  
SWT 115 ms Unit dBm

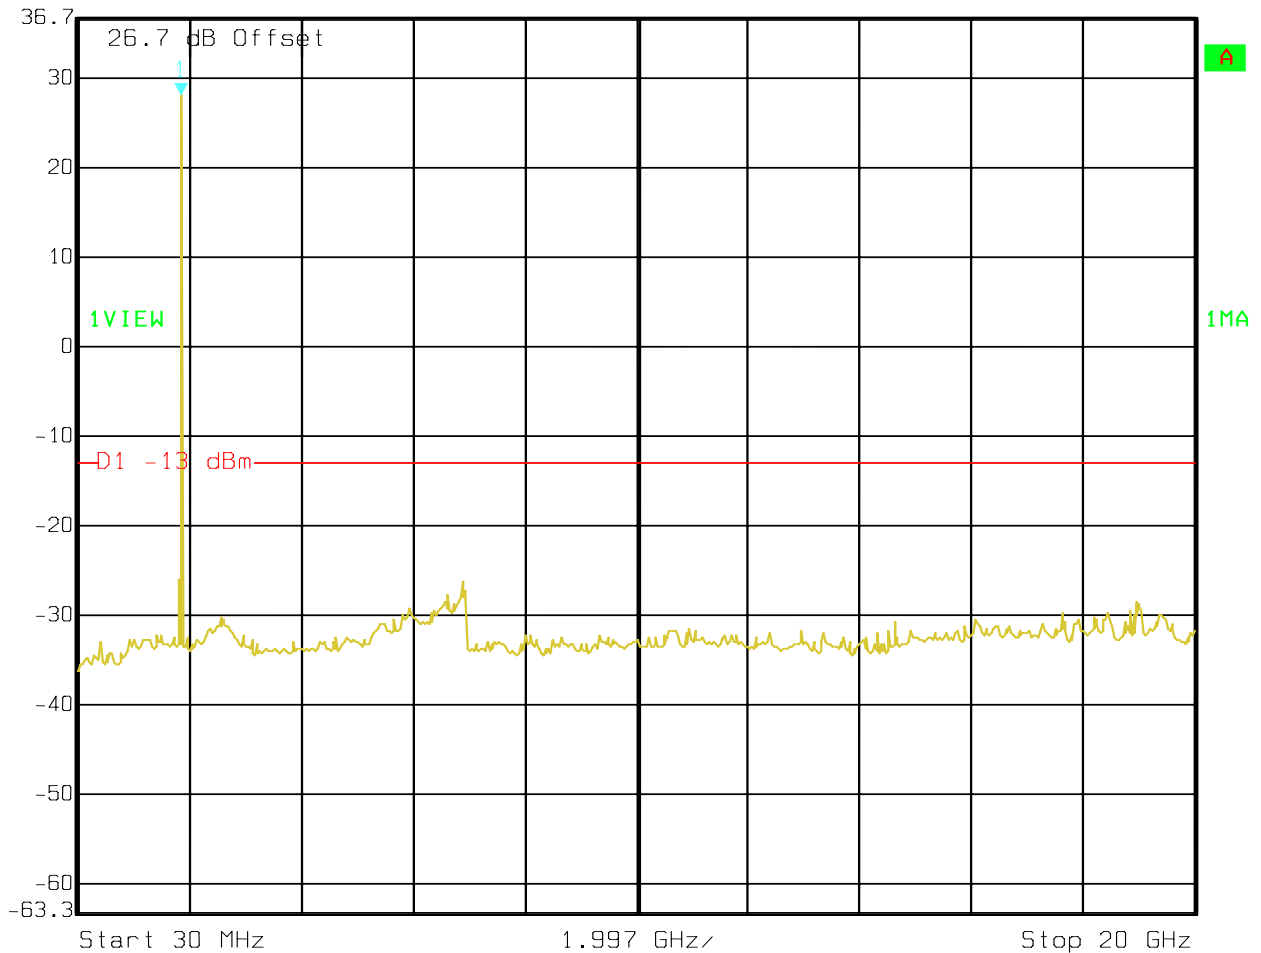

Date: 14.FEB.2006 13:53:28

**CHANNEL 810 (PCS-1900)**  
**30MHz – 20GHz****Note: The peak above the limit line is the carrier freq. at ch-810**


 Ref Lvl 36.7 dBm  
Marker 1 [T1] 27.93 dBm  
1.90980000 GHz  
RBW 1 MHz  
VBW 1 MHz  
SWT 115 ms  
RF Att 20 dB  
Unit dBm

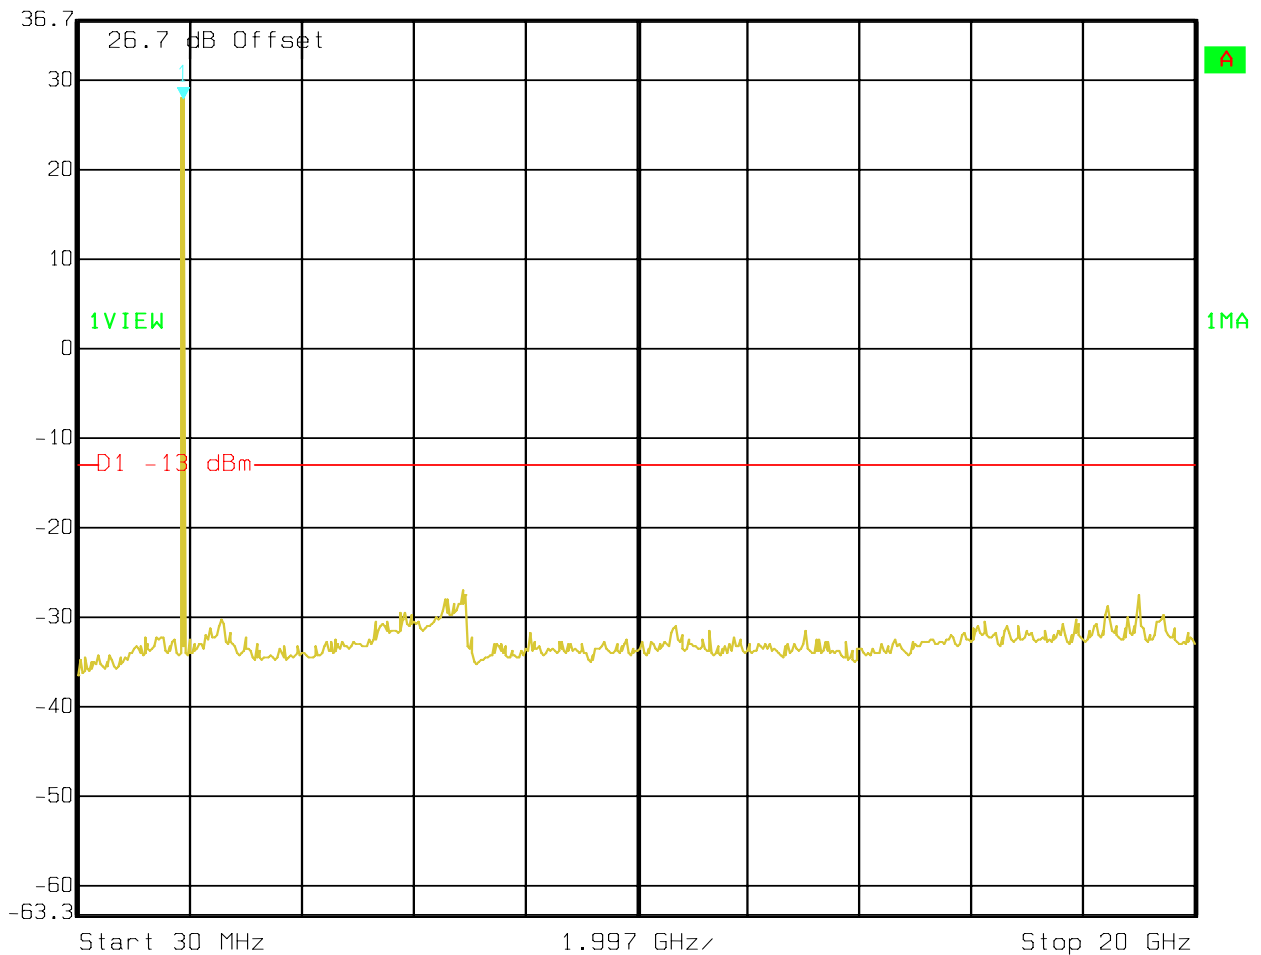

Date: 14.FEB.2006 13:55:34

**IDLE (PCS-1900)****30MHz – 20GHz**

Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl -38.24 dBm VBW 1 MHz  
26.2 dBm 6.95346693 GHz SWT 115 ms Unit dBm

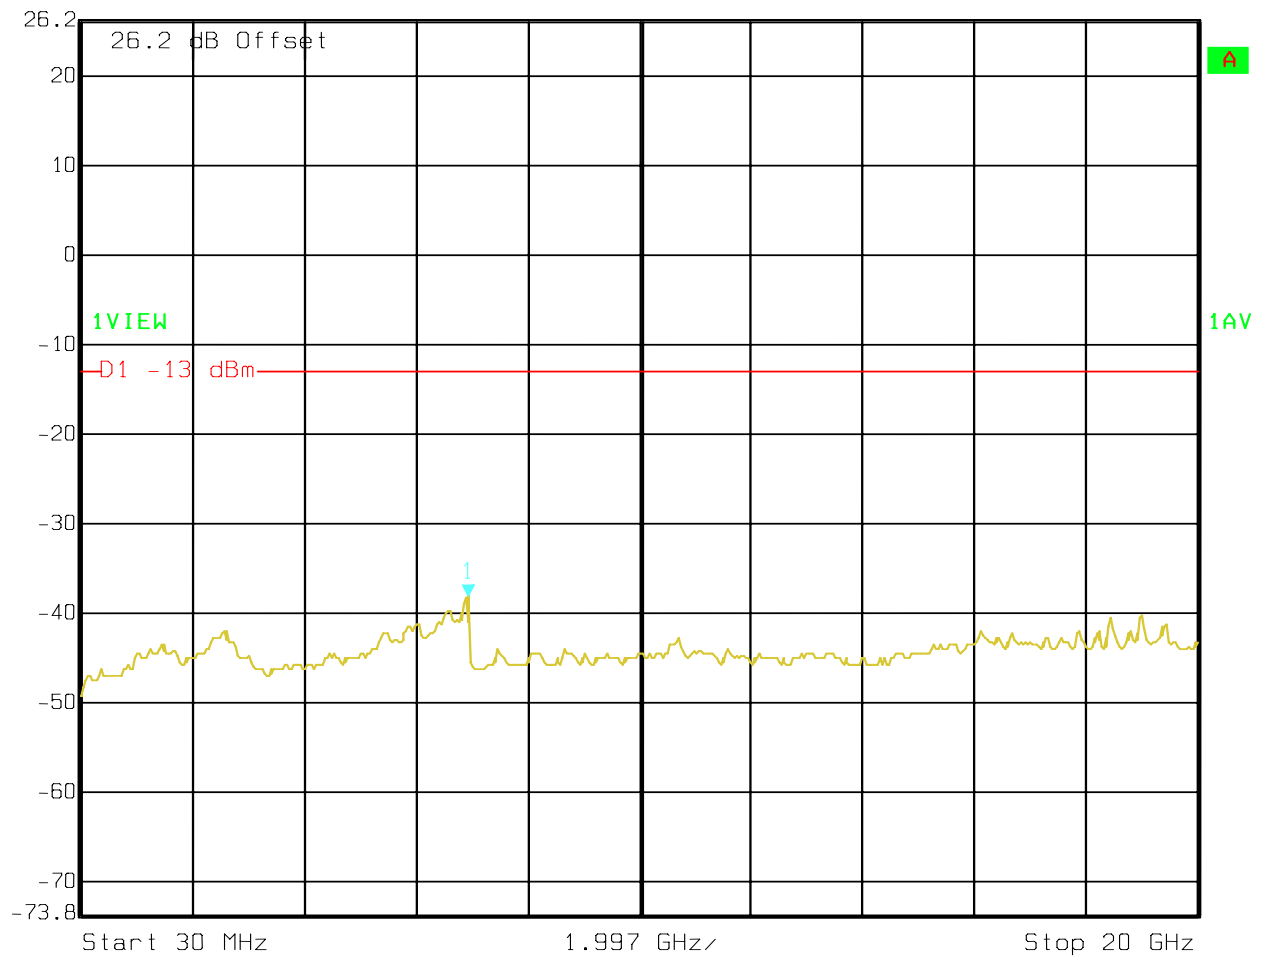

Date: 14.FEB.2006 13:38:55

## 5.4 Spurious Emissions Radiated

### 5.4.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

### 5.4.2 Limits:

#### 5.4.2.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required


measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.



### 5.4.3 Radiated out of band measurement procedure:

Based on TIA-603B November 2002

#### 2.2.12 Unwanted emissions: Radiated Spurious

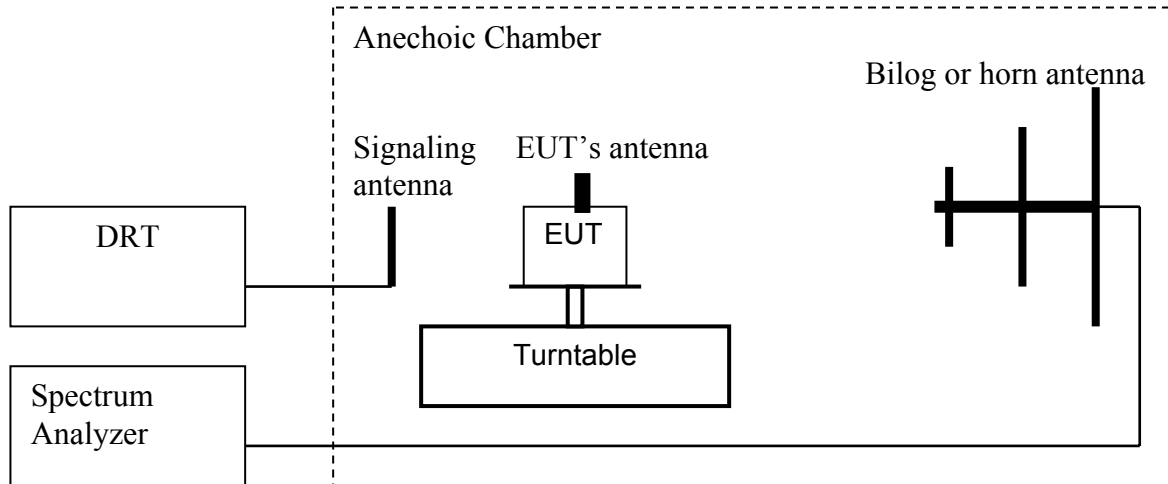

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (**LVL**) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**).  $\text{LOSS} = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$ .
7. Determine the level of spurious emissions using the following equation:  
 $\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:  
 $\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

#### Spectrum analyzer settings:

Res B/W: 1 MHz

Vid B/W: 1 MHz

### Measurement Survey:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

### RESULTS OF RADIATED TESTS GSM-850:

Harmonics	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
2	1648.4	NF	1673.2	NF	1697.6	NF
3	2472.6	NF	2509.8	NF	2546.4	NF
4	3296.8	-52.63	3346.4	-50.51	3395.2	-52.57
5	4121	-55.36	4183	-55.48	4244	-52.47
6	4945.2	NF	5019.6	NF	5092.8	NF
7	5769.4	NF	5856.2	NF	5941.6	NF
8	6593.6	NF	6692.8	NF	6790.4	NF
9	7417.8	NF	7529.4	-46.16	7639.2	-45.10
10	8242	NF	8366	-48.54	8488	NF
NF = NOISE FLOOR						

**RADIATED SPURIOUS EMISSIONS (GSM-850)****TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical*****SWEEP TABLE: "FCC 22 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

**Note:****1. The peak above the limit line is the carrier freq.****2. This plot is valid for low, mid & high channels (worst-case plot)****CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 128 GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"***

Short Description: FCC 24 30MHz-1GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

30.0 MHz 1.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

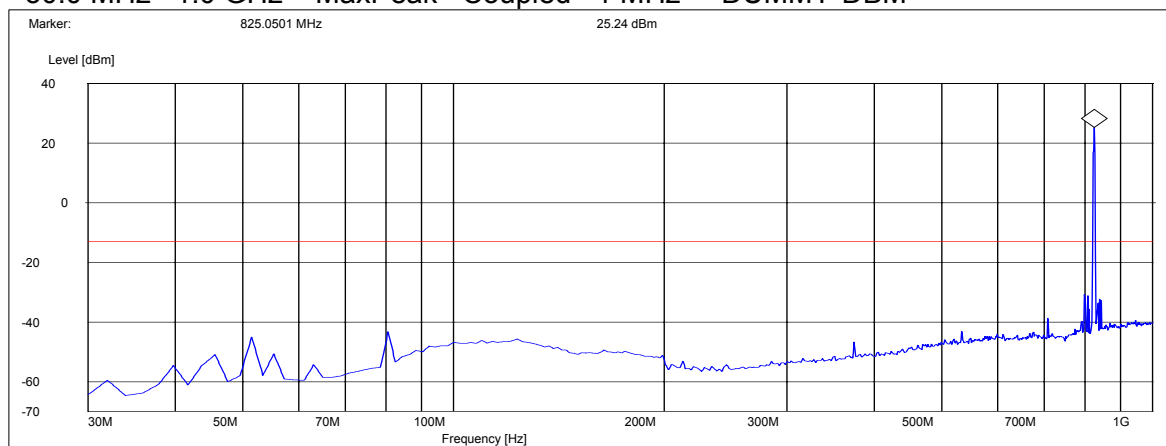

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1-1.58G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	1.58GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 128 GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 22Spuri 1-1.58G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.0 GHz 1.6 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

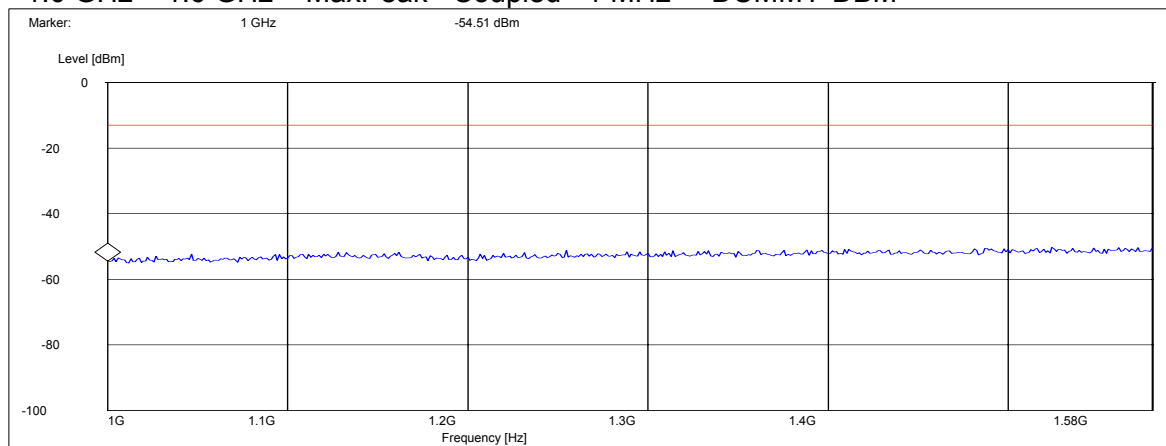

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 1.58GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1.58-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1.58GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 128 GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 22Spuri 1.58-3G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.6 GHz 3.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

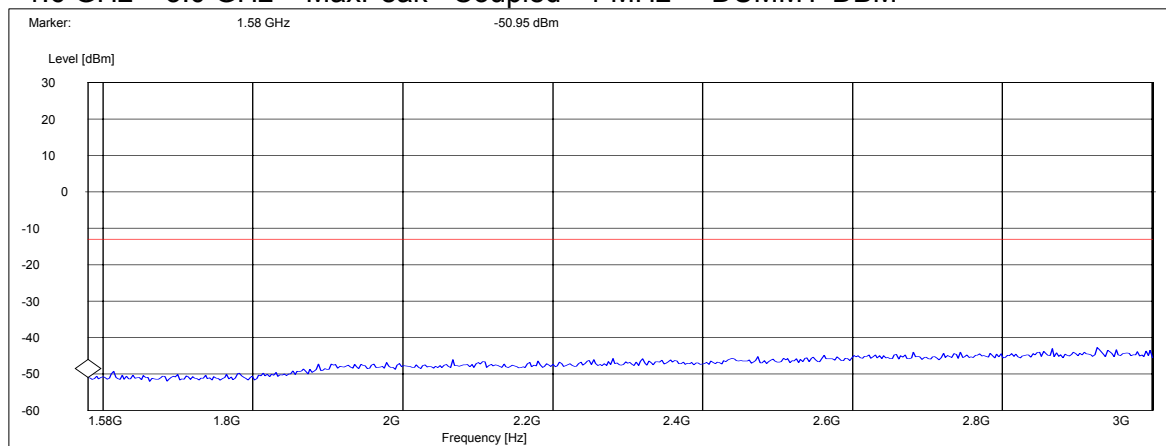

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 3GHz – 9GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 3-9G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	9GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 128 GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 22Spuri 3-9G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

3.0 GHz 9.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

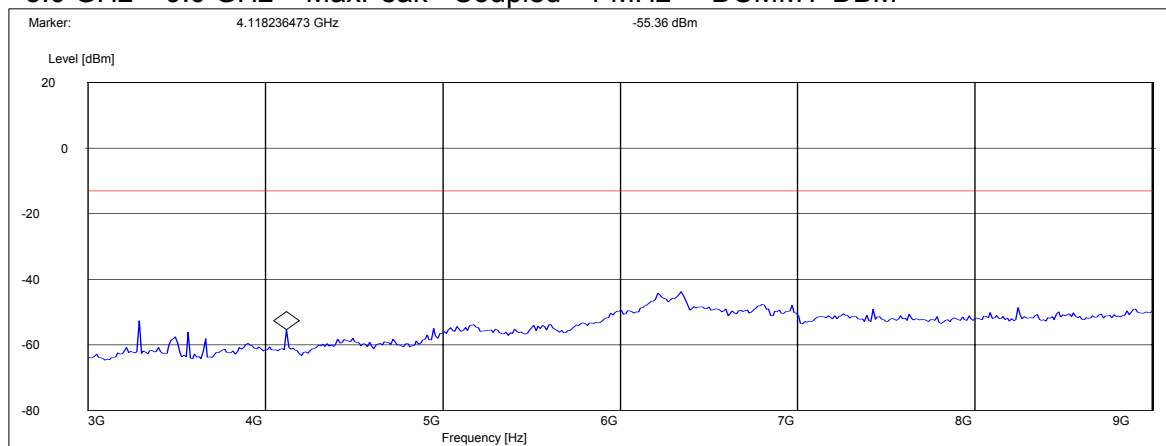

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 836.6MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1-1.58G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	1.58GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 190 GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 22Spuri 1-1.58G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.0 GHz 1.6 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

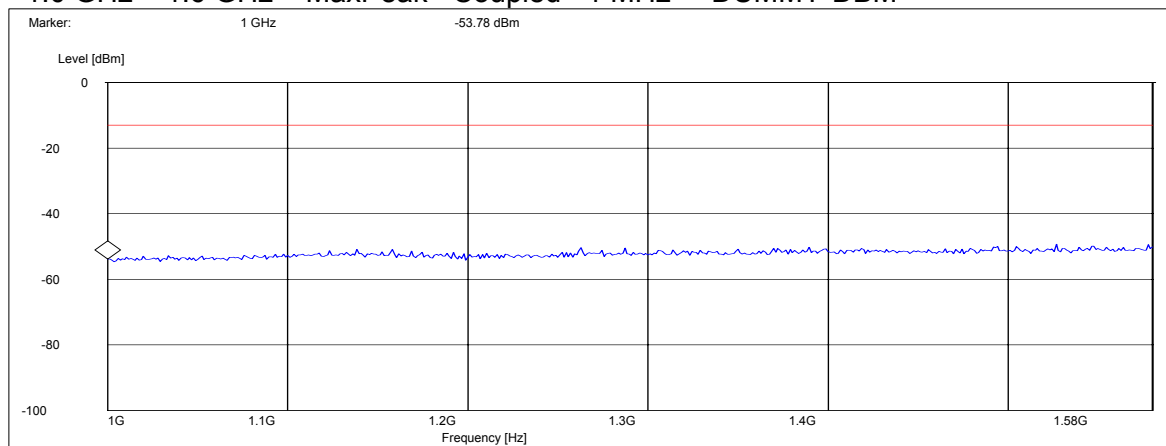

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 836.6MHz: 1.58GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1.58-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1.58GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 190 GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 22Spuri 1.58-3G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.6 GHz 3.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

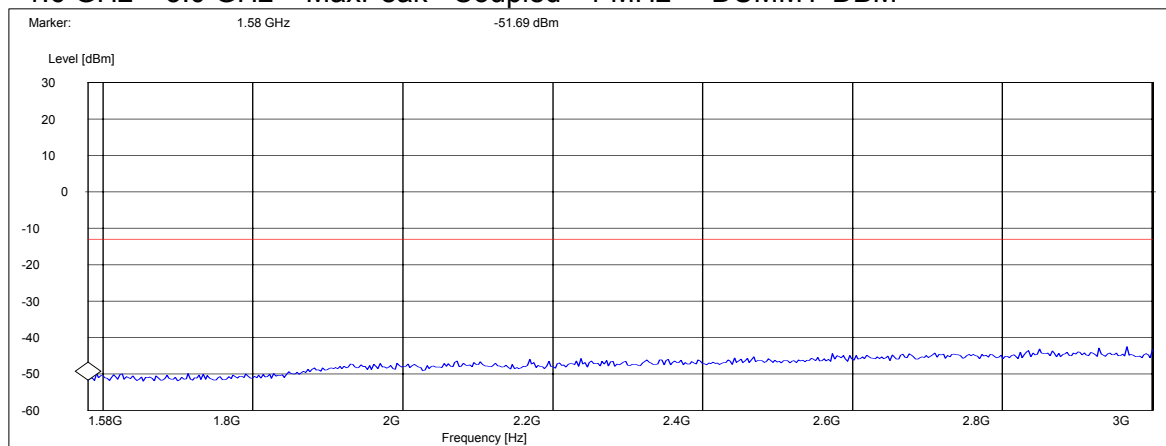



**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 836.6MHz: 3GHz – 9GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 3-9G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	9GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 190 GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 22Spuri 3-9G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

3.0 GHz 9.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

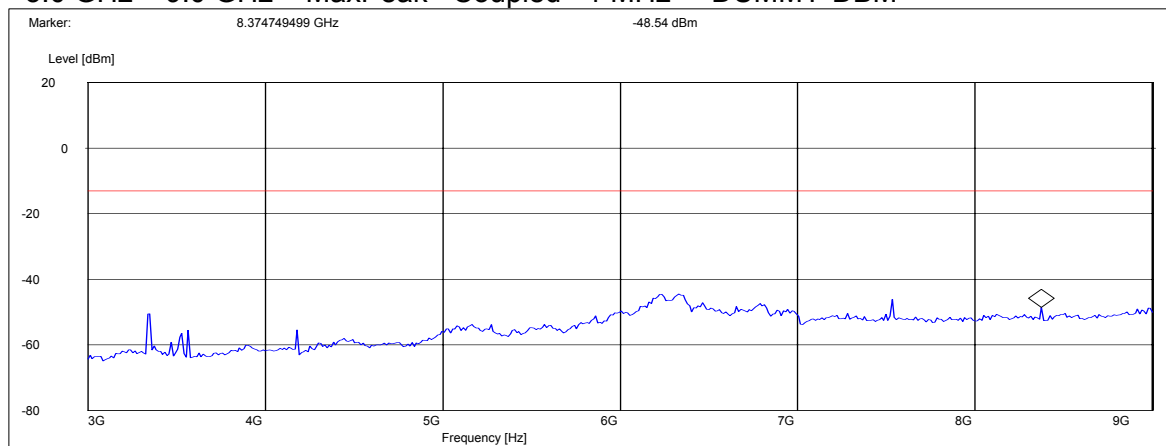

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 848.8MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1-1.58G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	1.58GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 251 GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 22Spuri 1-1.58G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.0 GHz 1.6 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

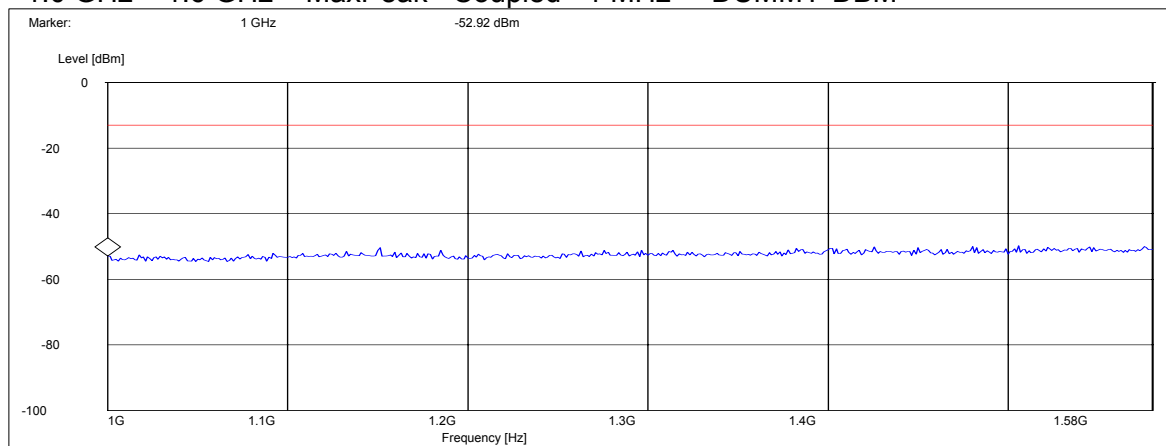

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 848.8MHz: 1.58GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1.58-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1.58GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 251 GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 22Spuri 1.58-3G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.6 GHz 3.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

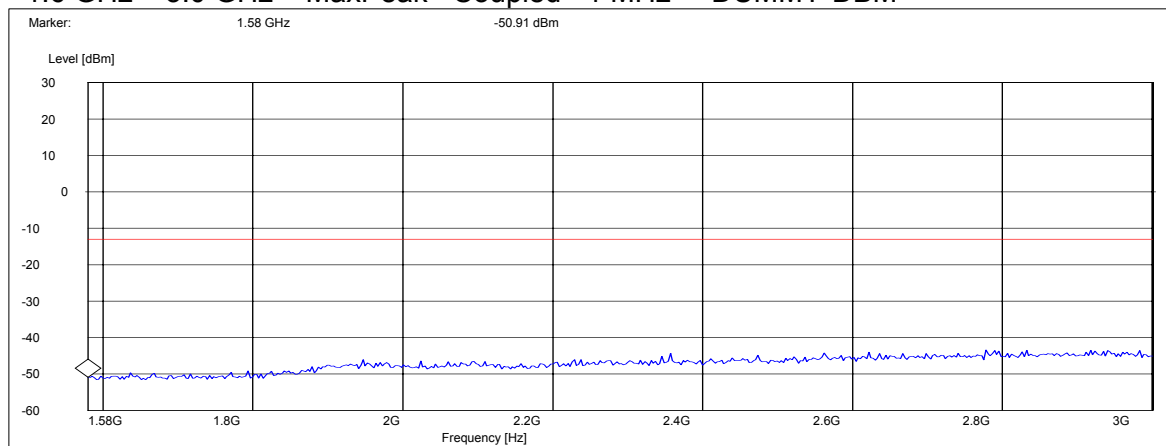

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 848.8MHz: 3GHz – 9GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 3-9G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	9GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 251 GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 22Spuri 3-9G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

3.0 GHz 9.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

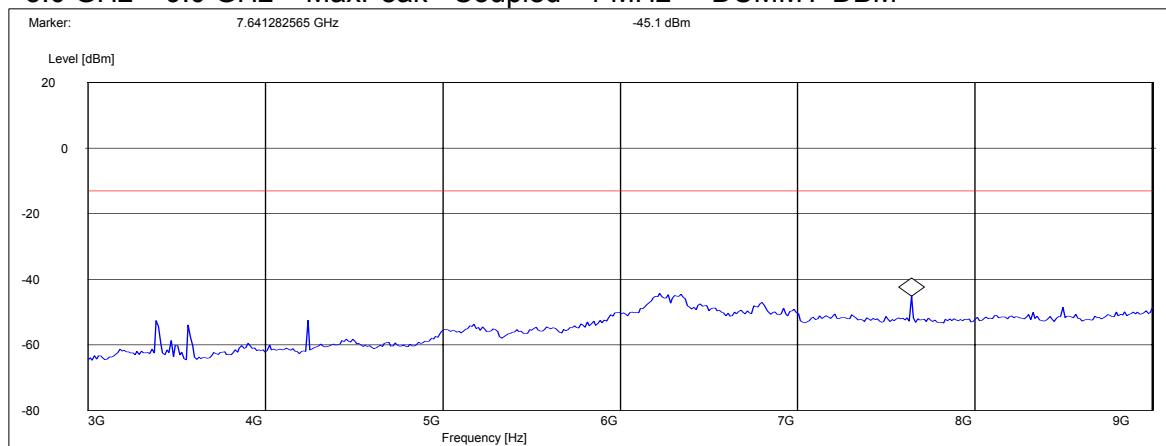

**RADIATED SPURIOUS EMISSIONS (GSM-850)****IDLE: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical*****SWEEP TABLE: "FCC 22 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: Idle GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"***

Short Description: FCC 24 30MHz-1GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

30.0 MHz 1.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

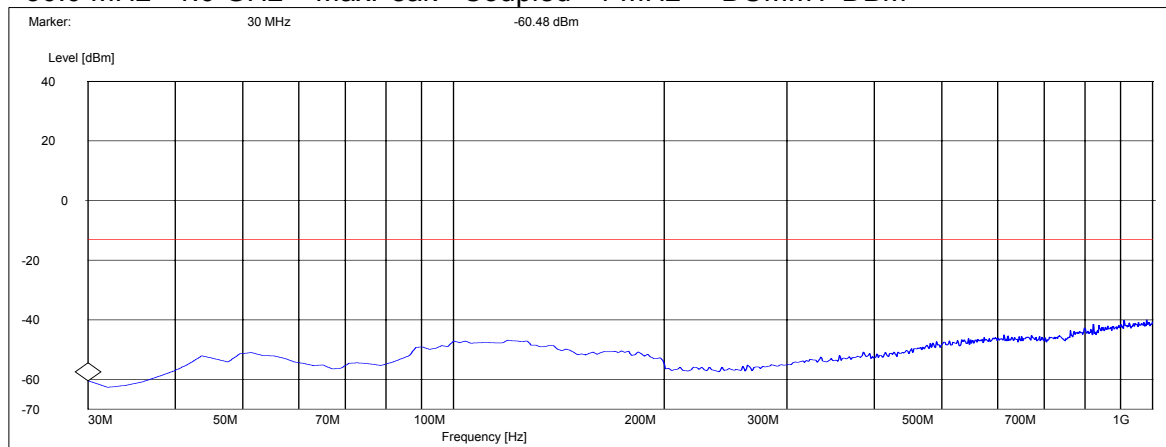

**RADIATED SPURIOUS EMISSIONS (GSM-850)****IDLE: 1GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: Idle GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 24Spuri 1-3G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.0 GHz 3.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

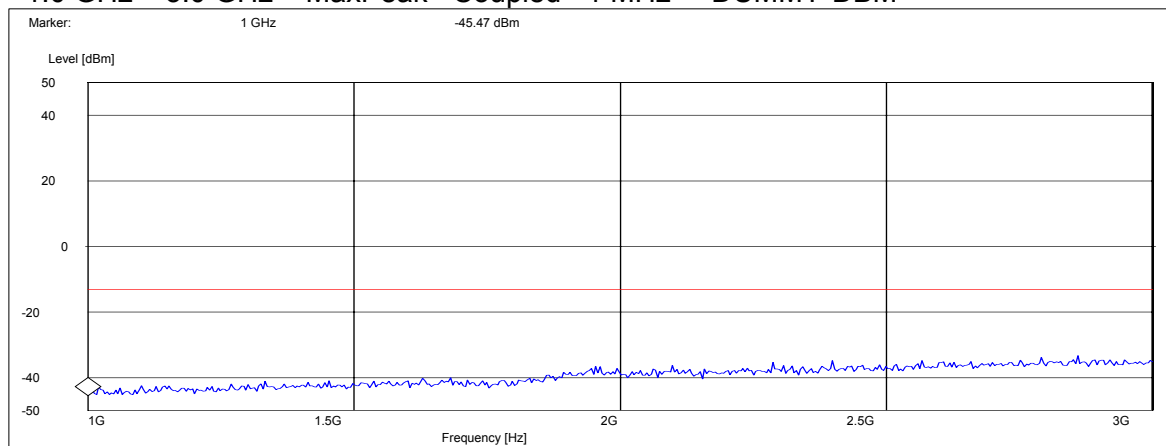

**RADIATED SPURIOUS EMISSIONS (GSM-850)****IDLE: 3GHz – 9GHz*****SWEEP TABLE: "FCC 22 Spur 3-9G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	9GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: Idle GSM 850

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 22Spuri 3-9G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

3.0 GHz 9.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

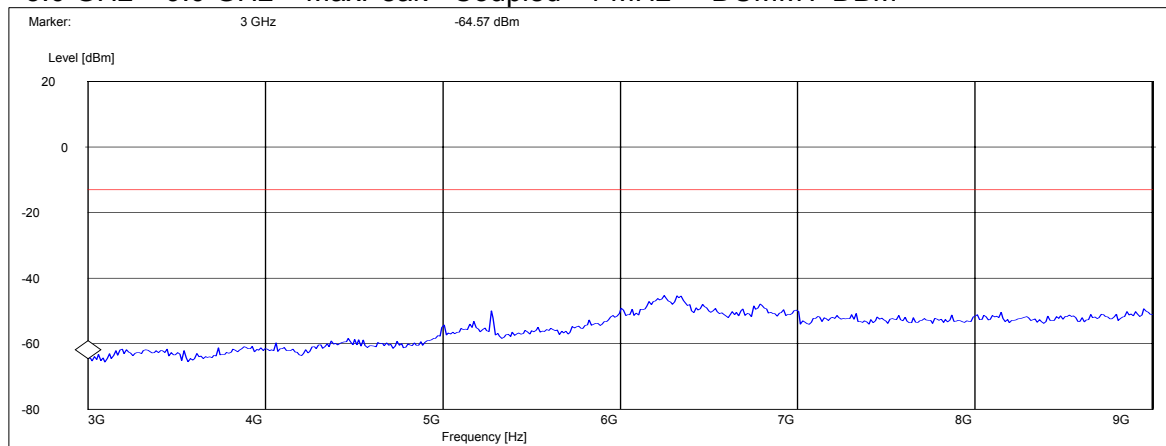

**RESULTS OF RADIATED TESTS PCS-1900:**

<b>Harmonic</b>	<b>Tx ch-512 Freq.(MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-661 Freq. (MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-810 Freq. (MHz)</b>	<b>Level (dBm)</b>
<b>2</b>	<b>3700.4</b>	-41.20	<b>3760</b>	-43.29	<b>3819.6</b>	-45.91
<b>3</b>	<b>5550.6</b>	-43.77	<b>5640</b>	-44.65	<b>5729.4</b>	-49.41
<b>4</b>	<b>7400.8</b>	NF	<b>7520</b>	NF	<b>7639.2</b>	NF
<b>5</b>	<b>9251</b>	-35.52	<b>9400</b>	-31.38	<b>9549</b>	-28.79
<b>6</b>	<b>11101.2</b>	-29.99	<b>11280</b>	-31.07	<b>11458.8</b>	-29.91
<b>7</b>	<b>12951.4</b>	NF	<b>13160</b>	NF	<b>13368.6</b>	NF
<b>8</b>	<b>14801.6</b>	NF	<b>15040</b>	NF	<b>15278.4</b>	NF
<b>9</b>	<b>16651.8</b>	NF	<b>16920</b>	NF	<b>17188.2</b>	NF
<b>10</b>	<b>18502</b>	NF	<b>18800</b>	NF	<b>19098</b>	NF
NF = NOISE FLOOR						



**RADIATED SPURIOUS EMISSIONS(PCS 1900)****TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical*****SWEEP TABLE: "FCC 24 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

**Note: This plot is valid for low, mid & high channels (worst-case plot)****CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 661 GSM 1900

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"***

Short Description: FCC 24 30MHz-1GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

30.0 MHz 1.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

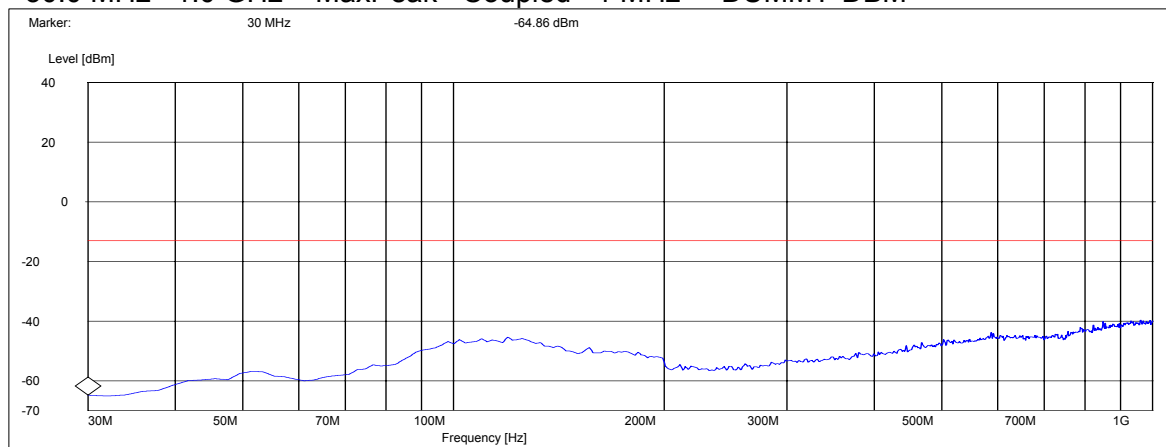

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1850.2MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

**Note: The peak above the limit line is the carrier freq. at ch-512.****CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 512 GSM 1900

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 24Spuri 1-3G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.0 GHz 3.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

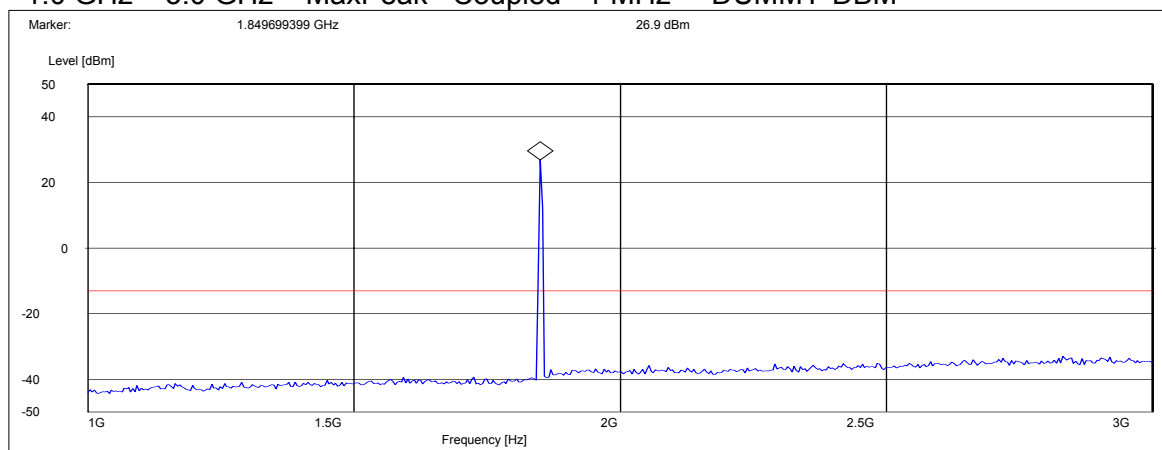

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1850.2MHz: 3GHz – 18GHz**

Spurious emission limit -13dBm

***SWEEP TABLE: "FCC Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 512 GSM 1900

Antenna: v

EUT: v


Test operator: Pete

Voltage: normal

Comment:

***SWEEP TABLE: "FCC 24Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

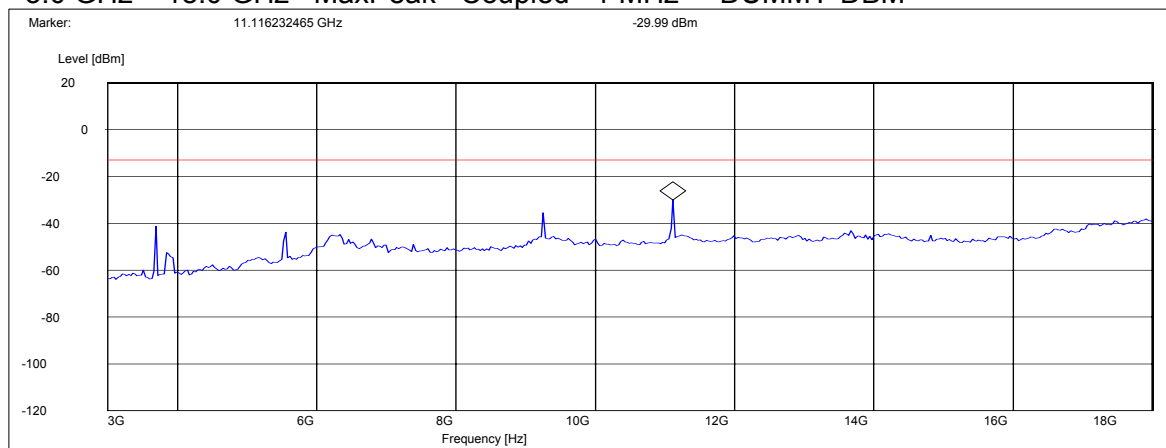

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1880.0MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

**Note: The peak above the limit line is the carrier freq. at ch-661.****CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 661 GSM 1900

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 24Spuri 1-3G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.0 GHz 3.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

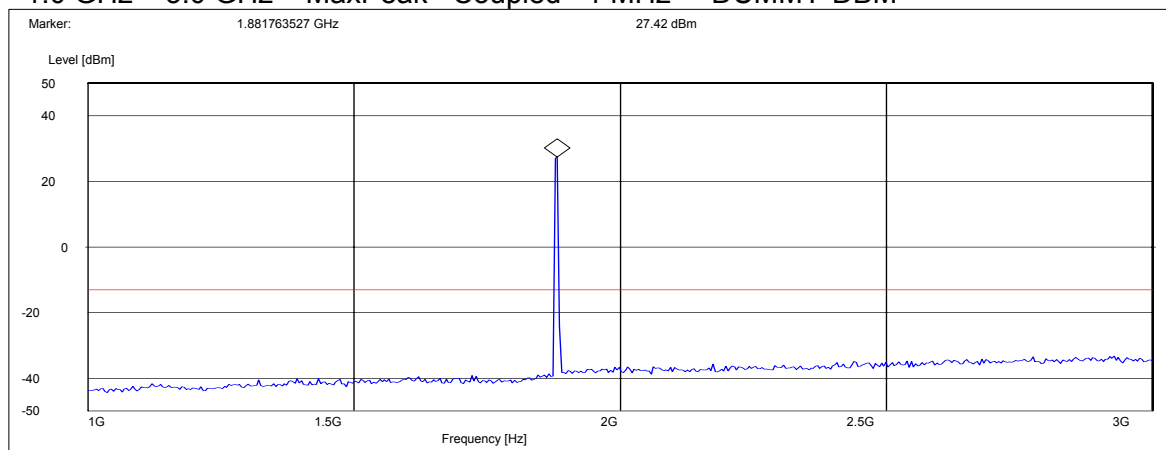

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1880.0MHz: 3GHz – 18GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 661 GSM 1900

Antenna: v

EUT: v


Test operator: Pete

Voltage: normal

Comment:

***SWEEP TABLE: "FCC 24Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

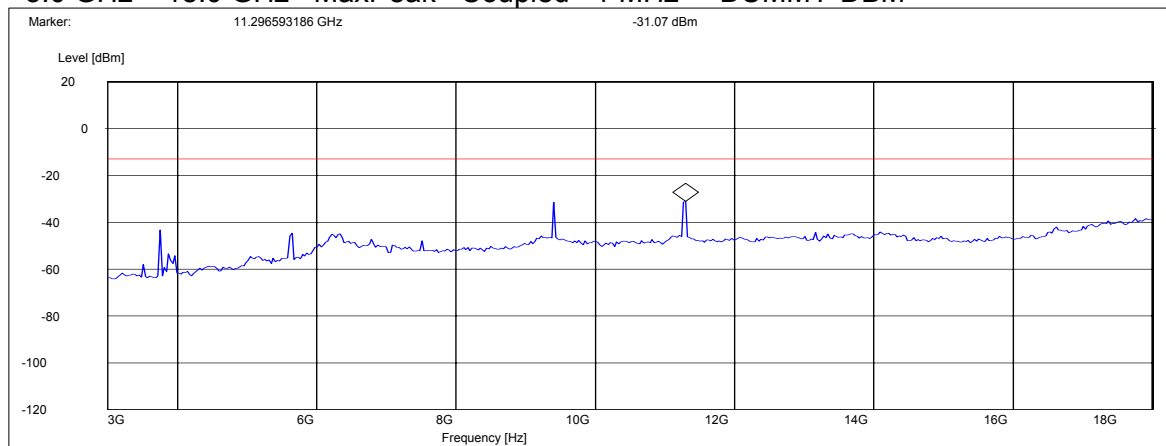

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1909.8MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

**Note: The peak above the limit line is the carrier freq. at ch-810.****CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 810 GSM 1900

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 24Spuri 1-3G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.0 GHz 3.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

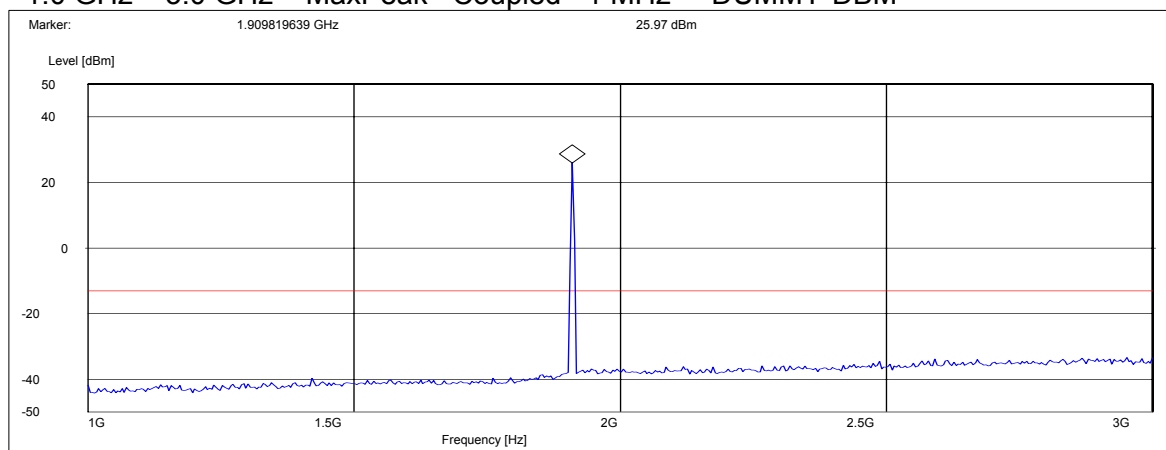

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1909.8MHz: 3GHz – 18GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 810 GSM 1900

Antenna: v

EUT: v


Test operator: Pete

Voltage: normal

Comment:

***SWEEP TABLE: "FCC 24Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

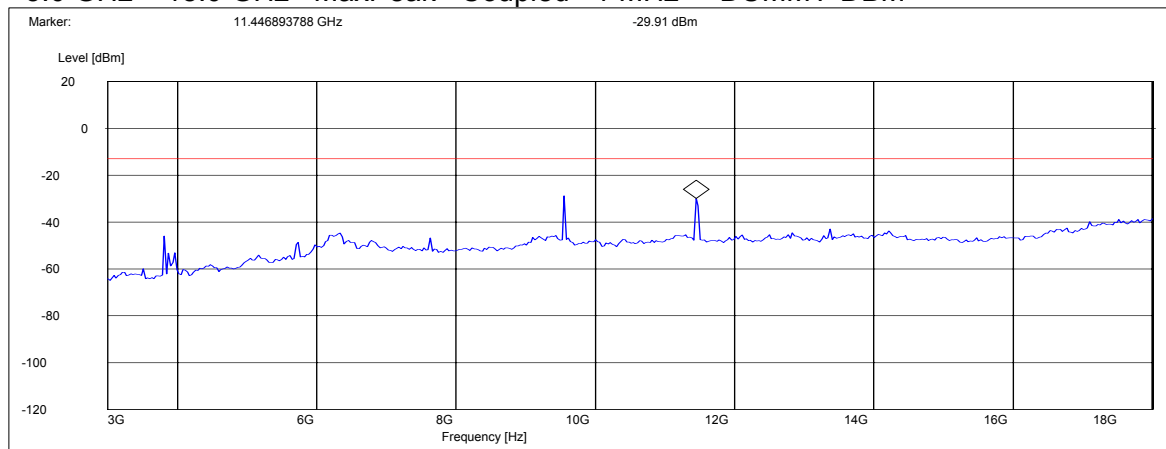

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****18GHz – 19.1GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 24 spuri 18-19.1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz	1 MHz

**Note: This plot is valid for low, mid & high channels (worst-case plot)**  
**CETECOM Inc.**

**411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: TX Ch 512 GSM 1900

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 24spuri 18-19.1G"***

Short Description: FCC 24 18GHz-19.1GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

18.0 GHz 19.1 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

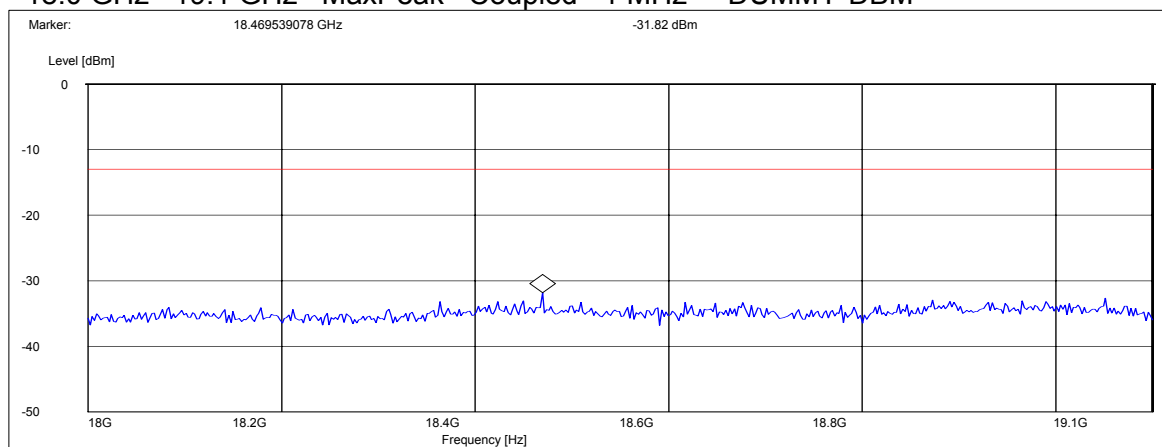



**RADIATED SPURIOUS EMISSIONS (IDLE MODE)****EUT in Idle Mode: 30MHz – 1GHz**

Spurious emission limit –13dBm

**Antenna: vertical*****SWEEP TABLE: "FCC 22 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: Idle GSM 1900

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 24 Spur 30M-1G\_V"***

Short Description: FCC 24 30MHz-1GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

30.0 MHz 1.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

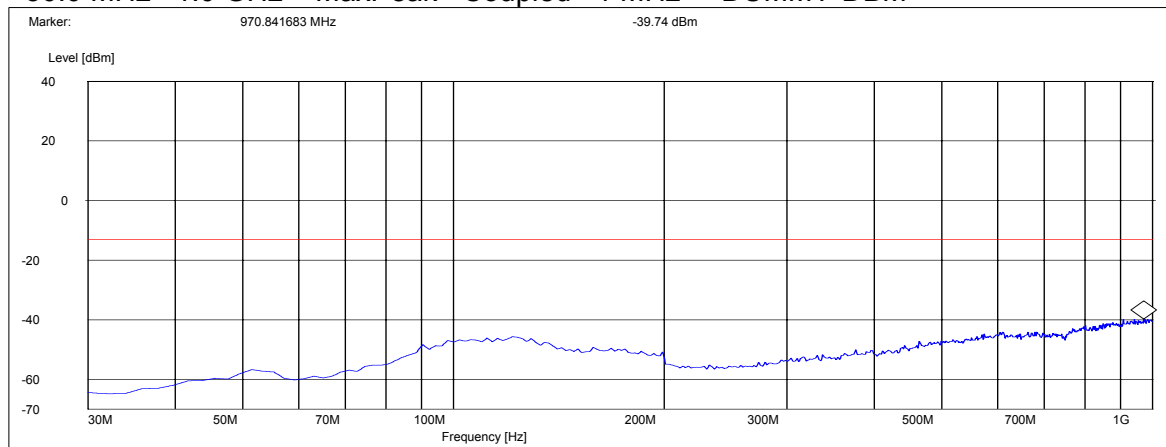

**RADIATED SPURIOUS EMISSIONS (IDLE MODE)****EUT in Idle Mode: 1GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: Idle GSM 1900

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 24Spuri 1-3G"***

Short Description: FCC 24 1GHz-8GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.0 GHz 3.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

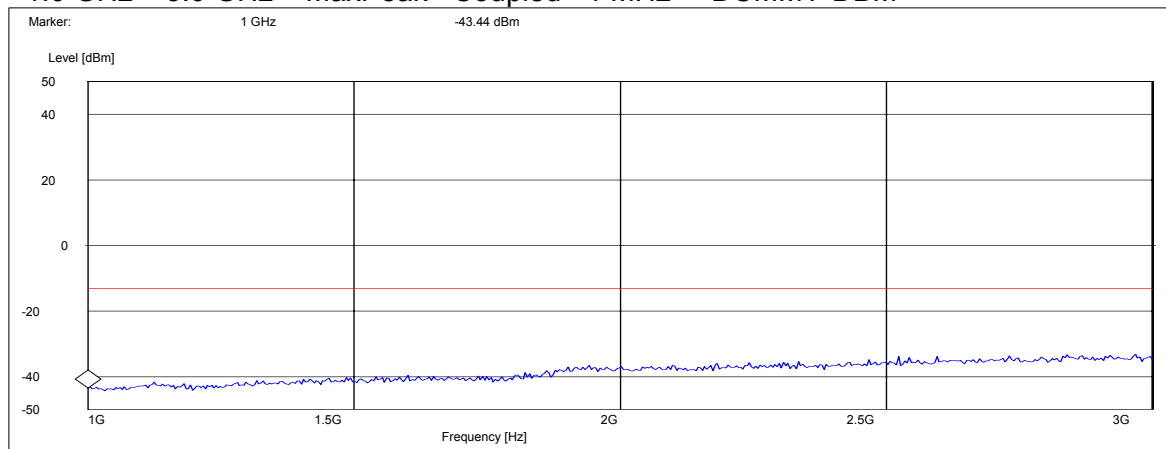

**RADIATED SPURIOUS EMISSIONS (IDLE MODE)****EUT in Idle Mode: 3GHz – 18GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 24 spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: Idle GSM 1900

Antenna: v

EUT: v


Test operator: Pete

Voltage: normal

Comment:

***SWEEP TABLE: "FCC 24Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

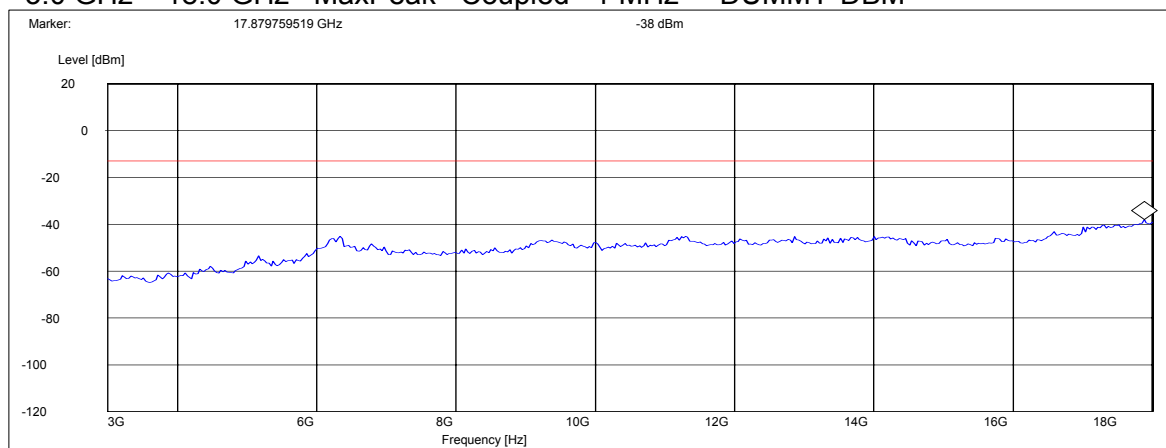

**RADIATED SPURIOUS EMISSIONS (IDLE MODE)****EUT in Idle Mode: 18GHz – 19.1GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 24 spuri 18-19.1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz	1 MHz

**CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: Idle GSM 1900

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal

Comment:


***SWEEP TABLE: "FCC 24spuri 18-19.1G"***

Short Description: FCC 24 18GHz-19.1GHz

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

18.0 GHz 19.1 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

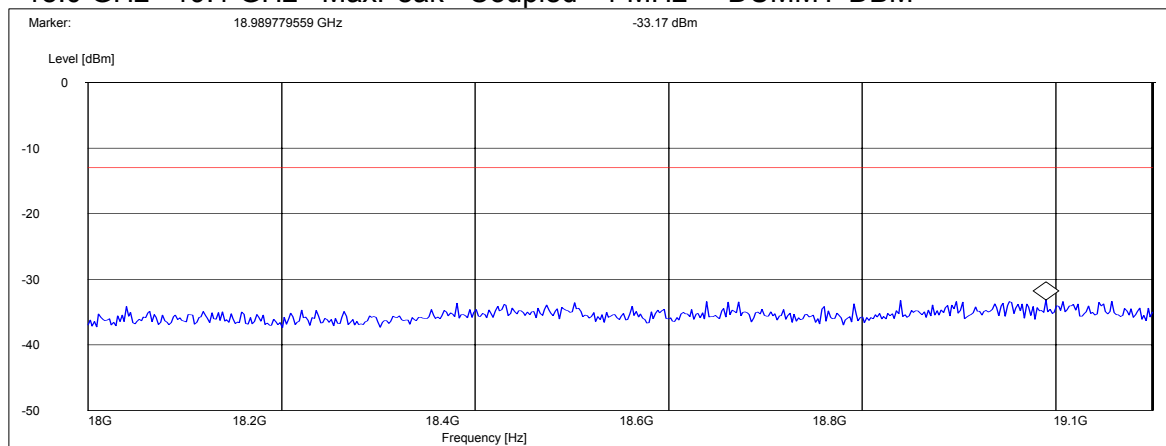

**5.5 RECEIVER RADIATED EMISSIONS****§ 2.1053 / RSS-132 & 133****NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

**Limits****SUBCLAUSE § RSS-133**

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**5.5.1 Receiver Spurious on EUT****RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 30MHz – 1GHz****Antenna: vertical****SWEEP TABLE: "FCC Spur 30M-1G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

**Note: Peak Reading Vs. Quasi-Peak Limit.****CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: RX GSM 1900

Antenna: v

EUT: v


Test operator: Pete

Voltage: normal

Comment:

**SWEEP TABLE: "CANADA RE\_30M-1G\_Ver"**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

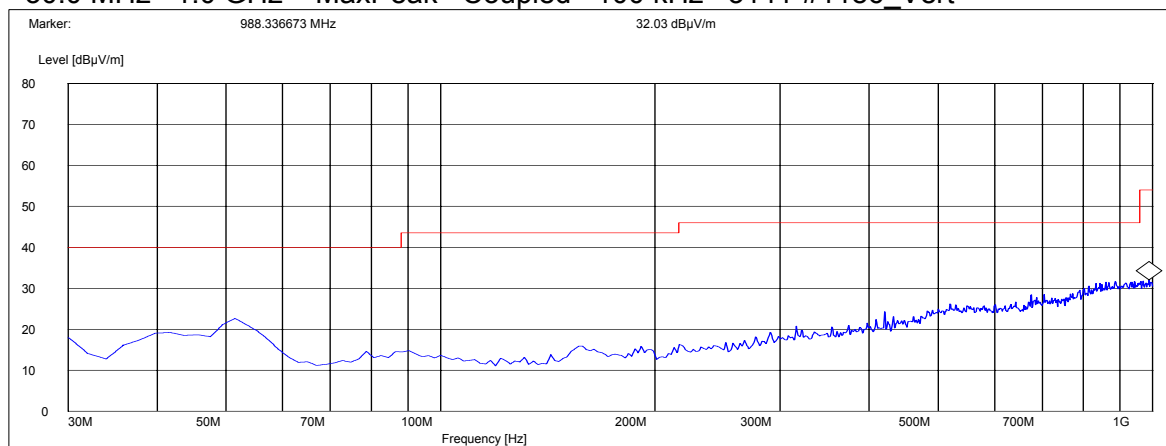

**RECEIVER RADIATED EMISSIONS**  
**RECEIVER RADIATED EMISSIONS**  
**EUT in Idle Mode: 1GHz – 3GHz**

***SWEEP TABLE: "FCC Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz


**Note: Peak Reading Vs. Average Limit.**  
**CETECOM Inc.**

**411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a  
 Customer: BenQ Mobile  
 Operating Mode: RX GSM 1900  
 Antenna: v  
 EUT: v  
 Test operator: Pete  
 Voltage: normal  
 Comment:

***SWEEP TABLE: "CANADA RE\_1-3G"***

Start Stop Detector Meas. IF Transducer  
 Frequency Frequency Time Bandw.  
 1.0 GHz 3.0 GHz MaxPeak Coupled 1 MHz #326horn\_AF\_vert

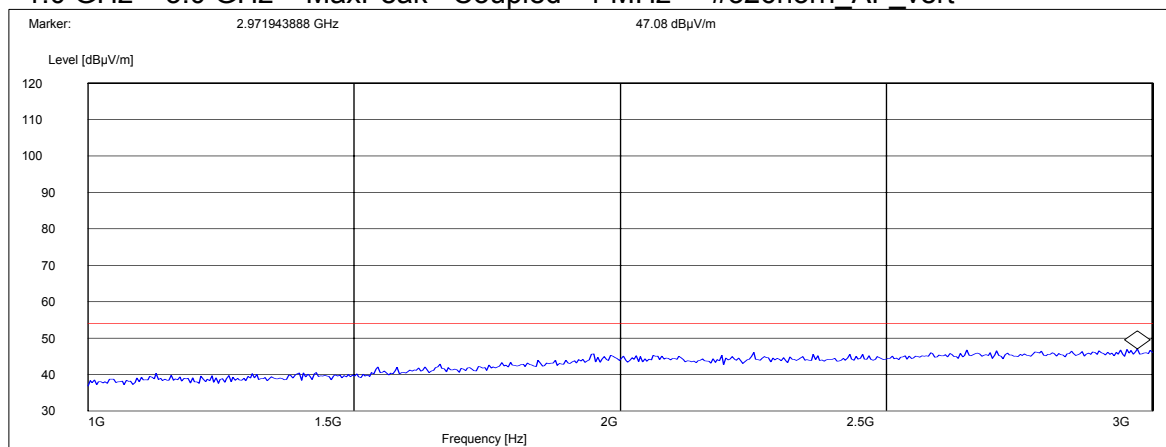

**RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 3GHz – 18GHz*****SWEEP TABLE: "FCC spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

**Note: Peak Reading Vs. Average Limit.****CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: RX GSM 1900

Antenna: v

EUT: v


Test operator: Pete

Voltage: normal

Comment:

***SWEEP TABLE: "CANADA RE\_3-18G"***

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

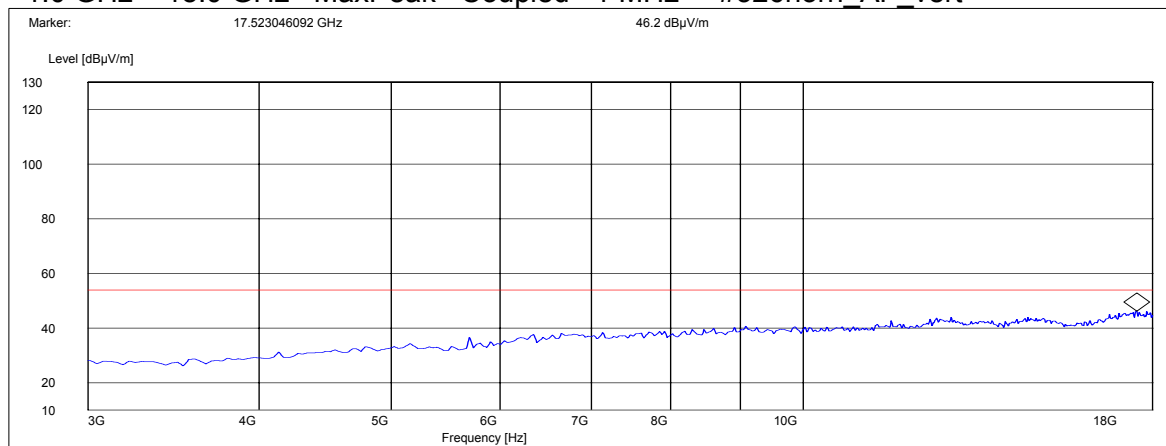



**RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 18GHz – 19.1GHz*****SWEEP TABLE: "FCC spuri 18-19.1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz	1 MHz

**Note: Peak Reading Vs. Average Limit.****CETECOM Inc.****411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT / Description: A31a

Customer: BenQ Mobile

Operating Mode: RX GSM 1900

Antenna: v

EUT: v

Test operator: Pete

Voltage: normal


Comment:

***SWEEP TABLE: "CANADA RE\_18-26.5G"***

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

18.0 GHz 26.5 GHz MaxPeak Coupled 1 MHz 3160 Horn 18-26.5G

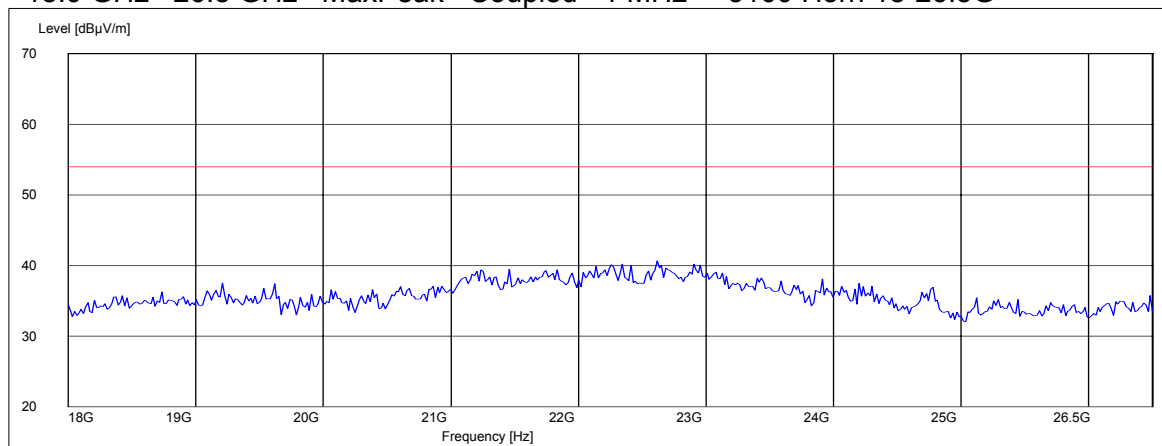

**5.6 AC POWERLINE CONDUCTED EMISSIONS****§ 15.107/207**

Measured with AC/DC power adapter Siemens model#A5BH00102612

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

**Limit**

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

**5.6.1 Results EUT****LISN****LISN****411 Dixon Landing Road, CA 95035**

EUT / Description: A31a

Manufacturer: BenQ

Test mode: tx

Test Engineer: Pete

Phase: I+n

Comment: 120vac

Start of Test: 2/21/2006 / 4:33:07PM

**SCAN TABLE: "EN 55022 Voltage"**


Short Description: EN 55022 Voltage

Start Stop Step Detector Meas. IF Transducer

Frequency Frequency Width Time Bandw.

150.0 kHz 30.0 MHz 5.0 kHz MaxPeak 10.0 ms 9 kHz None

Average

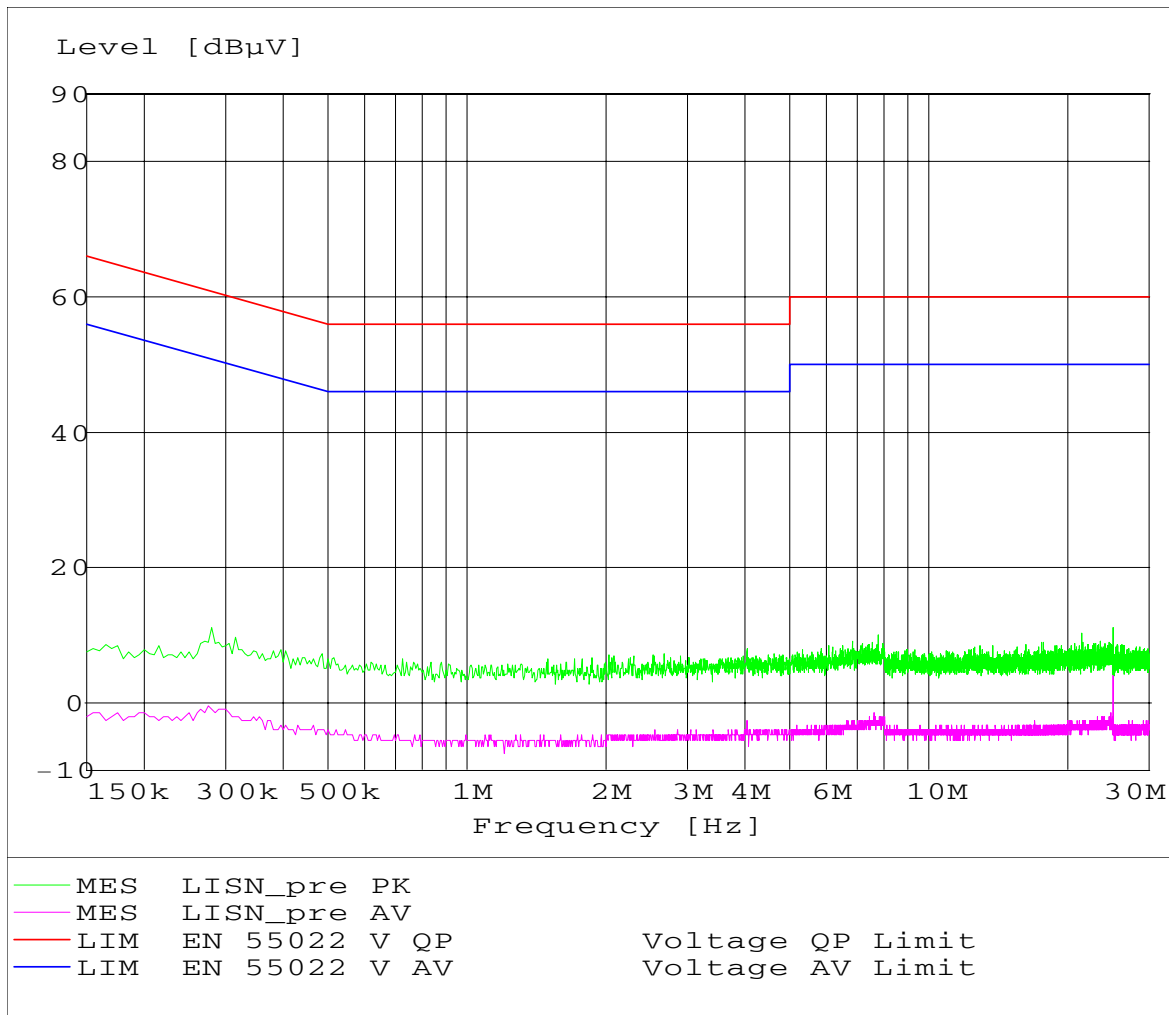

## 6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2006	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2006	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2006	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2006	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2006	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2006	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2006	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2006	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2006	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2006	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2006	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2006	1 year

## **7 References**

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,  
PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.


FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,  
PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-B-2003 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.

## 8 BLOCK DIAGRAMS

### Conducted Testing

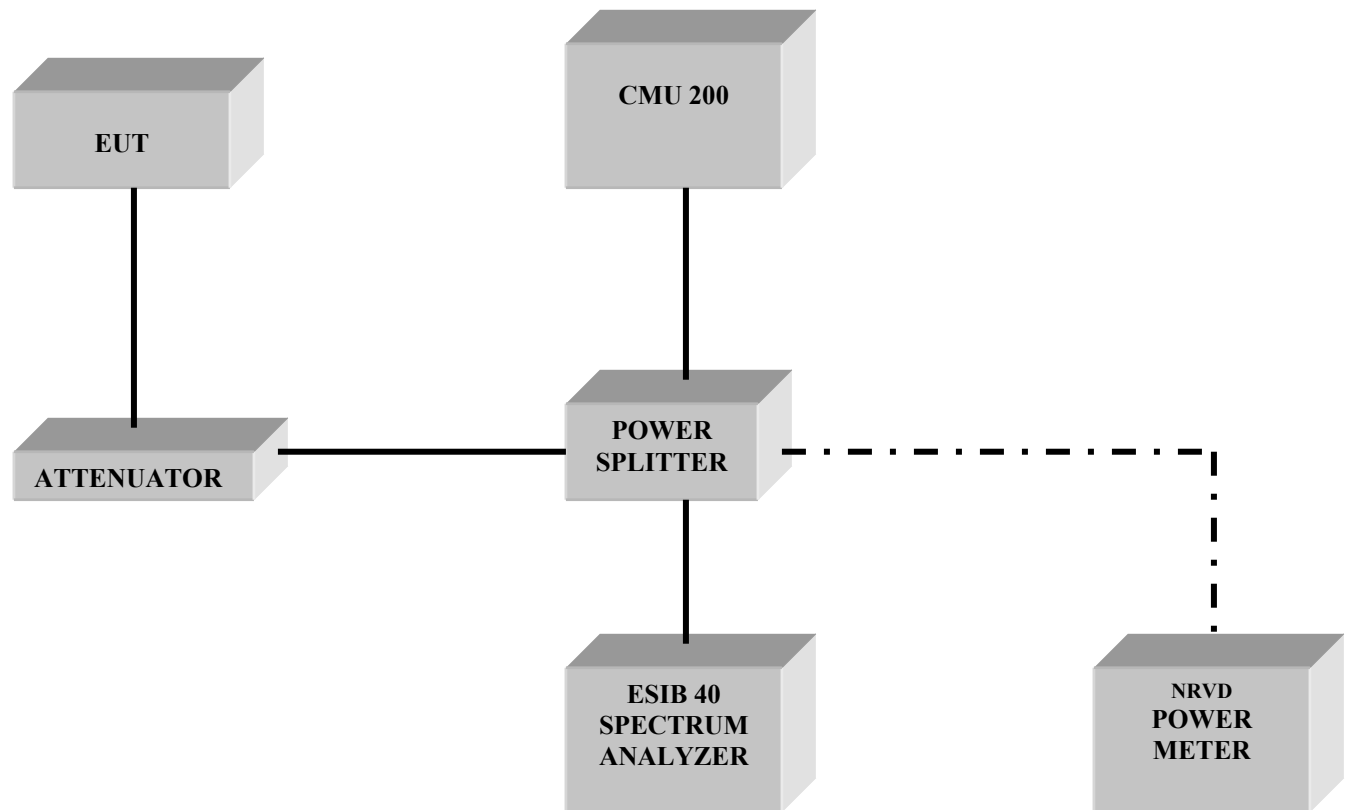

## Radiated Testing

### ANECHOIC CHAMBER

