


White label with black lettering

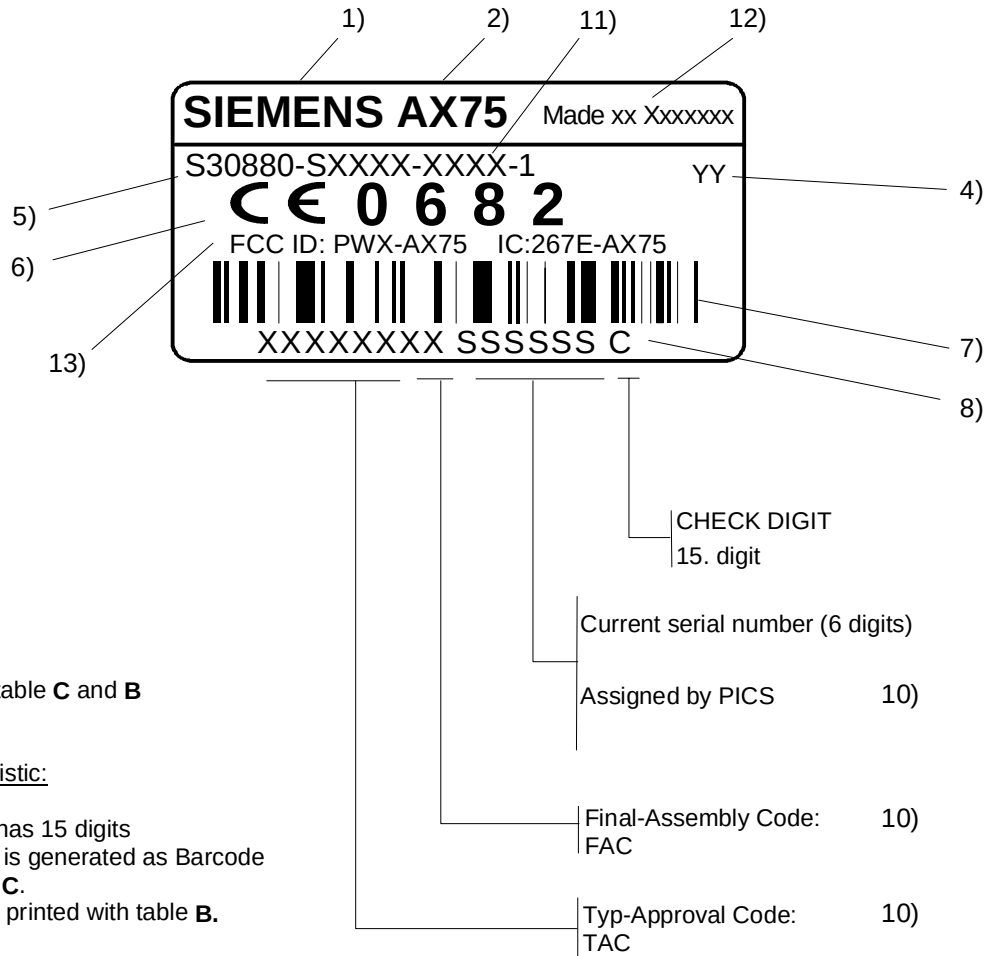

Barcode:

Typ 128, table **C** and **B**

Characteristic:

IMEI-No. has 15 digits
Digit 1-14 is generated as Barcode
with table **C**.
Digit 15 is printed with table **B**.

Ink ribbon:

TTR-Band Ricoh 110-A

Font:

Title blocks concentric

1) Corporate logo:

1.5 SN 66324

2) Product name:

Internal font D, size 4

4) Code of date:

Internal font D, size 4

e.g. F3 — March

—1995

5) Code number:

Internal font D, size 4

6) CE- identification:

Height: 5 mm

7) Barcode IMEI-No.:

Code: 128 Size: 2 Ratio: 3.0 Height: 3 mm

8) IMEI-No. (plain writing):

Internal font D, size 4, space between TAC, FAC, serial no. and 15.digit

10) Document for IMEI-No. allocation:

DIS 93162

Valid is the highest level in the system

11) Code number:

Corresponding to the number of the transceiver unit part list

12) "Made in Germany"

For production in Germany

"Made in XXXXXXX"

For production out of Germany – for details please see lettering plan
of retail box label

13) Canada IC and US FCC

font: B3

				Date	12.11.2004	Approval label AX75/IMEI-Label/Standard Z30880-Z9999-Z27-*	
				Name	Li Gang		
					MP PD LPD		
1		12.11.04	Li G			LETTERING PLAN	
Version		Date	Token	SIEMENS AG		DIS 91798	Page 1
							From 1



Figure 1 Placement of IMEI label on AX75