


White label with black lettering

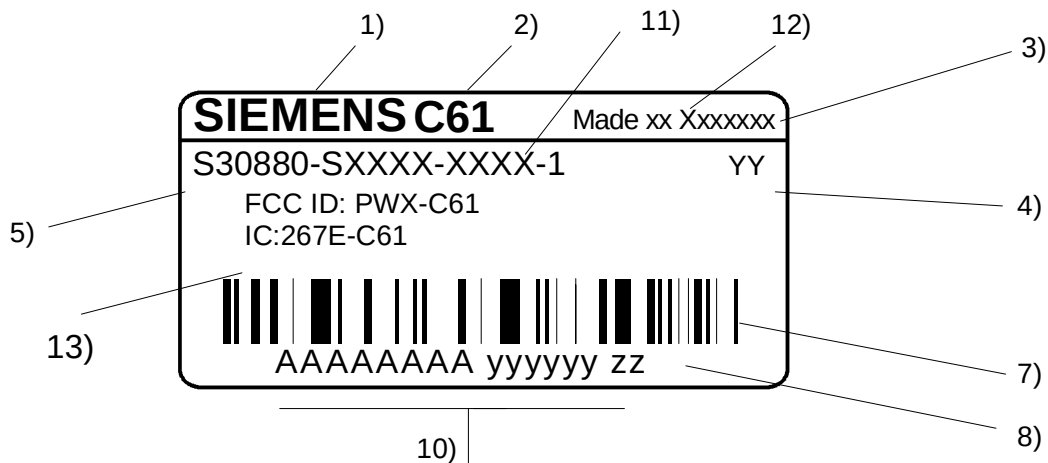

Barcode:

Typ 128, table **C** and **B**

Characteristic:

IMEI-No. has 16 digits
Digit 1-14 is generated as Barcode with table **C**.
Digit 15-16 is printed with table **B**.

Ink ribbon:

TTR-Band Ricoh 110-A

Font:

Title blocks concentric

- 1) Corporate logo:
- 2) Product name:
- 3) Made xx Xxxxxxx
- 4) Code of date:

1.5 SN 66324
Internal font D, size 4
Bitmap
Internal font D, size 4
e.g. F3 — March
L—1995

- 5) Code number:
- 7) Barcode IMEI-No.:
- 8) IMEI-No.
(plain writing):

Internal font D, size 4
Code: 128 Size: 2 Ratio: 3.0 Height: 3 mm

Internal font D, size 4, space between TAC, serial no. and 15-16.digit
AAAAAAA Typ-Approval Code TAC
yyyyyy Current serial number (6 digits), Assigned by PICS
zz Software version number
DIS 46759 BOM 000 xx
Valid is the highest level in the system
Corresponding to the number of the transceiver unit part list
Internal font B, size 3 / Depending on production location
font: B3

10) Document for IMEI-No. allocation:

- 11) Code number:
- 12) Made xx Xxxxxxx
- 13) Canada IC and US FCC

				Date	01.08.03	Approval label Standard IMEI-Label/C61		
				Name	Li Long Jun			
2		08.08.03	Li	RD MP VC BJ				
1		01.08.03	Li	SIEMENS AG		LETTERING PLAN		
Version		Date	Token			DIS 46297	Page	1
							From	1



				Date	01.08.03	Approval label Standard IMEI-Label/C61	
				Name	Li Long Jun		
2		08.08.03	Li		RD MP VC BJ	LETTERING PLAN DIS 46297	Page 2 From 1
1		01.08.03	Li				
Version		Date	Token	SIEMENS AG			