
Appendix for the Report

Dosimetric Assessment of the Siemens CF76 (FCC ID: PWX-CF76)

According to the FCC Requirements

SAR Distribution Plots

August 30, 2005
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
Siemens Communication Inc.
16475 West Bernado Drive, Suite 400
San Diego CA 92127

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, GSM 850 HEAD WITHOUT FLASH.....	3
2	SAR DISTRIBUTION PLOTS, GSM 850 HEAD WITH FLASH	11
3	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD WITHOUT FLASH	15
4	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD WITH FLASH.....	23
5	SAR DISTRIBUTION PLOTS, GSM 850 BODY WITHOUT ACCESSORY IN GSM MODE	27
6	SAR DISTRIBUTION PLOTS, GSM 850 BODY WITH HEADSET IN GSM MODE.....	28
7	SAR DISTRIBUTION PLOTS, GSM 850 BODY WITHOUT ACCESSORY IN GPRS MODE	29
8	SAR DISTRIBUTION PLOTS, GSM 850 BODY WITH DATA CABLE IN GPRS MODE.....	30
9	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WITHOUT ACCESSORY IN GSM MODE.....	31
10	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WITH HEADSET IN GSM MODE	32
11	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WITHOUT ACCESSORY IN GPRS MODE.....	33
12	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WITH DATA CABLE IN GPRS MODE	34
13	SAR Z-AXIS SCANS (VALIDATION)	35
14	SAR Z-AXIS SCANS (MEASUREMENTS).....	37

1 SAR Distribution Plots, GSM 850 Head without flash

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179balm_1.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Cheek Left

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.02 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.962 mW/g; SAR(10 g) = 0.621 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

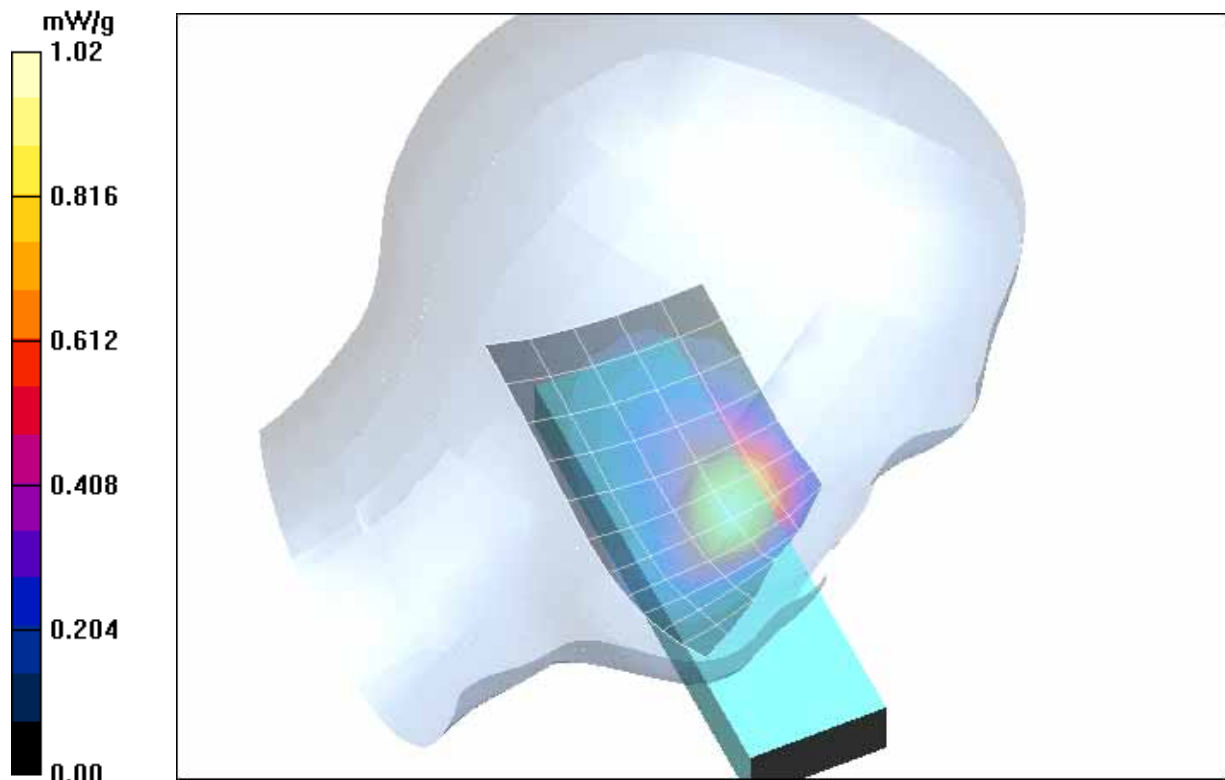


Fig. 1: SAR distribution for GSM 850, channel 190, cheek position, left side of head (August 18, 2005; Ambient Temperature: 22.0° C; Liquid Temperature: 21.0° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [179balm 2.da4](#)

DUT: Siemens; **Type:** CF76; **Serial:** 004400014517179

Program Name: Tilted Left

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Left/Area Scan (6x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.239 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.7 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 0.244 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.7 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

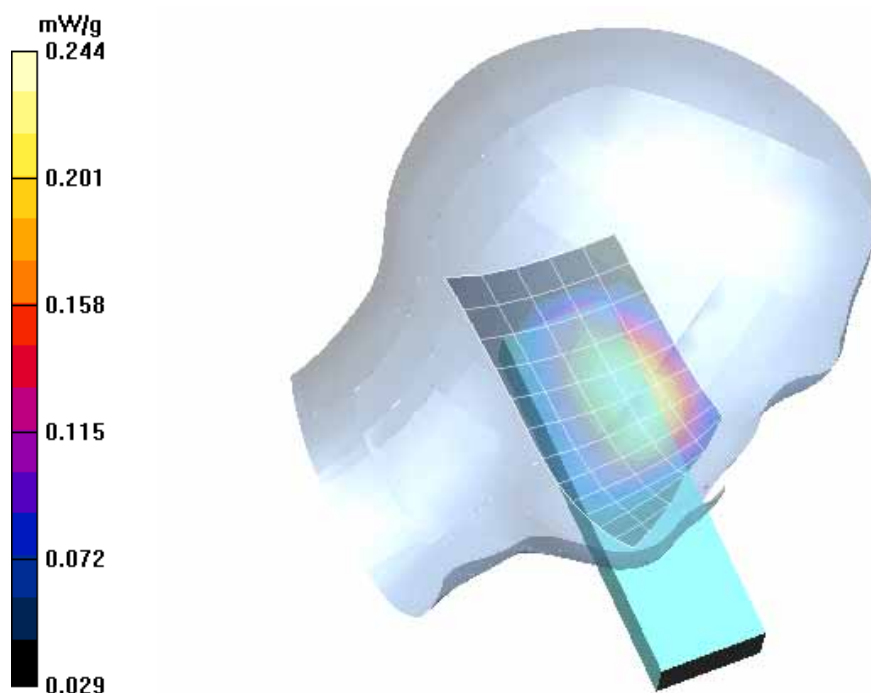


Fig. 2: SAR distribution for GSM 850, channel 190, tilted position, left side of head (August 18, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.1° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179barm_1.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Cheek Right

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.05 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.959 mW/g; SAR(10 g) = 0.631 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

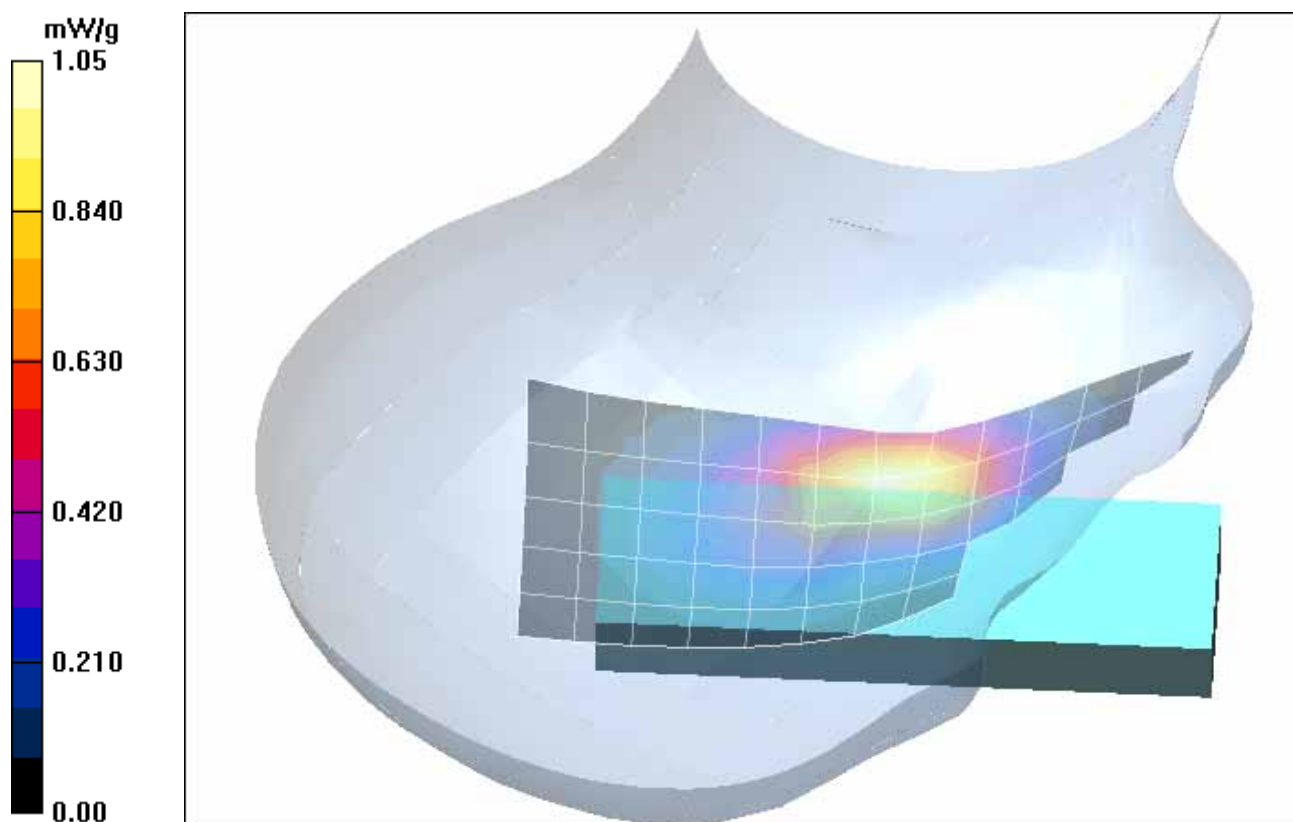


Fig. 3: SAR distribution for GSM 850, channel 190, cheek position, right side of head (August 18, 2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.1° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179barm 2.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Tilted Right

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Right/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.274 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.0 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.279 mW/g

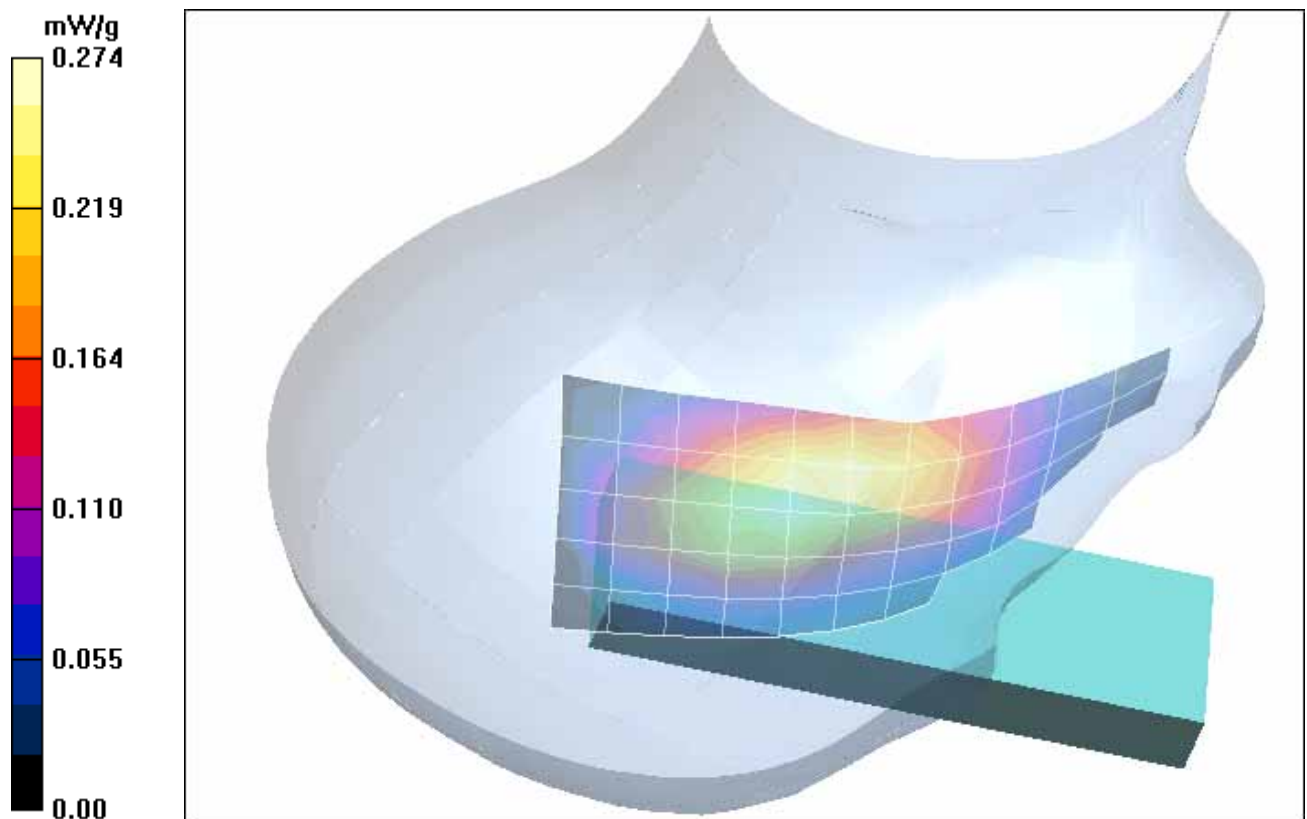


Fig. 4: SAR distribution for GSM 850, channel 190, tilted position, right side of head (August 18, 2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.2° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [179ball_1.da4](#)

DUT: Siemens; **Type:** CF76; **Serial:** 004400014517179

Program Name: Cheek Left

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.925 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.857 mW/g; SAR(10 g) = 0.560 mW/g

Maximum value of SAR (measured) = 0.917 mW/g

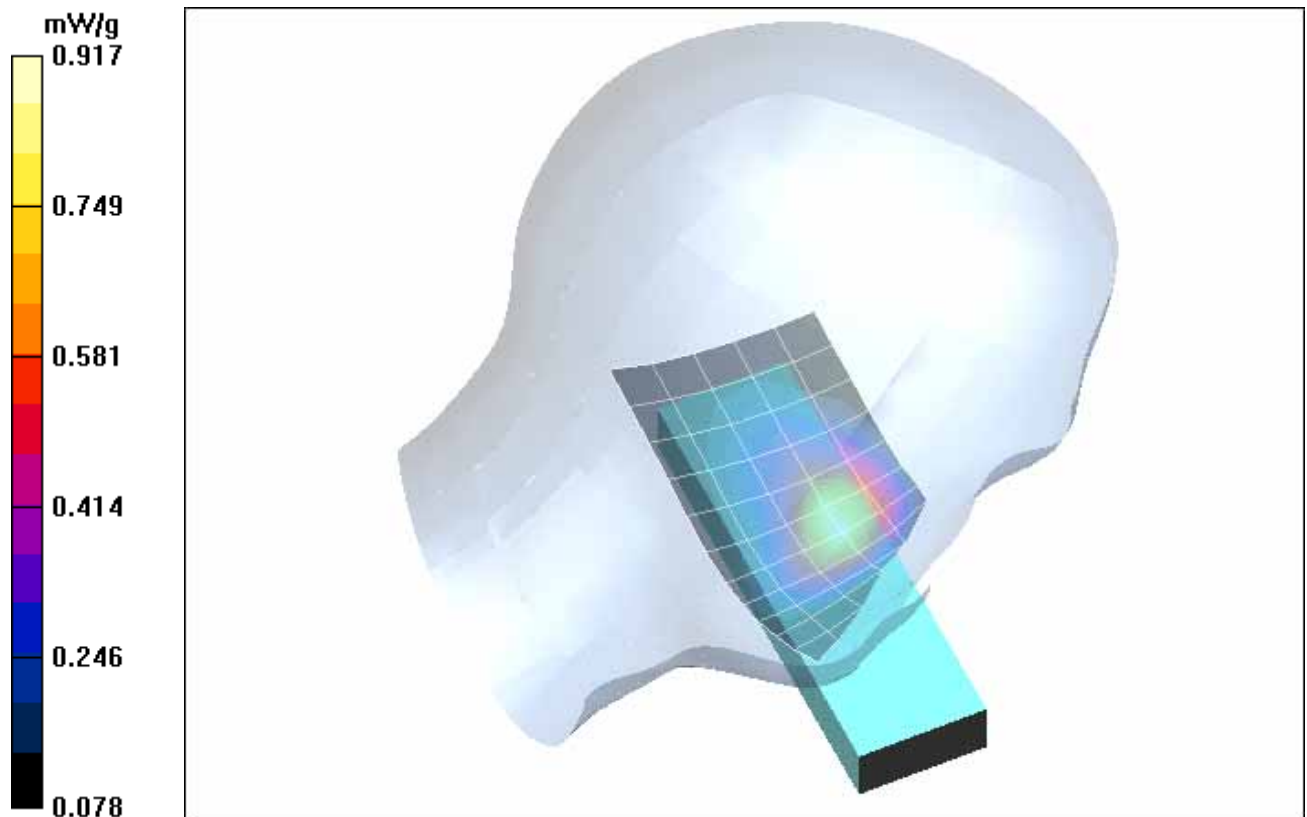


Fig. 5: SAR distribution for GSM 850, channel 128, cheek position, left side of head (August 18, 2005; Ambient Temperature: 22.1° C; Liquid Temperature: 21.1° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179balh_1.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Cheek Left

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.889 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = -0.165 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.828 mW/g; SAR(10 g) = 0.539 mW/g

Maximum value of SAR (measured) = 0.891 mW/g

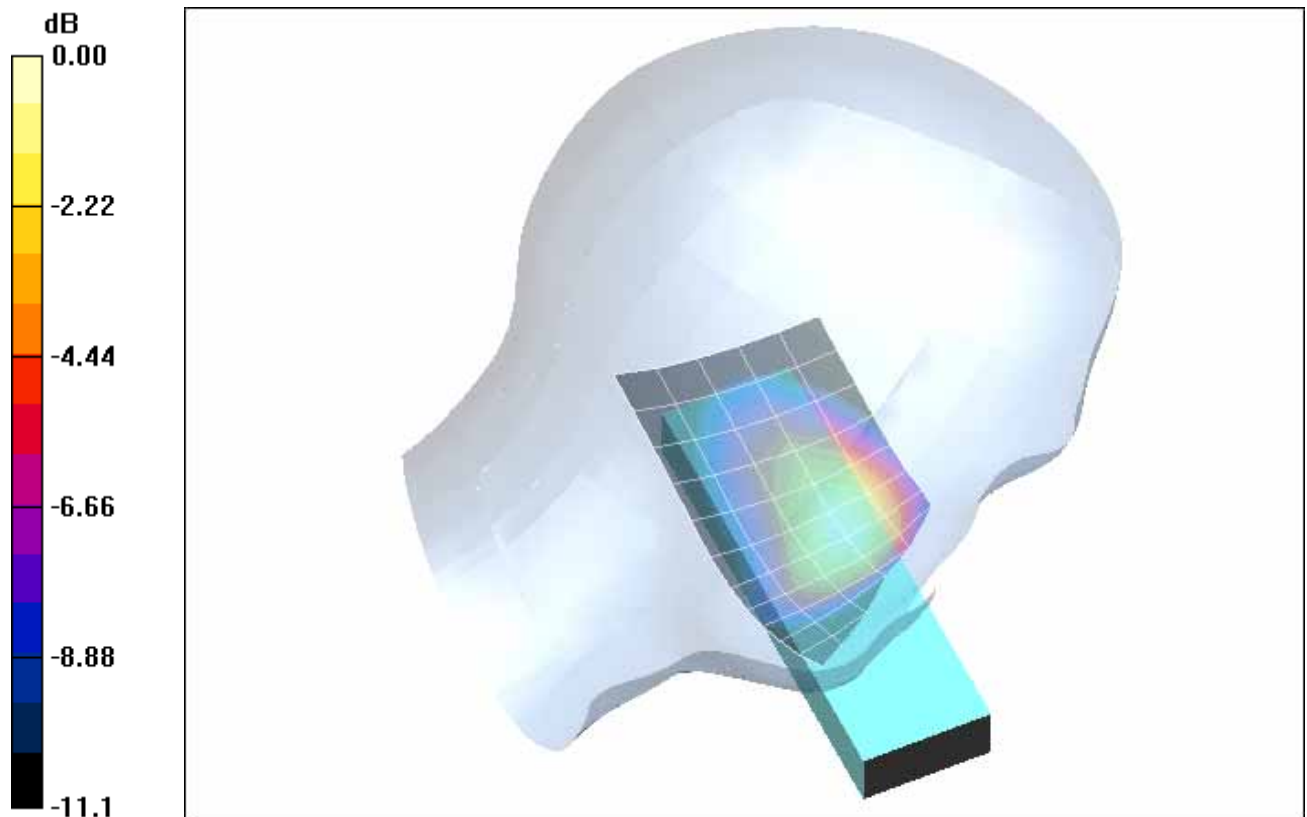


Fig. 6: SAR distribution for GSM 850, channel 251, cheek position, left side of head (August 18, 2005; Ambient Temperature: 22.1° C; Liquid Temperature: 21.1° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [179barl_1.da4](#)

DUT: Siemens; **Type:** CF76; **Serial:** 004400014517179

Program Name: Cheek Right

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.04 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.2 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.925 mW/g; SAR(10 g) = 0.618 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

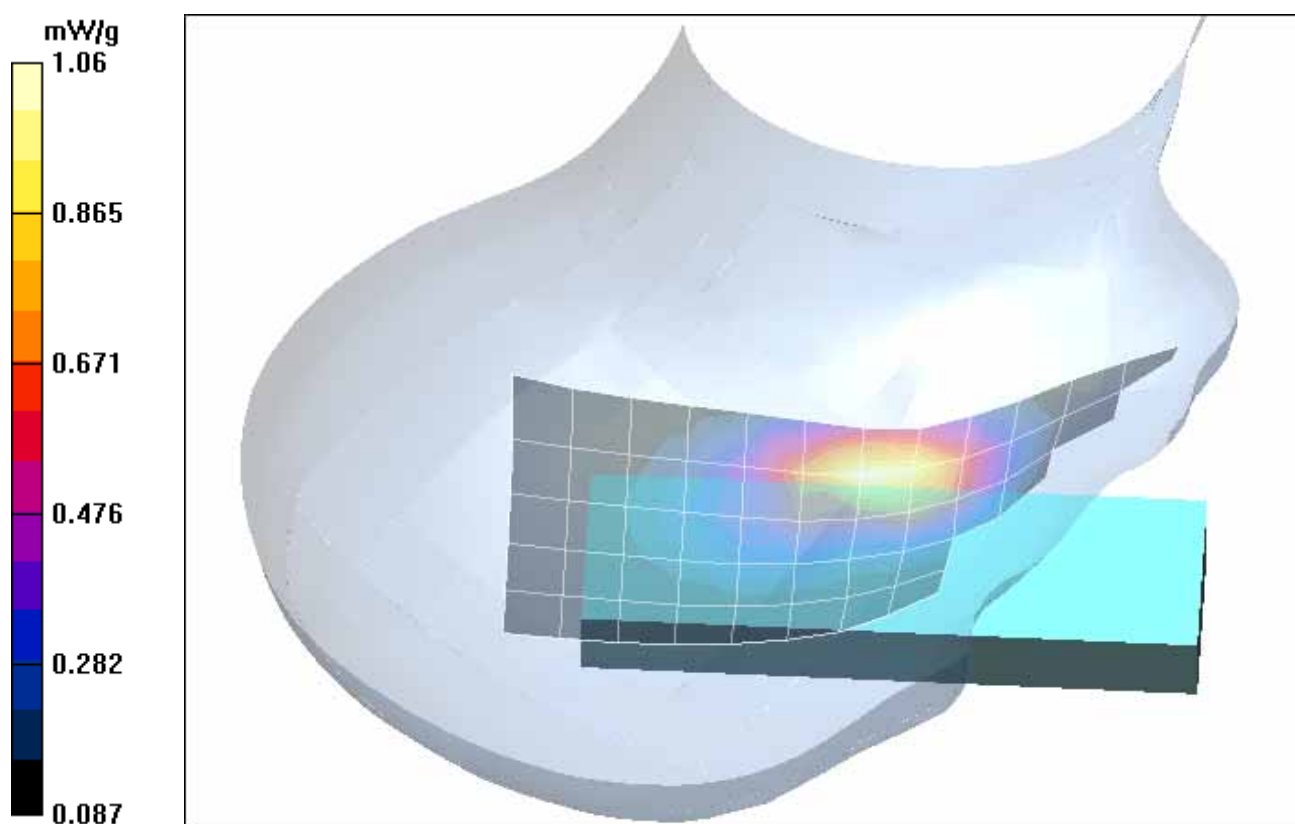


Fig. 7: SAR distribution for GSM 850, channel 128, cheek position, right side of head (August 18, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.2° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [179barh_1.da4](#)

DUT: Siemens; **Type:** CF76; **Serial:** 004400014517179

Program Name: Cheek Right

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.06 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.964 mW/g; SAR(10 g) = 0.632 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

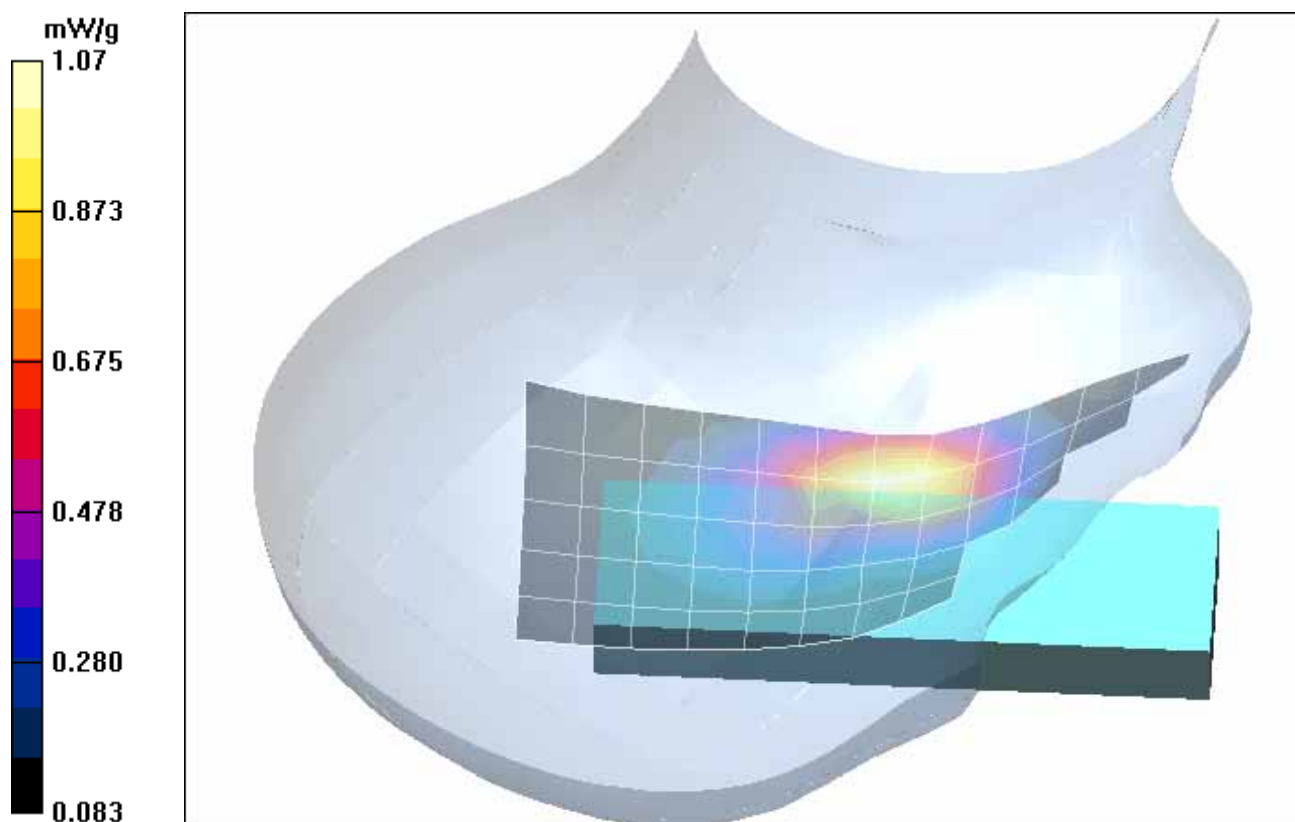


Fig. 8: SAR distribution for GSM 850, channel 251, cheek position, right side of head (August 18, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.2° C).

2 SAR Distribution Plots, GSM 850 Head with flash

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179balm_1_flash.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Cheek Left

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.740 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.711 mW/g; SAR(10 g) = 0.460 mW/g

Maximum value of SAR (measured) = 0.761 mW/g

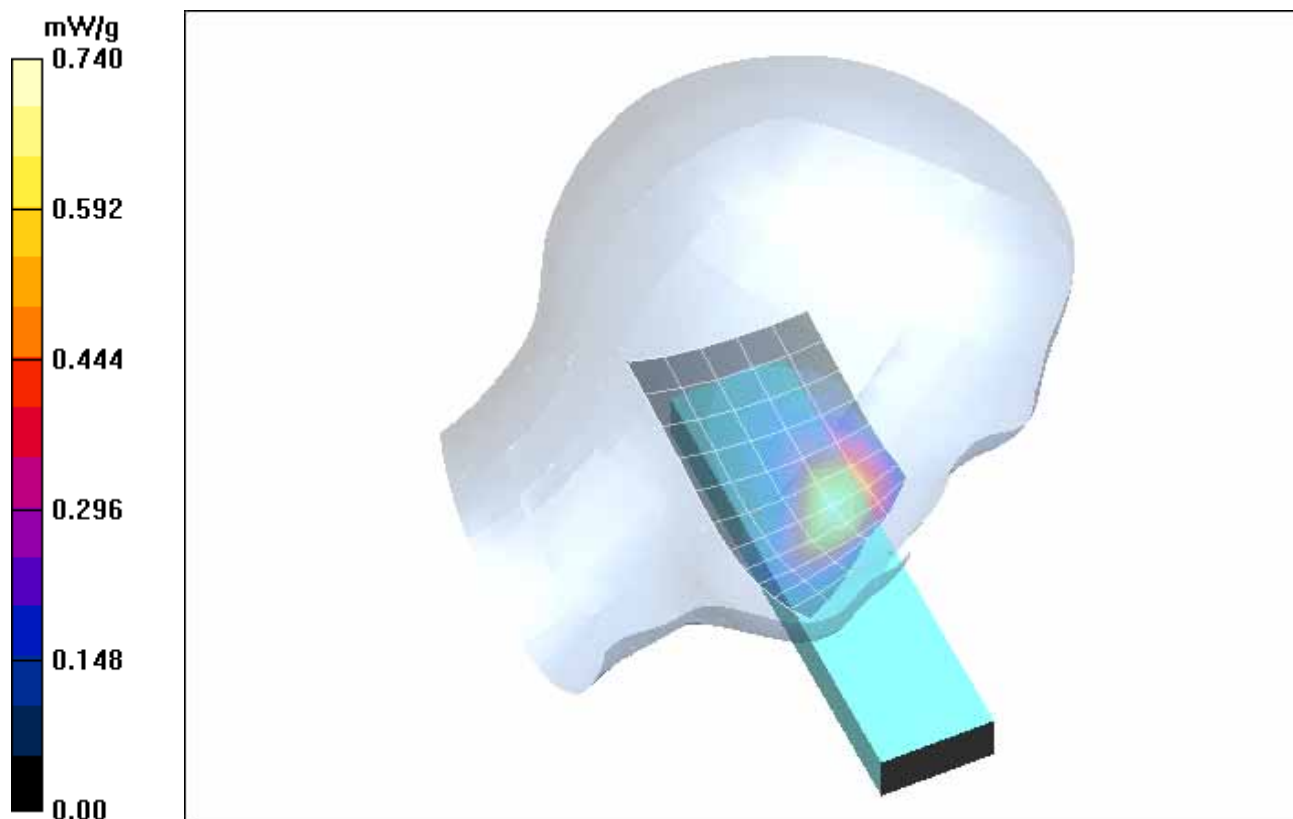


Fig. 9: SAR distribution for GSM 850, channel 190, cheek position, left side of head (August 18, 2005; Ambient Temperature: 22.1° C; Liquid Temperature: 21.2° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [179balm 2 flash.da4](#)

DUT: Siemens; **Type:** CF76; **Serial:** 004400014517179

Program Name: Tilted Left

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Left/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.144 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.05 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.147 mW/g

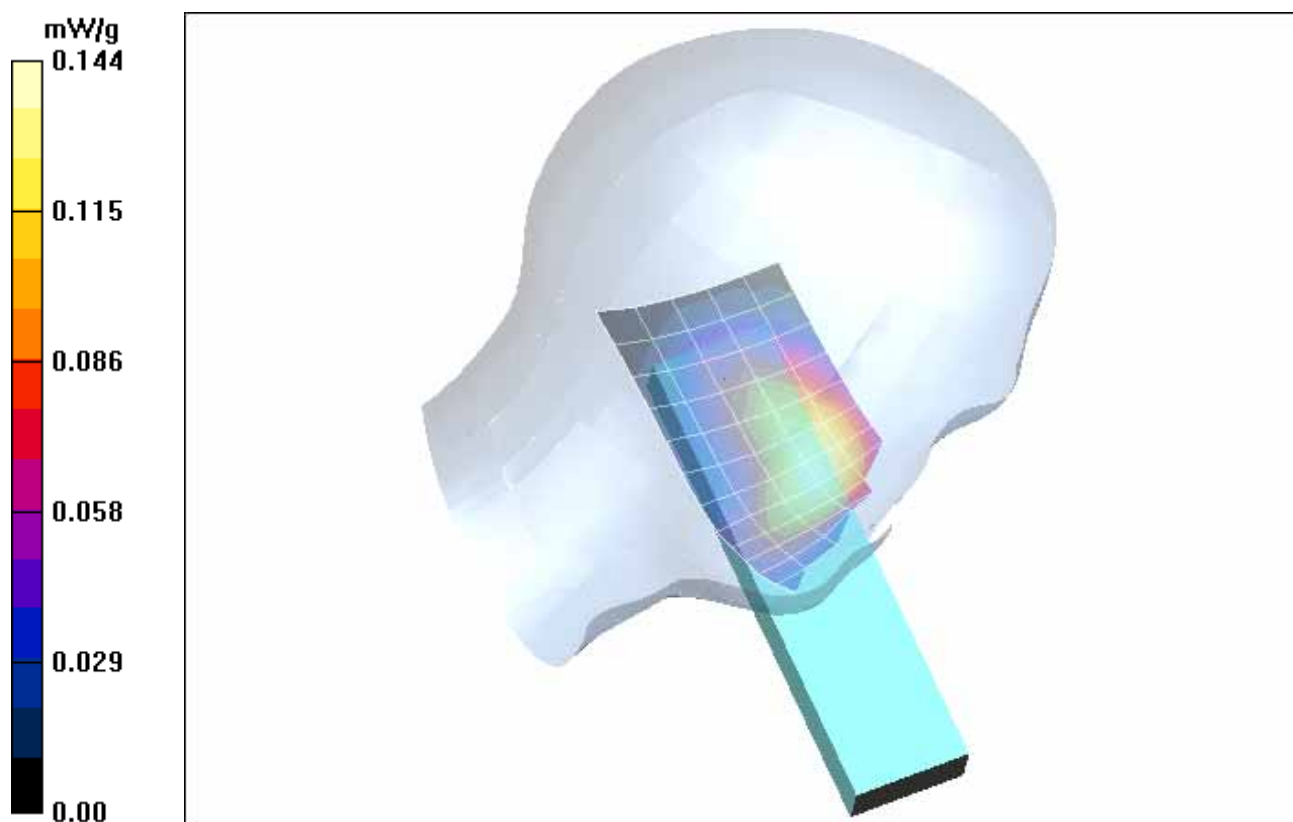


Fig. 10: SAR distribution for GSM 850, channel 190, tilted position, left side of head (August 18, 2005; Ambient Temperature: 22.1°C; Liquid Temperature : 21.2°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179barm_1_flash.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Cheek Right

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.790 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.746 mW/g; SAR(10 g) = 0.488 mW/g

Maximum value of SAR (measured) = 0.808 mW/g

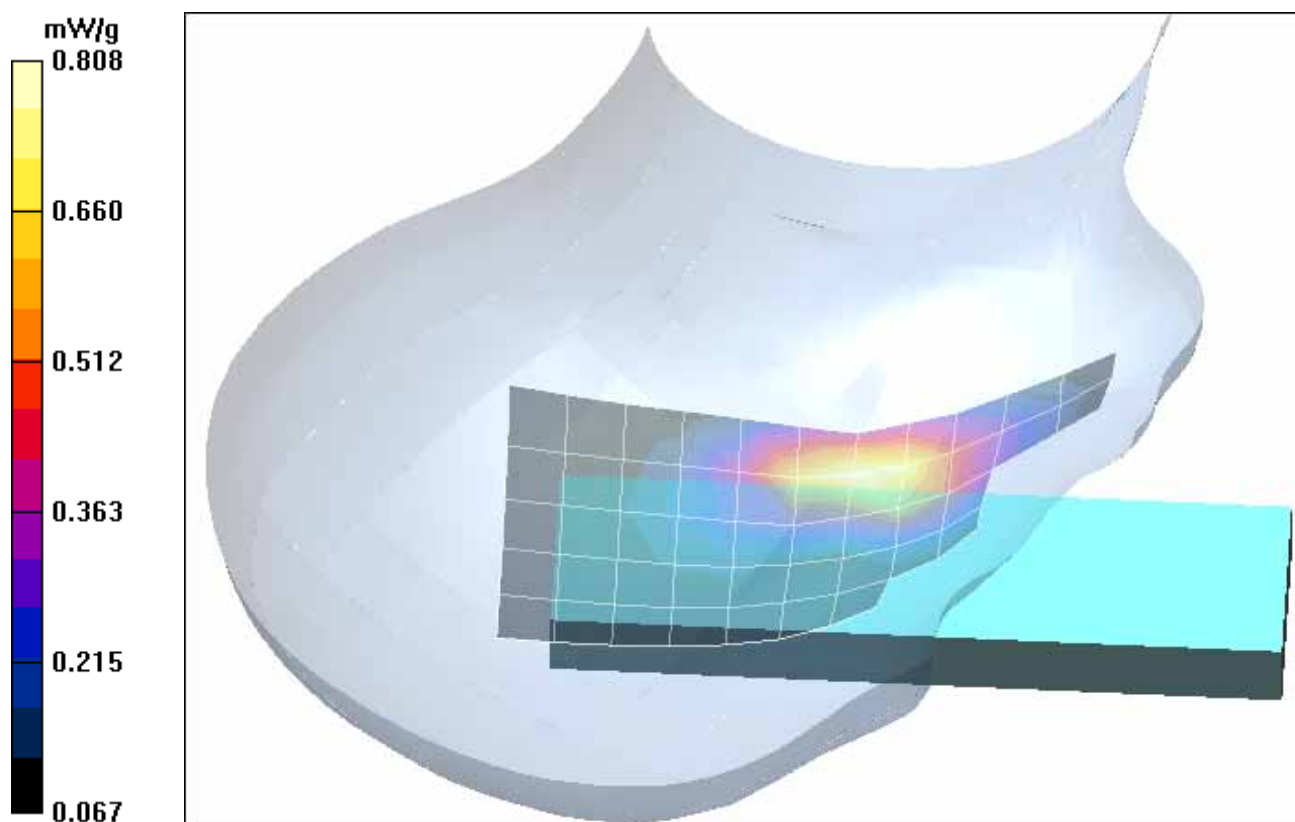


Fig. 11: SAR distribution for GSM 850, channel 190, cheek position, right side of head (August 18, 2005; Ambient Temperature: 22.1°C; Liquid Temperature : 21.2°C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [179barm 2 flash.da4](#)

DUT: Siemens; **Type:** CF76; **Serial:** 004400014517179

Program Name: Tilted Right

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.61, 6.61, 6.61); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Right/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.144 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.35 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.106 mW/g

Maximum value of SAR (measured) = 0.155 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.35 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.088 mW/g

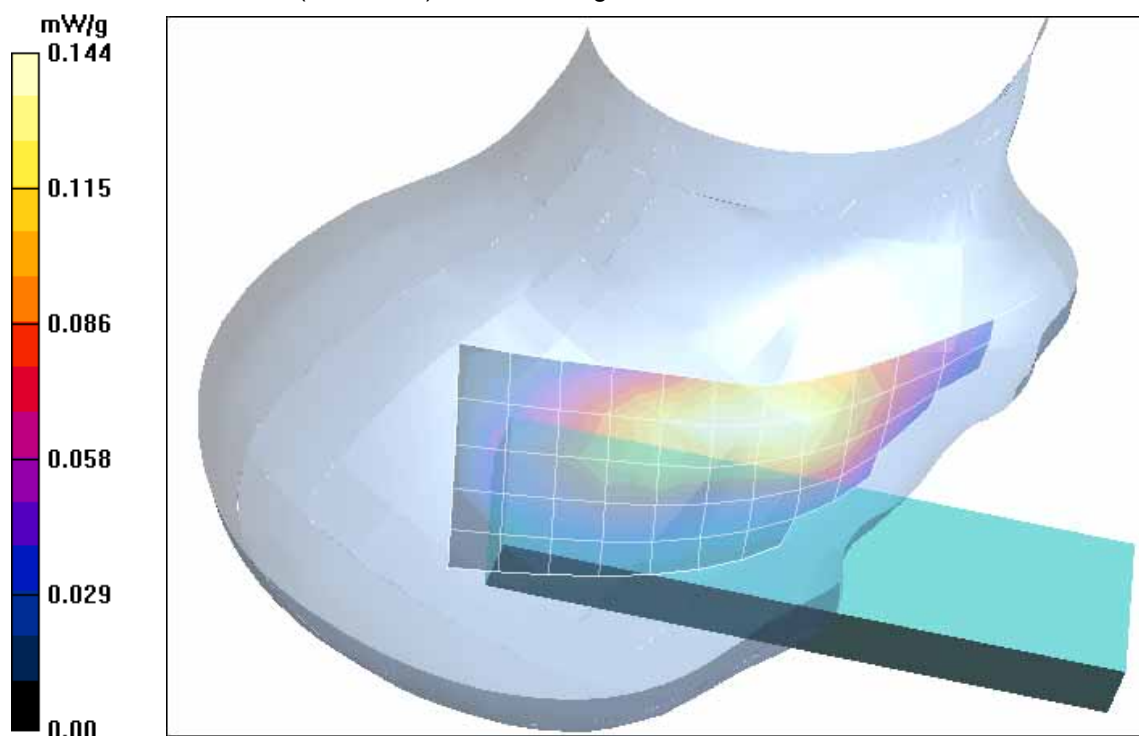


Fig. 12: SAR distribution for GSM 850, channel 190, tilted position, right side of head (August 18, 2005; Ambient Temperature: 22.1°C; Liquid Temperature : 21.2°C).

3 SAR Distribution Plots, PCS 1900 Head without flash

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179bplm_1.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Cheek Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.824 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.815 mW/g; SAR(10 g) = 0.455 mW/g

Maximum value of SAR (measured) = 0.884 mW/g

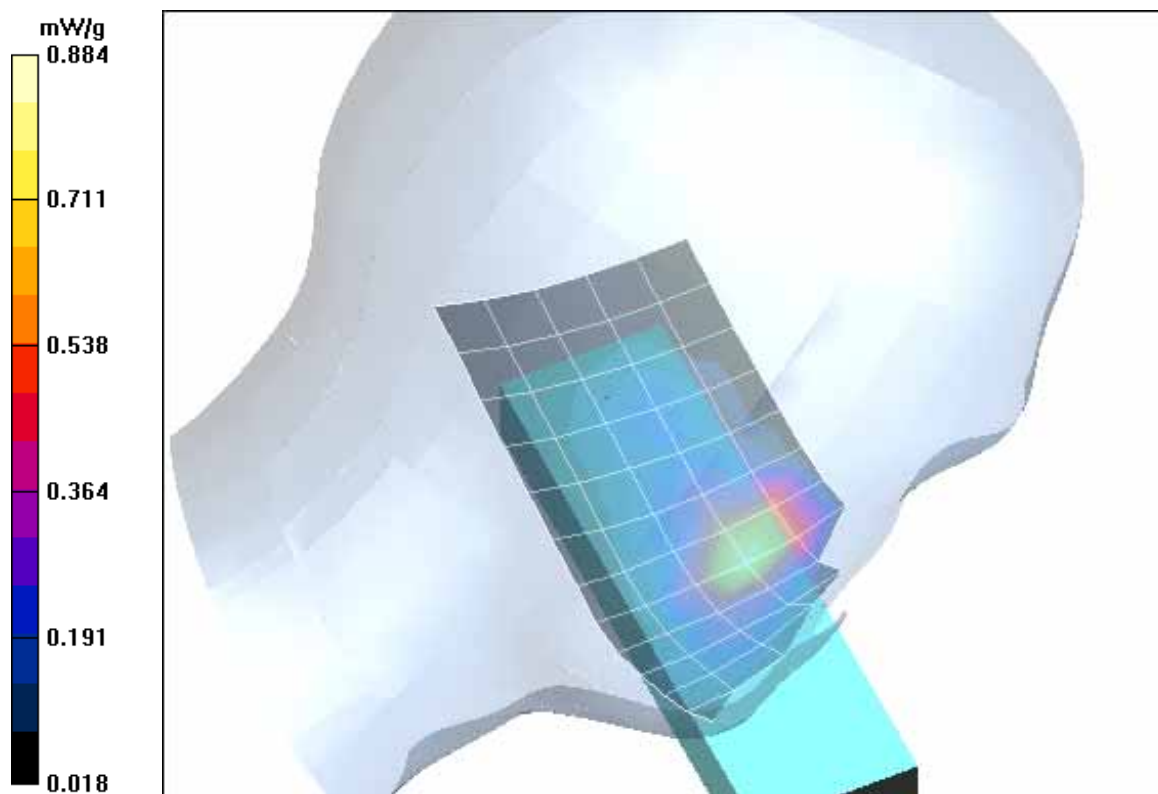


Fig. 13: SAR distribution for PCS 1900, channel 661, cheek position, left side of head (August 22, 2005; Ambient Temperature: 22.3°C; Liquid Temperature : 21.5°C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [179bplm_2.da4](#)

DUT: Siemens; **Type:** CF76; **Serial:** 004400014517179

Program Name: Tilted Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Left/Area Scan (6x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.494 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.8 V/m ; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 0.666 W/kg

SAR(1 g) = 0.467 mW/g ; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.505 mW/g

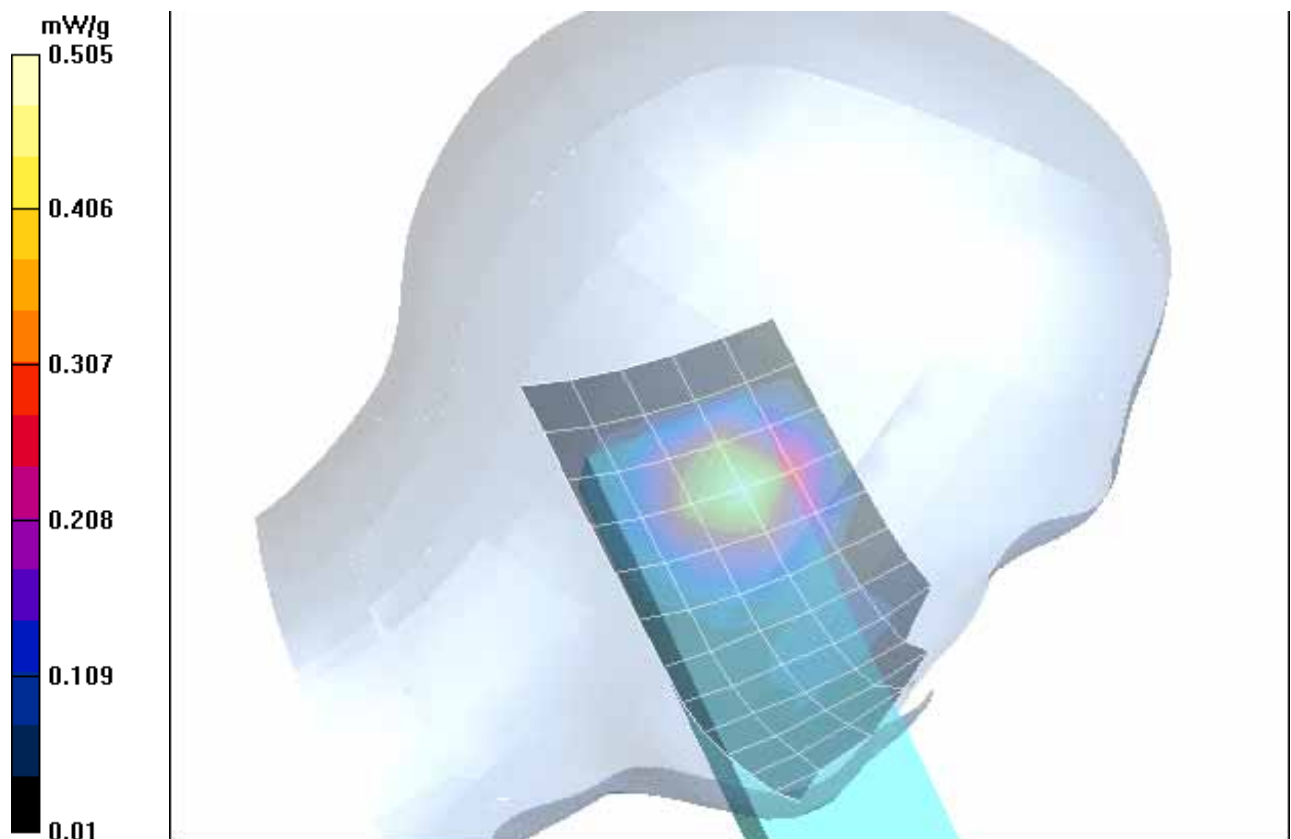


Fig. 14: SAR distribution for PCS 1900, channel 661, tilted position, left side of head (August 22, 2005; Ambient Temperature: 22.2°C ; Liquid Temperature : 21.4°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179bprm 1.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Cheek Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.834 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.843 mW/g; SAR(10 g) = 0.458 mW/g

Maximum value of SAR (measured) = 0.969 mW/g

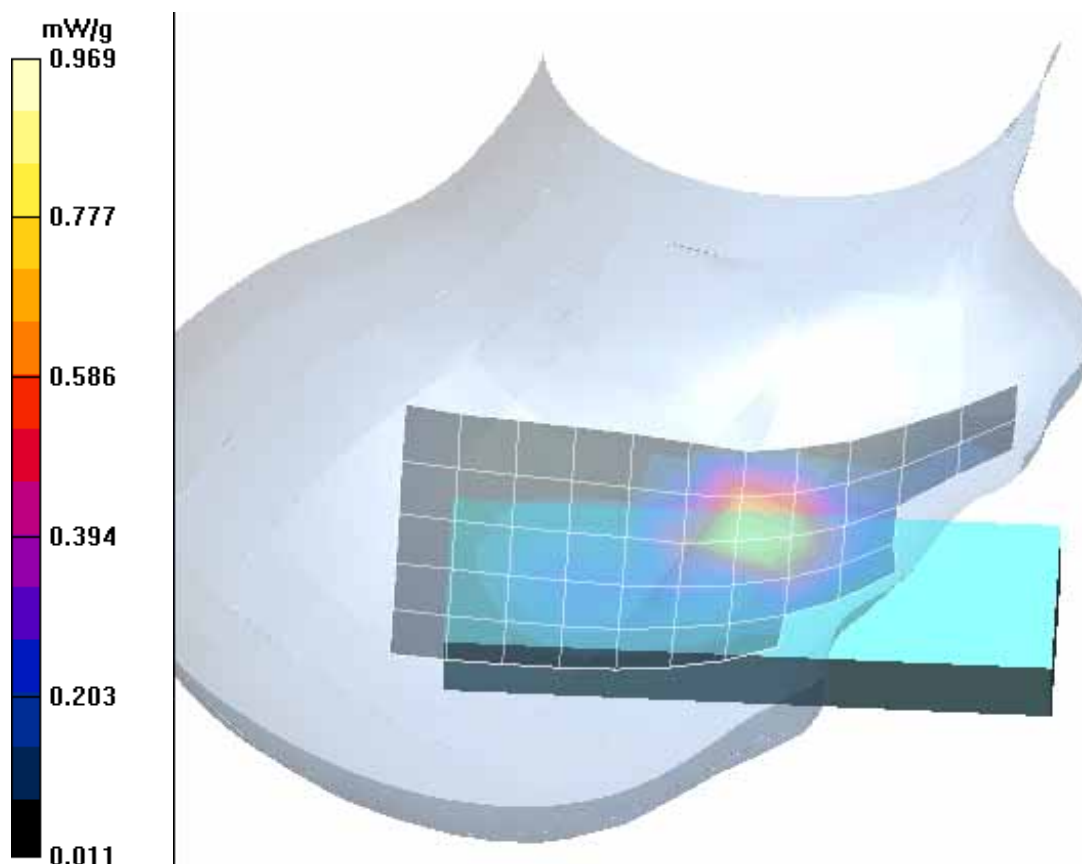


Fig. 15: SAR distribution for PCS 1900, channel 661, cheek position, right side of head (August 22, 2005; Ambient Temperature: 22.4°C; Liquid Temperature: 21.5°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179bprm 2.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Tilted Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Right/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.515 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.726 W/kg

SAR(1 g) = 0.495 mW/g; SAR(10 g) = 0.298 mW/g

Maximum value of SAR (measured) = 0.545 mW/g

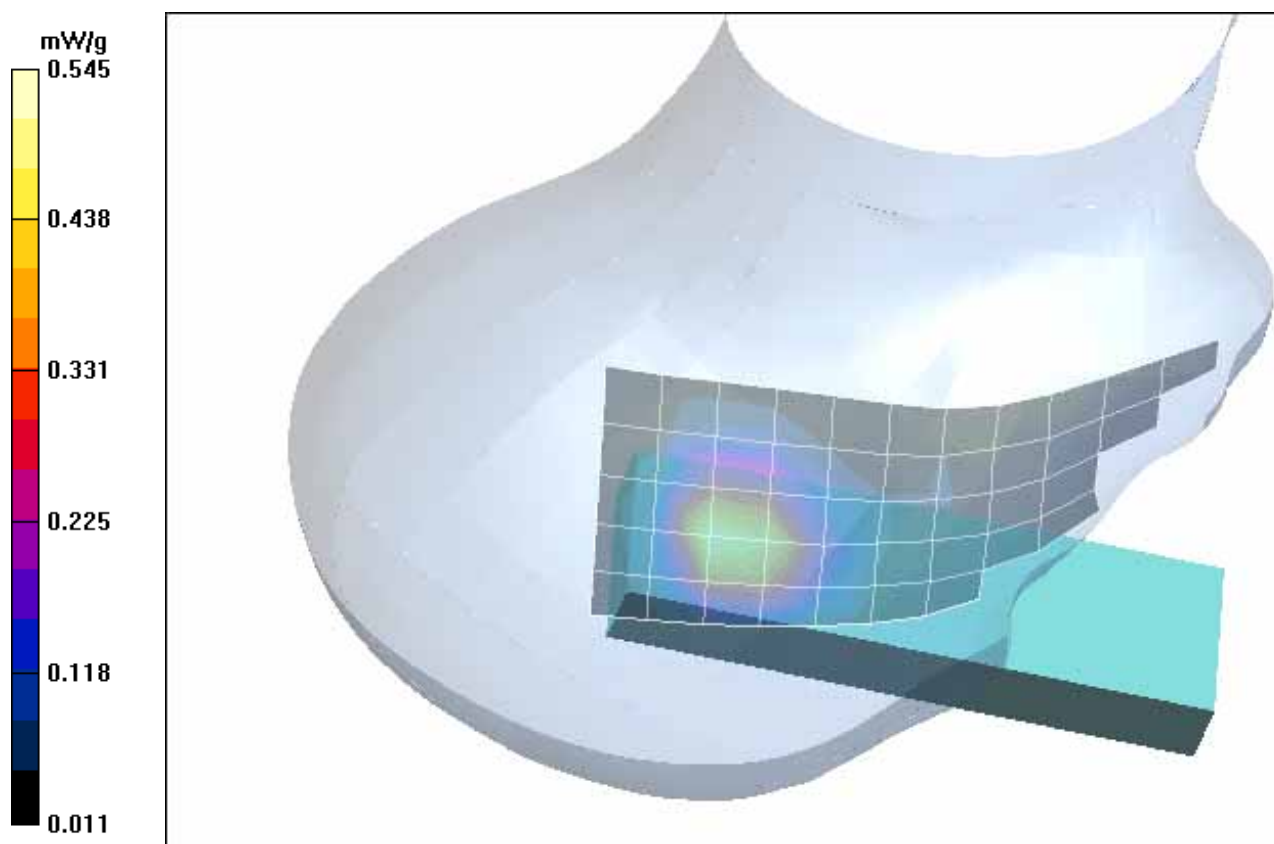


Fig. 16: SAR distribution for PCS 1900, channel 661, tilted position, right side of head (August 22, 2005; Ambient Temperature: 22.3°C; Liquid Temperature : 21.4°C)

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [179bpII_1.da4](#)

DUT: Siemens; **Type:** CF76; **Serial:** 004400014517179

Program Name: Cheek Left

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.800 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.760 mW/g; SAR(10 g) = 0.428 mW/g

Maximum value of SAR (measured) = 0.833 mW/g

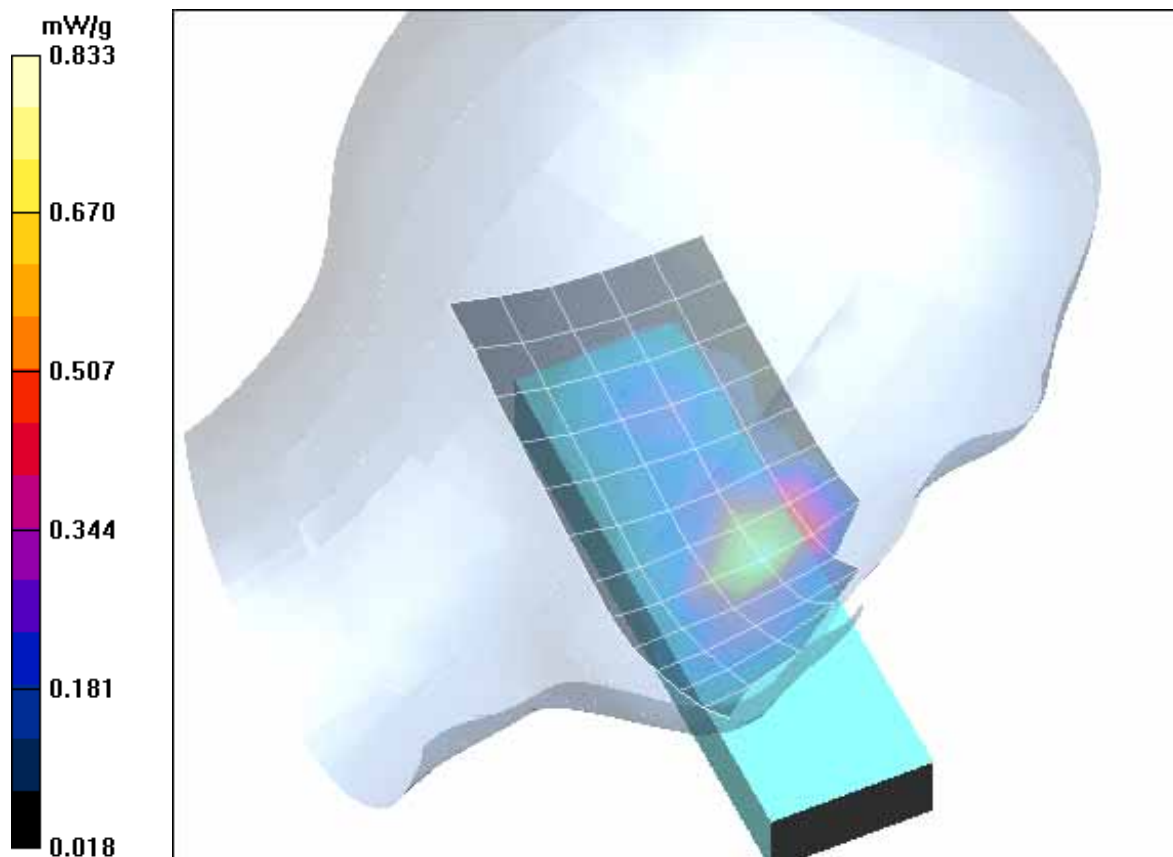


Fig. 17: SAR distribution for PCS 1900, channel 512, cheek position, left side of head (August 22, 2005; Ambient Temperature: 22.3°C; Liquid Temperature : 21.4°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179bplh_1.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Cheek Left

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.622 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.647 mW/g; SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.700 mW/g

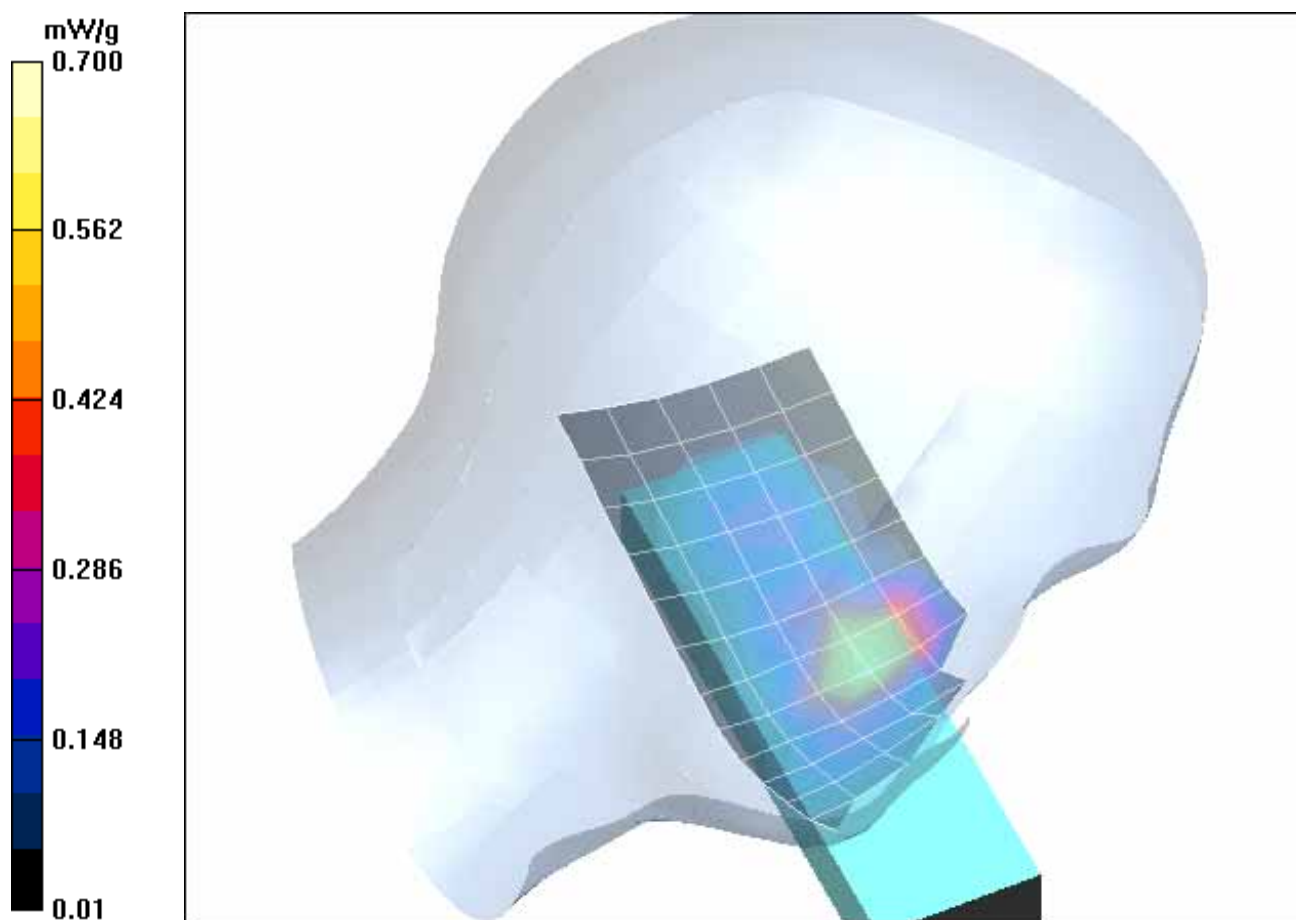


Fig. 18: SAR distribution for PCS 1900, channel 810, cheek position, left side of head (August 22, 2005; Ambient Temperature: 22.3°C; Liquid Temperature : 21.5°C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [179bprl_1.da4](#)

DUT: Siemens; **Type:** CF76; **Serial:** 004400014517179

Program Name: Cheek Right

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.821 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.750 mW/g; SAR(10 g) = 0.426 mW/g

Maximum value of SAR (measured) = 0.834 mW/g

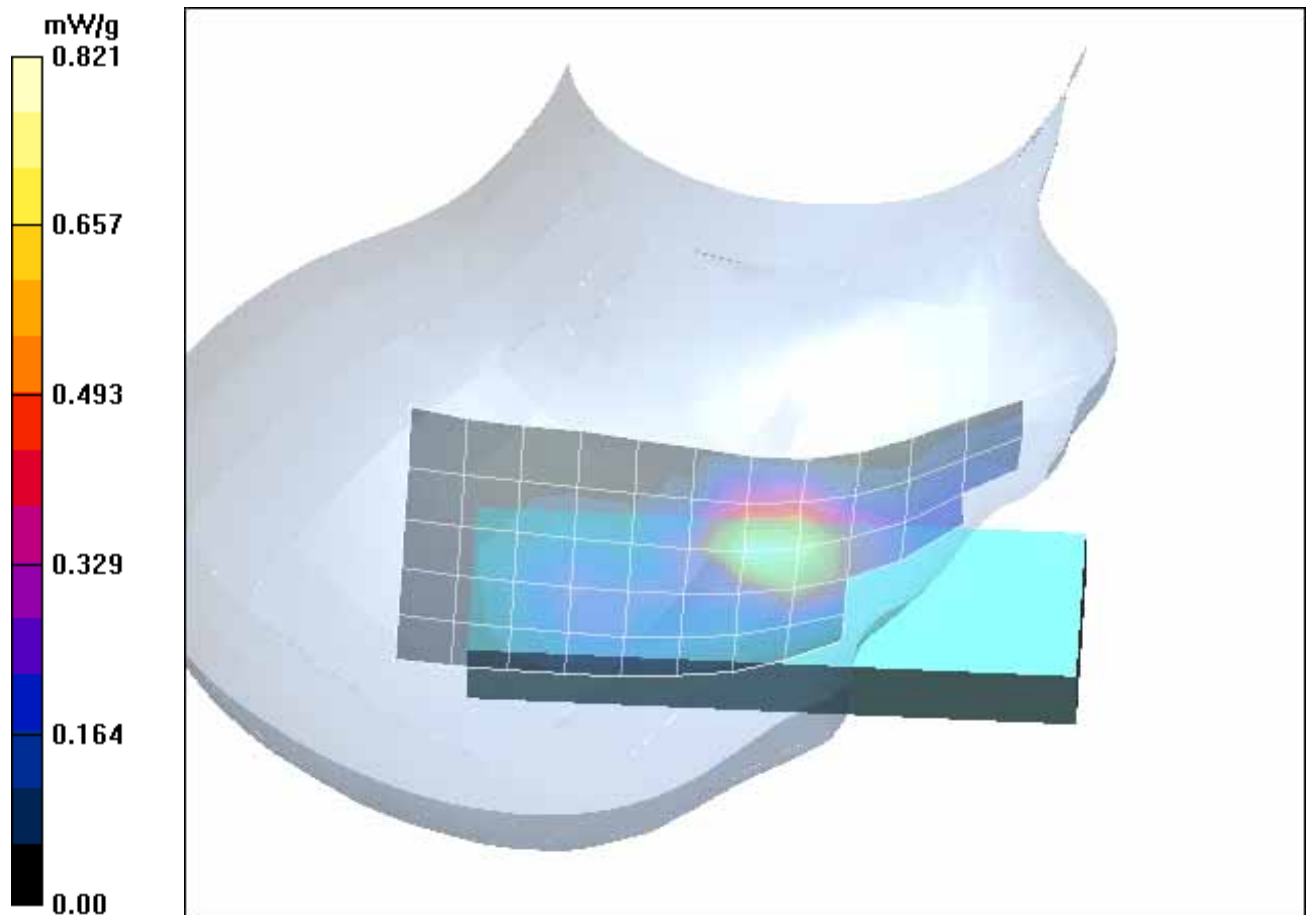


Fig. 19: SAR distribution for PCS 1900, channel 512, cheek position, right side of head (August 22, 2005; Ambient Temperature: 22.4°C; Liquid Temperature: 21.5°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179bprh_1.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Cheek Right

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.865 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = 0.131 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.807 mW/g; SAR(10 g) = 0.428 mW/g

Maximum value of SAR (measured) = 0.903 mW/g

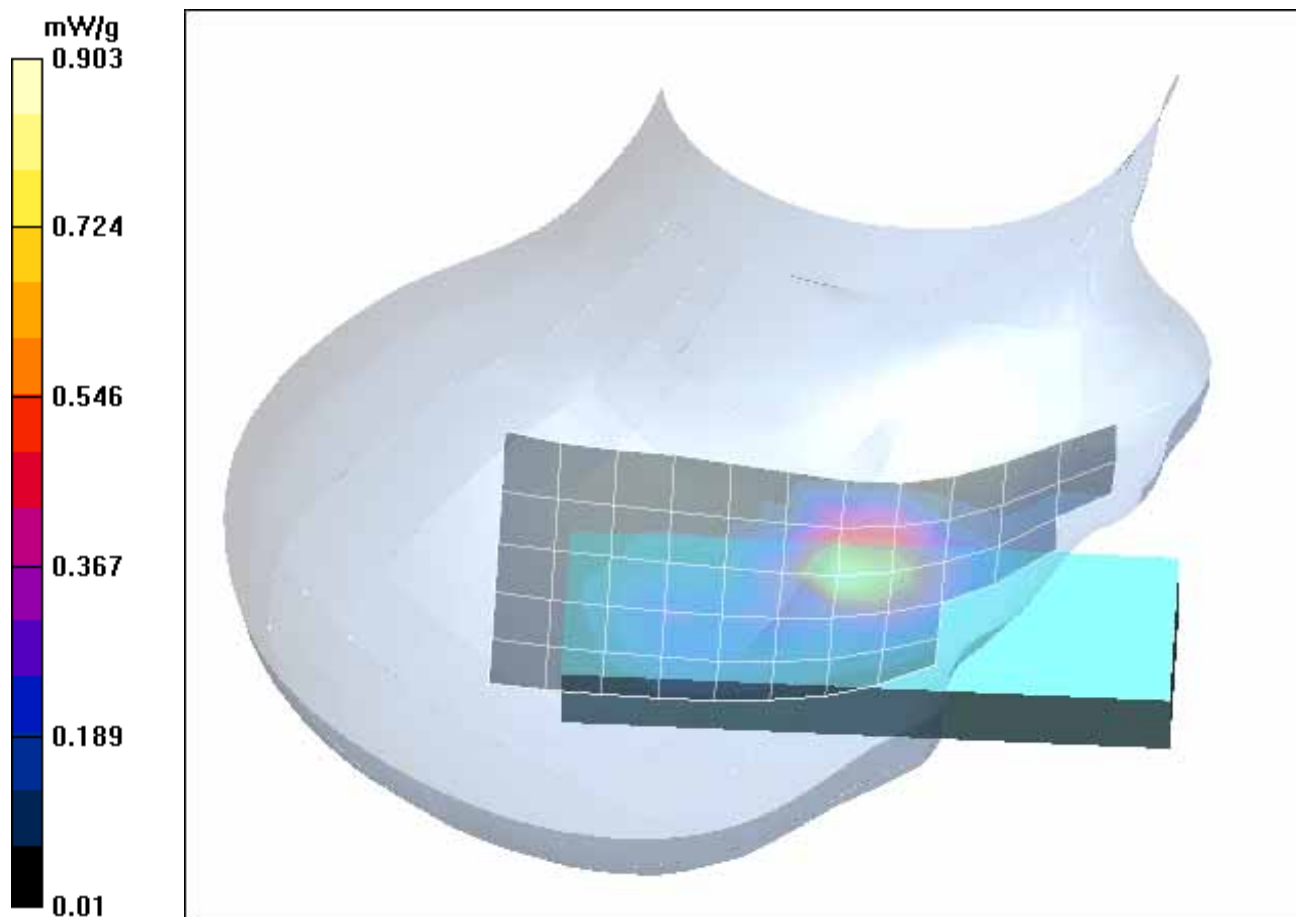


Fig. 20: SAR distribution for PCS 1900, channel 810, cheek position, right side of head (August 22, 2005; Ambient Temperature: 22.4°C; Liquid Temperature: 21.4°C).

4 SAR Distribution Plots, PCS 1900 Head with flash

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179bplm_1_flash.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Cheek Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Left/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.703 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.42 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.732 mW/g; SAR(10 g) = 0.441 mW/g

Maximum value of SAR (measured) = 0.782 mW/g

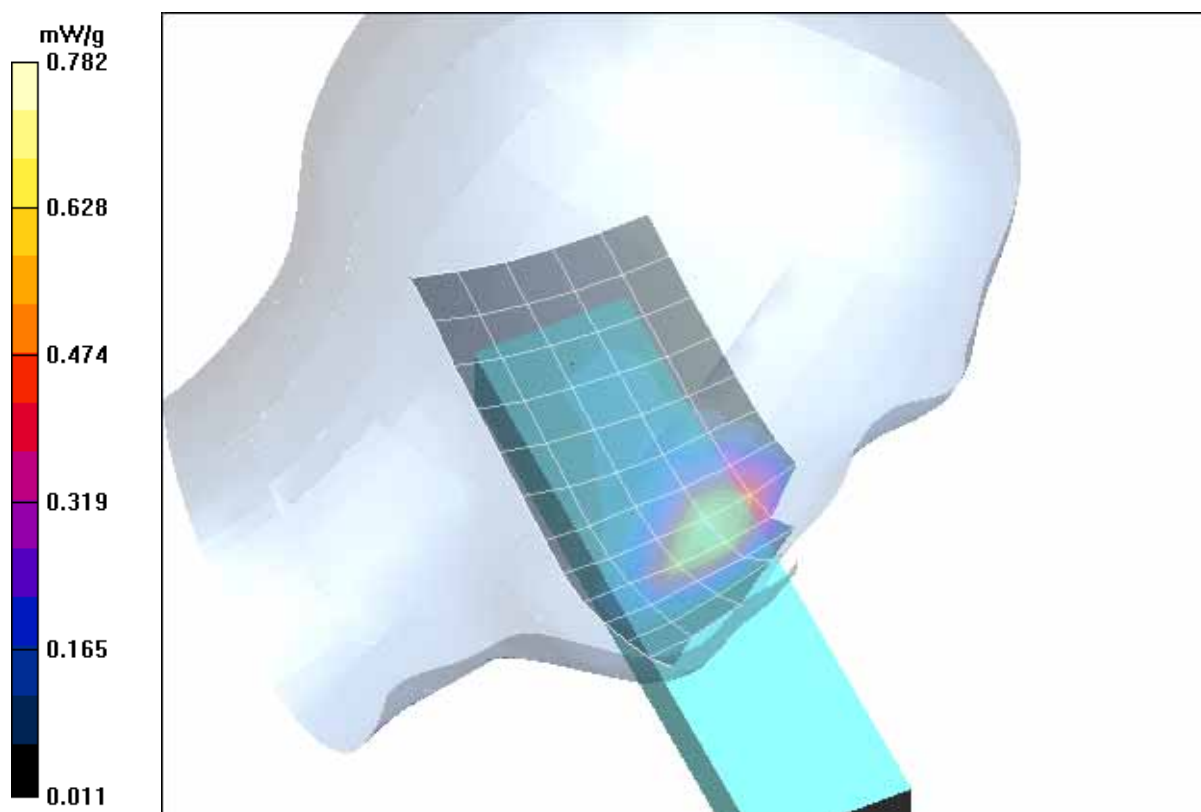


Fig. 21: SAR distribution for PCS 1900, channel 661, cheek position, left side of head (August 22, 2005; Ambient Temperature: 22.3°C; Liquid Temperature : 21.5°C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [179bp1m 2 flash.da4](#)

DUT: Siemens; **Type:** CF76; **Serial:** 004400014517179

Program Name: Tilted Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilted Left/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.237 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.250 mW/g

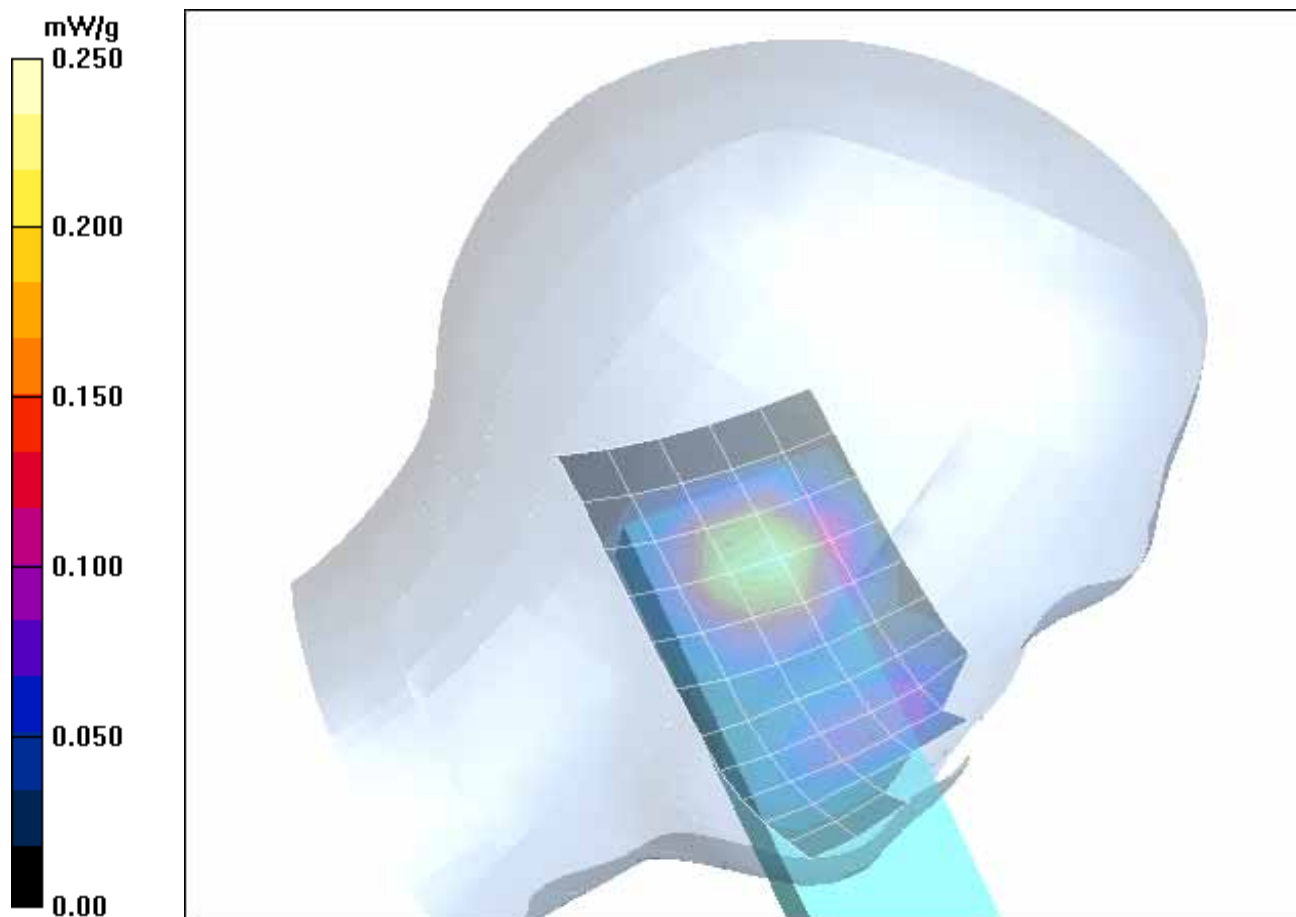


Fig. 22: SAR distribution for PCS 1900, channel 661, tilted position, left side of head (August 22, 2005; Ambient Temperature: 22.2°C; Liquid Temperature : 21.4°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179bprm 1 flash.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Cheek Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek Right/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.736 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.41 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.704 mW/g; SAR(10 g) = 0.415 mW/g

Maximum value of SAR (measured) = 0.777 mW/g

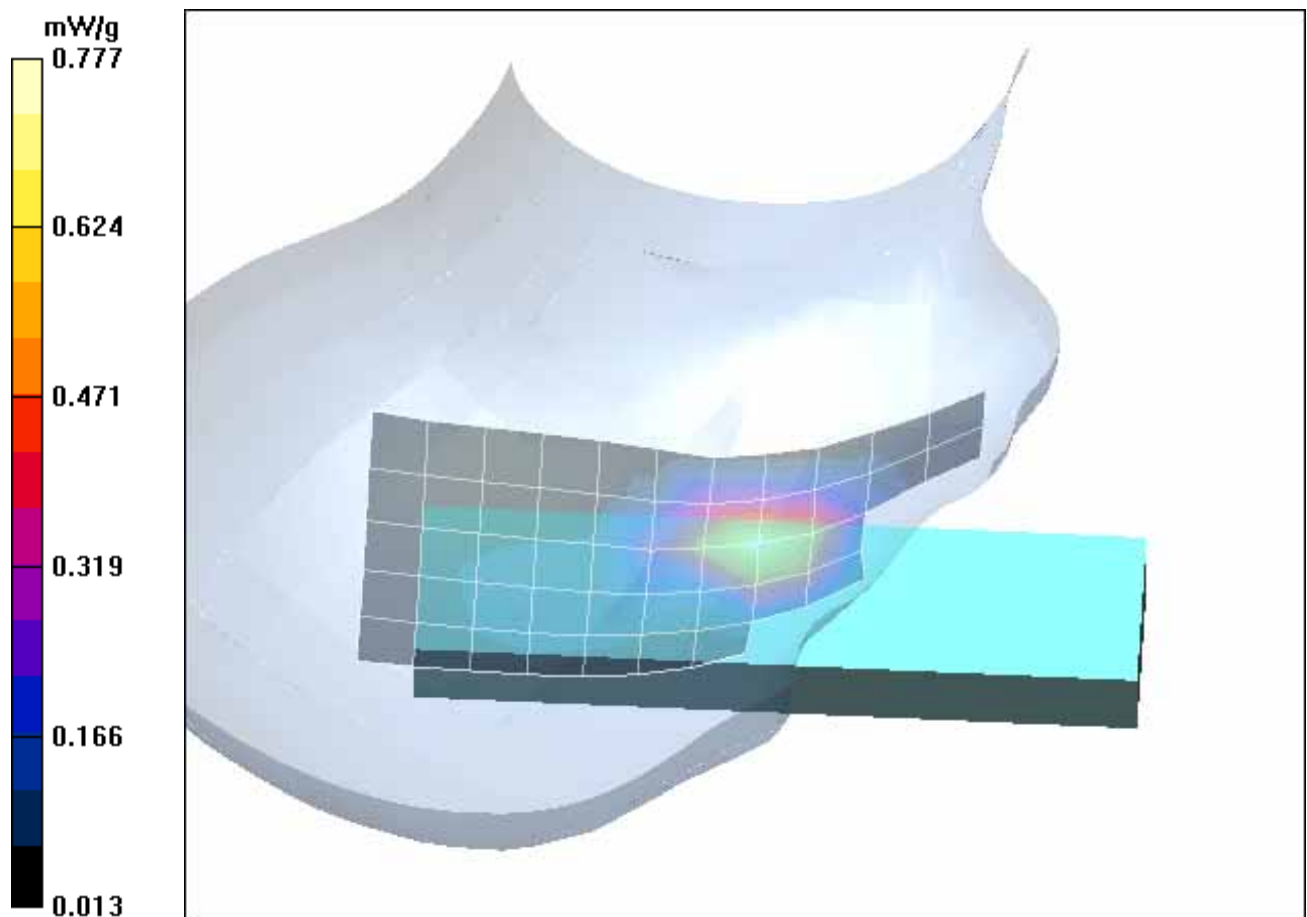


Fig. 23: SAR distribution for PCS 1900, channel 661, cheek position, right side of head (August 22, 2005; Ambient Temperature: 22.3°C; Liquid Temperature: 21.4°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [179bprm 2 flash.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Tilted Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilted Right/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.272 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = 0.080 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.165 mW/g

Maximum value of SAR (measured) = 0.297 mW/g

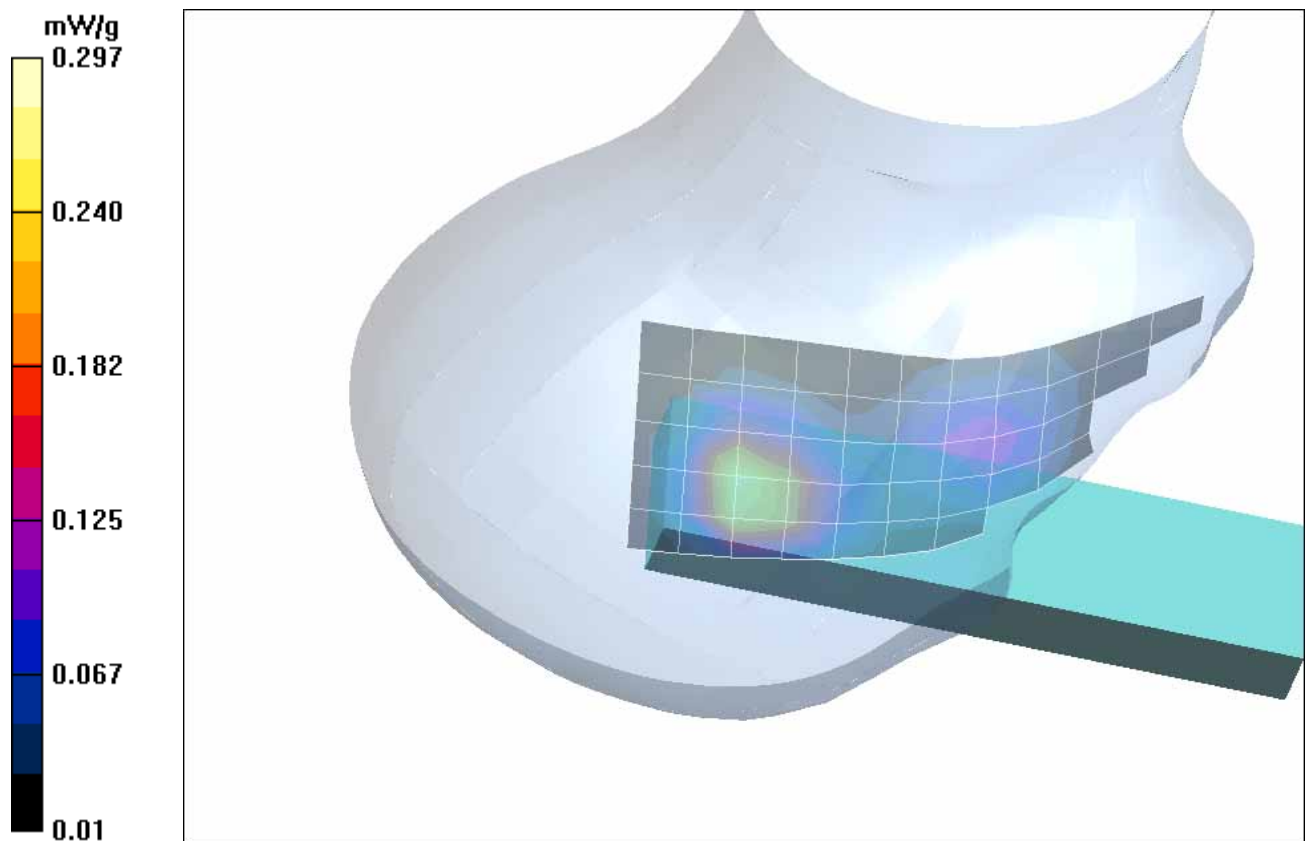


Fig. 24: SAR distribution for PCS 1900, channel 661, tilted position, right side of head (August 22, 2005; Ambient Temperature: 22.3°C; Liquid Temperature : 21.3°C)

5 SAR Distribution Plots, GSM 850 Body without accessory in GSM mode

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [179yahm_3.da4](#)

DUT: Siemens; Type: CF76 Body; Serial: 004400014517179

Program Name: Body Worn

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.331 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.0 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.443 W/kg

SAR(1 g) = 0.320 mW/g; SAR(10 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.340 mW/g

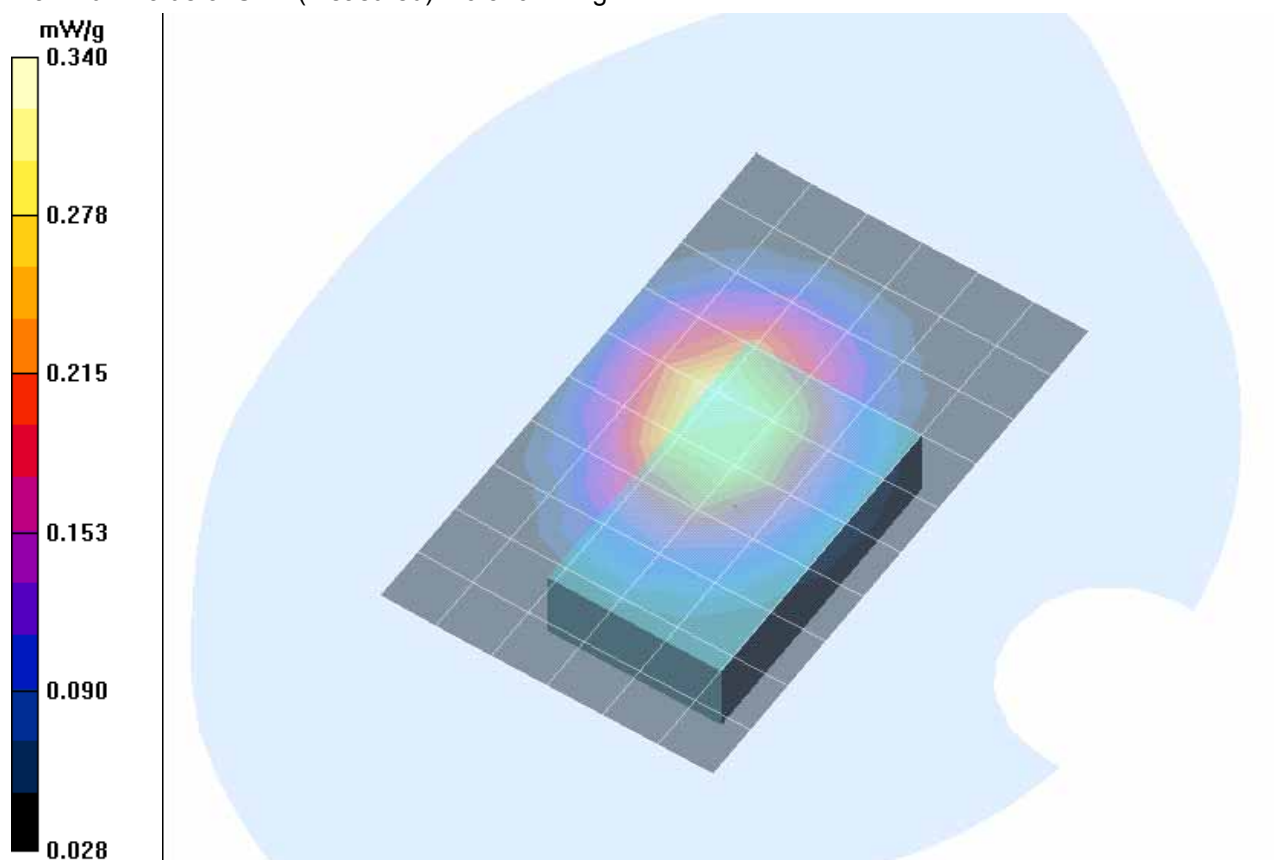


Fig. 25: SAR distribution for GSM 850, channel 190, body worn configuration, antenna towards the phantom, without accessory, 15 mm distance (August 22, 2005; Ambient Temperature: 22.3° C; Liquid Temperature: 21.4° C).

6 SAR Distribution Plots, GSM 850 Body with headset in GSM mode

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [179yahm_4.da4](#)

DUT: Siemens; Type: CF76 Body; Serial: 004400014517179

Program Name: Body Worn

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.266 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.275 mW/g

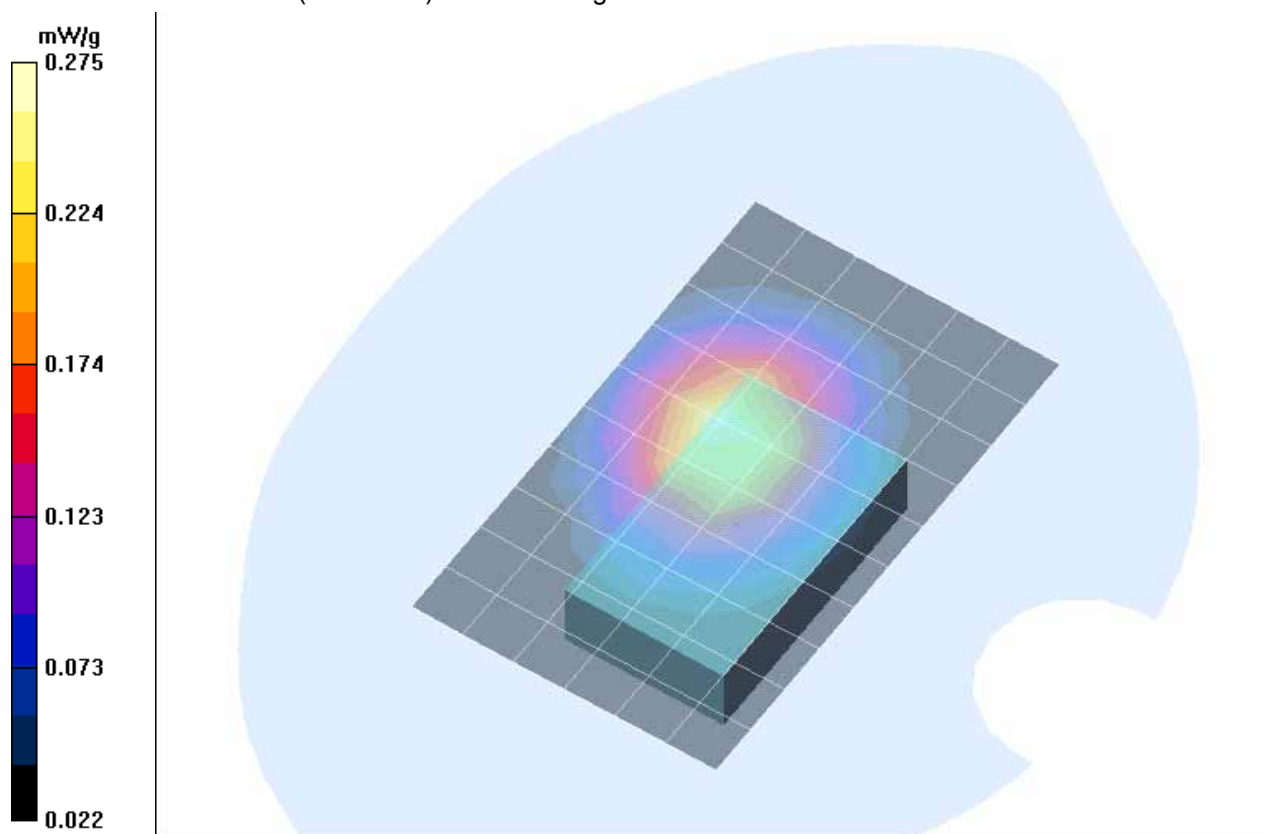


Fig. 26: SAR distribution for GSM 850, channel 190, body worn configuration, antenna towards the phantom, with headset, 15 mm distance (August 22, 2005; Ambient Temperature: 22.3° C; Liquid Temperature: 21.4° C).

7 SAR Distribution Plots, GSM 850 Body without accessory in GPRS mode

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [179yahm_6.da4](#)

DUT: Siemens; Type: CF76 Body; Serial: 004400014517179

Program Name: Body Worn

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.640 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.8 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.850 W/kg

SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.429 mW/g

Maximum value of SAR (measured) = 0.661 mW/g

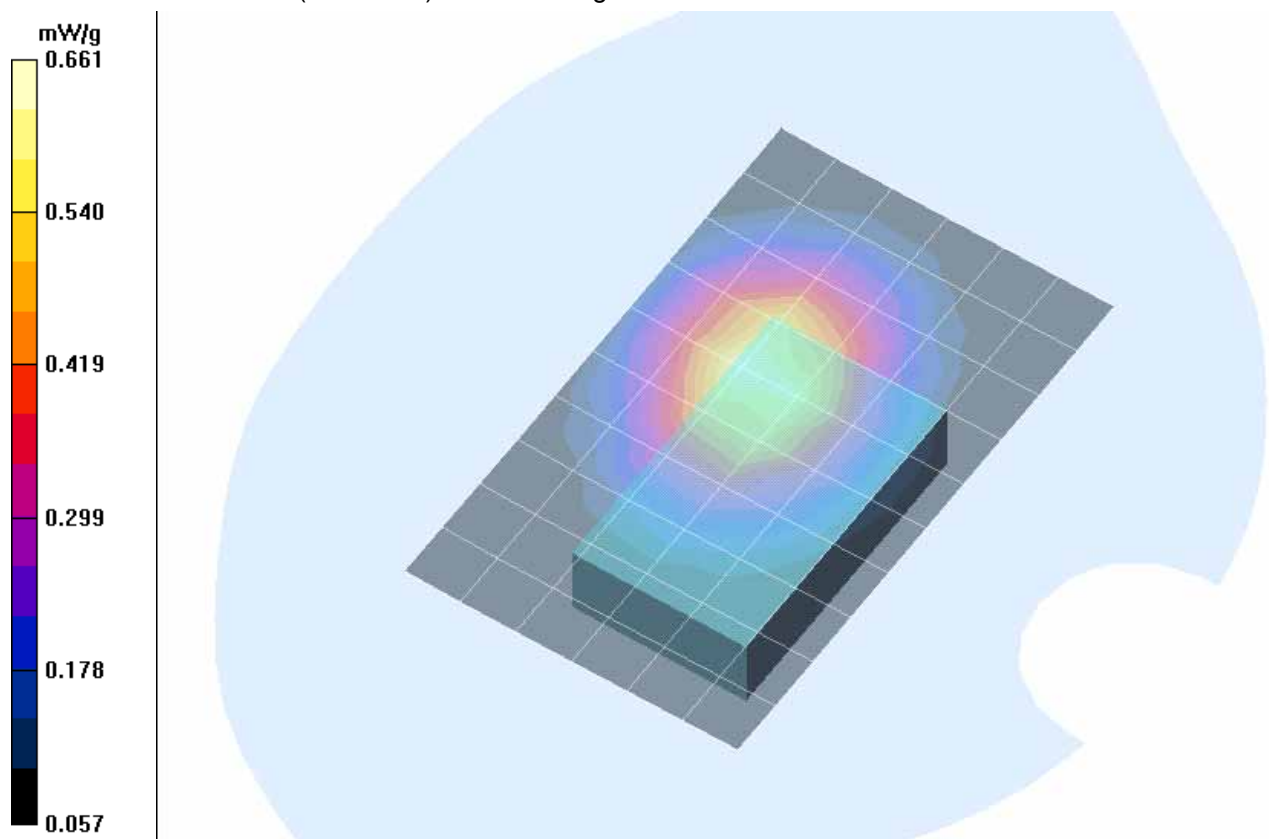


Fig. 27: SAR distribution for GPRS 850, channel 190, body worn configuration, antenna towards the phantom, without accessory, 15 mm distance (August 22, 2005; Ambient Temperature: 22.3° C; Liquid Temperature: 21.3° C).

8 SAR Distribution Plots, GSM 850 Body with data cable in GPRS mode

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [179yahm_5.da4](#)

DUT: Siemens; Type: CF76 Body; Serial: 004400014517179

Program Name: Body Worn

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.452 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.9 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.440 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.473 mW/g

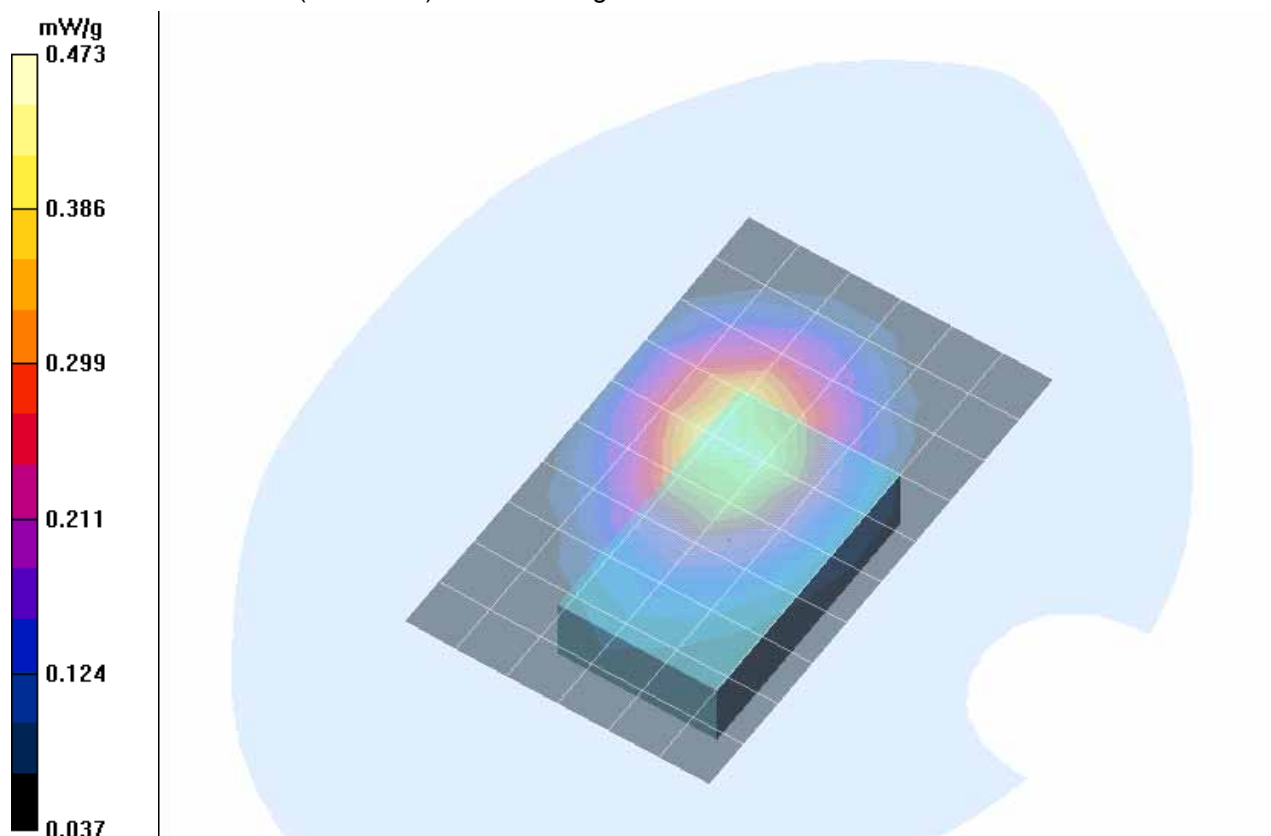


Fig. 28: SAR distribution for GPRS 850, channel 190, body worn configuration, antenna towards the phantom, with data cable, 15 mm distance (August 22, 2005; Ambient Temperature: 22.3° C; Liquid Temperature: 21.3° C).

9 SAR Distribution Plots, PCS 1900 Body without accessory in GSM mode

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [179yphm_3_15mm_ohne.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.155 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.87 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.147 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.158 mW/g

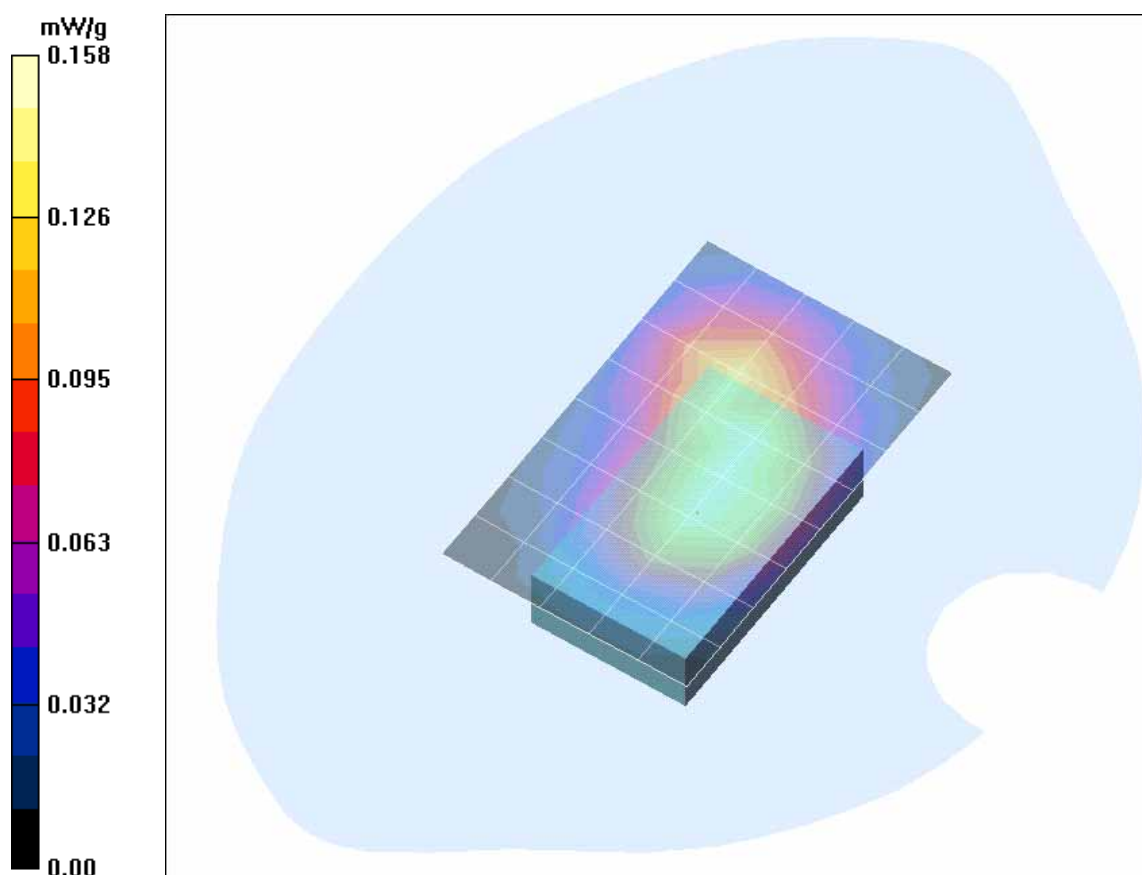


Fig. 29: SAR distribution for PCS 1900, channel 661, body worn configuration, antenna towards the phantom, without accessory, 15 mm distance (August 23, 2005; Ambient Temperature: 22.1° C; Liquid Temperature: 21.0° C).

10 SAR Distribution Plots, PCS 1900 Body with headset in GSM mode

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [179yphm_4_15mm_headset.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.144 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.29 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.146 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.29 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.137 mW/g

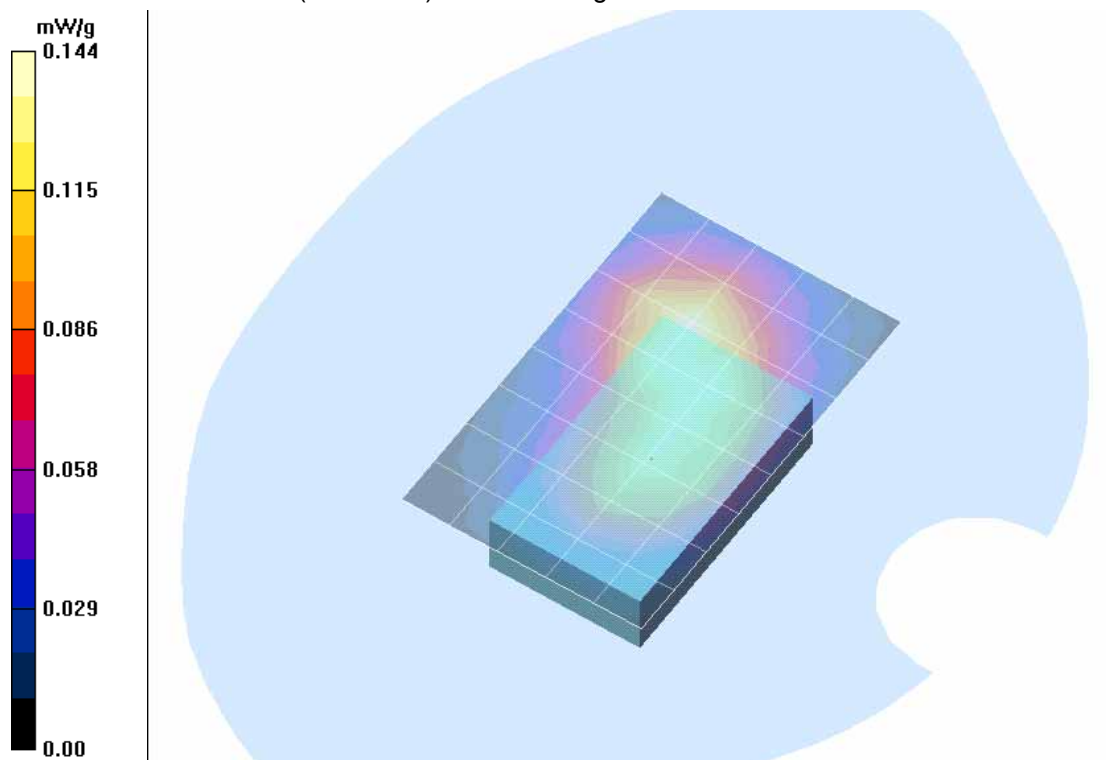


Fig. 30: SAR distribution for PCS 1900, channel 661, body worn configuration, antenna towards the phantom, with headset, 15 mm distance (August 23, 2005; Ambient Temperature: 22.0° C; Liquid Temperature: 21.0° C).

11 SAR Distribution Plots, PCS 1900 Body without accessory in GPRS mode

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [179yphm_6_15mm_ohne.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.293 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.289 mW/g; SAR(10 g) = 0.186 mW/g

Maximum value of SAR (measured) = 0.309 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.291 mW/g

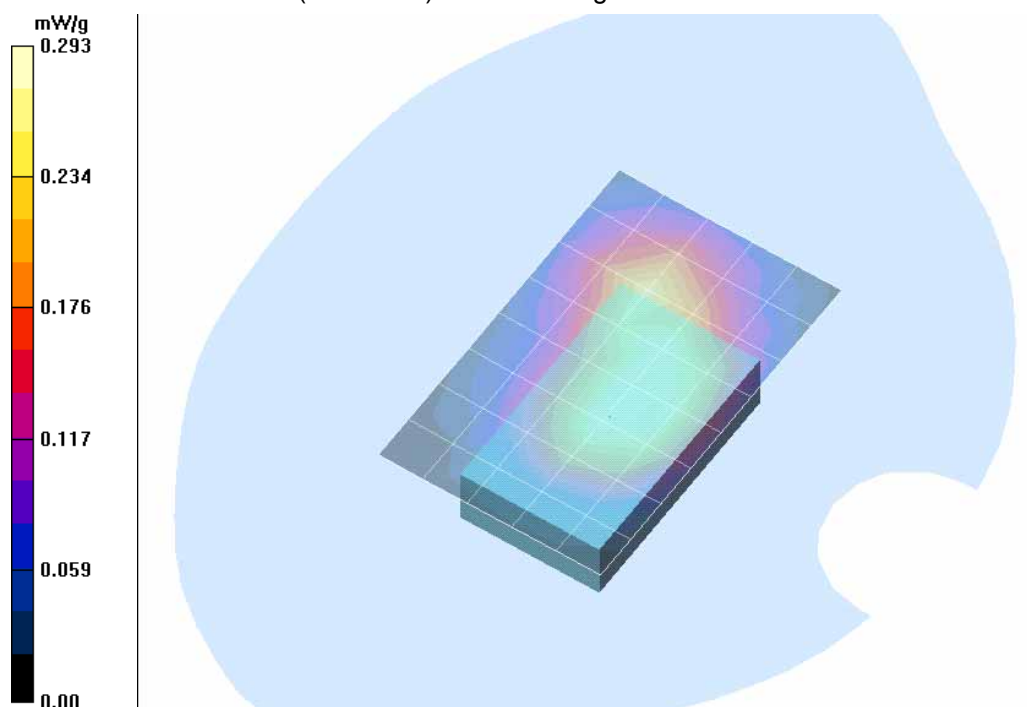


Fig. 31: SAR distribution for GPRS 1900 Class 10, channel 661, body worn configuration, antenna towards the phantom, without accessory, 15 mm distance (August 23, 2005; Ambient Temperature: 22.1° C; Liquid Temperature: 21.0° C).

12 SAR Distribution Plots, PCS 1900 Body with data cable in GPRS mode

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [179yphm_5_15mm_data.da4](#)

DUT: Siemens; Type: CF76; Serial: 004400014517179

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.298 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 0.421 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.295 mW/g

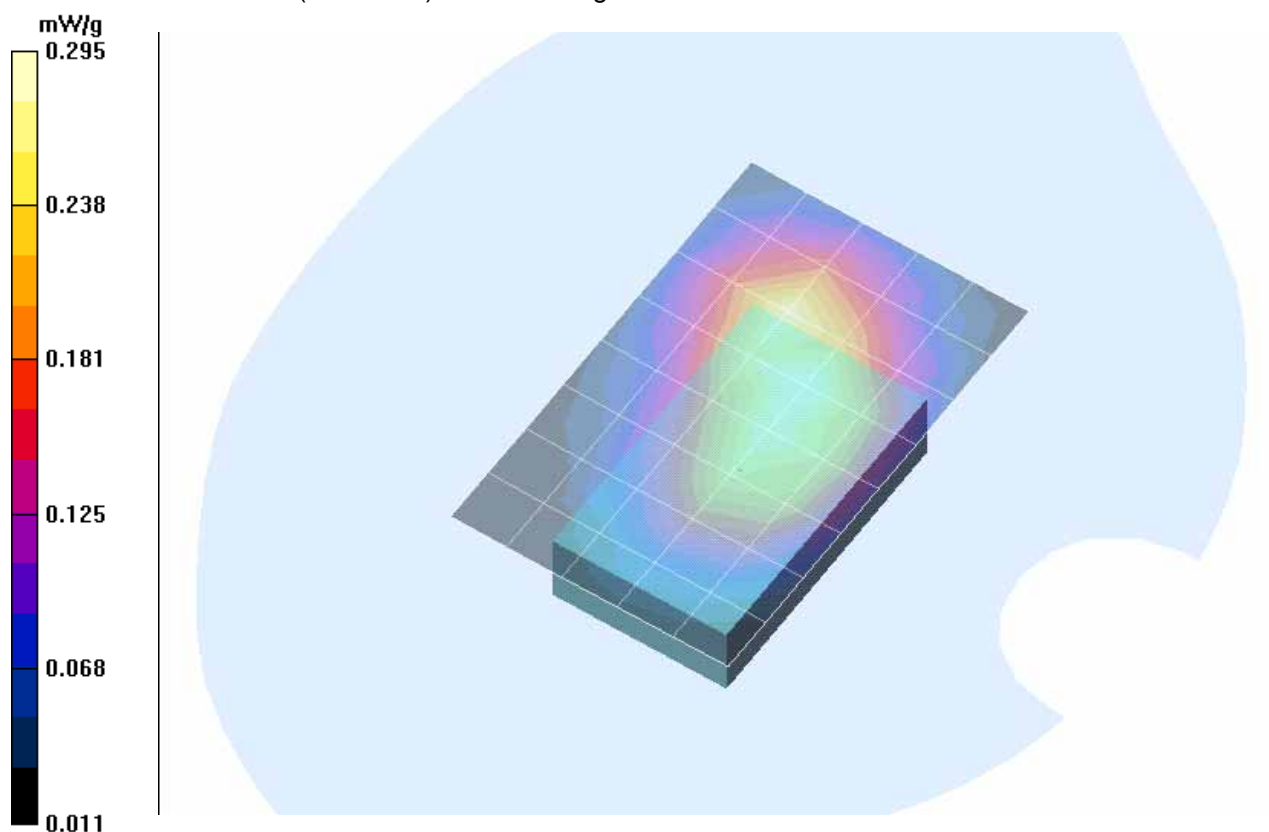


Fig. 32: SAR distribution for GPRS 1900 Class 10, channel 661, body worn configuration, antenna towards the phantom, with data cable, 15 mm distance (August 23, 2005; Ambient Temperature: 22.0°C; Liquid Temperature: 21.2°C).

13 SAR z-axis scans (Validation)

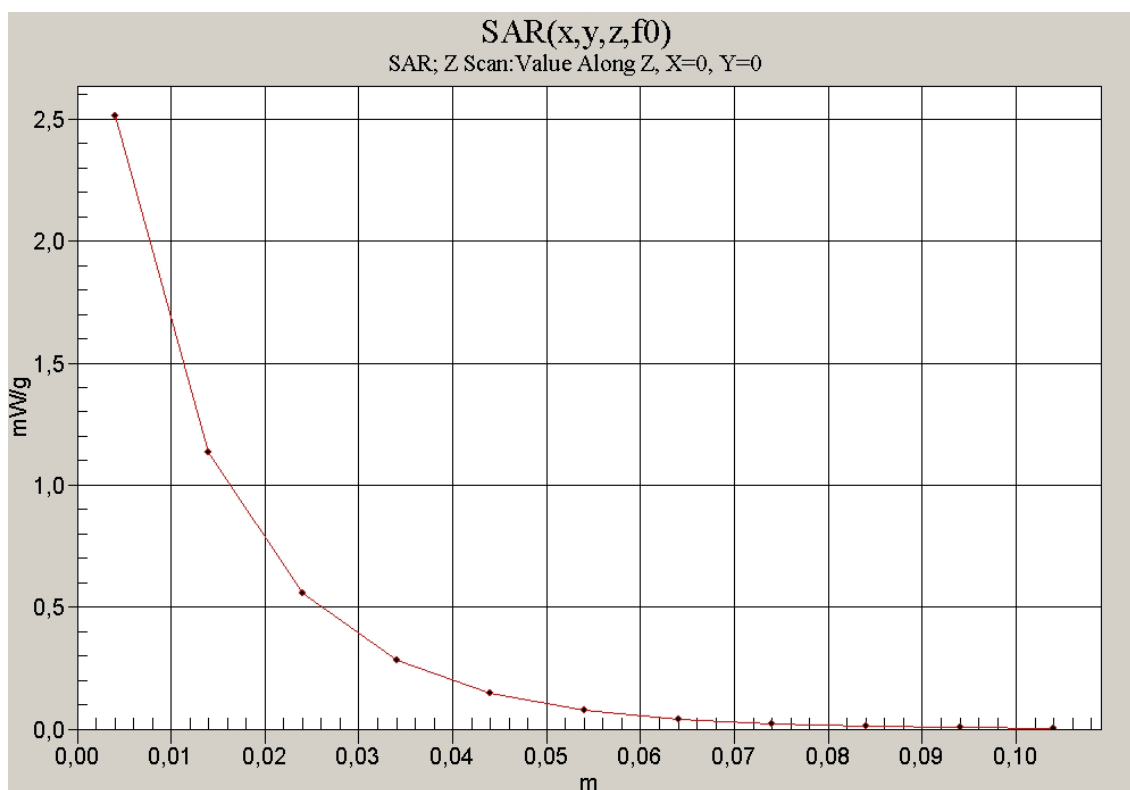


Fig. 33: SAR versus liquid depth, 835 MHz, head (August 18, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.5° C).

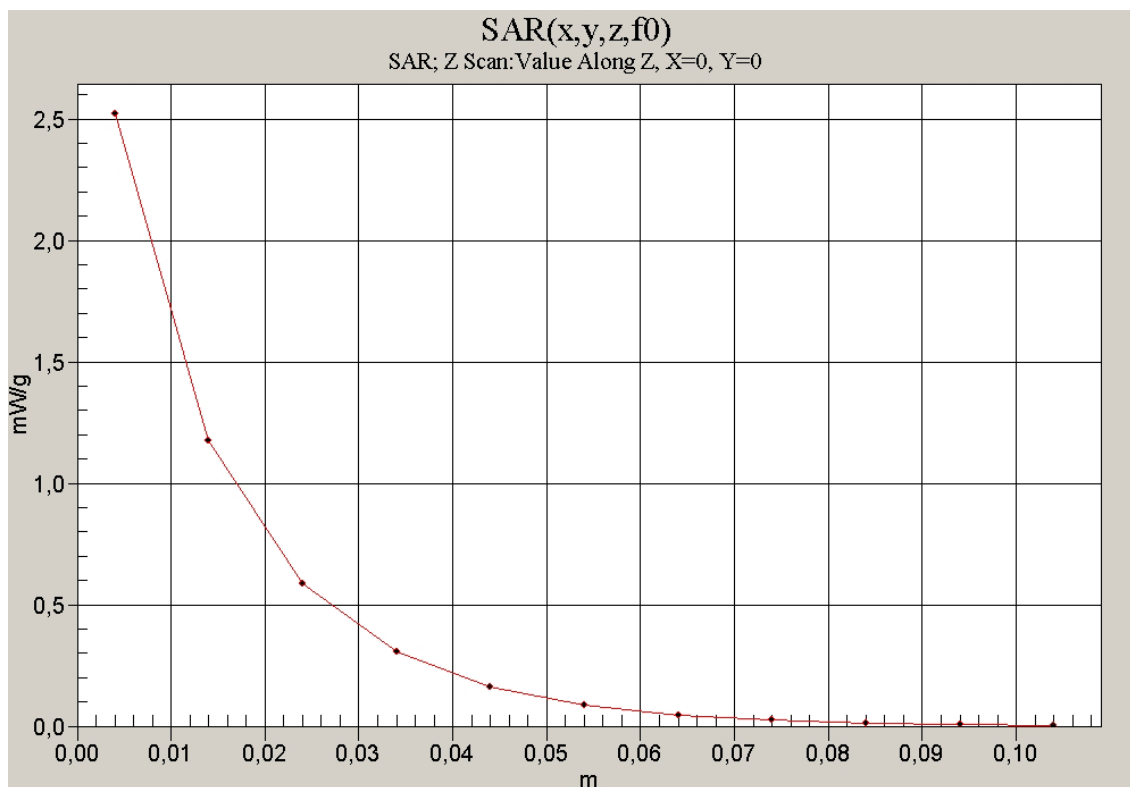


Fig. 34: SAR versus liquid depth, 835 MHz, body (August 22, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.0° C).

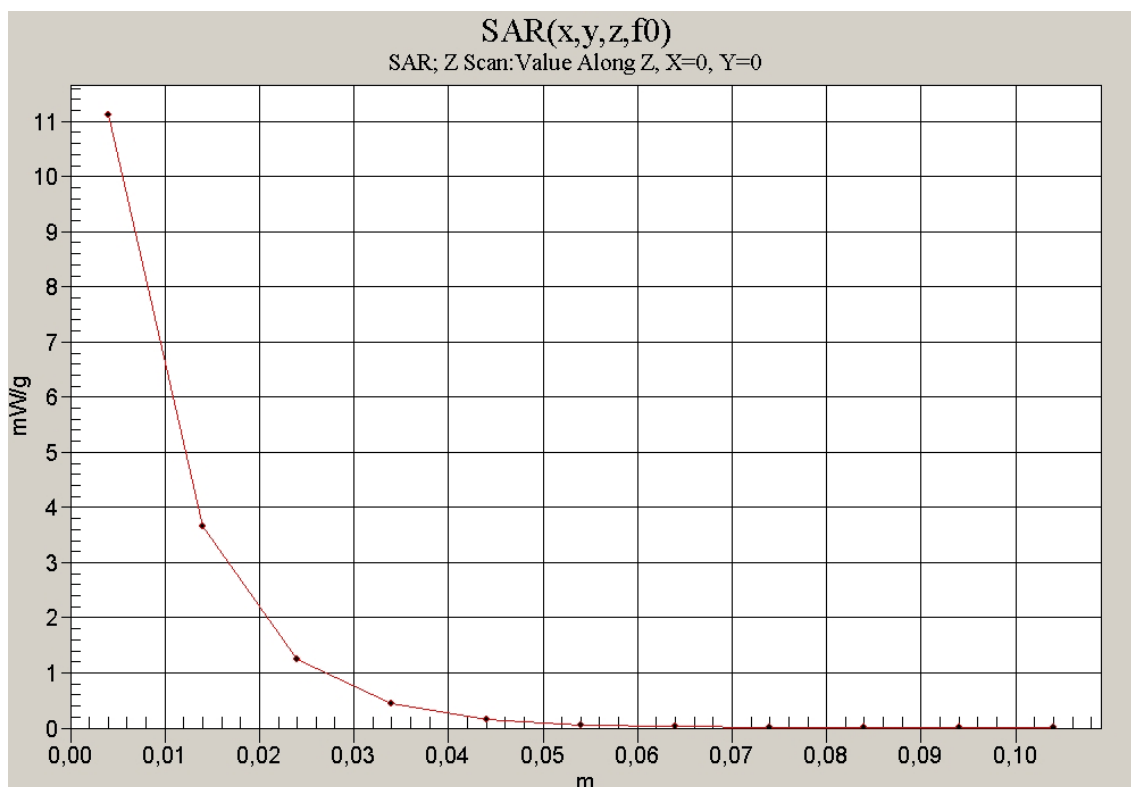


Fig. 35: SAR versus liquid depth, 1900 MHz, head (August 22, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.0° C).

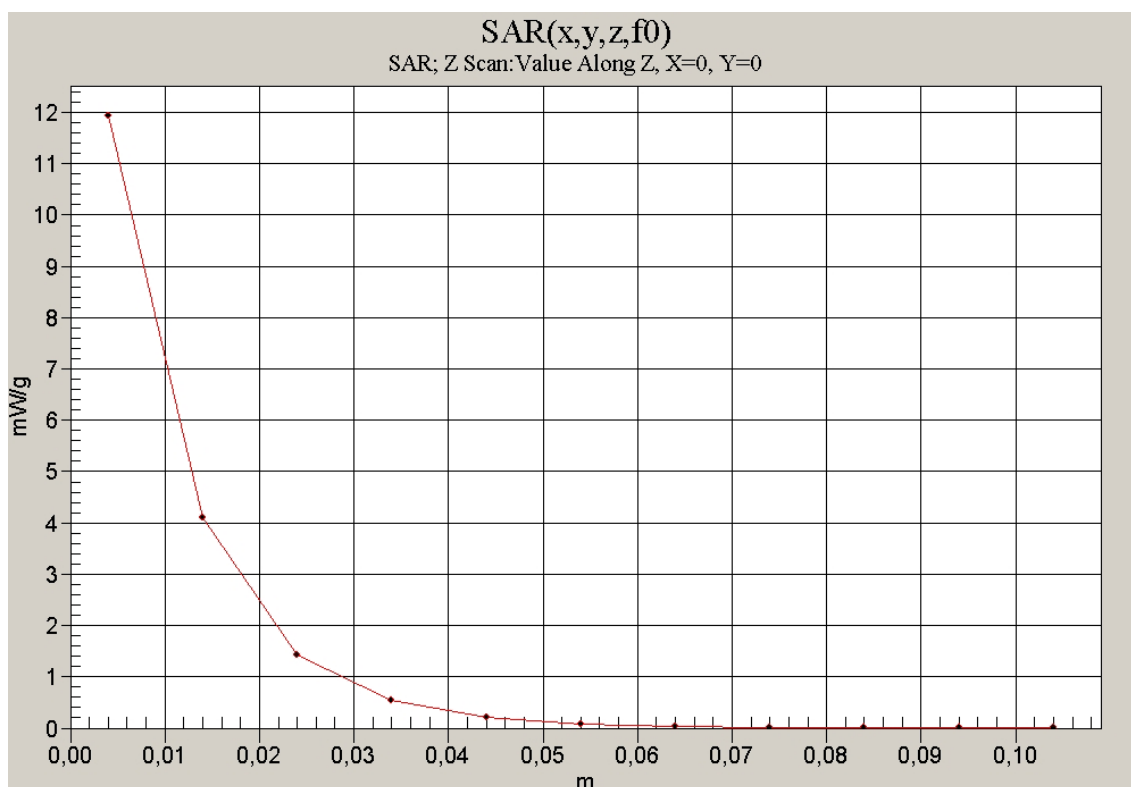


Fig. 36: SAR versus liquid depth, 1900 MHz, body (August 23, 2005; Ambient Temperature: 22.1° C; Liquid Temperature : 21.0° C).

14 SAR z-axis scans (Measurements)

The following pictures show the plots of SAR versus liquid depth for the worst case values.

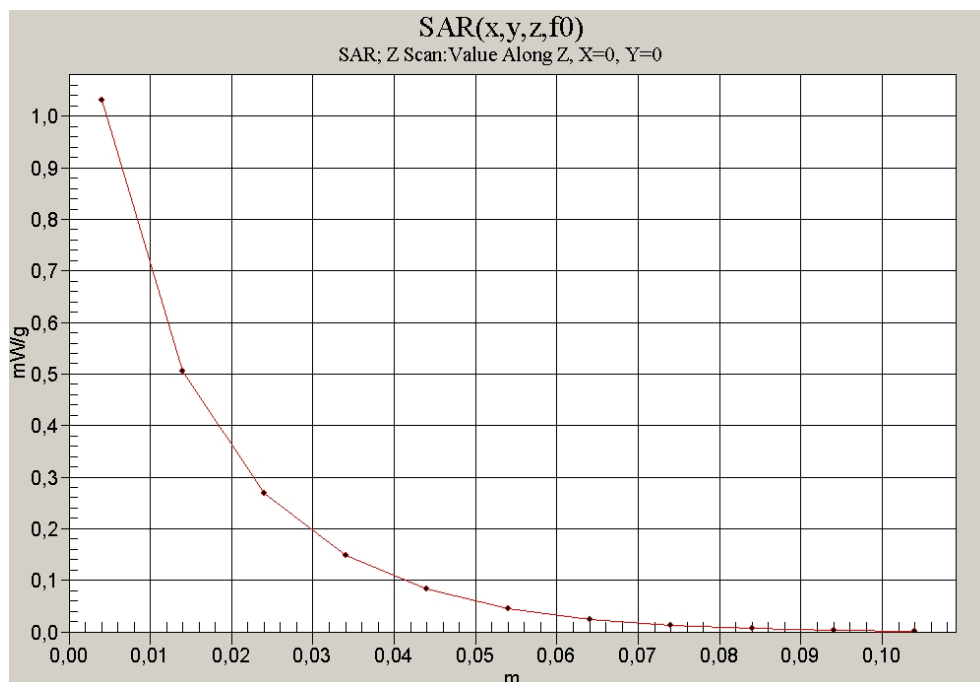


Fig. 37: SAR versus liquid depth, head: GSM 850, channel 251, cheek position, right side of head (August 18, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.2° C).

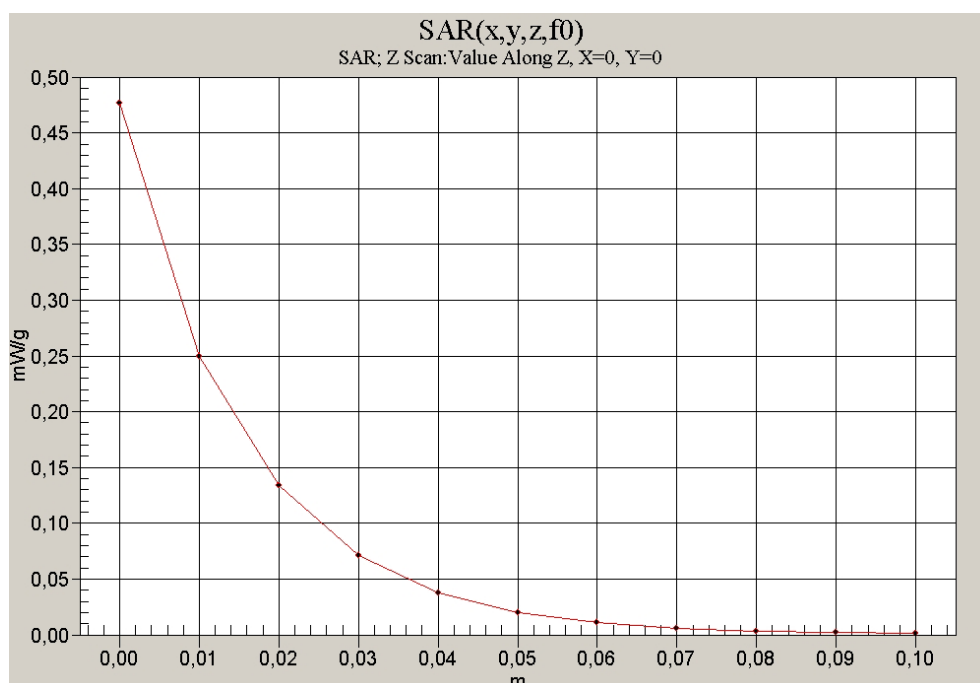


Fig. 38: SAR versus liquid depth, body: GPRS 850 Class 10, channel 190, without accessory, 15 mm distance, (August 22, 2005; Ambient Temperature: 22.3° C; Liquid Temperature : 21.3° C).

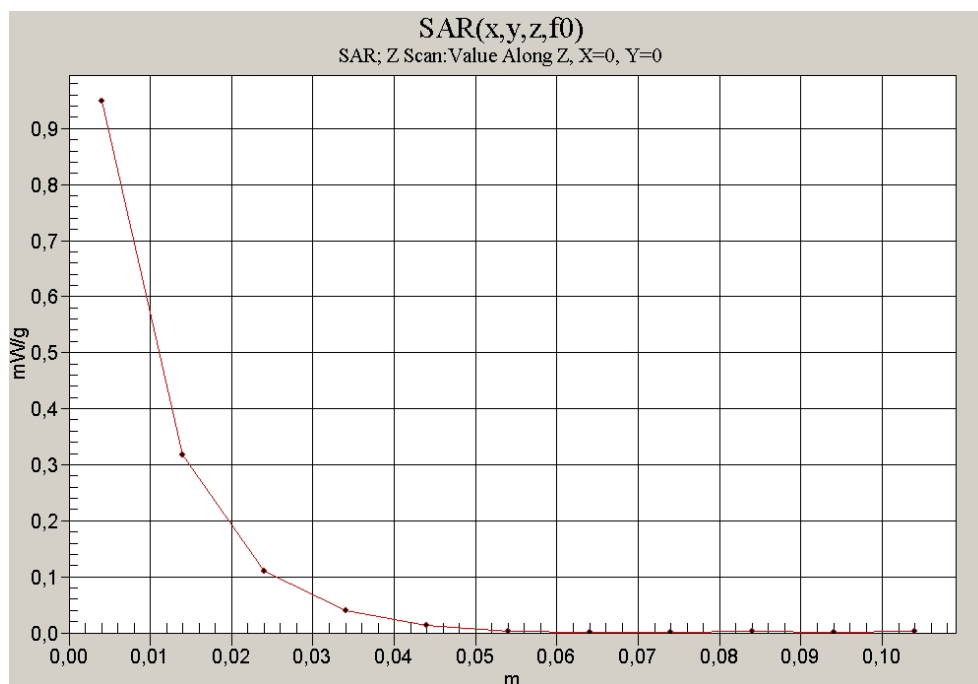


Fig. 39: SAR versus liquid depth, head: PCS 1900, channel 661, cheek position, right side of head (August 22, 2005; Ambient Temperature: 22.4° C; Liquid Temperature : 21.5° C).

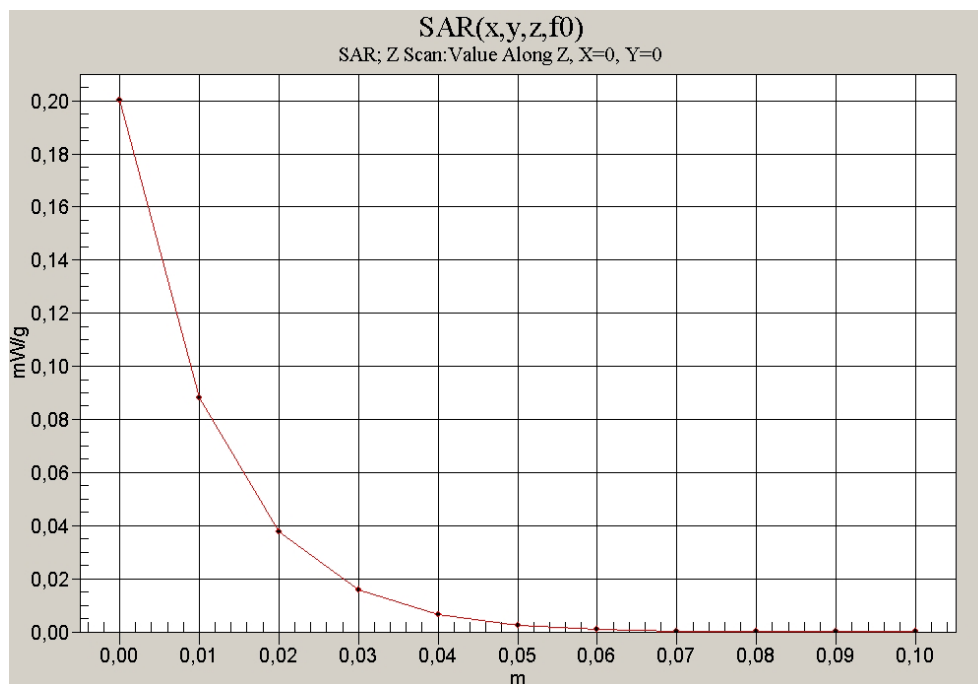


Fig. 40: SAR versus liquid depth, body: GPRS 1900 Class 10, channel 661, without accessory, 15 mm distance, (August 23, 2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.0° C).