



# FCC Test Report

## FCC Part 22,24 / RSS 132,133

FOR:

TRI-BAND GSM MOBILE PHONE

MODEL #: CF76

SIEMENS COMMUNICATIONS, INC.  
16745 WEST BERNARDO DRIVE SUITE 120  
SAN DIEGO, CA 92127  
U.S.A

FCC ID: PWX-CF76  
IC ID: 267E-CF76

TEST REPORT #: EMC\_1028\_2005\_FCC22/24  
DATE: SEPTEMBER 02, 2005



TTI-P-G 081/94-A0

Accredited according to ISO/IEC 17025



Bluetooth Qualification  
Test Facility  
(BQTF)



FCC listed # 101450  
IC recognized # 3925

**CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

## **Table of Contents**

<b>1</b>	<b>ASSESSMENT .....</b>	<b>4</b>
<b>2</b>	<b>ADMINISTRATIVE DATA.....</b>	<b>5</b>
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT .....	5
2.2	IDENTIFICATION OF THE CLIENT .....	5
2.3	IDENTIFICATION OF THE MANUFACTURER .....	5
<b>3</b>	<b>EQUIPMENT UNDER TEST (EUT).....</b>	<b>6</b>
3.1	IDENTIFICATION OF THE EQUIPMENT UNDER TEST .....	6
<b>4</b>	<b>SUBJECT OF INVESTIGATION.....</b>	<b>7</b>
<b>5</b>	<b>MEASUREMENTS.....</b>	<b>8</b>
5.1	RF POWER OUTPUT .....	8
5.1.1	FCC 2.1046 Measurements required: RF power output.....	8
5.1.2	Limits: .....	8
5.1.2.1	FCC 22.913 (a) Effective radiated power limits. ....	8
5.1.2.2	FCC 24.232 (b)(c) Power limits.....	8
5.1.3	Conducted Output Power Measurement procedure:.....	8
5.1.4	Results 850 MHz band(conducted): .....	9
5.1.5	Results 1900 MHz band(conducted): .....	9
5.1.6	Radiated Output Power Measurement procedure:.....	10
5.1.7	ERP Results 850 MHz band: .....	11
5.1.8	EIRP Results 1900 MHz band:.....	11
5.2	OCCUPIED BANDWIDTH/EMISSION BANDWIDTH .....	18
5.2.1	FCC 2.1049 Measurements required: Occupied bandwidth.....	18
5.2.2	Occupied / emission bandwidth measurement procedure:.....	18
5.2.3	Occupied / Emission bandwidth results 850 MHz band: .....	19
5.2.4	Occupied / Emission bandwidth results 1900 MHz band: .....	26
5.3	FREQUENCY STABILITY .....	33
5.3.1	Limit .....	33
5.3.2	FREQUENCY STABILITY (GSM-850) .....	34
5.3.3	FREQUENCY STABILITY (PCS-1900) .....	35
5.4	SPURIOUS EMISSIONS CONDUCTED .....	36
5.4.1	FCC 2.1051 Measurements required: Spurious emissions at antenna terminals. ....	36
5.4.2	Limits: .....	36
5.4.2.1	FCC 22.917 Emission limitations for cellular equipment. ....	36
5.4.2.2	FCC 24.238 Emission limitations for Broadband PCS equipment. ....	36
5.4.3	Conducted out of band emissions measurement procedure:.....	37
5.4.4	Bandedge Results GSM-850.....	38
5.4.5	Conducted Spurious Results GSM-850 .....	40
5.4.6	Bandedge Results PCS-1900 .....	44
5.4.7	Conducted Spurious Results PCS-1900 .....	46
5.5	SPURIOUS EMISSIONS RADIATED .....	50
5.5.1	FCC 2.1053 Measurements required: Field strength of spurious radiation.....	50
5.5.2	Limits: .....	50
5.5.2.1	FCC 22.917 Emission limitations for cellular equipment. ....	50
5.5.2.2	FCC 24.238 Emission limitations for Broadband PCS equipment. ....	50
5.5.3	Radiated out of band measurement procedure: .....	51



5.5.4 Radiated out of band emissions results on EUT: ..... 53

5.6 RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-133 ..... 84

5.6.1 Receiver Spurious on EUT..... 85

5.7 AC POWERLINE CONDUCTED EMISSIONS § 15.107/207 ..... 90

5.7.1 Results EUT..... 91

6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS ..... 93

7 REFERENCES ..... 94

## 1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS132 and RSS133.

Company	Description	Model #
SIEMENS COMMUNICATIONS, INC.	TRI-BAND GSM MOBILE PHONE	CF76



2005-09-02  
Neelesh Raj  
Project Leader



2005-09-02  
Lothar Schmidt  
Test Lab Manager

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

## **2 Administrative Data**

### **2.1 Identification of the Testing Laboratory Issuing the EMC Test Report**

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Neelesh Raj
Date of test:	2005-06-09 to 2005-06-11 2005-08-23 to 2005-08-28

### **2.2 Identification of the Client**

Applicant's Name:	SIEMENS COMMUNICATIONS, INC.
Street Address:	16745 WEST BERNARDO DRIVE SUITE 120
City/Zip Code	SAN DIEGO, CA 92127
Country	U.S.A
Contact Person:	KEVIN WOLENTARSKI
Phone No.	858.521.3352
Fax:	858.521.3105
e-mail:	<a href="mailto:Kevin.Wolentarski@siemens.com">Kevin.Wolentarski@siemens.com</a>

### **2.3 Identification of the Manufacturer**

Manufacturer's Name:	SIEMENS INDUSTRIAL PARK
Manufacturers Address:	777 CHUANQIAO ROAD, PUDONG
City/Zip Code	SHANGHAI 201206
Country	CHINA

### **3 Equipment under Test (EUT)**

#### **3.1 Identification of the Equipment under Test**

Marketing Name:	CF76
Description:	TRI-BAND GSM MOBILE PHONE
Model No:	CF76
FCC ID:	PWX-CF76
IC ID:	267E-CF76
Frequency Range:	824.2MHz – 848.8MHz for GSM 850, 1850.2MHz – 1909.8MHz for PCS 1900
Type(s) of Modulation:	GMSK
Number of Channels:	124 for GSM-850, 299 for PCS-1900
Antenna Type:	EXTERNAL
Output Power:	FCC 22: 0.690W ERP @ 824.2MHz FCC 24: 0.879W EIRP @ 1850.2MHz

#### **4 Subject of Investigation**

The objective of the measurements done by Cetecom Inc. was to measure the performance of the Tri-Band GSM Mobile Phone *model#*: CF 76 referred to as EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS132 and RSS133.

## 5 Measurements

### 5.1 RF Power Output

#### 5.1.1 FCC 2.1046 Measurements required: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

#### 5.1.2 Limits:

##### 5.1.2.1 FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

##### 5.1.2.2 FCC 24.232 (b)(c) Power limits.


(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

#### 5.1.3 Conducted Output Power Measurement procedure:

Based on TIA-603B November 2002

##### 2.2.1 Conducted Carrier Output Power Rating

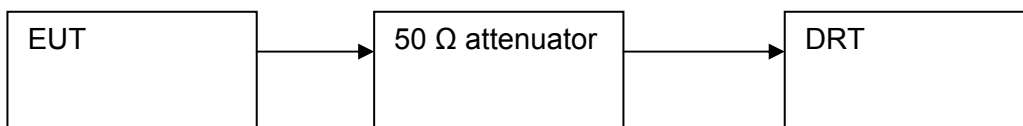

1. Connect the equipment as shown in the above diagram. A Digital Radiocommunication Tester (DRT) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the DRT to set the EUT to its maximum power at the required channel.
3. Record the output power level measured by the DRT.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.



**5.1.4 Results 850 MHz band(conducted):**

Conducted power measurements are provided by SIEMENS (*see attachment*)

REPORT #: Adonis\_Conducted\_Power\_V20.doc "Conducted Output power

GSM850/PCS1900"

PAGE 5, SECTION 4

FCC Emission Sample#7

IMEI: 004400014516965

Frequency (MHz)	Conducted Output Power (dBm)
824.2	31.6
836.6	31.5
848.8	31.5

**5.1.5 Results 1900 MHz band(conducted):**

Conducted power measurements are provided by SIEMENS (*see attachment*)

REPORT #: Adonis\_Conducted\_Power\_V20.doc "Conducted Output power

GSM850/PCS1900"

PAGE 6, SECTION 4

FCC Emission Sample#7


IMEI: 004400014516965

Frequency (MHz)	Conducted Output Power (dBm)
1850.2	28.8
1880.0	28.9
1909.8	28.9

### 5.1.6 Radiated Output Power Measurement procedure:

Based on TIA-603B November 2002

#### 2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

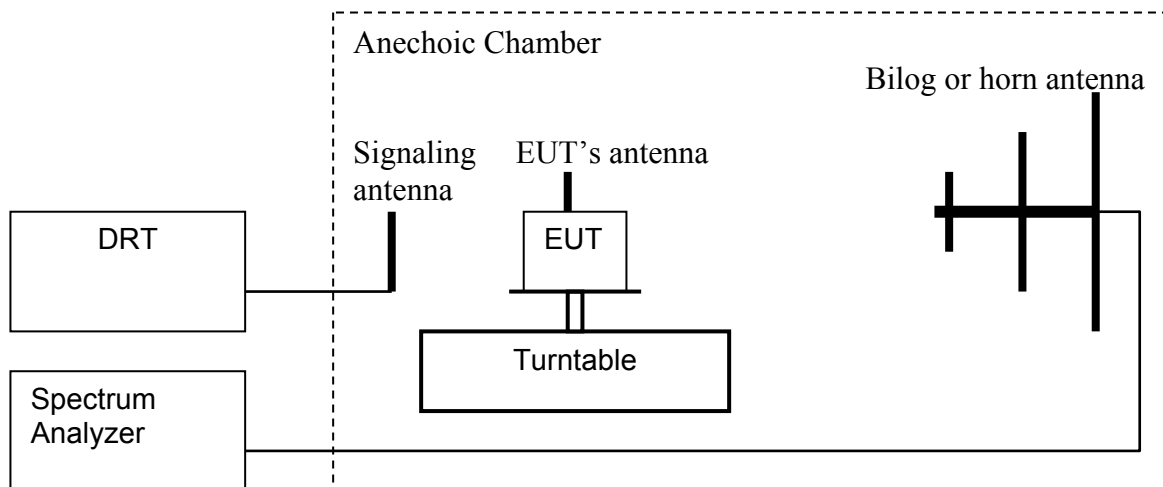

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
  2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
  3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
  4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
  5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
  6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
  7. Determine the ERP using the following equation:  

$$\mathbf{ERP\ (dBm) = LVL\ (dBm) + LOSS\ (dB)}$$
  8. Determine the EIRP using the following equation:  

$$\mathbf{EIRP\ (dBm) = ERP\ (dBm) + 2.14\ (dB)}$$
  9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band. **Spectrum analyzer settings = rbw=vbw=3MHz**
- (note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)

**5.1.7 ERP Results 850 MHz band:**

Power Control Level	Burst Peak ERP
5	≤38.45dBm (7W)

Frequency (MHz)	Effective Radiated Power (dBm)
824.2	28.39
836.6	27.34
848.8	28.25


**5.1.8 EIRP Results 1900 MHz band:**

Power Control Level	Burst Peak EIRP
0	≤33dBm (1W)

Frequency (MHz)	Effective Isotropic Radiated Power (dBm)
1850.2	29.44
1880.0	29.28
1909.8	27.84


**EIRP (GSM-850)**  
**CHANNEL 128****§22.913(a)**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
819.2 MHz	829.2 MHz	Max Peak	Coupled	3 MHz

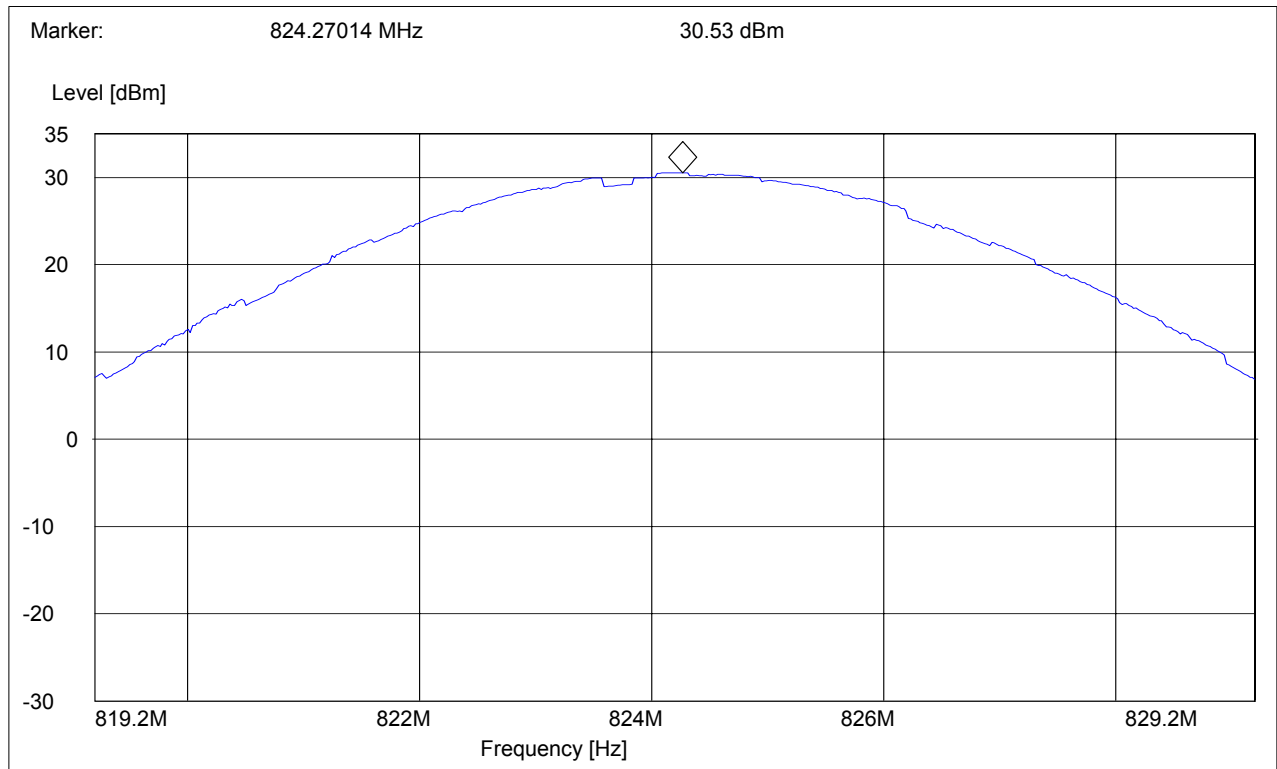


**EIRP (GSM-850)**  
**CHANNEL 190****§22.913(a)**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
831.6 MHz	841.6 MHz	Max Peak	Coupled	3 MHz

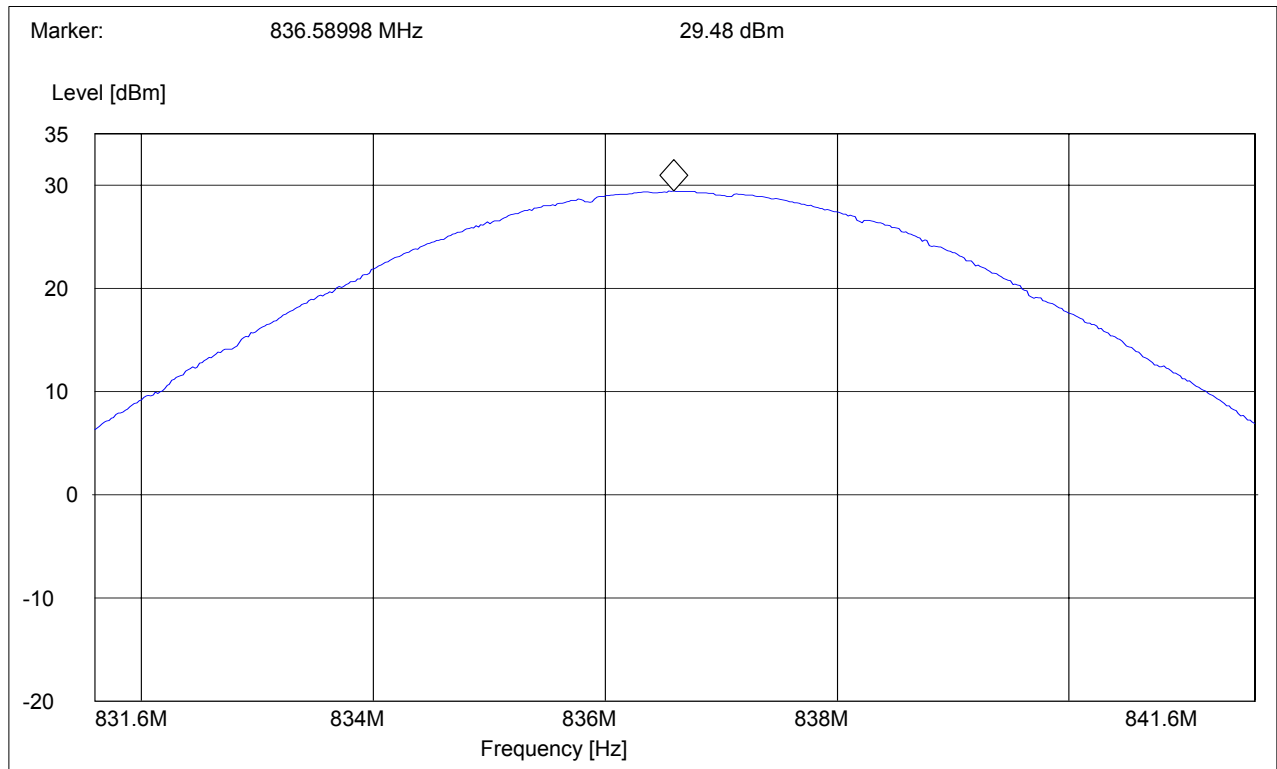


**EIRP (GSM-850)**  
**CHANNEL 251****§22.913(a)**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
843.8 MHz	853.8 MHz	Max Peak	Coupled	3 MHz

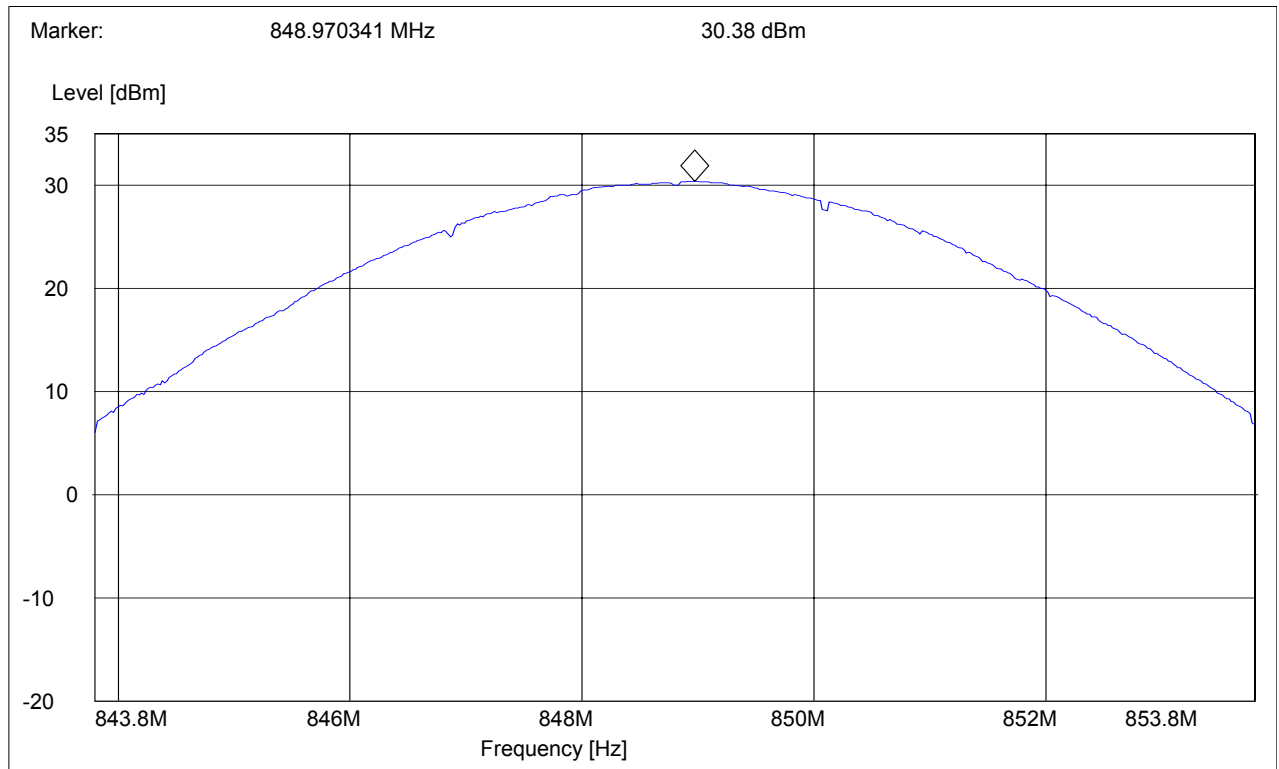


**EIRP (PCS-1900)**  
**CHANNEL 512****§24.232(b)**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
1.8452 GHz	1.8552 MHz	Max Peak	Coupled	3 MHz

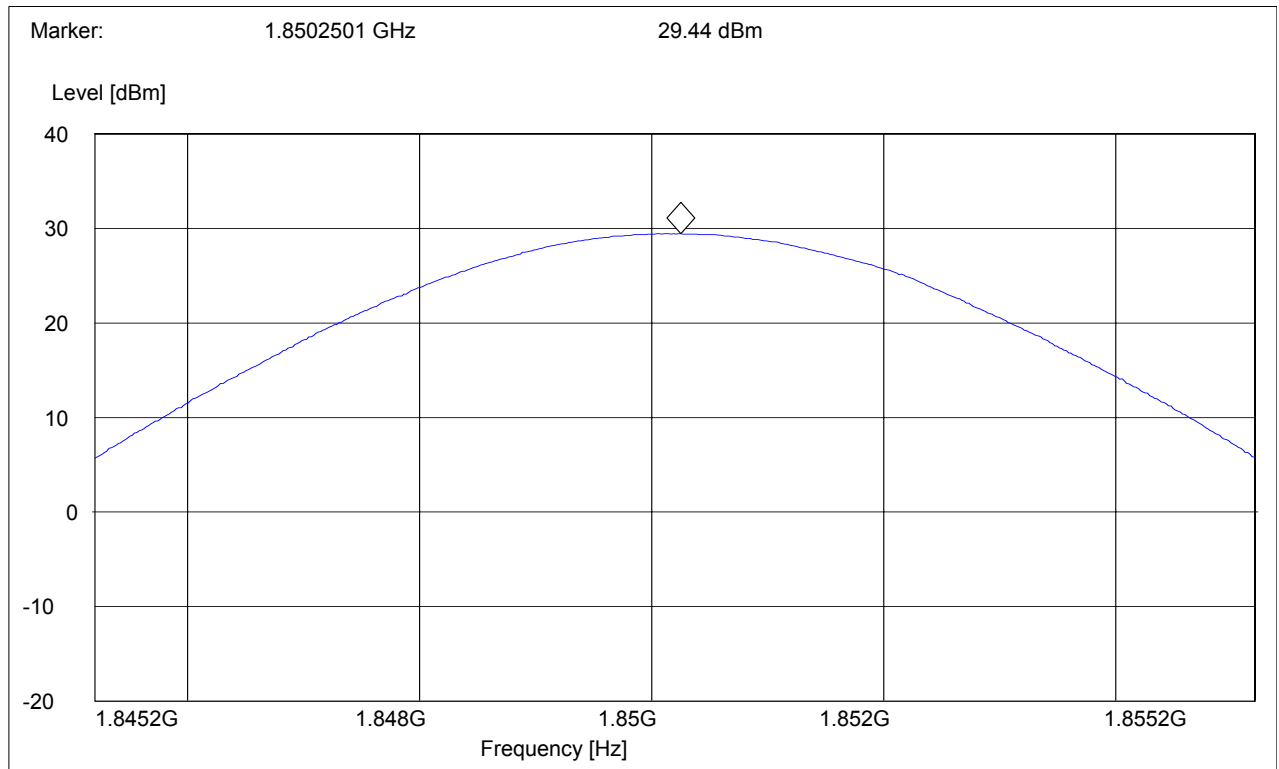

**EIRP (PCS-1900)  
CHANNEL 661****§24.232(b)**


Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
1.875 GHz	1.885 MHz	Max Peak	Coupled	3 MHz

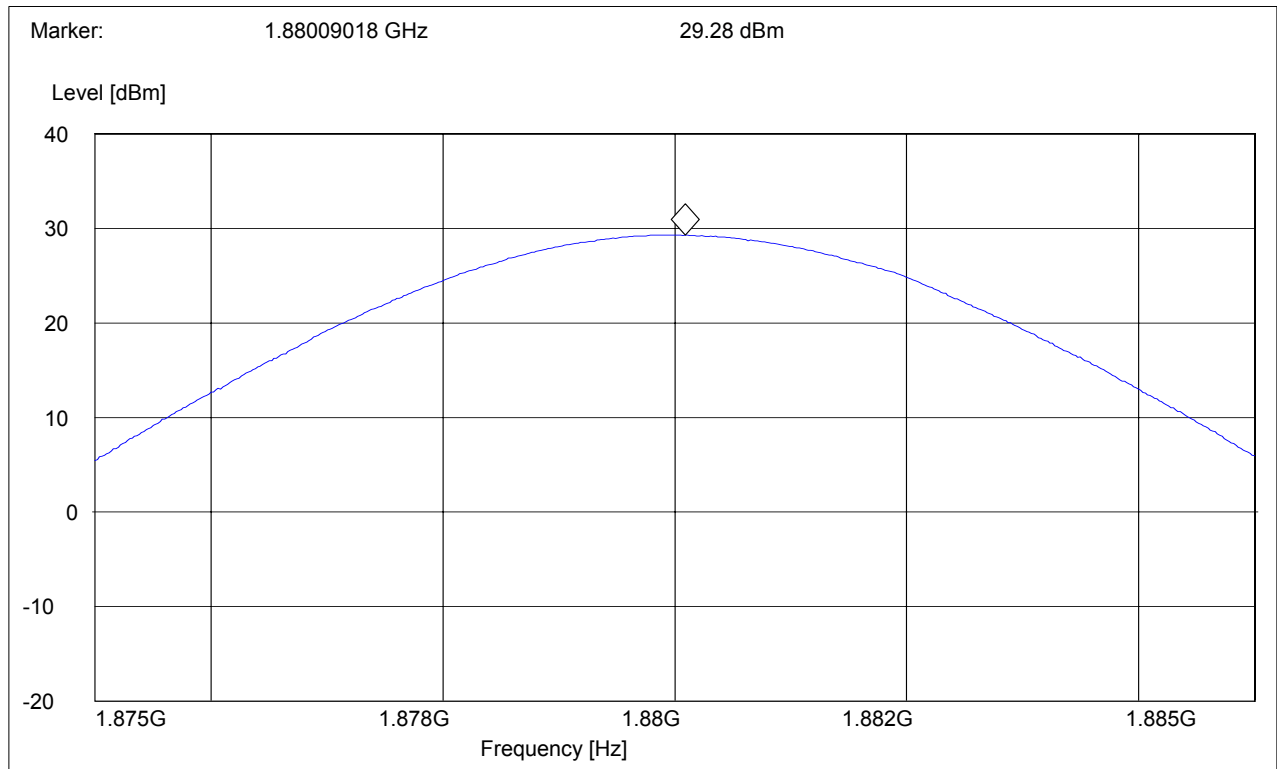



**EIRP (PCS-1900)**  
**CHANNEL 810****§24.232(b)**

Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
1.9048 GHz	1.9148 MHz	Max Peak	Coupled	3 MHz

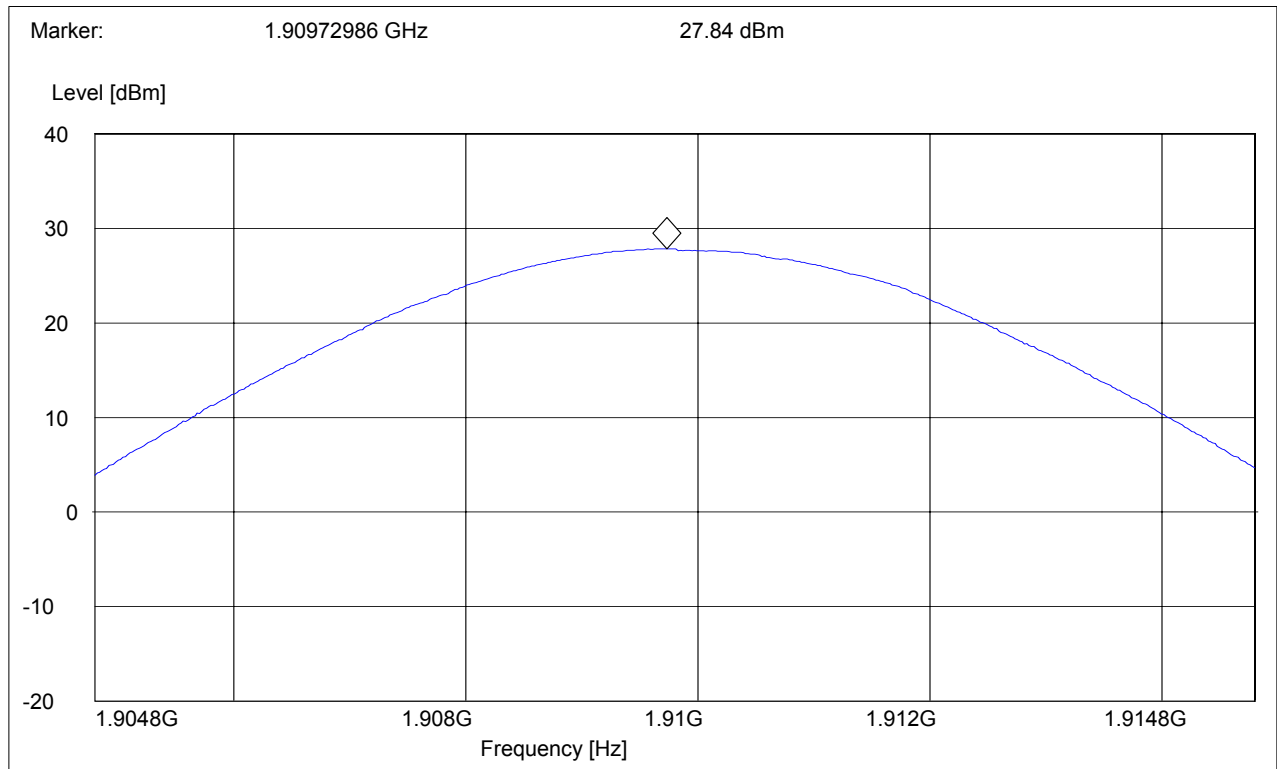


## 5.2 Occupied Bandwidth/Emission Bandwidth

### 5.2.1 FCC 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.

(h) Transmitters employing digital modulation techniques-when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated.

### 5.2.2 Occupied / emission bandwidth measurement procedure:

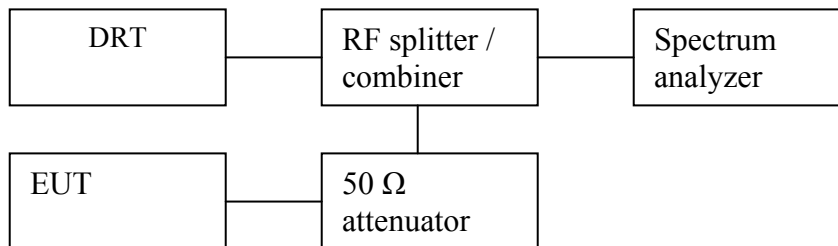


1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure the 99% (-20 dB) occupied bandwidth. Record the value.
4. Set the spectrum analyzer to measure the 99.5% (-26 dB) emission bandwidth. Record the value.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

**5.2.3 Occupied / Emission bandwidth results 850 MHz band:**

<b>Frequency (MHz)</b>	<b>Occupied B/W -20 dB (KHz)</b>	<b>Emission B/W -26 dB (KHz)</b>
<b>824.2</b>	<b>294.58</b>	<b>318.63</b>
<b>836.6</b>	<b>272.54</b>	<b>316.57</b>
<b>848.8</b>	<b>266.5</b>	<b>314.62</b>


**-20dB (GSM-850)****CHANNEL 128**

Delta 2 [T1] RBW 3 kHz RF Att 10 dB  
Ref Lvl -0.20 dB VBW 3 kHz  
26.3 dBm 294.58917836 kHz SWT 280 ms Unit dBm

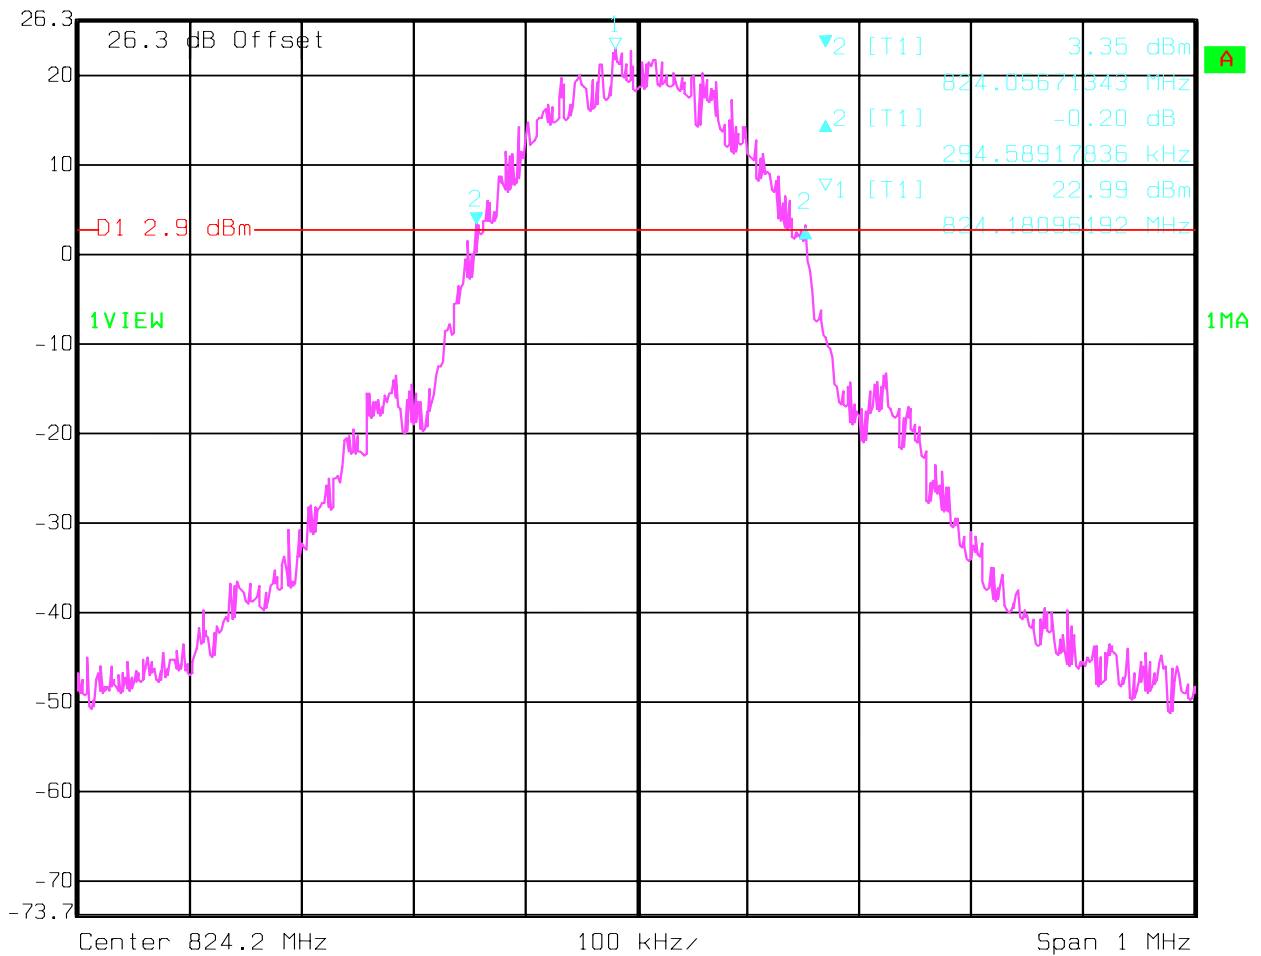


Date: 28.AUG.2005 19:21:28

**-20dB (GSM-850)**  
**CHANNEL 190**

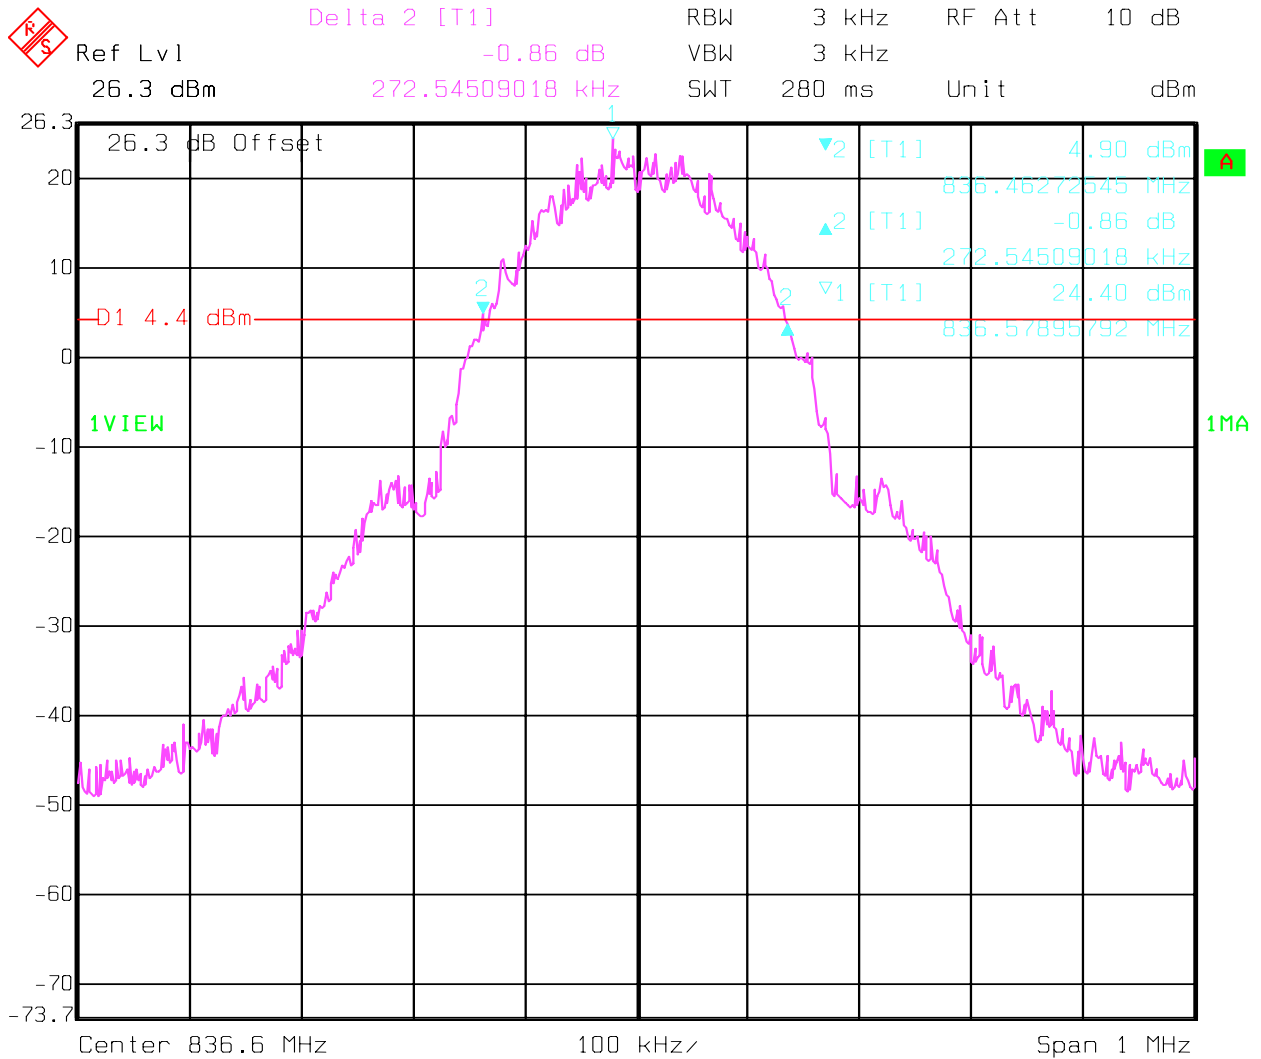

Date: 28.AUG.2005 19:25:59


**-20dB (GSM-850)**  
**CHANNEL 251**

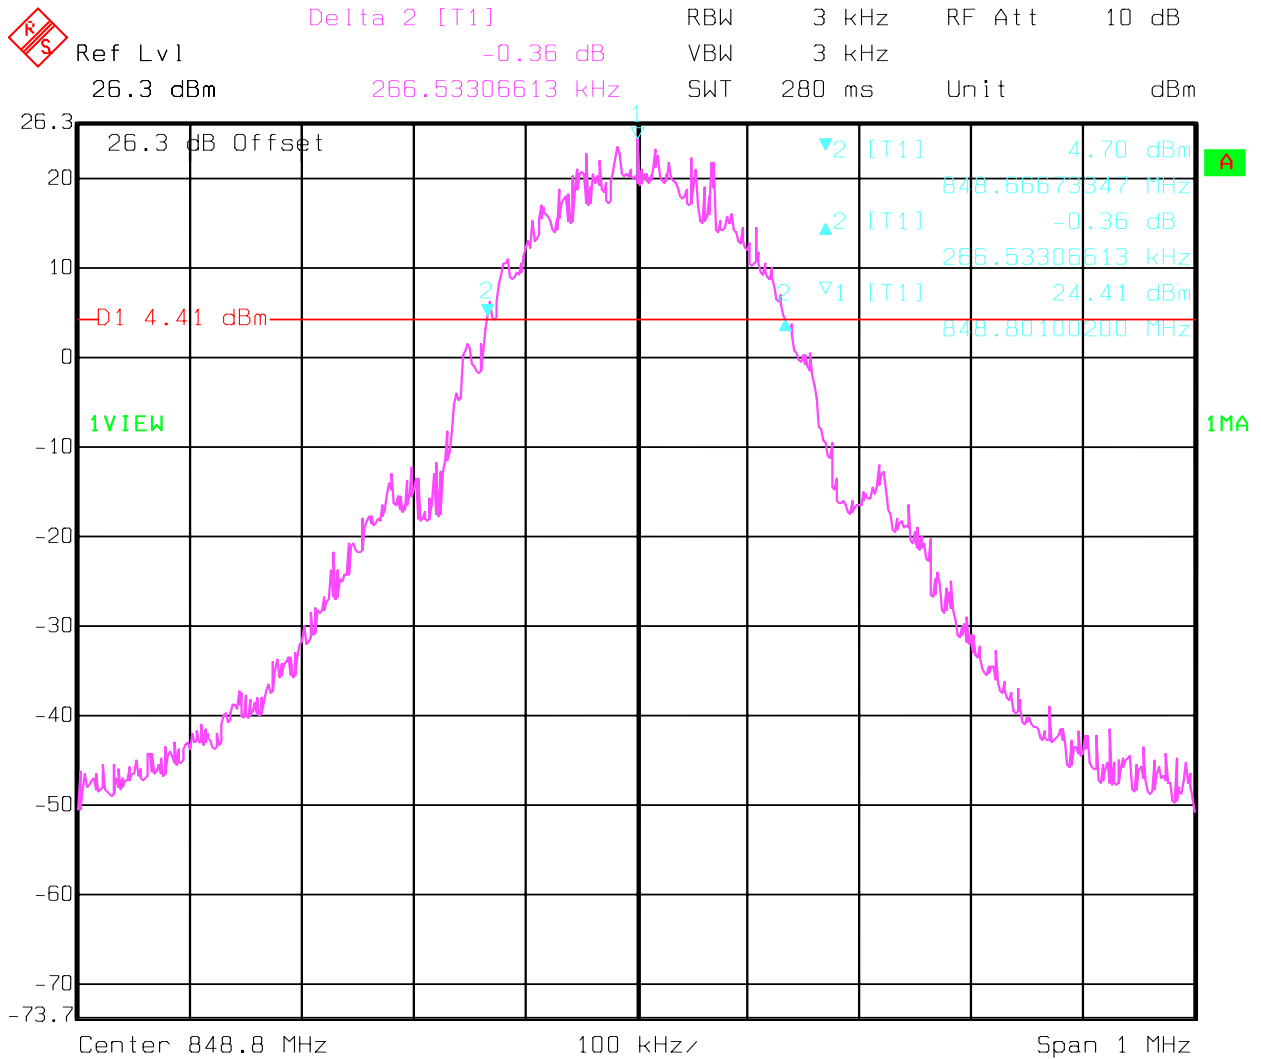

Date: 28.AUG.2005 19:28:54

**-26dB (GSM-850)****CHANNEL 128**


Delta 2 [T1] RBW 3 kHz RF Att 10 dB  
Ref Lvl -0.76 dB VBW 3 kHz  
26.3 dBm 318.63727455 kHz SWT 280 ms Unit dBm

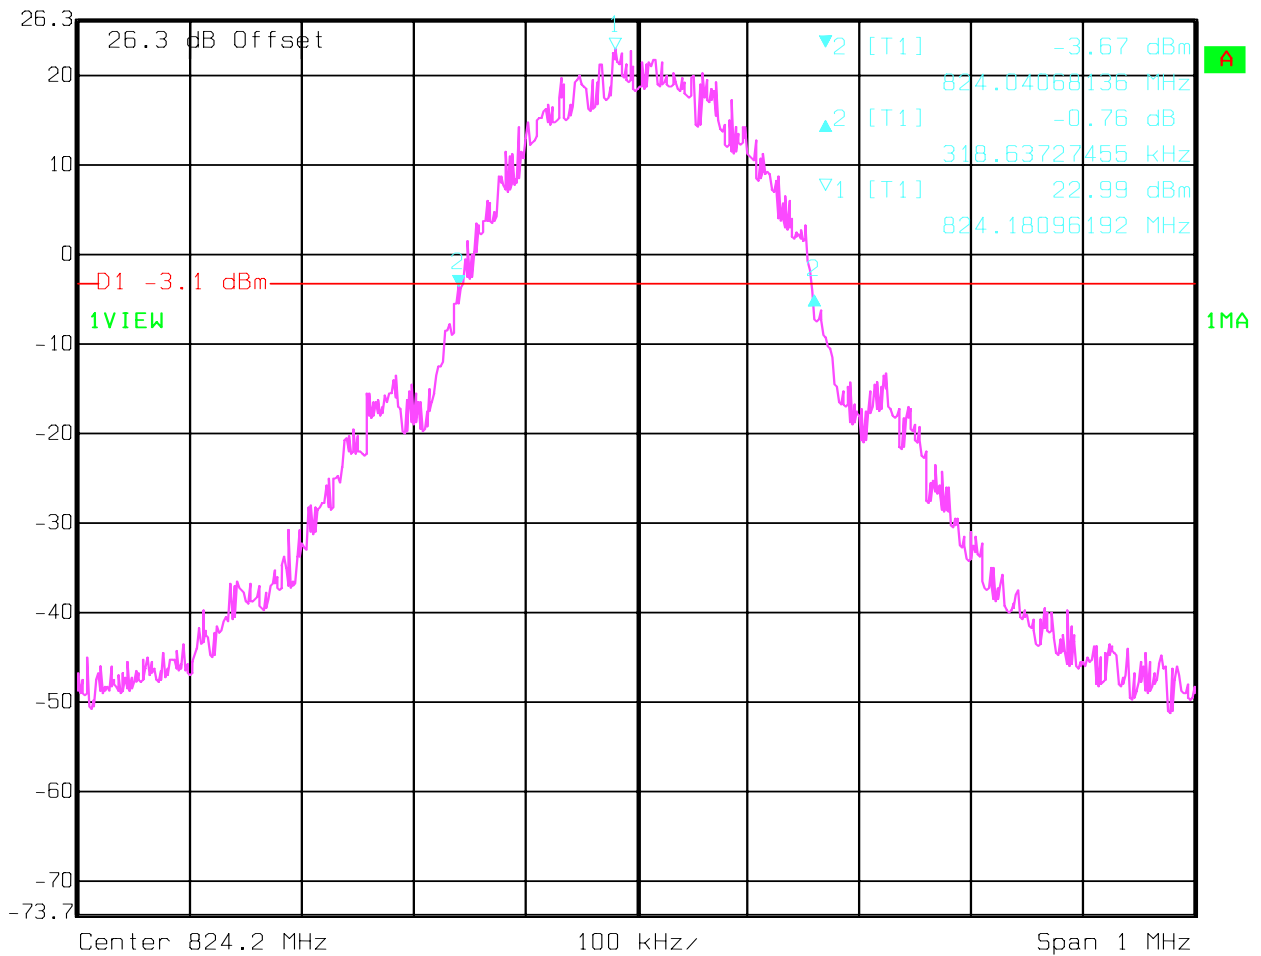

Date: 28.AUG.2005 19:22:48

**-26dB (GSM-850)****CHANNEL 190**

Delta 2 [T1] RBW 3 kHz RF Att 10 dB  
Ref Lvl -1.30 dB VBW 3 kHz  
26.3 dBm 316.63326653 kHz SWT 280 ms Unit dBm

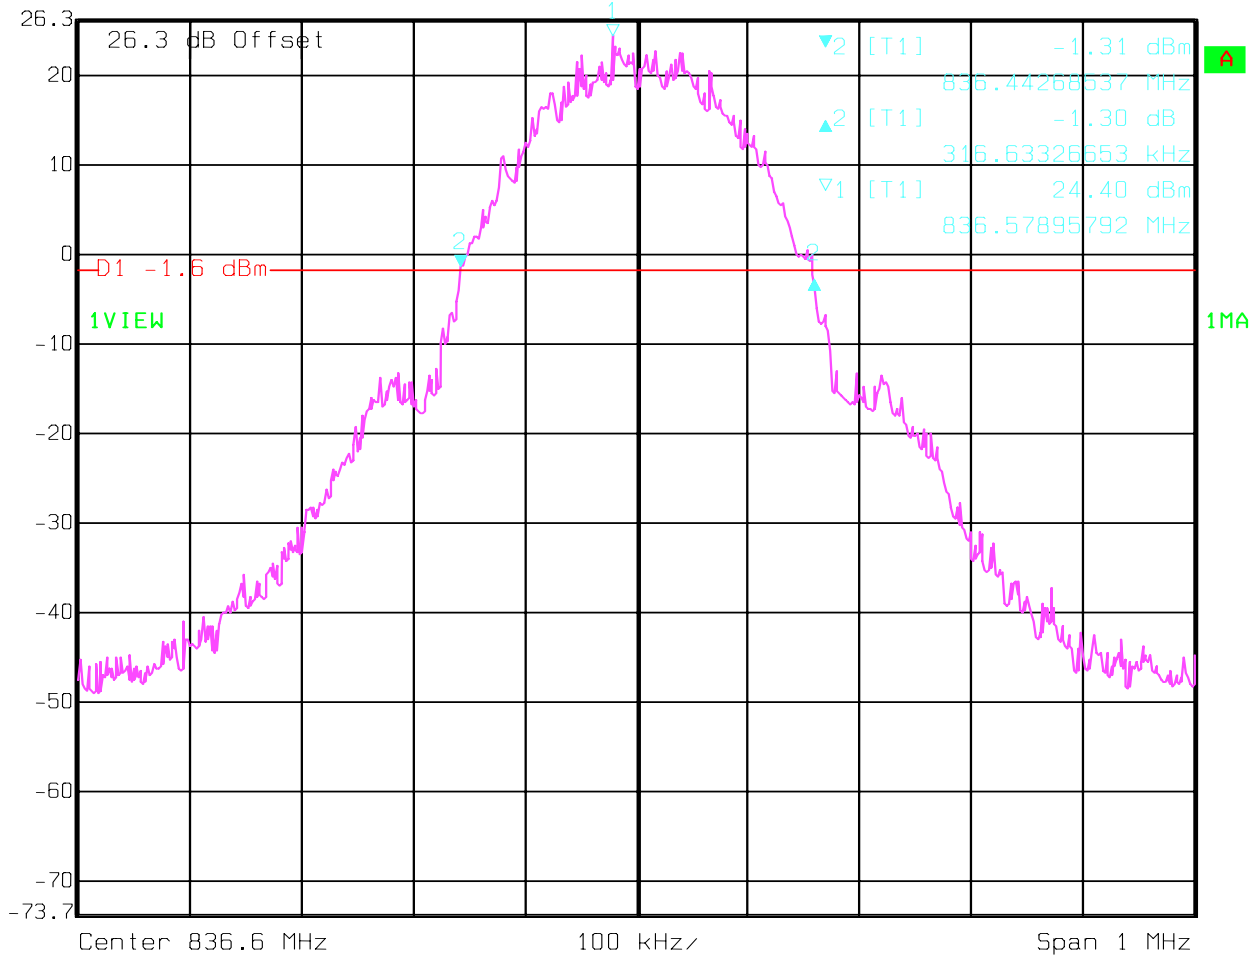


Date: 28.AUG.2005 19:26:45



**-26dB (GSM-850)****CHANNEL 251**

Marker 2 [T1] RBW 3 kHz RF Att 10 dB  
Ref Lvl -4.40 dBm VBW 3 kHz  
26.3 dBm 848.64268537 MHz SWT 280 ms Unit dBm

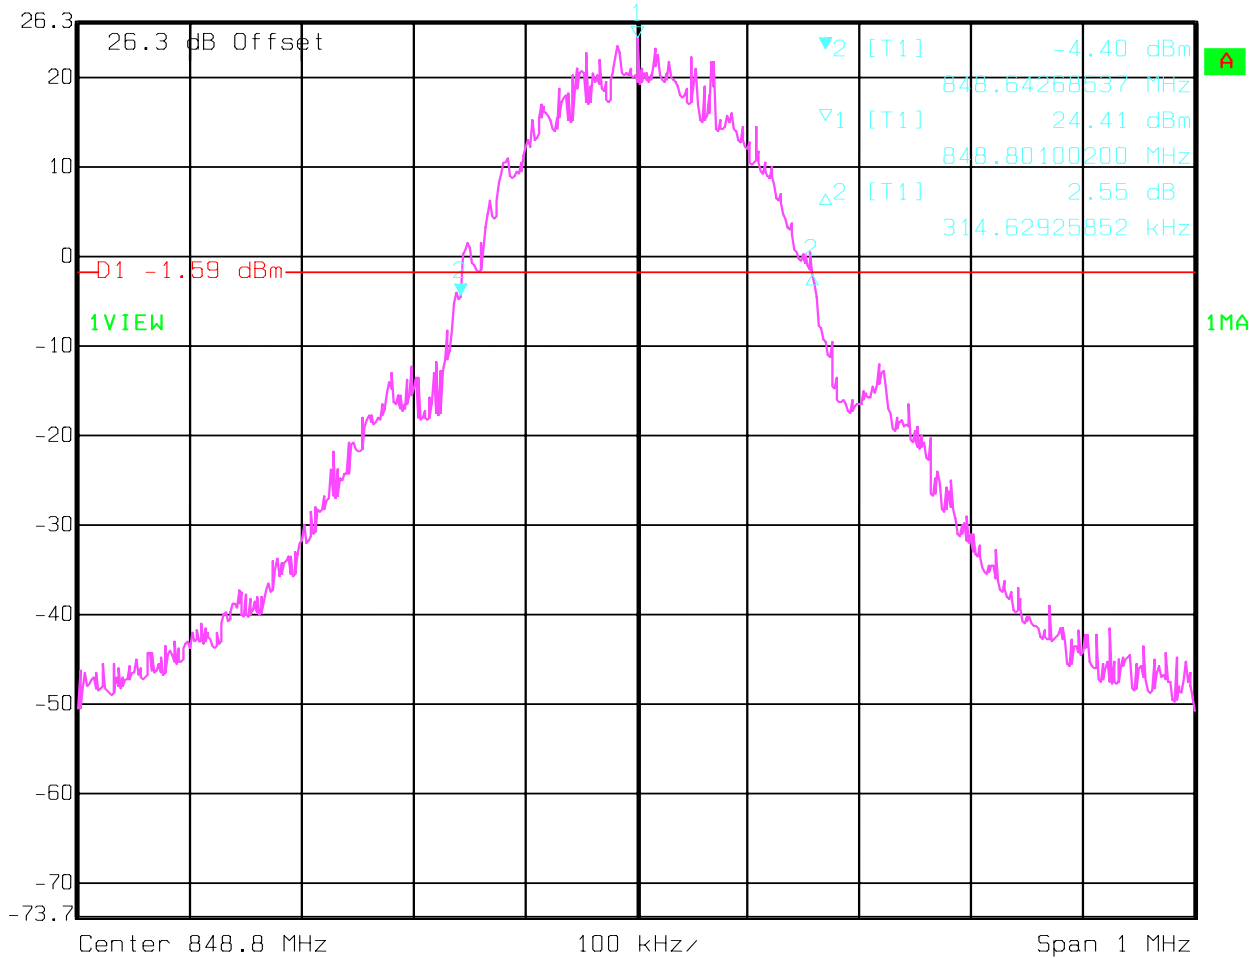


Date: 28.AUG.2005 19:30:27

**5.2.4 Occupied / Emission bandwidth results 1900 MHz band:**

<b>Frequency (MHz)</b>	<b>Occupied B/W -20 dB (KHz)</b>	<b>Emission B/W -26 dB (KHz)</b>
<b>1850.2</b>	<b>284.56</b>	<b>320.54</b>
<b>1880.0</b>	<b>294.58</b>	<b>320.64</b>
<b>1909.8</b>	<b>278.55</b>	<b>316.63</b>

**-20dB (PCS-1900)****CHANNEL 512**

Delta 1 [T1] RBW 3 kHz RF Att 30 dB  
Ref Lvl -1.97 dB VBW 3 kHz  
30.1 dBm 284.56913828 kHz SWT 280 ms Unit dBm

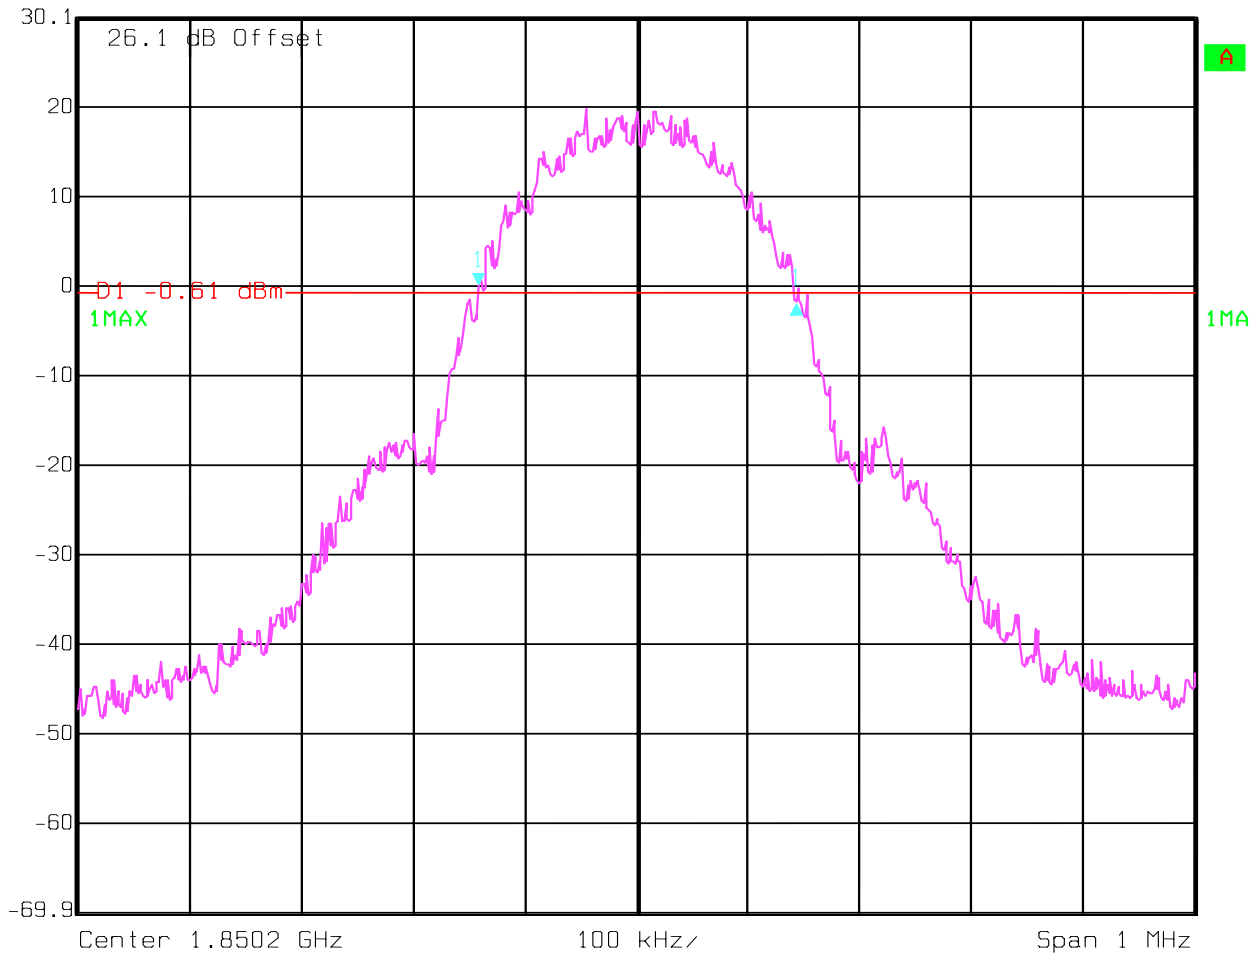

Date: 09.JUN.2005 21:06:49

**-20dB (PCS-1900)****CHANNEL 661**

Ref Lvl

30.1 dBm

Delta 1 [T1]

0.71 dB

RBW 3 kHz

RF Att


30 dB

VBW 3 kHz

SWT 280 ms

Unit


dBm

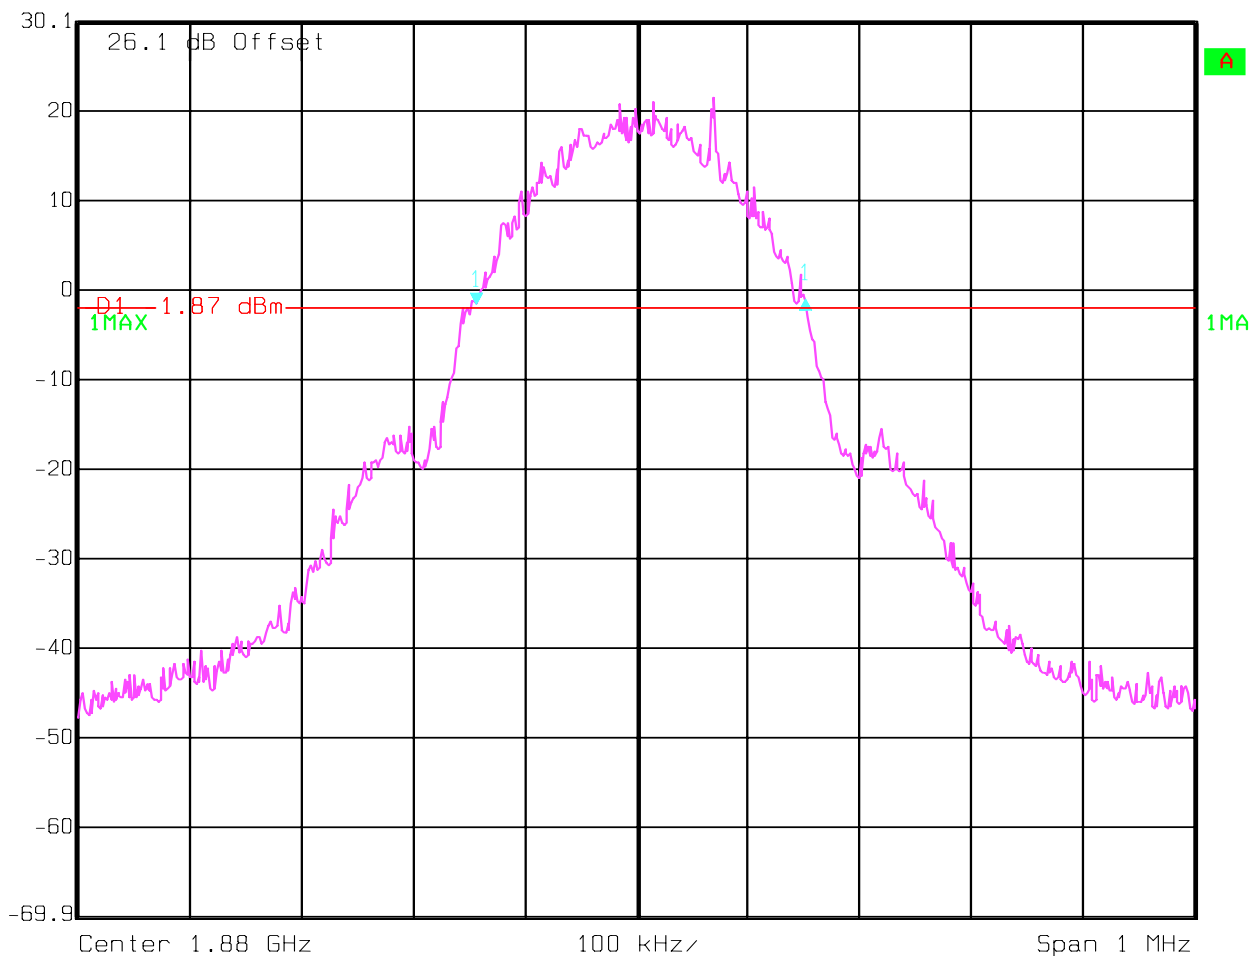

Date: 09.JUN.2005 21:12:28

**-20dB (PCS-1900)****CHANNEL 810**


Delta 1 [T1] RBW 3 kHz RF Att 30 dB  
Ref Lvl 1.97 dB VBW 3 kHz  
30.1 dBm 278.55711423 kHz SWT 280 ms Unit dBm

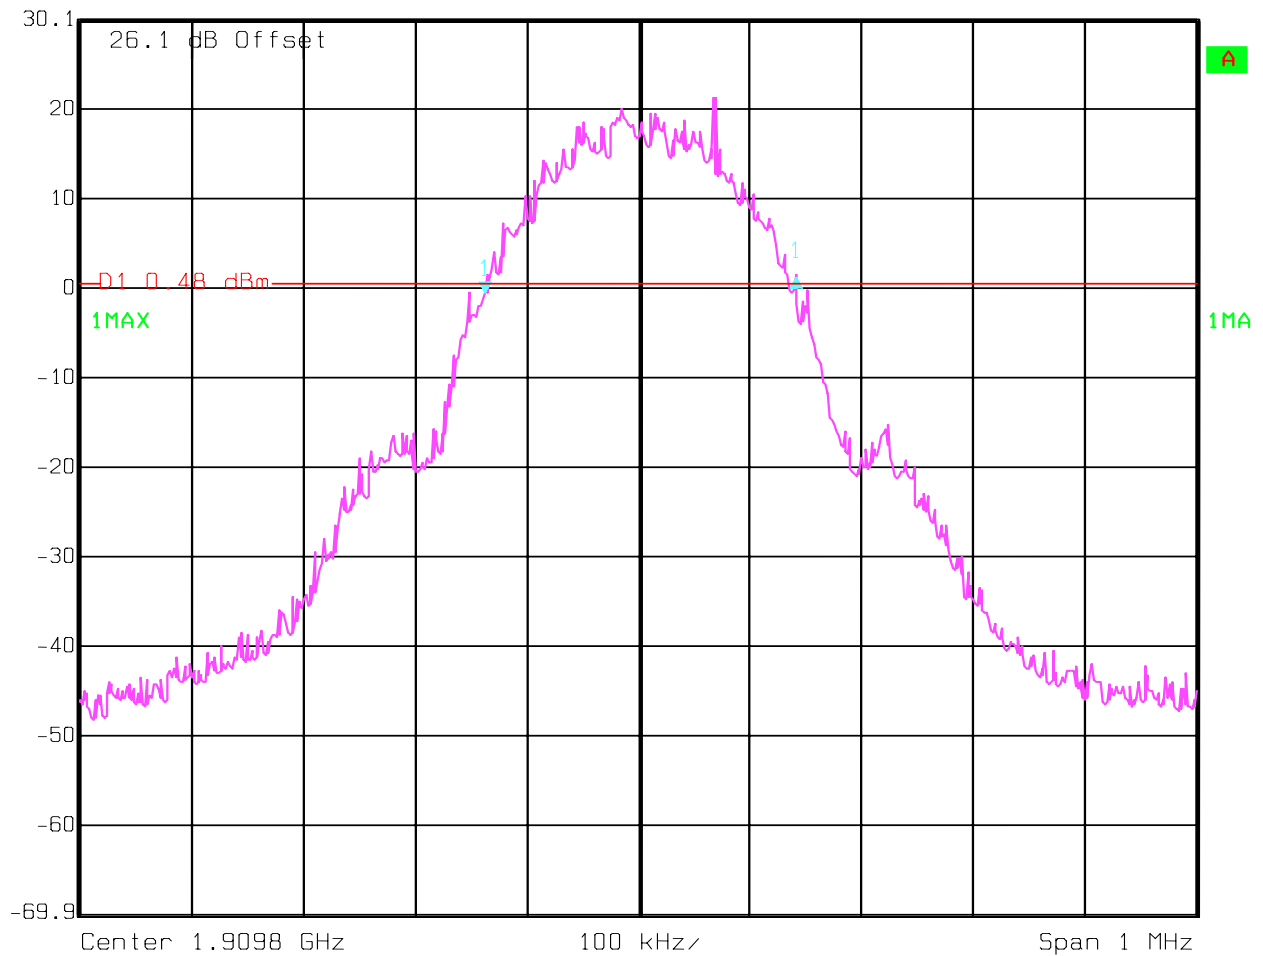

Date: 09.JUN.2005 21:16:52

**-26dB (PCS-1900)****CHANNEL 512**


Delta 1 [T1] RBW 3 kHz RF Att 30 dB  
Ref Lvl -0.01 dB VBW 3 kHz  
30.1 dBm 320.64128256 kHz SWT 280 ms Unit dBm

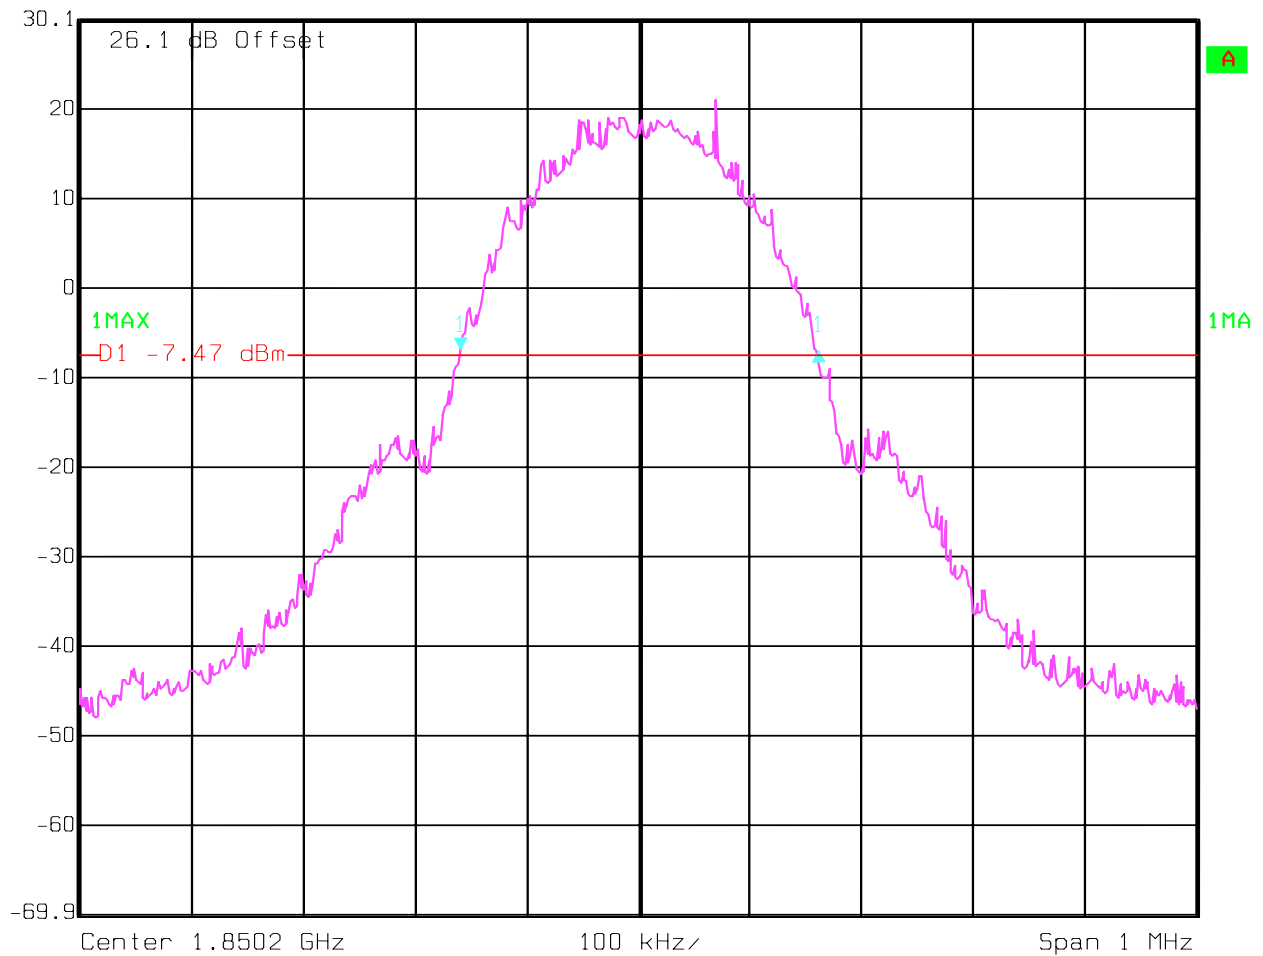

Date: 09.JUN.2005 21:09:13

**-26dB (PCS-1900)****CHANNEL 661**


Delta 1 [T1] RBW 3 kHz RF Att 30 dB  
Ref Lvl 2.01 dB VBW 3 kHz  
30.1 dBm 320.64128256 kHz SWT 280 ms Unit dBm

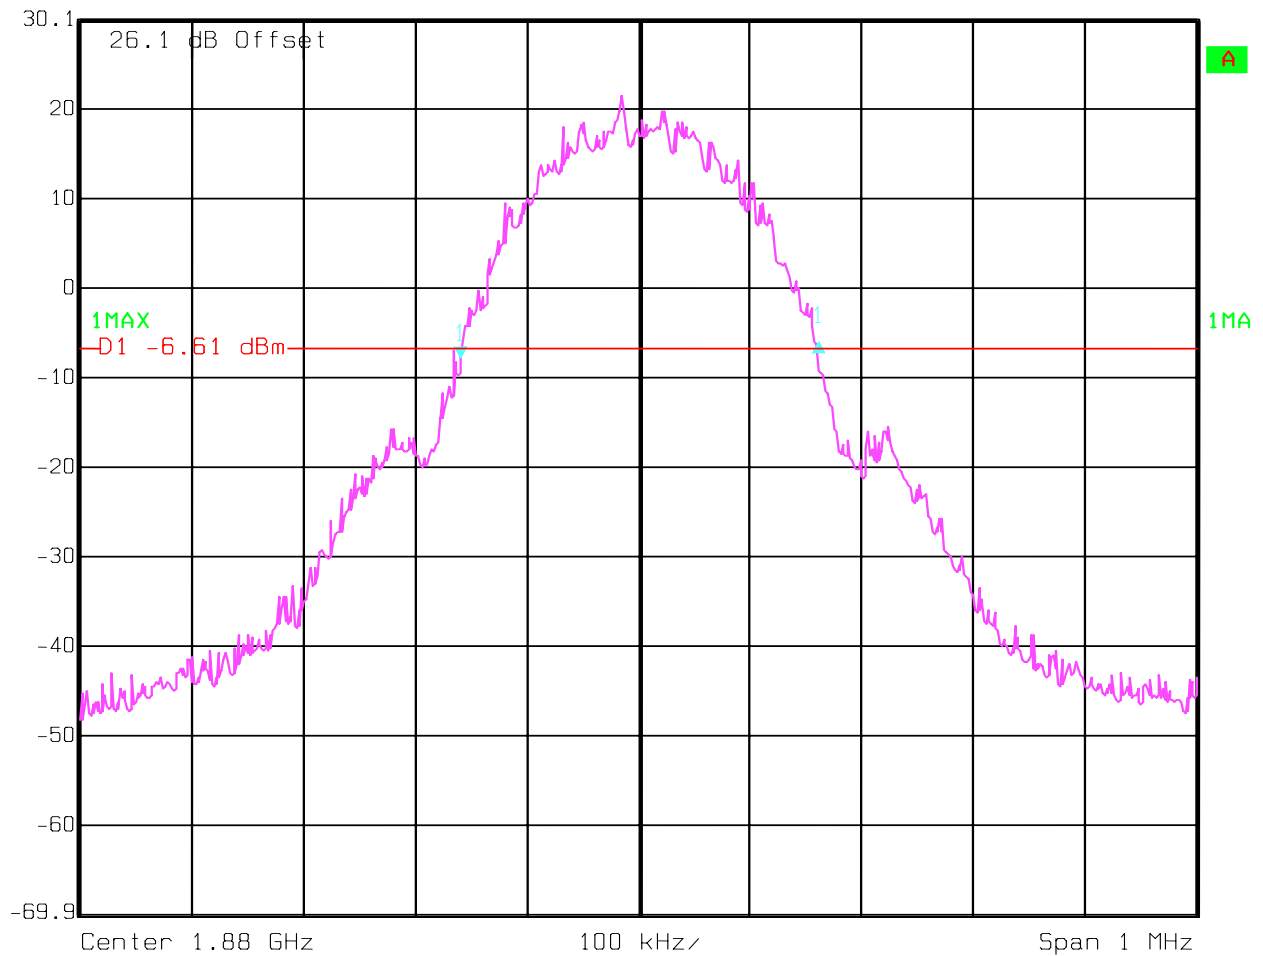

Date: 09.JUN.2005 21:14:12

**-26dB (PCS-1900)****CHANNEL 810**

Delta 1 [T1] RBW 3 kHz RF Att 30 dB  
Ref Lvl 1.91 dB VBW 3 kHz  
30.1 dBm 316.63326653 kHz SWT 280 ms Unit dBm

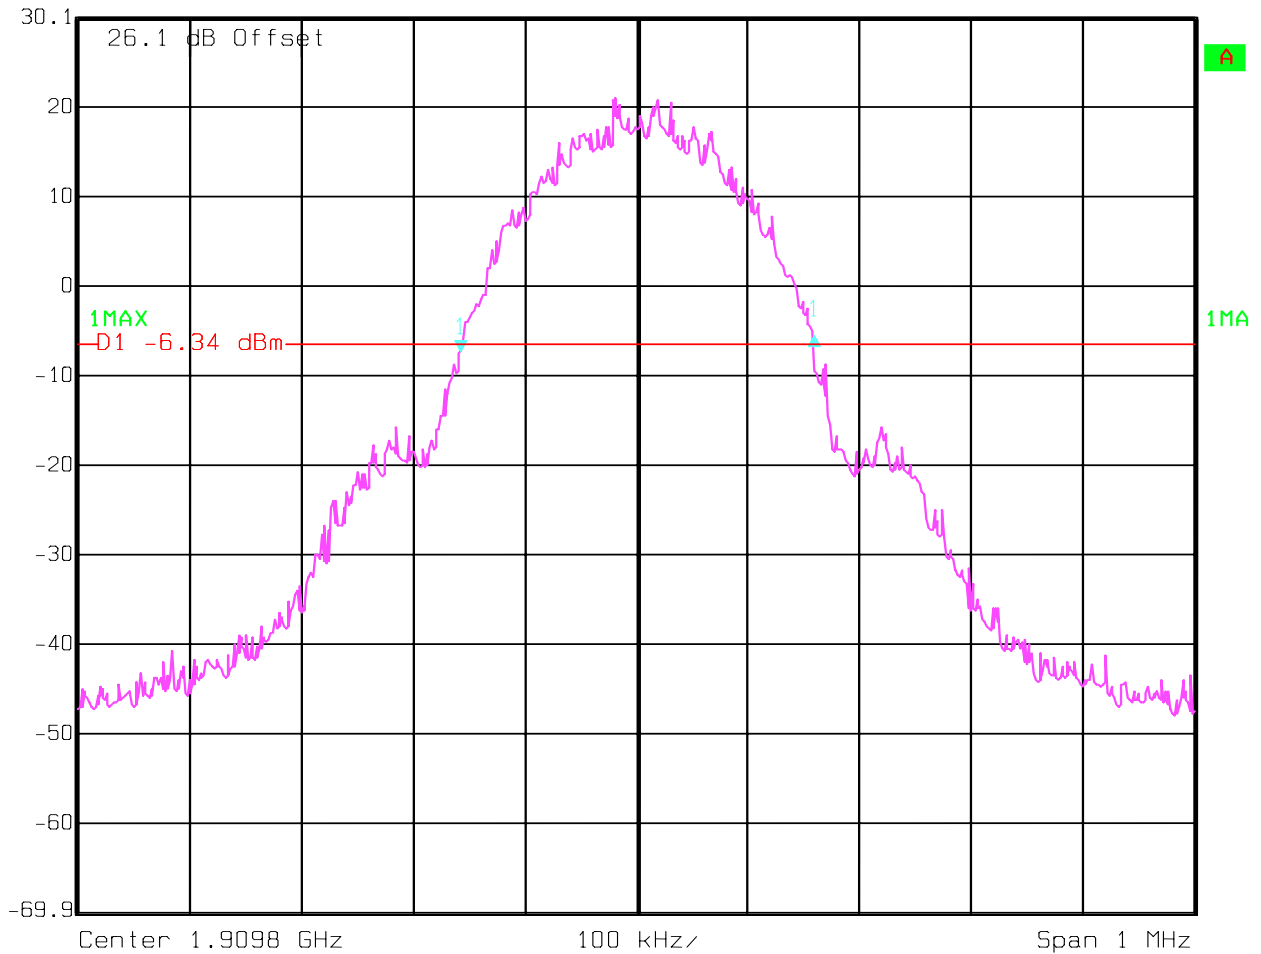

Date: 09.JUN.2005 21:19:06



### 5.3 Frequency Stability

#### 5.3.1 Limit

**For Hand carried battery powered equipment:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.5VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -2.7% and +21.62%. For the purposes of measuring frequency stability these voltage limits are to be used.

**Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU 200 UNIVERSAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30 C.
3. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 661 for PCS-1900), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50 C.
7. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 661 for PCS-1900), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

**For equipment powered by primary supply voltage:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

For this EUT section 2.1055(d)(1) applies. This requires to vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

**5.3.2 FREQUENCY STABILITY (GSM-850)****AFC FREQ ERROR vs. VOLTAGE**

<b>Voltage (VDC)</b>	<b>Frequency Error (Hz)</b>	<b>Frequency Error (ppm)</b>
<b>3.6</b>	<b>-17</b>	<b>-0.020320344</b>
<b>4.5</b>	<b>-12</b>	<b>-0.014343772</b>

**AFC FREQ ERROR vs. TEMPERATURE**

<b>TEMPERATURE (°C)</b>	<b>Frequency Error (Hz)</b>	<b>Frequency Error (ppm)</b>
<b>-30</b>	<b>-20</b>	<b>-0.023906287</b>
<b>-20</b>	<b>-13</b>	<b>-0.015539087</b>
<b>-10</b>	<b>-14</b>	<b>-0.016734401</b>
<b>0</b>	<b>-15</b>	<b>-0.017929716</b>
<b>+10</b>	<b>-16</b>	<b>-0.01912503</b>
<b>+20</b>	<b>-19</b>	<b>-0.022710973</b>
<b>+30</b>	<b>-14</b>	<b>-0.016734401</b>
<b>+40</b>	<b>-17</b>	<b>-0.020320344</b>
<b>+50</b>	<b>-18</b>	<b>-0.021515659</b>

**5.3.3 FREQUENCY STABILITY (PCS-1900)****AFC FREQ ERROR vs. VOLTAGE**

Voltage (VDC)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	-10	-0.011953144
4.5	-12	-0.014343772

**AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-12	-0.014343772
-20	-18	-0.021515659
-10	15	0.017929716
0	-12	-0.014343772
+10	-9	-0.010757829
+20	-15	-0.017929716
+30	-15	-0.017929716
+40	-11	-0.013148458
+50	-12	-0.014343772

## 5.4 Spurious Emissions Conducted

### 5.4.1 FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

### 5.4.2 Limits:

#### 5.4.2.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### 5.4.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to

improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### **5.4.3 Conducted out of band emissions measurement procedure:**

**Based on TIA-603B November 2002**

##### **2.2.13 Unwanted Emissions: Conducted Spurious**

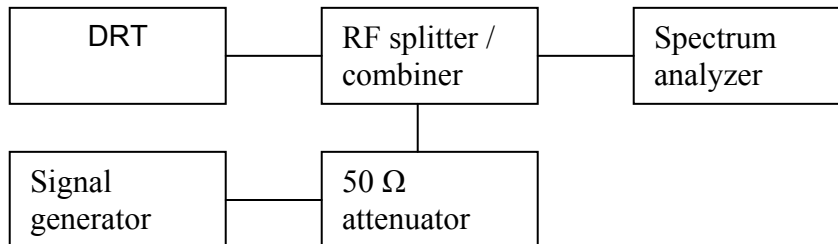


1. Connect the equipment as shown in the above diagram.
2. Set the spectrum analyzer to measure peak hold with the required settings.
3. Set the signal generator to a known output power and record the path loss in dB (**LOSS**) for frequencies up to the tenth harmonic of the EUT's carrier frequency. **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
4. Replace the signal generator with the EUT.
5. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.

(**note:** Step 3 above is performed prior to testing and **LOSS** is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)

**5.4.4 Bandedge Results GSM-850****GSM-850 (Channel 128)**

 Ref Lvl 26.3 dBm Marker 1 [T1] -18.12 dBm RBW 3 kHz RF Att 10 dB  
26.3 dBm 823.97595190 MHz VBW 3 kHz Unit dBm  
SWT 280 ms

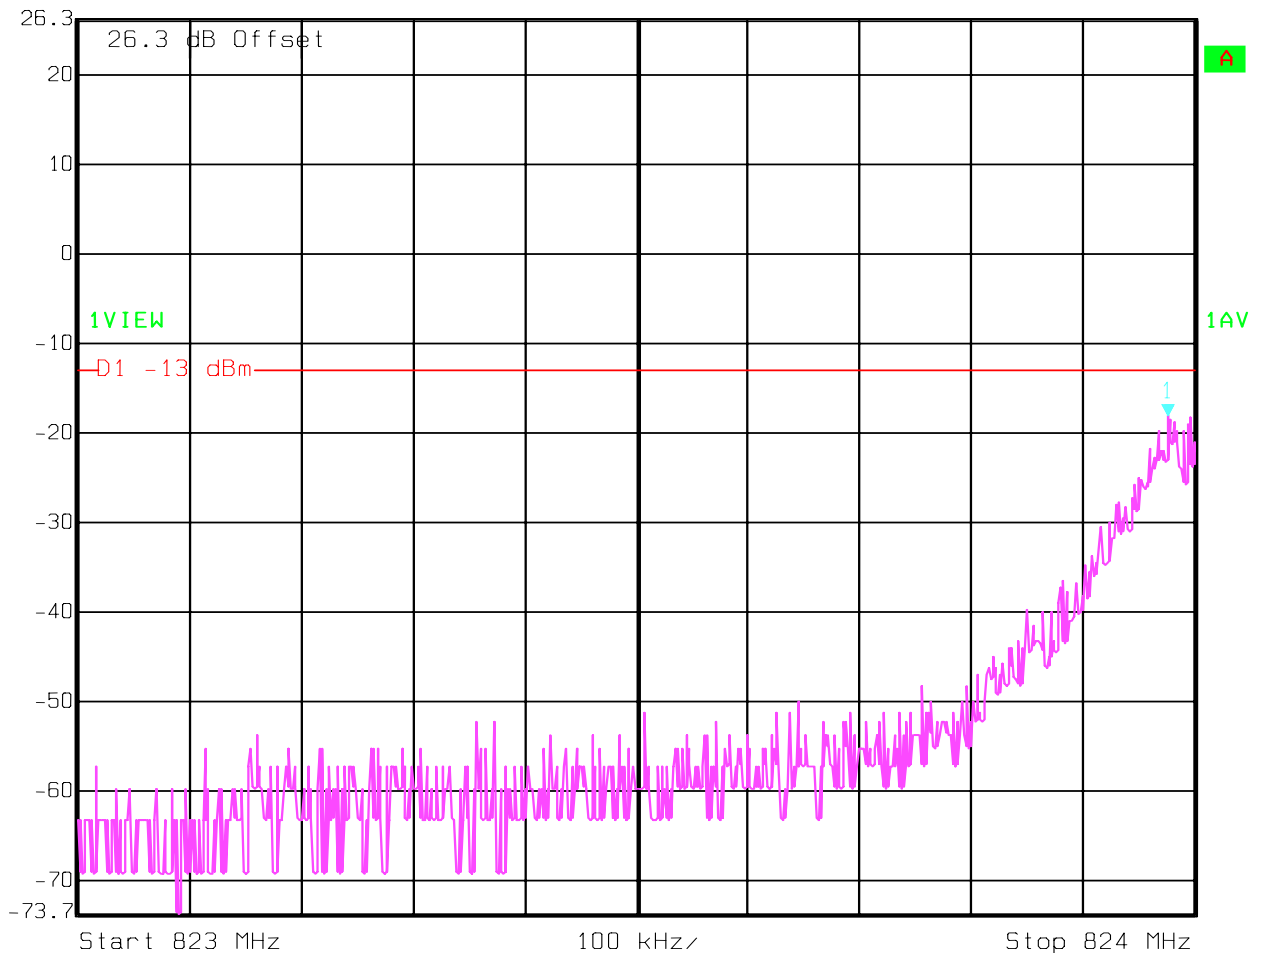

Date: 28.AUG.2005 19:32:40

**GSM-850 (Channel 251)**

Ref Lvl

26.3 dBm

Marker 1 [T1]

-17.88 dBm

849.01803607 MHz

RBW

3 kHz

RF Att

10 dB

VBW


3 kHz

SWT

280 ms

Unit


dBm

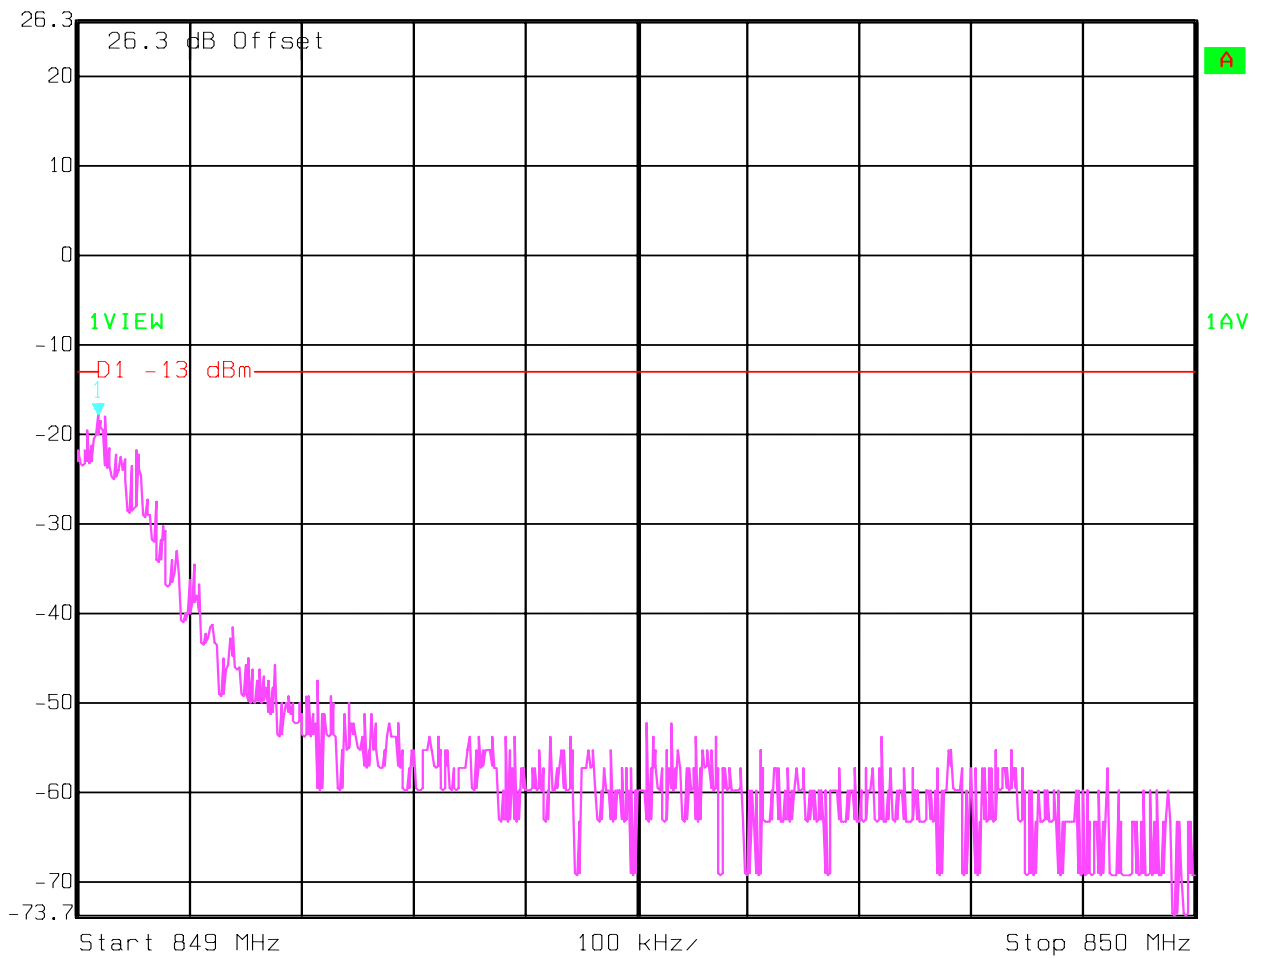

Date: 28.AUG.2005 19:34:05

**5.4.5 Conducted Spurious Results GSM-850****CHANNEL 128 (GSM-850)****30MHz – 9GHz****Note: The peak above the limit line is the carrier freq. at ch-128.**

 Max/Ref Lvl    Marker 1 [T1]    RBW    1 MHz    RF Att    20 dB  
33 dBm    -28.77 dBm    VBW    1 MHz  
23 dBm    6.78895792 GHz    SWT    52 ms    Unit    dBm

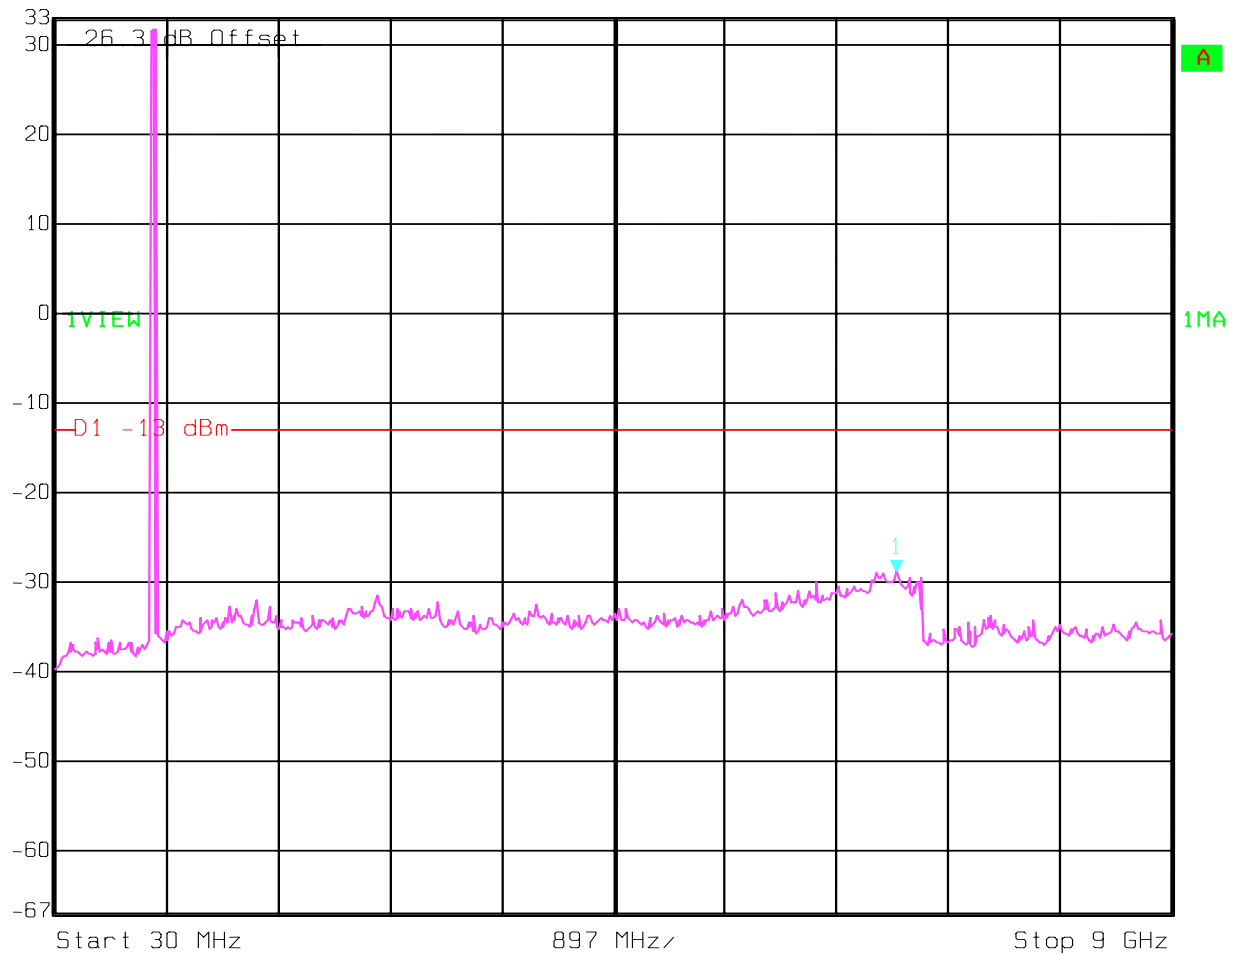


Date: 28.AUG.2005 19:12:18



**CHANNEL 190 (GSM-850)**  
**30MHz – 9GHz****Note: The peak above the limit line is the carrier freq. at ch-190.**


	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
	33 dBm	-27.81 dBm	VBW	1 MHz		
	23 dBm	6.64515030 GHz	SWT	52 ms	Unit	dBm

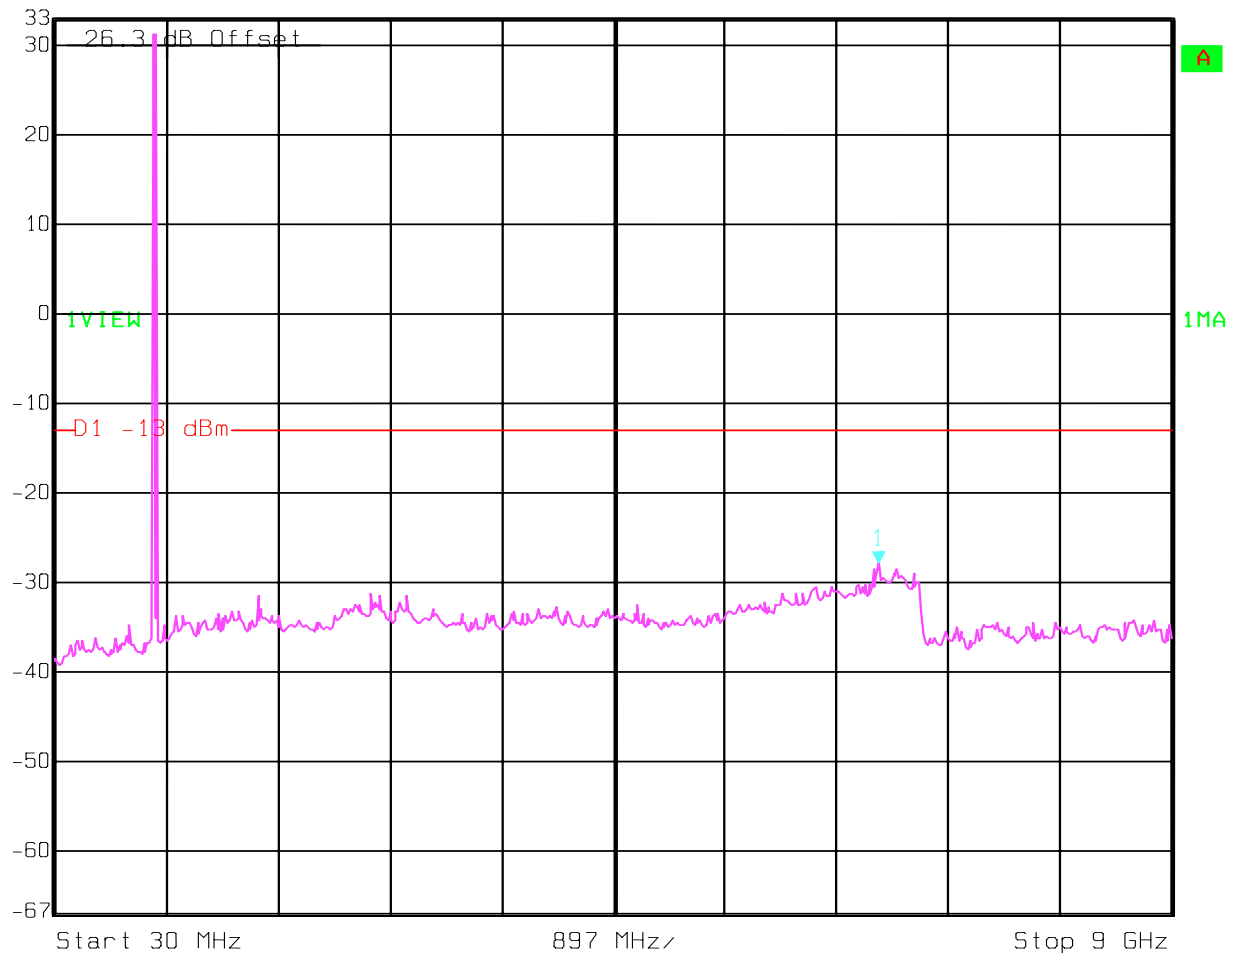

Date: 28.AUG.2005 19:13:03

**CHANNEL 251 (GSM-850)**  
**30MHz – 9GHz****Note: The peak above the limit line is the carrier freq. at ch-251.**


	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
	33 dBm	-28.36 dBm	VBW	1 MHz		
	23 dBm	6.69907816 GHz	SWT	52 ms	Unit	dBm

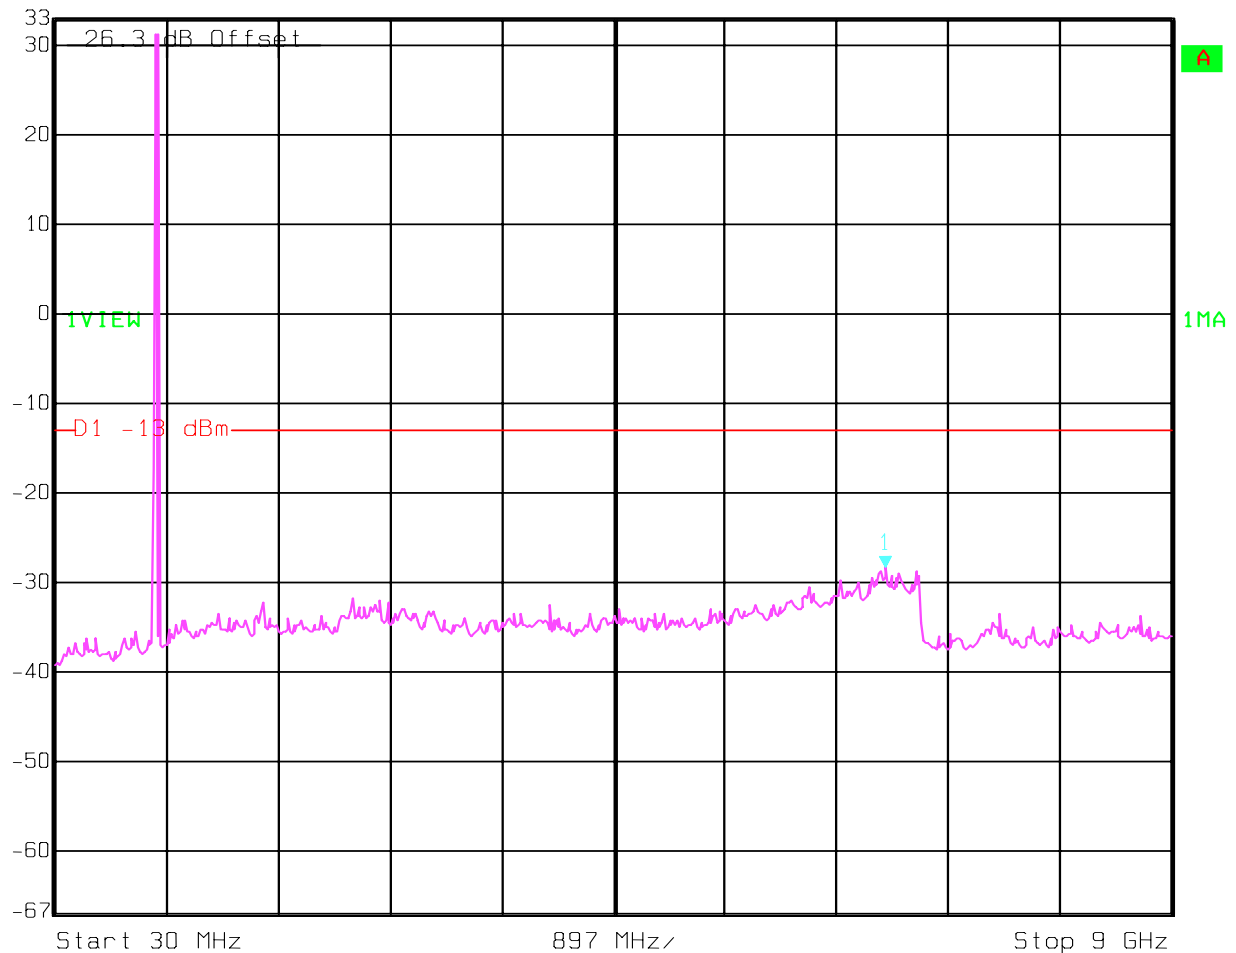

Date: 28.AUG.2005 19:13:43

**IDLE (GSM-850)****30MHz – 9GHz**


Marker 1 [T1] RBW 1 MHz RF Att 10 dB  
Ref Lvl -39.25 dBm VBW 1 MHz  
23 dBm 6.64515030 GHz SWT 52 ms Unit dBm

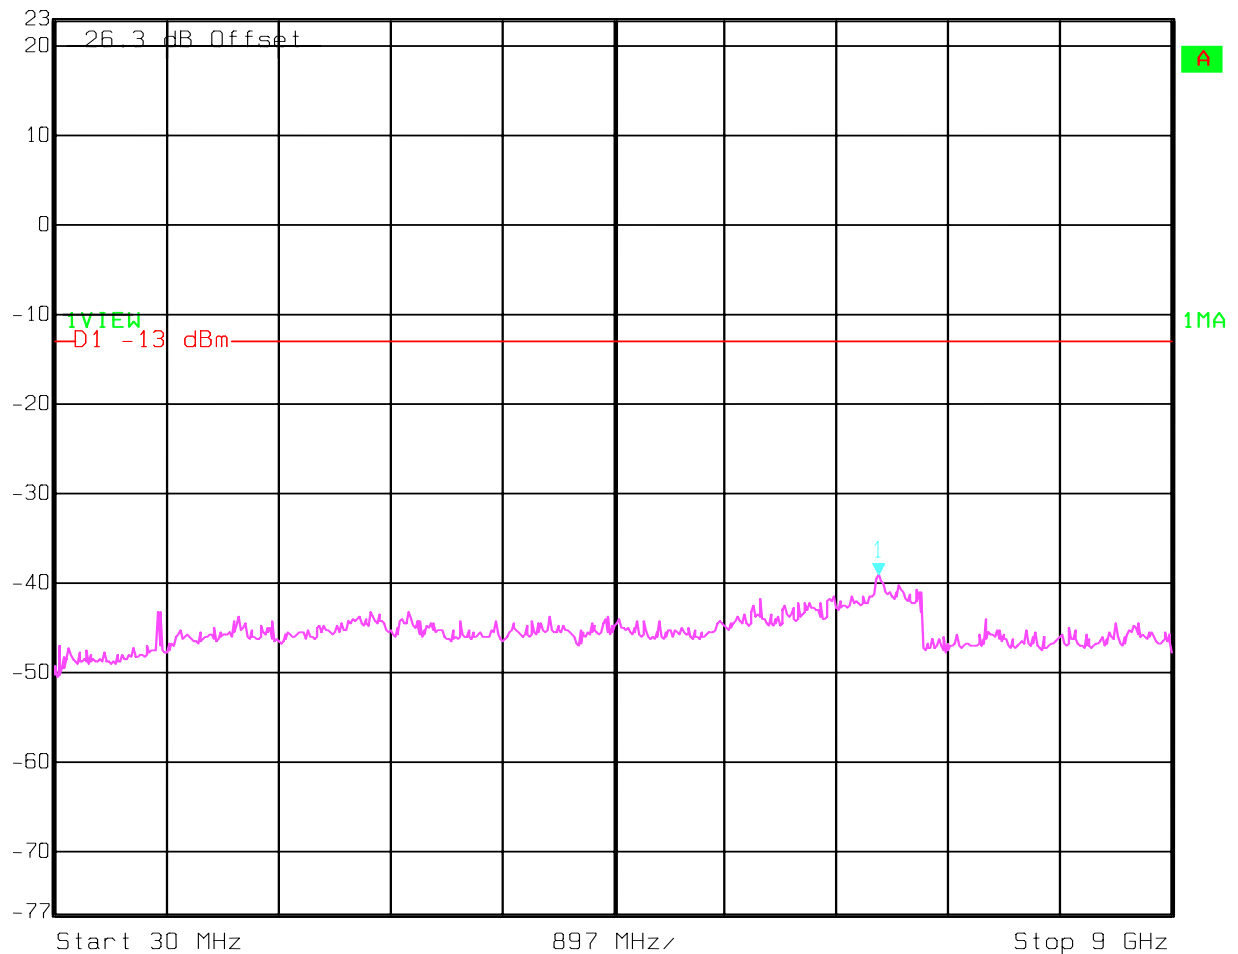

Date: 28.AUG.2005 19:14:37

**5.4.6 Bandedge Results PCS-1900****PSC-1900 (Channel 512)**

 Ref Lvl 30.1 dBm  
Marker 1 [T1] -20.81 dBm  
1.84998196 GHz  
RBW 3 kHz RF Att 30 dB  
VBW 3 kHz  
SWT 280 ms Unit dBm

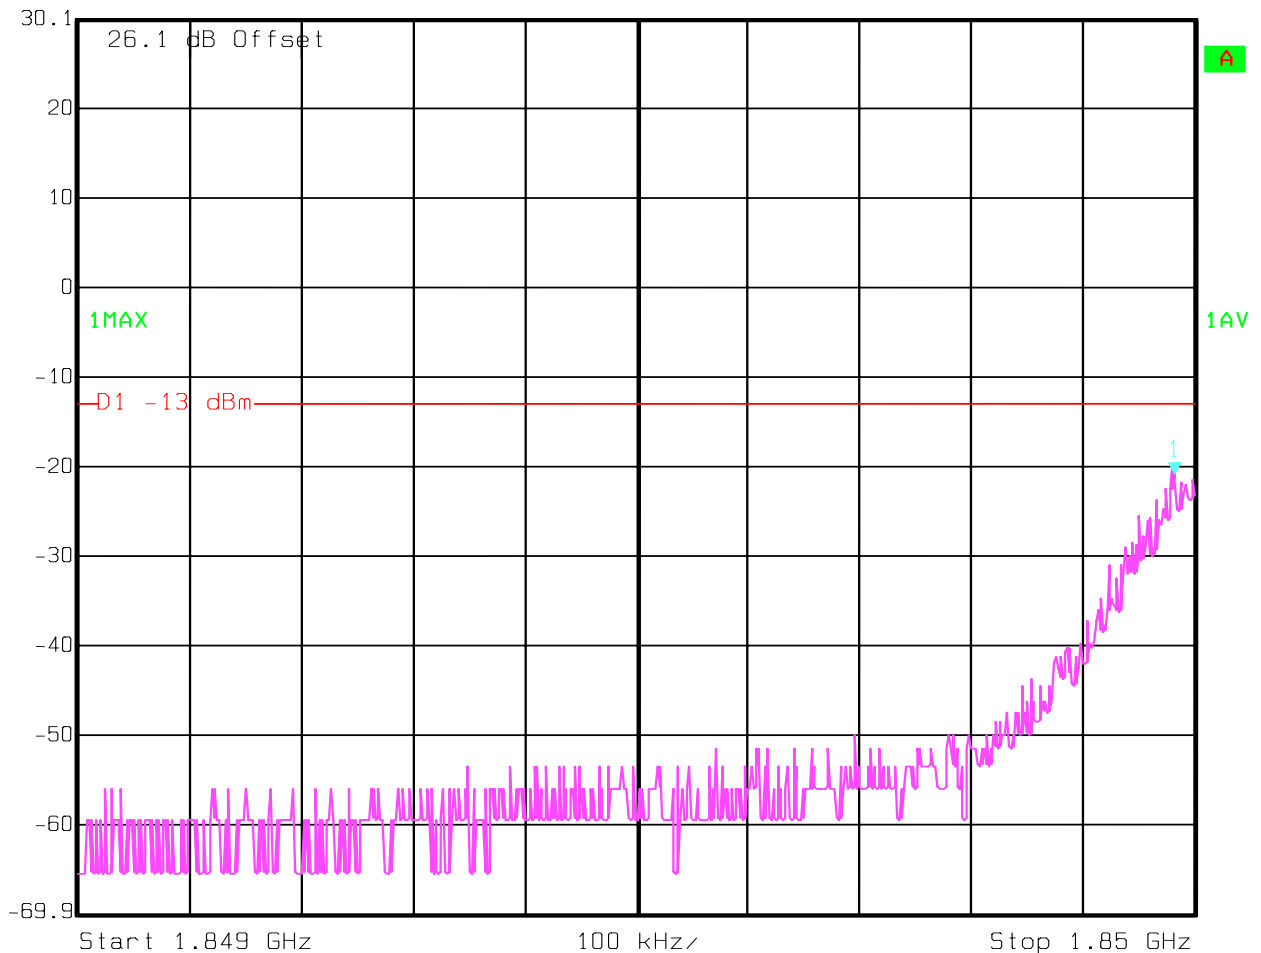

Date: 09.JUN.2005 21:22:12

**PSC-1900 (Channel 810)**

Ref Lvl

30.1 dBm

Marker 1 [T1]

-19.66 dBm

1.91000802 GHz

RBW

3 kHz

RF Att

30 dB

VBW


3 kHz

SWT


280 ms

Unit


dBm

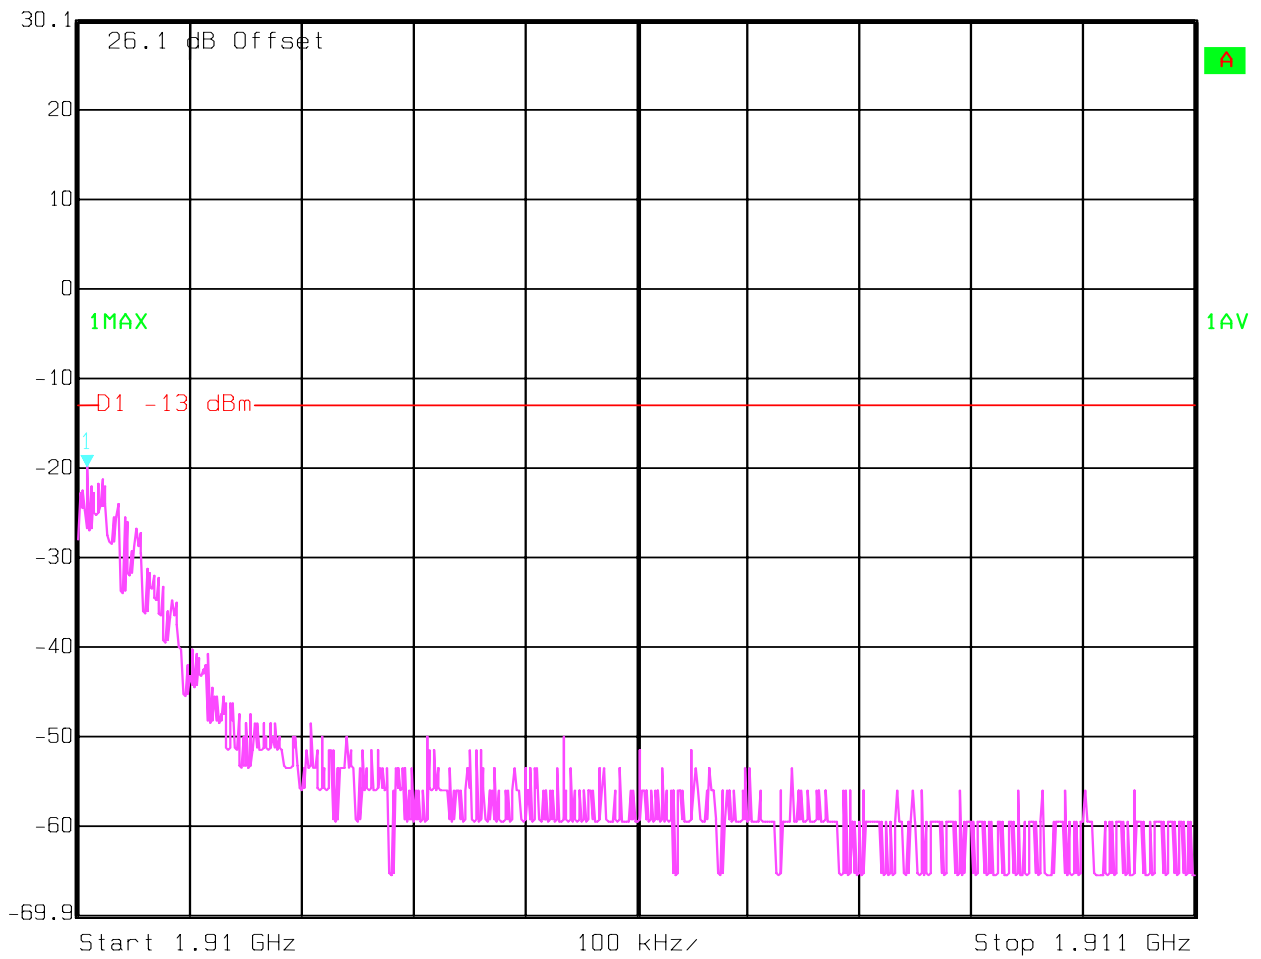

Date: 09.JUN.2005 21:24:12

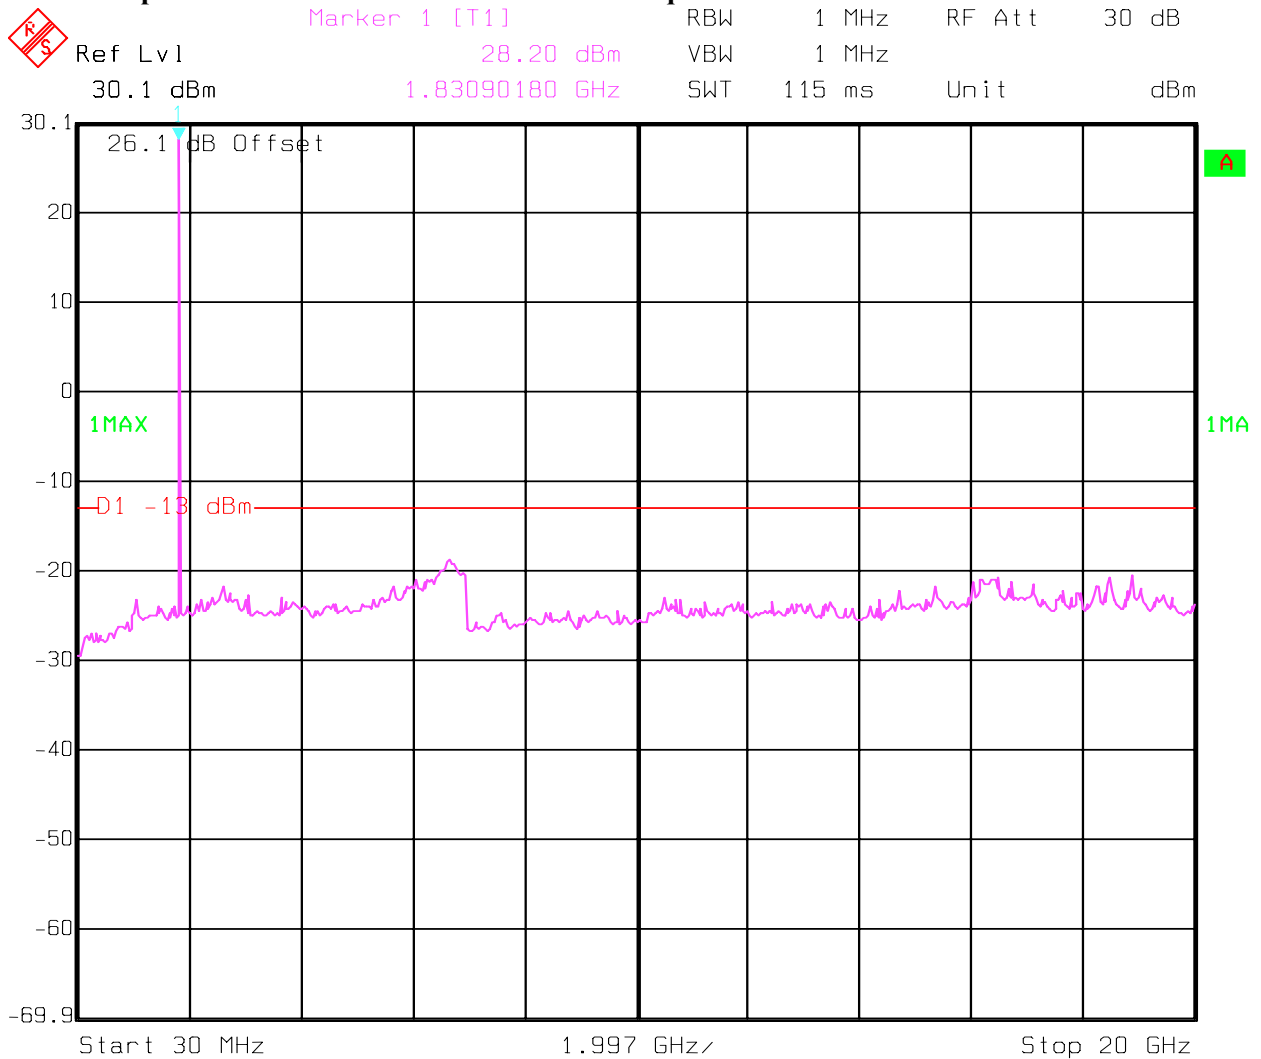
**5.4.7 Conducted Spurious Results PCS-1900****CHANNEL 512 (PCS-1900)****30MHz – 20GHz****Note: The peak above the limit line is the carrier freq. at ch-512**


Date: 09.JUN.2005 20:51:20

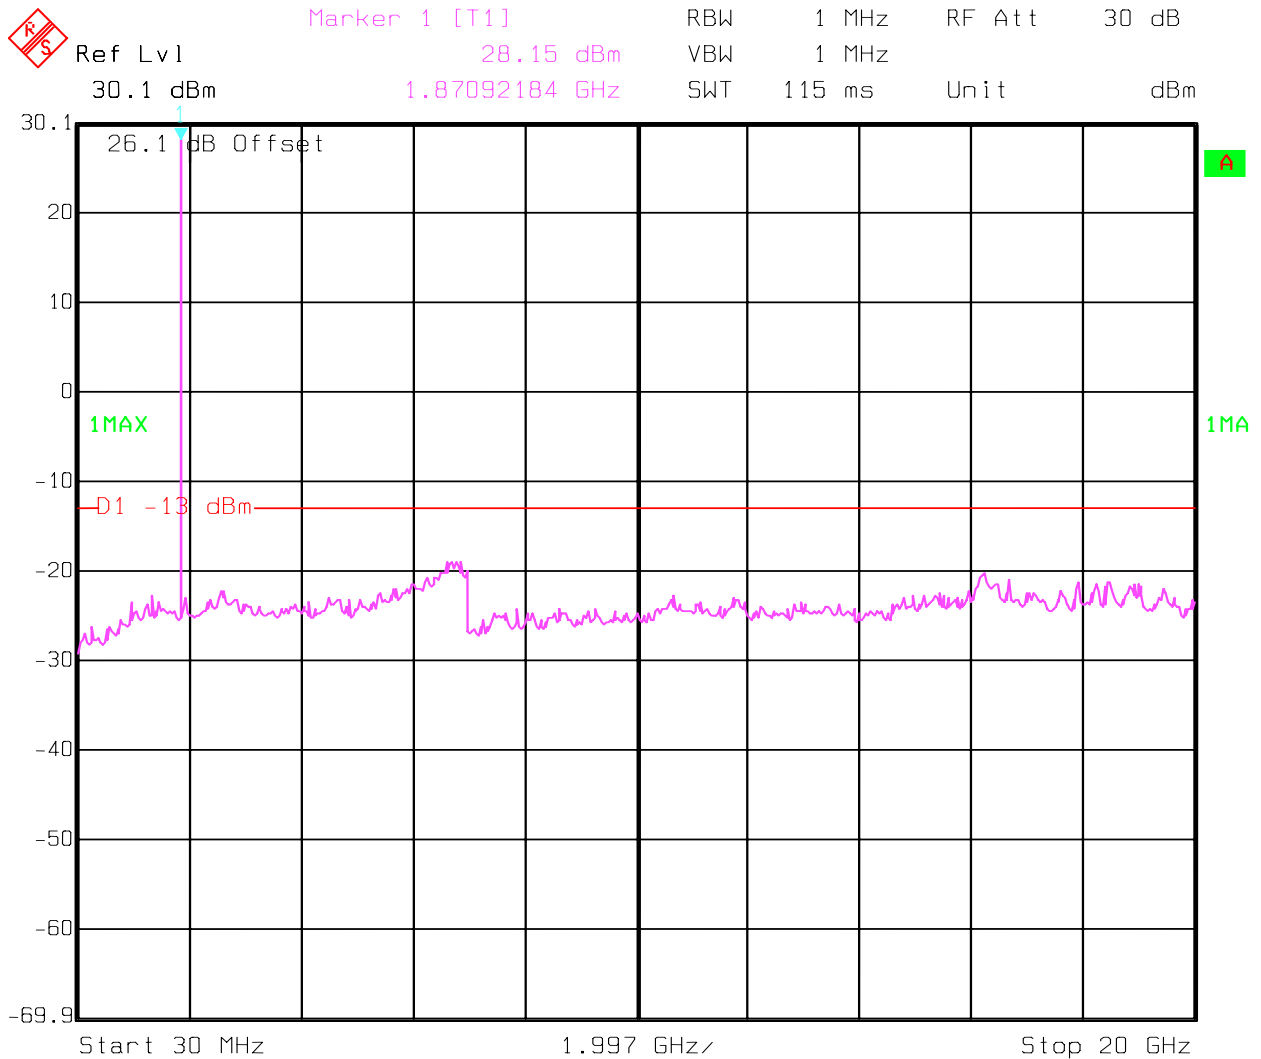**CHANNEL 661 (PCS-1900)**  
**30MHz – 20GHz****Note: The peak above the limit line is the carrier freq. at ch-661**

Date: 09.JUN.2005 20:53:14

**CHANNEL 810 (PCS-1900)**  
**30MHz – 20GHz****Note: The peak above the limit line is the carrier freq. at ch-810**

 Ref Lvl 30.1 dBm  
Marker 1 [T1] 28.35 dBm  
1.91094188 GHz  
RBW 1 MHz RF Att 30 dB  
VBW 1 MHz  
SWT 115 ms Unit dBm

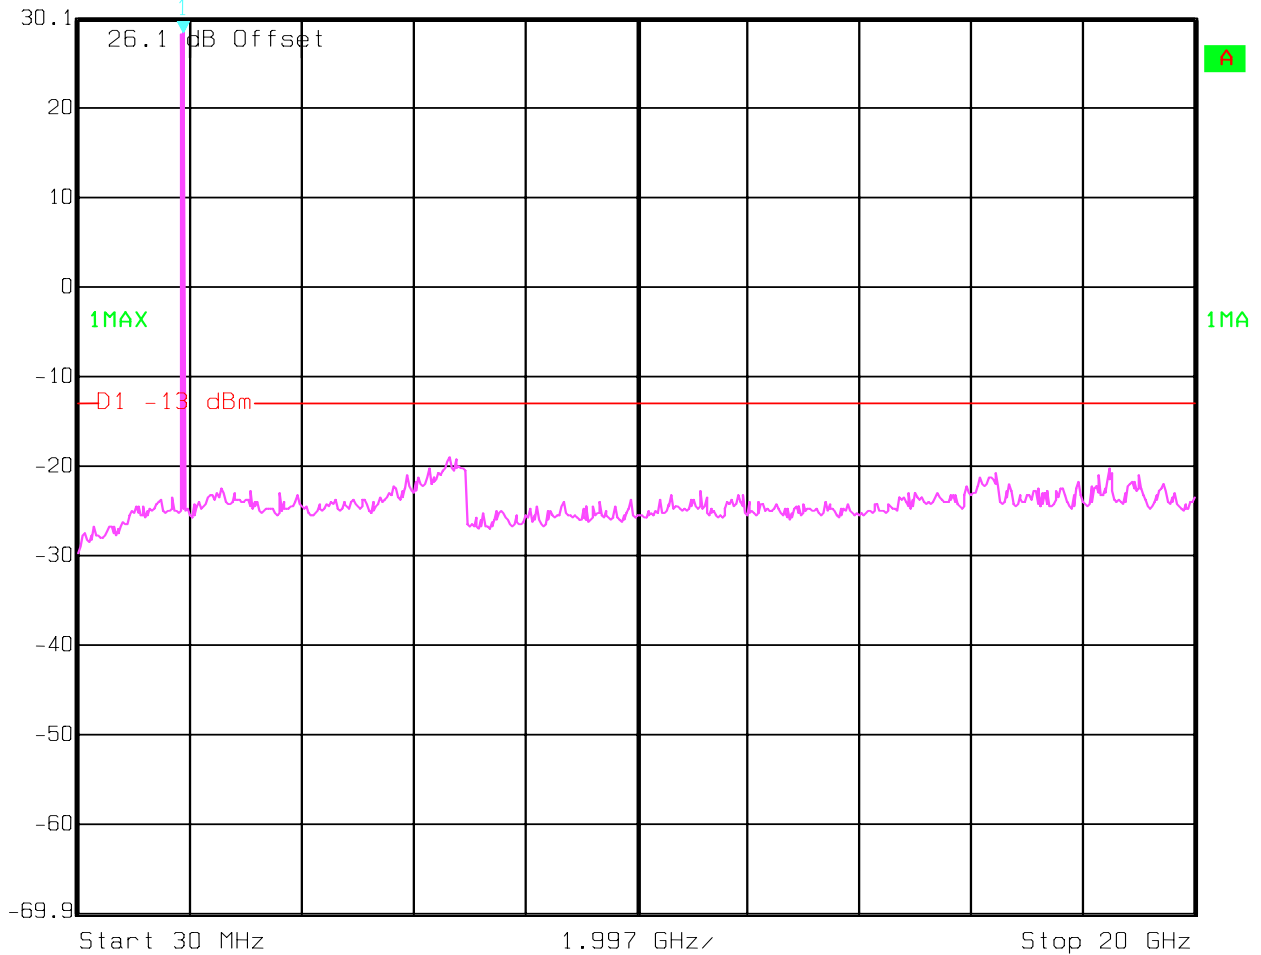

Date: 09.JUN.2005 20:54:26



**IDLE (PCS-1900)****30MHz – 20GHz**

Ref Lvl

30.1 dBm

RBW 1 MHz


RF Att 30 dB

VBW 1 MHz

SWT 115 ms

Unit

dBm

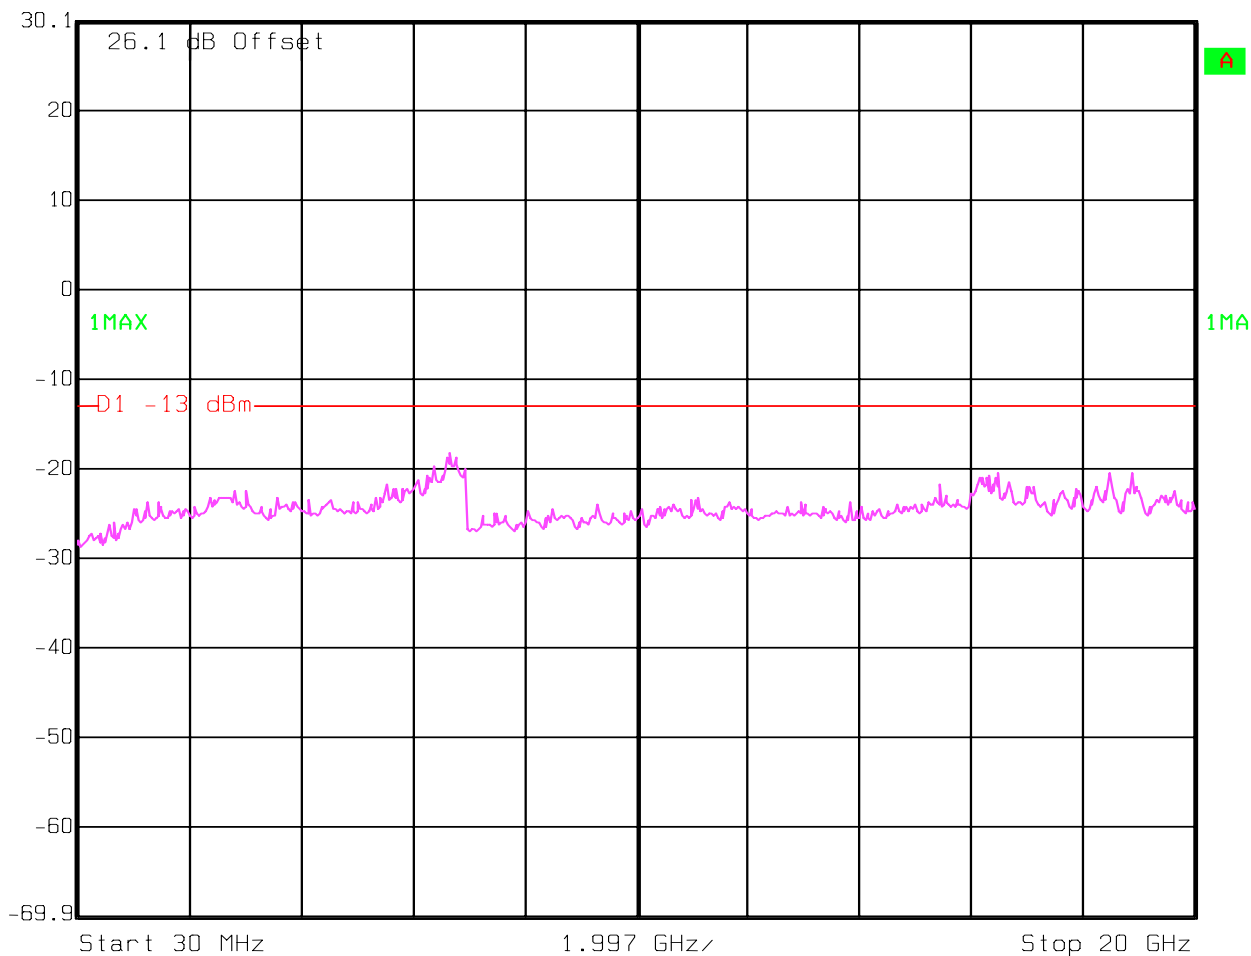

Date: 09.JUN.2005 20:55:35

## 5.5 Spurious Emissions Radiated

### 5.5.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

### 5.5.2 Limits:

#### 5.5.2.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

- (b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### 5.5.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


- (b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The

emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 5.5.3 Radiated out of band measurement procedure:

Based on TIA-603B November 2002

#### 2.2.12 Unwanted emissions: Radiated Spurious

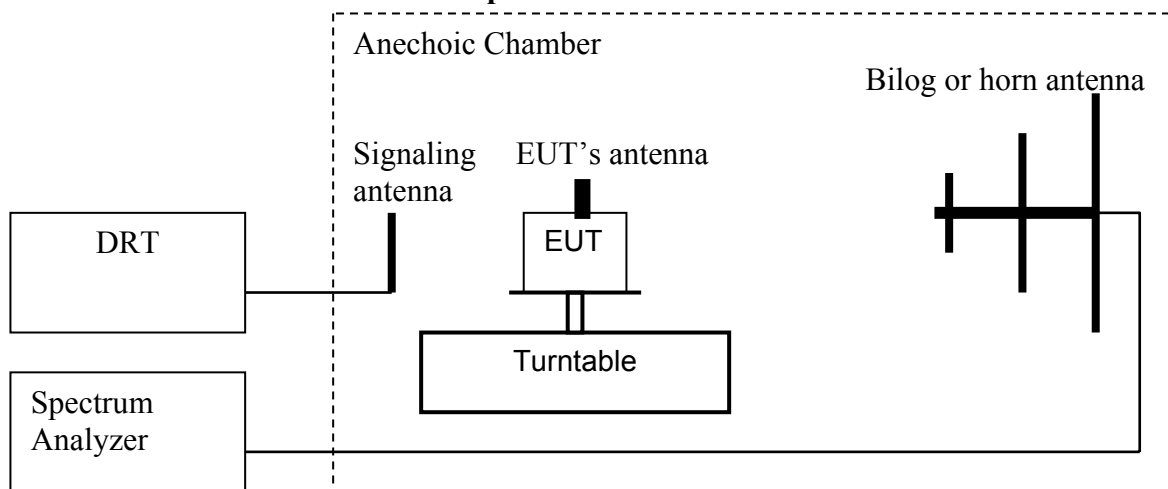

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (LVL) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**).  $\text{LOSS} = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$ .
7. Determine the level of spurious emissions using the following equation:  
 $\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:  
 $\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

**Spectrum analyzer settings:**

Res B/W: 1 MHz

Vid B/W: 1 MHz

**Measurement Survey:**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### 5.5.4 Radiated out of band emissions results on EUT:

#### RESULTS OF RADIATED TESTS GSM-850:

Harmonics	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
2	1648.4	-46	1673.2	-47.51	1697.6	-49.15
3	2472.6	-40.01	2509.8	-41.84	2546.4	-38.39
4	3296.8	-58.11	3346.4	-56.29	3395.2	-55.73
5	4121	-51.57	4183	-52.63	4244	-54.11
6	4945.2	-43.6	5019.6	-39.58	5092.8	-43.73
7	5769.4	NF	5856.2	NF	5941.6	NF
8	6593.6	NF	6692.8	NF	6790.4	NF
9	7417.8	NF	7529.4	NF	7639.2	NF
10	8242	-42.81	8366	-42.73	8488	-42.77
NF = NOISE FLOOR						

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx: 30MHz - 1GHz**


Spurious emission limit -13dBm

**Antenna: vertical*****SWEEP TABLE: "FCC 22 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

**Note:**

- 1.The peak above the limit line is the carrier freq.
- 2.This plot is valid for low, mid & high channels (worst-case plot)

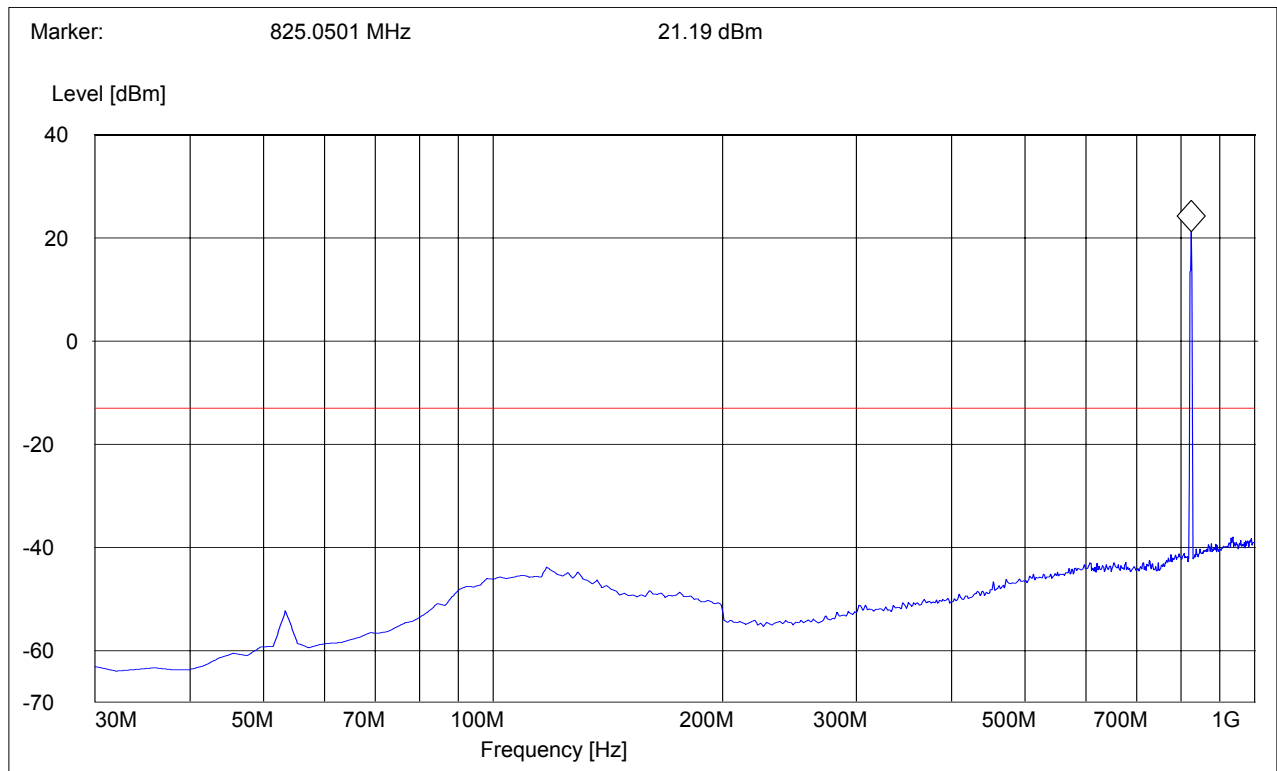

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx: 30MHz - 1GHz**


Spurious emission limit -13dBm

**Antenna: horizontal*****SWEEP TABLE: "FCC 22 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

**Note:**

- 1.The peak above the limit line is the carrier freq.
- 2.This plot is valid for low, mid & high channels (worst-case plot)

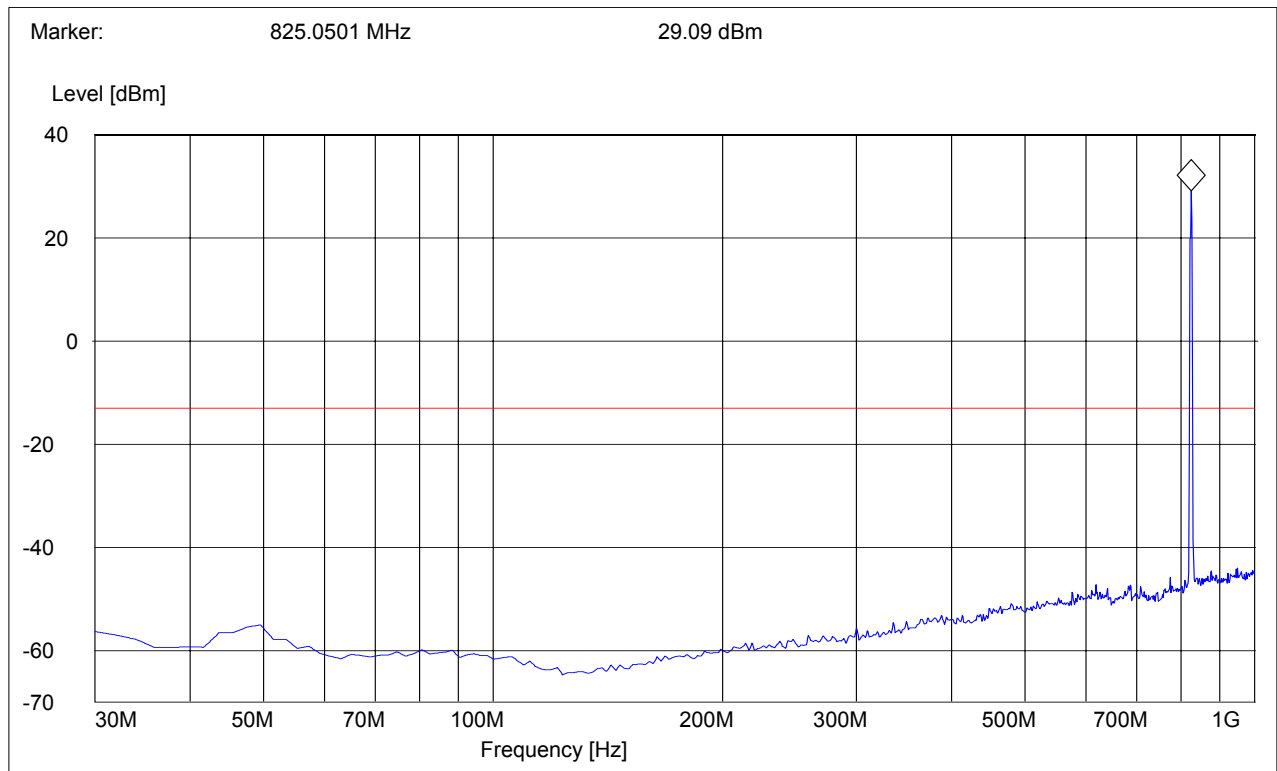


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1-1.58G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	1.58GHz	Max Peak	Coupled	1 MHz	1 MHz

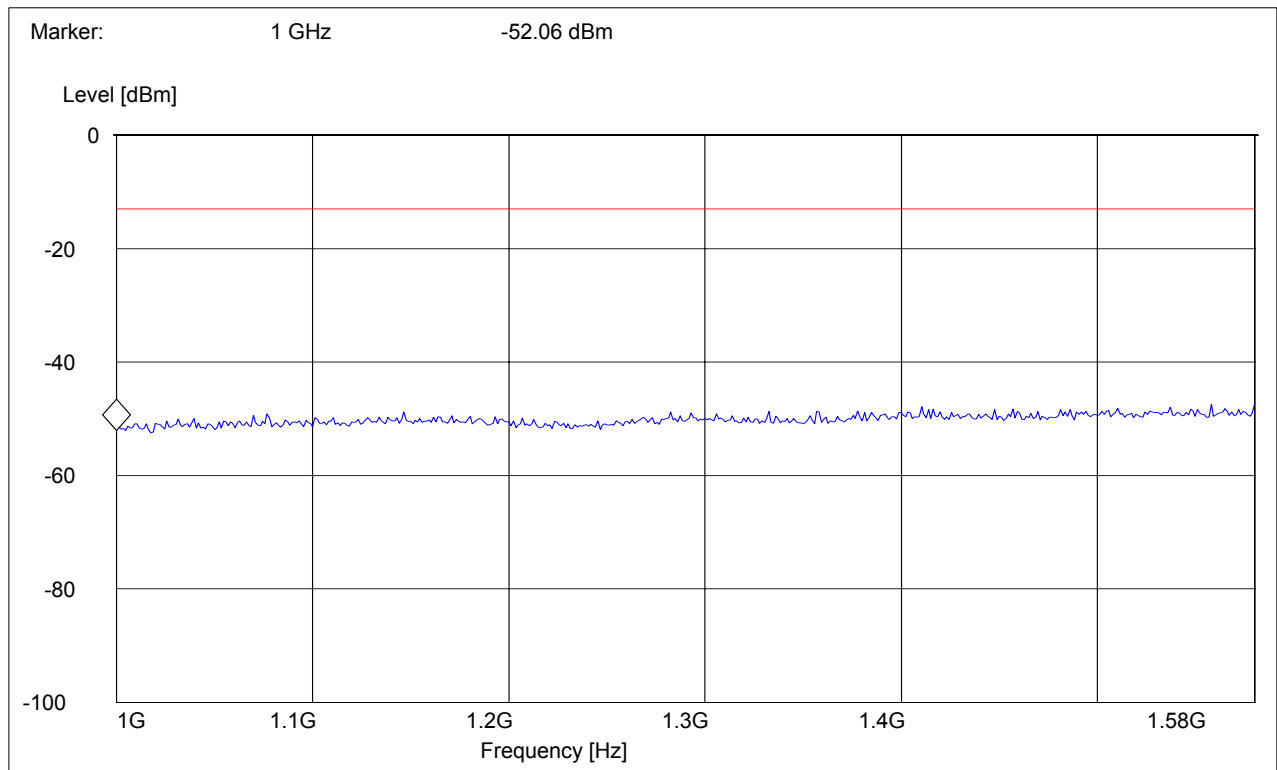




**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 1.58GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1.58-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1.58GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

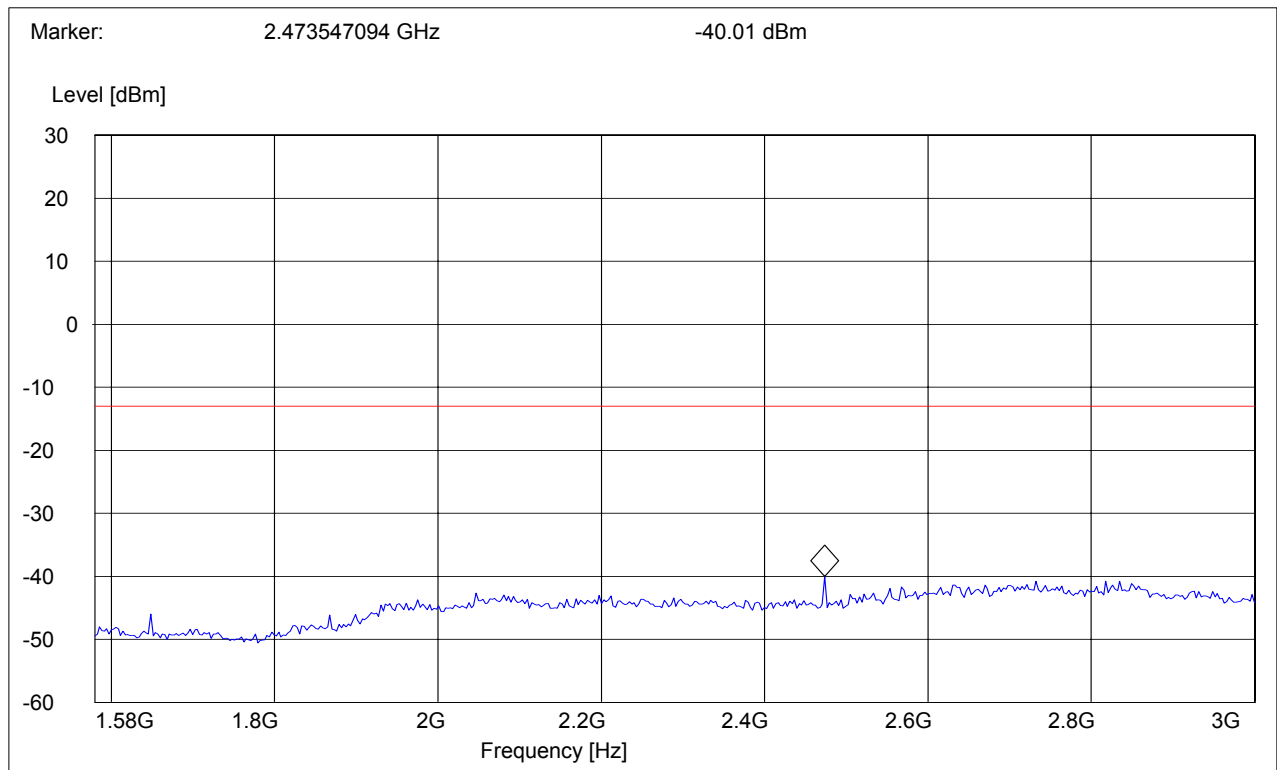


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 3GHz – 9GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 3-9G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	9GHz	Max Peak	Coupled	1 MHz	1 MHz

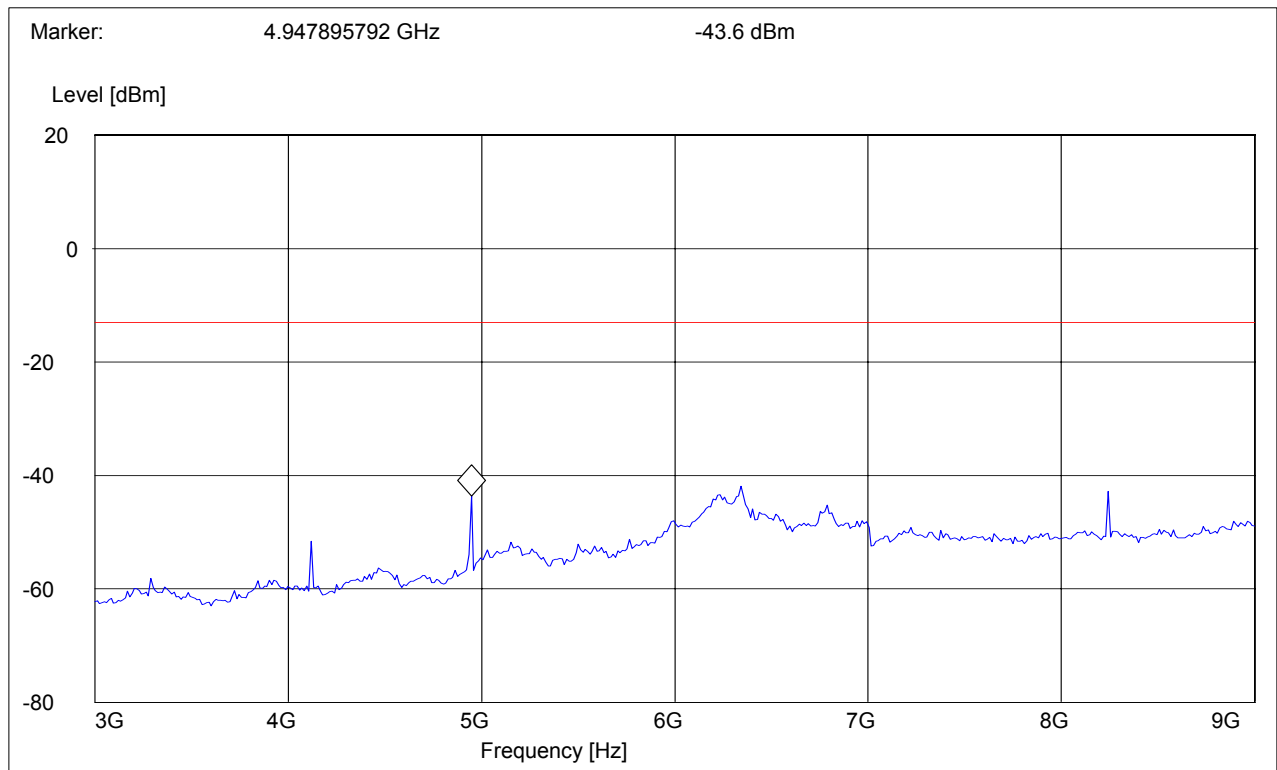


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 836.6MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1-1.58G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	1.58GHz	Max Peak	Coupled	1 MHz	1 MHz

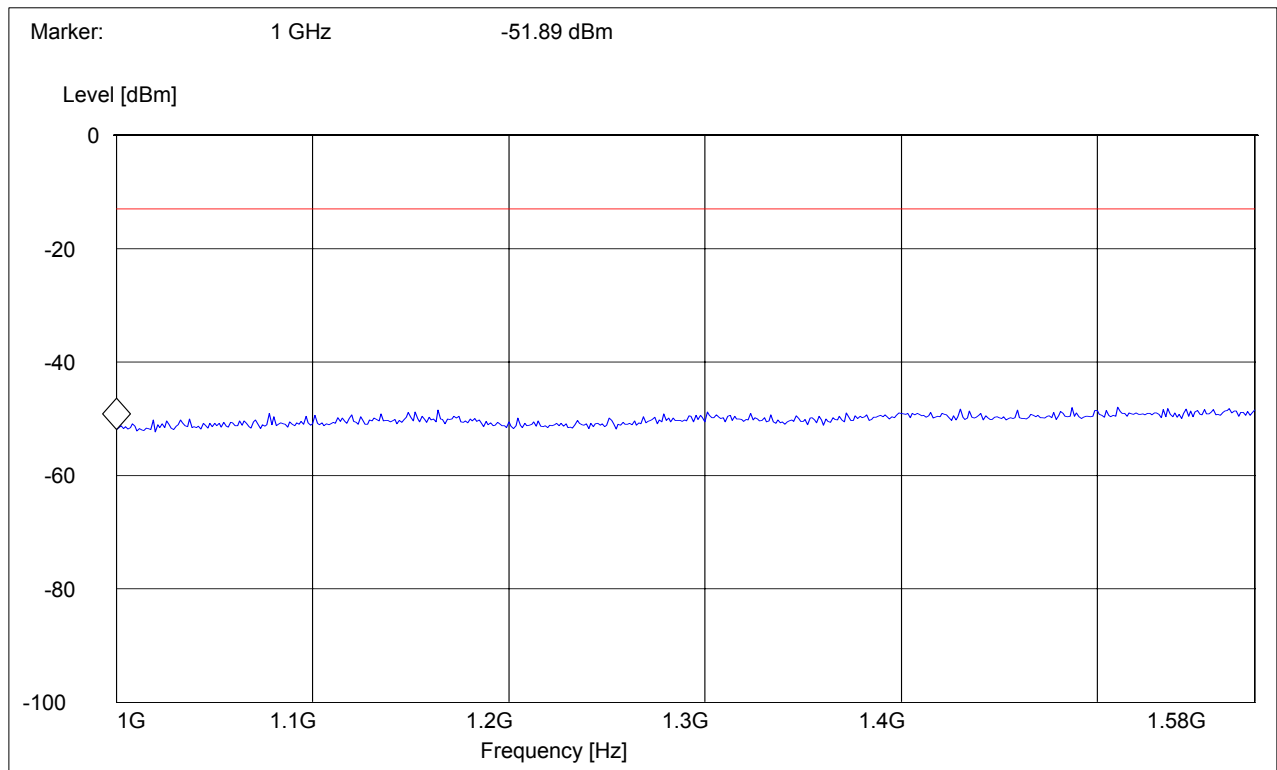


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 836.6MHz: 1.58GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1.58-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1.58GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

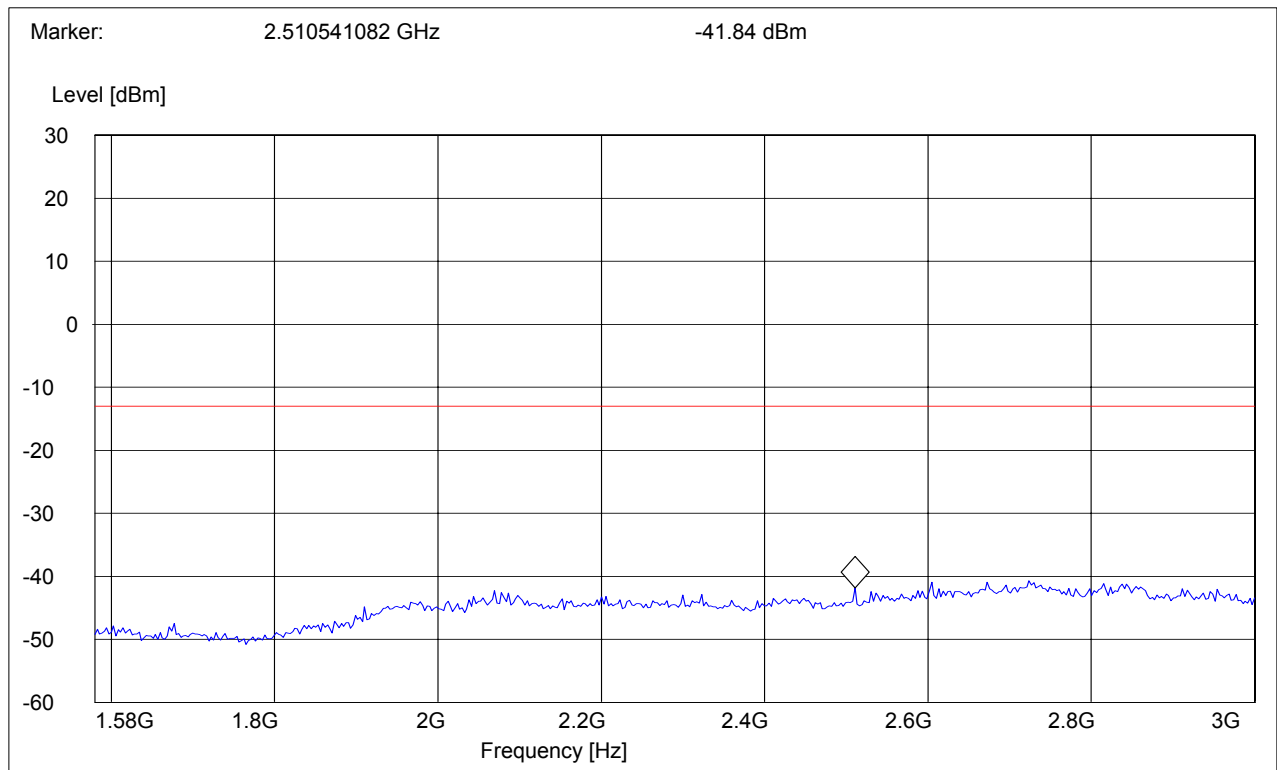


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 836.6MHz: 3GHz – 9GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 3-9G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	9GHz	Max Peak	Coupled	1 MHz	1 MHz

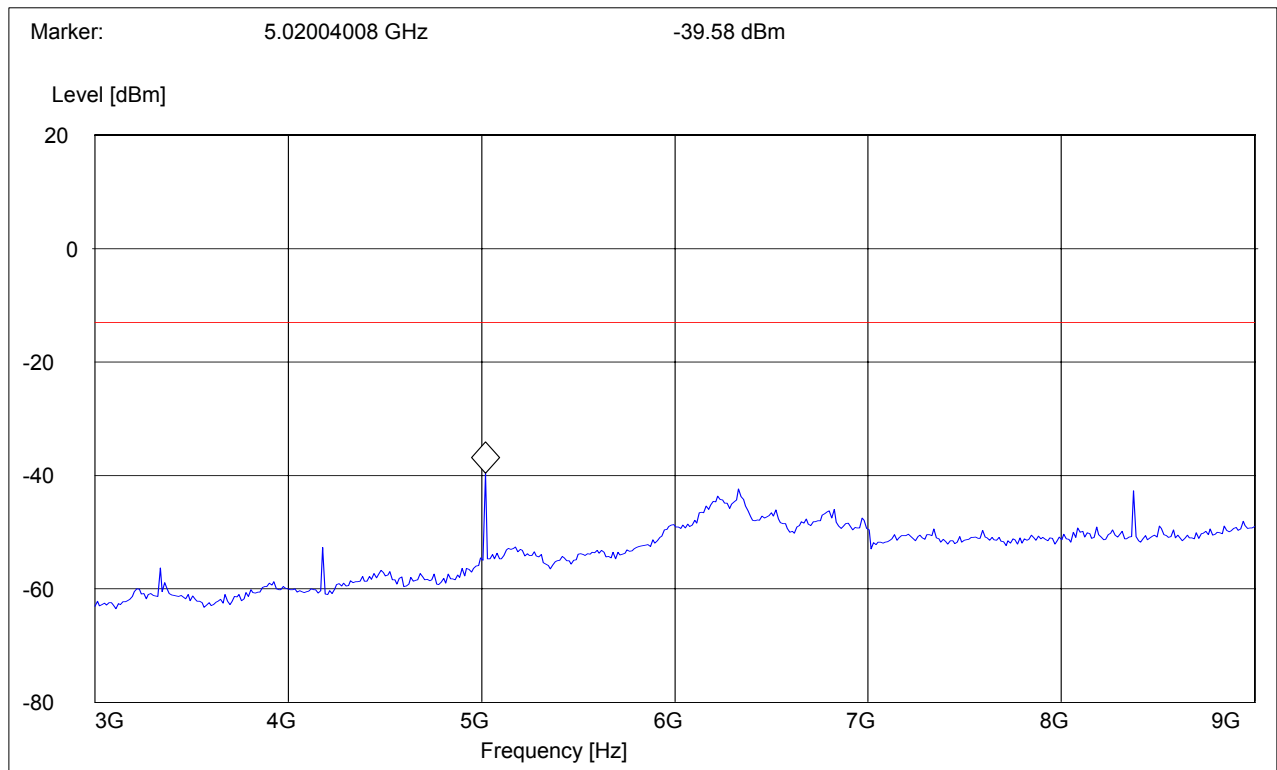


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 848.8MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1-1.58G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	1.58GHz	Max Peak	Coupled	1 MHz	1 MHz

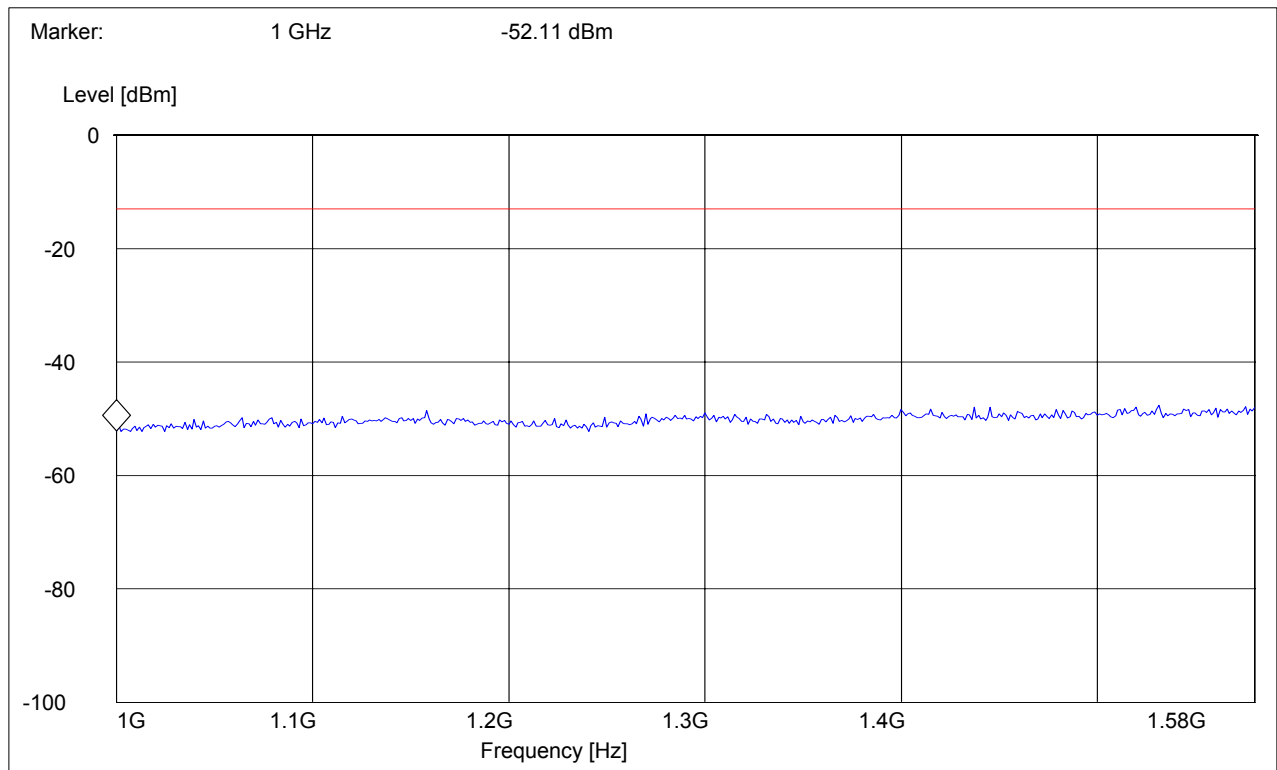


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 848.8MHz: 1.58GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 1.58-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1.58GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

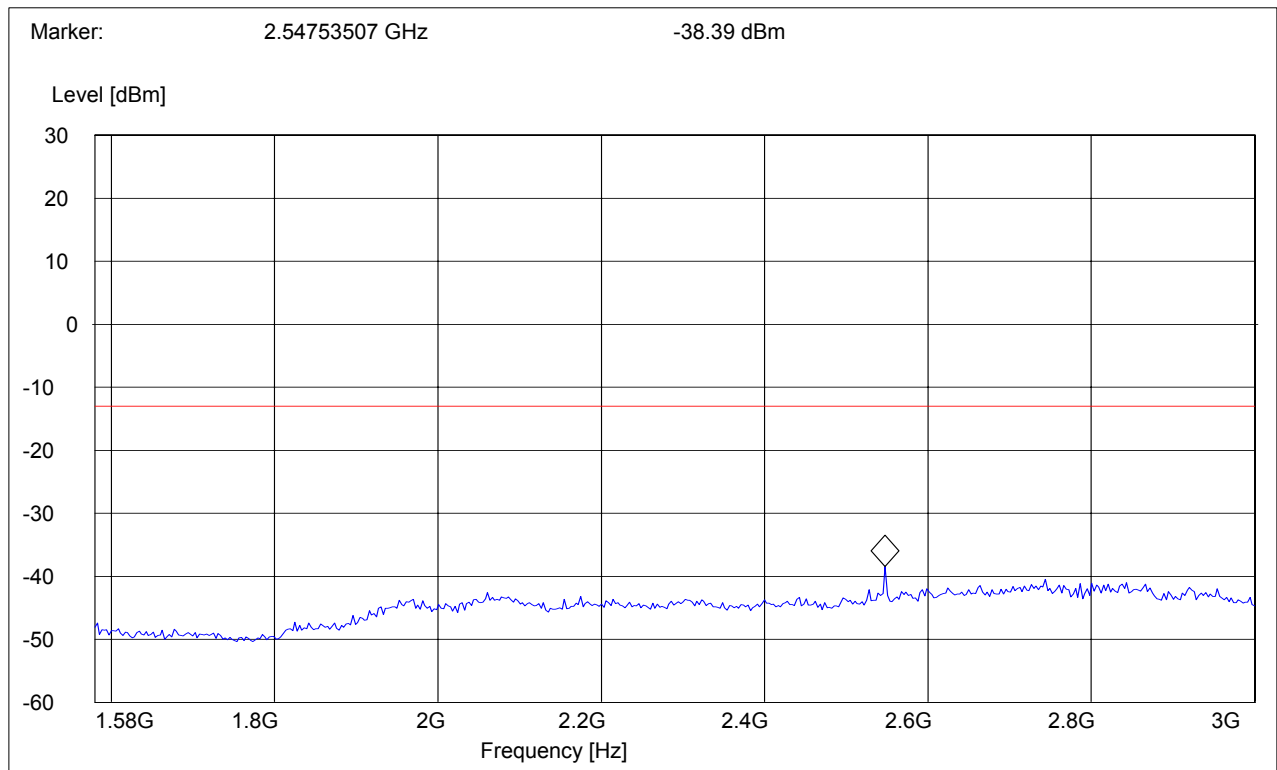


**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 848.8MHz: 3GHz – 9GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 22 Spur 3-9G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	9GHz	Max Peak	Coupled	1 MHz	1 MHz

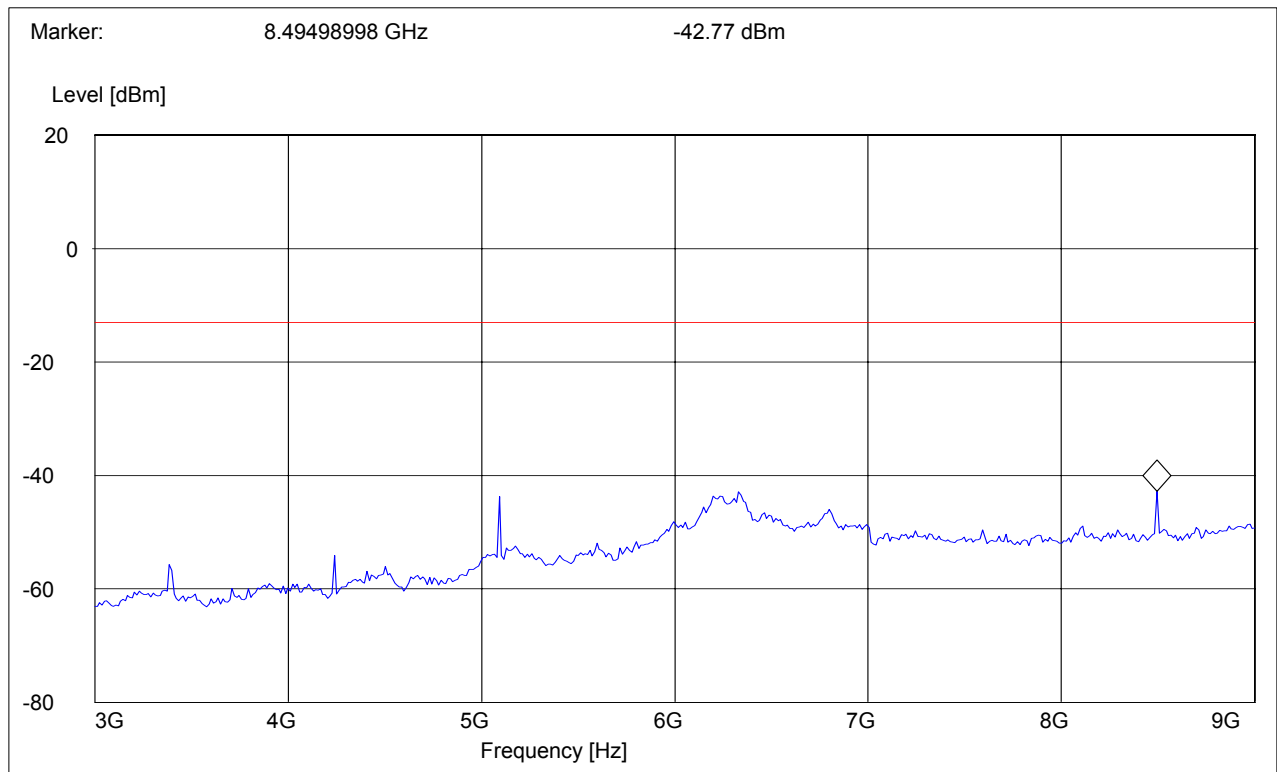




**RADIATED SPURIOUS EMISSIONS (GSM-850)****IDLE: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical*****SWEEP TABLE: "FCC 22 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

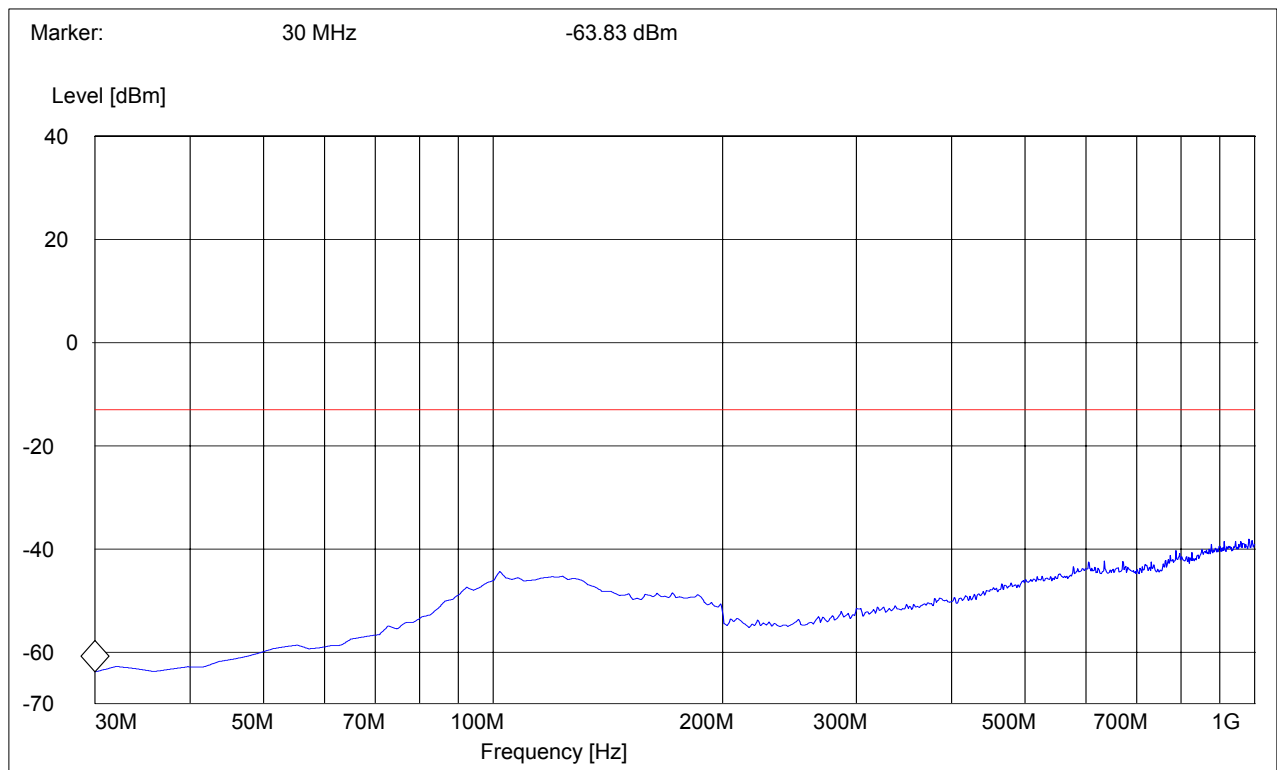


**RADIATED SPURIOUS EMISSIONS (GSM-850)****IDLE: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: horizontal*****SWEEP TABLE: "FCC 22 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

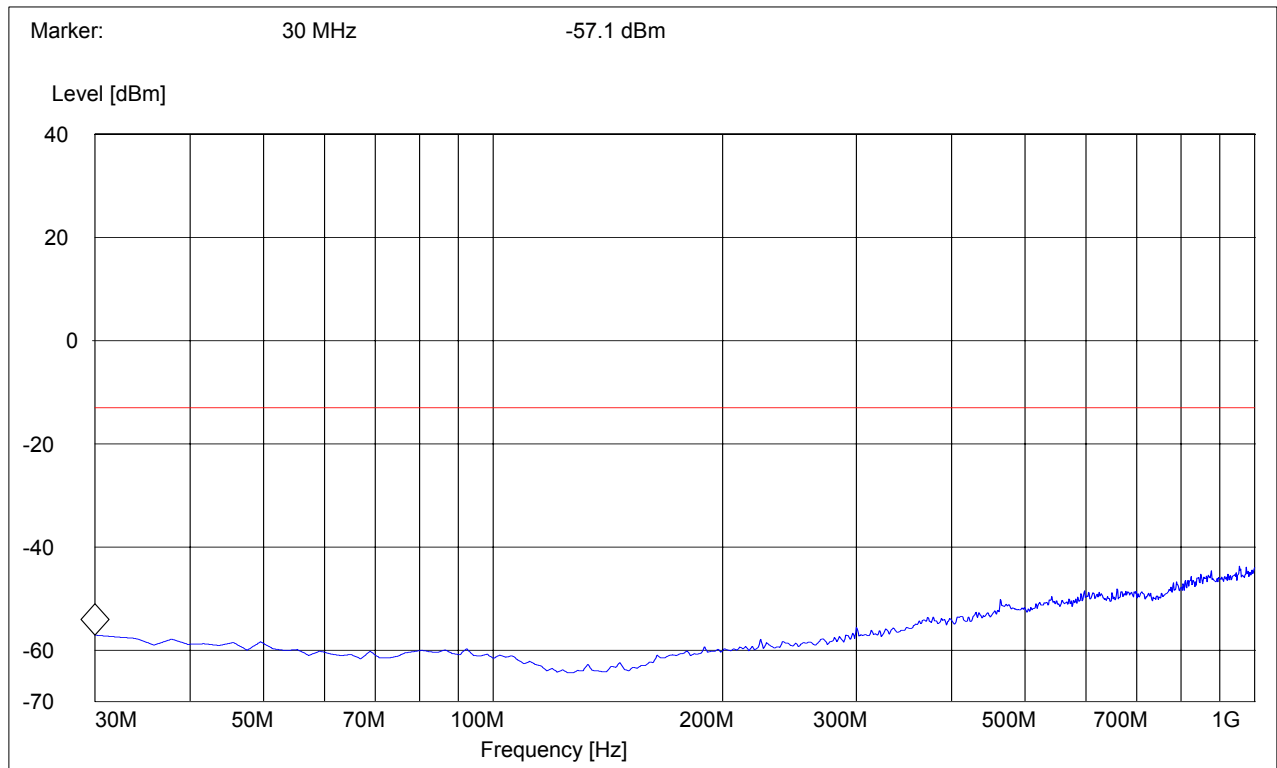


**RADIATED SPURIOUS EMISSIONS (GSM-850)****IDLE: 1GHz – 3GHz**

Spurious emission limit –13dBm


***SWEEP TABLE: "FCC 22 Spur 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

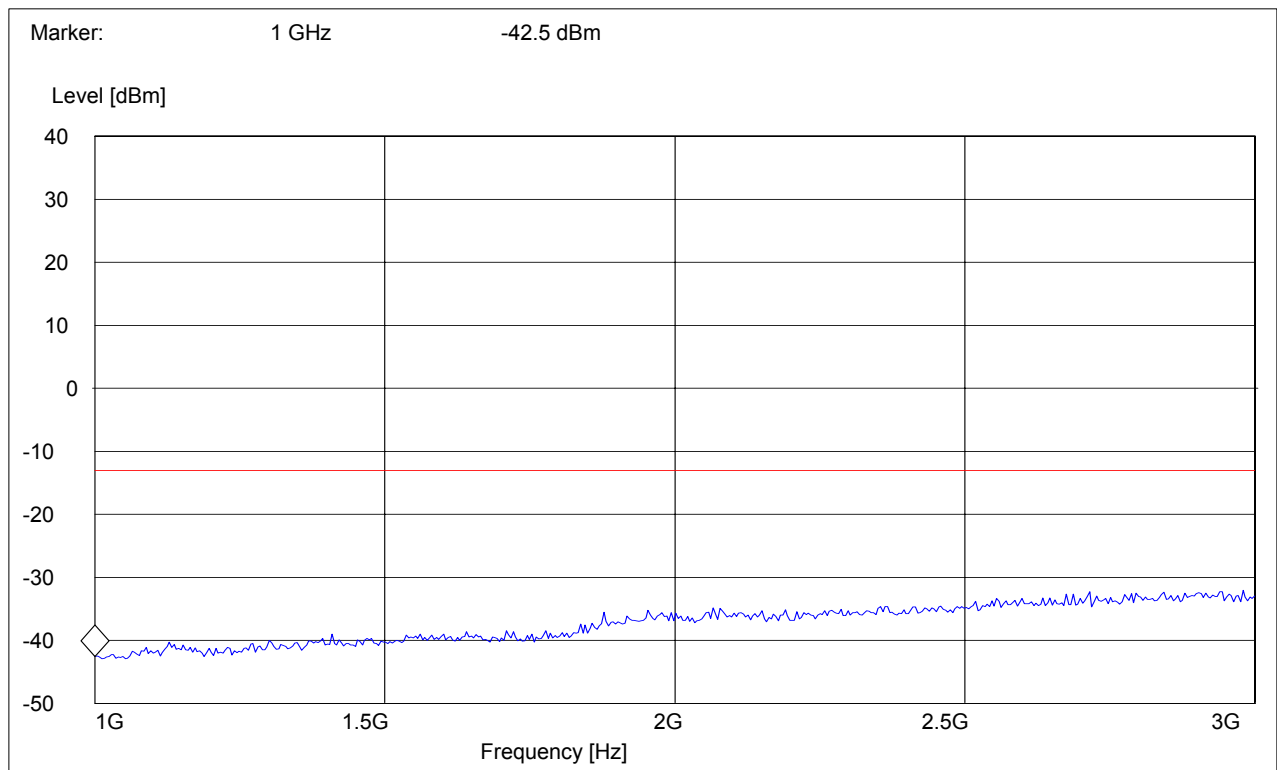

**RADIATED SPURIOUS EMISSIONS (GSM-850)**  
**IDLE: 3GHz – 9GHz*****SWEEP TABLE: "FCC 22 Spur 3-9G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	9GHz	Max Peak	Coupled	1 MHz	1 MHz

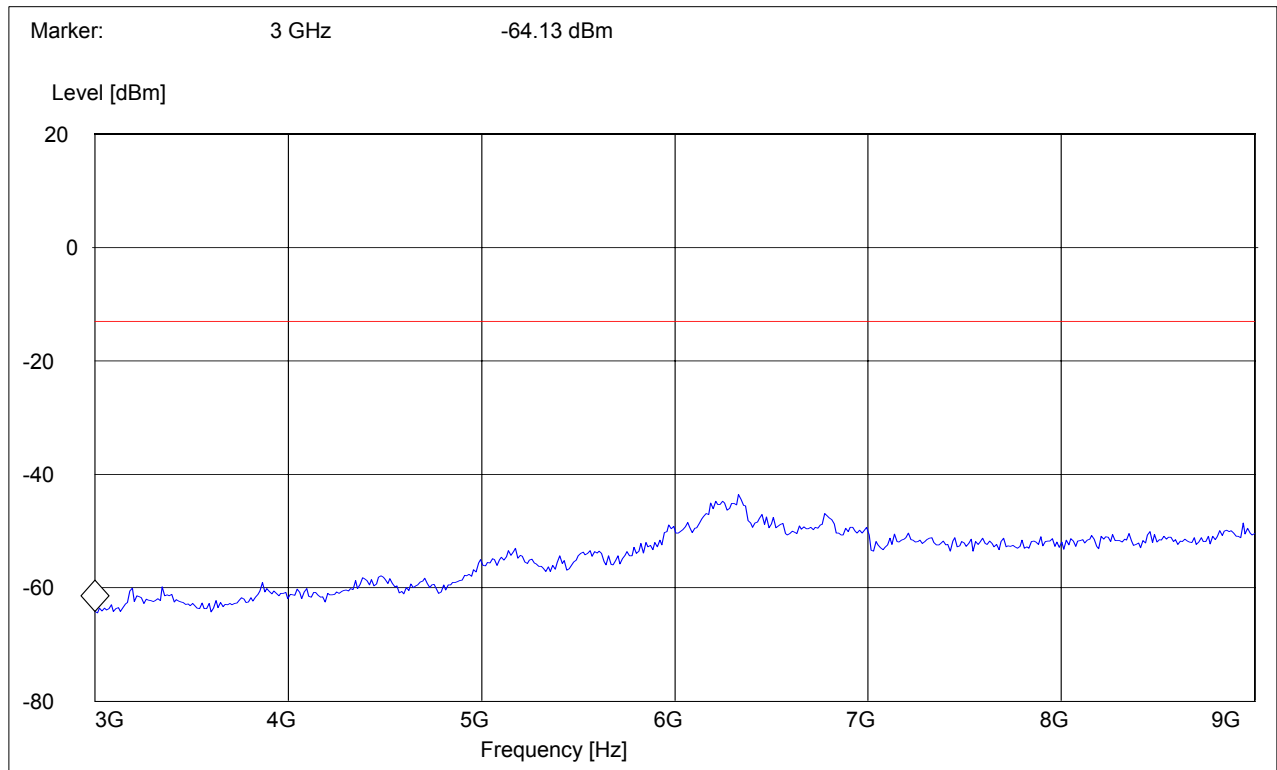

**RESULTS OF RADIATED TESTS PCS-1900:**


<b>Harmonic</b>	<b>Tx ch-512 Freq.(MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-661 Freq. (MHz)</b>	<b>Level (dBm)</b>	<b>Tx ch-810 Freq. (MHz)</b>	<b>Level (dBm)</b>
<b>2</b>	<b>3700.4</b>	-45.45	<b>3760</b>	-43.70	<b>3819.6</b>	-45.18
<b>3</b>	<b>5550.6</b>	-44.35	<b>5640</b>	-47.32	<b>5729.4</b>	-43.57
<b>4</b>	<b>7400.8</b>	-45.23	<b>7520</b>	-47.18	<b>7639.2</b>	NF
<b>5</b>	<b>9251</b>	-41.83	<b>9400</b>	-38.71	<b>9549</b>	-41.63
<b>6</b>	<b>11101.2</b>	NF	<b>11280</b>	NF	<b>11458.8</b>	NF
<b>7</b>	<b>12951.4</b>	NF	<b>13160</b>	NF	<b>13368.6</b>	NF
<b>8</b>	<b>14801.6</b>	NF	<b>15040</b>	NF	<b>15278.4</b>	NF
<b>9</b>	<b>16651.8</b>	NF	<b>16920</b>	NF	<b>17188.2</b>	NF
<b>10</b>	<b>18502</b>	NF	<b>18800</b>	NF	<b>19098</b>	NF
NF = NOISE FLOOR						

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical*****SWEEP TABLE: "FCC 24 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

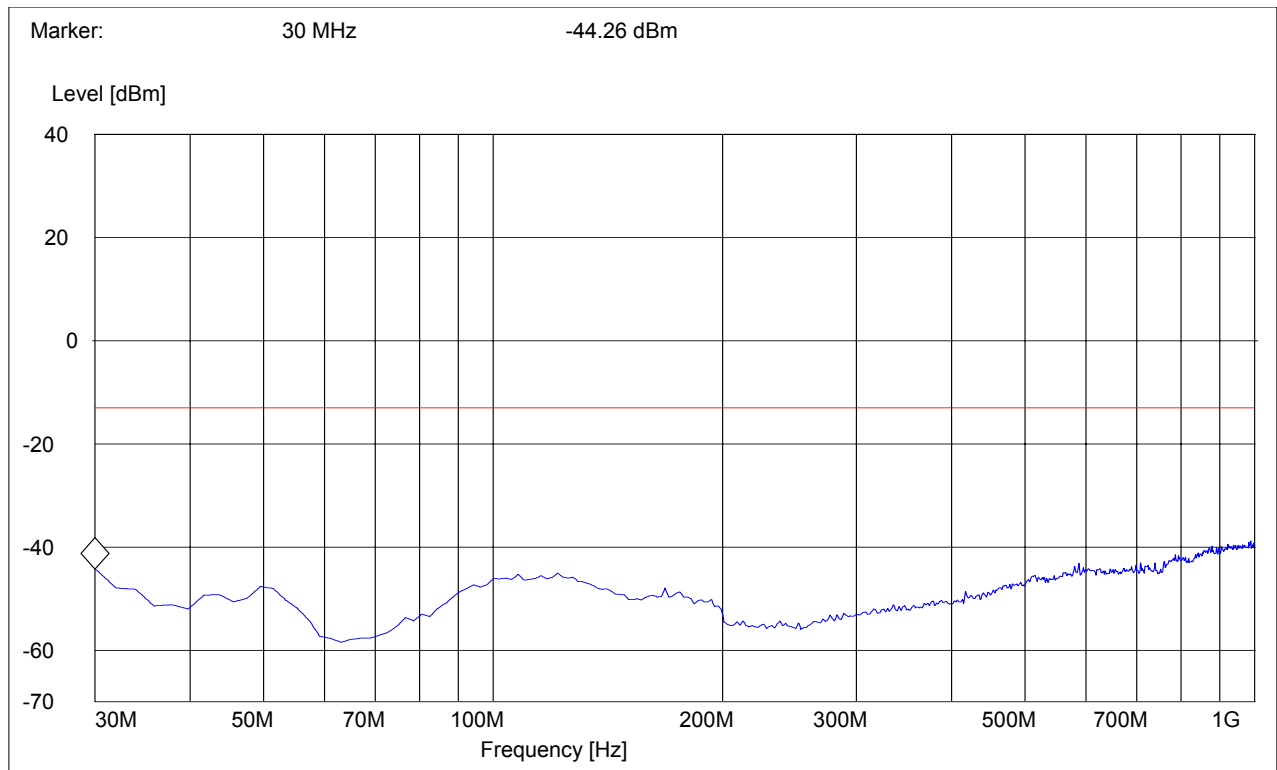
**Note: This plot is valid for low, mid & high channels (worst-case plot)**

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: horizontal*****SWEEP TABLE: "FCC 24 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

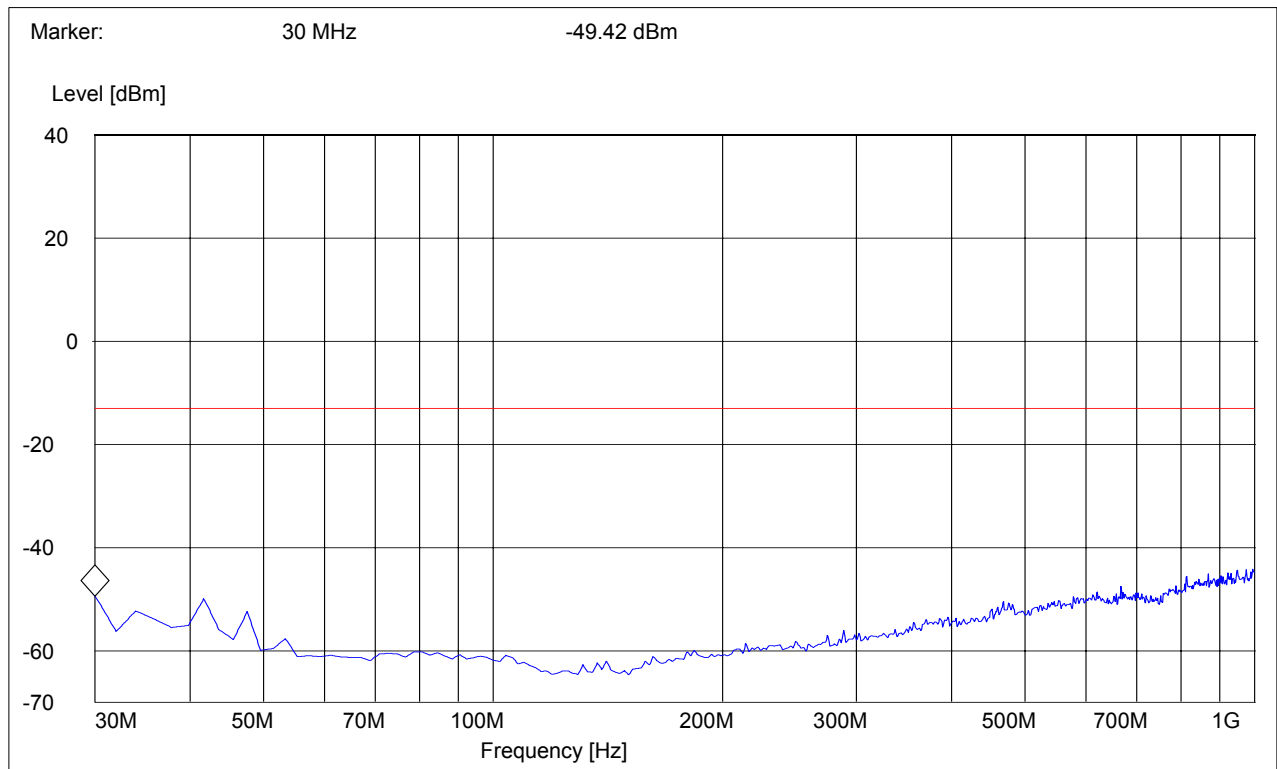
**Note: This plot is valid for low, mid & high channels (worst-case plot)**

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1850.2MHz: 1GHz – 3GHz**

Spurious emission limit -13dBm

***SWEEP TABLE: "FCC Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

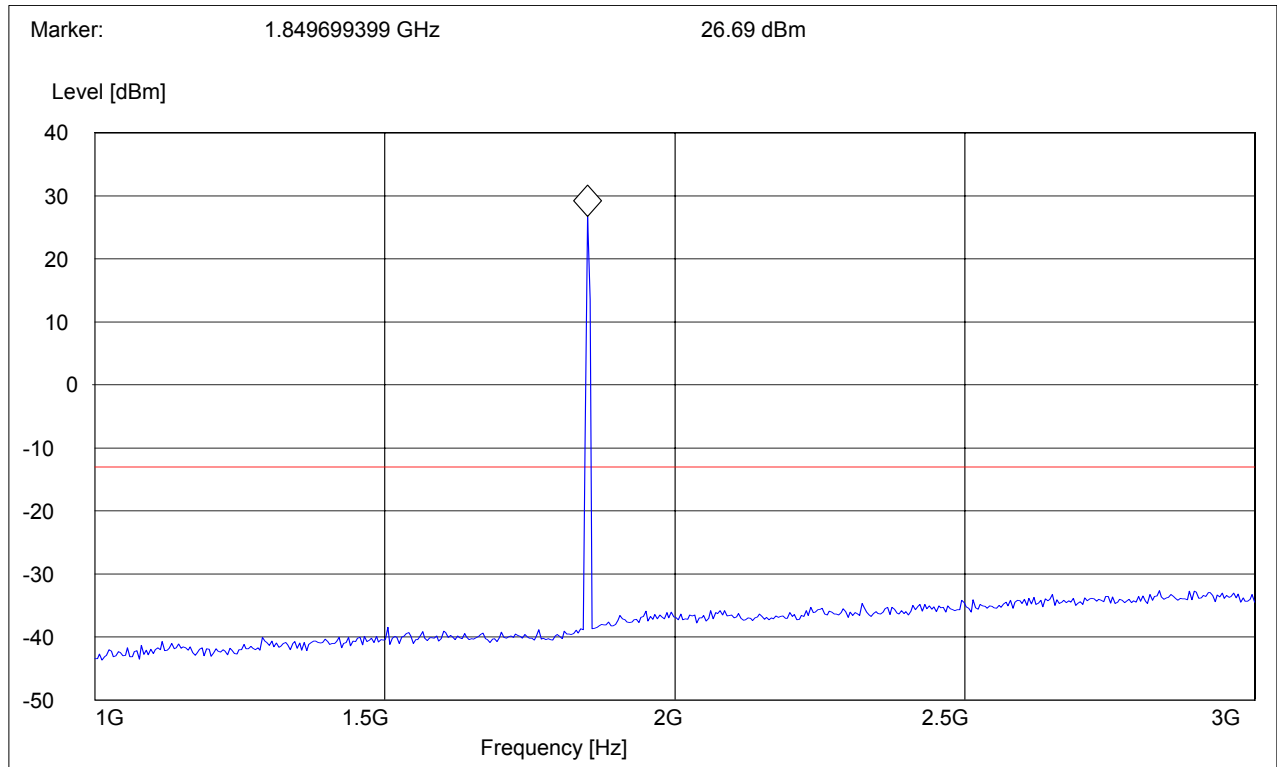**Note: The peak above the limit line is the carrier freq. at ch-512.**




**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1850.2MHz: 3GHz – 18GHz**

Spurious emission limit -13dBm

***SWEEP TABLE: "FCC Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

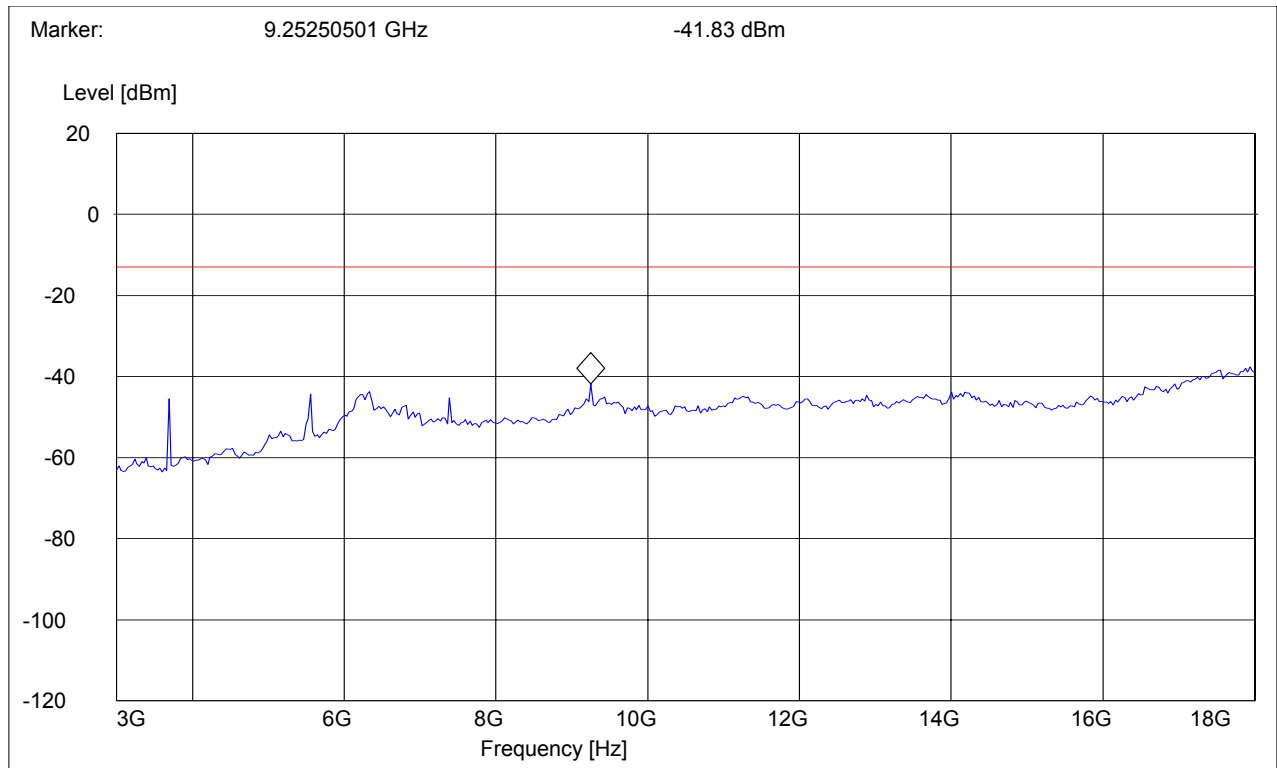


**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1880.0MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

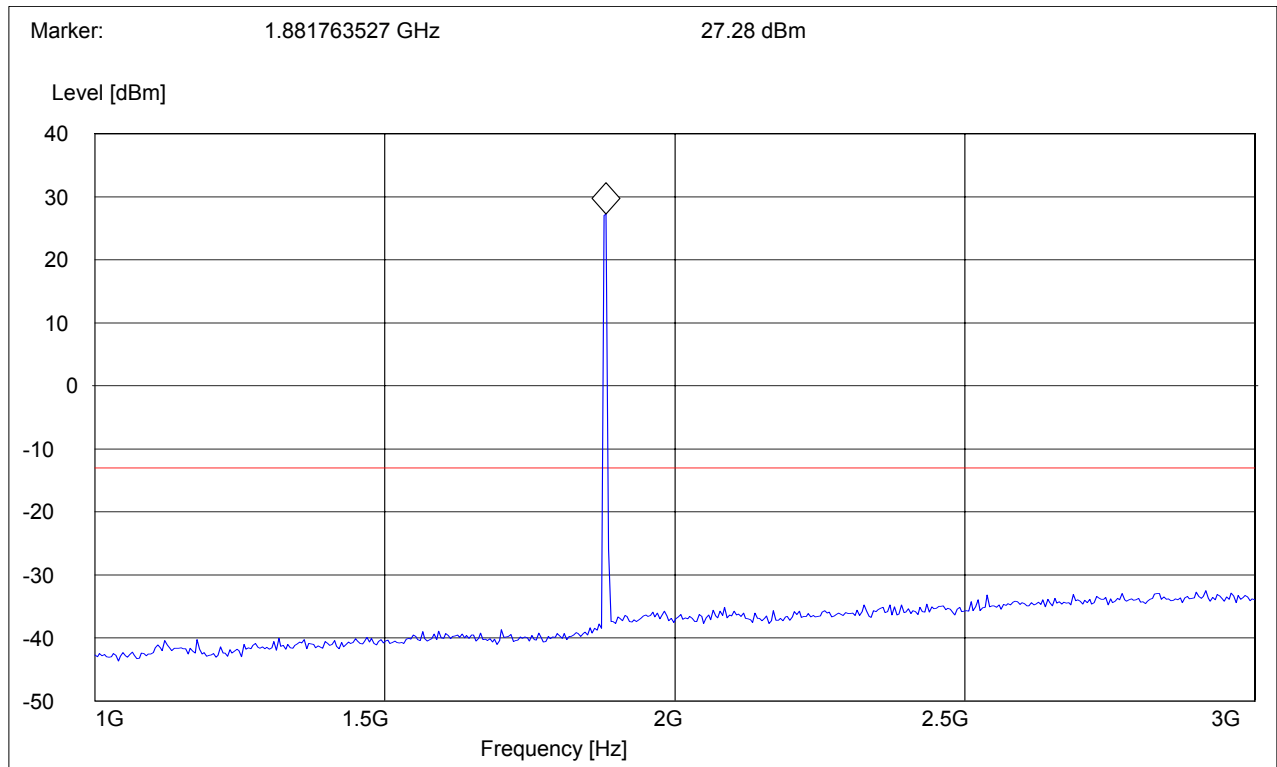
**Note: The peak above the limit line is the carrier freq. at ch-661.**

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1880.0MHz: 3GHz – 18GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

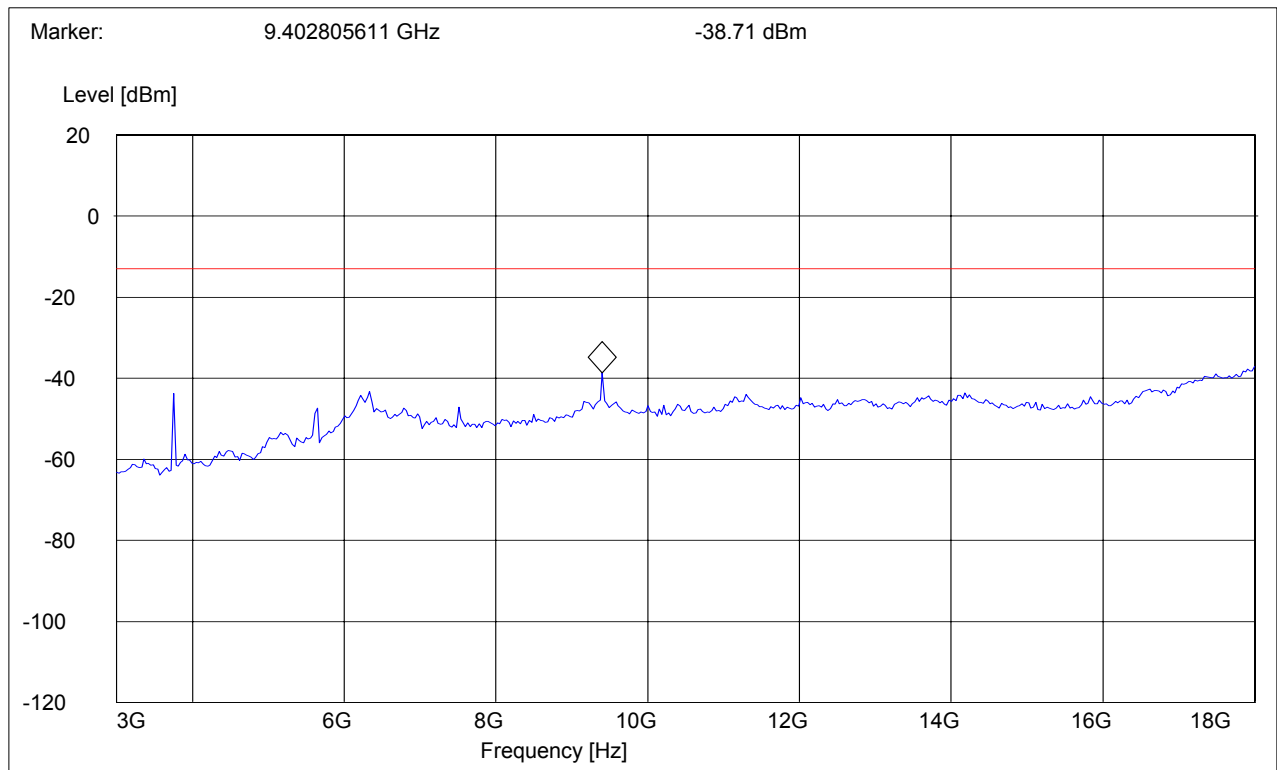


**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1909.8MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

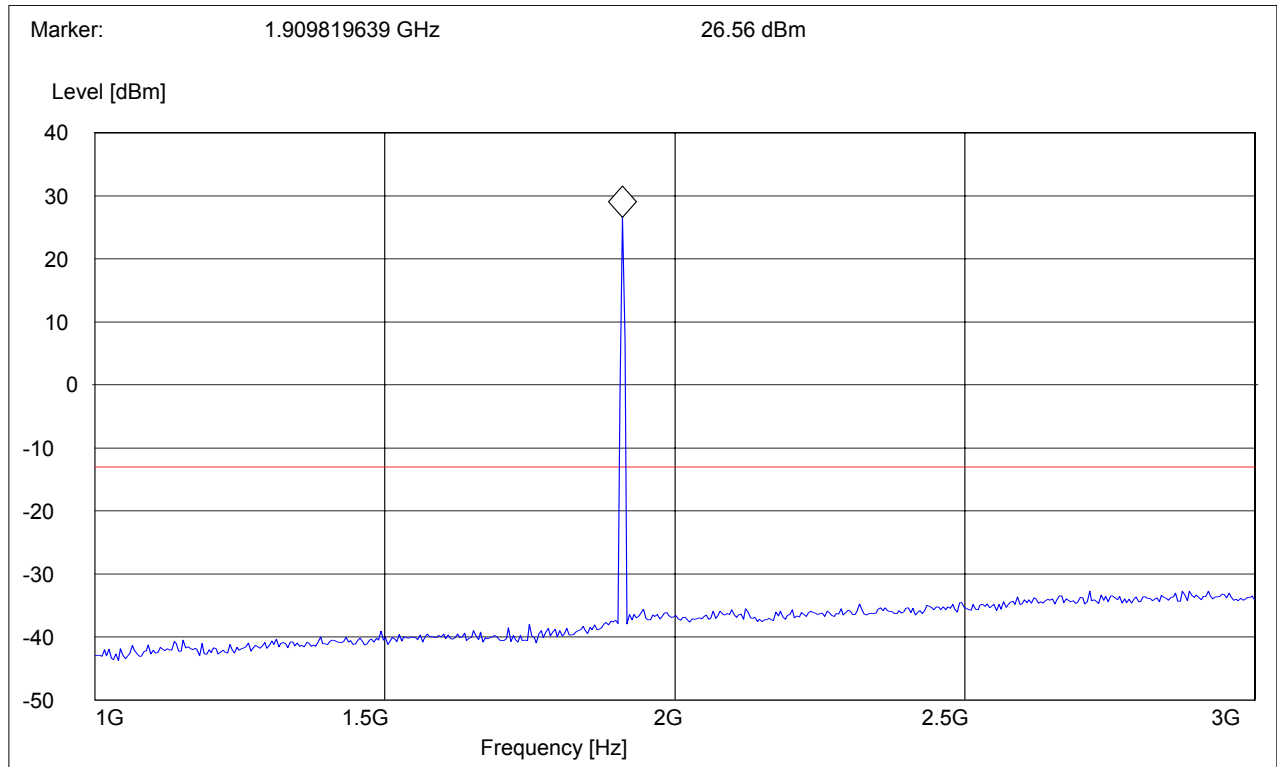
**Note: The peak above the limit line is the carrier freq. at ch-810.**

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1909.8MHz: 3GHz – 18GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

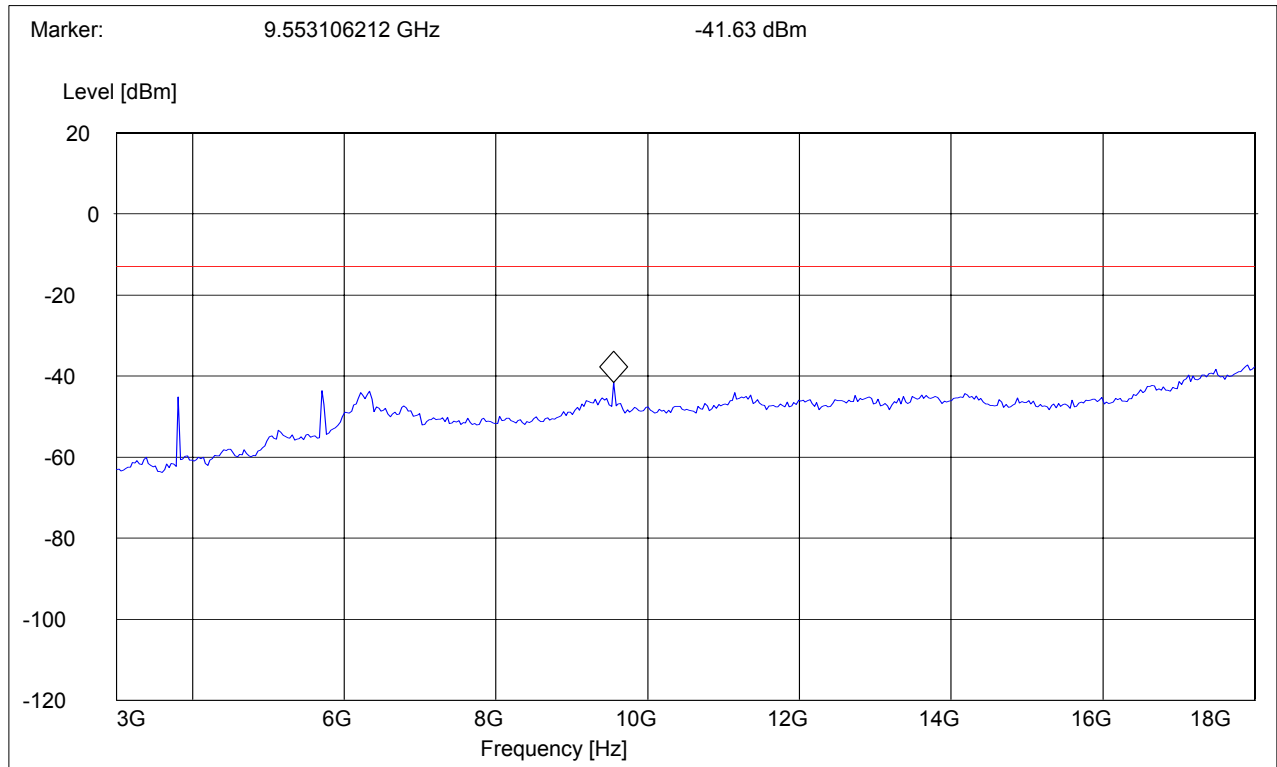


**RADIATED SPURIOUS EMISSIONS(PCS 1900)****18GHz – 19.1GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 24 spuri 18-19.1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz	1 MHz

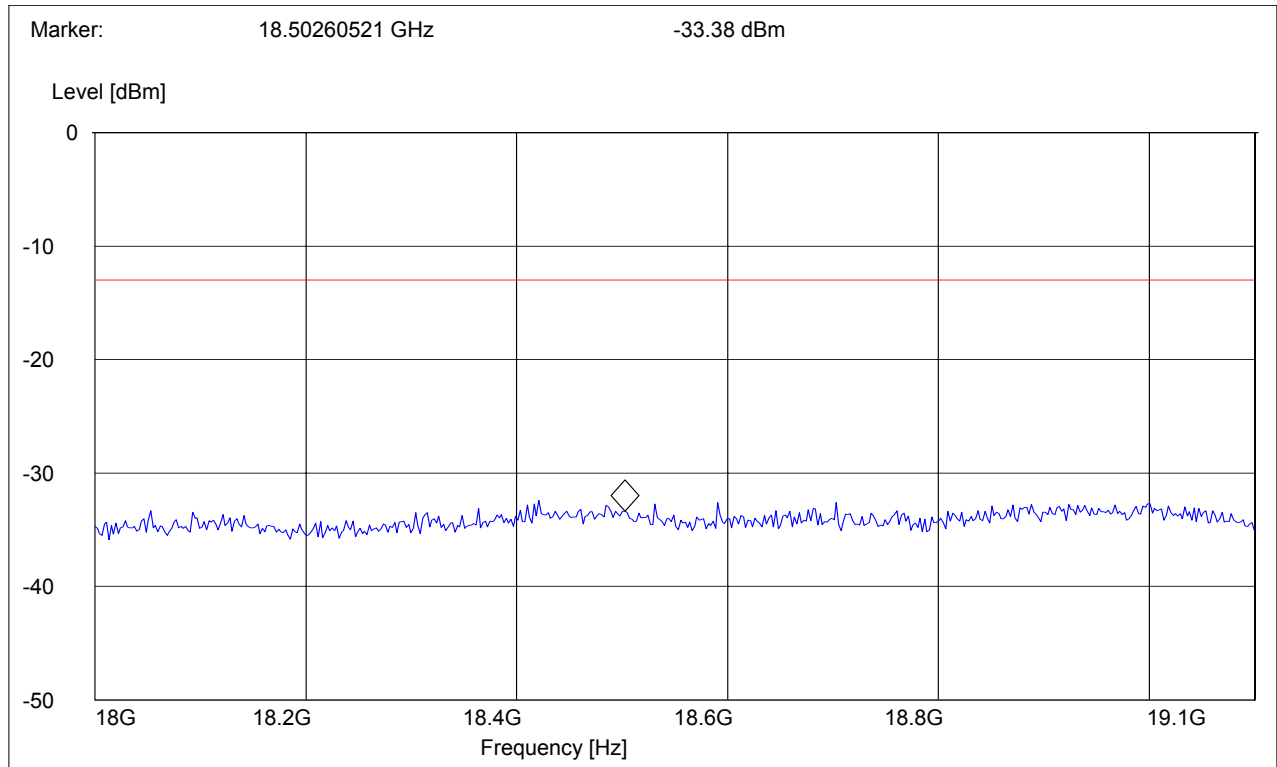
**Note: This plot is valid for low, mid & high channels (worst-case plot)**

**RADIATED SPURIOUS EMISSIONS (IDLE MODE)****EUT in Idle Mode: 30MHz – 1GHz**

Spurious emission limit –13dBm

**Antenna: vertical*****SWEEP TABLE: "FCC 22 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

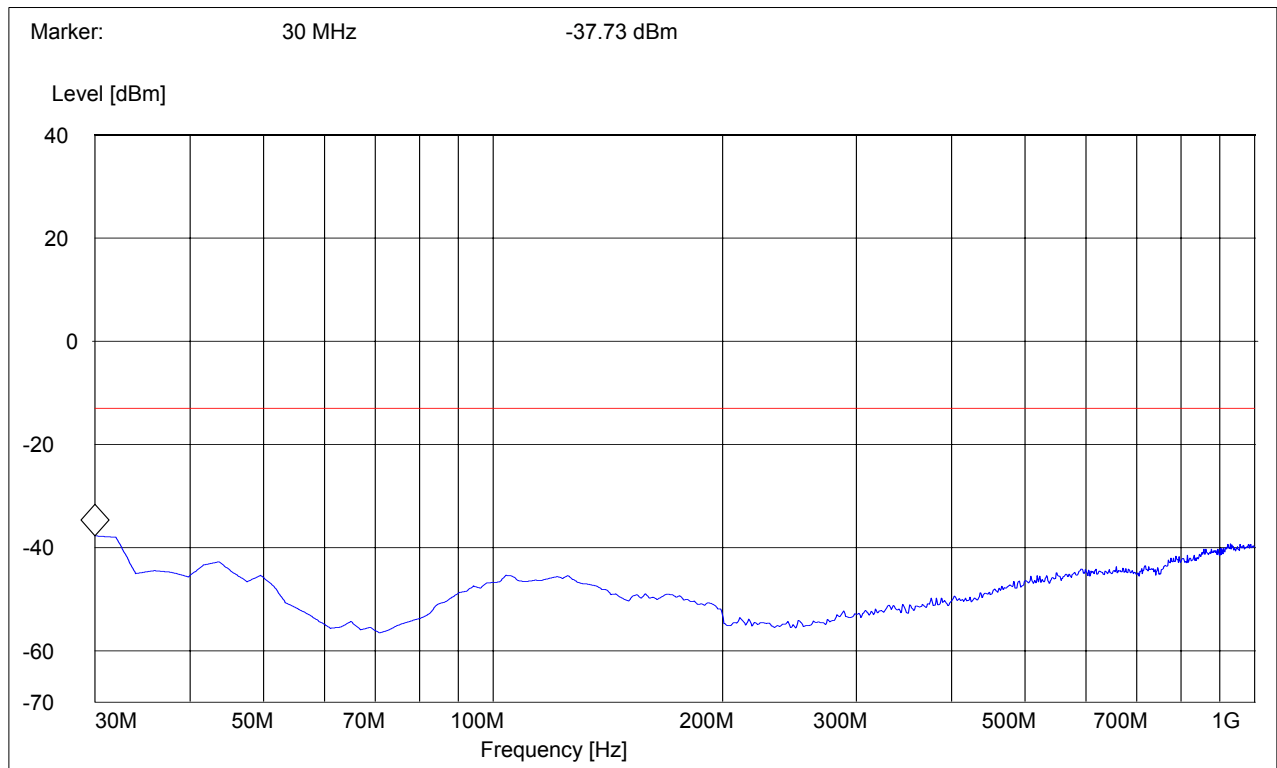


**RADIATED SPURIOUS EMISSIONS (IDLE MODE)****EUT in Idle Mode: 30MHz – 1GHz**

Spurious emission limit –13dBm

**Antenna: horizontal*****SWEEP TABLE: "FCC 22 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

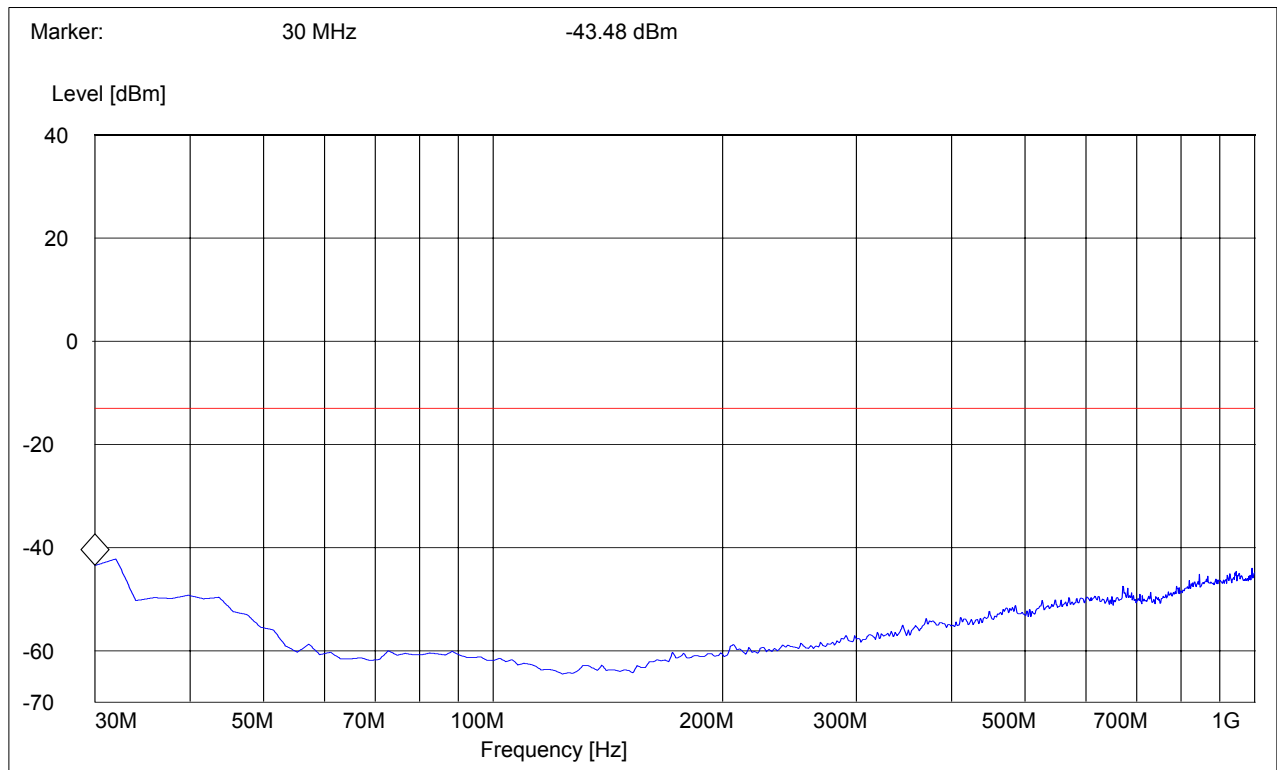




**RADIATED SPURIOUS EMISSIONS (IDLE MODE)****EUT in Idle Mode: 1GHz – 3GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

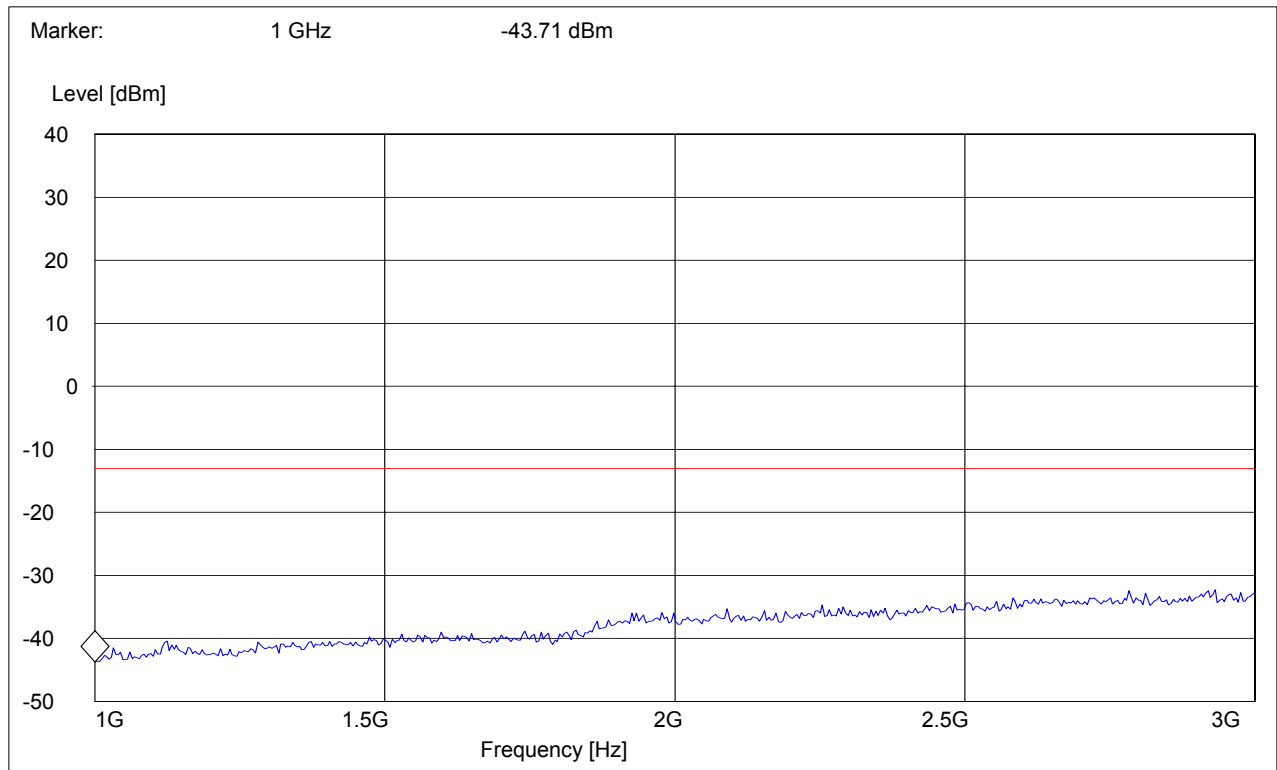


**RADIATED SPURIOUS EMISSIONS (IDLE MODE)****EUT in Idle Mode: 3GHz – 18GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 24 spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

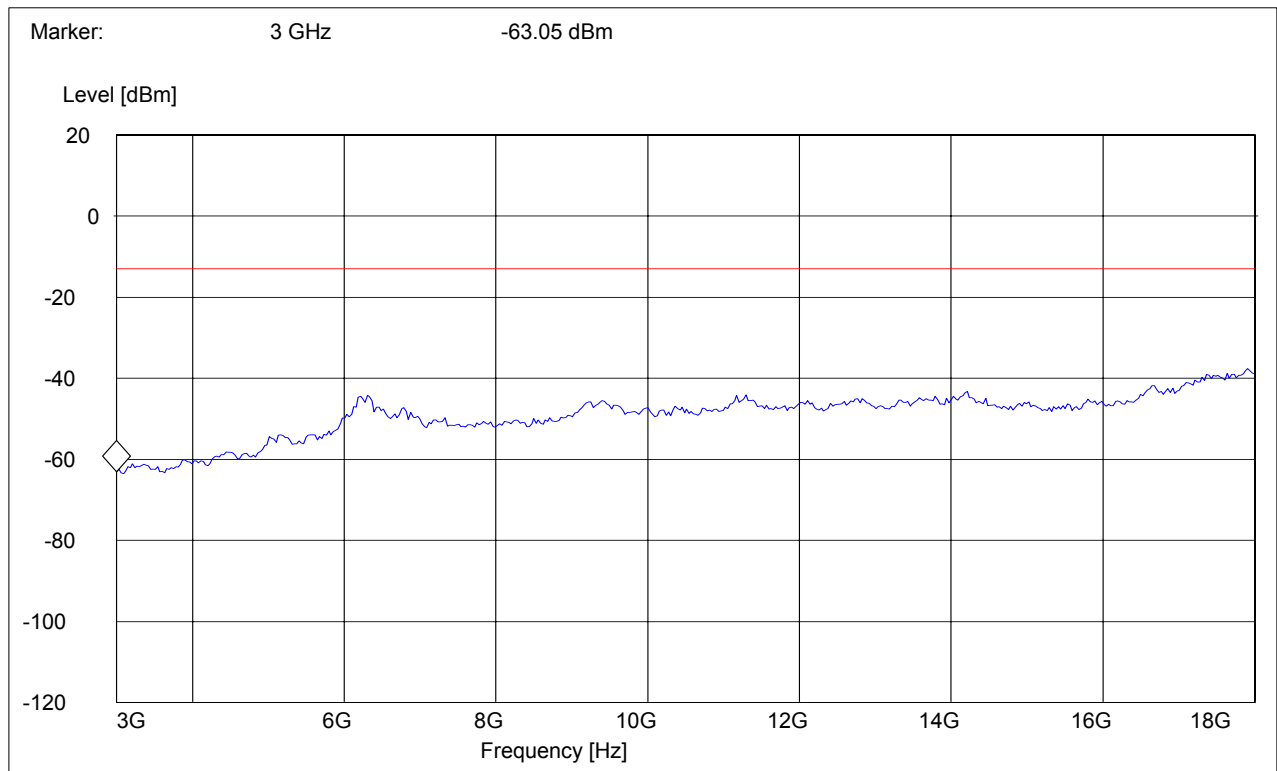


**RADIATED SPURIOUS EMISSIONS (IDLE MODE)****EUT in Idle Mode: 18GHz – 19.1GHz**

Spurious emission limit –13dBm

***SWEEP TABLE: "FCC 24 spuri 18-19.1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz	1 MHz

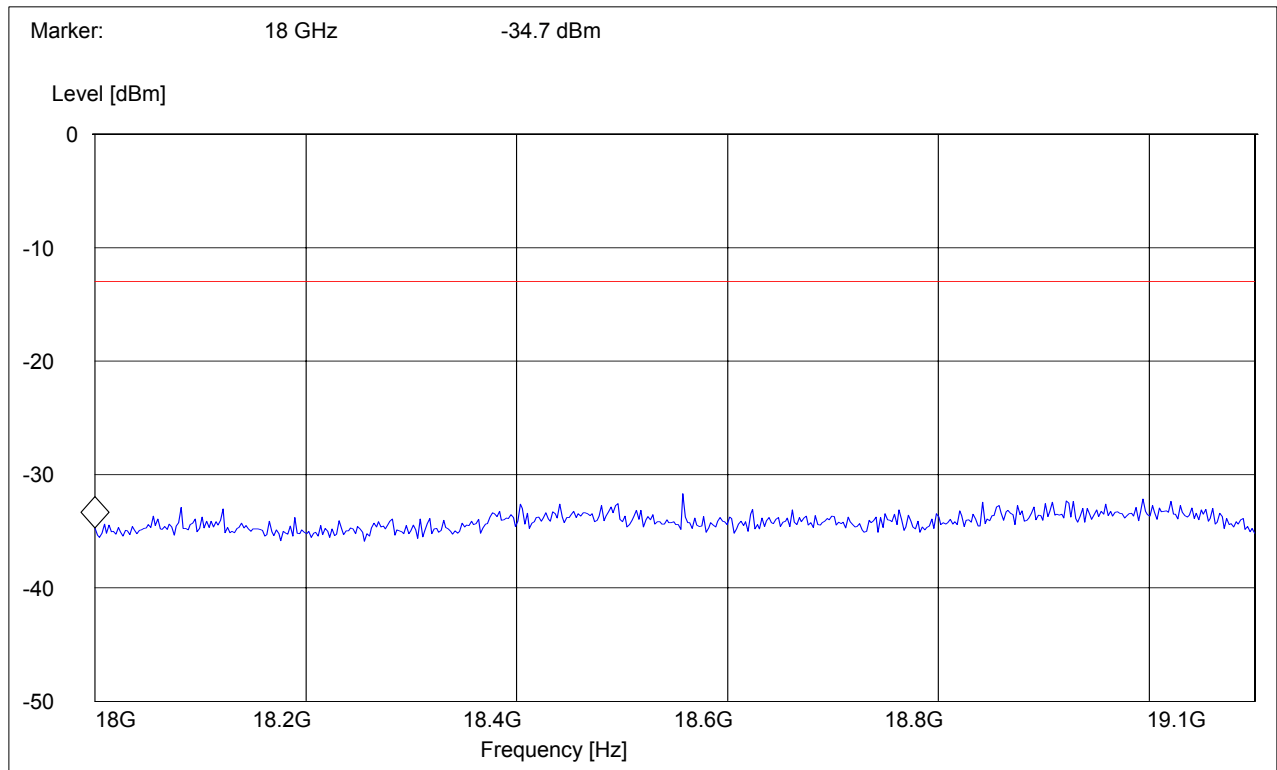

**5.6 RECEIVER RADIATED EMISSIONS****§ 2.1053 / RSS-133****NOTE:**


1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.
2. Receiver radiated emissions were done on both 850/1900 bands, but only worst-case plots are submitted in the test reports.

**Limits****SUBCLAUSE § RSS-133**

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**5.6.1 Receiver Spurious on EUT****RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 30MHz – 1GHz****Antenna: vertical****SWEEP TABLE: "FCC Spur 30M-1G"**


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

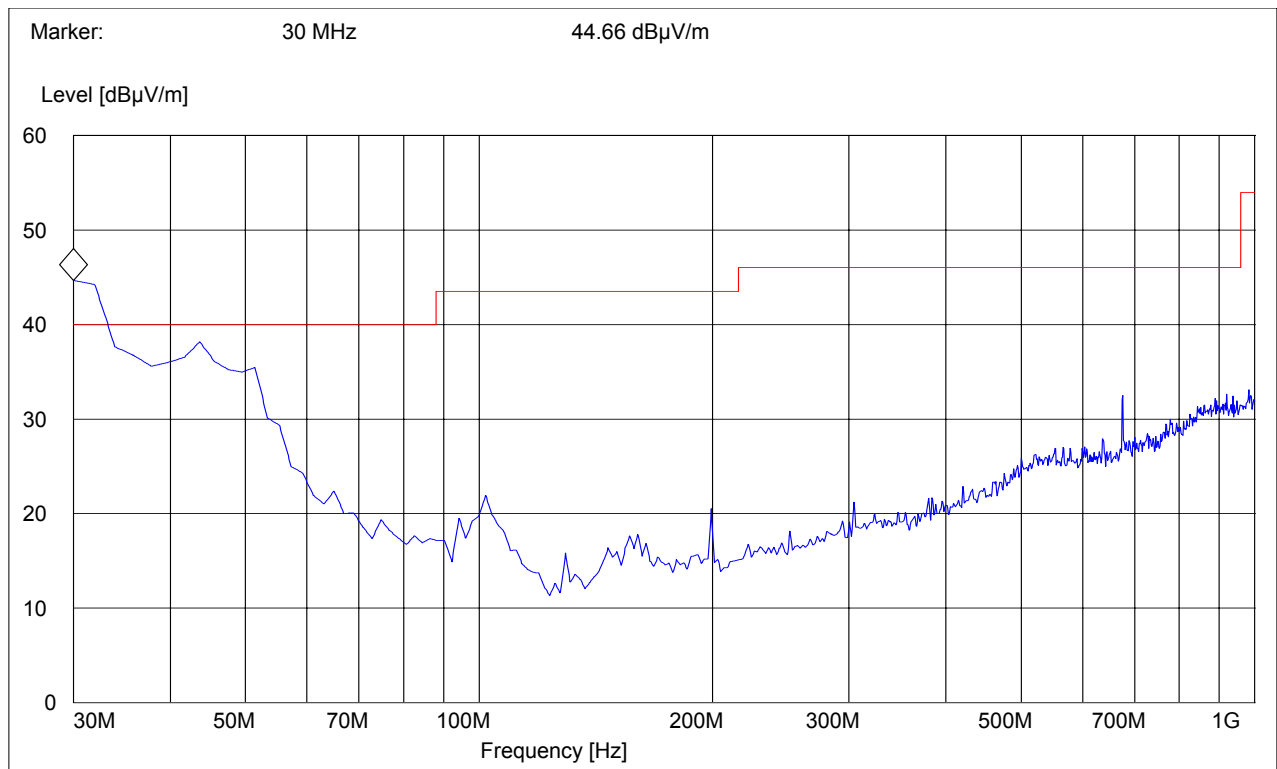

FREQUENCY (MHz)	PEAK READING (dB $\mu$ V)	QUASI-PEAK READING (dB $\mu$ V)	LIMIT (dB $\mu$ V)	MARGIN (dB)
30	44.66	39.46	40	-0.54


**RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 30MHz – 1GHz****Antenna: horizontal****SWEEP TABLE: "FCC Spur 30M-1G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

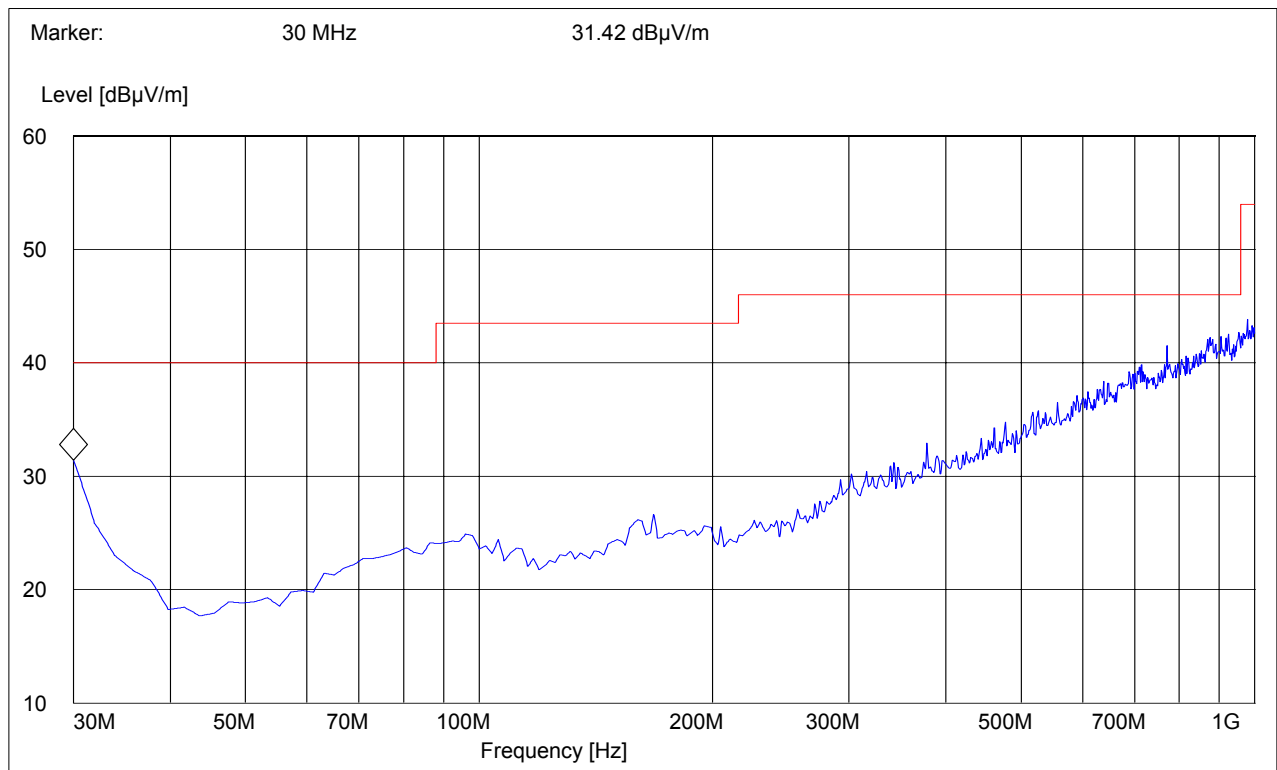

**RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 1GHz – 3GHz*****SWEEP TABLE: "FCC Spuri 1-3G"***


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

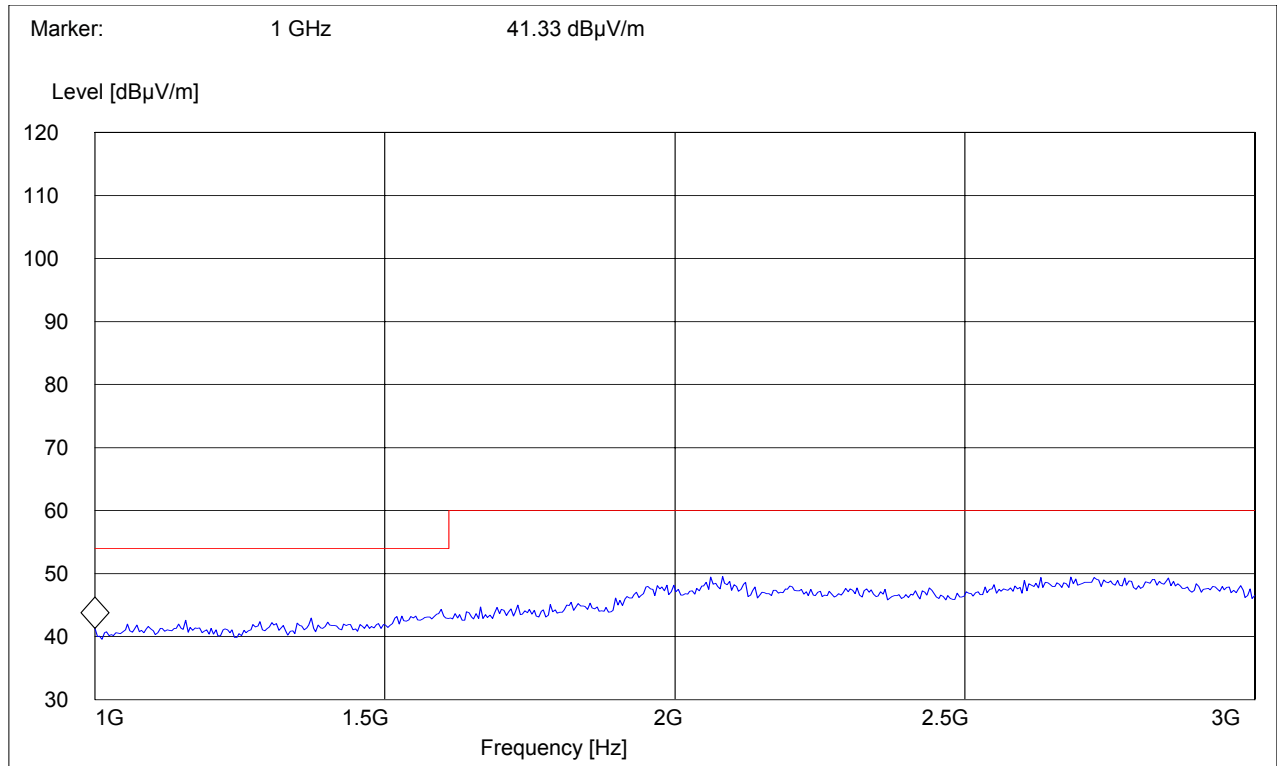

\*all peak readings are below 54dBuV.

**RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 3GHz – 18GHz*****SWEEP TABLE: "FCC spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

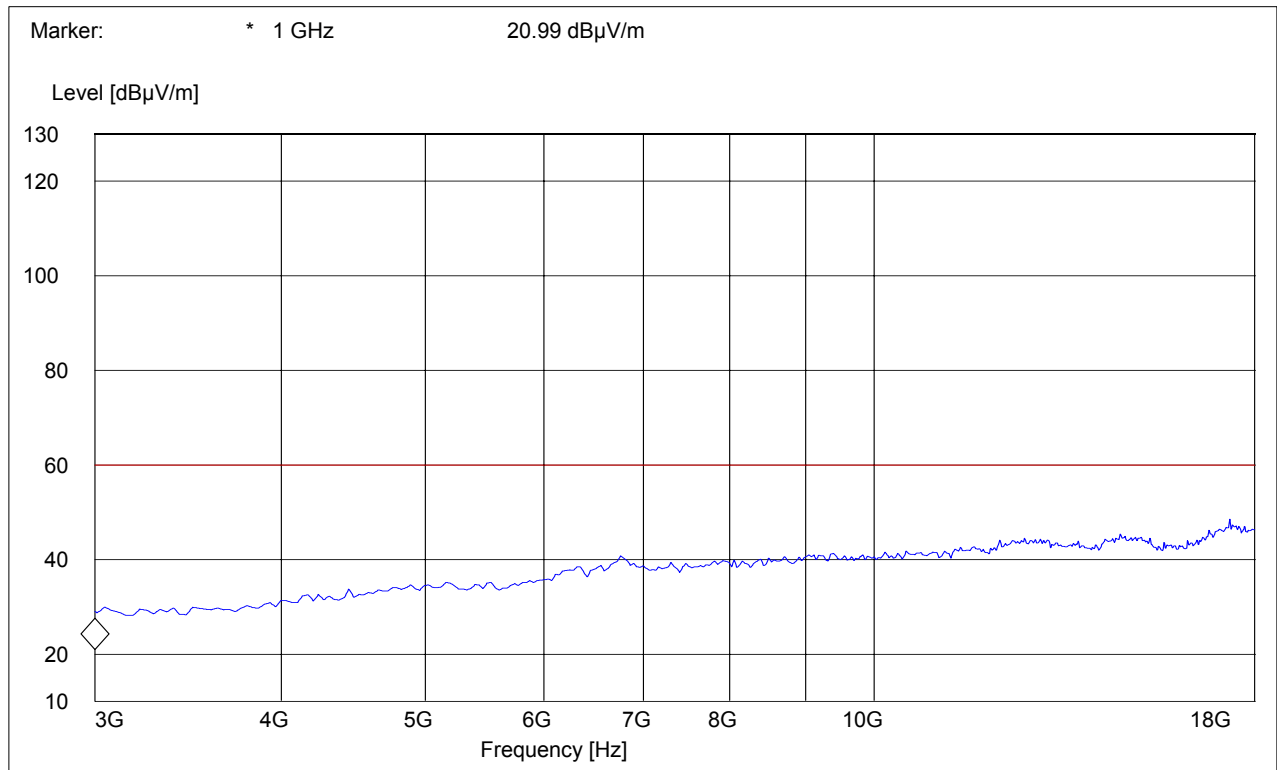


\*all peak readings are below 54dBuV.



**RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 18GHz – 19.1GHz*****SWEEP TABLE: "FCC spuri 18-19.1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz	1 MHz

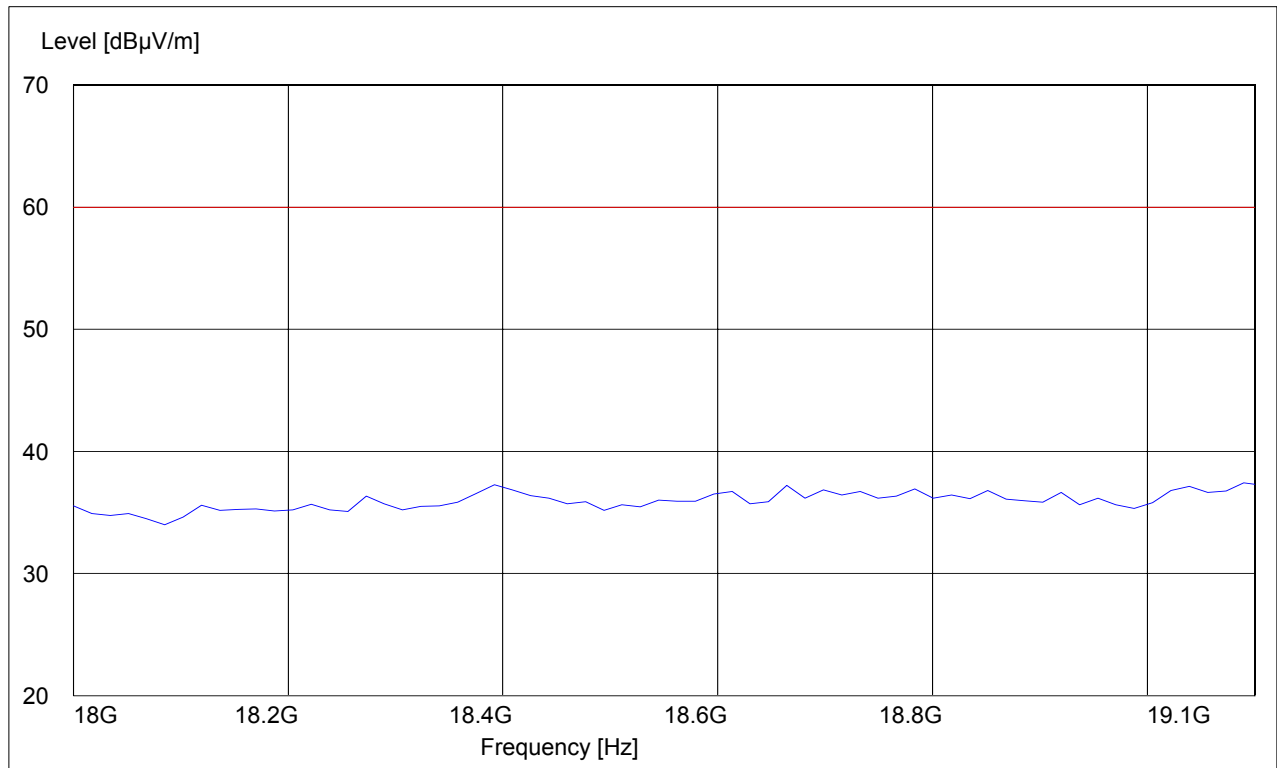

\*all peak readings are below 54dBuV

**5.7 AC POWERLINE CONDUCTED EMISSIONS § 15.107/207**

Measured with

AC/DC power adapter (travel charger: DA2-3101US-(L) model:A5BHTNOO102471)

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

**ANALYZER SETTINGS: RBW = 10KHz VBW = 10KHz**

Prescans were performed on both 850/1900 bands, full testing on the worst-case band is submitted in the test report.

**5.7.1 Results EUT**

LISN


411 Dixon Landing Road, CA 95035

EUT / Description: CF76  
Manufacturer: siemens  
Test mode: tx 850  
Test Engineer: Neelesh  
Phase: L & N  
Comment: 110 volt

Start of Test: 8/24/2005 / 11:34:38AM

SCAN TABLE: "EN 55022 Voltage"

Short Description:			EN 55022 Voltage			
Start	Stop	Step	Detector	Meas.	IF	
Transducer						
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
Average						

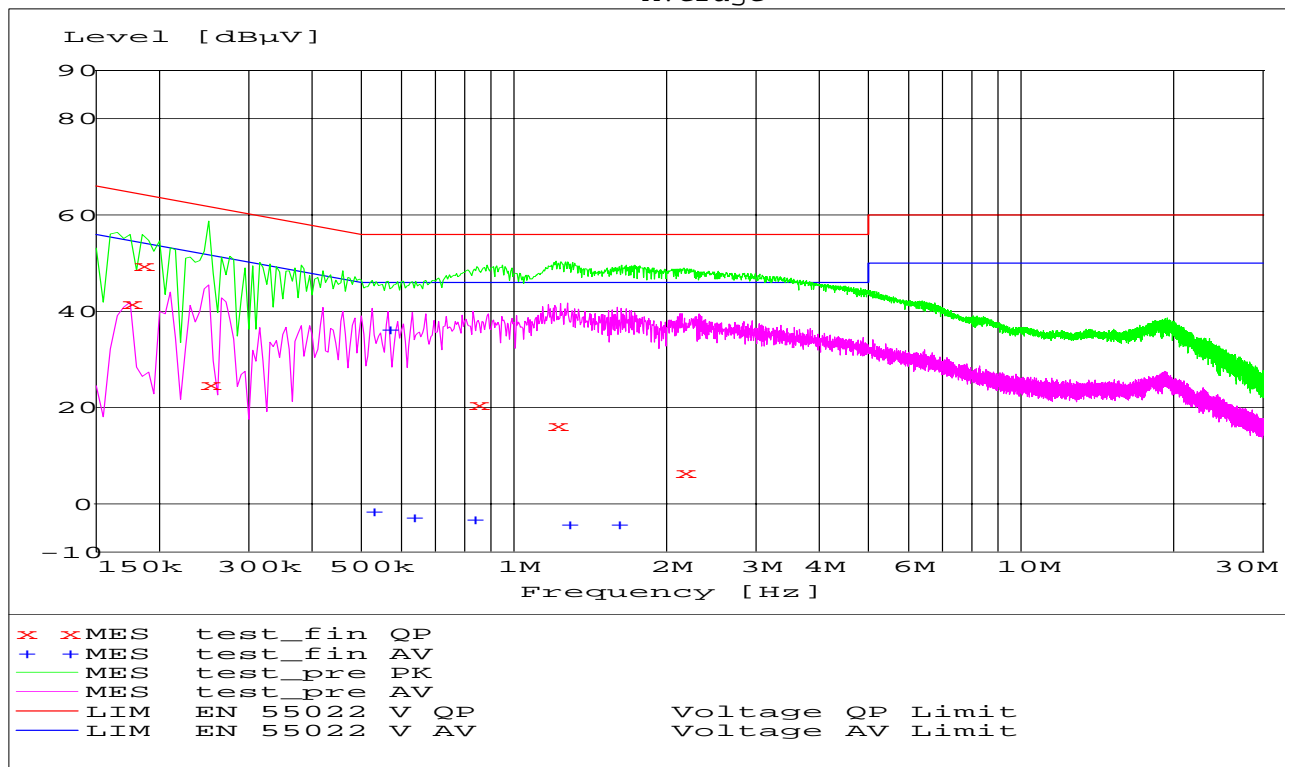

MEASUREMENT RESULT: "test\_fin QP"

8/24/2005 11:38AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.175000	41.70	0.0	65	23.0	N	GND
0.185000	49.50	0.0	64	14.8	N	GND
0.250000	24.80	0.0	62	37.0	N	GND
0.845000	20.60	0.0	56	35.4	L1	GND
1.210000	16.30	0.0	56	39.7	L1	GND
2.160000	6.50	0.0	56	49.5	N	GND

MEASUREMENT RESULT: "test\_fin AV"

8/24/2005 11:38AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.525000	-1.60	0.0	46	47.6	L1	GND
0.565000	36.30	0.0	46	9.7	L1	GND
0.630000	-2.90	0.0	46	48.9	N	GND
0.830000	-3.10	0.0	46	49.1	N	GND
1.275000	-4.30	0.0	46	50.3	N	GND
1.600000	-4.30	0.0	46	50.3	L1	GND

## **6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

<b>No</b>	<b>Instrument/Ancillary</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Serial No.</b>
<b>01</b>	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
<b>02</b>	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
<b>03</b>	Signal Generator	SMY02	Rohde & Schwarz	836878/011
<b>04</b>	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
<b>05</b>	Biconilog Antenna	3141	EMCO	0005-1186
<b>06</b>	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325
<b>07</b>	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
<b>08</b>	Power Splitter	11667B	Hewlett Packard	645348
<b>09</b>	Climatic Chamber	VT4004	Voltsch	G1115
<b>10</b>	High Pass Filter	5HC2700	Trilithic Inc.	9926013
<b>11</b>	High Pass Filter	4HC1600	Trilithic Inc.	9922307
<b>12</b>	Pre-Amplifier	JS4-00102600	Miteq	00616
<b>13</b>	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807
<b>14</b>	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008
<b>15</b>	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06

## **7 References**

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,  
PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,  
PART 22 PUBLIC MOBILE SERVICES October 1, 1998.

FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,  
PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-B-2003 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.