


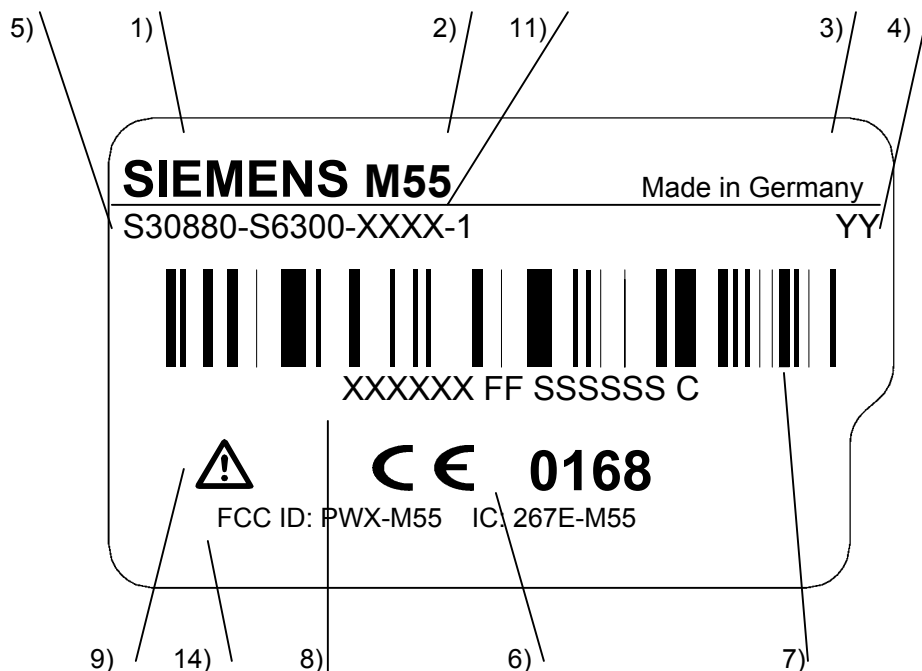

XXXXXX Typ-Approval Code TAC
 FF Final-Assembly Code FAC
 SSSSSS Current serial number (6 digits), Assigned by PICS10
 C CHECK DIGIT 15. digit
 space between TAC, FAC, serial no. and 15.digit

- Ink ribbon: TTR-Band Ricoh 110-C
- Font: Title blocks concentric
- 1) Corporate logo: 1.5 SN 66324
- 2) Product name: Internal font D, size 4
- 3) Made xx XXXXXXXX Bitmap
- 4) Code of date: Internal font D, size 4
 e.g. F3 — March
 L—1995
- 5) Code number: Internal font D, size 4
- 6) CE- identification: Height: 5 mm
 according to BABT-Document 556 26/93
- 7) Barcode IMEI-No.: Code: 128 Size: 2 Ratio: 3.0 Height: 3 mm
 Typ 128, table **C** and **B**
Characteristic: IMEI-No. has 15 digits
 Digit 1-14 is generated as Barcode with table **C**.
 Digit 15 is printed with table **B**.
- 8) IMEI-No. (plain writing): Internal font D, size 4, space between TAC, FAC, serial no. and 15.digit
- 9) Triangle: Height: 4 mm
- 10) Document for IMEI-No. allocation: **DIS xxxxx BOM 000 xx**
 Valid is the highest level in the system
- 11) Code number: Corresponding to the number of the transceiver unit part list
- 14) Canada IC and US FCC font: B3

				Date	13.02.2003	Approval label Standard IMEI-Label/M55	
				Name	Buttermann		
				UC RD ED KLF			
1		13.02.03	Bu	SIEMENS AG		LETTERING PLAN	
Version		Date	Token			DIS 26669	Page 1
							From 1