
Appendix for the Report

Dosimetric Assessment of the Siemens ME75 (FCC ID: PWX-ME75)

According to the FCC Requirements

SAR Distribution Plots

October 07, 2005
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
Siemens Communication Inc.
16475 West Bernado Drive, Suite 400
San Diego CA 92127

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD WITHOUT FLASH	3
2	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD WITH FLASH.....	7
3	SAR DISTRIBUTION PLOTS, PCS 1900 BODY IN GSM MODE.....	11
4	SAR DISTRIBUTION PLOTS, PCS 1900 BODY IN GPRS MODE.....	13
5	SAR Z-AXIS SCANS (VALIDATION)	15
6	SAR Z-AXIS SCANS (MEASUREMENTS).....	16

1 SAR Distribution Plots, PCS 1900 Head without flash

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [480bplm_1_ohne.da4](#)

DUT: Siemens; Type: ME75 ; Serial: 004400015156480

Program Name: Cheek Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Cheek Left/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.654 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.355 mW/g

Maximum value of SAR (measured) = 0.677 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.540 W/kg

SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.191 mW/g

Maximum value of SAR (measured) = 0.388 mW/g

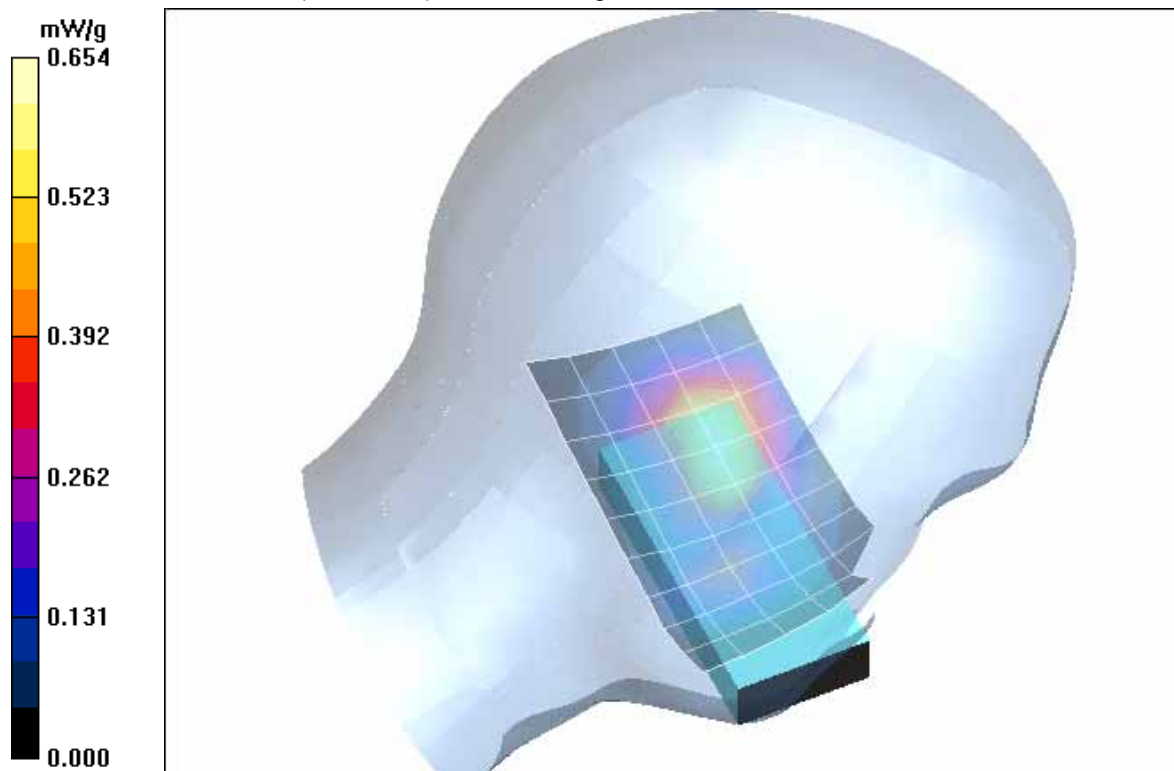


Fig. 1: SAR distribution for PCS 1900, channel 661, cheek position, left side of head (October 04, 2005; Ambient Temperature: 21.2°C; Liquid Temperature: 20.4°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [480bplm 2 ohne.da4](#)

DUT: Siemens; Type: ME75 ; Serial: 004400015156480

Program Name: Tilted Left

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Tilted Left/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.535 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.7 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.851 W/kg

SAR(1 g) = 0.505 mW/g; SAR(10 g) = 0.285 mW/g

Maximum value of SAR (measured) = 0.565 mW/g

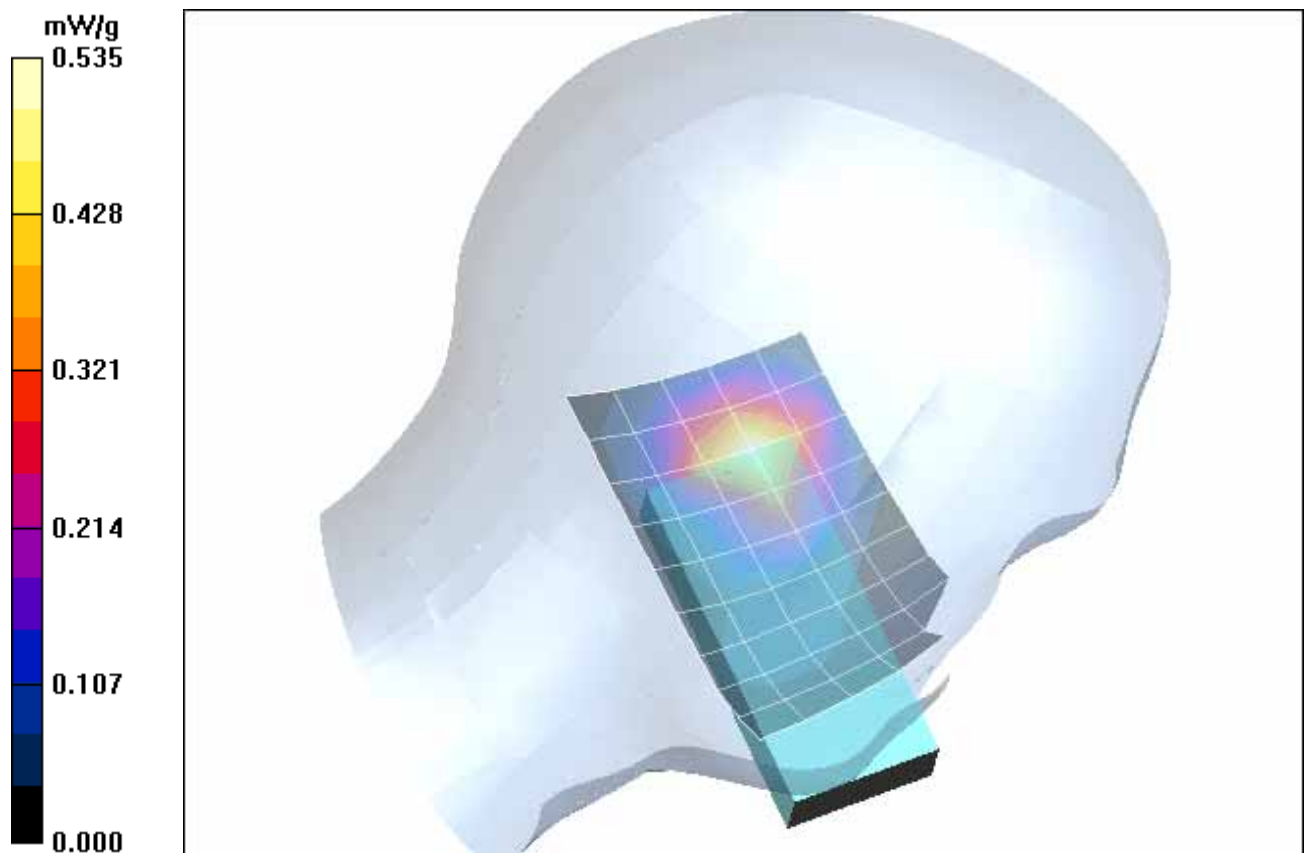


Fig. 2: SAR distribution for PCS 1900, channel 661, tilted position, left side of head (October 04, 2005; Ambient Temperature: 21.3°C; Liquid Temperature: 20.4°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [480bprm 1 ohne.da4](#)

DUT: Siemens; Type: ME75 ; Serial: 004400015156480

Program Name: Cheek Right

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Cheek Right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.456 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.476 mW/g

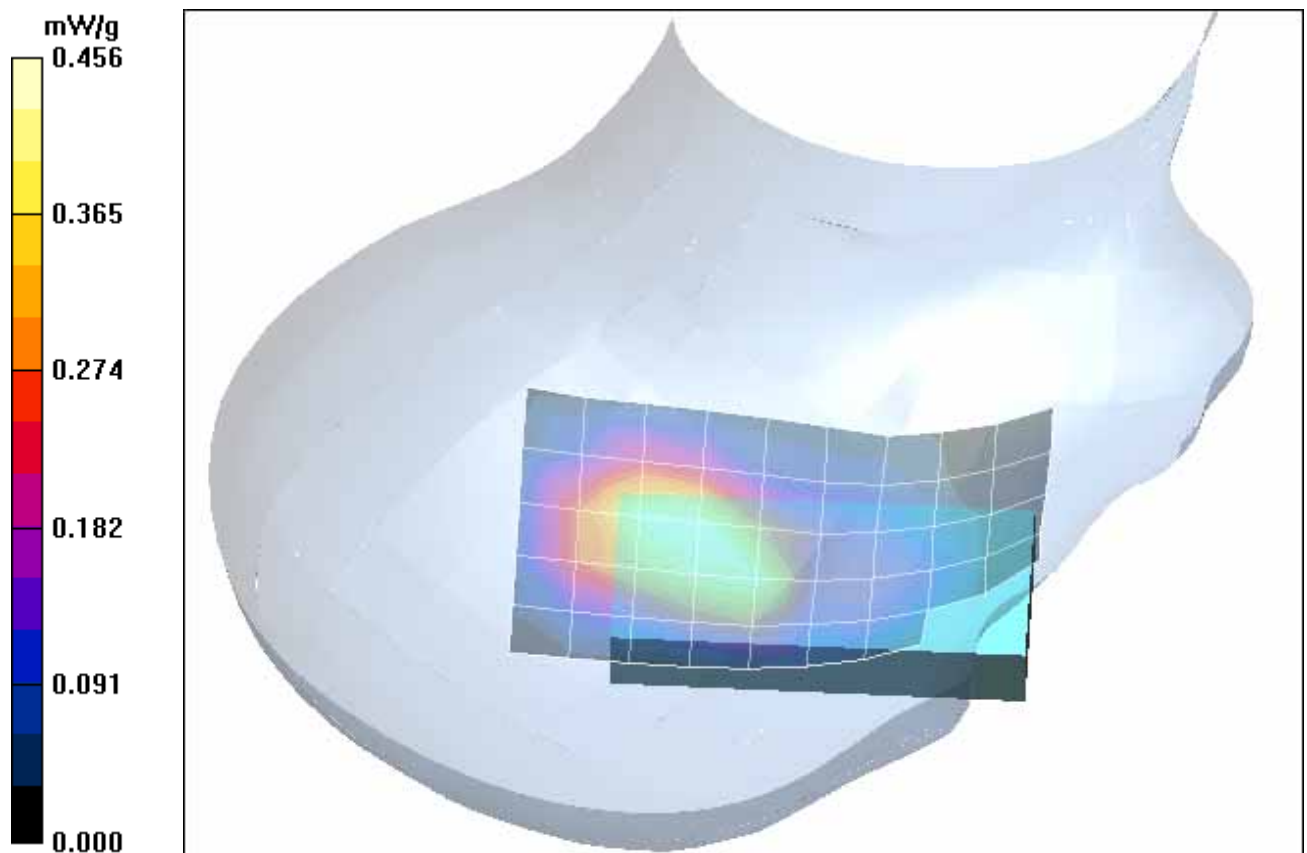


Fig. 3: SAR distribution for PCS 1900, channel 661, cheek position, right side of head (October 04, 2005; Ambient Temperature: 21.3°C; Liquid Temperature: 20.5°C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [480bprm 2 ohne.da4](#)

DUT: Siemens; **Type:** ME75 ; **Serial:** 004400015156480

Program Name: Tilted Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Tilted Right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.445 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.238 mW/g

Maximum value of SAR (measured) = 0.469 mW/g

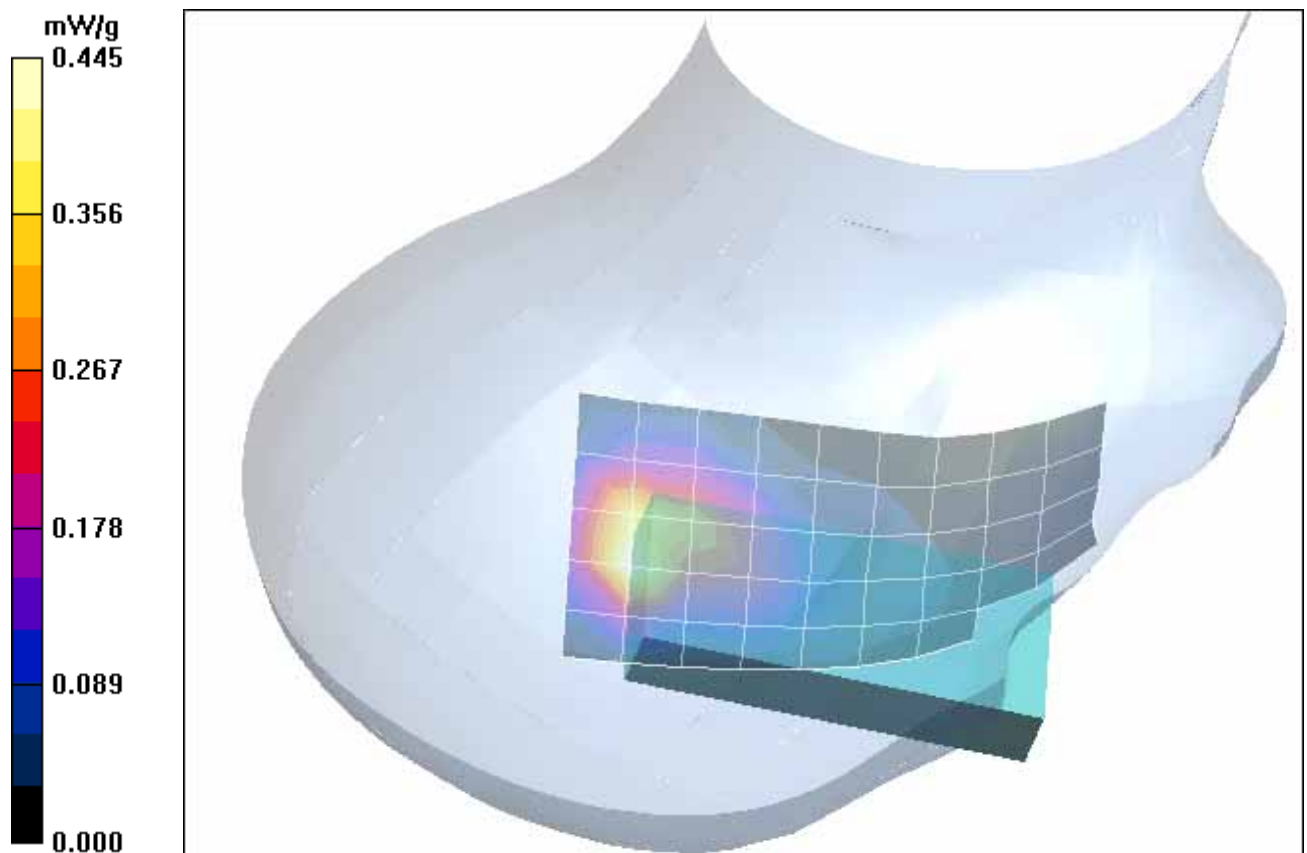


Fig. 4: SAR distribution for PCS 1900, channel 661, tilted position, right side of head (October 04, 2005; Ambient Temperature: 21.2 °C; Liquid Temperature: 20.5°C)

2 SAR Distribution Plots, PCS 1900 Head with flash

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [480bplm_1_flash.da4](#)

DUT: Siemens; Type: ME75 ; Serial: 004400015156480

Program Name: Cheek Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Cheek Left/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.492 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.6 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.474 mW/g; SAR(10 g) = 0.287 mW/g

Maximum value of SAR (measured) = 0.523 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.6 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.264 mW/g; SAR(10 g) = 0.156 mW/g

Maximum value of SAR (measured) = 0.323 mW/g

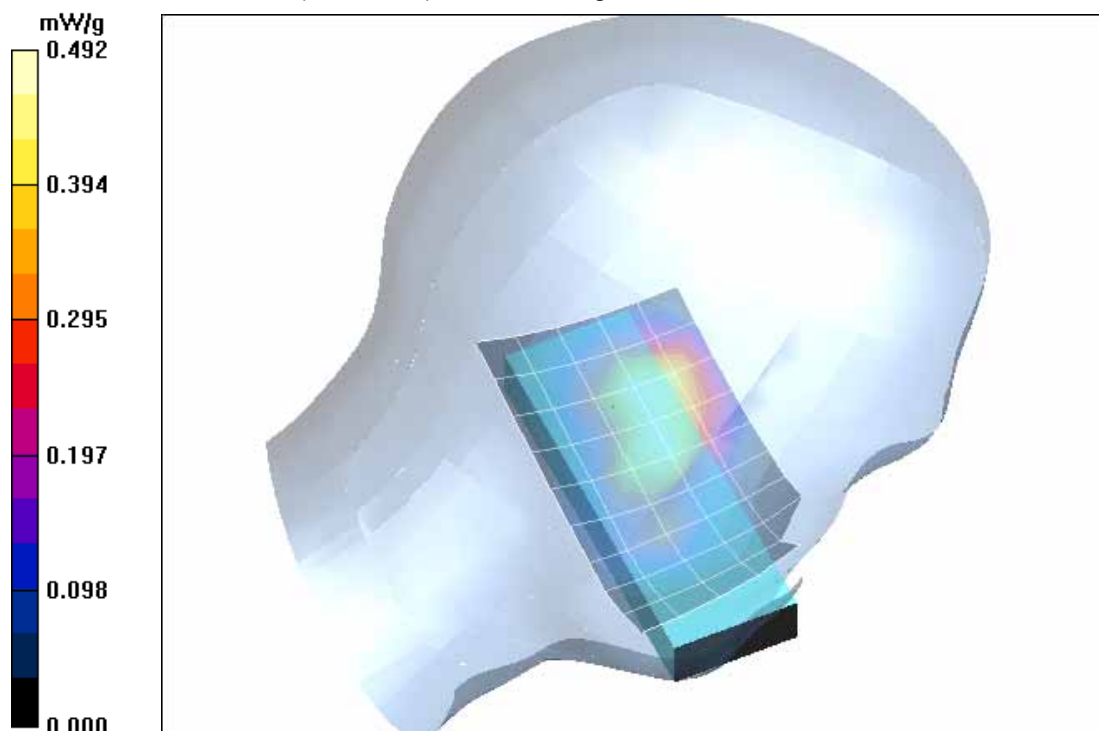


Fig. 5: SAR distribution for PCS 1900, channel 661, cheek position, left side of head (October 04, 2005; Ambient Temperature: 21.1°C; Liquid Temperature: 20.5°C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [480bplm 2 flash.da4](#)

DUT: Siemens; **Type:** ME75 ; **Serial:** 004400015156480

Program Name: Tilted Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Tilted Left/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.478 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.791 W/kg

SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.260 mW/g

Maximum value of SAR (measured) = 0.510 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.266 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.315 mW/g

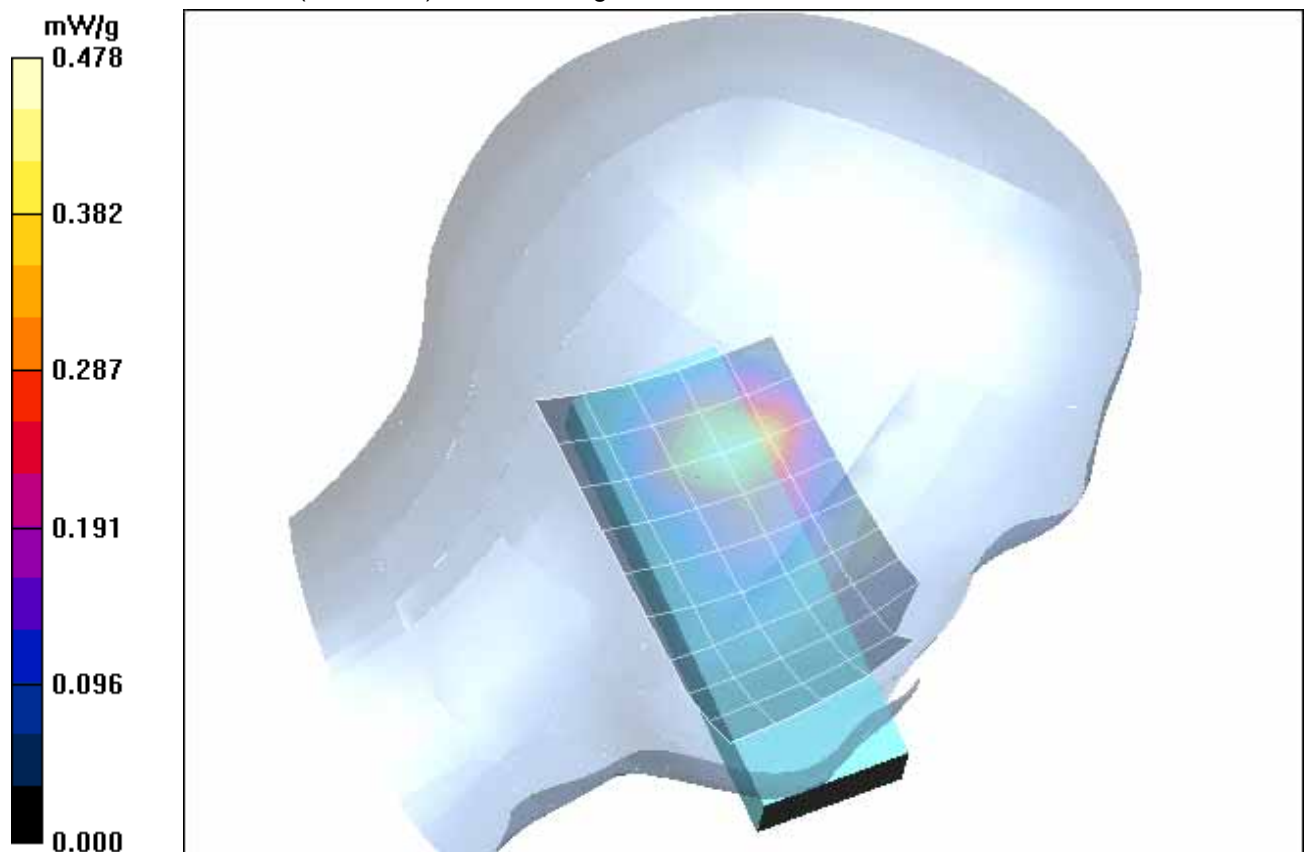


Fig. 6: SAR distribution for PCS 1900, channel 661, tilted position, left side of head (October 04, 2005; Ambient Temperature: 21.0°C; Liquid Temperature: 20.3°C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [480bprm 1 flash.da4](#)

DUT: Siemens; **Type:** ME75 ; **Serial:** 004400015156480

Program Name: Cheek Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Cheek Right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.498 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.719 W/kg

SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.294 mW/g

Maximum value of SAR (measured) = 0.557 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.639 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.261 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

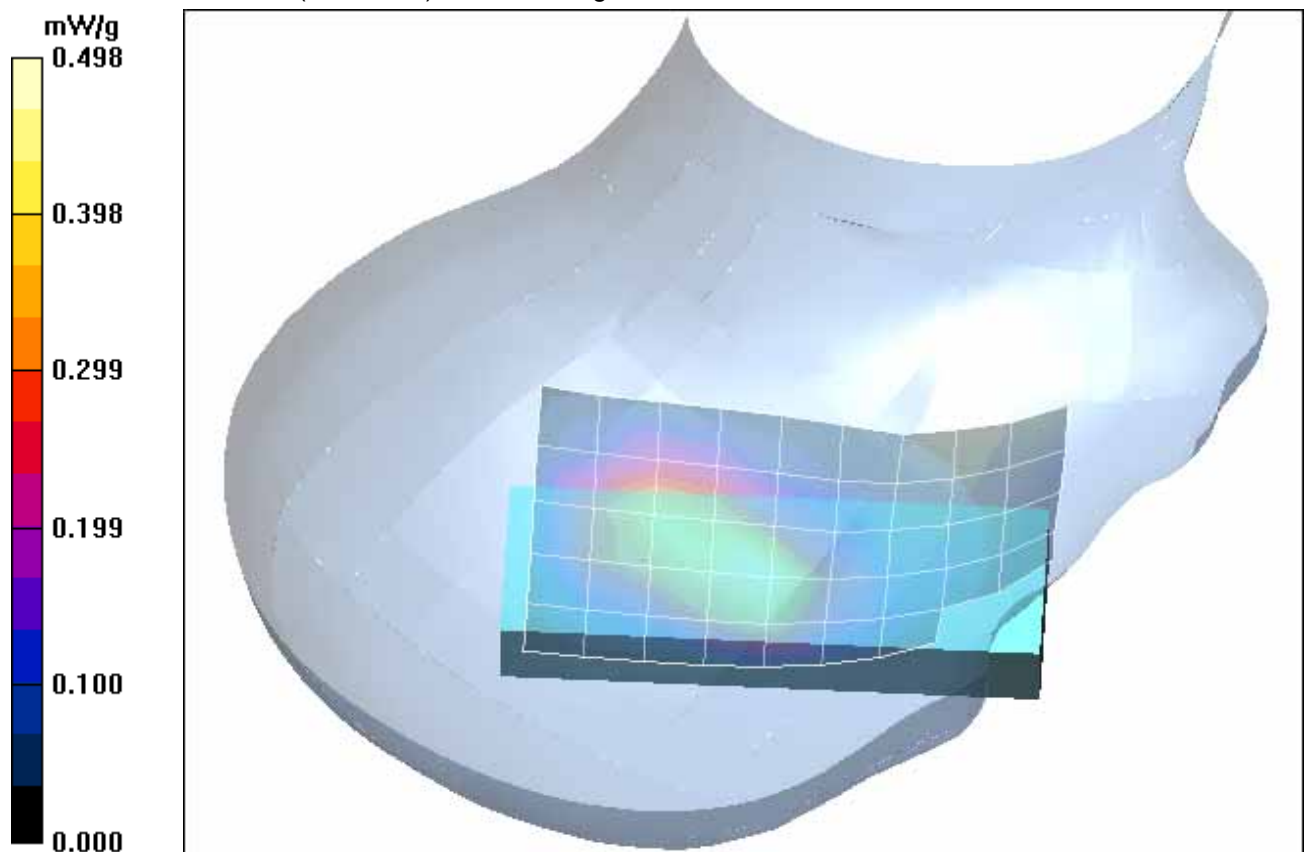


Fig. 7: SAR distribution for PCS 1900, channel 661, cheek position, right side of head (October 04, 2005; Ambient Temperature: 21.0°C; Liquid Temperature: 20.3°C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [480bprm 2 flash.da4](#)

DUT: Siemens; **Type:** ME75 ; **Serial:** 004400015156480

Program Name: Tilted Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(5.11, 5.11, 5.11); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Tilted Right/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.409 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.640 W/kg

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.219 mW/g

Maximum value of SAR (measured) = 0.431 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.443 W/kg

SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.324 mW/g

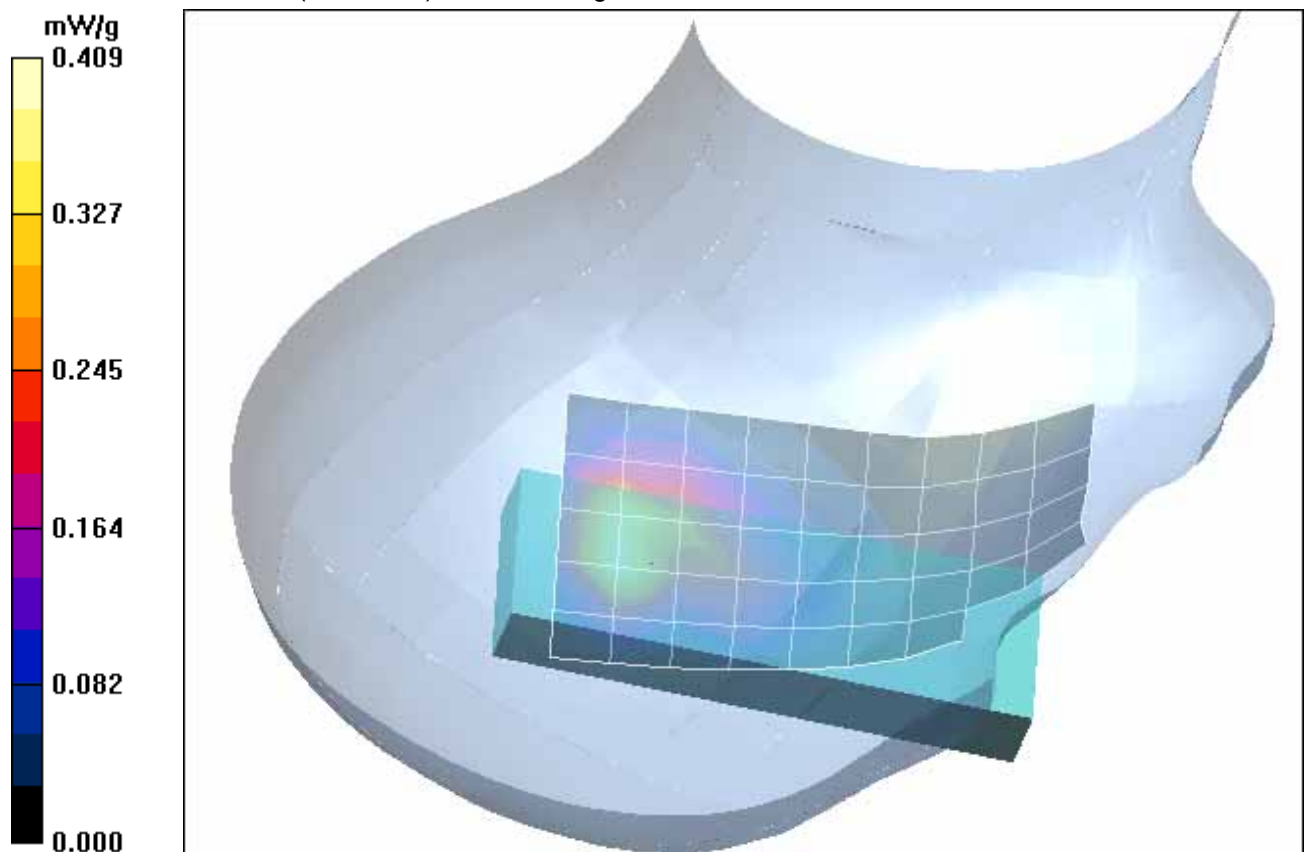


Fig. 8: SAR distribution for PCS 1900, channel 661, tilted position, right side of head (October 04, 2005; Ambient Temperature: 21.0 °C; Liquid Temperature: 20.3°C)

3 SAR Distribution Plots, PCS 1900 Body in GSM mode

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [480bphm_9_ohne_20mm.da4](#)

DUT: Siemens; Type: ME75 ; Serial: 004400015156480

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.397 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.81 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.222 mW/g

Maximum value of SAR (measured) = 0.405 mW/g

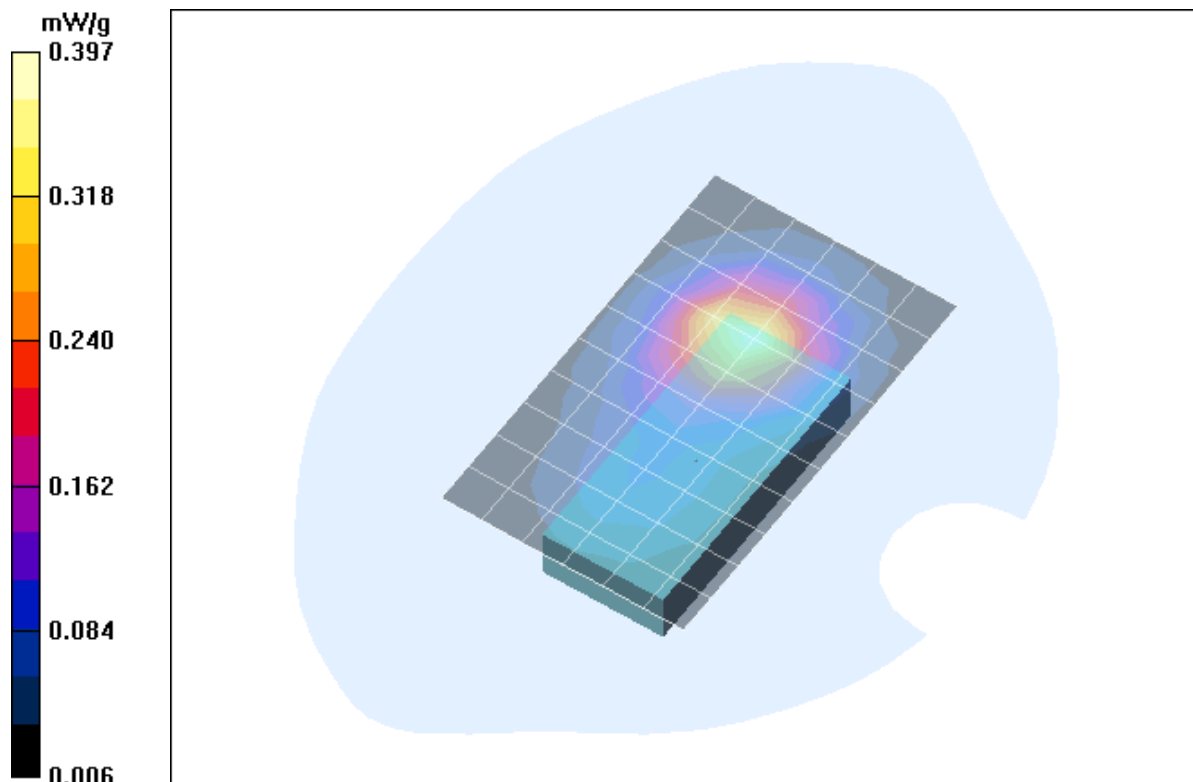


Fig. 9: SAR distribution for PCS 1900, channel 661, body worn configuration, antenna towards the phantom, without accessory, 20mm distance (October 05, 2005; Ambient Temperature: 21.5° C; Liquid Temperature: 20.8° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [480bphm_10_headset_20mm.da4](#)

DUT: Siemens; Type: ME75 ; Serial: 004400015156480

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.416 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.60 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.421 mW/g

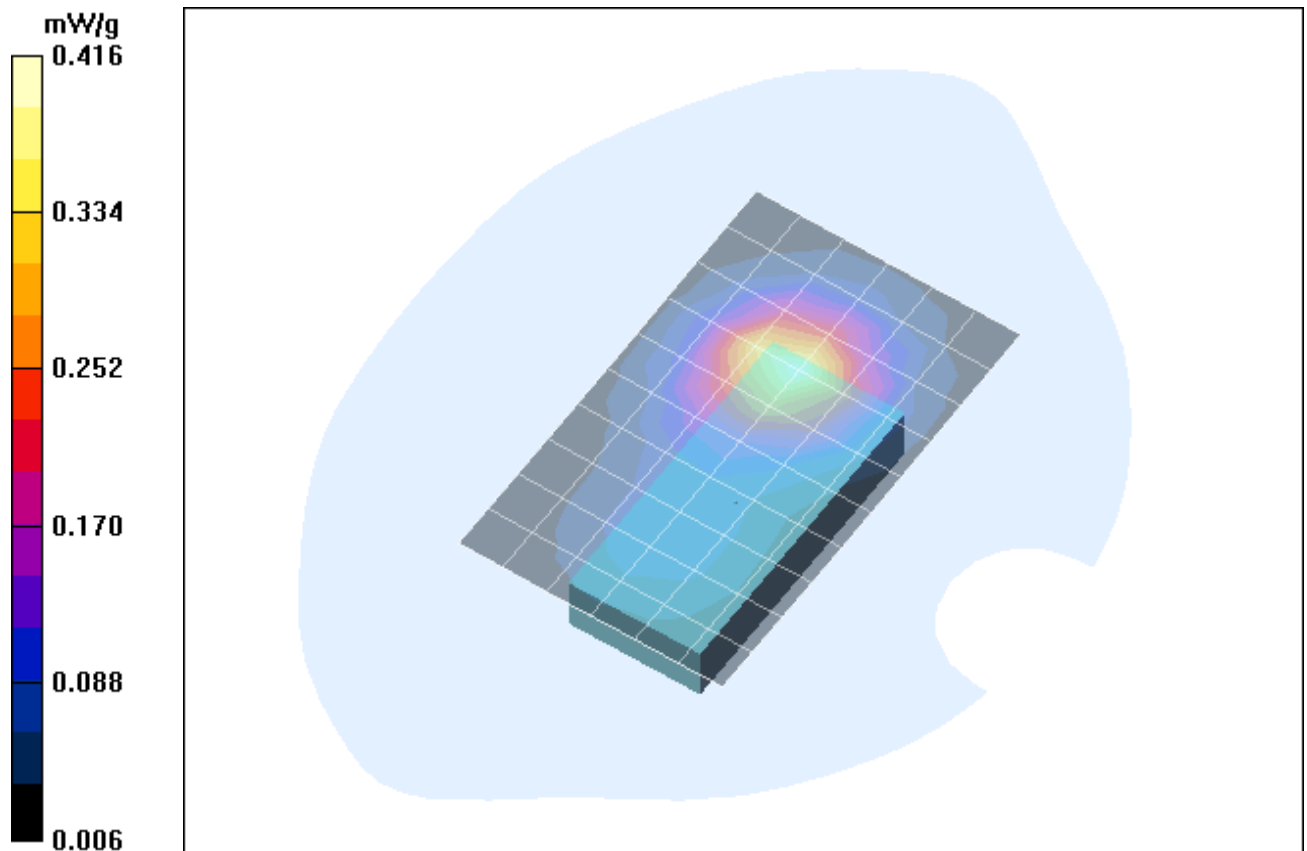


Fig. 10: SAR distribution for PCS 1900, channel 661, body worn configuration, antenna towards the phantom, with headset, 20mm distance (October 05, 2005; Ambient Temperature: 21.5° C; Liquid Temperature: 20.8° C).

4 SAR Distribution Plots, PCS 1900 Body in GPRS mode

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [480bphm_7.da4](#)

DUT: Siemens; Type: ME75 ; Serial: 004400015156480

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.629 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.674 mW/g; SAR(10 g) = 0.402 mW/g

Maximum value of SAR (measured) = 0.732 mW/g

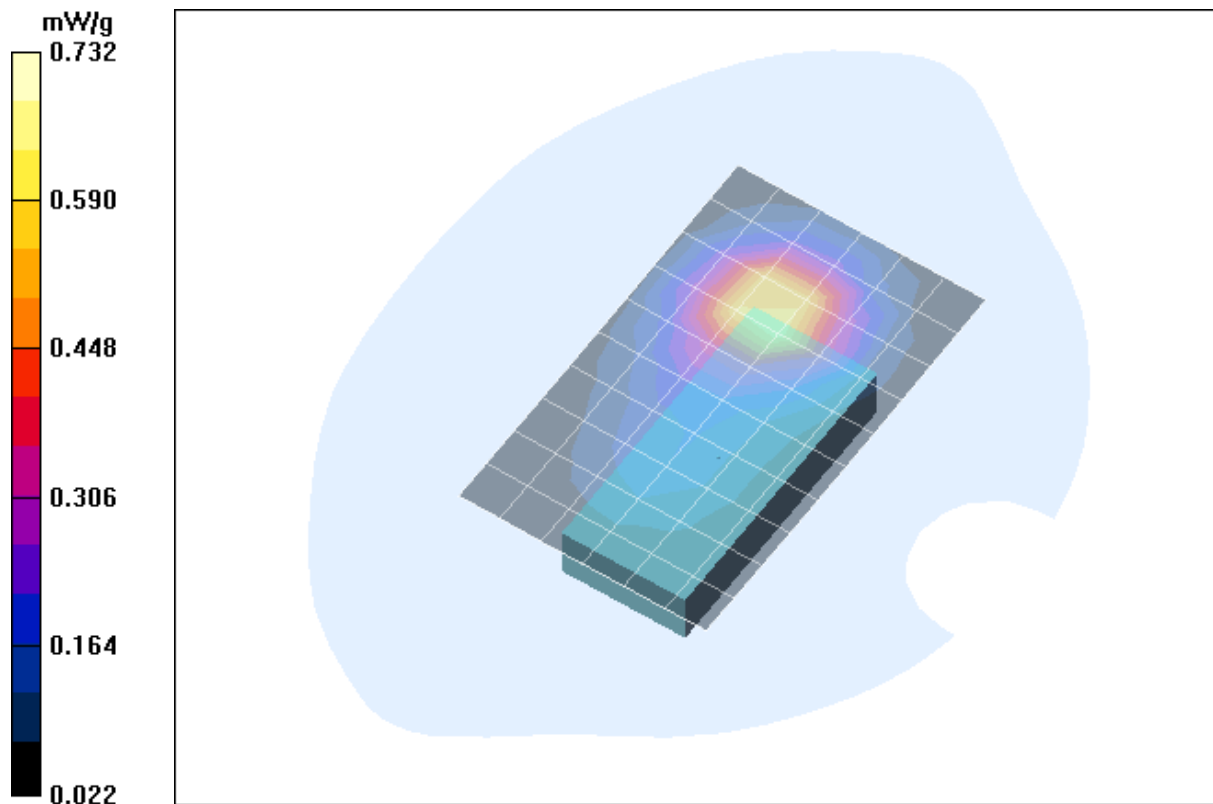


Fig. 11: SAR distribution for GPRS 1900 (Class 10), channel 661, body worn configuration, antenna towards the phantom, without accessory, 20mm distance (October 05, 2005; Ambient Temperature: 21.6°C; Liquid Temperature: 20.8°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [480bphm_8.da4](#)

DUT: Siemens; Type: ME75 ; Serial: 004400015156480

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz;Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.673 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.752 mW/g; SAR(10 g) = 0.443 mW/g

Maximum value of SAR (measured) = 0.833 mW/g

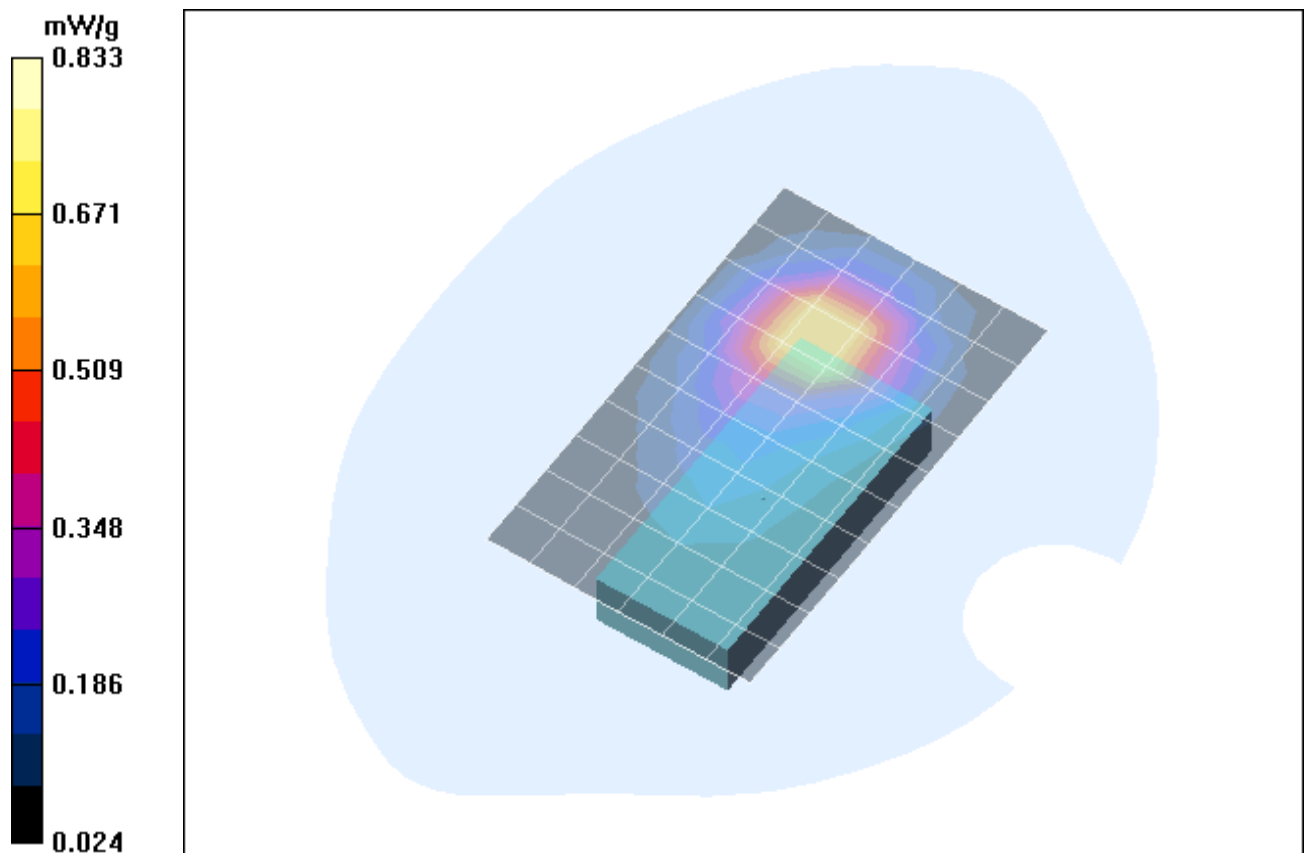


Fig. 12: SAR distribution for GPRS 1900 (Class 10), channel 661, body worn configuration, antenna towards the phantom, with data cable, 20mm distance (October 05, 2005; Ambient Temperature: 21.5°C; Liquid Temperature: 20.8°C).

5 SAR z-axis scans (Validation)

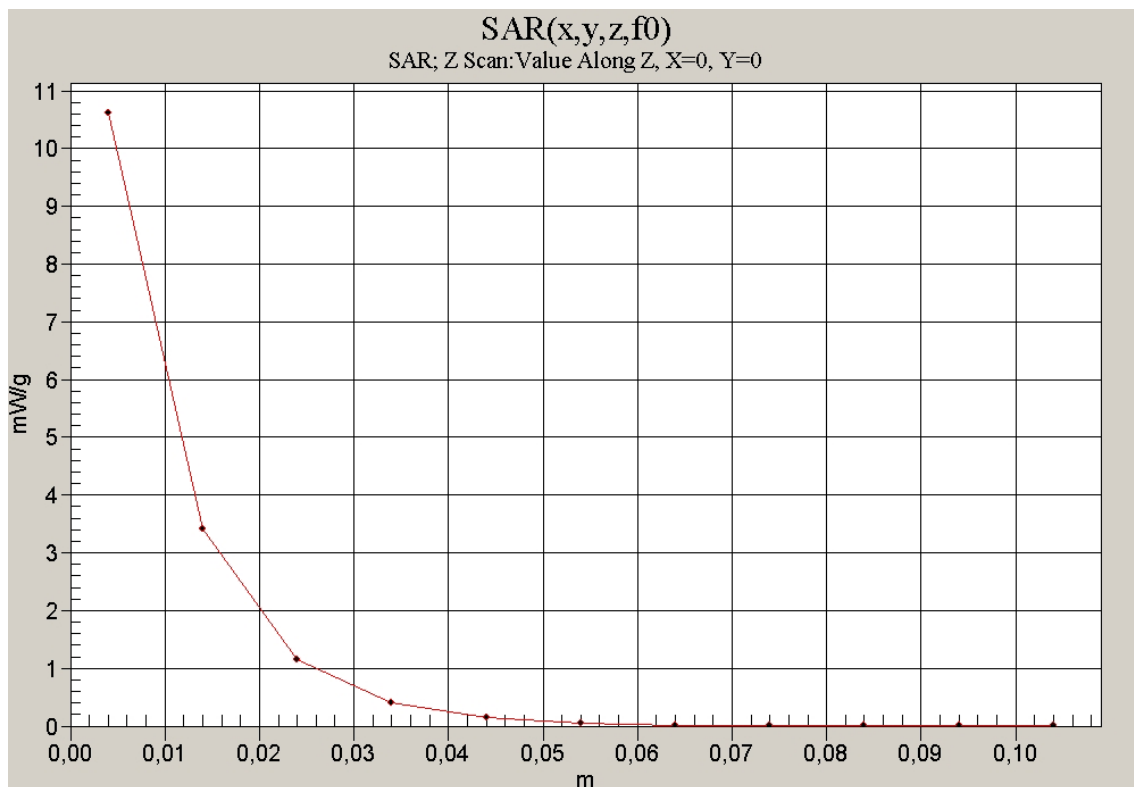


Fig. 13: SAR versus liquid depth, 1900 MHz, head (October 04, 2005; Ambient Temperature: 21.2° C; Liquid Temperature : 20.6° C).

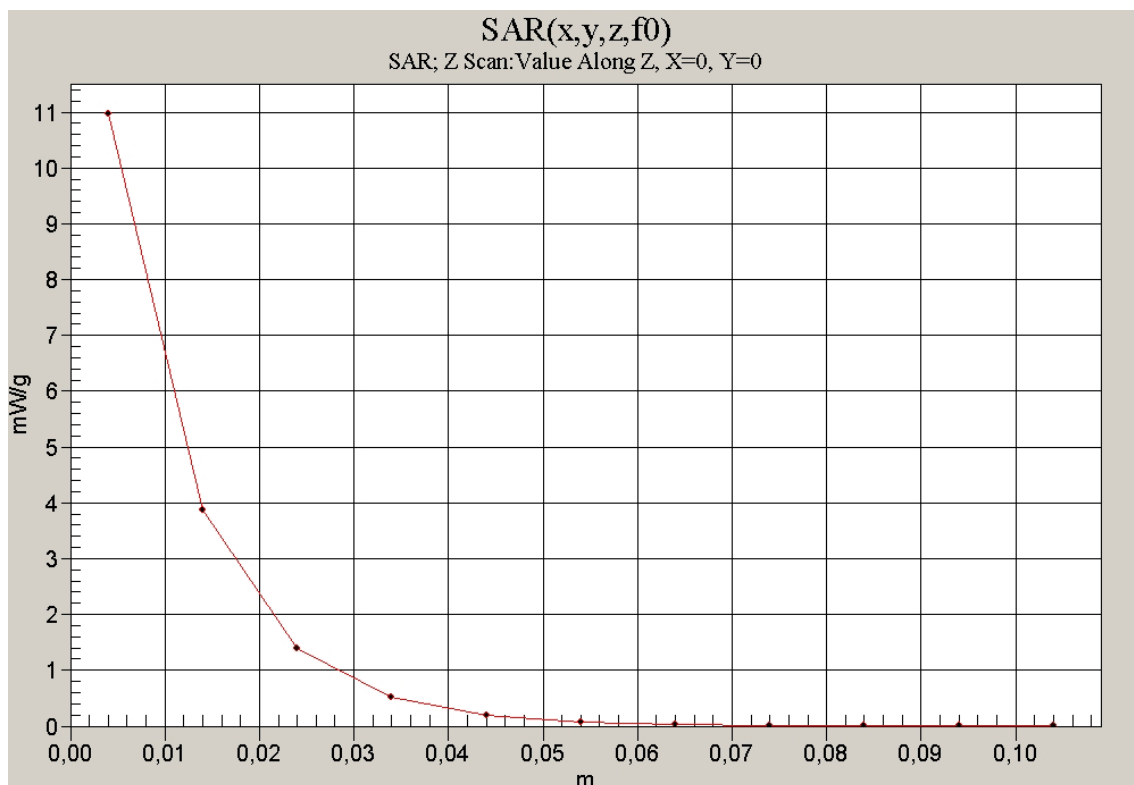


Fig. 14: SAR versus liquid depth, 1900 MHz, body (October 05, 2005; Ambient Temperature: 21.5° C; Liquid Temperature : 20.8° C).

6 SAR z-axis scans (Measurements)

The following pictures show the plots of SAR versus liquid depth for the worst case values.

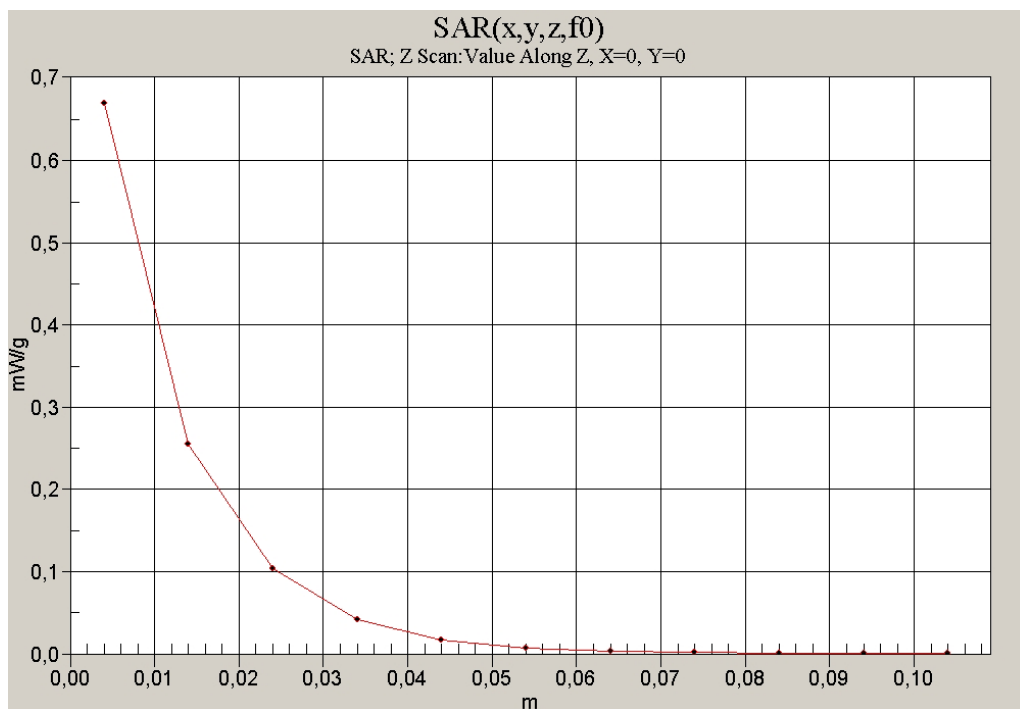


Fig. 15: SAR versus liquid depth, head: PCS 1900, channel 661, cheek position, left side of head (October 04, 2005; Ambient Temperature: 21.2°C; Liquid Temperature : 20.4°C).

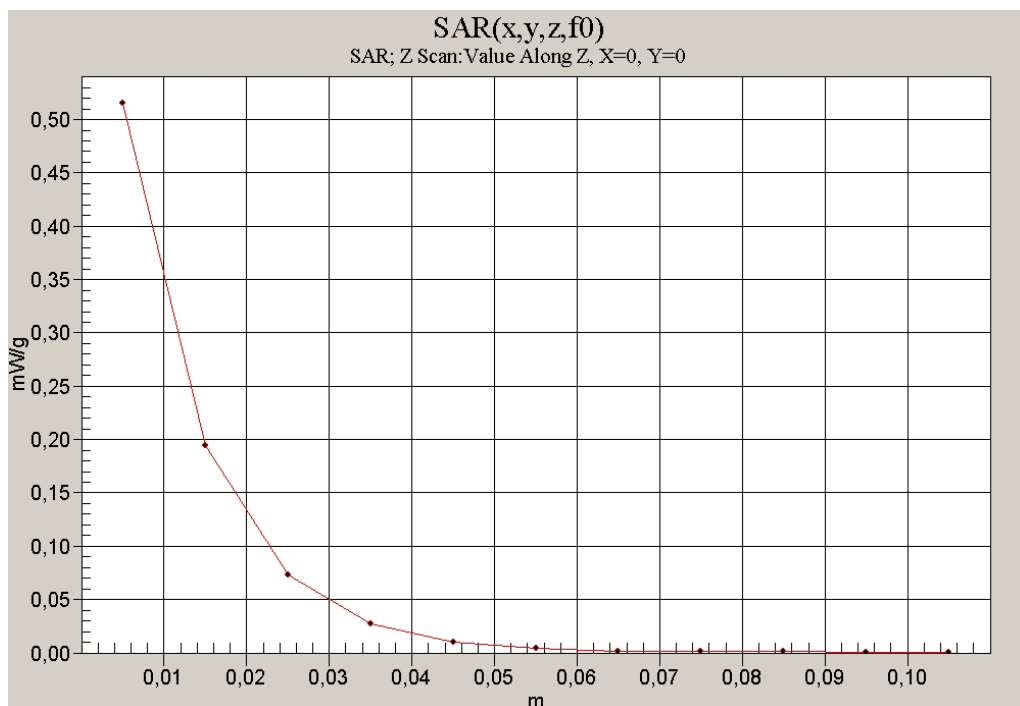


Fig. 16: SAR versus liquid depth, body: GPRS 1900 (Class 10), channel 661, data cable, (October 05, 2005; Ambient Temperature: 21.5°C; Liquid Temperature: 20.8°C).