


White label with black lettering

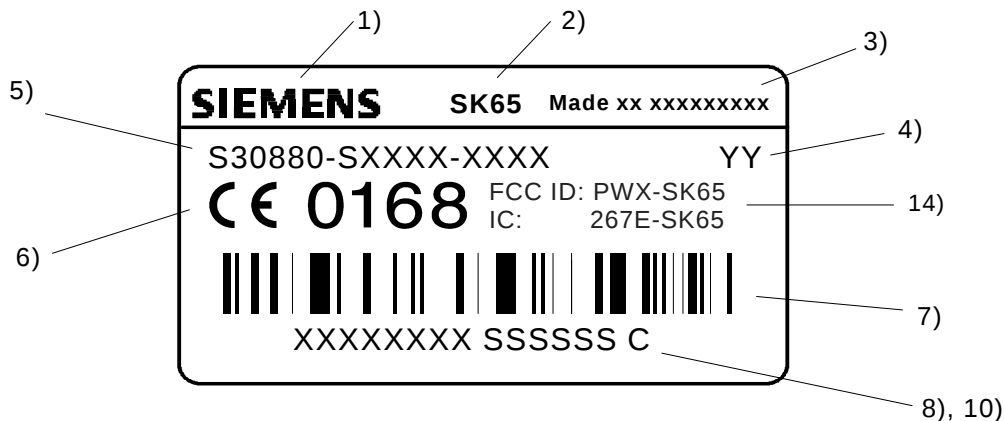

- 10) XXXXXXXX Typ-Approval Code TAC
 10) SSSSSS Current serial number (6 digits), Assigned by PICS
 10) C CHECK DIGIT 15. digit
 space between TAC, serial no. and 15.digit

Ink ribbon:

TTR-Band Ricoh 110-C

Font:

Title blocks concentric

- 1) Corporate logo:
 2) Product name:
 3) Made xx xxxxxxxx
 4) Code of date:

1.5 SN 66324
 Internal font D, size 4
 Internal font B, size 3 / Depending on production location
 Internal font D, size 4
 e.g. F3 — March
 +—- 1995

5) Code number:

Internal font D, size 4
 Corresponding to the number of the transceiver unit part list

6) CE - identification:

Height: 5 mm
 according to BABT-Document 556 26/93

7) Barcode IMEI-no.:

Code: 128 Size 2 Ratio: 3.0 Height: 3mm
 Typ 128, table **C** and **B**
Characteristic: IMEI-No. has 15 digits
 Digit 1-14 is generated as Barcode with table **C**.
 Digit 15 is printed with table **B**.

8) IMEI-no. (plain writing):

Internal font D, size 4, space between TAC,serial no. and 15.digit

10) Document for IMEI-no. allocation:

DIS - 80072-* BOM 000 xx
 Valid is the highest level in the system

14) Canada IC and US FCC:

Internal font B, size 3

				Date	25.06.2004	MOBILE PHONE IMEI-LABEL/SK65/STD	BNR
				Name	Bartenschl.		
					PD HW4 MCH1		
1		25.06.04	Bar			LETTERING PLAN	
Version	Memorandum	Date	Token	SIEMENS AG		DIS 80052	BLATT 1
							VON 1



SK65 Open battery cover
(Final label: See extra exhibit)