
Appendix for the Report

Dosimetric Assessment of the Siemens SL55 (FCC ID: PWX-SL55) According to the FCC Requirements

SAR Distribution Plots

February 25, 2003
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
Siemens Information & Communication Mobile LLC
16475 West Bernado Drive, Suite 400
San Diego CA 92127

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD WITHOUT QUICKPIC CAMERA.....	3
2	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD WITH QUICKPIC CAMERA	11
3	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WITH HEADSET.....	19
4	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WITH DATACABLE.....	23
5	SAR Z-AXIS SCANS (VALIDATION)	25
6	SAR Z-AXIS SCANS (MEASUREMENTS)	28

1 SAR Distribution Plots, PCS 1900 Head without QuickPic Camera

Test Laboratory: IMST
File Name: upopl_m_1.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Measurement; cheek left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:3
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 3.36 V/m
Peak SAR = 0.266 mW/g
SAR(1 g) = 0.171 mW/g, SAR(10 g) = 0.104 mW/g
Power Drift = -0.1 dB

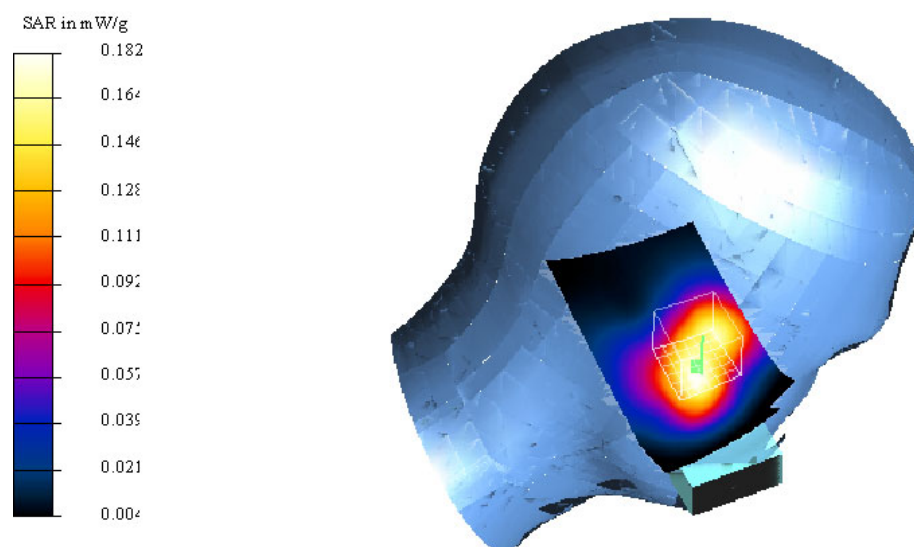


Fig. 1: SAR distribution for slider up, PCS 1900, channel 661, cheek position, left side of head. (18.02.2002; Liquid Temperature: 19.1° C; Ambient Temperature : 20.7° C).

Test Laboratory: IMST
File Name: upopl_m_2.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Measurement; tilted left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 4.48 V/m
Peak SAR = 0.155 mW/g
SAR(1 g) = 0.0896 mW/g; SAR(10 g) = 0.0525 mW/g
Power Drift = -0.008 dB

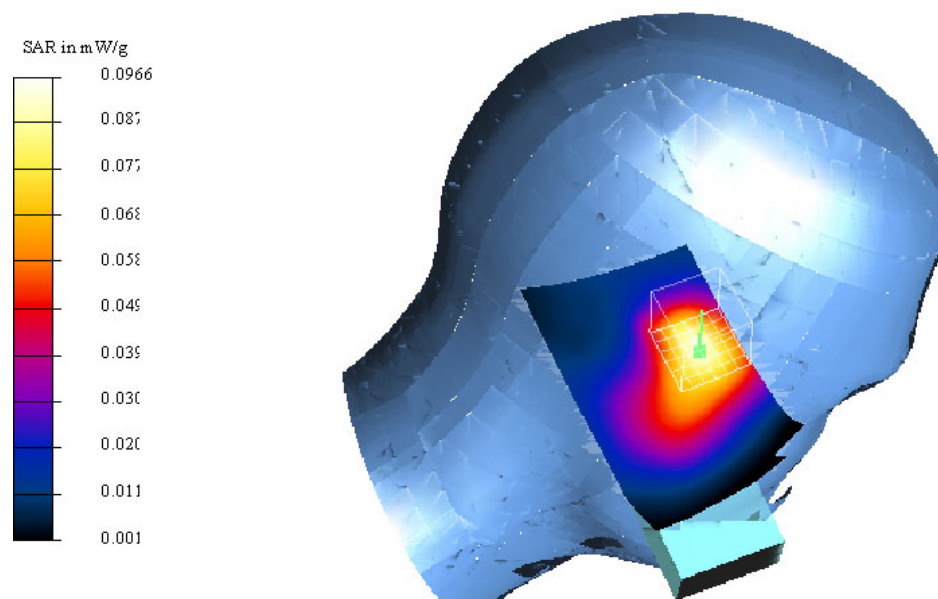


Fig. 2: SAR distribution for slider up, PCS 1900, channel 661, tilted position, left side of head. (18.02.2002; Liquid Temperature: 19.0° C; Ambient Temperature : 20.6° C).

Test Laboratory: IMST
File Name: upoprm_1.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Measurement; cheek right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm

Reference Value = 5.91 V/m

Peak SAR = 0.334 mW/g

SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.133 mW/g

Power Drift = 0.03 dB

Area Scan (51x91x1): Measurement grid: dx=1.5mm, dy=1.5mm

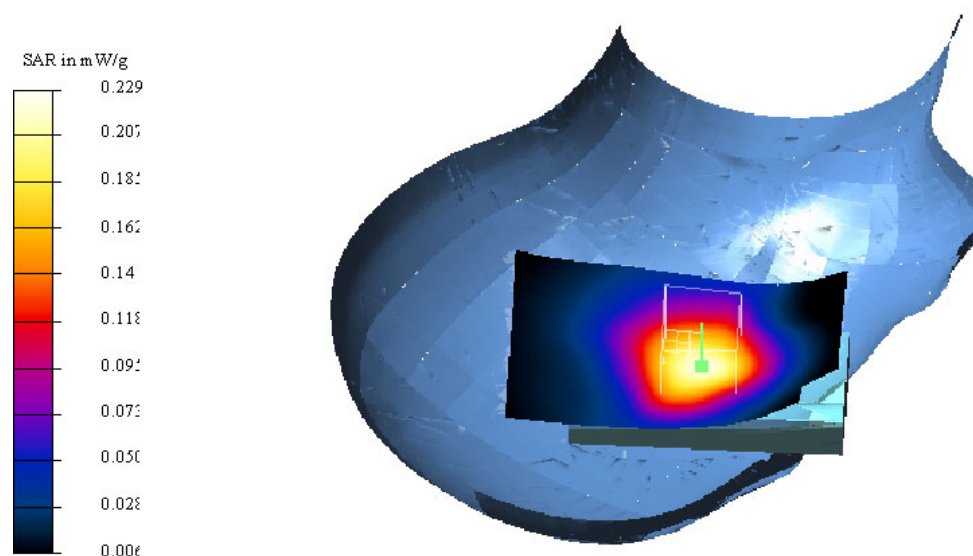


Fig. 3: SAR distribution for slider up, PCS 1900, channel 661, cheek position, right side of head (18.02.2002; Liquid Temperature: 19.0° C; Ambient Temperature : 20.7° C).

Test Laboratory: IMST
File Name: upoprm_2.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Measurement; tilted right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 6.04 V/m
Peak SAR = 0.125 mW/g
SAR(1 g) = 0.0772 mW/g; SAR(10 g) = 0.048 mW/g
Power Drift = 0.04 dB

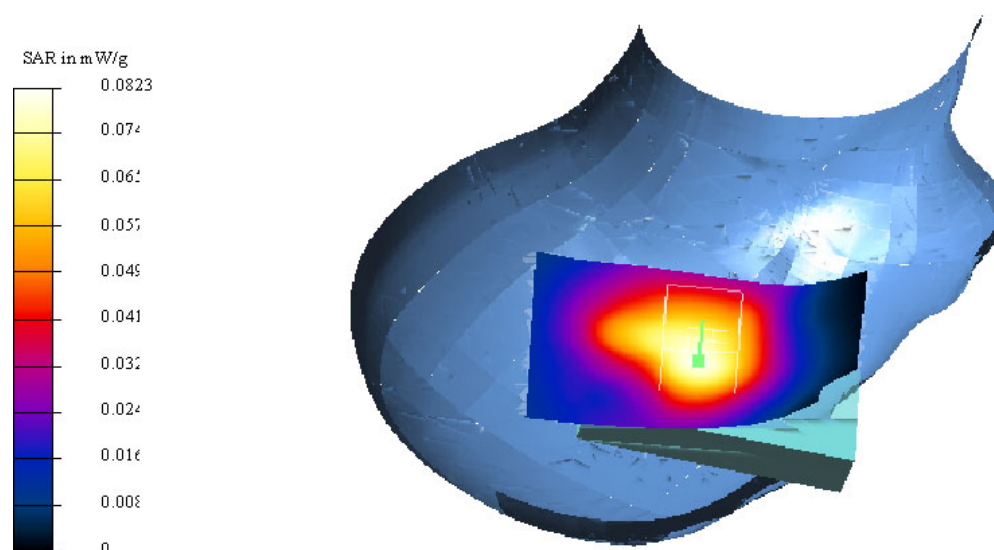


Fig. 4: SAR distribution for slider up, PCS 1900, channel 661, tilted position, right side of head. (18.02.2002; Liquid Temperature: 19.0° C; Ambient Temperature : 20.7° C).

Test Laboratory: IMST
File Name: dnopl_m_1.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Measurement; cheek left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 6.8 V/m
Peak SAR = 0.313 mW/g
SAR(1 g) = 0.208 mW/g; SAR(10 g) = 0.127 mW/g
Power Drift = 0.03 dB

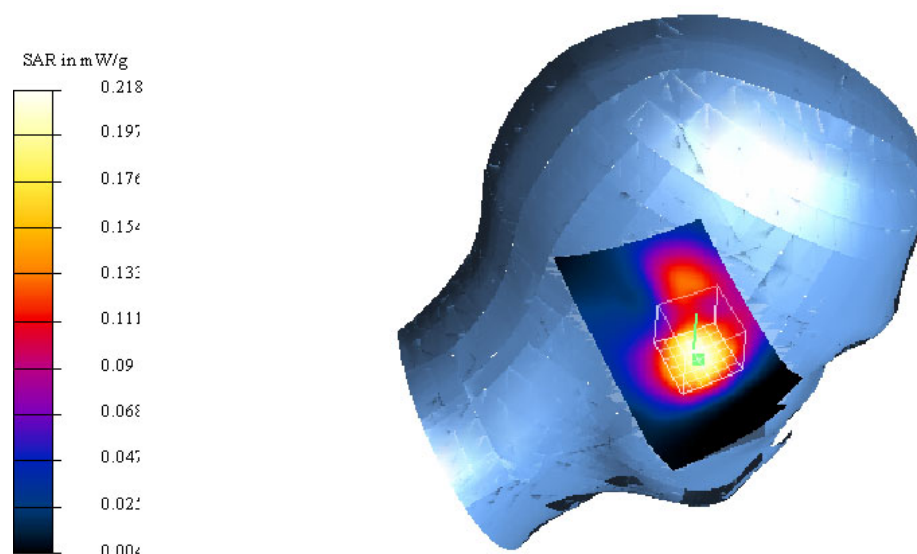


Fig. 5: SAR distribution for slider down, PCS 1900, channel 661, cheek position, left side of head. (18.02.2002; Liquid Temperature: 19.0° C; Ambient Temperature : 21.1° C).

Test Laboratory: IMST
File Name: dnopl_m_2.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Measurement; tilted left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44 \text{ mho/m}$, $\epsilon = 39.9$, $\rho = 1000 \text{ kg/m}^3$)
Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$
Reference Value = 7.73 V/m
Peak SAR = 0.316 mW/g
SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.0809 mW/g
Power Drift = 0.1 dB

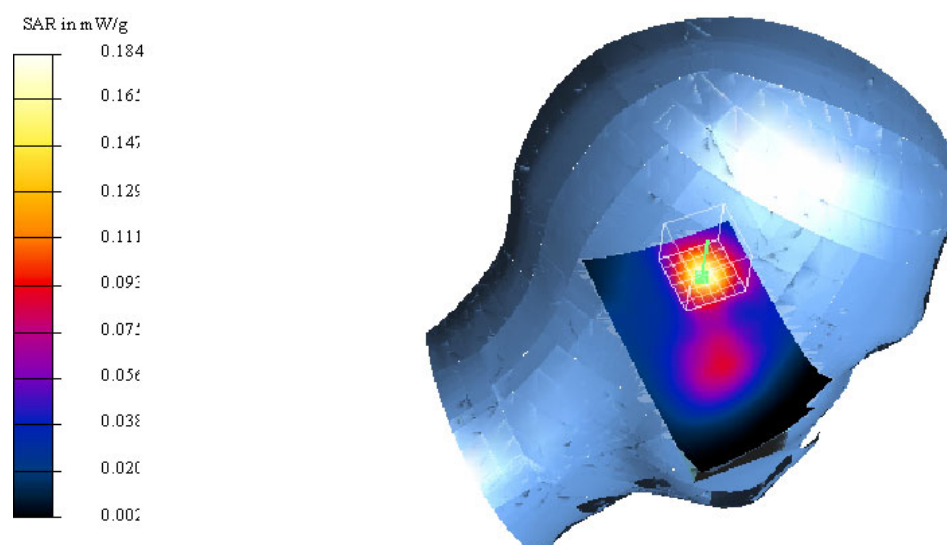


Fig. 6: SAR distribution for slider down, channel 661, tilted position, left side of head. (18.02.2002; Liquid Temperature: 18.9° C; Ambient Temperature : 21.1° C).

Test Laboratory: IMST
File Name: dnopr1_1.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Measurement; cheek right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sr335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 9.43 V/m
Peak SAR = 0.348 mW/g
SAR(1 g) = 0.21 mW/g; SAR(10 g) = 0.122 mW/g
Power Drift = -0.02 dB

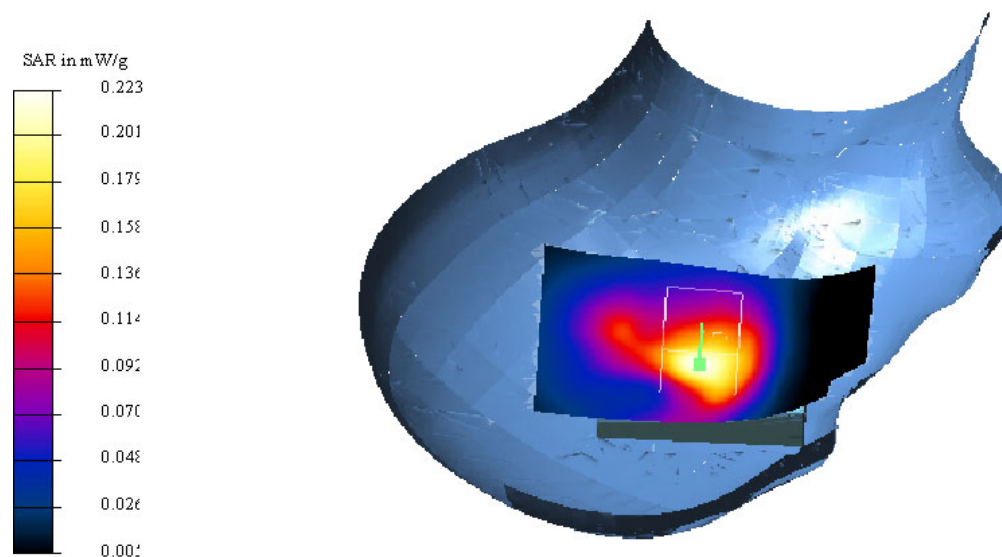


Fig. 7: SAR distribution for slider down, channel 661, cheek position, right side of head (18.02.2002; Liquid Temperature: 18.9° C; Ambient Temperature : 21.3° C).

Test Laboratory: IMST
File Name: dnoprn_2.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Measurement; tilted right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 9.54 V/m
Peak SAR = 0.232 mW/g
SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.0681 mW/g
Power Drift = -0.006 dB

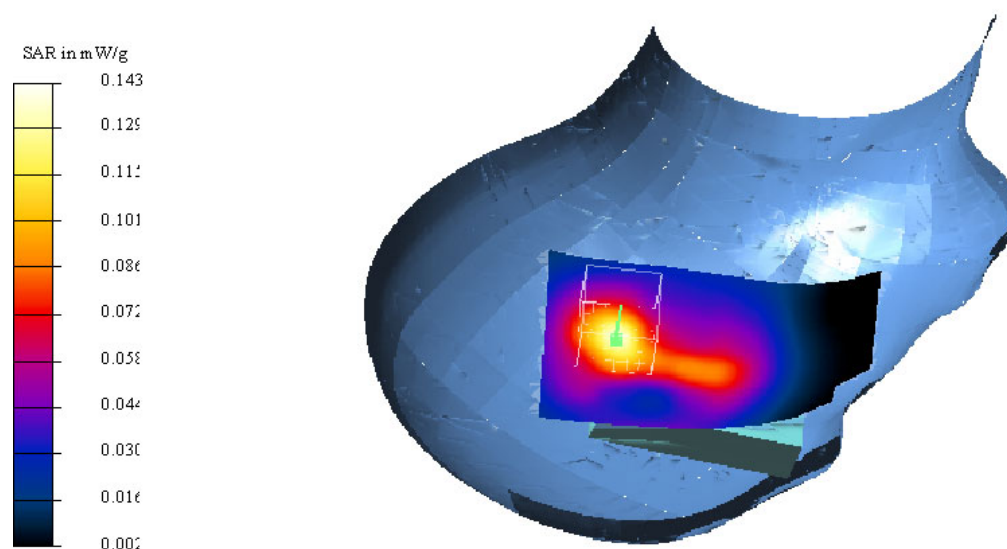


Fig. 8: SAR distribution for slider down, PCS 1900, channel 661, tilted position, right side of head. (18.02.2002; Liquid Temperature: 18.9° C; Ambient Temperature : 21.5° C).

2 SAR Distribution Plots, PCS 1900 Head with QuickPic Camera

Test Laboratory: IMST

File Name: upmplm_1.da4

DUT: Siemens +Camera Type & Serial Number: 004999511602228

Program: Measurement; check left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)

Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm

Reference Value = 5.03 V/m

Peak SAR = 0.43 mW/g

SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.151 mW/g

Power Drift = -0.06 dB

Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

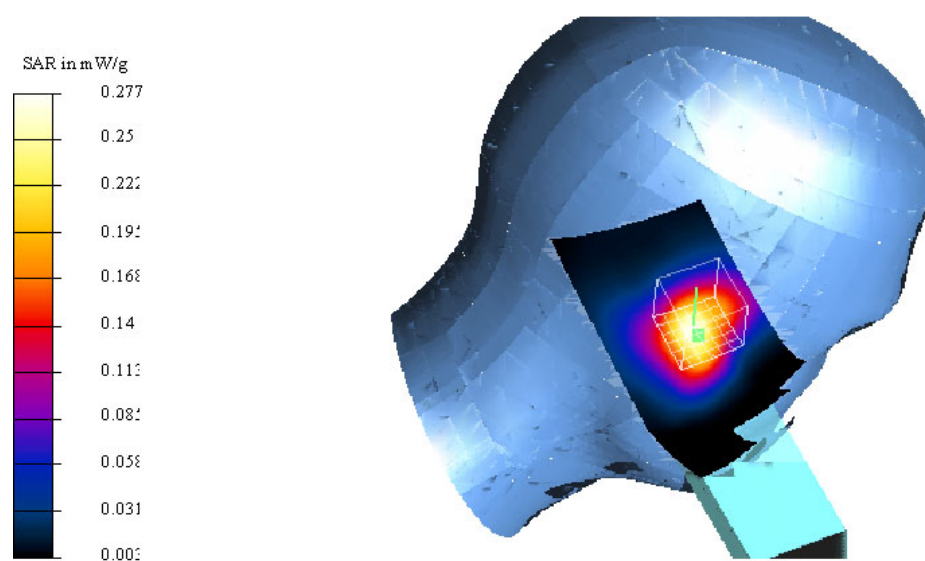


Fig. 9: SAR distribution for slider up, PCS 1900, channel 661, cheek position, left side of head. (18.02.2002; Liquid Temperature: 18.9° C; Ambient Temperature : 21.2° C).

Test Laboratory: IMST
File Name: upmplm_2.da4

DUT: Siemens +Camera Type & Serial Number: 004999511602228
Program: Measurement; tilted left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 5.58 V/m
Peak SAR = 0.175 mW/g
SAR(1 g) = 0.107 mW/g; SAR(10 g) = 0.0651 mW/g
Power Drift = 0.006 dB

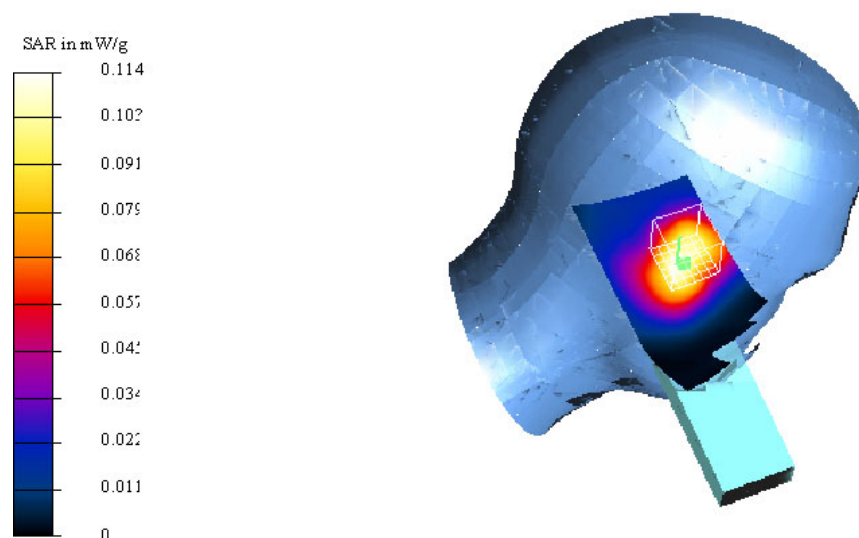


Fig. 10: SAR distribution for slider up, PCS 1900, channel 661, tilted position, left side of head. (18.02.2002; Liquid Temperature: 19.0° C; Ambient Temperature : 21.2° C).

Test Laboratory: IMST
File Name: upmpm_1.da4

DUT: Siemens +Camera Type & Serial Number: 004999511602228
Program: Measurement; check right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\varepsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 7.14 V/m
Peak SAR = 0.455 mW/g
SAR(1 g) = 0.274 mW/g, SAR(10 g) = 0.16 mW/g
Power Drift = -0.06 dB

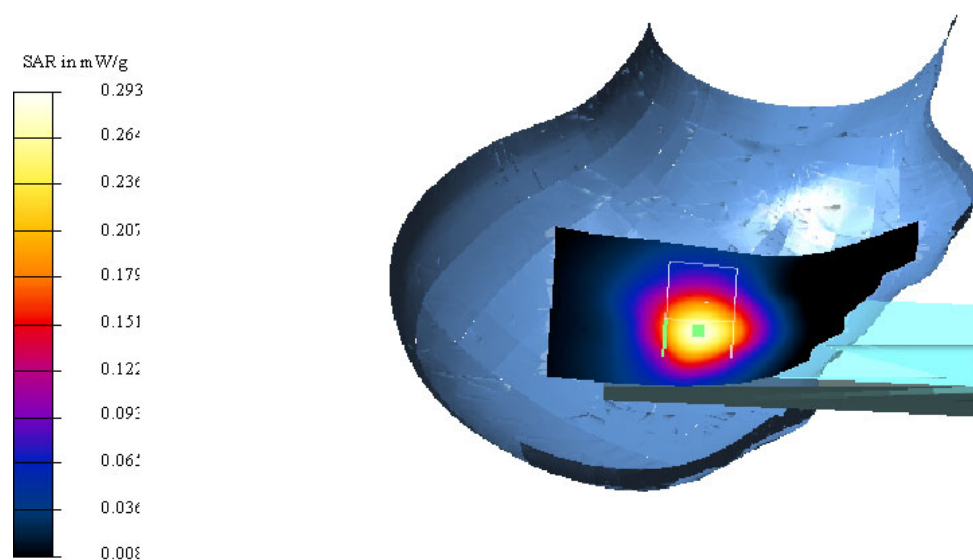


Fig. 11: SAR distribution for slider up, PCS 1900, channel 661, cheek position, right side of head (18.02.2002; Liquid Temperature: 19.0° C; Ambient Temperature : 21.1° C).

Test Laboratory: IMST
File Name: upmpm_2.da4

DUT: Siemens +Camera Type & Serial Number: 004999511602228
Program: Measurement; tilted right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\varepsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 6.88 V/m
Peak SAR = 0.173 mW/g
SAR(1 g) = 0.11 mW/g; SAR(10 g) = 0.0654 mW/g
Power Drift = -0.1 dB

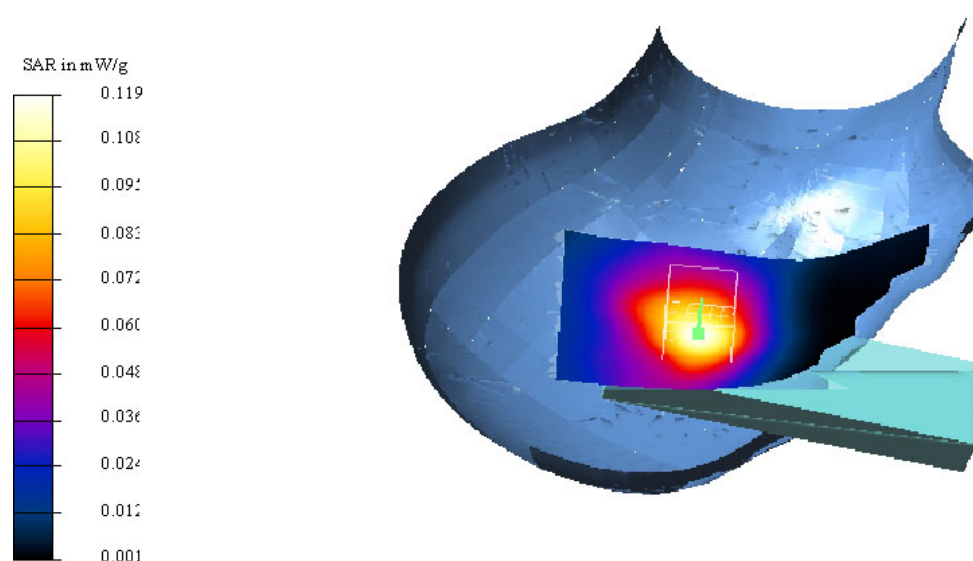


Fig. 12: SAR distribution for slider up, PCS 1900, channel 661, tilted position, right side of head. (18.02.2002; Liquid Temperature: 19.0° C; Ambient Temperature : 21.1° C).

Test Laboratory: IMST
File Name: dnmplm_1.da4

DUT: Siemens +Camera Type & Serial Number: 004999511602228
Program: Measurement; cheek left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 9.61 V/m
Peak SAR = 0.373 mW/g
SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.149 mW/g
Power Drift = -0.1 dB

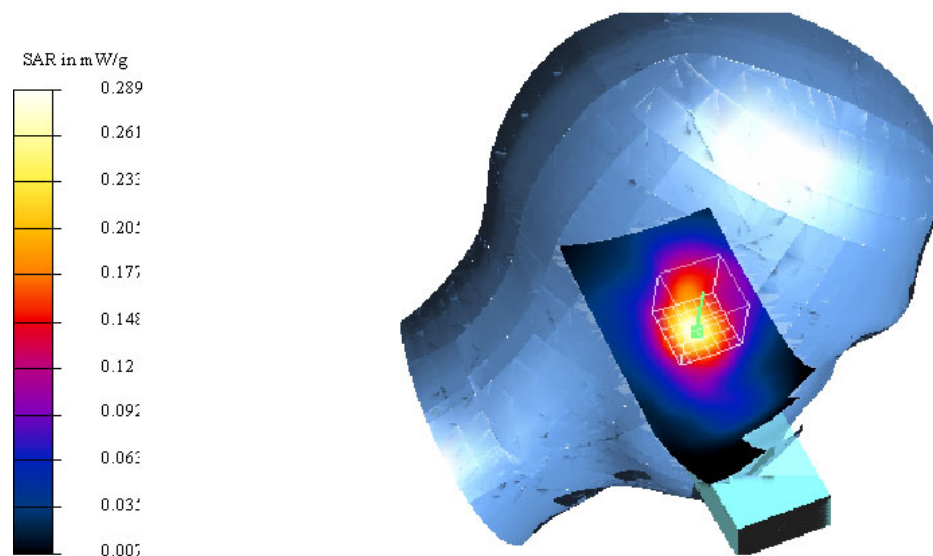


Fig. 13: SAR distribution for slider down, PCS 1900, channel 661, cheek position, left side of head. (18.02.2002; Liquid Temperature: 19.0° C; Ambient Temperature : 21.2° C).

Test Laboratory: IMST
File Name: dnmplm_2.da4

DUT: Siemens +Camera Type & Serial Number: 004999511602228
Program: Measurement; tilted left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 10.5 V/m
Peak SAR = 0.255 mW/g
SAR(1 g) = 0.17 mW/g; SAR(10 g) = 0.1 mW/g
Power Drift = -0.02 dB

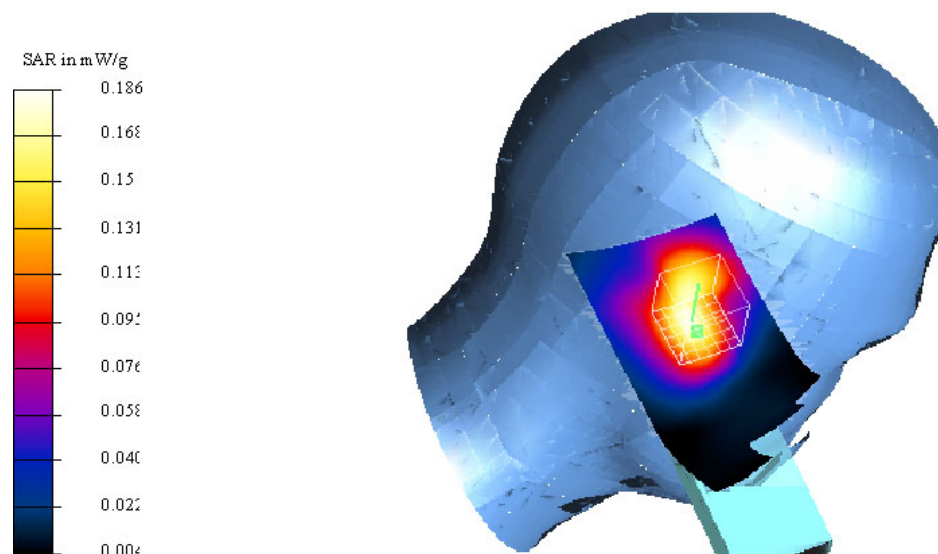


Fig. 14: SAR distribution for slider down, PCS 1900, channel 661, tilted position, left side of head. (18.02.2002; Liquid Temperature: 19.0° C; Ambient Temperature : 21.2° C).

Test Laboratory: IMST
File Name: dnmprm_1.da4

DUT: Siemens +Camera Type & Serial Number: 004999511602228
Program: Measurement; cheek right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm

Reference Value = 10.1 V/m

Peak SAR = 0.453 mW/g

SAR(1 g) = 0.302 mW/g; SAR(10 g) = 0.168 mW/g

Power Drift = -0.02 dB

Area Scan (51x11x1): Measurement grid: dx=15mm, dy=15mm

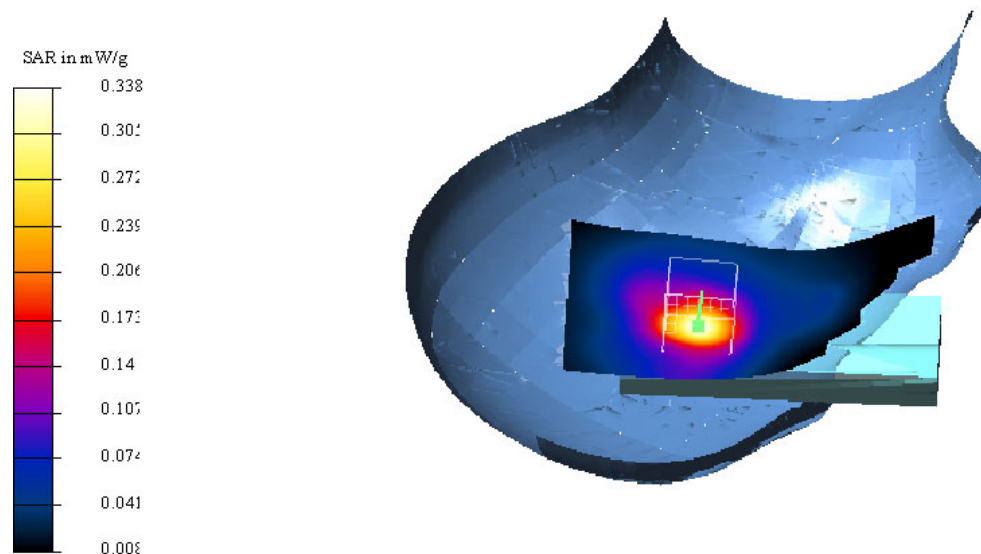


Fig. 15: SAR distribution for slider down, PCS 1900, channel 661, cheek position, right side of head (18.02.2002; Liquid Temperature: 19.0° C; Ambient Temperature : 21.1° C).

Test Laboratory: IMST
File Name: dnmprm_2.da4

DUT: Siemens +Camera Type & Serial Number: 004999511602228
Program: Measurement; tilted right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Head 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon = 39.9$, $\rho = 1000$ kg/m³)
Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(5.2, 5.2, 5.2); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: SAM 4.0 - TP: 1176
- Software: DASY4, V4.0 Build 51

Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 10.7 V/m
Peak SAR = 0.309 mW/g
SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.116 mW/g
Power Drift = -0.02 dB

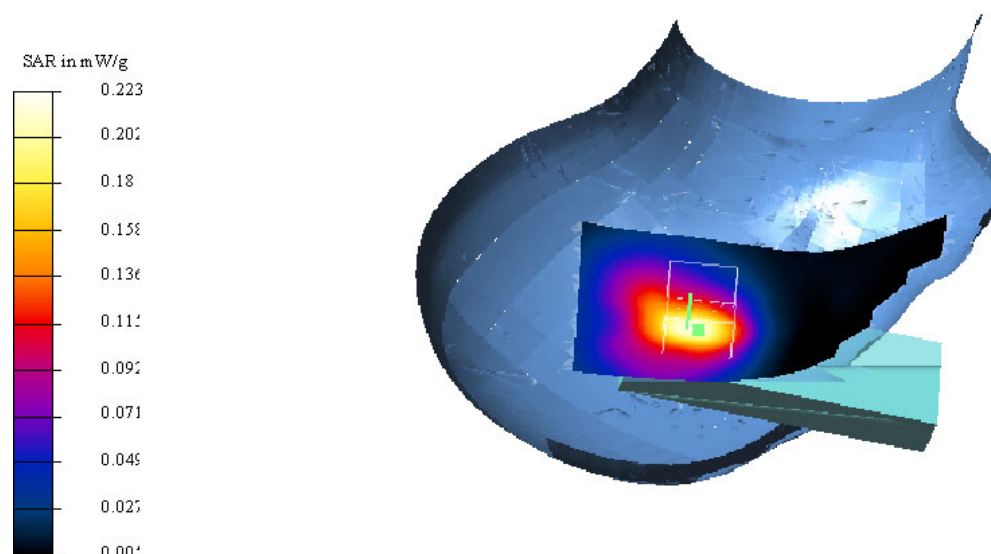


Fig. 16: SAR distribution for slider down, PCS 1900, channel 661, tilted position, right side of head. (18.02.2002; Liquid Temperature: 19.0° C; Ambient Temperature : 21.1° C).

3 SAR Distribution Plots, PCS 1900 Body with Headset

Attached are only the plots for the worst case measurements since the SAR plots are similar.

Test Laboratory: IMST
File Name: upphm_1.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Unnamed Program; Unnamed procedure

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Body1900 MHz ($\sigma = 1.58$ mho/m, $\epsilon = 51.8$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DVB6 - SN1579; ConvF(4.8, 4.8, 4.8); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: - TP:
- Software: DASY4, V4.0 Build 51

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm

Reference Value = 20.5 V/m

Peak SAR = 1.65 mW/g

SAR(1 g) = 0.634 mW/g; SAR(10 g) = 0.279 mW/g

Power Drift = -0.05 dB

Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

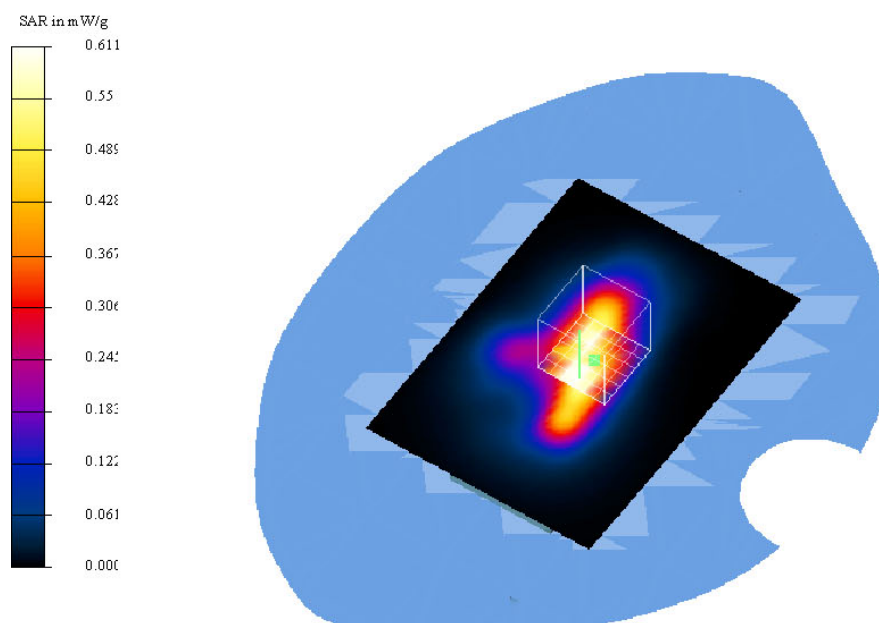


Fig. 17: SAR distribution for slider up, PCS 1900, channel 661, body worn configuration, display towards the ground (19.02.2002; Liquid Temperature: 18.8° C; Ambient Temperature : 20.9° C).

Test Laboratory: IMST
File Name: upphm_3_wdh.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Unnamed Program; Unnamed procedure

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Body1900 MHz ($\sigma = 1.58$ mho/m, $\epsilon = 51.8$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(4.8, 4.8, 4.8); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: - TP:
- Software: DASY4, V4.0 Build 51

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm

Reference Value = 10.2 V/m

Peak SAR = 0.22 mW/g

SAR(1 g) = 0.15 mW/g; SAR(10 g) = 0.0914 mW/g

Power Drift = 0.04 dB

Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

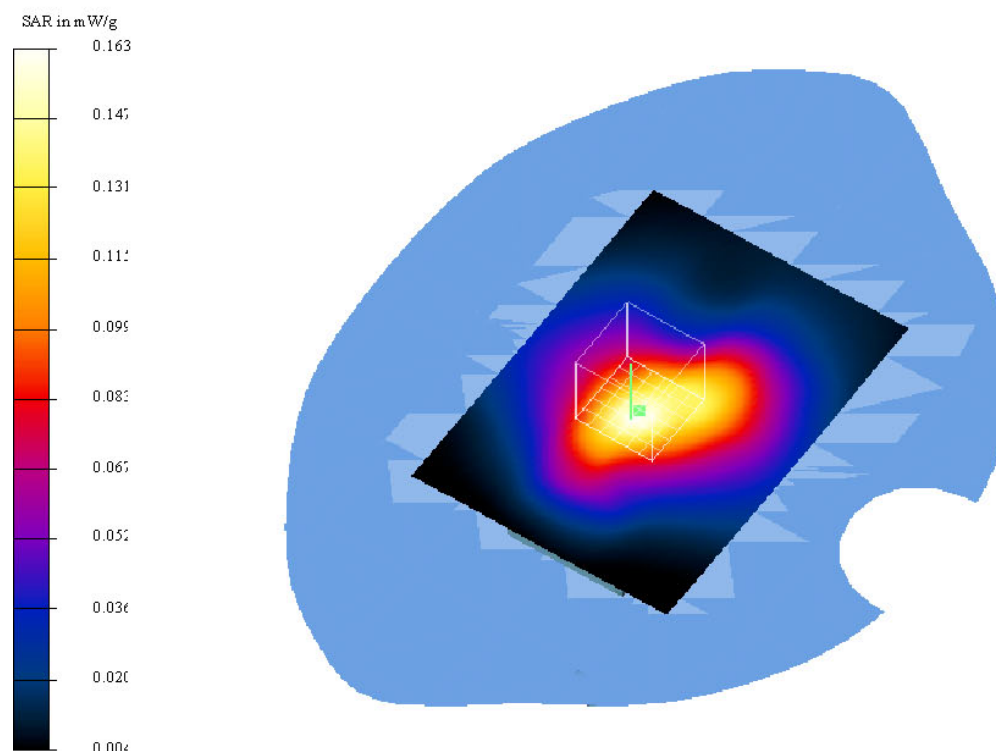


Fig. 18: SAR distribution for slider up, PCS 1900, channel 661, body worn configuration, display towards the phantom (19.02.2002, Liquid Temperature: 18.7° C; Ambient Temperature : 20.5° C).

Test Laboratory: IMST
File Name: dnrplm_1wdh.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Unnamed Program; Unnamed procedure

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:3
Medium: Body1900 MHz ($\sigma = 1.58 \text{ mho/m}$, $\epsilon = 51.8$, $\rho = 1000 \text{ kg/m}^3$)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DVB - SN1579; ConvF(4.8, 4.8, 4.8); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: - TP:
- Software: DASY4, V4.0 Build 51

Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 25.8 V/m
Peak SAR = 1.91 mW/g
SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.596 mW/g
Power Drift = -0.01 dB
Zoom Scan 3 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 25.8 V/m
Peak SAR = 2.14 mW/g
SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.58 mW/g
Power Drift = -0.01 dB

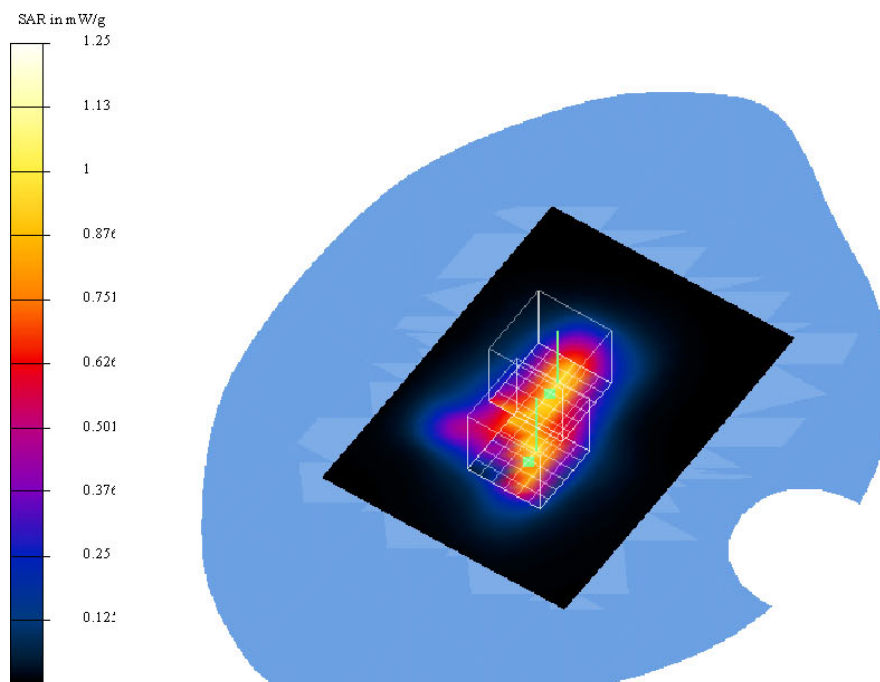


Fig. 19: SAR distribution for slider down, PCS 1900, channel 661, body worn configuration, display towards the ground (19.02.2002, Liquid Temperature: 18.9° C; Ambient Temperature : 20.7° C).

Test Laboratory: LMST
File Name: dnphm_2_wdh.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Unnamed Program; Unnamed procedure

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Body1900 MHz ($\sigma = 1.58 \text{ mho/m}$, $\epsilon = 51.8$, $\rho = 1000 \text{ kg/m}^3$)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(4.8, 4.8, 4.8); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: - TP:
- Software: DASY4, V4.0 Build 51

Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 10.1 V/m
Peak SAR = 0.263 mW/g
SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.0724 mW/g
Power Drift = -0.05 dB
Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm
Reference Value = 10.1 V/m
Peak SAR = 0.24 mW/g
SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.0889 mW/g
Power Drift = -0.05 dB

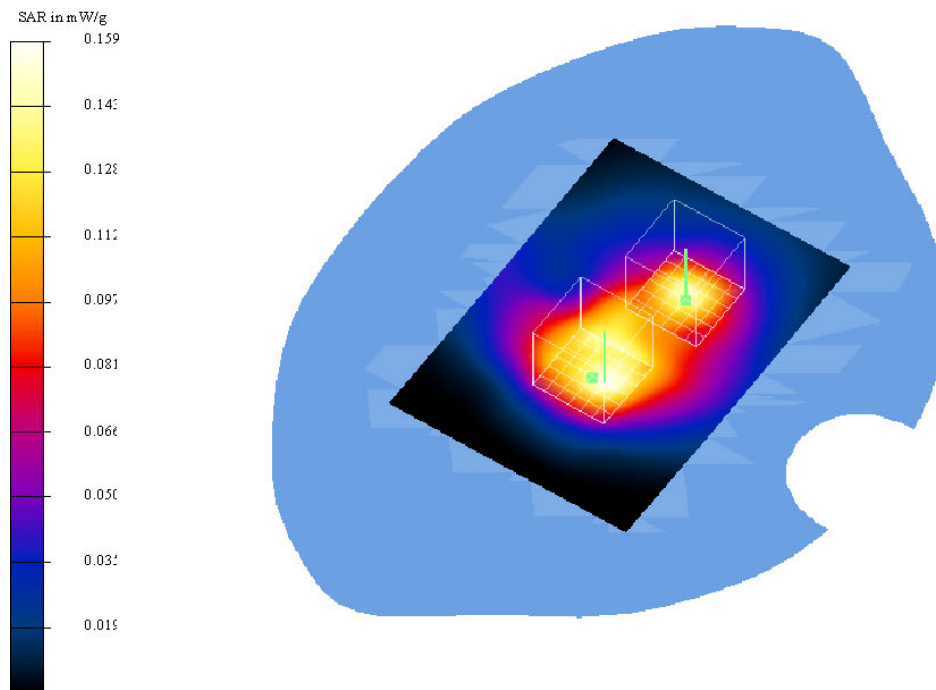


Fig. 20: SAR distribution for slider down, PCS 1900, channel 661, body worn configuration, display towards the phantom (20.02.2002, Liquid Temperature: 18.8° C; Ambient Temperature : 20.8° C).

4 SAR Distribution Plots, PCS 1900 Body with Datacable

Attached are only the plots for the worst case measurements since the SAR plots are similar.

Test Laboratory: IMST
File Name: dndphl_1.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Unnamed Program; Unnamed procedure

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8
Medium: Body1900 MHz ($\sigma = 1.58$ mho/m, $\epsilon = 51.8$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:
- Probe: ET3DV6 - SN1579; ConvF(4.8, 4.8, 4.8); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: - TP:
- Software: DASY4, V4.0 Build 51

Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 29 V/m
Peak SAR = 2.35 mW/g
SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.591 mW/g
Power Drift = -0.002 dB

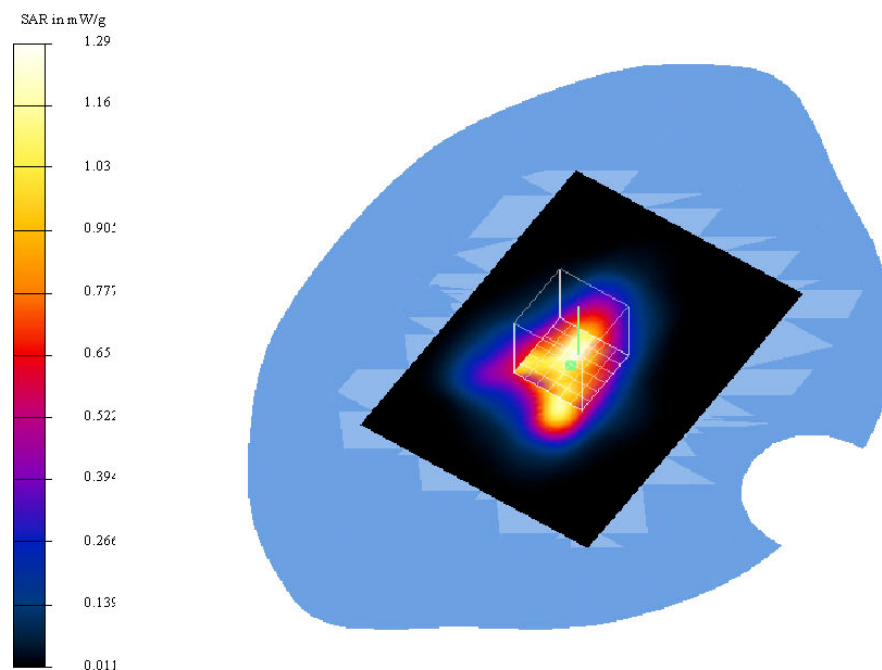


Fig. 21: SAR distribution for slider down, PCS 1900, channel 512, body worn configuration, display towards the ground (20.02.2002, Liquid Temperature: 19.5° C; Ambient Temperature : 21.5° C).

Test Laboratory: IMST
File Name: updphm_3.da4

DUT: Siemens Type & Serial Number: 004999511602228
Program: Unnamed Program; Unnamed procedure

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: Body1900 MHz ($\sigma = 1.58$ mho/m, $\varepsilon = 51.8$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(4.8, 4.8, 4.8); Calibrated: 03.05.2002
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 15.05.2002
- Phantom: - TP:
- Software: DASY4, V4.0 Build 51

Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm
Reference Value = 10.5 V/m
Peak SAR = 0.222 mW/g
SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.0969 mW/g
Power Drift = -0.09 dB

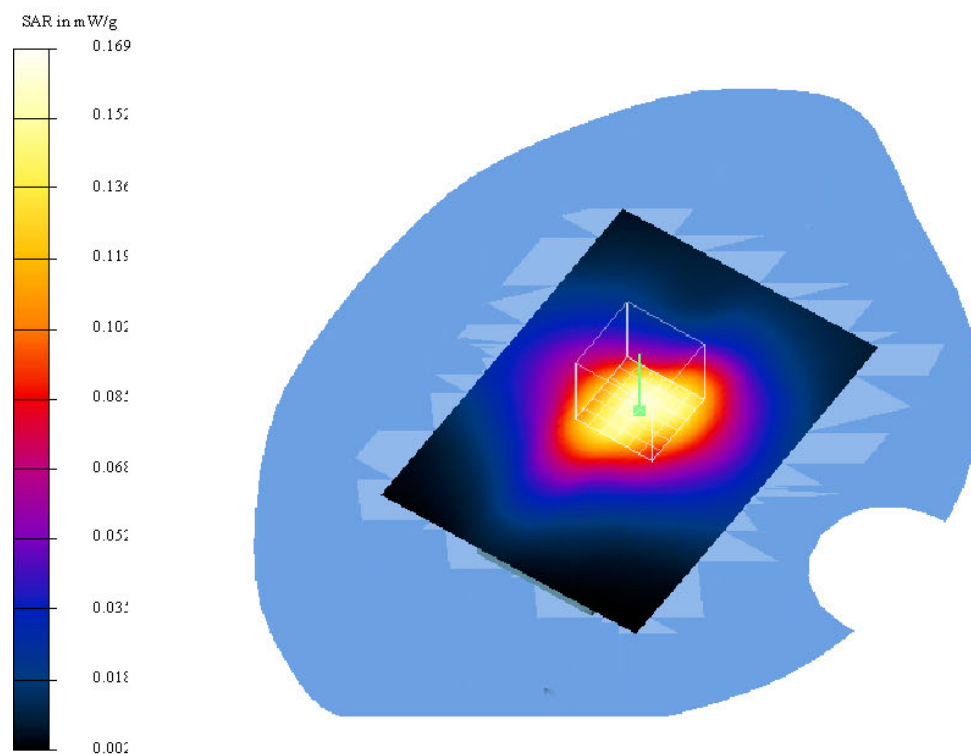


Fig. 22: SAR distribution for slider up, PCS 1900, channel 661, body worn configuration, display towards the phantom (20.02.2002, Liquid Temperature: 19.5° C; Ambient Temperature : 21.6° C).

5 SAR z-axis scans (Validation)

The following pictures show the plots of SAR versus liquid depth for the worst case values.

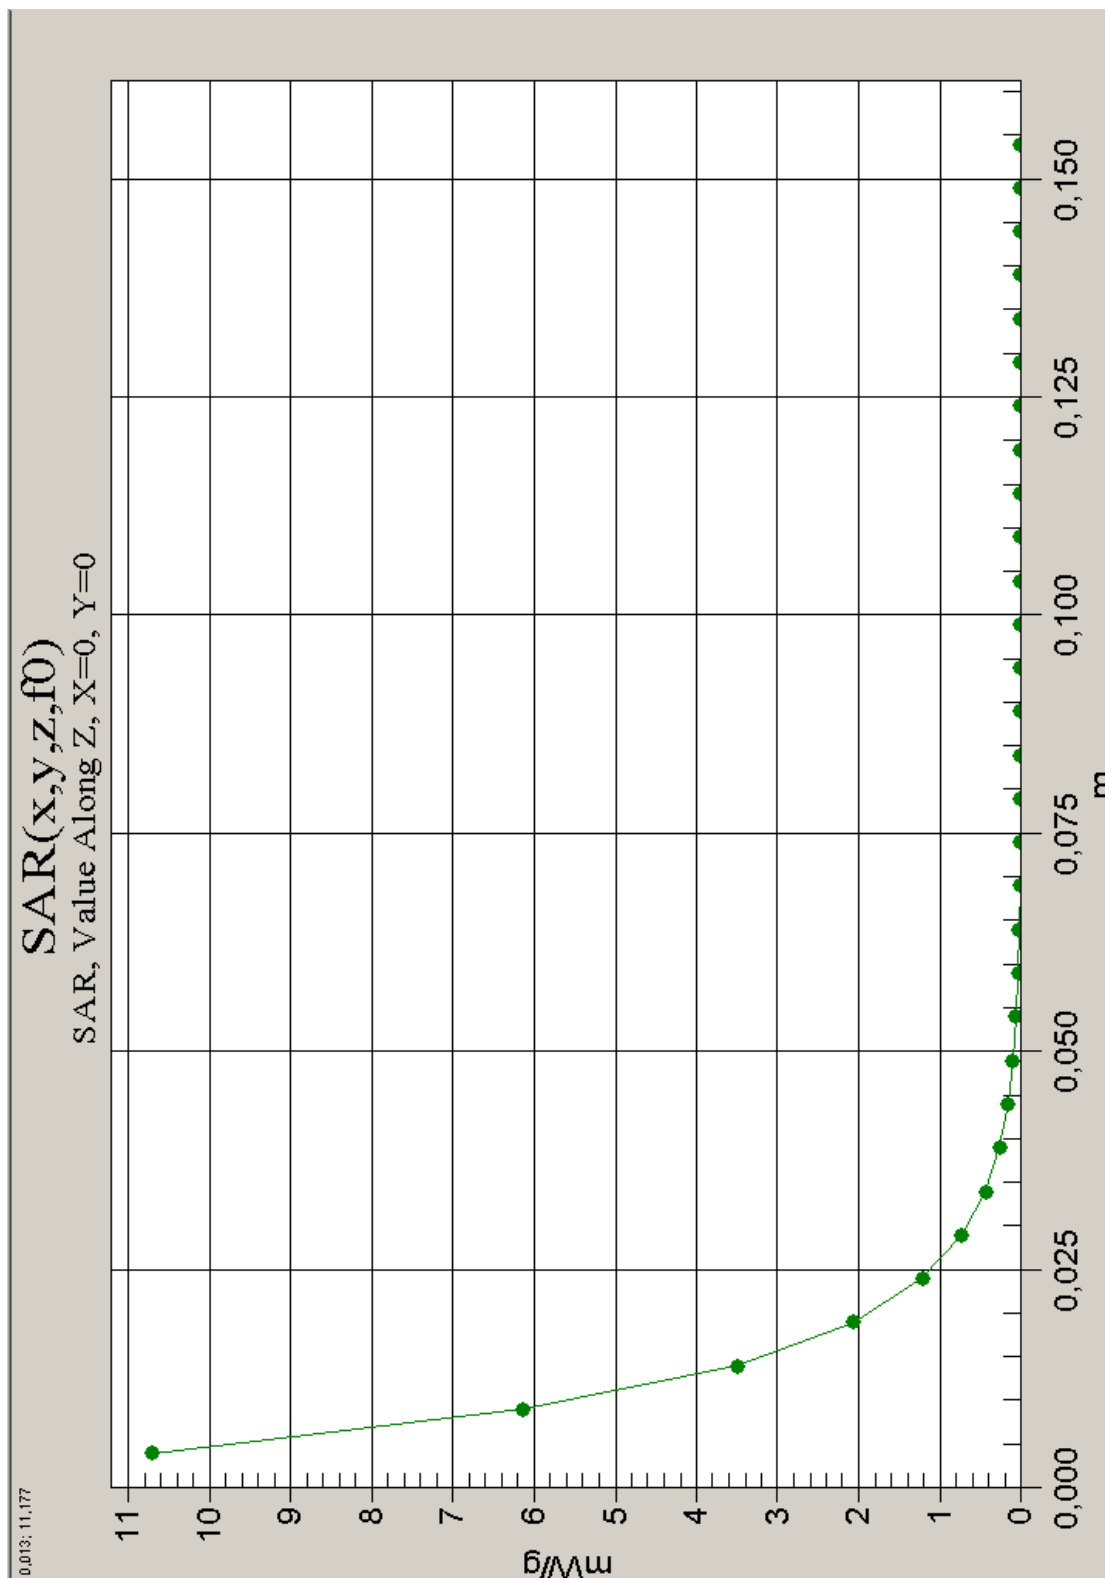


Fig. 23: SAR versus liquid depth, 1900 MHz, head (18.02.2002, Liquid Temperature: 19.1° C; Ambient Temperature : 20.7° C).

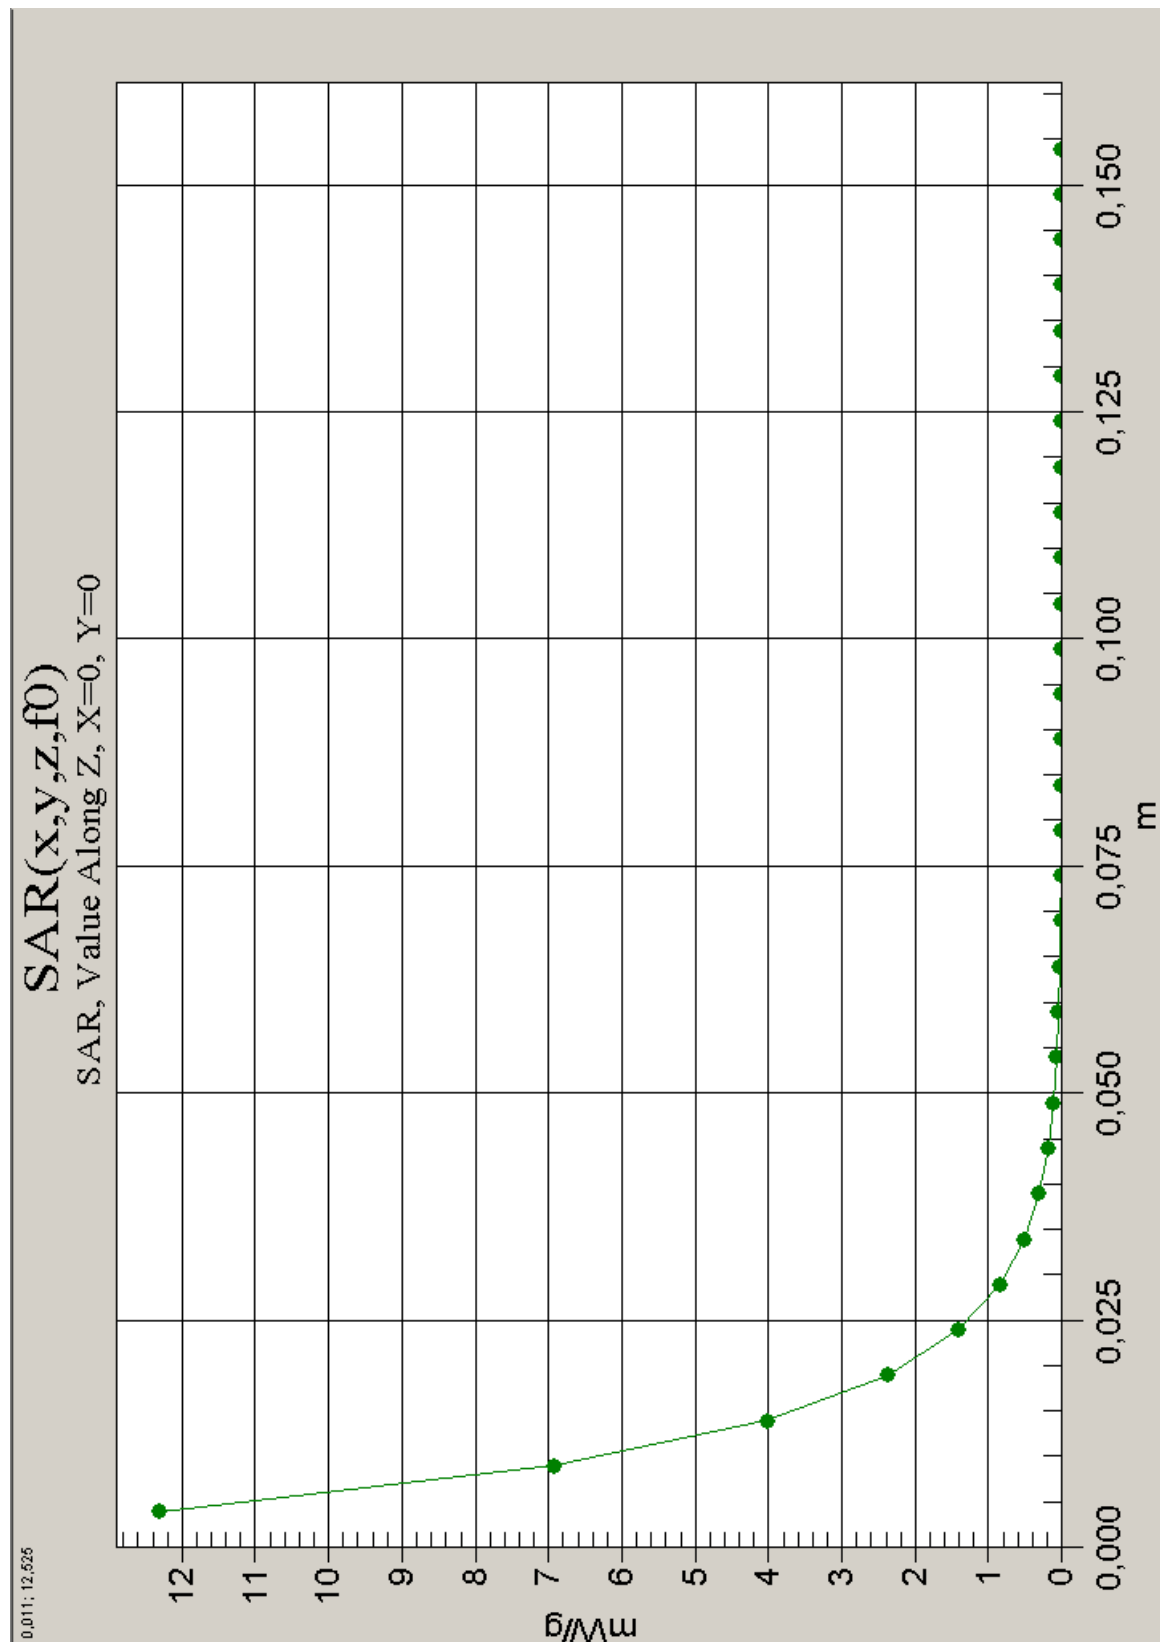


Fig. 24: SAR versus liquid depth, 1900 MHz, body (19.02.2002; Liquid Temperature: 18.9° C; Ambient Temperature : 20.7° C).

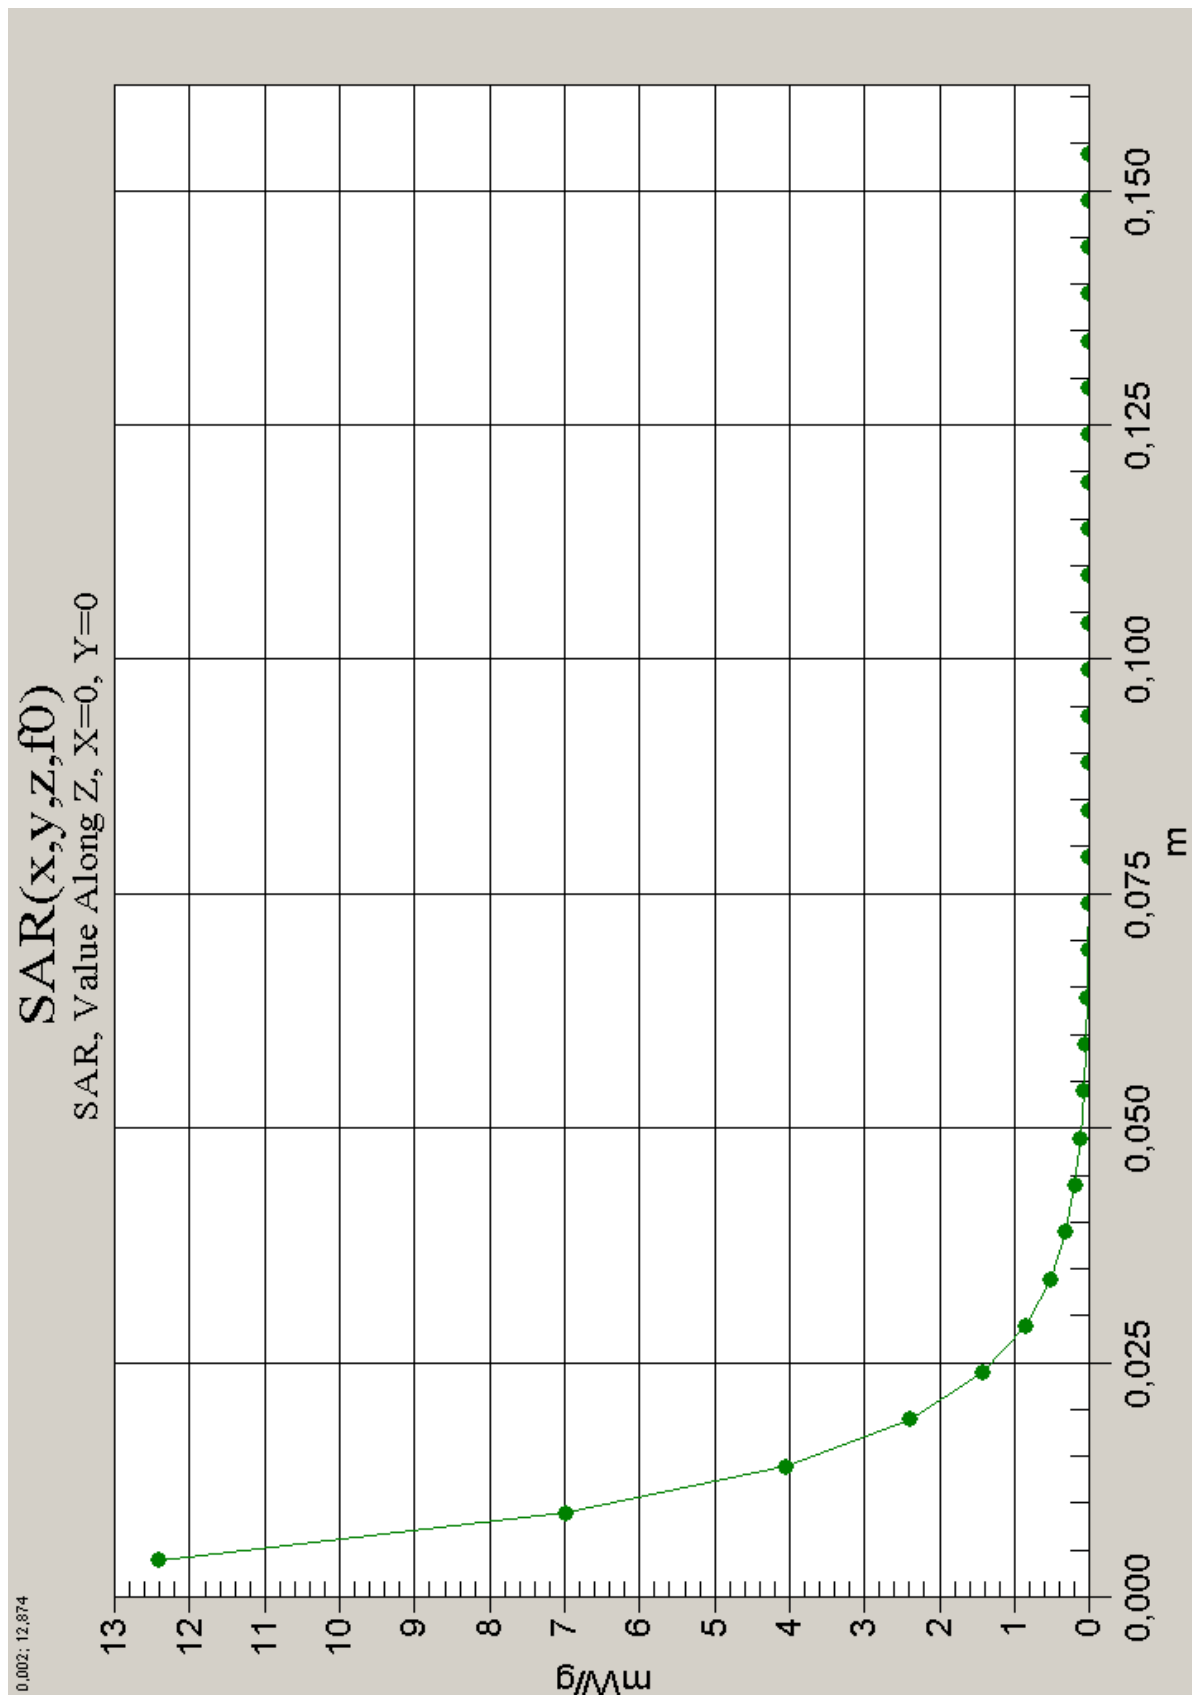


Fig. 25: SAR versus liquid depth, 1900 MHz, body (20.02.2002; Liquid Temperature: 18.9° C; Ambient Temperature : 20.7° C).

6 SAR z-axis scans (Measurements)

The following pictures show the plots of SAR versus liquid depth for the worst case values.

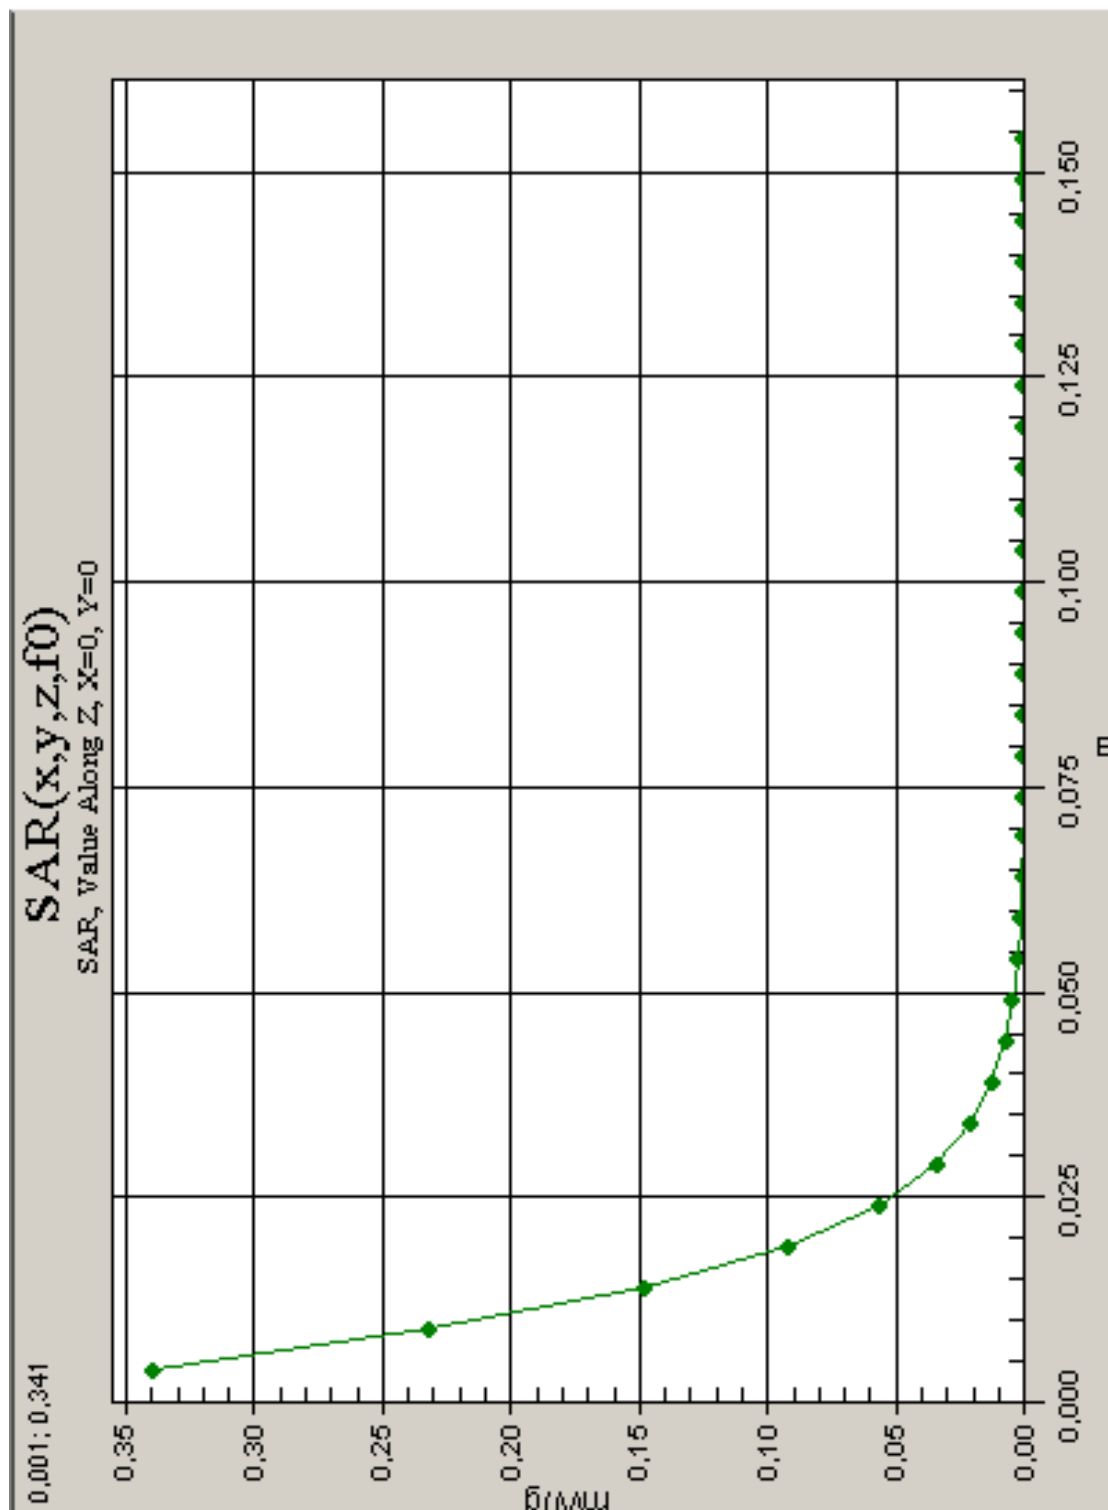


Fig. 26: SAR versus liquid depth, head: with QuickPic camera and slider down , PCS 1900, channel 661, cheek position, right side of head. (18.02.2002, Liquid Temperature: 19.0° C; Ambient Temperature : 21.1° C).

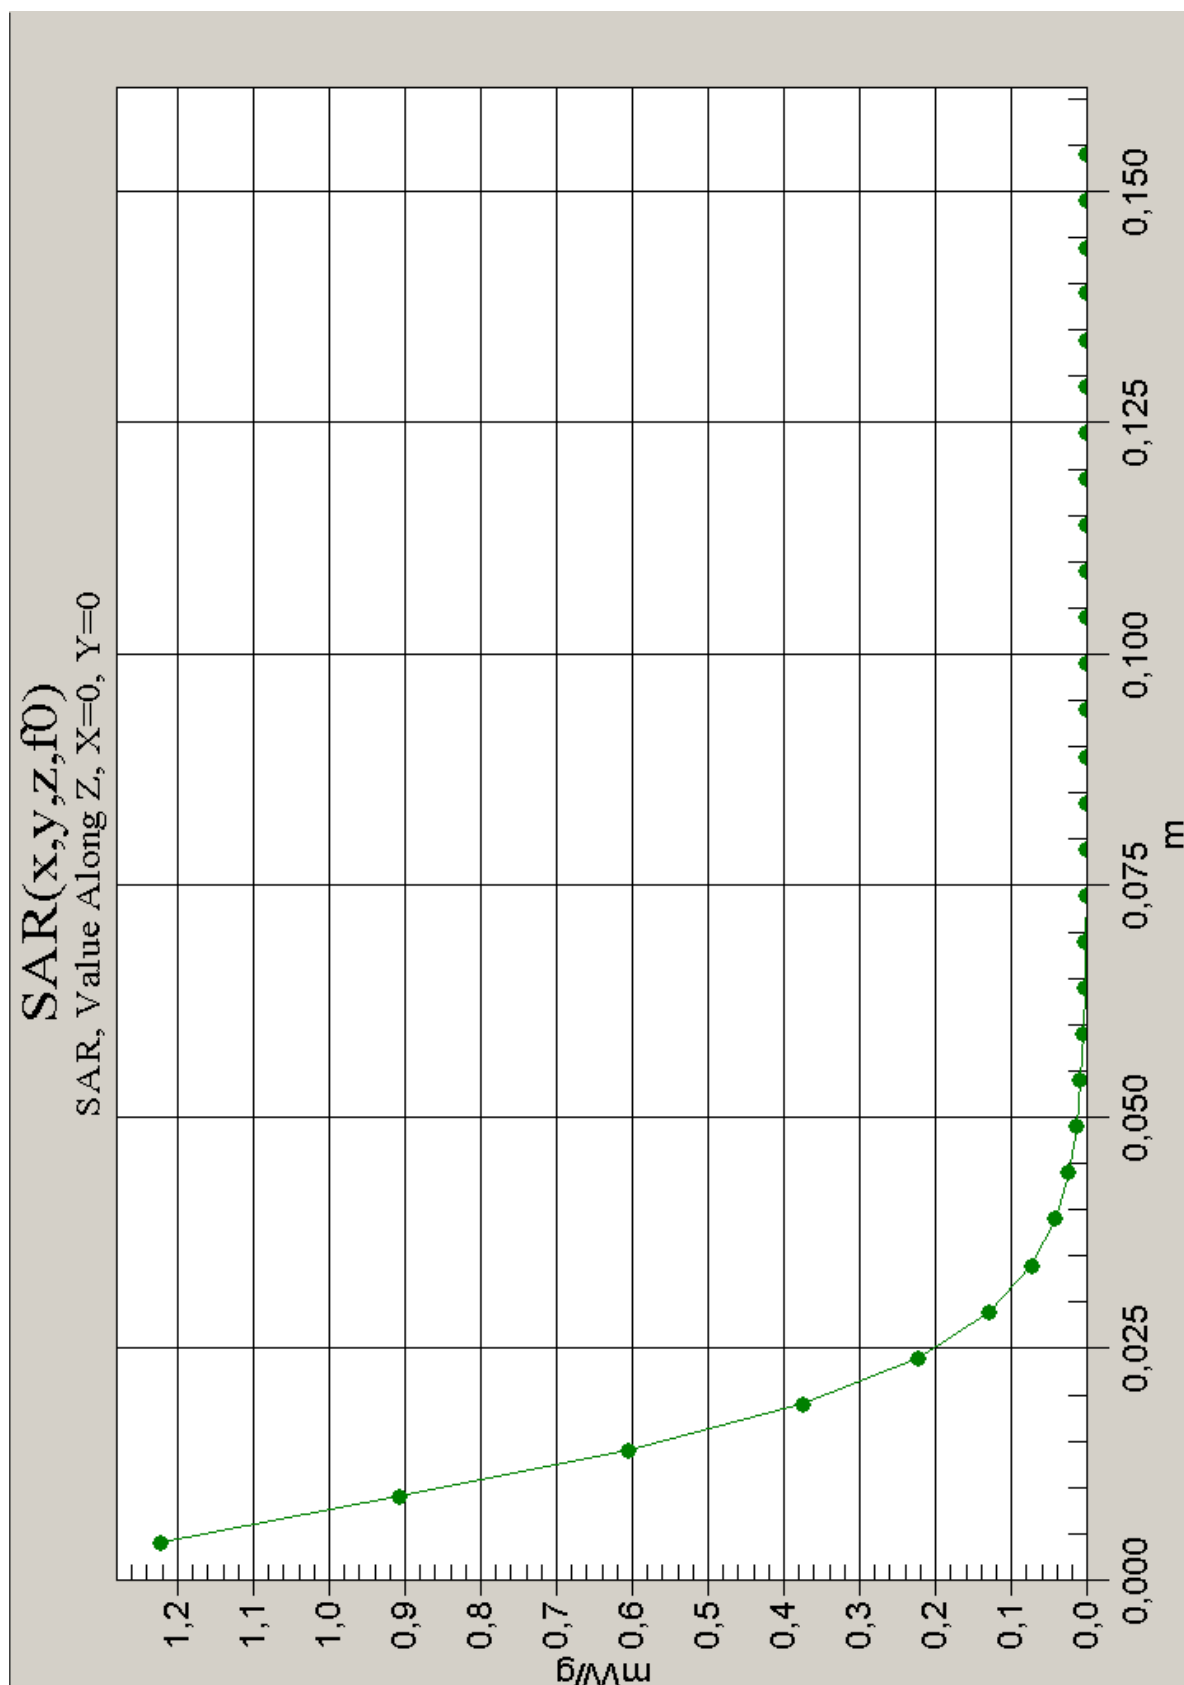


Fig. 27: SAR versus liquid depth: headset, slider down, PCS 1900, channel 661, body worn configuration, display towards the ground (19.02.2002, Liquid Temperature: 18.9° C; Ambient Temperature : 20.7° C).