



SL91 Battery Lid Opened

Department: BMQ PH RD HW KLF	SL91	Date: 01.09.2006
Author:	External pictures	Page: 1/7



Disassemble Step 1: Battery Cover



Disassemble Step 2: Front Cover and Keypad separated from Slider




Disassemble Step 3: Display and Keypad separated from Slider




**Disassemble Step 4: Slider
Upper Case Back, Open**




**Disassemble Step 5: Slider
Upper Case Back, Close**

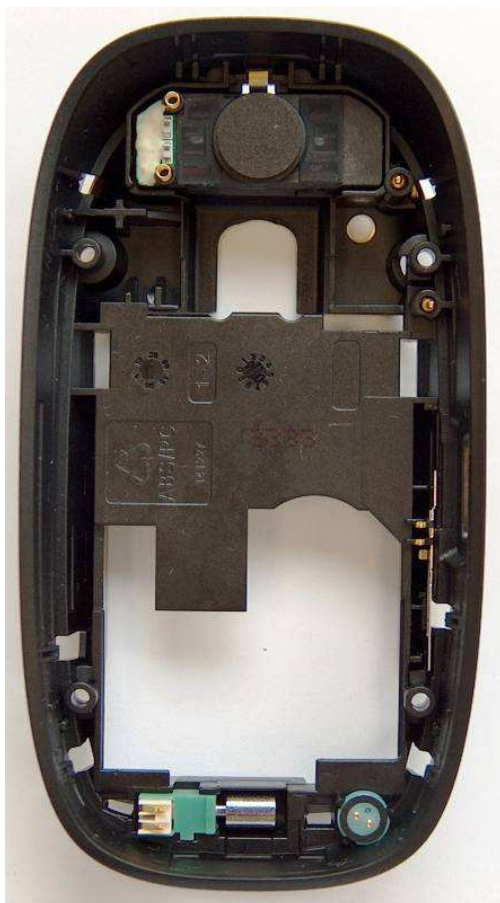


Disassemble Step 6: Rear Cover Base

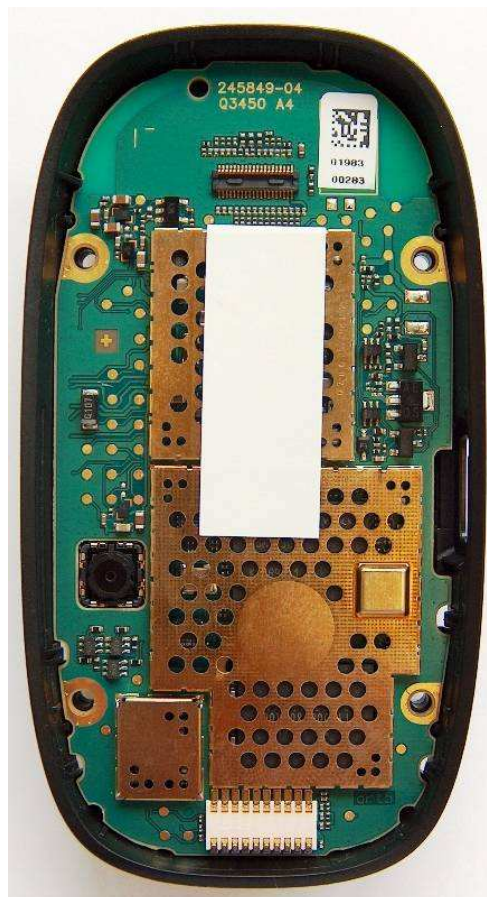

Disassemble Step 7: Rear Cover Base with PCB

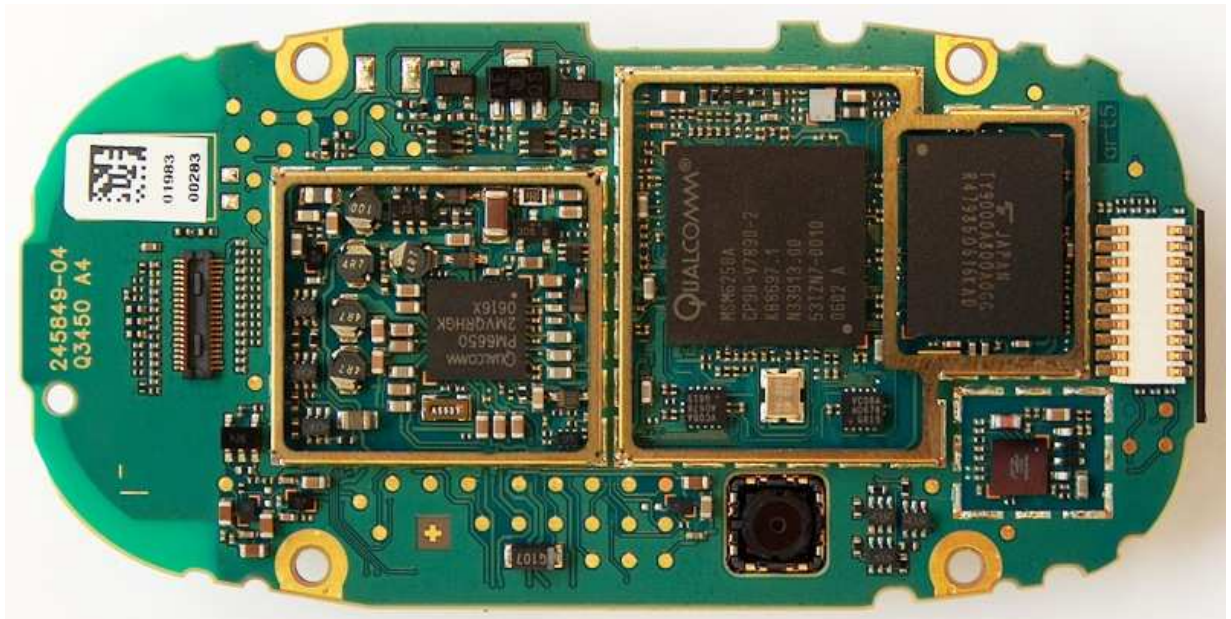

Disassemble Step 8: Back Side of main PCB

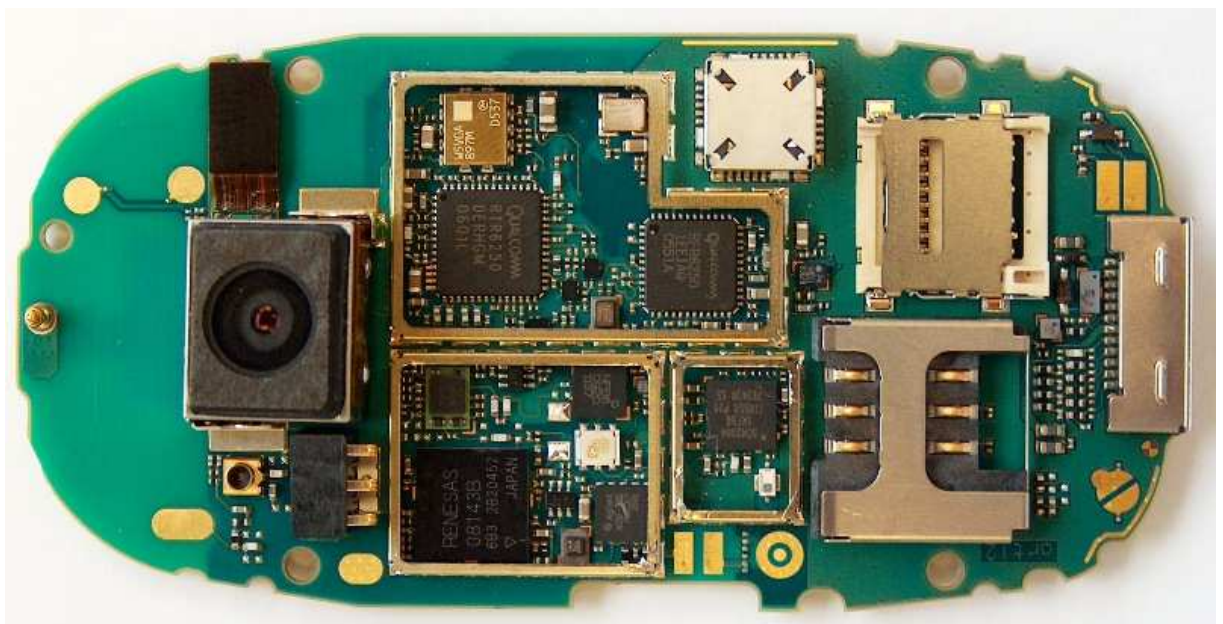

Disassemble Step 9: Front Side of main PCB