

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 1 von 66
Page 1 of 66

Auftraggeber: Comba Telecom Ltd.
Client:
15th Floor, Delta House,
No.3 On Yiu Street, Shatin,
Hongkong

Gegenstand der Prüfung: Remote Unit of Tri-band Distributed Antenna System
Test item:

Bezeichnung: RA-5700-R **FCC ID:** PX8RA-5700-R
Identification:

Wareneingangs-Nr.: 173056815 **Eingangsdatum:** 20.10.2010
Receipt No.:

Prüfort: TÜV Rheinland (Guangdong) Ltd. EMC Laboratory
Testing location: Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650
P. R. China

Listed test laboratory according to FCC rules section 2.948 for measuring devices

Prüfgrundlage: TIA/EIA-603-C-2004
Test specification:
FCC "Rules and Regulations":
Part 22, subpart H, 2009
Part 24, subpart E, 2009
Part 27, 2009
Part 2, 2009

Prüfergebnis: Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n).
Test Result: The test item passed the test specification(s).


Prüflaboratorium: TÜV Rheinland (Guangdong) Ltd.
Testing Laboratory:

geprüft / tested by: kontrolliert/ reviewed by:

Mar. 10, 2011 Ken Kuang
Datum Name/Stellung
Date Name/Position



Mar. 10, 2011 Liangdong Xie
Datum Name/Stellung
Date Name/Position



Sonstiges/ Other Aspects:

Abkürzungen: P(pass) = entspricht Prüfgrundlage
F(all) = entspricht nicht Prüfgrundlage
N/A = nicht anwendbar
N/T = nicht getestet

Abbreviations: P(pass) = passed
F(all) = failed
N/A = not applicable
N/T = not tested

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 2 von 66
Page 2 of 66

TEST SUMMARY

EUT: RA-5700-R

Mode	Test items	Result
Transmitter Requirements		
LTE	RF power Output	Pass
	Occupied Bandwidth, Input/Output Comparison	Pass
	Spurious Emissions at antenna terminal	Pass
	Field Strength of Spurious Radiation	Pass
	Frequency Stability	Pass
	Error Vector Magnitude (EVM)	No limit
CDMA	RF Power Output	Pass
	Occupied Bandwidth, Input/Output Comparison	Pass
	Out-of-Band Emissions at antenna terminal	Pass
	Intermodulation Test	Pass
	Field Strength of Spurious Radiation	Pass
	Out of Band Rejection	Pass
	Frequency Stability	Pass
	Error Vector Magnitude (EVM)	No limit

Note: as the DUT is only RF amplifier without phase modulation function, the Error Vector Magnitude (EVM) is not necessary for FCC application, it is only client's additional request for verification.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 3 von 66
Page 3 of 66

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	9
3.2	RATINGS AND SYSTEM DETAILS.....	9
3.3	INDEPENDENT OPERATION MODES	10
3.4	SUBMITTED DOCUMENTS.....	10
4	TEST SET-UP AND OPERATION MODE.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	11
4.5	TEST SET-UP	12
4.6	TEST FREQUENCY SELECTION	13
5	TEST RESULTS.....	14
5 . 1	TEST RESULT OF LTE 700MHz BAND 1 AND BAND 2	14
5.1.1	RF power Output.....	14
5.1.2	Occupied bandwidth, Input/output Comparison	16
5.1.3	Spurious Radiation at antenna terminal	20
5.1.4	Field Strength of Spurious Emissions	30
5.1.5	Frequency Stability.....	33
5.1.6	Error Vector Magnitude (EVM)	35
5.2	TEST RESULT OF CDMA 850 AND CDMA 1900	37
5.2.1	RF power Output.....	37
5.2.2	Occupied bandwidth, Input/output Comparison	39

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 4 von 66
Page 4 of 66

5.2.3	<i>Out-of-Band Emissions at antenna terminal</i>	43
5.2.4	<i>Intermodulation</i>	48
5.2.5	<i>Field Strength of Spurious Emissions</i>	51
5.2.6	<i>Out-of-Band Rejection</i>	54
5.2.7	<i>Frequency Stability</i>	57
5.2.8	<i>Error Vector Magnitude (EVM)</i>	60
6	PHOTOGRAPHS OF THE TEST SET-UP	63
7	LIST OF TABLES	66
8	LIST OF PHOTOGRAPHS	66

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 5 von 66
Page 5 of 66

1 General Remarks

1.1 Complementary Materials

No attached documents in this report.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

Guangzhou Auto Market, Yuan Gang Section of Guangshan Road
Guangzhou 510650
P. R. China

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 6 von 66
Page 6 of 66

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Equipment	Manufacturer	Type	Serial No.	Calibrated until
TÜV Rheinland (Guangdong) Ltd.				
EMI Test Receiver	Rohde & Schwarz	ESCI-3	100216	16.Mar.2011
Spectrum Analyzer	Rohde & Schwarz	FSP30	100286	16.Mar.2011
Trilog-Broadband Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	209	16.Mar.2011
Trilog-Broadband Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	210	16.Mar.2011
Double-Ridged Waveguide Horn Antenna	Rohde & Schwarz	HF906	100385	16.Mar.2011
Double-Ridged Waveguide Horn Antenna	Rohde & Schwarz	HF906	100407	16.Mar.2011
Pre-amplifier	MITEQ	AFS42-00101800-25-S-42	1101599	16.Mar.2011
Band Reject Filter	Micro-Tronics	BRM50702	023	16.Mar.2011
Standard Gain Horn Antenna	EMCO	3160-09	21642	16.Mar.2011
Standard Gain Horn Antenna	EMCO	3160-09	21645	16.Mar.2011
Pre-amplifier	MITEQ	AFS33-18002650-30-8P-44	1108282	16.Mar.2011
3m Anechoic Chamber	Albatross Project GmbH	N/A	N/A	16.Mar.2011
Climatic Chamber	ESPEC	EL-04 KA	6107116	16.Mar.2011
Audio analyzer	KENWOOD	10087290	VA-2230A	16.Mar.2011
RF communication test set	HP	8920A	3417A04617	16.Mar.2011
Signal generator	Rohde & Schwarz	SMU200A	101904	13.Aug.2011
Spectrum analyzer	Agilent	N9020A	MY49060014	06.May.2011
Spectrum analyzer	Agilent	N9020A	MY50200776	10.Jun.2011
Attenuator	SHX manufacturer	30dB/50W	080820	10.Jun.2011

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 7 von 66
Page 7 of 66

2.3 Trace ability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Uncertainty for radiated emissions measurements is $\pm 4.94\text{dB}$ (30MHz-1GHz), $\pm 4.88\text{dB}$ ($>1\text{GHz}$).

The reported expanded uncertainty is based on a standard uncertainty multiply by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

2.6 Location of original data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TUV Rheinland (Guangzhou) file for certification follow-up purposes.

2.7 Status of facility used for testing


TÜV Rheinland (Guangdong) Ltd. EMC Laboratory; Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements, the register no. 833845.

3 General Product Information

The submitted sample RA-5700-R is Remote Unit (RU) of Multi-band In-band Distributed Antenna system RA-5700. The EUT supports three systems, which are LTE 700, CDMA 850 and CDMA 1900.

On the DL, combined signals as 700MHz, 850MHz and 1900MHz from the BTSs converted into optical signals after amplification in the MU. Then the optical signals are transmitted to the RU via optical fiber. The Optical TX/RX Module of RU converts the DL optical signals into RF signals. After amplification, the signals are transmitted at the MT port to the service antenna.

On the UL, the signals transmitted from the mobile station are received and converted into optical signals to MU.

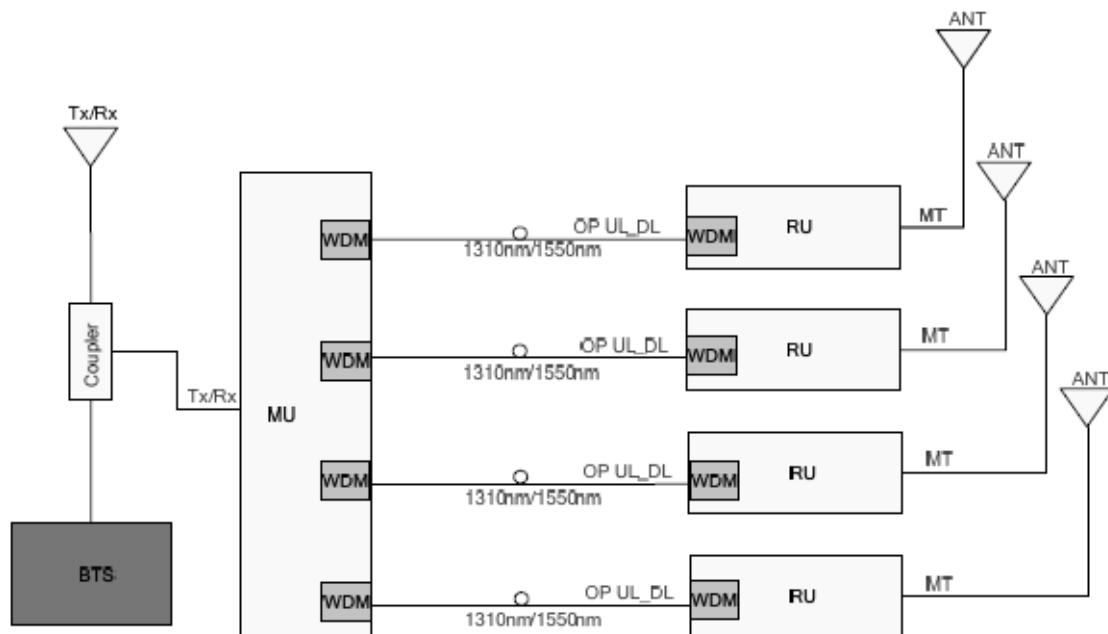

For details, refer to technical document and the user manual.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 9 von 66
Page 9 of 66

3.1 Product Function and Intended Use

For details, refer to technical document and the user manual.

3.2 Ratings and System Details

Model name	:	RA-5700-R
Supporting system	:	LTE 700, CDMA 850, CDMA 1900
Frequency range	:	LTE 700 band 1: Downlink: 728 – 746 MHz Uplink: 698 – 716 MHz LTE 700 band 2: Downlink: 746 – 756 MHz Uplink: 777 – 787 MHz CDMA 850: Downlink: 869 – 894 MHz Uplink: 824 – 849 MHz CDMA 1900: Downlink: 1930 – 1995 MHz Uplink: 1850 – 1915 MHz
Downlink RF output power	:	30dBm (LTE 700 band 1 and band 2) 30dBm (CDMA 850) 30dBm (CDMA 1900)
Type Modulation	:	LTE (for LTE 700) CDMA (for 850 and 1900)
Emission Designators	:	F9W
Type of antenna	:	External antenna
Operating temperature	:	-30°C to 50°C
Nominal power input	:	120VAC / 60Hz
Power supply operating range	:	85-264 VAC / 47-63 Hz
Rated power input	:	160W
Protection Class	:	I

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 10 von 66
Page 10 of 66

3.3 Independent Operation Modes

The EUT was powered by 120VAC. The EUT was configured for maximum gain, 30dB. Signal generator was used to provide the input signals to the EUT. Tests were performed with CDMA signal input and LTE signal input. The input power was the maximum declared by the manufacturer.

For further information refer to User Manual

3.4 Submitted Documents

- Application form
- Block Diagram
- Circuit Diagram
- Components List
- PCB layout
- FCC label
- User Manual
- Photo document

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 11 von 66
Page 11 of 66

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to Test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

The RA-5700-D is Master Unit (MU) of Multi-band In-band Distributed Antenna system RA-5700. The R-5700-D is connected with RA-5700-R for test.

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 12 von 66
Page 12 of 66

4.5 Test set-up

Diagram 1 of Measurement Equipment Configuration for Testing Radiated Emission


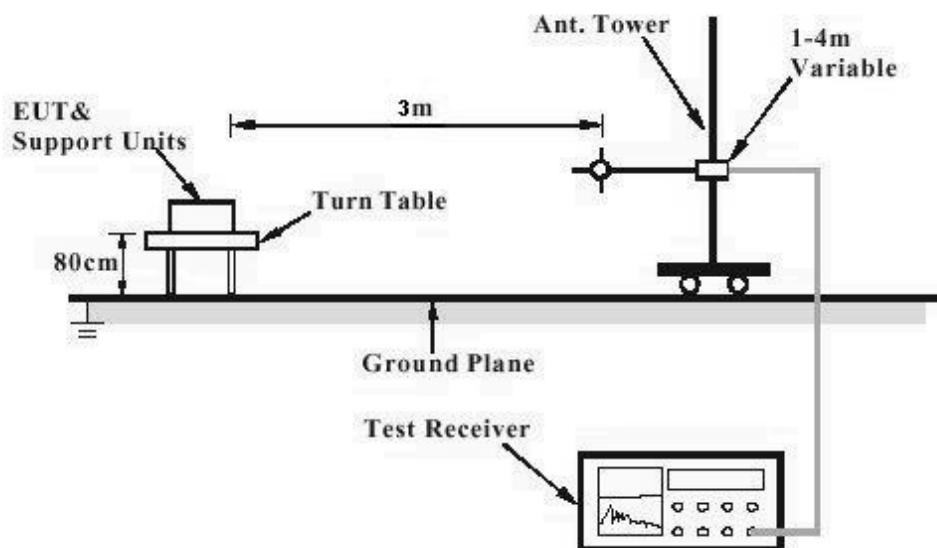


Diagram 2 of Measurement Equipment Configuration for Substitution Method

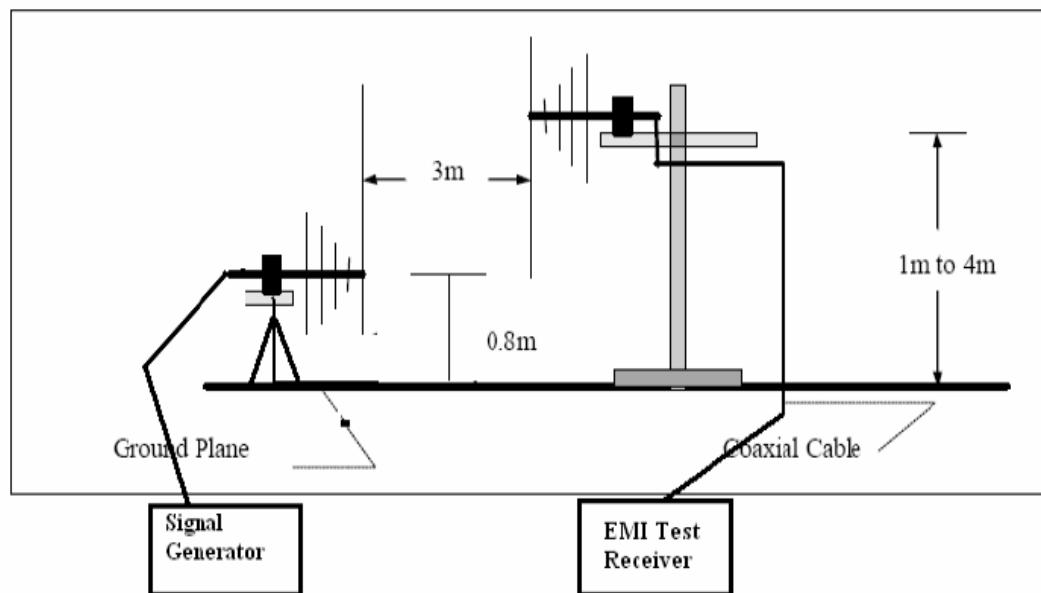

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 13 von 66
Page 13 of 66

Diagram 3 of Measurement Equipment Configuration for RF power output, Occupied Bandwidth, Spurious Emissions at antenna terminal, Intermodulation Test, Out-of-Band Rejection



4.6 Test frequency selection

Mode	Tested frequency (MHz)
LTE 700 Band 1_DL	733.0
	737.0
	741.0
LTE 700 Band 1_UL	703.0
	707.0
	711.0
LTE 700 Band 2_DL	751.0
LTE 700 Band 2_UL	782.0
CDMA 850_DL	869.62
	881.18
	893.38
CDMA 850_UL	824.62
	836.18
	848.38
CDMA 1900_DL	1930.62
	1960.18
	1989.38
CDMA 1900_UL	1850.62
	1880.18
	1909.38

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 14 von 66
Page 14 of 66

5 Test Results

5.1 Test result of LTE 700MHz band 1 and Band 2

5.1.1 RF power Output

RESULT:

Pass

Date of testing	:	28.Sep.2010
Temperature	:	22°C
Humidity	:	50%
Basic standard	:	FCC Part 2.1046(a)
Test method	:	ANSI/TIA-603-C-2004, clause 2.2.1
Operation mode	:	Transmitting with maximum RF power output

Limits:

For operating frequency band 698–746 MHz:

FCC Part 27.50 (c) (3)

Fixed and base stations transmitting a signal with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section.

For operating frequency band 746 -787 MHz:

FCC Part 27.50 (b) (4)

Fixed and base stations transmitting a signal in the 746–757 MHz, 758–763 MHz, 776–787 MHz, and 788–793 MHz bands with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP accordance with Table 3 of this section.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 15 von 66
Page 15 of 66

Measurement procedure:

1. The RF output of EUT was connected to spectrum analyzer.
2. The level of RF input signal shall be increased, until the maximum output power per channel, declared by client, is reached.
3. A spectrum analyzer was setup to measure peak power.
4. Measurements were performed at three frequencies (low, middle, and high channels) with modulation.

Test Results:

For operating frequency band 698–746 MHz:

Downlink: 728 – 746 MHz, Uplink: 698 – 716 MHz

The input signal level is 0 dBm.

Table 2: Output power at low, middle and high channel, LTE 700 Band 1_DL

Channel	Direction	Freq. (MHz)	RF power ouput (dBm)	RF power output (W)	Limit (W)
Low	DL	733.0	30.24	1.06	1000
Middle	DL	737.0	30.33	1.08	1000
High	DL	741.0	30.31	1.07	1000

For operating frequency band 746 -787 MHz:

Downlink: 746 – 756 MHz, Uplink: 777 – 787 MHz

The input signal level is 0 dBm.

Table 3: Output power at one channel, LTE 700 Band 2_DL

Channel	Direction	Freq. (MHz)	RF power ouput (dBm)	RF power output (W)	Limit (W)
One	DL	751.0	30.10	1.02	1000

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 16 von 66
Page 16 of 66

5.1.2 Occupied bandwidth, Input/output Comparison

RESULT:

Pass

Date of testing	:	29.Sep.2010
Temperature	:	22°C
Humidity	:	50%
Basic standard	:	FCC Part 2.1049
Test method	:	ANSI/TIA-603-C-2004
Operation mode	:	Transmitting with maximum RF power output
Limits	:	N/A

Measurement procedure:

1. The EUT RF output port was connected to spectrum analyzer.
2. The level of RF input signal shall be increased, until the maximum output power per channel, declared by client, is reached.
3. The spectrum analyzer was setup to measure the Occupied Bandwidth (defined as the 99% Power Bandwidth).
4. The Occupied Bandwidth was measured at the input and output ports of the EUT at low, middle and high channel of each type of modulation.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 17 von 66
Page 17 of 66

Test Results:

Table 4: 99% Occupied Bandwidth – LTE 700 Band 1_DL

Channel	Direction	Freq. (MHz)	99% Occupied bandwidth (MHz)
Lowest	DL	733.0	8.93
Middle	DL	737.0	8.93
High	DL	741.0	8.93

Table 5: 99% Occupied Bandwidth – LTE 700 Band 2_DL

Channel	Direction	Freq. (MHz)	99% Occupied bandwidth (MHz)
One	DL	751.0	8.94


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 18 von 66
Page 18 of 66

Note: only middle channel of comparison of input/output is list in the following pages.

Input/output Bandwidth Comparison – LTE 700 band 1_DL

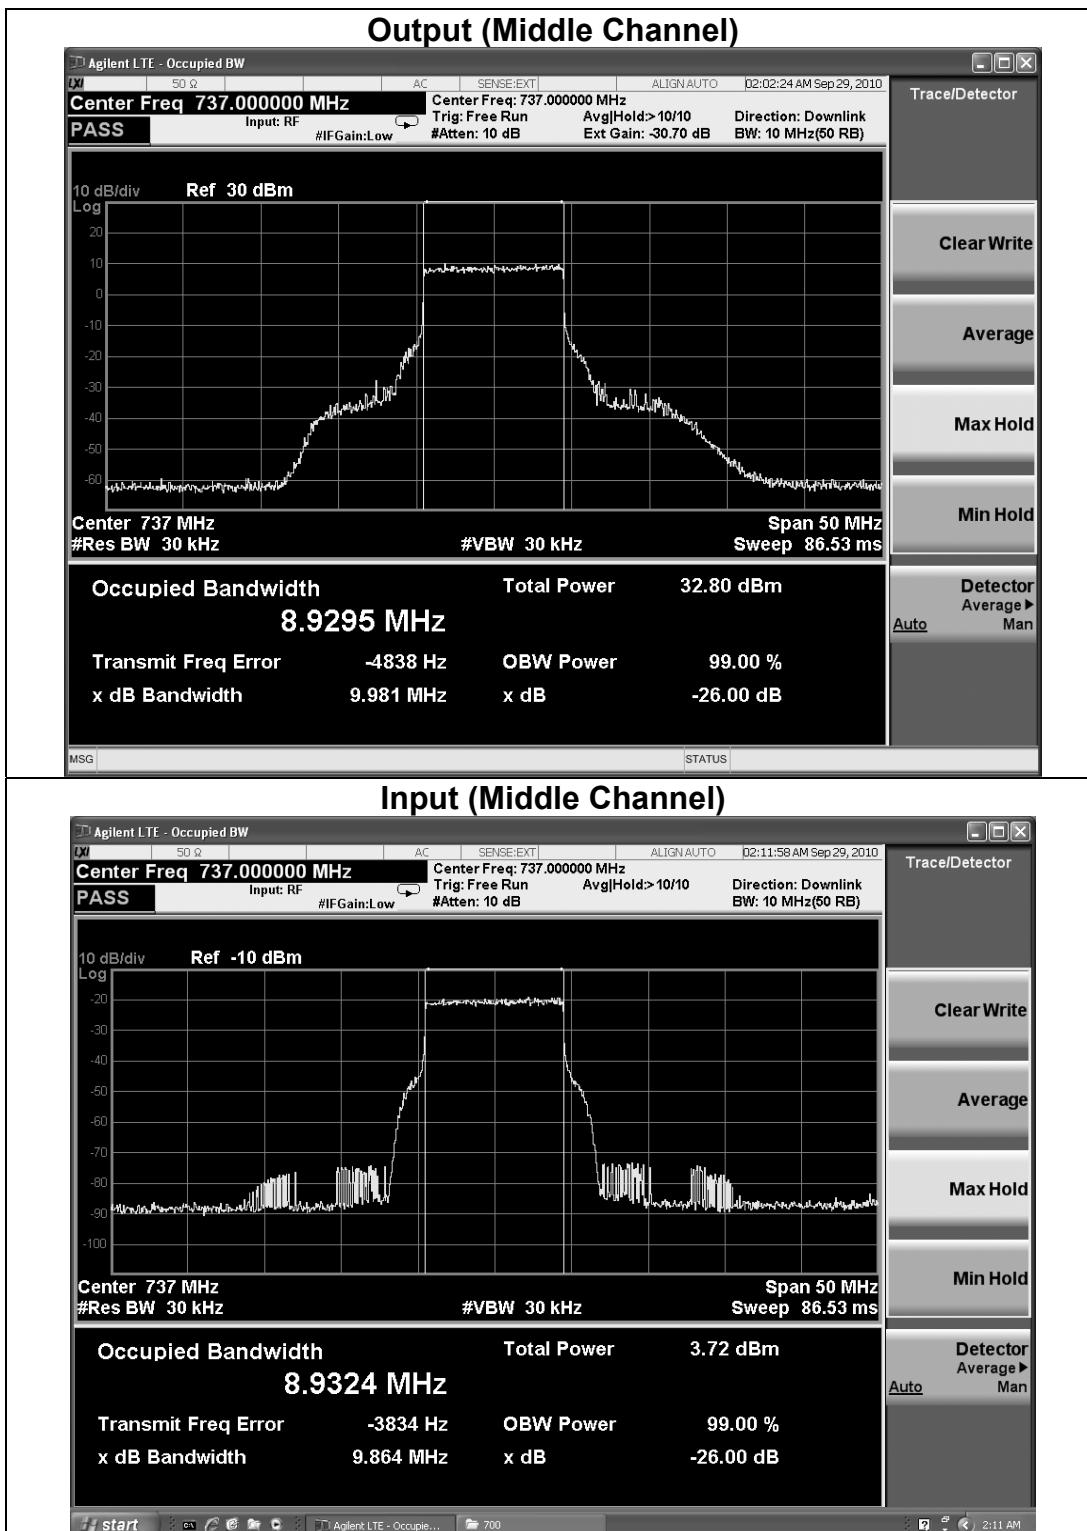


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 19 von 66
Page 19 of 66

Input/output Bandwidth Comparison – LTE 700 band 2_DL

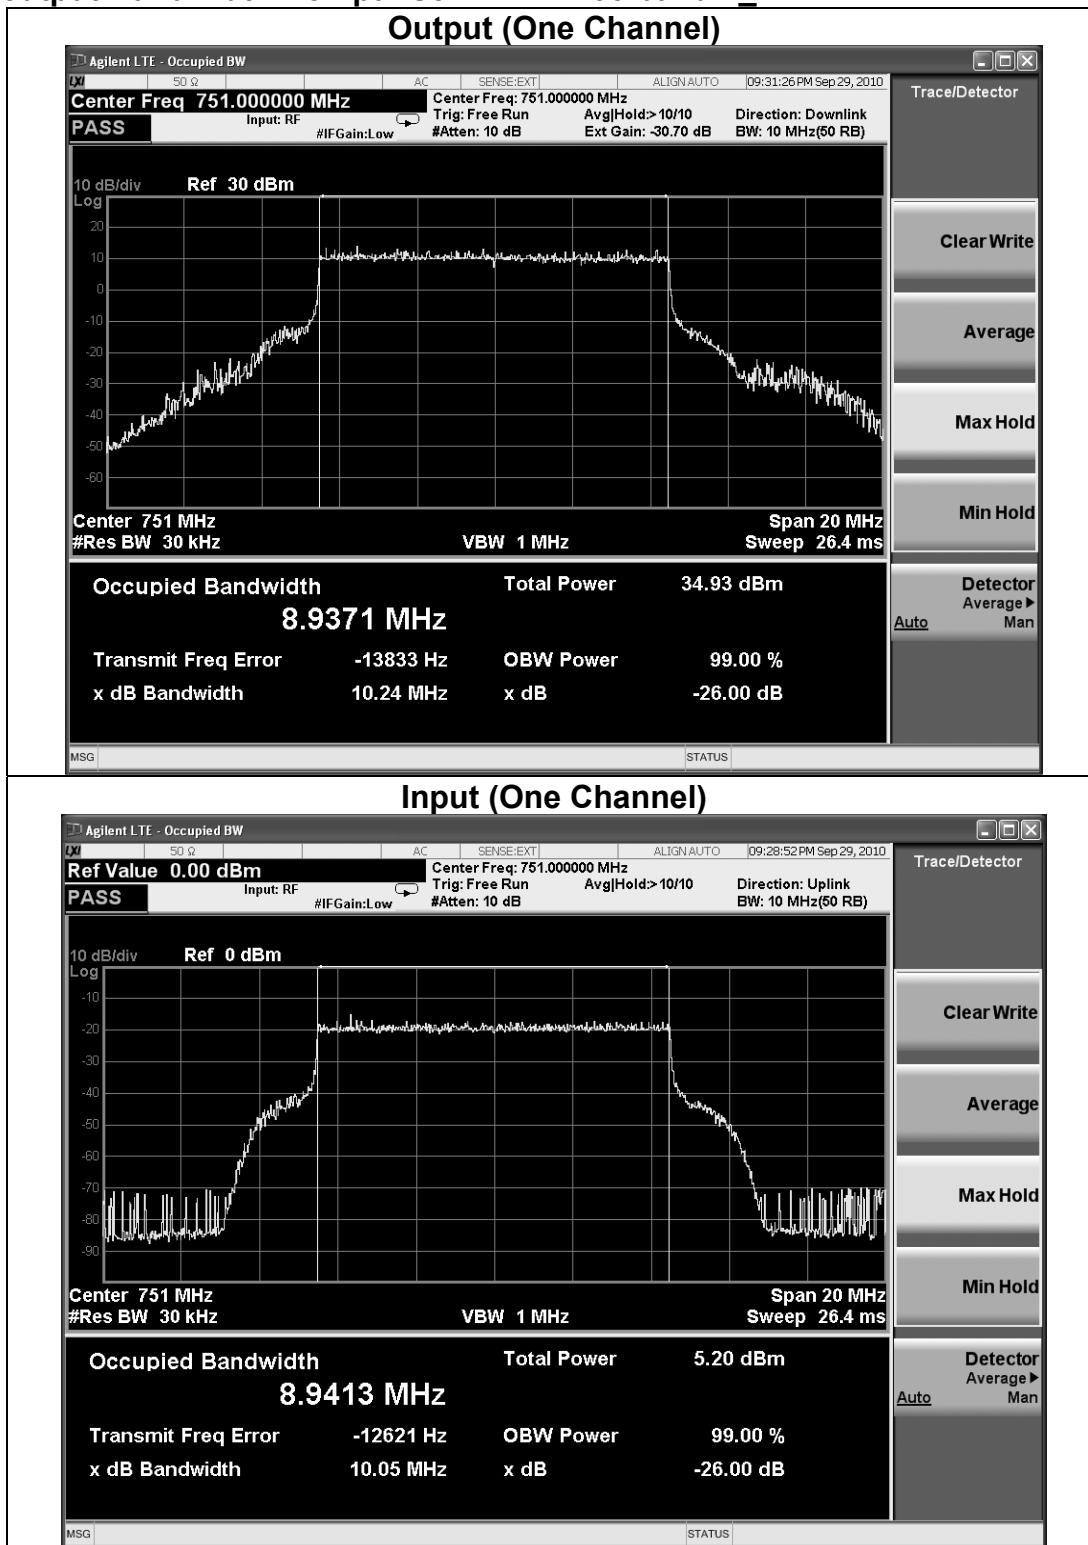

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 20 von 66
Page 20 of 66

5.1.3 Spurious Radiation at antenna terminal

RESULT:

Pass

Date of testing : 29.Sep.2010
Temperature : 22°C
Humidity : 50%
Basic standard : FCC Part 2.1051
Test method : ANSI/TIA-603-C-2004, clause 2.2.13
Operation mode : Transmitting with maximum RF power output

Limits:

For operating frequency band 698–746 MHz:

Refer to FCC Part 27.53 (g).

Operations in the 698–746 MHz band.

For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

The following method was used to determine the Limit for Spurious Emissions:

Maximum output power in watts: P (W).

The emission must be reduced by $43+10\log(P)$ dB

Therefore, the Emission Limit equals:

$$10\log(P) \text{ dBW} + 30\text{dB} - (43+10\log(P) \text{ dB}) = -13 \text{ dBm}$$

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 21 von 66
Page 21 of 66

For operating frequency band 746 -787 MHz:

Refer to FCC Part 27.53 (c) and 27.53(f).

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed.

The emission must be reduced by $76+10\log(P)$ dB at 6.25 kHz

Therefore, the Emission Limit equals:

$$10\log(P) \text{ dBW} + 30\text{dB} - (43+10\log(P) \text{ dB}) = -13 \text{ dBm}$$

The emission must be reduced by $76+10\log(P)$ dB at 6.25 kHz

Therefore, the Emission Limit equals:

$$10\log(P) \text{ dBW} + 30\text{dB} - (76+10\log(P) \text{ dB}) + 10\log(10/6.25) = -45 \text{ dBm}$$

Refer to FCC Part 27.53(f).

For operations in the 746–763 MHz, 775–793 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and – 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 22 von 66
Page 22 of 66

Measurement procedure:

1. The EUT RF output port was connected to spectrum analyzer.
2. The level of RF input signal shall be increased, until the maximum output power per channel, declared by client, is reached.
3. The spurious emissions at antenna were measured at the RF output port of the EUT at middle channel of each type of modulation.


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 23 von 66
Page 23 of 66

Test Results:

Antenna Terminal Spurious Emissions – Band Edge Emissions, LTE 700 Band 1_DL

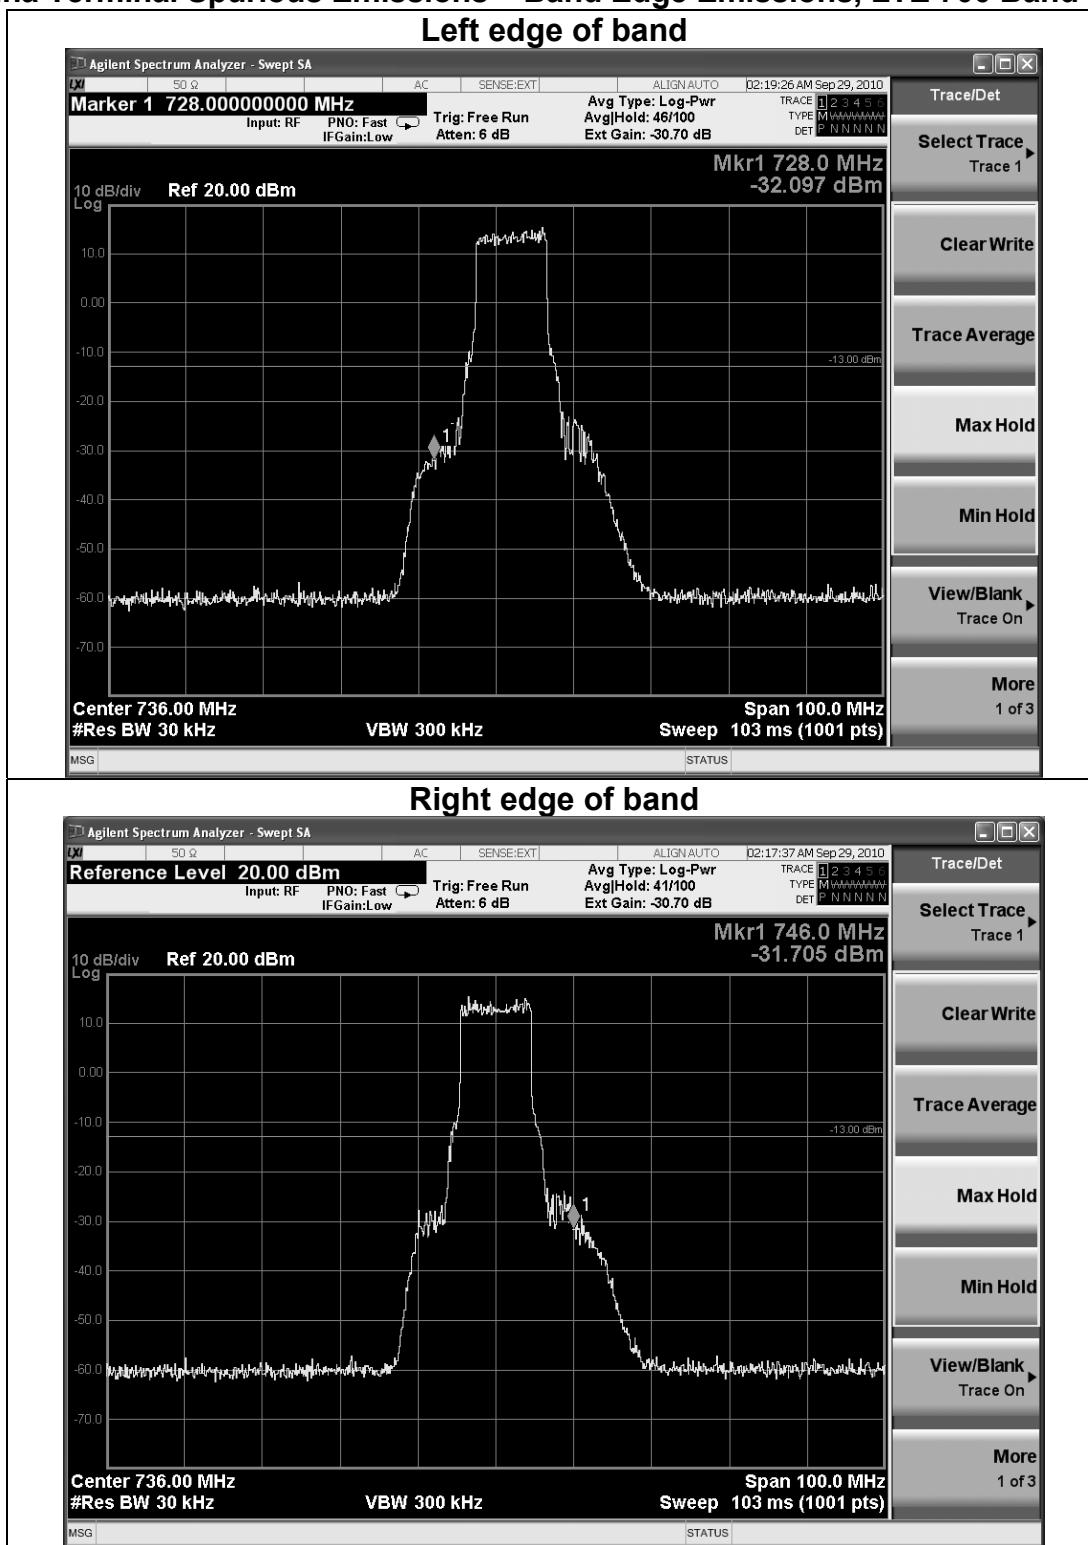


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 24 von 66
Page 24 of 66

Antenna Terminal Spurious Emissions, LTE 700 Band 1_DL

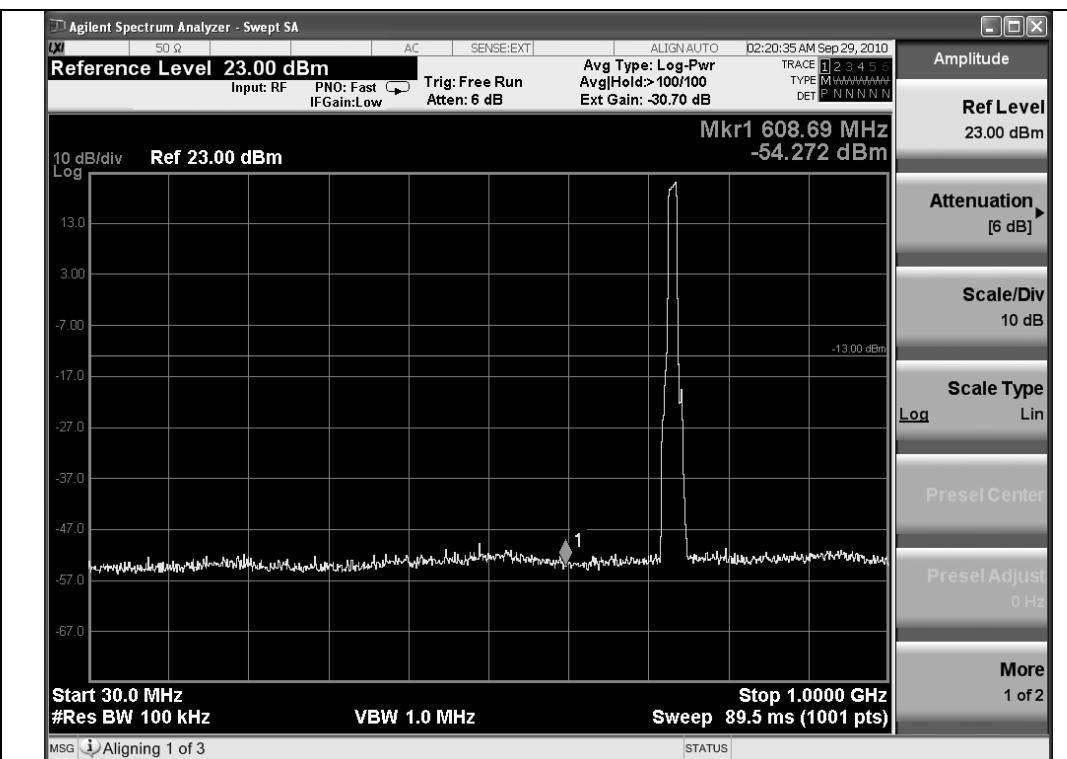


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 25 von 66
Page 25 of 66

Antenna Terminal Spurious Emissions – Band Edge Emissions, LTE 700 Band 2_DL

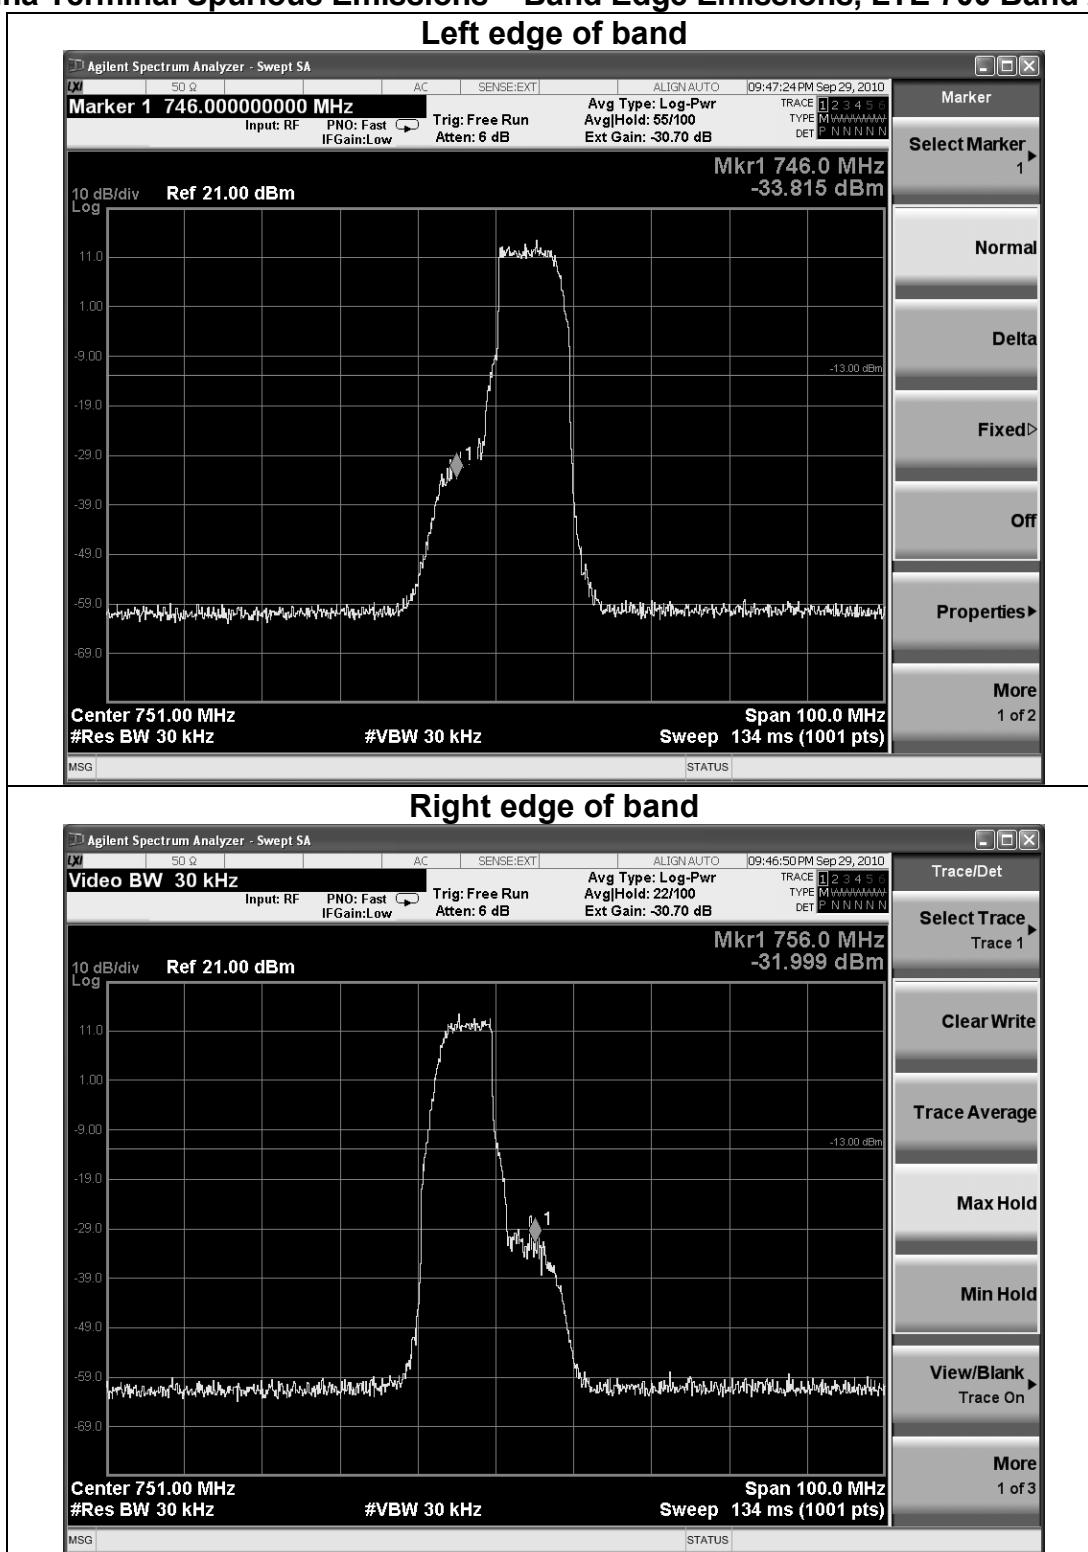


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 26 von 66
Page 26 of 66

Antenna Terminal Spurious Emissions, LTE 700 Band 2_DL

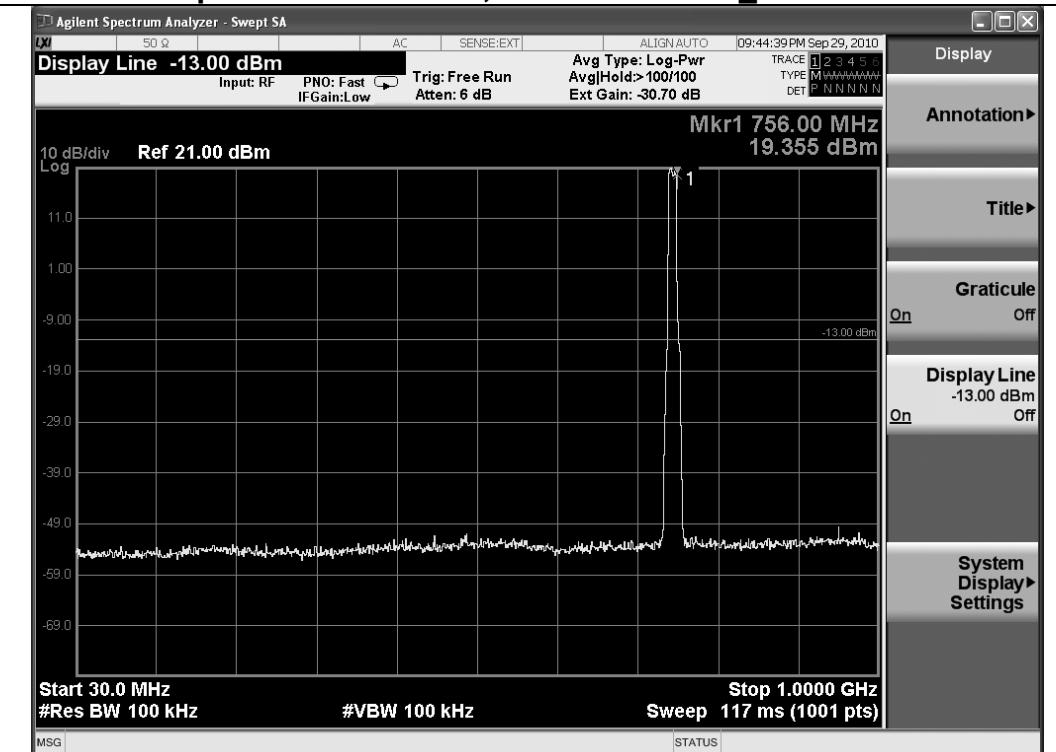


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 27 von 66
Page 27 of 66

Antenna Terminal Spurious Emissions within 763 – 775 MHz, LTE 700 Band 2_DL

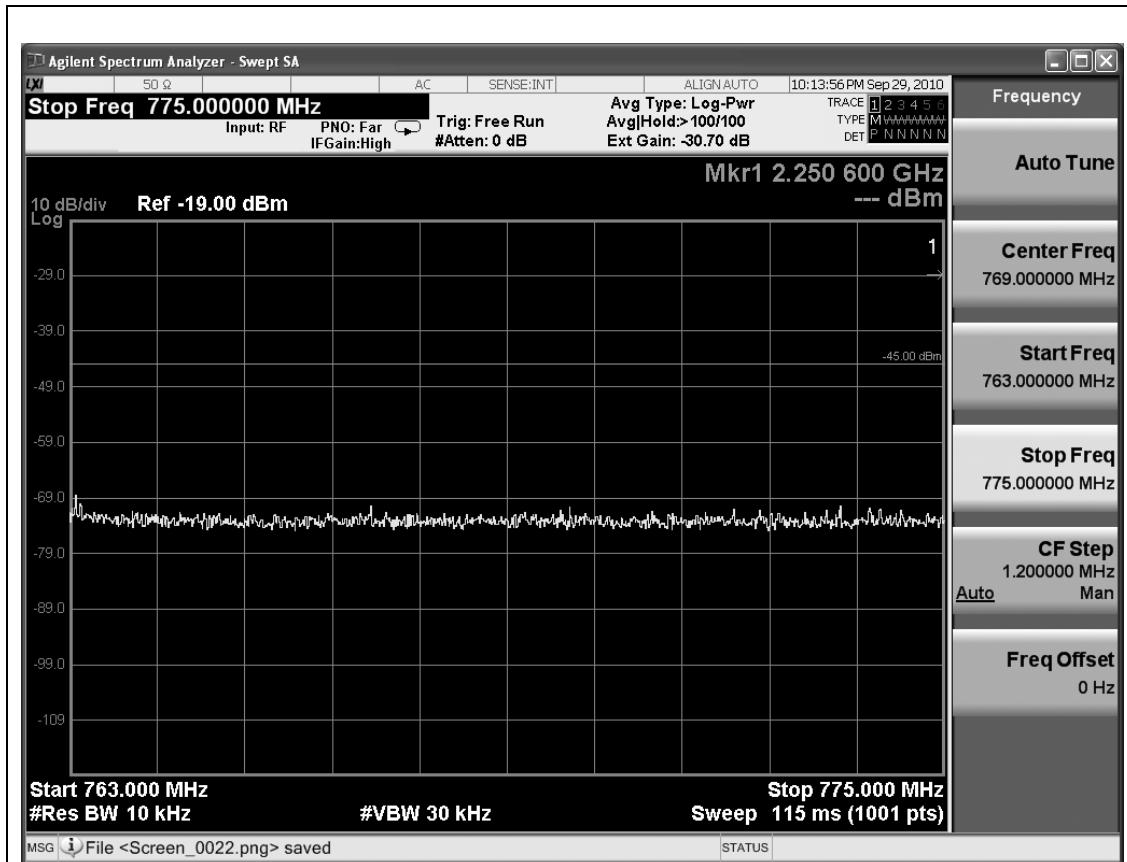


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 28 von 66
Page 28 of 66

Antenna Terminal Spurious Emissions within 793 – 805 MHz, LTE 700 Band 2_DL

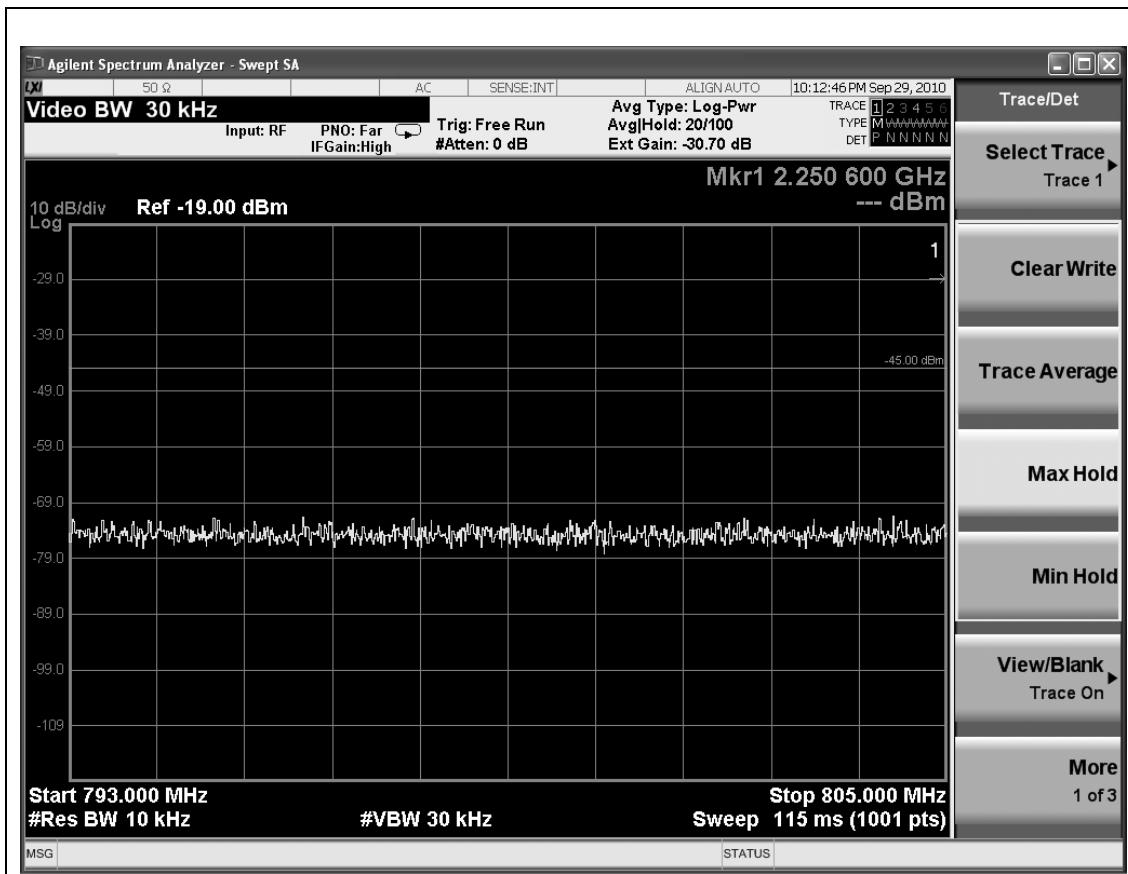


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 29 von 66
Page 29 of 66

Antenna Terminal Spurious Emissions within 1559 – 1610 MHz, additional requirement 27.53(f), limit: - 70dBW/MHz, LTE 700 Band 2_DL

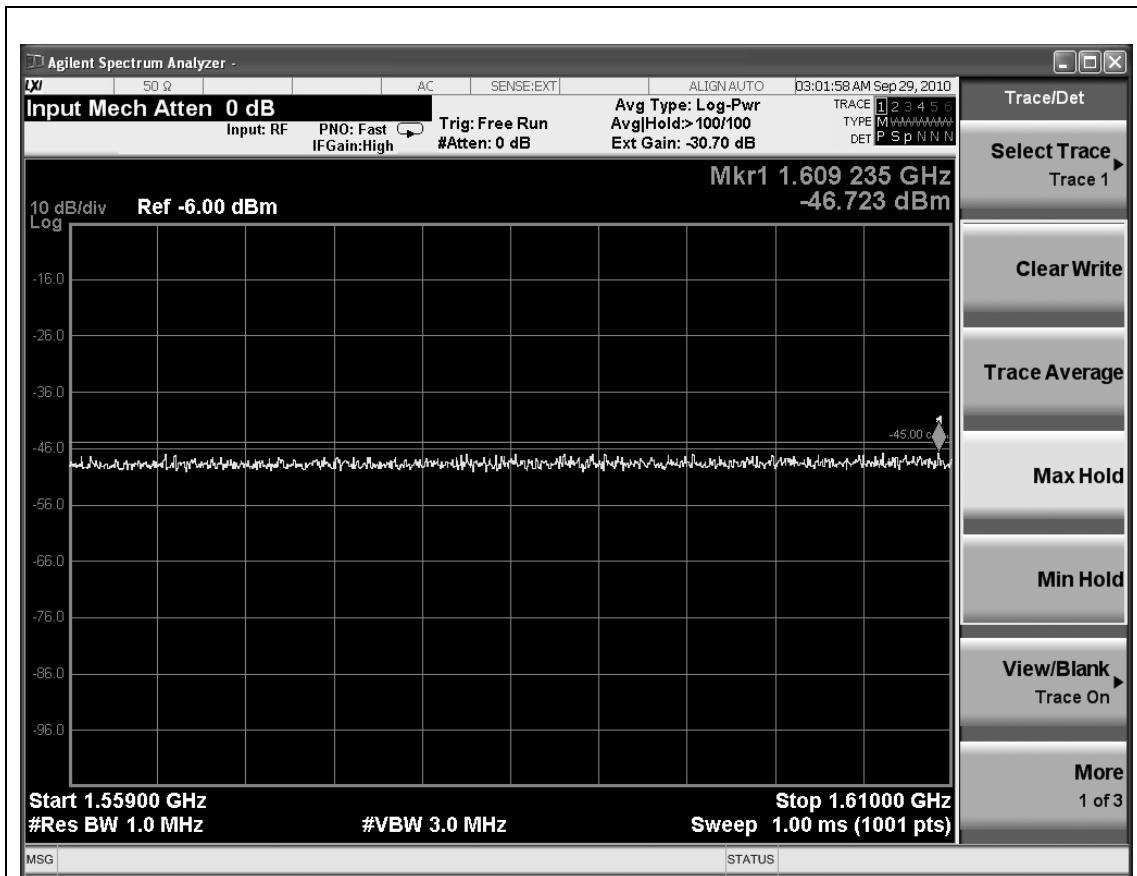

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 30 von 66
Page 30 of 66

5.1.4 Field Strength of Spurious Emissions

RESULT:

Pass

Date of testing : 13.Jan.2011
Temperature : 22°C
Humidity : 50%
Basic standard : FCC Part 2.1053
Test method : ANSI/TIA-603-C-2004, clause 2.2.12
Operation mode : Transmitting with maximum RF power output

Limits:

For operating frequency band 698–746 MHz:

Refer to FCC Part 27.53 (g).

Operations in the 698–746 MHz band.

For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operating frequency band 746 -787 MHz:

Refer to FCC Part 27.53 (c).

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 31 von 66
Page 31 of 66

Measurement procedure:

1. The EUT RF output port was connected to 50 ohm RF load.
2. The EUT input port was connected to signal generator and was setup to transmit maximum power.
3. The measurement antenna was placed at a distance of 3 meters from the EUT.
4. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from EUT.
5. The frequency range up to 10-th harmonic of each of the three fundamental frequencies (low, middle and high channels) was investigated. The worst case of emissions was reported.
6. For spurious emissions attenuation, the substitution method was used.
7. The EUT was substituted by a reference antenna (half-wave dipole – below 1 GHz, or Horn antenna – above 1 GHz), connected to a signal generator.
8. The signal generator output level was adjusted to obtain the same reading as from EUT. The EIRP at the spurious emissions frequency was calculated as follows:

$$\text{EIRP(dBm)} = \text{Reading (SG)} + \text{Cable loss(dB)} + G(\text{dBi})$$

According the limit specified in 27.53(c) and 27.53(g) :

The following method was used to determine the Limit for Spurious Emissions:

Maximum output power in watts: P (W).

The emission must be reduced by $43+10\log(P)$ dB

Therefore, the Emission Limit equals:

$$10\log(P) \text{ dBW} + 30 \text{ dB} - (43+10\log(P) \text{ dB}) = -13 \text{ dBm}$$

Prüfbericht - Nr.:
Test Report No.:**16026515 001**Seite 32 von 66
Page 32 of 66**Test Results:**

There were no emissions detected above the noise floor, which was at least 20 dB below the specification limit.

Table 6: Transmitter Spurious Radiated Emissions - LTE 700 band 1_DL

Freq. (MHz)	Polariz ation (V/H)	Reading (SG) (dBm)	Cable loss (dB)	Antenna Gain(dBi)	Transmit power (dBm)	Limit (dBm)
1474	H	-55.75	7.4	5.25	-57.9	-13
2211	H	-61.25	8.7	6.75	-63.2	-13
2948	H	-66.85	10.2	6.95	-70.1	-13
3685	H	-32.45	11.2	8.25	-35.4	-13
4422	H	-59.65	12.5	8.65	-63.5	-13
5159	H	-65.95	14.6	8.25	-72.3	-13
1474	V	-62.65	7.4	5.25	-64.8	-13
2211	V	-59.95	8.7	6.75	-61.9	-13
2948	V	-69.95	10.2	6.95	-73.2	-13
3685	V	-29.65	11.2	8.25	-32.6	-13
4422	V	-44.65	12.5	8.65	-48.5	-13
5159	V	-64.45	14.6	8.25	-70.8	-13

Note: All other emissions not reported are more than 20 dB below the limit.

Table 7: Transmitter Spurious Radiated Emissions - LTE 700 band 2_DL

Freq. (MHz)	Polariz ation (V/H)	Reading (SG) (dBm)	Cable loss (dB)	Antenna Gain(dBi)	Transmit power (dBm)	Limit (dBm)
1502	H	-60.75	7.4	5.35	-62.8	-13
2253	H	-63.04	8.7	6.84	-64.9	-13
3004	H	-68.12	10.2	7.12	-71.2	-13
3755	H	-27.75	11.2	8.25	-30.7	-13
4506	H	-42.45	12.5	8.65	-46.3	-13
5257	H	-62.13	14.6	8.43	-68.3	-13
1502	V	-60.25	7.4	5.35	-62.3	-13
2253	V	-58.44	8.7	6.84	-60.3	-13
3004	V	-68.12	10.2	7.12	-71.2	-13
3755	V	-31.65	11.2	8.25	-34.6	-13
4506	V	-39.65	12.5	8.65	-43.5	-13
5257	V	-63.23	14.6	8.43	-69.4	-13

Note: All other emissions not reported are more than 20 dB below the limit.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 33 von 66
Page 33 of 66

5.1.5 Frequency Stability

RESULT:

Pass

Date of testing	:	29.Sep.2010
Temperature	:	-30°C to 50°C
Humidity	:	50%
Basic standard	:	FCC Part 2 Per Section 2.1055
Test method	:	ANSI/TIA-603-C-2004, clause 2.2.2
Operation mode	:	Transmitting with maximum RF power output
Limits:	:	

Refer to FCC Part 27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized of operation.

Measurement procedure:

1. The EUT was placed inside the temperature chamber.
2. The RF output port was connected to a spectrum analyzer.
3. The level of RF input signal shall be increased, until the maximum output power per channel, declared by client, is reached.
4. After the temperature stabilized for approximately 20 min, the transmitting frequency was measured by the spectrum analyzer and recorded.
5. At room temperature, the frequency was measured when EUT was powered with the nominal voltage and with 85% and 115% of the nominal voltage.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 34 von 66
Page 34 of 66

Test Results:

Table 8: Frequency stability - LTE 700_DL

Operating frequency : 737.000000 MHz
Channel : Middle
Reference Voltage : 120 VAC

Voltage with nominal Voltage	Power (VAC)	Temp (°C)	Measured Freq (MHz)	Deviation (ppm)	Limit (ppm)
100%	120	+20(Ref)	737.000000	Ref	1.5
100%		-30	736.999996	0.005	
100%		-20	736.999997	0.004	
100%		-10	736.999997	0.004	
100%		0	736.999998	0.003	
100%		+10	736.999998	0.003	
100%		+20	737.000002	0.003	
100%		+30	737.000003	0.004	
100%		+40	737.000001	0.002	
100%		+50	737.000001	0.002	
85%	102	+20	737.000002	0.003	
115%	138	+20	737.000001	0.002	

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 35 von 66
Page 35 of 66

5.1.6 Error Vector Magnitude (EVM)

RESULT:

No Limit

Date of testing	:	04.Mar.2011
Temperature	:	22°C
Humidity	:	50%
Basic standard	:	---
Test method	:	ANSI/TIA-603-C-2004
Operation mode	:	Transmitting with maximum RF power output
Limits	:	N/A

Measurement procedure:

1. The EUT RF output port was connected to spectrum analyzer.
2. The level of RF input signal shall be increased, until the maximum output power per channel, declared by client, is reached.
3. The spectrum analyzer was setup to measure the Error Vector Magnitude (EVM) of output signal.

The EVM was measured at the output port of the EUT at the middle channel of each type of modulation.

Prüfbericht - Nr.:
Test Report No.:


16026515 001

Seite 36 von 66
Page 36 of 66

Test result:

Table 9: EVM, LTE 700_DL

Channel	Direction	Freq. (MHz)	EVM Pk (%)	EVM RMS (%)
One	DL	751.0	4.56	1.17

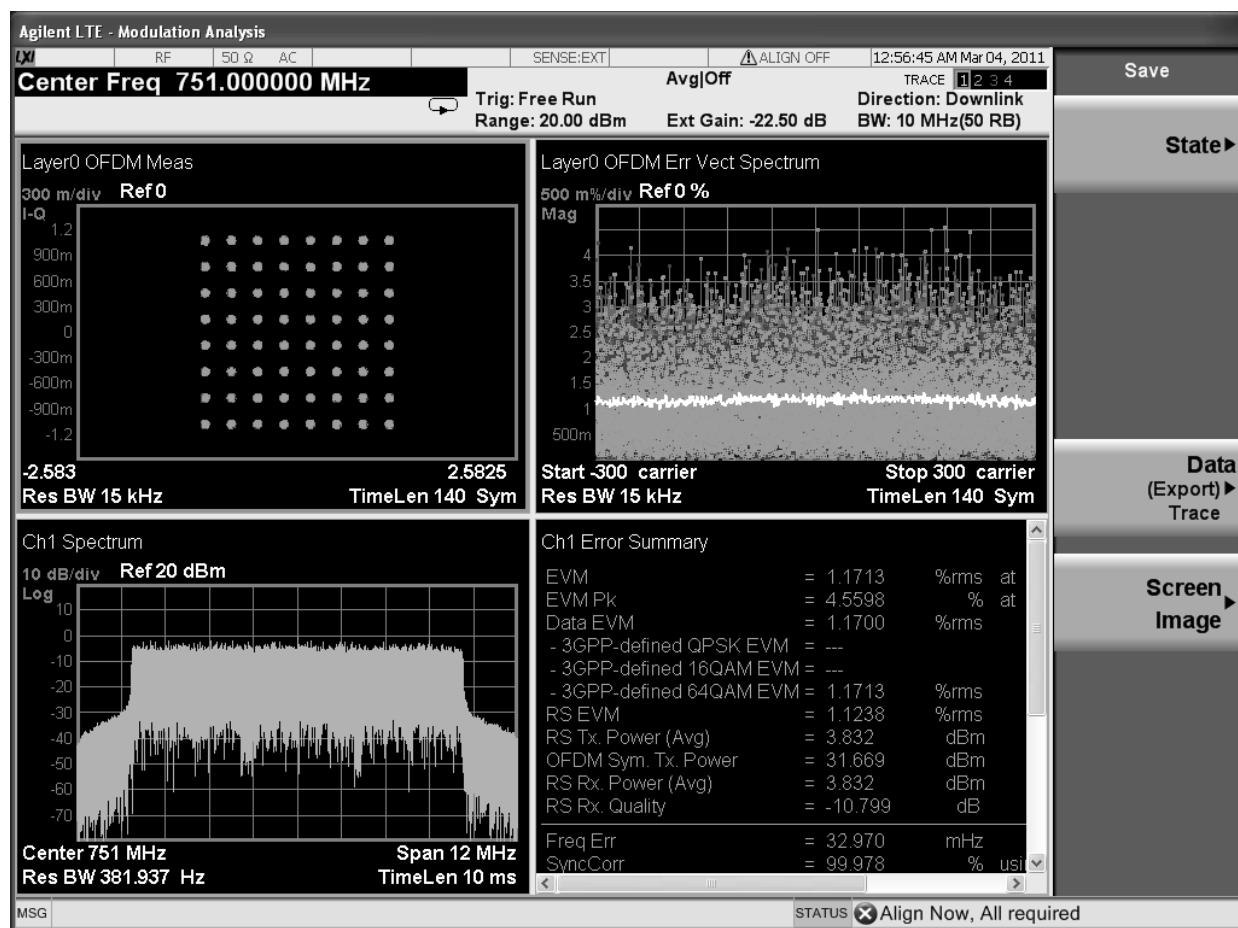

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 37 von 66
Page 37 of 66

5.2 Test result of CDMA 850 and CDMA 1900

5.2.1 RF power Output

RESULT:

Pass

Date of testing	:	28.Sep.2010
Temperature	:	22°C
Humidity	:	50%
Basic standard	:	FCC Part 2.1046(a)
Test method	:	ANSI/TIA-603-C-2004, clause 2.2.1
Operation mode	:	Transmitting with maximum RF power output

Limits:

For CDMA 850:

FCC Part 22.931 (a)

The effective radiated power (ERP) of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

(a) *Maximum ERP*. In general, the effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 watts.

For CDMA 1900:

FCC Part 24.232 (b) (4)

Base stations are limited to 1640 watts peak equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT. Base station antenna heights may exceed 300 meters with a corresponding reduction in power; see Table 1 of this section.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 38 von 66
Page 38 of 66

Measurement procedure:

1. The RF output of EUT was connected to spectrum analyzer.
2. The level of RF input signal shall be increased, until the maximum output power per channel, declared by client, is reached.
3. A spectrum analyzer was setup to measure peak power.
4. Measurements were performed at three frequencies (low, middle, and high channels) with modulation.

Test Results:

For CDMA 850:

Downlink: 869 – 894 MHz, Uplink: 824 – 849 MHz

The input signal level is 0 dBm.

Table 10: Output power at low, middle and high channel, CDMA 850_DL

Channel	Direction	Freq. (MHz)	RF power ouput (dBm)	RF power output (W)	Limit (W)
Low	DL	869.62MHz	29.30	0.85	500
Middle	DL	881.18MHz	29.85	0.86	500
High	DL	893.38MHz	29.46	0.88	500

For CDMA 1900:

Downlink: 1930 – 1995 MHz, Uplink: 1850 – 1915 MHz

The input signal level is 0 dBm.

Table 11: Output power at low, middle and high channel, CDMA 1900_DL

Channel	Direction	Freq. (MHz)	RF power ouput (dBm)	RF power output (W)	Limit (W)
Low	DL	1930.62	29.93	0.98	500
Middle	DL	1960.18	30.71	1.18	500
High	DL	1989.38	29.07	0.81	500

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 39 von 66
Page 39 of 66

5.2.2 Occupied bandwidth, Input/output Comparison

RESULT:

Pass

Date of testing	:	28.Sep.2010
Temperature	:	22°C
Humidity	:	50%
Basic standard	:	FCC Part 2.1049
Test method	:	ANSI/TIA-603-C-2004
Operation mode	:	Transmitting with maximum RF power output
Limits	:	N/A

Measurement procedure:

1. The EUT RF output port was connected to spectrum analyzer.
2. The level of RF input signal shall be increased, until the maximum output power per channel, declared by client, is reached.
3. The spectrum analyzer was setup to measure the Occupied Bandwidth (defined as the 99% Power Bandwidth).
4. The Occupied Bandwidth was measured at the input and output ports of the EUT at low, middle and high channel of each type of modulation.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 40 von 66
Page 40 of 66

Test Results:

CDMA 850:

Table 12: 99% Occupied Bandwidth – CDMA 850_DL

Channel	Direction	Freq. (MHz)	99% Occupied bandwidth (MHz)
Lowest	DL	869.62	1.2730
Middle	DL	881.18	1.2698
High	DL	893.38	1.2673

CDMA 1900:

Table 13: 99% Occupied Bandwidth – CDMA 1900_DL

Channel	Direction	Freq. (MHz)	99% Occupied bandwidth (MHz)
Lowest	DL	1930.62	1.2681
Middle	DL	1960.18	1.2703
High	DL	1989.38	1.2682



Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 41 von 66
Page 41 of 66

Note: only middle channel of comparison of input/output is list in the following pages.

Input/output Bandwidth Comparison – CDMA 850_DL

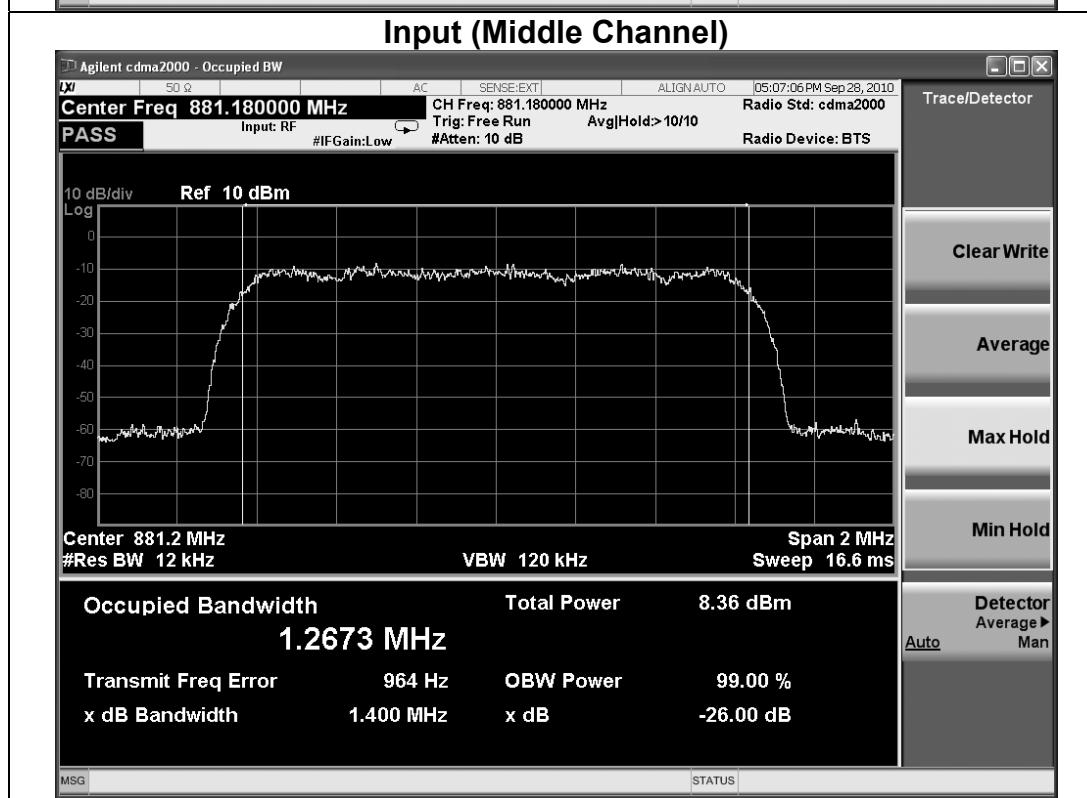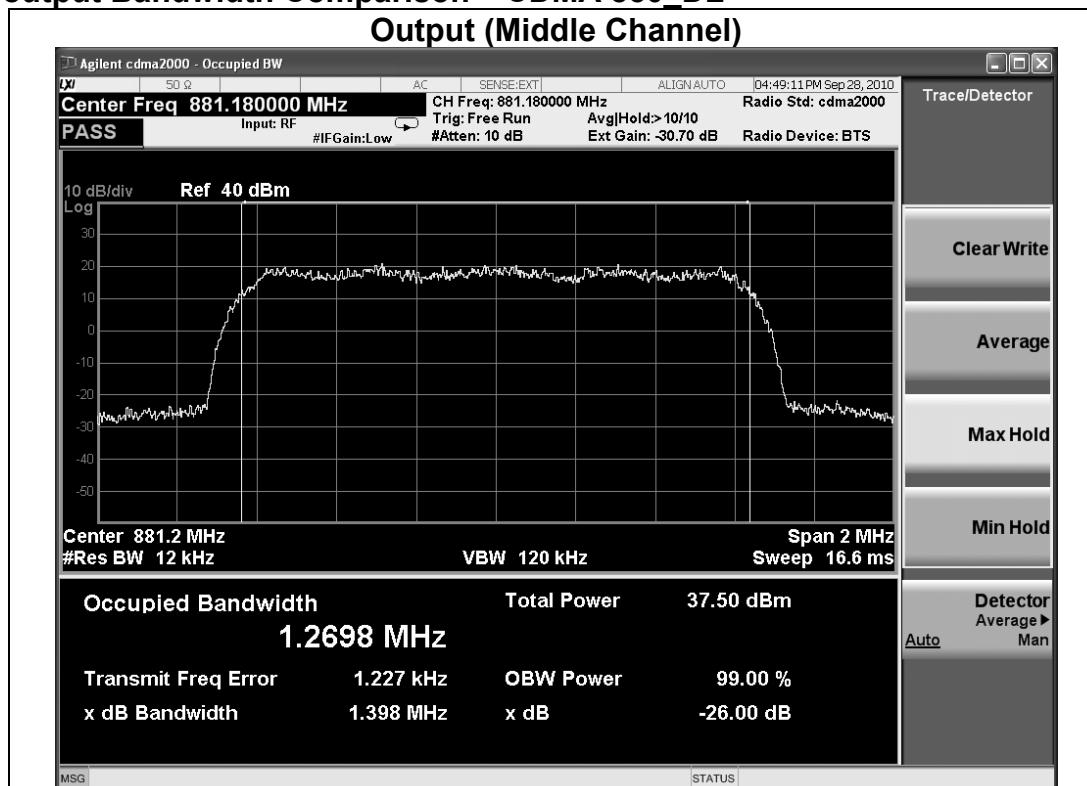

Prüfbericht - Nr.:
Test Report No.:


16026515 001

Seite 42 von 66
Page 42 of 66

Note: only middle channel of comparison of input/output is list in the following pages.

Input/output Bandwidth Comparison – CDMA 1900_DL

Output (Middle Channel)

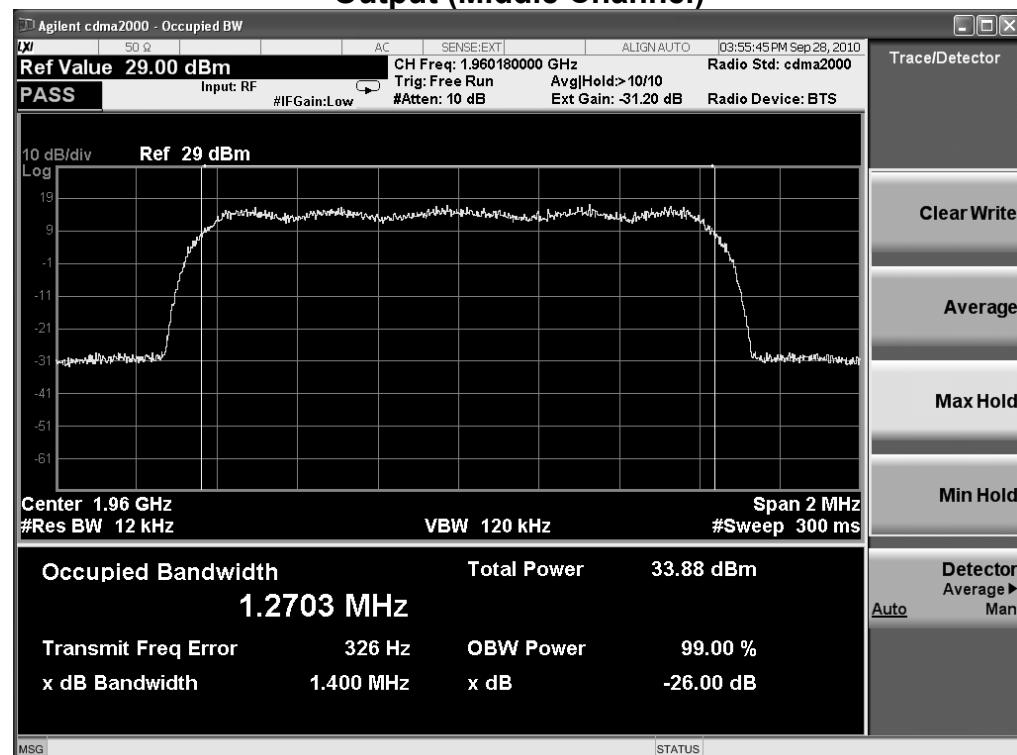

Trace/Detector

Clear Write

Average


Max Hold

Min Hold

Detector Average ► Man

Auto

Input (Middle Channel)

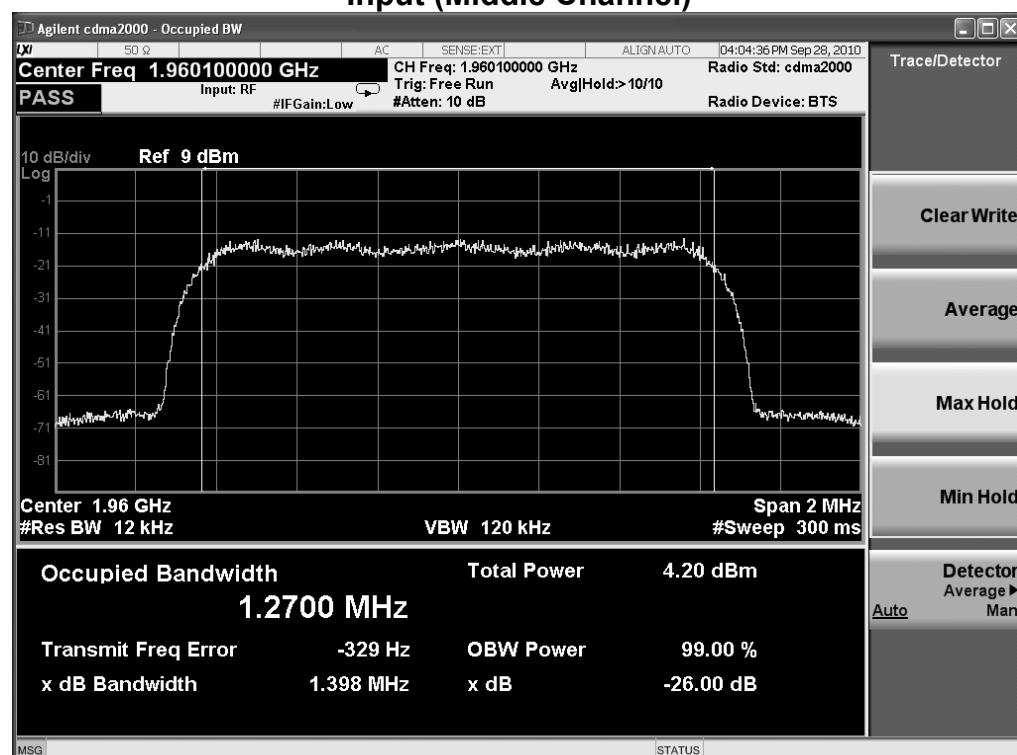

Trace/Detector

Clear Write

Average

Max Hold

Min Hold

Detector Average ► Man

Auto

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 43 von 66
Page 43 of 66

5.2.3 Out-of-Band Emissions at antenna terminal

RESULT:

Pass

Date of testing : 29.Sep.2010
Temperature : 22°C
Humidity : 50%
Basic standard : FCC Part 2.1051
Test method : ANSI/TIA-603-C-2004, clause 2.2.13
Operation mode : Transmitting with maximum RF power output

Limits :

Refer to FCC Part 22.917(a) for CDMA 850.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Refer to FCC Part 24.238(a) for CDMA 1900.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The following method was used to determine the Limit for Spurious Emissions:

Maximum output power in watts: P (W).

The emission must be reduced by $43+10\log(P)$ dB

Therefore, the Emission Limit equals:

$$10\log(P) \text{ dBW} + 30 \text{ dB} - (43+10\log(P) \text{ dB}) = -13 \text{ dBm}$$

Measurement procedure:

1. The EUT RF output port was connected to spectrum analyzer.
2. The level of RF input signal shall be increased, until the maximum output power per channel, declared by client, is reached.
3. The spurious emissions at antenna were measured at the RF output port of the EUT at low, middle and high channel of each type of modulation.
4. The spectrum analyzer resolution bandwidth (RBW) was set to 1 MHz for above 1 GHz and 100 kHz for the cell band.

Prüfbericht - Nr.:
Test Report No.:


16026515 001

Seite 44 von 66
Page 44 of 66

Test Results:

The low channel caused the worst emissions and list in the following page.

Antenna Terminal Spurious Emissions, CDMA 850_DL, Low channel

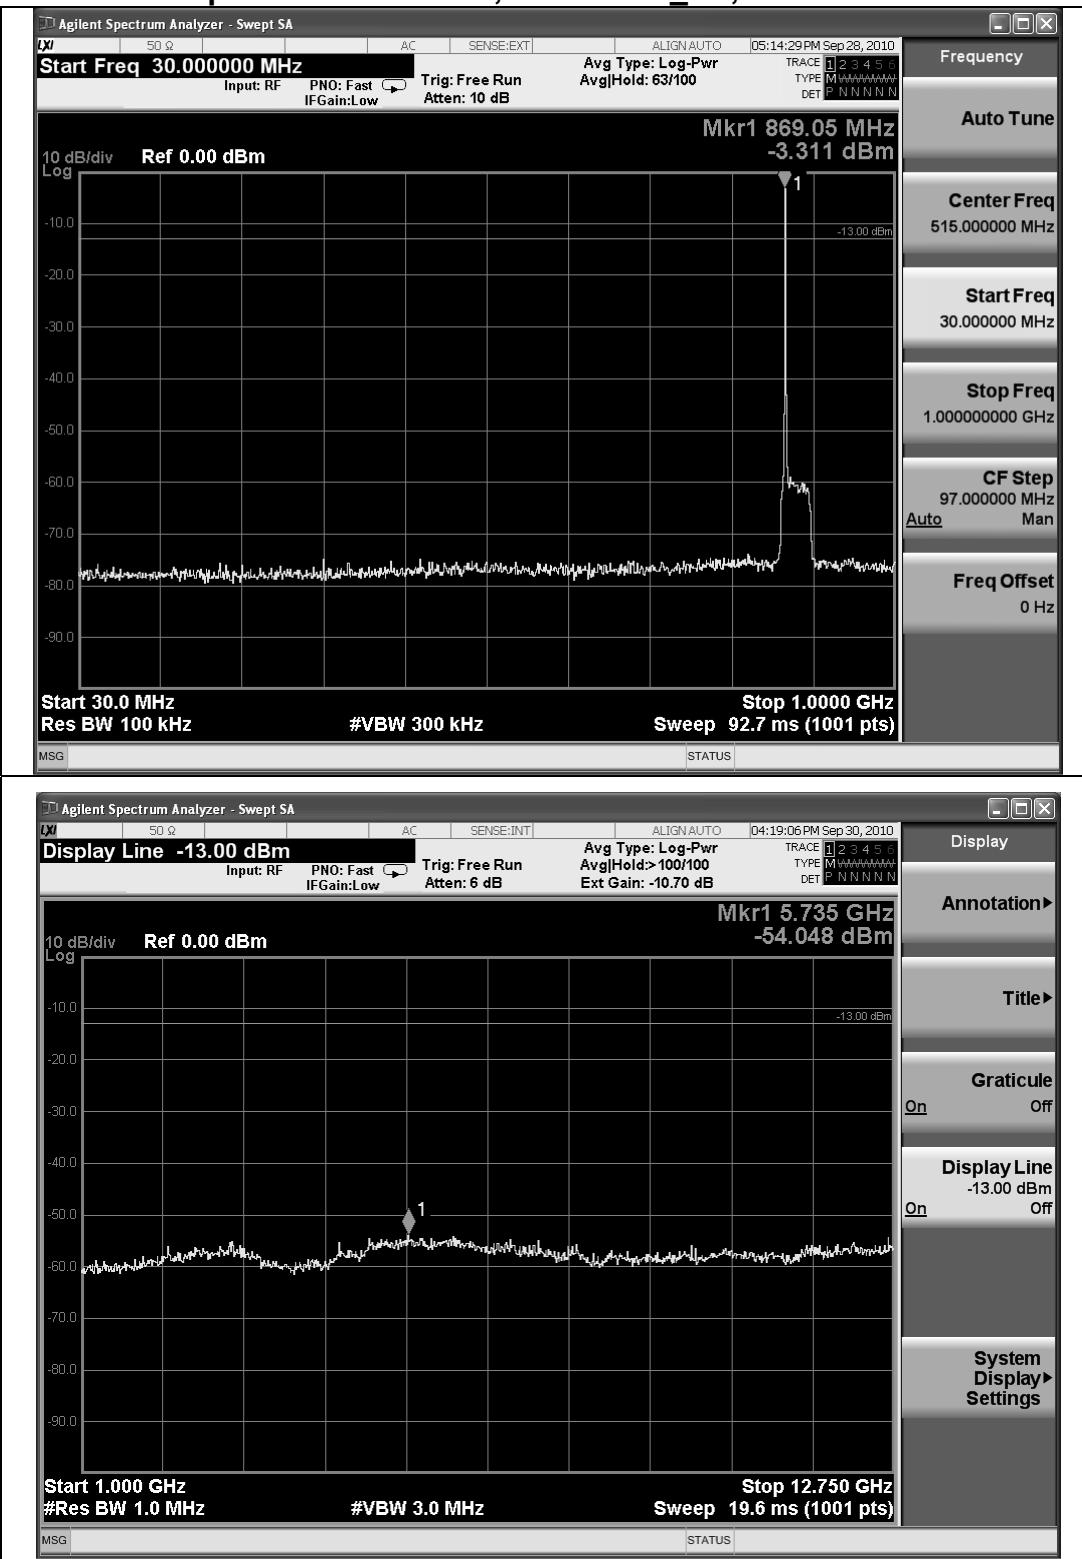


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 45 von 66
Page 45 of 66

Antenna Terminal Spurious Emissions, CDMA 1900_DL, Low channel

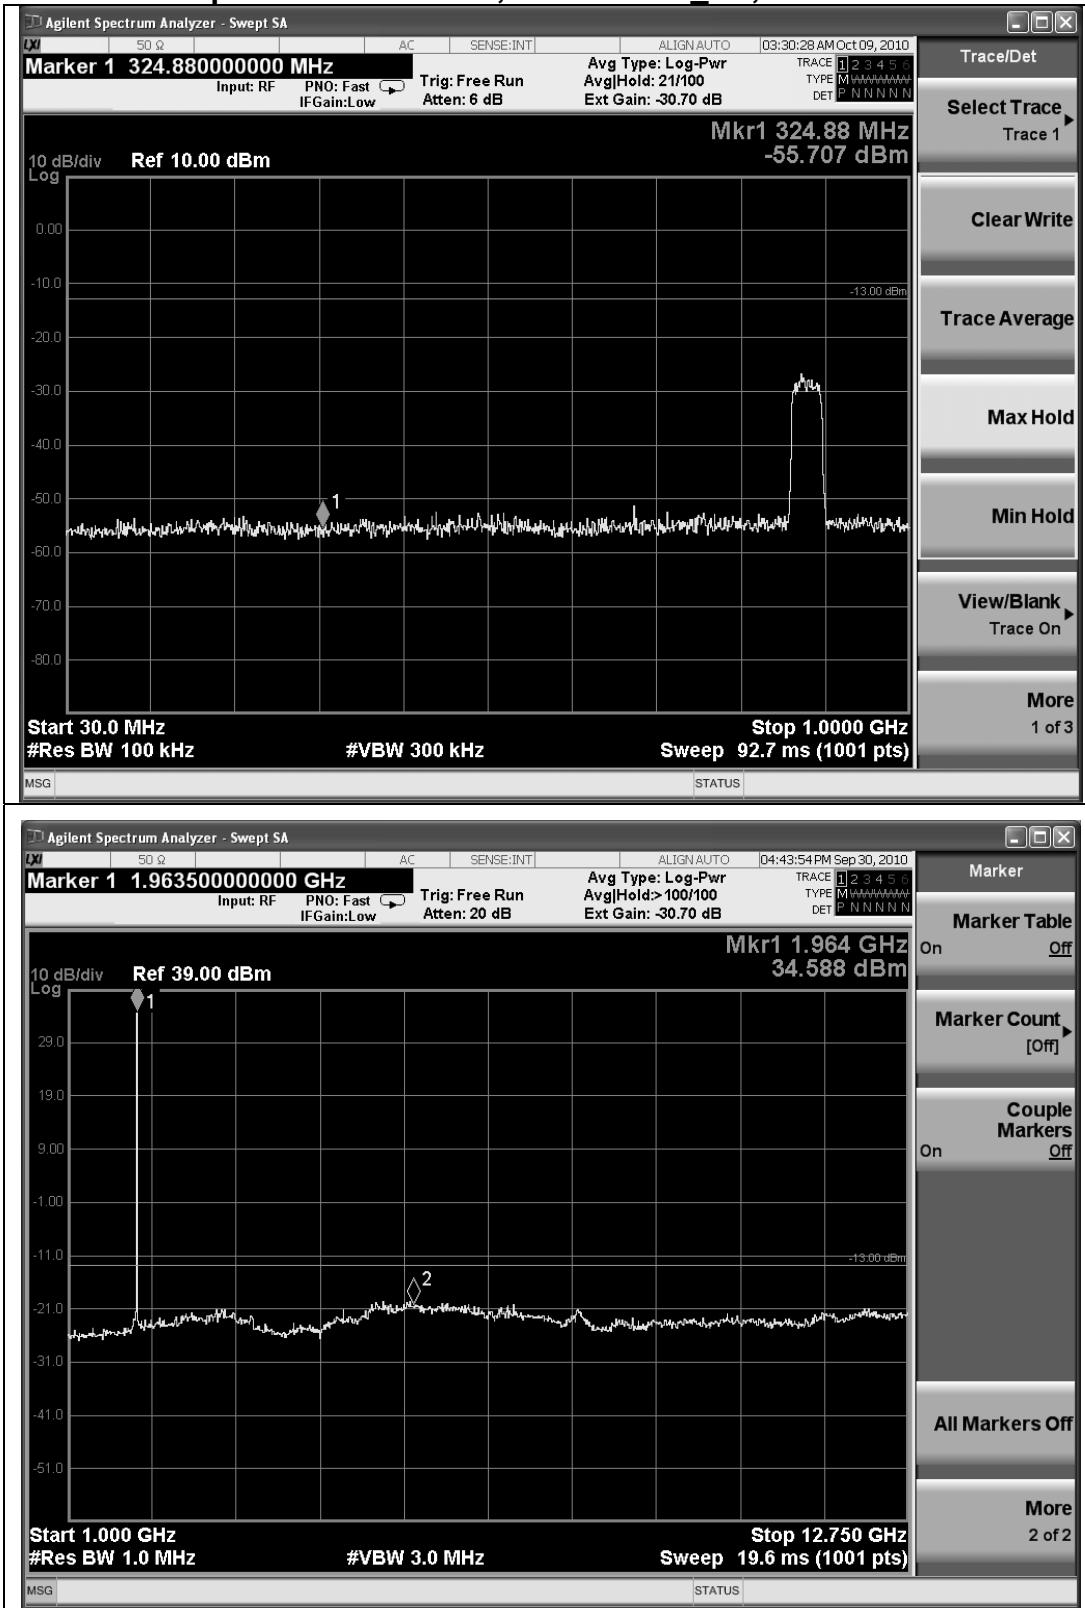


Prüfbericht - Nr.:
Test Report No.:

16026515 001


Seite 46 von 66
Page 46 of 66

Antenna Terminal Spurious Emissions – Band Edge Emissions, CDMA 850_DL

Left edge of band

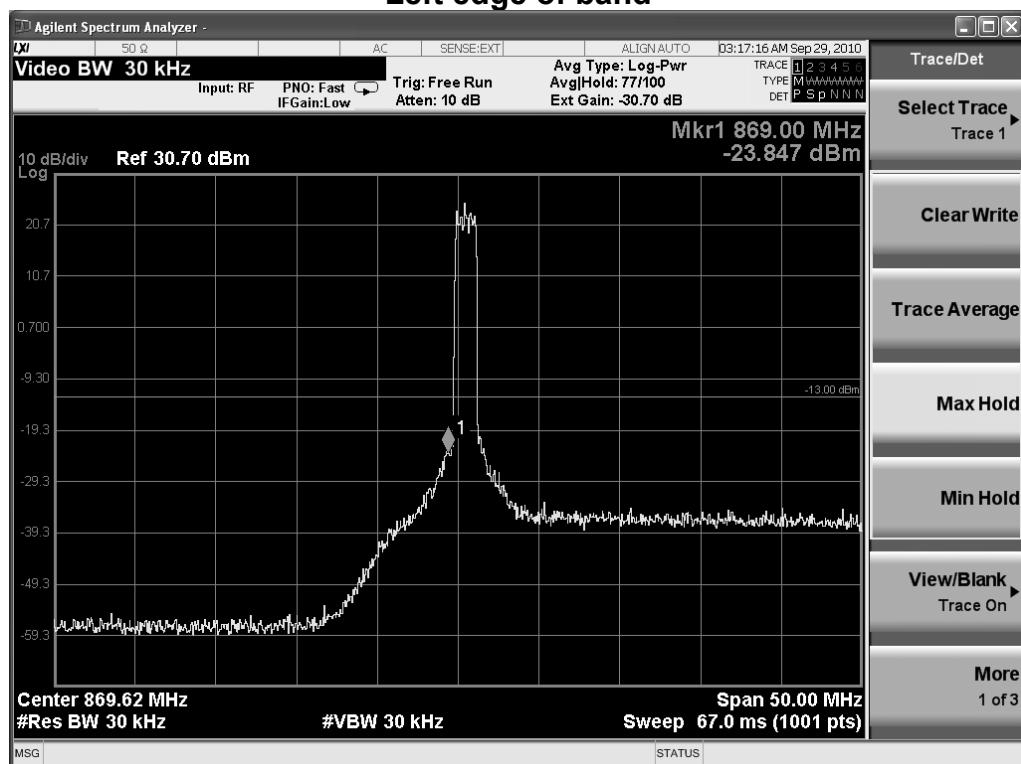

Right edge of band

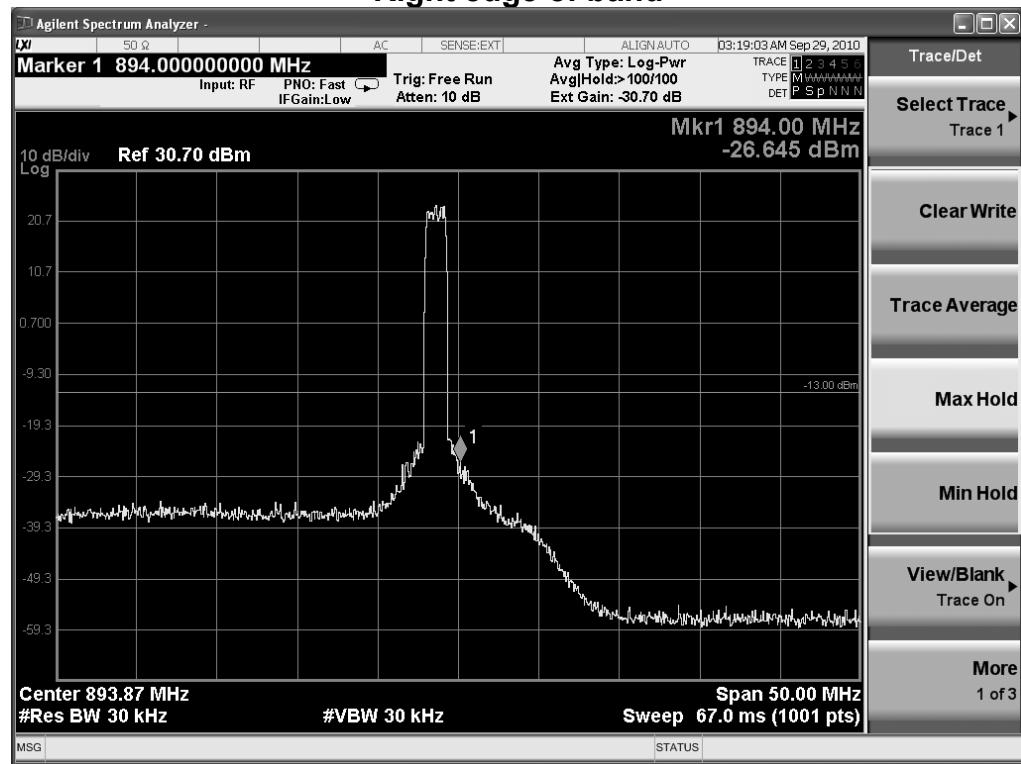


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 47 von 66
Page 47 of 66

Antenna Terminal Spurious Emissions – Band Edge Emissions, CDMA 1900_DL

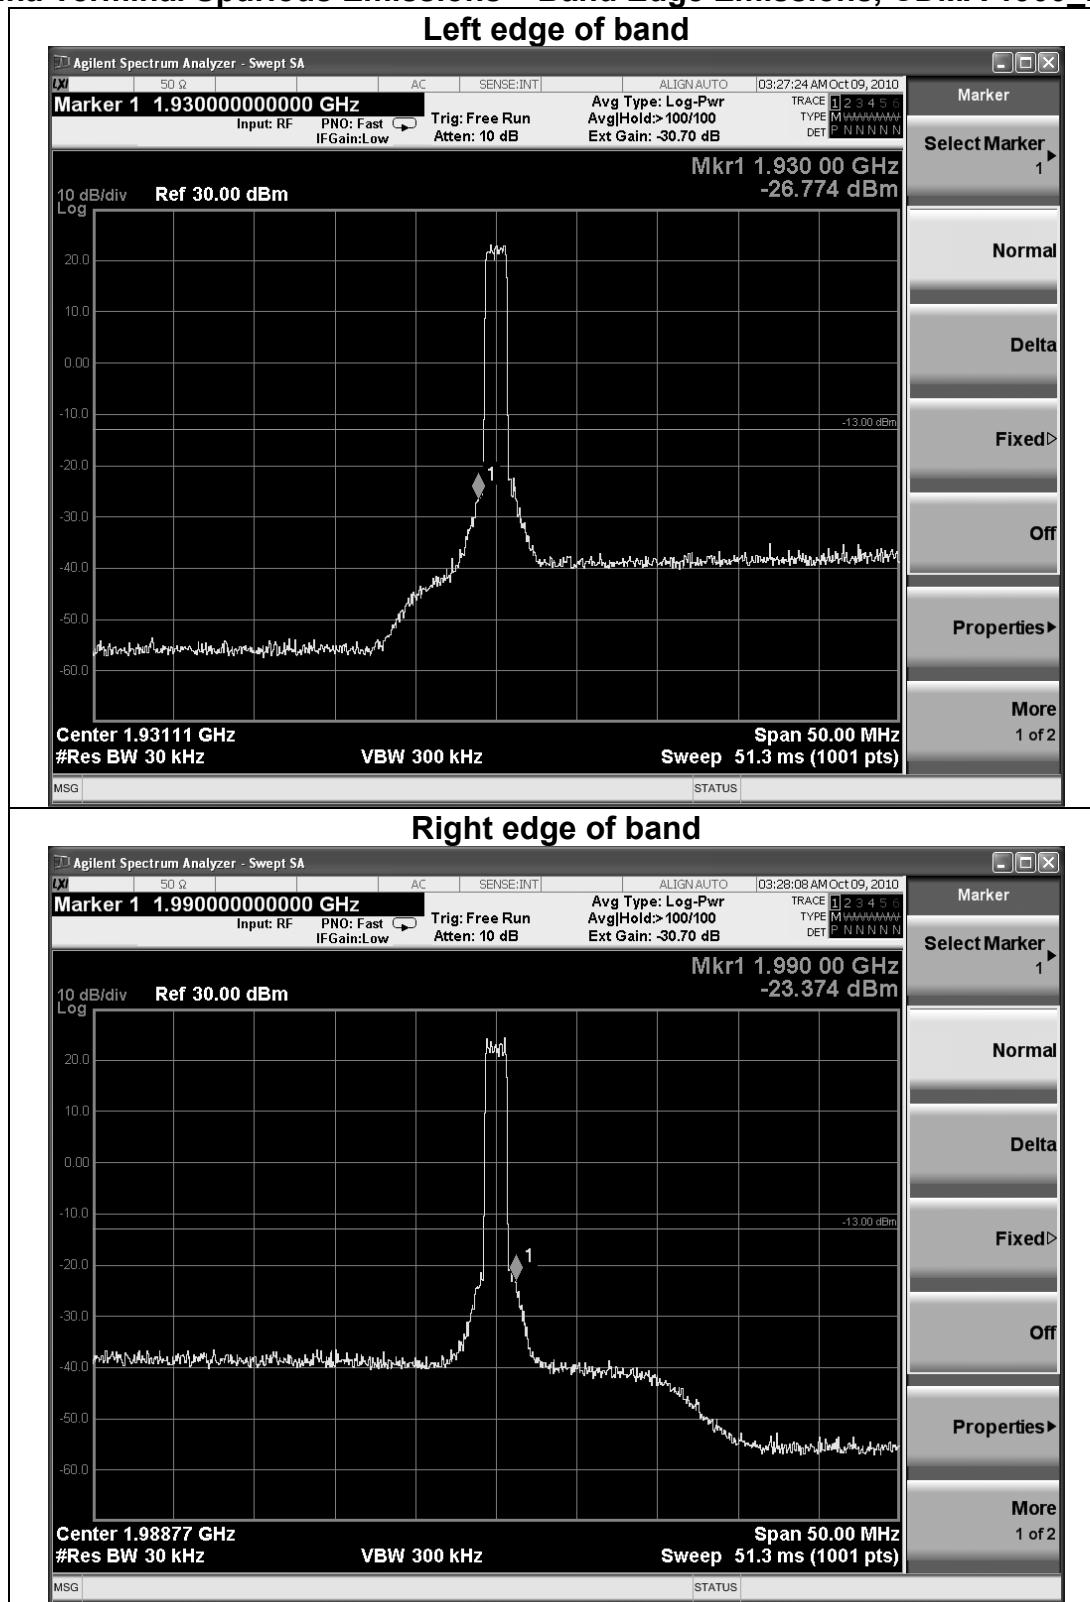

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 48 von 66
Page 48 of 66

5.2.4 Intermodulation

RESULT:

Pass

Date of testing : 09.Oct.2010
Temperature : 22°C
Humidity : 50%
Basic standard : FCC Part 2.1051
Test method : ANSI/TIA-603-C-2004, clause 2.2.13
Operation mode : Transmitting with maximum RF power output

Limits :

Refer to FCC Part 22.917(a) for CDMA 850.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Refer to FCC Part 24.238(a) for CDMA 1900.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The emission must be reduced by $43+10\log(P)$ dB.

Therefore, the Emission Limit equals:

$$10\log(P) \text{ dBW} + 30\text{dB} - (43+10\log(P) \text{ dB}) = -13 \text{ dBm}$$

Measurement procedure:

1. The EUT RF output port was connected to spectrum analyzer.
2. Two RF signal was input to EUT's input port.
3. The frequencies of both two RF signals shall be within the repeater's operating band. The spacing between two RF signals shall be the minimum possible spacing applied in a network. The level shall be increased till the maximum rated output power per channel, as declared by the manufacturer, is achieved.
4. The spurious emissions at antenna were measured at the RF output port of the EUT.
5. The spectrum analyzer resolution bandwidth (RBW) was set to 100 kHz for the cell band.


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 49 von 66
Page 49 of 66

Test Results:

Intermodulation, CDMA 850_DL

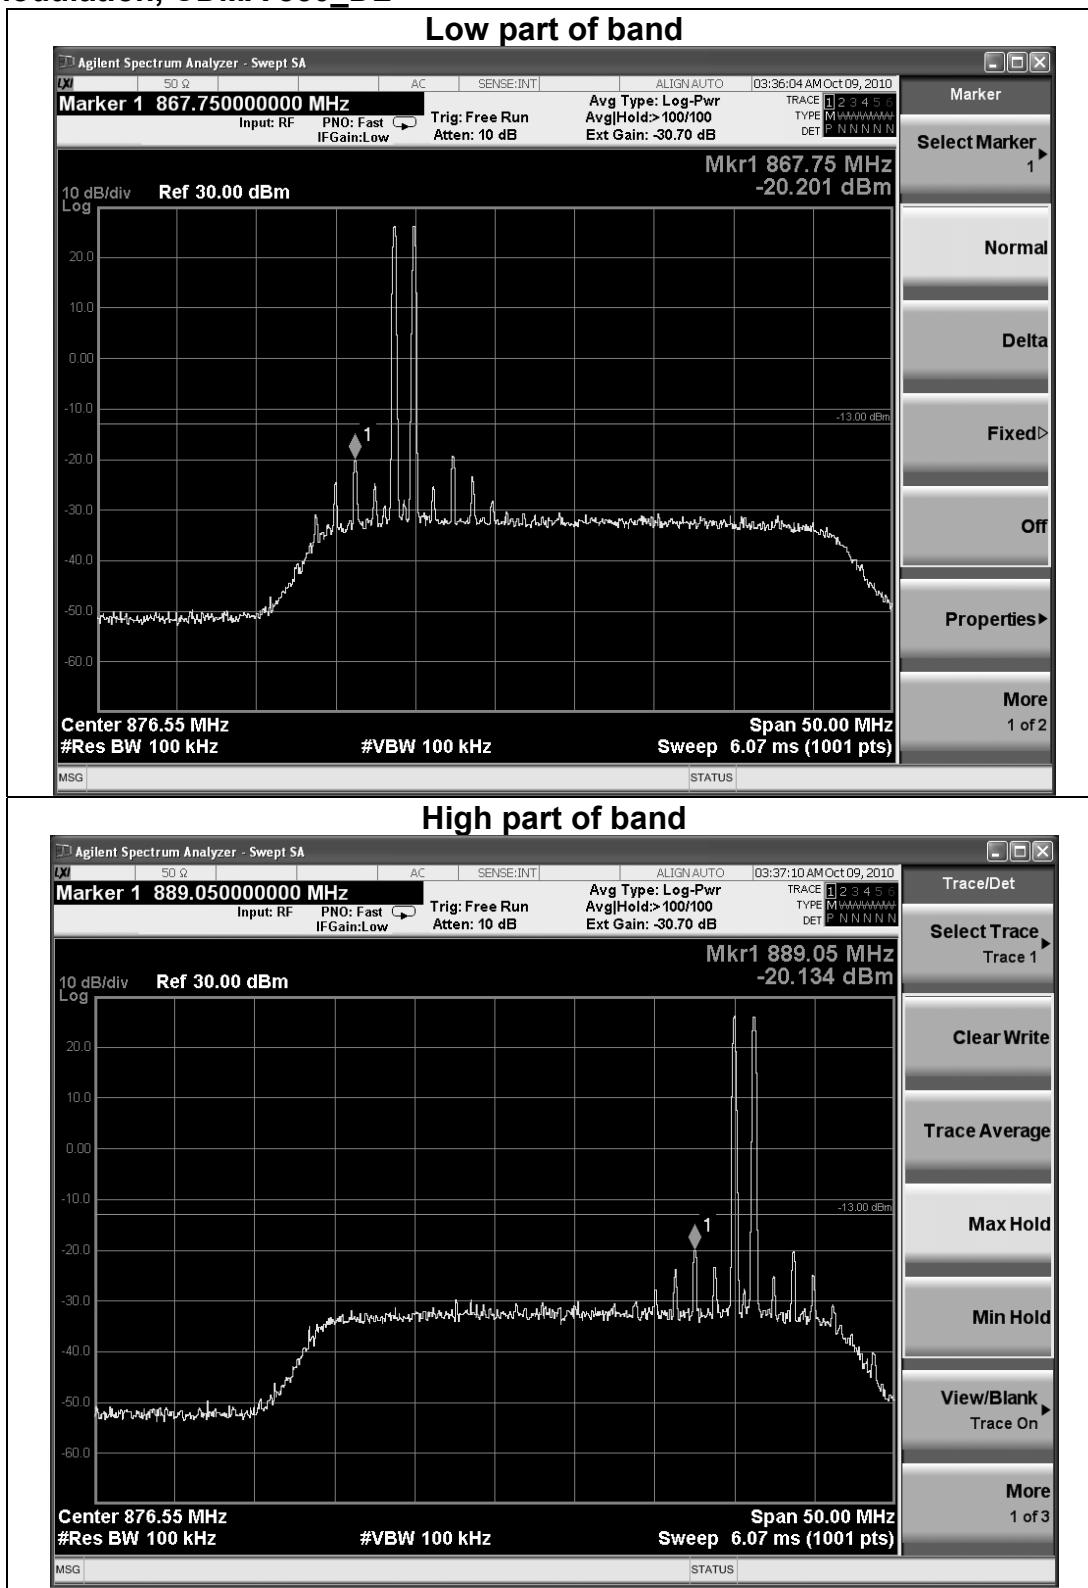


Prüfbericht - Nr.:
Test Report No.:

16026515 001


Seite 50 von 66
Page 50 of 66

Intermodulation, CDMA 1900_DL

Low part of band

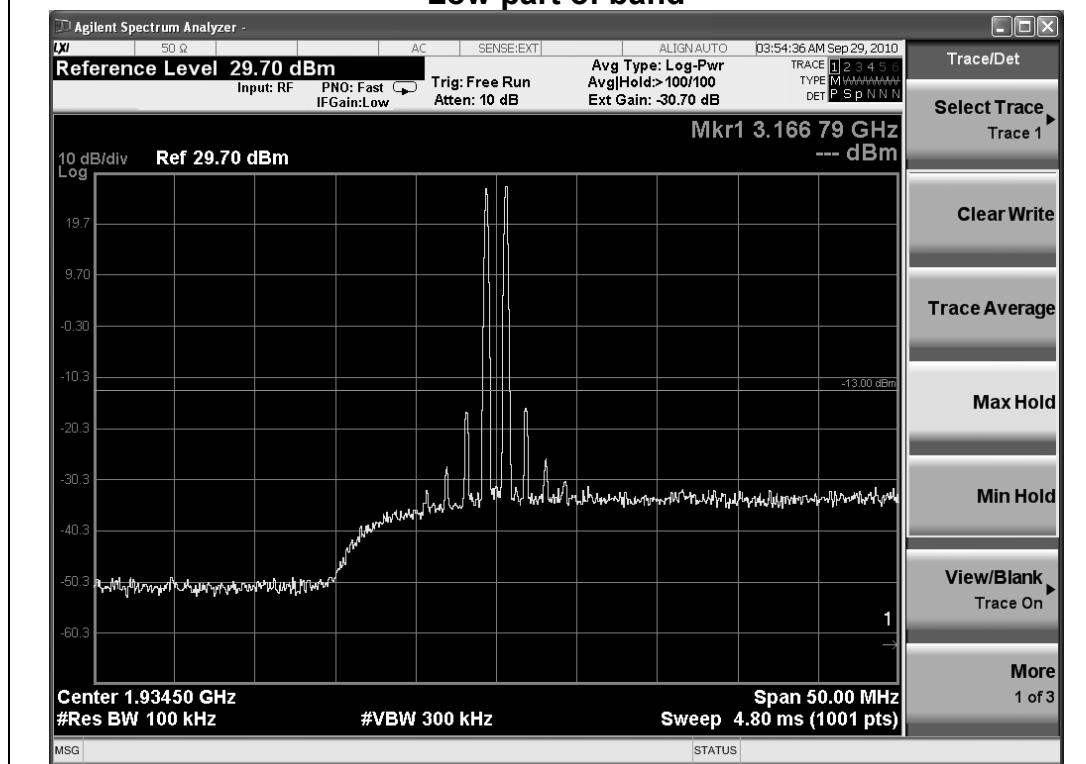

High part of band

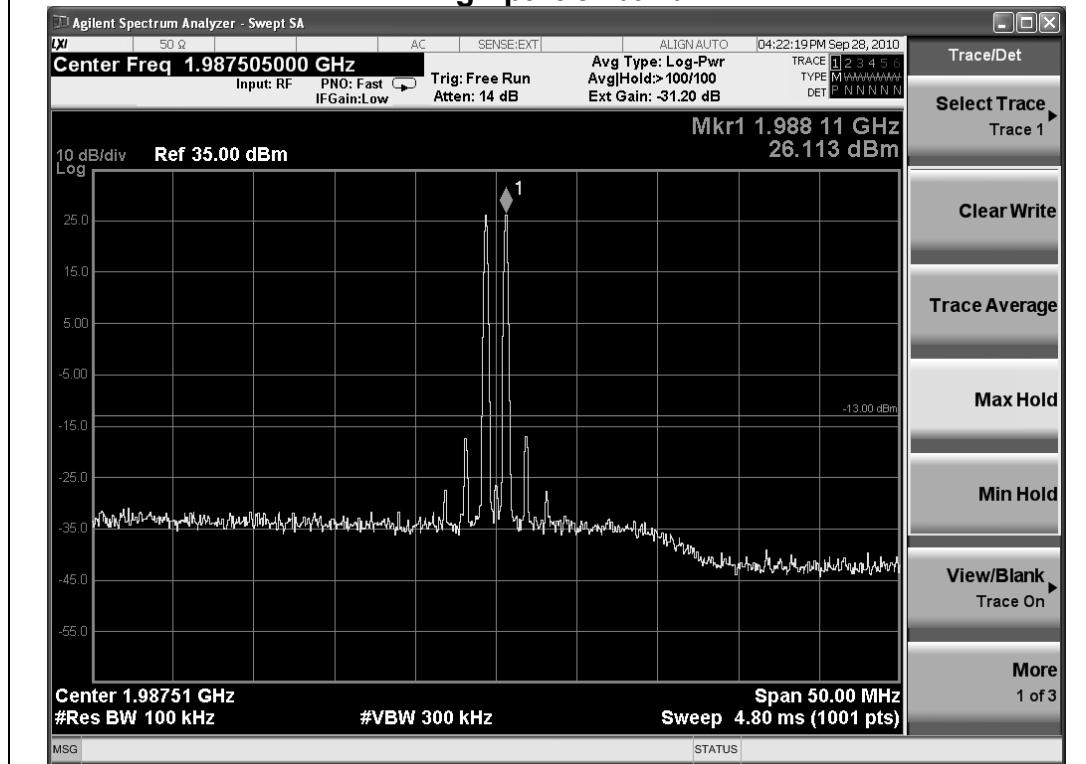

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 51 von 66
Page 51 of 66

5.2.5 Field Strength of Spurious Emissions

RESULT:

Pass

Date of testing : 13.Jan.2011
Temperature : 22°C
Humidity : 50%
Basic standard : FCC Part 2.1053
Test method : ANSI/TIA-603-C-2004, clause 2.2.12
Operation mode : Transmitting with maximum RF power output

Limits:

Refer to FCC Part 22.917(a) for CDMA 850.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Refer to FCC Part 24.238(a) for CDMA 1900.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The emission must be reduced by $43+10\log(P)$ dB.

Therefore, the Emission Limit equals:

$$10\log(P) \text{ dBW} + 30\text{dB} - (43+10\log(P) \text{ dB}) = -13 \text{ dBm}$$

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 52 von 66
Page 52 of 66

Measurement procedure:

1. The EUT RF output port was connected to 50 ohm RF load.
2. The level of RF input signal shall be increased, until the maximum output power per channel, declared by client, is reached.
3. The measurement antenna was placed at a distance of 3 meters from the EUT.
4. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from EUT.
5. The frequency range up to 10-th harmonic of each of the three fundamental frequencies (low, middle and high channels) was investigated. The worst case of emissions was reported.
6. For spurious emissions attenuation, the substitution method was used.
7. The EUT was substituted by a reference antenna (half-wave dipole – below 1 GHz, or Horn antenna – above 1 GHz), connected to a signal generator.
8. The signal generator output level was adjusted to obtain the same reading as from EUT. The EIRP at the spurious emissions frequency was calculated as follows:

$$\text{EIRP(dBm)} = \text{Reading (SG)} + \text{Cable loss(dB)} + \text{G(dBi)}$$

According the limit specified in 27.53(c) and 27.53(g) :

The following method was used to determine the Limit for Spurious Emissions:

Maximum output power in watts: P (W).

The emission must be reduced by $43+10\log(P)$ dB

Therefore, the Emission Limit equals:

$$10\log(P) \text{ dBW} + 30\text{dB} - (43+10\log(P) \text{ dB}) = -13 \text{ dBm}$$

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 53 von 66
Page 53 of 66**Test Results:**

There were no emissions detected above the noise floor, which was at least 20 dB below the specification limit.

Table 14: Transmitter Spurious Radiated Emissions – CDMA 850_DL_UL

Freq. (MHz)	Polariz ation (V/H)	Reading (SG) (dBm)	Cable loss (dB)	Antenna Gain(dBi)	Transmit power (dBm)	Limit (dBm)
1788	H	-56.25	7.4	5.25	-58.3	-13
2682	H	-57.84	8.7	6.75	-59.7	-13
3576	H	-32.32	10.2	6.95	-35.4	-13
4470	H	-53.35	11.2	8.25	-56.3	-13
5364	H	-64.35	12.5	8.65	-68.2	-13
6258	H	-58.93	14.6	8.25	-65.1	-13
1788	V	-59.35	7.4	5.25	-61.4	-13
2682	V	-70.84	8.7	6.75	-72.7	-13
3576	V	-32.22	10.2	6.95	-35.3	-13
4470	V	-42.95	11.2	8.25	-45.9	-13
5364	V	-62.45	12.5	8.65	-66.3	-13
6258	V	-60.33	14.6	8.25	-66.5	-13

Note: All other emissions not reported are more than 20 dB below the limit.

Table 15: Transmitter Spurious Radiated Emissions – CDMA 1900_DL_UL

Freq. (MHz)	Polariz ation (V/H)	Reading (SG) (dBm)	Cable loss (dB)	Antenna Gain(dBi)	Transmit power (dBm)	Limit (dBm)
3990	H	-50.95	10.4	6.95	-54.4	-13
5985	H	-41.25	13.5	8.65	-46.1	-13
7980	H	-58.82	16.3	10.82	-64.3	-13
9975	H	-51.72	19.5	12.02	-59.2	-13
11970	H	-47.51	22.3	13.41	-56.4	-13
13965	H	-42.23	25.1	14.23	-53.1	-13
3990	V	-39.45	10.4	6.95	-42.9	-13
5985	V	-45.55	13.5	8.65	-50.4	-13
7980	V	-60.22	16.3	10.82	-65.7	-13
9975	V	-50.82	19.5	12.02	-58.3	-13
11970	V	-42.71	22.3	13.41	-51.6	-13
13965	V	-38.33	25.1	14.23	-49.2	-13

Note: All other emissions not reported are more than 20 dB below the limit.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 54 von 66
Page 54 of 66

5.2.6 Out-of-Band Rejection

RESULT:

Pass

Date of testing	:	28.Sep.2010
Temperature	:	22°C
Humidity	:	50%
Basic standard	:	---
Test method	:	ANSI/TIA-603-C-2004
Operation mode	:	Transmitting with maximum RF power output
Limits	:	N/A

Measurement procedure:

1. The EUT RF output port was connected to spectrum analyzer.
2. The EUT input port was connected to signal generator and was setup to transmit maximum power.
3. A continuous sinusoidal RF signal shall be fed successively at frequency offsets 100 MHz from the edges of the relevant MS or BTS transmit frequency band into the relevant input port of the repeater.
4. The RF output curve was recorded by spectrum analyzer.


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 55 von 66
Page 55 of 66

Test Results:

Out-of-Band Rejection, CDMA 850_DL

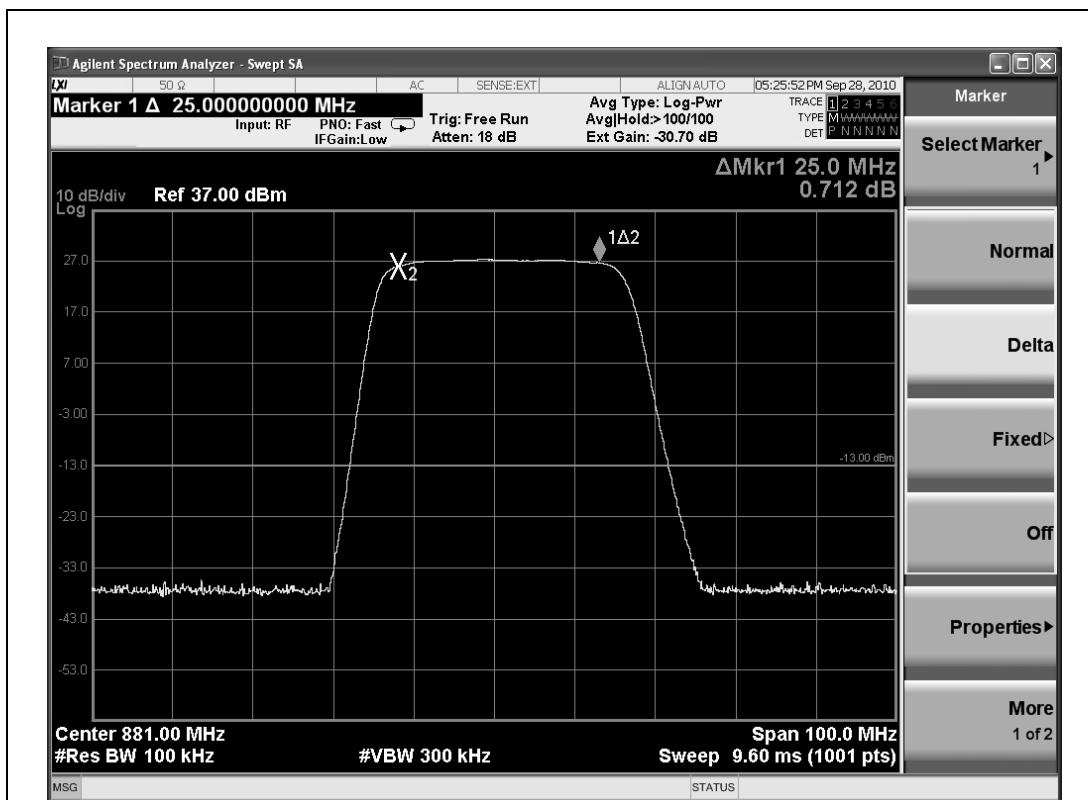


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 56 von 66
Page 56 of 66

Out-of-Band Rejection, CDMA 1900_DL

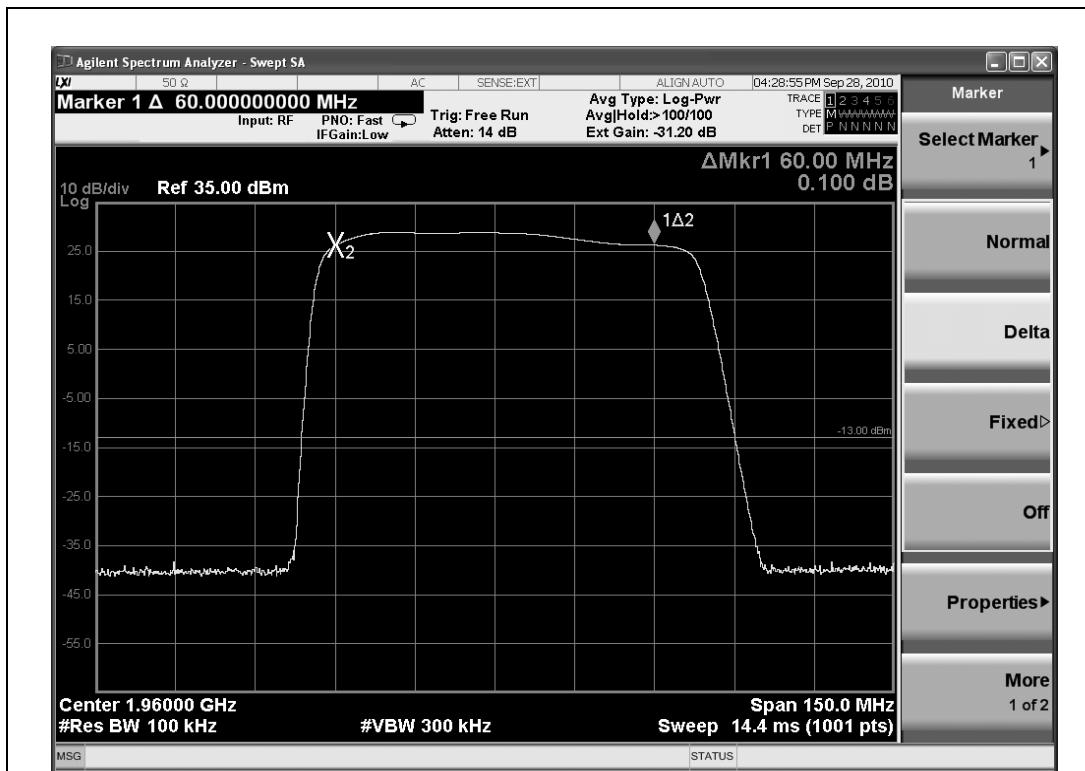

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 57 von 66
Page 57 of 66

5.2.7 Frequency Stability

RESULT:

Pass

Date of testing	:	30.Sep.2010
Temperature	:	-30°C to 50°C
Humidity	:	50%
Basic standard	:	FCC Part 2 Per Section 2.1055
Test method	:	ANSI/TIA-603-C-2004, clause 2.2.2
Operation mode	:	Transmitting with maximum RF power output
Limits:	:	

Refer to FCC part 22.355

For base station, the frequency tolerance shall be within 1.5 ppm.

Refer to FCC part 24.235

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized of operation.

Measurement procedure:

1. The EUT was placed inside the temperature chamber.
2. The RF output port was connected to a spectrum analyzer.
3. The EUT was setup to transmit the maximum power.
4. After the temperature stabilized for approximately 20 min, the transmitting frequency was measured by the spectrum analyzer and recorded.
5. At room temperature, the frequency was measured when EUT was powered with the nominal voltage and with 85% and 115% of the nominal voltage.

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 58 von 66
Page 58 of 66**Table 16: Frequency stability – CDMA 850_DL**

Operating frequency : 881.160000 MHz
Channel : Middle
Reference Voltage : 120 VAC

Voltage with nominal Voltage	Power (VAC)	Temp (°C)	Measured Freq (MHz)	Deviation (ppm)	Limit (ppm)
100%	120	+20(Ref)	881.159999	Ref	1.5
100%		-30	881.159953	0.053	
100%		-20	881.159970	0.034	
100%		-10	881.159976	0.027	
100%		0	881.159981	0.022	
100%		+10	881.159989	0.012	
100%		+20	881.159999	0.001	
100%		+30	881.160009	0.011	
100%		+40	881.160019	0.022	
100%		+50	881.160033	0.037	
85%	102	+20	881.160039	0.038	
115%	138	+20	881.159976	0.027	

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 59 von 66
Page 59 of 66

Table 17: Frequency stability – CDMA 1900_DL

Operating frequency : 1960.000000 MHz

Channel : Middle

Reference Voltage : 120 VAC

Voltage with nominal Voltage	Power (VAC)	Temp (°C)	Measured Freq (MHz)	Deviation (ppm)	Limit (ppm)
100%	120	+20(Ref)	1959.999999	Ref	1.5
100%		-30	1959.999998	0.001	
100%		-20	1959.999998	0.001	
100%		-10	1959.999998	0.001	
100%		0	1959.999998	0.001	
100%		+10	1960.000000	0.000	
100%		+20	1959.999999	0.001	
100%		+30	1960.000001	0.001	
100%		+40	1960.000001	0.001	
100%		+50	1960.000002	0.001	
85%	102	+20	1959.999998	0.001	
115%	138	+20	1960.000002	0.001	

Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 60 von 66
Page 60 of 66

5.2.8 Error Vector Magnitude (EVM)

RESULT:

No Limit

Date of testing	:	03.Mar.2011
Temperature	:	22°C
Humidity	:	50%
Basic standard	:	---
Test method	:	ANSI/TIA-603-C-2004
Operation mode	:	Transmitting with maximum RF power output
Limits	:	N/A

Measurement procedure:

1. The EUT RF output port was connected to spectrum analyzer.
2. The level of RF input signal shall be increased, until the maximum output power per channel, declared by client, is reached.
3. The spectrum analyzer was setup to measure the Error Vector Magnitude (EVM) of output signal.

The EVM was measured at the output port of the EUT at the middle channel of each type of modulation.

Prüfbericht - Nr.:
Test Report No.:


16026515 001

Seite 61 von 66
Page 61 of 66

Test result:

Table 18: EVM, CDMA 850_DL

Channel	Direction	Freq. (MHz)	EVM Pk (%)	EVM RMS (%)
One	DL	881.18	0.82	0.49

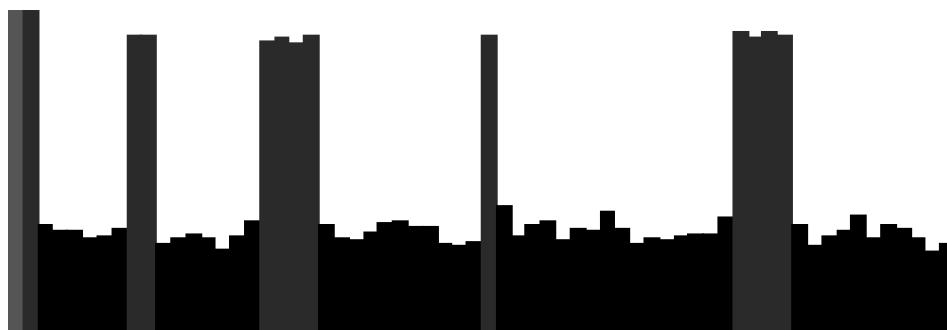

RESULTS FOR SET 0 PCG 0:		GLOBAL RESULTS FOR SET 0:	
Total PWR	30.75 dBm	Carr Freq Error	177.27 Hz
Pilot PWR	23.75 dBm	Carr Freq Error	0.20 ppm
RHO	0.99976	Chip Rate Error	0.09 ppm
Composite EVM	1.56 %	Trg to Frame	- ----- s
Pk CDE (SF 64)	-49.37 dB	Active Channels	9
IQ Imbal/Offset	0.13/0.00 %		
CHANNEL RESULTS:		Modulation	BPSK
Symbol Rate	19.2 ksp/s	Timing Offset	-.-- ns
Channel.SF	0.64	Phase Offset	-.-- mrad
Channel Power Rel	0.00 dB	Channel Power Abs	23.75 dBm
Symbol EVM	0.49 % rms	Symbol EVM	0.82 % Pk

Date: 3.MAR.2011 05:34:53


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 62 von 66
Page 62 of 66

Table 19: EVM, CDMA 1900_DL

Channel	Direction	Freq. (MHz)	EVM Pk (%)	EVM RMS (%)
One	DL	1960.18	0.77	0.42

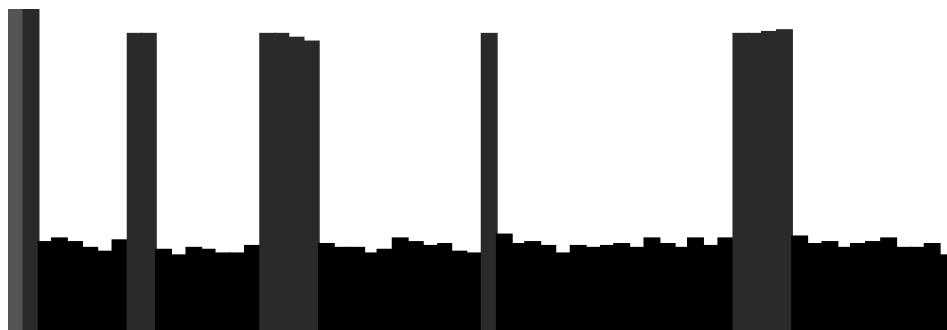

RESULTS FOR SET 0 PCG 0:		GLOBAL RESULTS FOR SET 0:	
Total PWR	30.55 dBm	Carr Freq Error	394.86 Hz
Pilot PWR	23.54 dBm	Carr Freq Error	0.20 ppm
RHO	0.99989	Chip Rate Error	-0.32 ppm
Composite EVM	1.07 %	Trg to Frame	-.-.---- s
Pk CDE (SF 64)	-52.59 dB	Active Channels	9
IQ Imbal/Offset	0.09/0.11 %		
CHANNEL RESULTS:			
Symbol Rate	19.2 ksp/s	Modulation	BPSK
Channel.SF	0.64	Timing Offset	-.-- ns
Channel Power Rel	0.00 dB	Phase Offset	-.-- mrad
Symbol EVM	0.42 % rms	Channel Power Abs	23.54 dBm
		Symbol EVM	0.77 % Pk

Date: 3.MAR.2011 05:30:20


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 63 von 66
Page 63 of 66

6 Photographs of the Test Set-Up

Photograph 1: Set-up for RF power, Occupied Bandwidth, Out-of-Band emissions, Intermodulation test, Spurious Emissions at antenna terminal, EVM

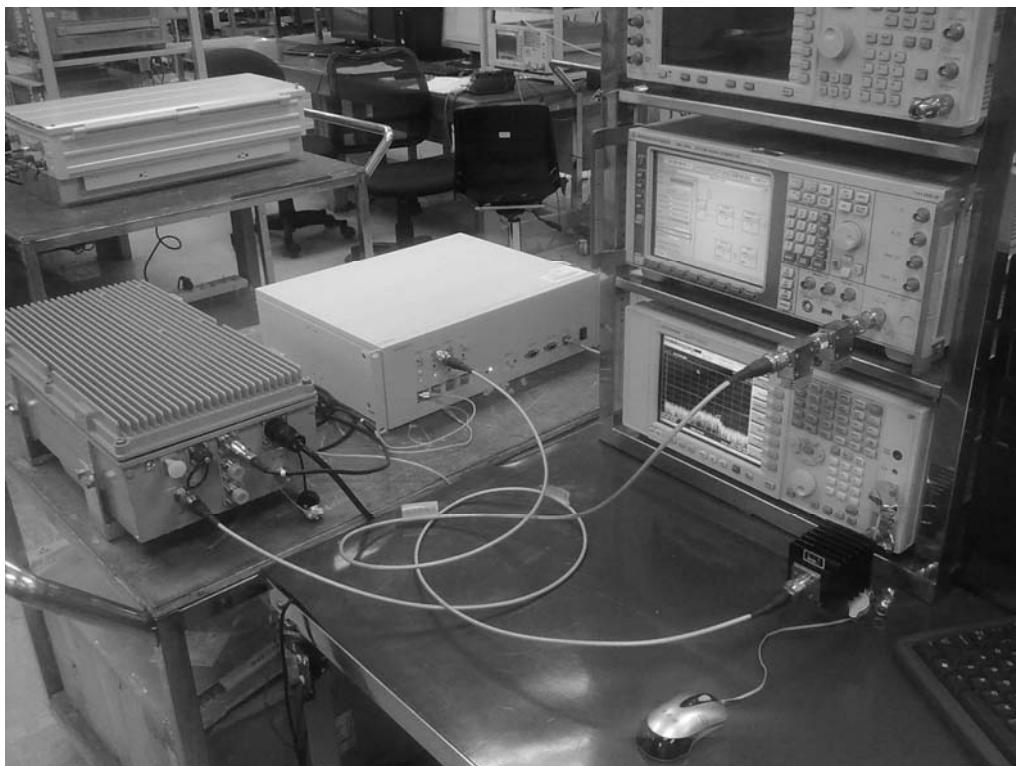


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 64 von 66
Page 64 of 66

Photograph 2: Set-up for Radiation Measurement Below 1GHz

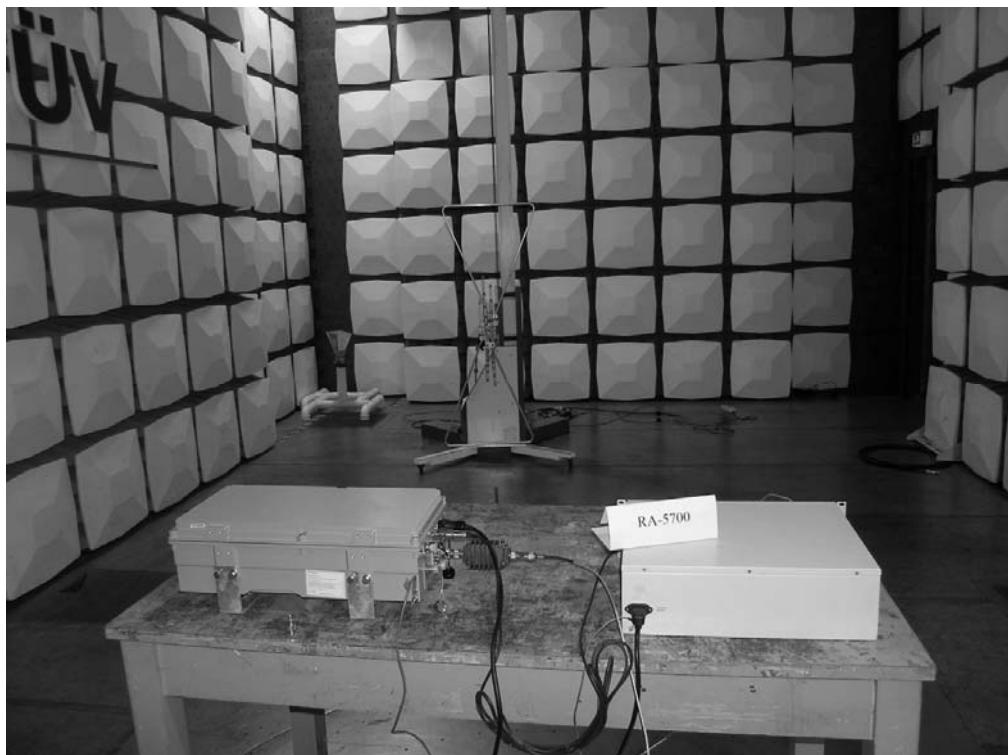


Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 65 von 66
Page 65 of 66

Photograph 3: Set-up for Radiation Measurement above 1GHz

1 GHz to 18 GHz

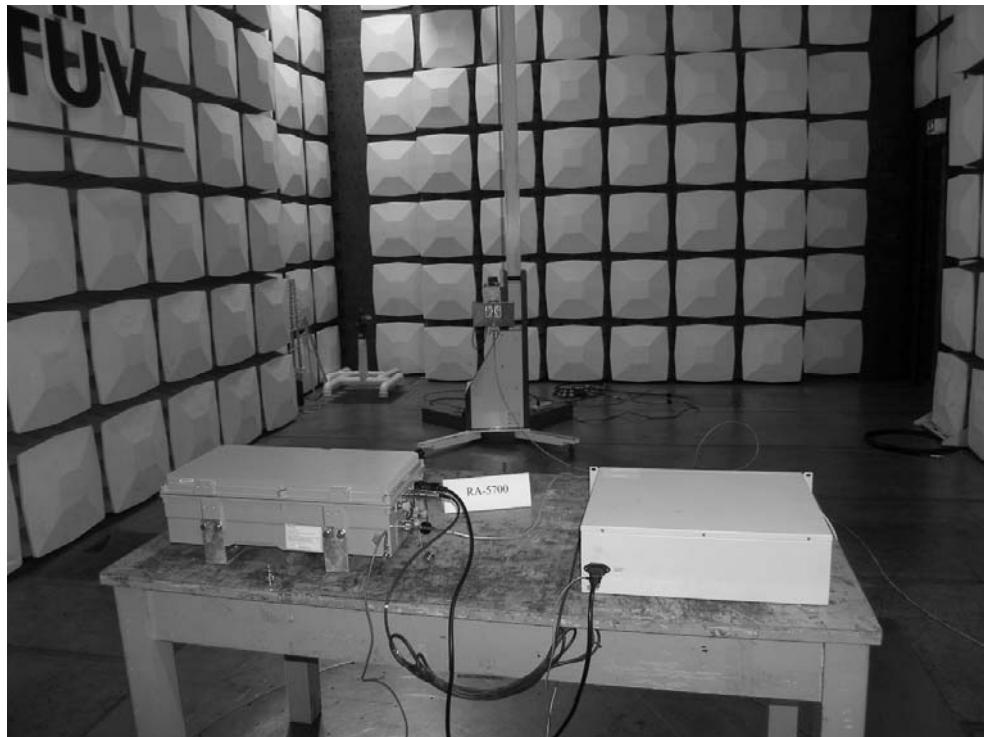

18 GHz to 20 GHz



Prüfbericht - Nr.:
Test Report No.:

16026515 001

Seite 66 von 66
Page 66 of 66

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Output power at low, middle and high channel, LTE 700 Band 1_DL.....	15
Table 3: Output power at one channel, LTE 700 Band 2_DL	15
Table 4: 99% Occupied Bandwidth – LTE 700 Band 1_DL.....	17
Table 5: 99% Occupied Bandwidth – LTE 700 Band 2_DL.....	17
Table 6: Transmitter Spurious Radiated Emissions - LTE 700 band 1_DL	32
Table 7: Transmitter Spurious Radiated Emissions - LTE 700 band 2_DL	32
Table 8: Frequency stability - LTE 700_DL	34
Table 9: EVM, LTE 700_DL	36
Table 10: Output power at low, middle and high channel, CDMA 850_DL.....	38
Table 11: Output power at low, middle and high channel, CDMA 1900_DL	38
Table 12: 99% Occupied Bandwidth – CDMA 850_DL.....	40
Table 13: 99% Occupied Bandwidth – CDMA 1900_DL	40
Table 14: Transmitter Spurious Radiated Emissions – CDMA 850_DL_UL.....	53
Table 15: Transmitter Spurious Radiated Emissions – CDMA 1900_DL_UL	53
Table 16: Frequency stability – CDMA 850_DL	58
Table 17: Frequency stability – CDMA 1900_DL	59
Table 18: EVM, CDMA 850_DL.....	61
Table 19: EVM, CDMA 1900_DL.....	62

8 List of Photographs

Photograph 1: Set-up for RF power, Occupied Bandwidth, Out-of-Band emissions, Intermodulation test, Spurious Emissions at antenna terminal, EVM	63
Photograph 2: Set-up for Radiation Measurement Below 1GHz	64
Photograph 3: Set-up for Radiation Measurement above 1GHz	65