



SAR EVALUATION REPORT

FCC 47 CFR § 2.1093
IEEE Std 1528-2013

For

WLAN and BT, 2x2 PCIe M.2 2230 adapter card

FCC ID: PX9-AC9260NGW
Model Name: 9260NGW

Report Number: 4789004205-US-S0-V0
Issue Date: 10/14/2019

Prepared for
Winmate Inc.

9F, No.111-6, Shing-De Rd., San-Chung District, New Taipei City, Taiwan, 241

Prepared by
Underwriters Laboratories Taiwan Co., Ltd.,
Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd.,
Zhudong Township, Hsinchu County, Taiwan
TEL: +886-2-7737-3000
FAX: +886-3-583-7948
Website: www.ul.com



Revision History

Rev.	Date	Revisions	Revised By
V0	10/14/2019	Initial Issue	Cindy Hsin

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation.....	7
4.	SAR Measurement System & Test Equipment	8
4.1.	<i>SAR Measurement System.....</i>	8
4.2.	<i>SAR Scan Procedures.....</i>	9
4.3.	<i>Test Equipment.....</i>	11
5.	Measurement Uncertainty.....	12
6.	Device Under Test (DUT) Information	13
6.1.	<i>DUT Description</i>	13
6.2.	<i>Wireless Technologies.....</i>	14
6.3.	<i>Nominal and Maximum Output Power.....</i>	15
7.	RF Exposure Conditions (Test Configurations).....	16
7.1.	<i>Standalone SAR Test Exclusion Considerations.....</i>	16
7.2.	<i>Required Test Configurations</i>	18
8.	Dielectric Property Measurements & System Check	19
8.1.	<i>Dielectric Property Measurements</i>	19
8.2.	<i>System Check.....</i>	21
9.	Conducted Output Power Measurements.....	22
9.1.	<i>Wi-Fi 2.4GHz (DTS Band)</i>	22
9.2.	<i>Wi-Fi 5GHz (U-NII Bands).....</i>	23
9.3.	<i>Bluetooth</i>	25
10.	Measured and Reported (Scaled) SAR Results.....	26
10.1.	<i>Wi-Fi_Body (DTS Band).....</i>	27
10.2.	<i>Wi-Fi Body (U-NII Band).....</i>	28
10.3.	<i>Bluetooth.....</i>	29
10.4.	<i>Estimated SAR.....</i>	30
11.	SAR Measurement Variability.....	31
12.	Simultaneous Transmission SAR Analysis.....	32
12.1.	<i>Sum of the SAR for Wi-Fi 2.4GHz Chain B & BT.....</i>	32
12.2.	<i>Sum of the SAR for Wi-Fi 2.4GHz Chain A & Wi-Fi 2.4GHz Chain B.....</i>	32
12.3.	<i>Sum of the SAR for Wi-Fi 5GHz Chain B & BT.....</i>	32
12.4.	<i>Sum of the SAR for Wi-Fi 5GHz Chain A & Wi-Fi 5GHz Chain B.....</i>	33

12.5. Sum of the SAR for Wi-Fi 5GHz Chain A & Wi-Fi 5GHz Chain B & BT 33

Appendixes 34

4789004205-US-S0-V0 Appendix A: Antenna Dimensions and Separation Distances 34

4789004205-US-S0-V0 Appendix B: SAR System Check Plots 34

4789004205-US-S0-V0 Appendix C: Highest SAR Test Plots 34

4789004205-US-S0-V0 Appendix D: SAR Liquid Tissue Ingredients..... 34

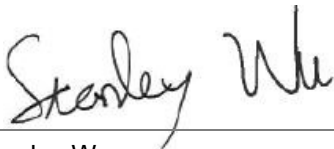

4789004205-US-S0-V0 Appendix E: SAR Probe and Dipole Calibration Certificates 34

1. Attestation of Test Results

Applicant Name	Winmate Inc.		
FCC ID	PX9-AC9260NGW		
Model Name	9260NGW		
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013		
Exposure Category	SAR Limits (W/Kg)		
	Peak spatial-average(1g of tissue)		
General population	1.6		
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)		
	DTS	NII	DSS
Standalone	1.266	0.338	0.067
Date Tested	7/23/2019 to 10/9/2019		
Test Results	Pass		

Underwriters Laboratories Taiwan Co., Ltd., tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd., based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd., and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd., will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of any government. This report is written to support regulatory compliance of the applicable standards stated above.

Approved and Authorized By:	Prepared By:
	
Stanley Wu Senior Project Engineer Underwriters Laboratories Taiwan Co., Ltd.	Cindy Hsin Project Handler Underwriters Laboratories Taiwan Co., Ltd.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D05 SAR for LTE Devices v02r05
- KDB 178919 D01 Permissive Change Policy v06

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

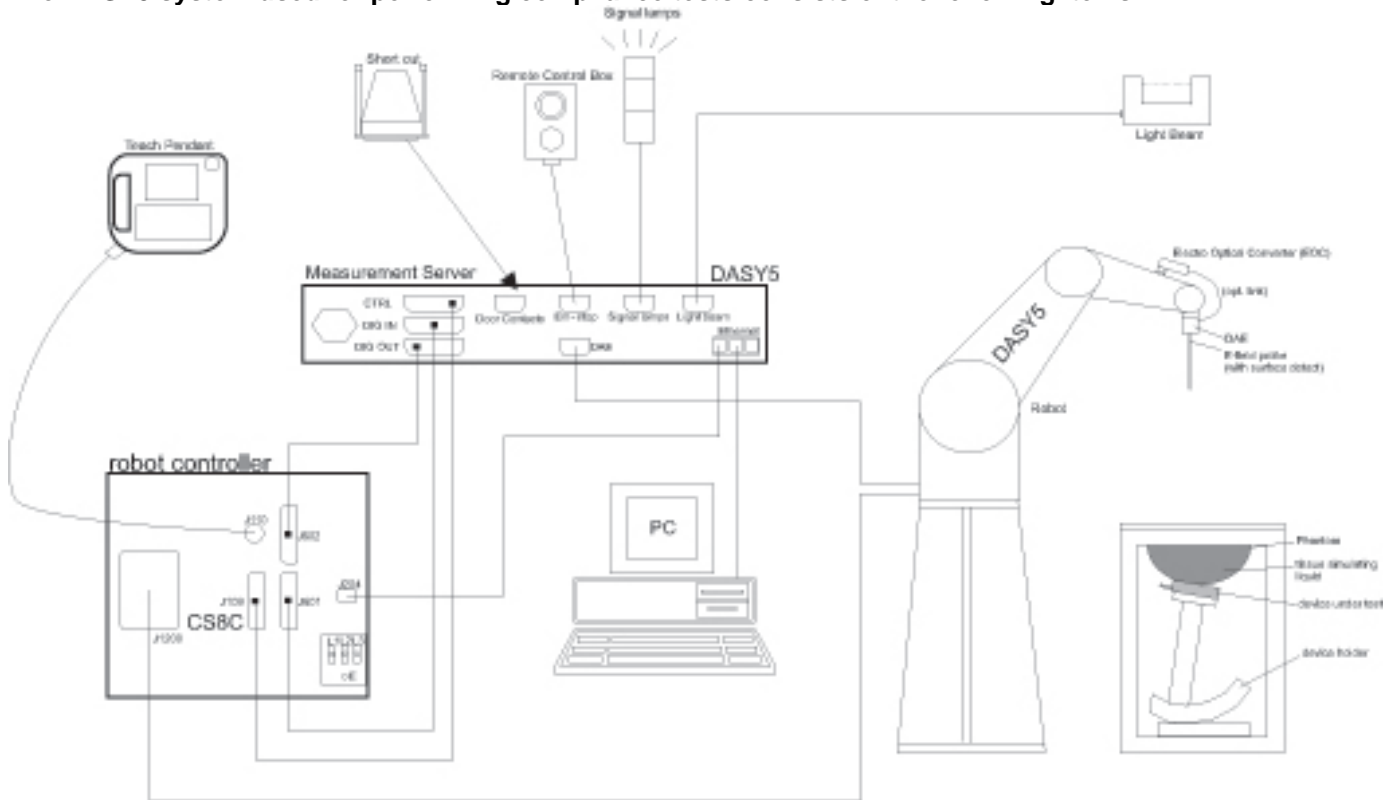
Underwriters Laboratories Taiwan Co., Ltd., Building B & E, No. 372-7, Sec. 4, Zhong-xing Rd., Zhudong Township, Hsinchu County, Taiwan
SAR Room

Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	MS46322B	1740002	2019/12/25
Dielectric Probe kit	SPEAG	DAK-3.5	1250	2019/9/18
Dielectric Probe kit	SPEAG	DAK-3.5	1250	2020/9/18
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 CB	2019/9/18
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 CB	2020/9/18
Thermometer	DER EE	DE-3003	P0006880	2020/1/3

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
EXG-B RF Vector Signal Generator	Keysight Technologies	N5182B	MY56200244	2020/1/3
Power Meter	Keysight	N1914A	MY56360007	2019/12/13
Power Meter	ANRITSU	ML2495A	1645002	2019/12/16
Power Sensor	Keysight	N8481H	MY56350009	2019/12/13
Power Sensor	ANRITSU	MA2411B	1531202	2019/12/16
Amplifier	Mini-Circuits	ZHL-42W+	51701624	N/A
Amplifier	Mini-Circuits	ZVE-8G+	88201629	N/A
20dB Directional Coupler	N/A	N/A	150820087	N/A
DC Power Supply	GW Insrek	GPD-2303S	GEQ902177	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Dosimetric E-Field Probe	SPEAG	EX3DV4	3901	2020/8/28
Dosimetric E-Field Probe	SPEAG	EX3DV4	7400	2020/4/28
Data Acquisition Electronics	SPEAG	DAE4	1360	2019/12/17
System Validation Dipole	SPEAG	D2450V2	988	2019/12/6
System Validation Dipole	SPEAG	D5GHzV2	1244	2019/12/13

Test Software

Software Version
DASY NEO52 D10.1 S14.6.11
SEMCAD-X-PostPro

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

Product Name	Winmate Inc.
Model Name	9260NGW
Device Dimension	Overall (Length x Width x Height): 230 mm x 158 mm x 22mm Overall Diagonal: 264 mm
Back Cover	<input checked="" type="checkbox"/> Normal Battery Cover
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 7.6Vdc, 4200Wh <input type="checkbox"/> Extended (large capacity) <input type="checkbox"/> The rechargeable battery is not user accessible.
Hardware Version	N/A
Software Version	N/A
Sample Stage	Production equivalent

Note :

1. This Class II permissive change supplemental report was issued based on the original report with the report number 170524-01.TR08 (Intel module: 9260NGW) for new host which model name is M900P.

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
Wi-Fi	2.4 GHz	802.11b	100% (802.11b)
		802.11g	98% (802.11g 20MHz BW)
	5 GHz	802.11n (HT20)	98% (802.11n 20MHz BW)
		802.11n (HT40)	98% (802.11n 40MHz BW)
Does this device support bands 5.60 ~ 5.65 GHz? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
Does this device support Band gap channel? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Bluetooth	2.4 GHz	BDR / EDR	77%
		BLE	55%

6.3. Nominal and Maximum Output Power

At the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

Band/ Mode		Tune up Power (dBm)	
		Chain A	Chain B
2.4 GHz	802.11b CH1	19.5	20
	802.11b CH6	21	21
	802.11b CH11	20	21
	802.11g CH1	16.5	17
	802.11g CH6	21	21
	802.11g CH11	17	16.5
	802.11n HT20 CH1	16	16.5
	802.11n HT20 CH6	20.5	21
	802.11n HT20 CH11	16	16.5
	802.11n HT40 CH3	14	13.5
	802.11n HT40 CH6	16	16
5 GHz	802.11a	10.5	10.5
	802.11n HT20	10.5	10.5
	802.11n HT40	10.5	10.5
2.4 GHz	Bluetooth		11.5
	BLE		10

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-edge(s) distances.

7.1. Standalone SAR Test Exclusion Considerations

Since the *Dedicated Host Approach* is applied, the standalone SAR test exclusion procedure in KDB 447498 § 4.3.1 is applied in conjunction with KDB 616217 § 4.3 to determine the minimum test separation distance:

- When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
- When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.

SAR Test Exclusion Calculations for WLAN

Antennas < 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Wi-Fi Main (Chain B) Antenna															
Wi-Fi 2.4 GHz	2462	21.00	126	5	5	155	137.4	35.5		39.5 -MEASURE-	39.5 -MEASURE-	> 50 mm	> 50 mm	5.5 -MEASURE-	
Wi-Fi 5.2 GHz	5240	10.50	11	5	5	155	137.4	35.5		5 -MEASURE-	5 -MEASURE-	> 50 mm	> 50 mm	0.7 -EXEMPT-	
Wi-Fi 5.3 GHz	5320	10.50	11	5	5	155	137.4	35.5		5.1 -MEASURE-	5.1 -MEASURE-	> 50 mm	> 50 mm	0.7 -EXEMPT-	
Wi-Fi 5.5 GHz	5700	10.50	11	5	5	155	137.4	35.5		5.3 -MEASURE-	5.3 -MEASURE-	> 50 mm	> 50 mm	0.7 -EXEMPT-	
Wi-Fi 5.8 GHz	5825	10.50	11	5	5	155	137.4	35.5		5.3 -MEASURE-	5.3 -MEASURE-	> 50 mm	> 50 mm	0.7 -EXEMPT-	
Wi-Fi Aux (Chain A) Antenna															
Wi-Fi 2.4 GHz	2462	21.00	126	5	137.4	31.3	5	159.3		39.5 -MEASURE-	> 50 mm	6.4 -MEASURE-	39.5 -MEASURE-	> 50 mm	
Wi-Fi 5.2 GHz	5240	10.50	11	5	137.4	31.3	5	159.3		5 -MEASURE-	> 50 mm	0.8 -EXEMPT-	5 -MEASURE-	> 50 mm	
Wi-Fi 5.3 GHz	5320	10.50	11	5	137.4	31.3	5	159.3		5.1 -MEASURE-	> 50 mm	0.8 -EXEMPT-	5.1 -MEASURE-	> 50 mm	
Wi-Fi 5.5 GHz	5700	10.50	11	5	137.4	31.3	5	159.3		5.3 -MEASURE-	> 50 mm	0.8 -EXEMPT-	5.3 -MEASURE-	> 50 mm	
Wi-Fi 5.8 GHz	5825	10.50	11	5	137.4	31.3	5	159.3		5.3 -MEASURE-	> 50 mm	0.9 -EXEMPT-	5.3 -MEASURE-	> 50 mm	
Bluetooth	2480	11.50	14	5	137.4	31.3	5	159.3		4.4 -MEASURE-	> 50 mm	0.7 -EXEMPT-	4.4 -MEASURE-	> 50 mm	

Note(s):

According to KDB 447498, if the calculated threshold value is >3 then SAR testing is required.

Antennas > 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Wi-Fi Main (Chain B) Antenna															
Wi-Fi 2.4 GHz	2462	21.00	126	5	5	155	137.4	35.5		< 50 mm	< 50 mm	1145.6 mW -EXEMPT-	969.6 mW -EXEMPT-	< 50 mm	
Wi-Fi 5.2 GHz	5240	10.50	11	5	5	155	137.4	35.5		< 50 mm	< 50 mm	1115.5 mW -EXEMPT-	939.5 mW -EXEMPT-	< 50 mm	
Wi-Fi 5.3 GHz	5320	10.50	11	5	5	155	137.4	35.5		< 50 mm	< 50 mm	1115 mW -EXEMPT-	939 mW -EXEMPT-	< 50 mm	
Wi-Fi 5.5 GHz	5700	10.50	11	5	5	155	137.4	35.5		< 50 mm	< 50 mm	1112.8 mW -EXEMPT-	936.8 mW -EXEMPT-	< 50 mm	
Wi-Fi 5.8 GHz	5825	10.50	11	5	5	155	137.4	35.5		< 50 mm	< 50 mm	1112.2 mW -EXEMPT-	936.2 mW -EXEMPT-	< 50 mm	
Wi-Fi Aux (Chain A) Antenna															
Wi-Fi 2.4 GHz	2462	21.00	126	5	137.4	31.3	5	159.3		< 50 mm	969.6 mW -EXEMPT-	< 50 mm	< 50 mm	1188.6 mW -EXEMPT-	
Wi-Fi 5.2 GHz	5240	10.50	11	5	137.4	31.3	5	159.3		< 50 mm	939.5 mW -EXEMPT-	< 50 mm	< 50 mm	1158.5 mW -EXEMPT-	
Wi-Fi 5.3 GHz	5320	10.50	11	5	137.4	31.3	5	159.3		< 50 mm	939 mW -EXEMPT-	< 50 mm	< 50 mm	1158 mW -EXEMPT-	
Wi-Fi 5.5 GHz	5700	10.50	11	5	137.4	31.3	5	159.3		< 50 mm	936.8 mW -EXEMPT-	< 50 mm	< 50 mm	1155.8 mW -EXEMPT-	
Wi-Fi 5.8 GHz	5825	10.50	11	5	137.4	31.3	5	159.3		< 50 mm	936.2 mW -EXEMPT-	< 50 mm	< 50 mm	1155.2 mW -EXEMPT-	
Bluetooth	2480	11.50	14	5	137.4	31.3	5	159.3		< 50 mm	969.3 mW -EXEMPT-	< 50 mm	< 50 mm	1188.3 mW -EXEMPT-	

Note(s):

According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.

7.2. Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 7.1:

Test Configurations	Rear	Edge 1	Edge 2	Edge 3	Edge 4
		(Top Edge)	(Right Edge)	(Bottom Edge)	(Left Edge)
Wi-Fi 2.4 GHz (Main Antenna)	Yes	Yes	No	No	Yes
Wi-Fi 5.2 GHz (Main Antenna)	Yes	Yes	No	No	No
Wi-Fi 5.3 GHz (Main Antenna)	Yes	Yes	No	No	No
Wi-Fi 5.6 GHz (Main Antenna)	Yes	Yes	No	No	No
Wi-Fi 5.8 GHz (Main Antenna)	Yes	Yes	No	No	No
Wi-Fi 2.4 GHz (Aux Antenna)	Yes	No	Yes	Yes	No
Wi-Fi 5.2 GHz (Aux Antenna)	Yes	No	No	Yes	No
Wi-Fi 5.3 GHz (Aux Antenna)	Yes	No	No	Yes	No
Wi-Fi 5.6 GHz (Aux Antenna)	Yes	No	No	Yes	No
Wi-Fi 5.8 GHz (Aux Antenna)	Yes	No	No	Yes	No
Bluetooth	Yes	No	No	Yes	No

Note(s):

Yes = Testing is required.

No = Testing is not required.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

Date	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
			Measured	Target	Delta (%)	Measured	Target	Delta (%)
2019/7/23	Head	2400	39.20	39.29	-0.22	1.83	1.76	4.36
		2450	38.99	39.20	-0.54	1.89	1.80	4.74
		2480	38.88	39.16	-0.72	1.92	1.83	4.85
2019/10/7	Head	2400	38.43	39.29	-2.18	1.81	1.76	3.37
		2450	38.24	39.20	-2.45	1.88	1.80	4.52
		2480	38.13	39.16	-2.63	1.91	1.83	4.40
2019/8/1	Head	5250	36.63	35.95	1.89	4.54	4.71	-3.69
		5300	36.52	35.90	1.73	4.57	4.76	-3.91
		5350	36.41	35.85	1.56	4.64	4.81	-3.52
2019/8/1	Head	5500	36.16	35.65	1.43	4.81	4.97	-3.11
		5600	35.95	35.50	1.27	4.94	5.07	-2.66
		5650	35.83	35.45	1.07	5.00	5.12	-2.26
2019/8/5	Head	5750	35.99	35.35	1.81	5.16	5.22	-1.14
		5800	35.94	35.30	1.81	5.22	5.27	-0.93
		5850	35.90	35.25	1.84	5.30	5.32	-0.51

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 \pm 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be \geq 15.0 cm for SAR measurements \leq 3 GHz and \geq 10.0 cm for measurements $>$ 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 250 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
				Zoom Scan to 250 mW	Normalize to 1 W	Target (Ref. Value)	Delta \pm 10 %	Zoom Scan to 250 mW	Normalize to 1 W	Target (Ref. Value)	Delta \pm 10 %	
2019/7/23	Head	D2450V2_988	2019/12/06	14.00	56.0	52.90	5.86	6.42	25.7	24.80	3.55	1
2019/7/24	Head	D2450V2_988	2019/12/06	13.70	54.8	52.90	3.59	6.42	25.7	24.80	3.55	2
2019/10/7	Head	D2450V2_988	2019/12/06	13.00	52.0	52.90	-1.70	5.95	23.8	24.80	-4.03	3
Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
				Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta \pm 10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta \pm 10 %	
2019/8/1	Head	D5300V2_1244	2019/12/13	7.47	74.7	79.50	-6.04	2.13	21.3	22.90	-6.99	4
2019/8/2	Head	D5600V2_1244	2019/12/13	8.19	81.9	81.40	0.61	2.32	23.2	23.40	-0.85	5
2019/8/5	Head	D5800V2_1244	2019/12/13	8.40	84.0	78.70	6.73	2.40	24.0	22.50	6.67	6

9. Conducted Output Power Measurements

9.1. Wi-Fi 2.4GHz (DTS Band)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Max Output Power (dBm)		SAR Test (Yes/No)		
					Chain A	Chain B	Chain A	Chain B			
2.4	802.11b	1 Mbps	1	2412	19.21	19.43	19.5	20	Yes		
			6	2437	20.85	20.74	21	21			
			11	2462	19.75	20.31	20	21			
	802.11g	6 Mbps	1	2412	Not Required	20.84	16.9	16.5	17	No	
			6	2437			20.84	21			21
			11	2462			16.36	17			16.5
	802.11n (HT20)	MCS0	1	2412	Not Required	20.96	16.43	16	16.5	No	
			6	2437			20.96	20.5	21		
			11	2462			16.45	16	16.5		
	802.11n (HT40)	MCS0	3	2422	Not Required	Not Required	14	13.5	14.5	No	
			6	2437			16	16			
			9	2452			14.5	14.5			

Note(s):

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.2. Wi-Fi 5GHz (U-NII Bands)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Max Output Power (dBm)		SAR Test (Yes/No)
					Chain A	Chain B	Chain A	Chain B	
5.2 (U-NII 1)	802.11a	6 Mbps	36	5180	9.97	10.03	10.5	10.5	No
			40	5200	9.87	10.04			
			44	5220	9.96	9.96			
			48	5240	9.97	9.98			
	802.11n (HT20)	MCS0	36	5180	9.86	9.95	10.5	10.5	No
			40	5200	10.01	9.96			
			44	5220	9.84	9.87			
			48	5240	9.76	9.96			
	802.11n (HT40)	MCS0	38	5190	9.95	10.01	10.5	10.5	Yes
			46	5230	9.97	10			
5.3 (U-NII 2A)	802.11a	6 Mbps	52	5260	9.91	10.05	10.5	10.5	No
			56	5280	10.2	10.02			
			60	5300	9.94	10.04			
			64	5320	9.97	9.94			
	802.11n (HT20)	MCS0	52	5260	9.85	9.99	10.5	10.5	No
			56	5280	9.96	9.99			
			60	5300	9.98	9.95			
			64	5320	9.97	9.91			
	802.11n (HT40)	MCS0	54	5270	9.92	10.06	10.5	10.5	Yes
			62	5310	10.02	10.04			

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Max Output Power (dBm)		SAR Test (Yes/No)	
					Chain A	Chain B	Chain A	Chain B		
5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500	9.94	9.92	10.5	10.5	No	
			104	5520	9.97	10.01				
			108	5540	9.84	9.88				
			112	5560	9.93	10.03				
			116	5580	10.2	9.95				
			132	5660	9.97	9.93				
			136	5680	9.97	9.91				
			140	5700	9.95	9.87				
			144	5720	10.2	9.97				
	802.11n (HT20)	MCS0	100	5500	10.3	9.9	10.5	10.5	No	
			104	5520	9.88	10				
			108	5540	9.85	9.91				
			112	5560	9.87	10.03				
			116	5580	9.82	9.99				
			132	5660	9.93	9.9				
			136	5680	9.93	9.87				
			140	5700	9.96	9.85				
			144	5720	9.92	9.83				
	802.11n (HT40)	MCS0	102	5510	10.04	10.03	10.5	10.5	Yes	
			110	5550	9.98	9.94				
			118	5590	9.99	9.96				
			134	5670	10.03	10.06				
			142	5710	9.97	9.99				
	5.8 (U-NII 3)	802.11a	6 Mbps	149	5745	9.9	10.2	10.5	10.5	No
				153	5765	10.01	9.97			
				157	5785	9.93	9.91			
				161	5805	10	9.95			
				165	5825	10.04	9.96			
802.11n (HT20)		MCS0	149	5745	9.72	9.88	10.5	10.5	No	
			153	5765	9.7	9.81				
			157	5785	9.76	9.8				
			161	5805	9.71	9.83				
			165	5825	9.9	9.74				
802.11n (HT40)		MCS0	151	5755	10.04	10.05	10.5	10.5	Yes	
			159	5795	10.02	10.03				

Note(s):

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

9.3. Bluetooth

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Max Output Power (dBm)
2.4	DH5	1 Mbps	0	2402	9.4	11.5
			39	2441	9.59	
			78	2480	9.96	
	2-DH5	1 Mbps	0	2402	8.1	10
			39	2441	8.22	
			78	2480	8.57	
	3-DH5	3 Mbps	0	2402	8.08	10
			39	2441	8.19	
			78	2480	8.53	
2.4	BLE, GFSK	1 Mbps	0	2402	8.08	10
			20	2437	8.19	
			39	2480	8.53	

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. Wi-Fi_Body (DTS Band)

Main Antenna

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	0	Rear	6	2437.0	100.0%	21.0	20.74	0.501	0.532	0.256	0.272	
			Edge 1	1	2412.0	100.0%	20.0	19.43	0.759	0.865	0.364	0.415	
				6	2437.0	100.0%	21.0	20.74	0.830	0.881	0.396	0.420	
			11	2462.0	100.0%	21.0	20.31	1.080	1.266	0.508	0.595	1	
	Edge 4	6	2437.0	100.0%	21.0	20.74	0.063	0.067	0.033	0.035			
	802.11g 6 Mbps	0	Edge 1	6	2437.0	100.0%	21.0	20.84	0.662	0.701	0.315	0.333	
802.11n (HT20) MCS0	0	Edge 1	2437.0	98.0%	21.0	20.96	0.734	0.756	0.346	0.356	2437.0		

Aux Antenna

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	0	Rear	6	2437.0	100.0%	21.0	20.85	0.671	0.695	0.347	0.359	
			Edge 1	6	2437.0	100.0%	21.0	20.85	0.012	0.012	0.006	0.006	
			Edge 2	6	2437.0	100.0%	21.0	20.85	0.147	0.152	0.067	0.069	
			Edge 3	1	2412.0	100.0%	19.5	19.21	0.795	0.850	0.383	0.409	
				6	2437.0	100.0%	21.0	20.85	0.750	0.776	0.356	0.369	
				11	2462.0	100.0%	20.0	19.75	0.536	0.568	0.257	0.272	

10.2. Wi-Fi Body (U-NII Band)

5.3GHz Main Antenna

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.3 GHz U-NII 2A	802.11n 40 MCS0	0	Rear	54	5270.0	100.0%	10.5	10.06	0.237	0.262	0.070	0.077	
			Edge 1	54	5270.0	100.0%	10.06	0.204	0.226	0.066	0.073	10.06	

5.3GHz Aux Antenna

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.3 GHz U-NII 2A	802.11n 40 MCS0	0	Rear	62	5310.0	100.0%	10.5	10.02	0.215	0.240	0.074	0.083	
			Edge 3	62	5310.0	100.0%	10.5	10.02	0.192	0.214	0.066	0.074	

5.5GHz Main Antenna

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.5 GHz U-NII 2C	802.11n 40 MCS0	0	Rear	134	5670.0	100.0%	10.5	10.06	0.292	0.323	0.090	0.100	
			Edge 1	134	5670.0	100.0%	10.5	10.06	0.305	0.338	0.100	0.111	2

5.5GHz Aux Antenna

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.5 GHz U-NII 2C	802.11n 40 MCS0	0	Rear	102	5510.0	100.0%	10.5	10.04	0.149	0.166	0.051	0.057	
			Edge 3	102	5510.0	100.0%	10.5	10.04	0.163	0.181	0.053	0.059	

5.8GHz Main Antenna

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.8 GHz U-NII 3	802.11n 40 MCS0	0	Rear	151	5755.0	100.0%	10.5	10.05	0.283	0.314	0.087	0.096	
			Edge 1	151	5755.0	100.0%	10.5	10.05	0.275	0.305	0.091	0.101	

5.8GHz Aux Antenna

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.8 GHz U-NII 3	802.11n 40 MCS0	0	Rear	151	5755.0	100.0%	10.5	10.04	0.214	0.238	0.068	0.075	
			Edge 3	151	5755.0	100.0%	10.5	10.04	0.272	0.302	0.090	0.100	

10.3. Bluetooth

Aux Antenna

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
2.4GHz	GFSK	0	Rear	78	2480.0	77.0%	11.5	9.96	0.032	0.059	0.015	0.028	
			Edge 3	0	2402.0	77.0%	11.5	9.40	0.031	0.066	0.014	0.028	
				78	2480.0	77.0%	11.5	9.96	0.036	0.067	0.002	0.003	3

10.4. Estimated SAR

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Wi-Fi Main (Chain B) Antenna															
Wi-Fi 2.4 GHz	2462	21.00	126	5	5	155	137.4	35.5		MEASURE-	MEASURE-	0.400	0.400	MEASURE-	
Wi-Fi 5.2 GHz	5240	10.50	11	5	5	155	137.4	35.5		MEASURE-	MEASURE-	0.400	0.400	0.093	
Wi-Fi 5.3 GHz	5320	10.50	11	5	5	155	137.4	35.5		MEASURE-	MEASURE-	0.400	0.400	0.094	
Wi-Fi 5.5 GHz	5700	10.50	11	5	5	155	137.4	35.5		MEASURE-	MEASURE-	0.400	0.400	0.097	
Wi-Fi 5.8 GHz	5825	10.50	11	5	5	155	137.4	35.5		MEASURE-	MEASURE-	0.400	0.400	0.098	
Wi-Fi Aux (Chain A) Antenna															
Wi-Fi 2.4 GHz	2462	21.00	126	5	137.4	31.3	5	159.3		MEASURE-	0.400	MEASURE-	MEASURE-	0.400	
Wi-Fi 5.2 GHz	5240	10.50	11	5	137.4	31.3	5	159.3		MEASURE-	0.400	0.108	MEASURE-	0.400	
Wi-Fi 5.3 GHz	5320	10.50	11	5	137.4	31.3	5	159.3		MEASURE-	0.400	0.109	MEASURE-	0.400	
Wi-Fi 5.5 GHz	5700	10.50	11	5	137.4	31.3	5	159.3		MEASURE-	0.400	0.113	MEASURE-	0.400	
Wi-Fi 5.8 GHz	5825	10.50	11	5	137.4	31.3	5	159.3		MEASURE-	0.400	0.114	MEASURE-	0.400	
Bluetooth	2480	11.50	14	5	137.4	31.3	5	159.3		MEASURE-	0.400	0.095	MEASURE-	0.400	

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Main Antenna

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Reported SAR (W/kg)		Largest to Smallest SAR Ratio
							Original	Repeated	
2.4GHz	802.11b 1 Mbps	0	Edge 1	11	2462.0	100.0%	1.080	1.100	1.02

Aux Antenna

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Reported SAR (W/kg)		Largest to Smallest SAR Ratio
							Original	Repeated	
2.4GHz	802.11b 1 Mbps	0	Edge 3	1	2412	100.0%	0.795	0.854	1.07

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

12.1. Sum of the SAR for Wi-Fi 2.4GHz Chain B & BT

Test Position			Σ 1-g SAR (W/kg)
	WiFi Chain B	BT	WiFi Chain B + BT
	①	②	① + ②
Rear	0.532	0.059	0.591
Edge 1	1.266	0.000	1.266
Edge 2	0.400	0.095	0.495
Edge 3	0.400	0.067	0.467
Edge 4	0.067	0.400	0.467

12.2. Sum of the SAR for Wi-Fi 2.4GHz Chain A & Wi-Fi 2.4GHz Chain B

Test Position	Standalone SAR (W/kg)		Σ 1-g SAR (W/kg)
	WiFi Chain A	WiFi Chain B	WiFi Chain A + WiFi Chain B
	①	②	① + ②
Rear	0.695	0.532	1.227
Edge 1	0.012	1.266	1.278
Edge 2	0.152	0.400	0.552
Edge 3	0.850	0.400	1.250
Edge 4	0.400	0.067	0.467

12.3. Sum of the SAR for Wi-Fi 5GHz Chain B & BT

Test Position	Standalone SAR (W/kg)		Σ 1-g SAR (W/kg)
	WiFi Chain B	BT	WiFi Chain B + BT
	①	②	① + ②
Rear	0.323	0.059	0.382
Edge 1	0.338	0.000	0.338
Edge 2	0.400	0.095	0.495
Edge 3	0.400	0.067	0.467
Edge 4	0.098	0.400	0.498

12.4. Sum of the SAR for Wi-Fi 5GHz Chain A & Wi-Fi 5GHz Chain B

Test Position	Standalone SAR (W/kg)		Σ 1-g SAR (W/kg)
	WiFi Chain A	WiFi Chain B	WiFi Chain A + WiFi Chain B
	①	②	① + ②
Rear	0.240	0.323	0.563
Edge 1	0.400	0.338	0.738
Edge 2	0.114	0.400	0.514
Edge 3	0.302	0.400	0.702
Edge 4	0.400	0.098	0.498

12.5. Sum of the SAR for Wi-Fi 5GHz Chain A & Wi-Fi 5GHz Chain B & BT

Test Position	Standalone SAR (W/kg)			Σ 1-g SAR (W/kg)
	WiFi Chain A	WiFi Chain B	BT	WiFi Chain A + WiFi Chain B + BT
	①	②	③	① + ② + ③
Rear	0.240	0.323	0.059	0.622
Edge 1	0.400	0.338	0.000	0.738
Edge 2	0.114	0.400	0.095	0.609
Edge 3	0.302	0.400	0.067	0.769
Edge 4	0.400	0.098	0.400	0.898

Appendixes

Refer to separated files for the following appendixes.

4789004205-US-S0-V0 Appendix A: Antenna Dimensions and Separation Distances

4789004205-US-S0-V0 Appendix B: SAR System Check Plots

4789004205-US-S0-V0 Appendix C: Highest SAR Test Plots

4789004205-US-S0-V0 Appendix D: SAR Liquid Tissue Ingredients

4789004205-US-S0-V0 Appendix E: SAR Probe and Dipole Calibration Certificates

END OF REPORT