



<b>EMC TEST REPORT</b> <b>FCC 47 CFR Part 15B</b> <b>Industry Canada RSS-Gen</b> <b>Electromagnetic compatibility - Unintentional radiators</b>	
<b>Report Reference No.</b> .....	G0M-1411-4308-EF0115B-V02
<b>Testing Laboratory</b> .....	Eurofins Product Service GmbH
Address .....	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation .....	<div style="text-align: center;">   </div> <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01            FCC Filed Test Laboratory, Reg.-No.: 96970            IC OATS Filing assigned code: 3470A</p>
<b>Applicant's name</b> .....	Spectralink Europe ApS
Address .....	Langmarksvej 34 8700 Horsens DENMARK
<b>Test specification:</b>	
Standard.....	47 CFR Part 15 Subpart B RSS-Gen, Issue 3, 2010-12 ANSI C63.4:2009
<b>Equipment under test (EUT):</b>	
Product description	DECT handset 7522
Model No.	K022b
Additional Models	None
Hardware version	PCS 03
Firmware / Software version	PCS 14BA
IDs	FCC-ID: PXA-K022B                      IC: 4604A-K022B
<b>Test result</b>	<b>Passed</b>

**Possible test case verdicts:**

- not applicable to test object .....: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

**Testing:**

Date of receipt of test item .....: 2014-11-13  
 Date (s) of performance of tests .....: 2014-12-23  
 Compiled by.....: Steffen Zunke  
 Tested by (+ signature).....: Steffen Zunke  
 Approved by (+ signature) .....: Marcus Klein  
 Date of issue.....: 2015-02-25  
 Total number of pages.....: 23

**General remarks:**

**The test results presented in this report relate only to the object tested.**  
**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

The DECT phone K022b is identical with the DECT phone K022a except the Bluetooth module. The DECT phone K022b has no Bluetooth module integrated on the PCB. For the DECT phone K022b the radiated emission was measured in DECT mode only. For all other measurements the tests from K022a are valid too. The measurement results were showed in the report G0M-1411-4306-EF0115B-V01 from the DECT phone K022a.

The customer declares the identical of K022a and K022b in following document DiT\_K022ab.

---

## Version History

Version	Issue Date	Remarks	Revised by
V01	2015-02-25	Initial Release	
V02	2015-02-25	Replaced document: Replaced by:  Reason:  FCC ID and IC ID changed	S: Zunke

---


## REPORT INDEX

<b>1</b>	<b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>5</b>
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	7
1.3	Photos – Test setup	8
1.4	Supporting Equipment Used During Testing	9
1.5	Input / Output Ports	9
1.6	Operating Modes and Configurations	10
1.7	Test Equipment Used During Testing	11
1.8	Sample emission level calculation	12
<b>2</b>	<b>RESULT SUMMARY</b>	<b>13</b>
<b>3</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>14</b>
3.1	Test Conditions and Results – Radiated emissions	14


## 1 Equipment (Test item) Description

<b>Description</b>	DECT handset 7522	
<b>Model</b>	K022b	
<b>Additional Models</b>	None	
<b>Serial number</b>	None	
<b>Hardware version</b>	PCS 03	
<b>Software / Firmware version</b>	PCS 14BA	
<b>FCC-ID</b>	PXA-K022B	
<b>IC</b>	4604A-K022B	
<b>Power supply</b>	3.7 VDC via rechargeable Battery	
<b>AC/DC-Adaptor</b>	Model : UE08WCP-060100SPA Manufacturer : Fuhua Input : 100-240VAC / 50-60Hz Output : 6VDC / 1.0A	
<b>Radio module</b>	Type	DECT module
	Model	KT4588A00
	Manufacturer	Spectralink
	HW Version	PCS 04
	SW Version	PCS 14A
	FCC-ID	-
	IC	-
<b>Manufacturer</b>	Spectralink Europe ApS Langmarksvej 34 8700 Horsens DENMARK	
<b>Highest emission frequency</b>	Fmax [MHz] = 4966	
<b>Device classification</b>	Class B	
<b>Equipment type</b>	Tabletop	
<b>Number of tested samples</b>	1	


1.1 Photos – Equipment external

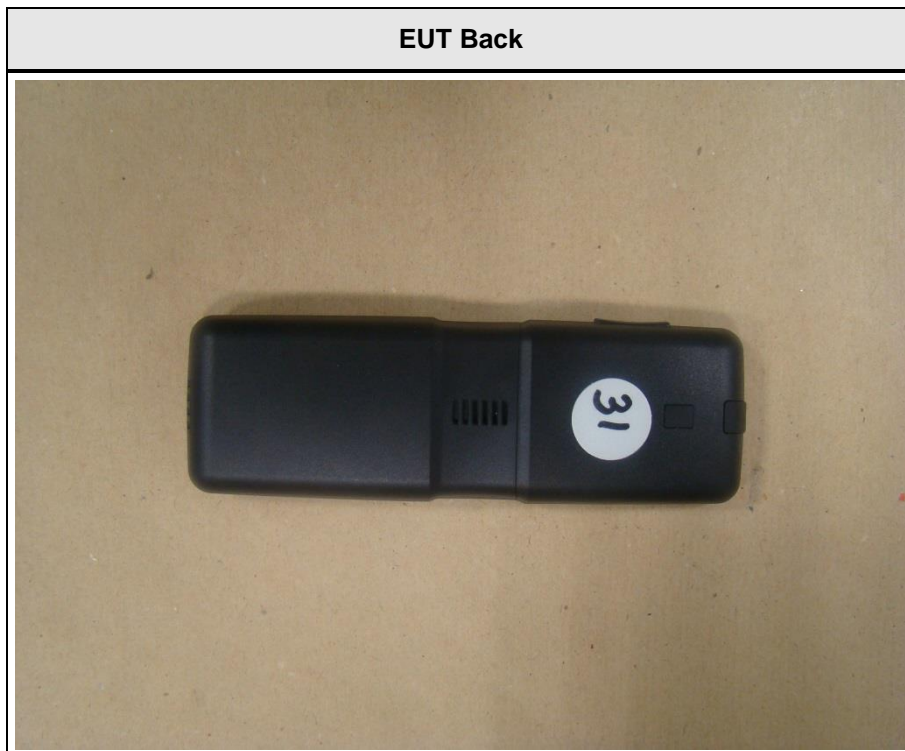

1.2 Photos – Equipment internal

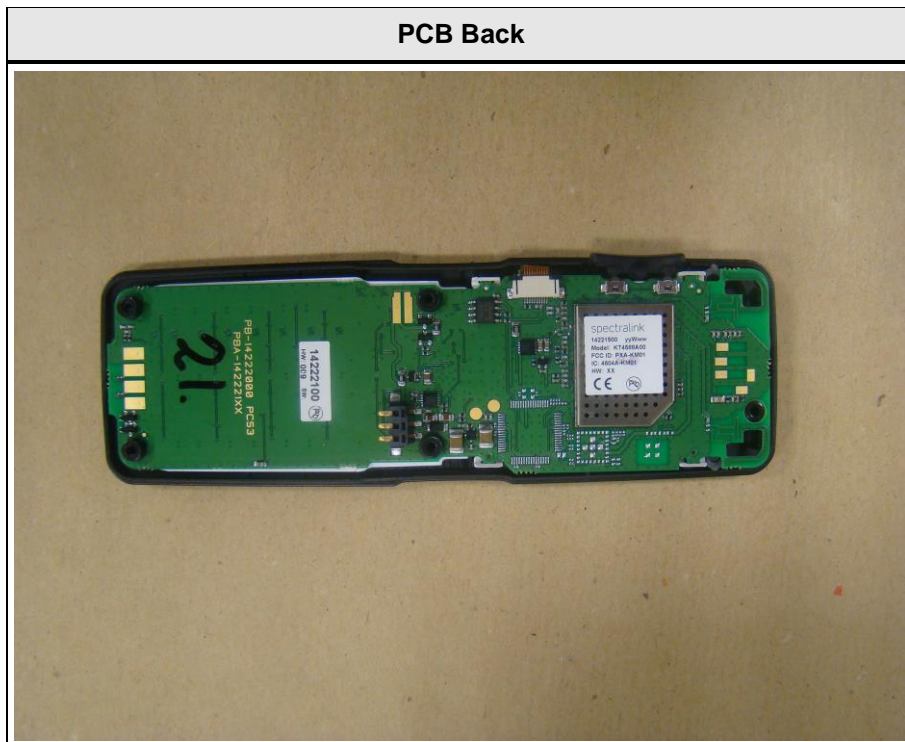

1.3 Photos – Test setup

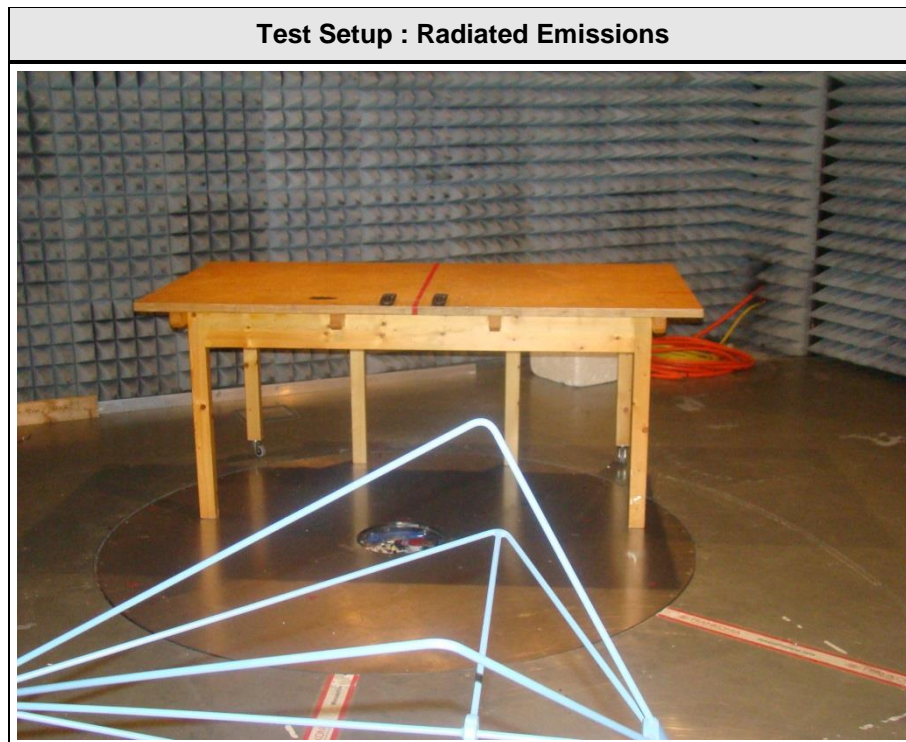



#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	IP-DECT Server 400	Spectralink	K005	-
AE	DECT Phone	Spectralink	K022b	-
AE	Power Supply	Fuhua	UE08WCP-060100SPA	-
AE	Charger, single	Spectralink	84642472	-
AE	Charger, single, USB	Spectralink	84642473	-

**\*Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or  
SIM : Simulator (Not Subjected to Test)  
CABL : Connecting cables

#### 1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
1	Power	AC	>3m	No	-

**\*Note:** Use the following abbreviations:

AC : AC power port  
DC : DC power port  
N/E : Non electrical  
I/O : Signal input or output port  
TP : Telecommunication port

## 1.6 Operating Modes and Configurations

Mode #	Description
1	DECT link to another phone, battery powered

Configuration #	EUT Configuration
1	Normal configuration, using DECT antenna 1, DECT test mode
2	Normal configuration, using DECT antenna 2, DECT test mode

**1.7 Test Equipment Used During Testing**

<b>Measurement Software</b>			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

<b>Radiated emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU26	EF00887	2014-01	2015-01

<b>Conducted emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

## 1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 4.9 & 4.10	Radiated emissions	ANSI C 63.4	PASS	-
47 CFR 15.107 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	See report G0M-1411-4306- EF0115B-V01 -
<b>Remarks:</b>				

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen		Verdict: PASS				
Laboratory Parameters:	Required prior to the test	During the test				
Ambient Temperature	15 to 35 °C	23°C				
Relative Humidity	30 to 60 %	31%				
Test according referenced standards	Reference Method					
	ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class	Equipment class					
	Class B					
Test frequency range determined from highest emission frequency	Highest emission frequency					
	Fmax [MHz] = 4966					
Fully configured sample scanned over the following frequency range	Frequency range					
	30 MHz to 18 GHz					
Operating mode configuration	1					
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dB $\mu$ V/m]	Result	Average [dB $\mu$ V/m]	Result	Peak [dB $\mu$ V/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments: Measurements were performed up to 18 GHz, above 18 GHz no relevant emission were determined.						

**Test Procedure:**

The test site is in accordance with ANSI C63-4:2009 requirements and is listed by FCC.

The measurement procedure is as follows:


- 1) The EUT was placed on a 0.8 m non conductive table at a 3 m distance from the receive antenna (ANSI C63.4: 2009 item 6.2)
- 2) The antenna output was connected to the measurement receiver
- 3) A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- 4) Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.

**Spurious emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1411-4308

Manufacturer:	Spectralink Europe ApS
EUT Name:	DECT handset 7522
Model:	K022b
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 3.7VDC via rechargeable Battery
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	DECT link to another phone
Test Date:	2014-12-23
Note:	

Index 9

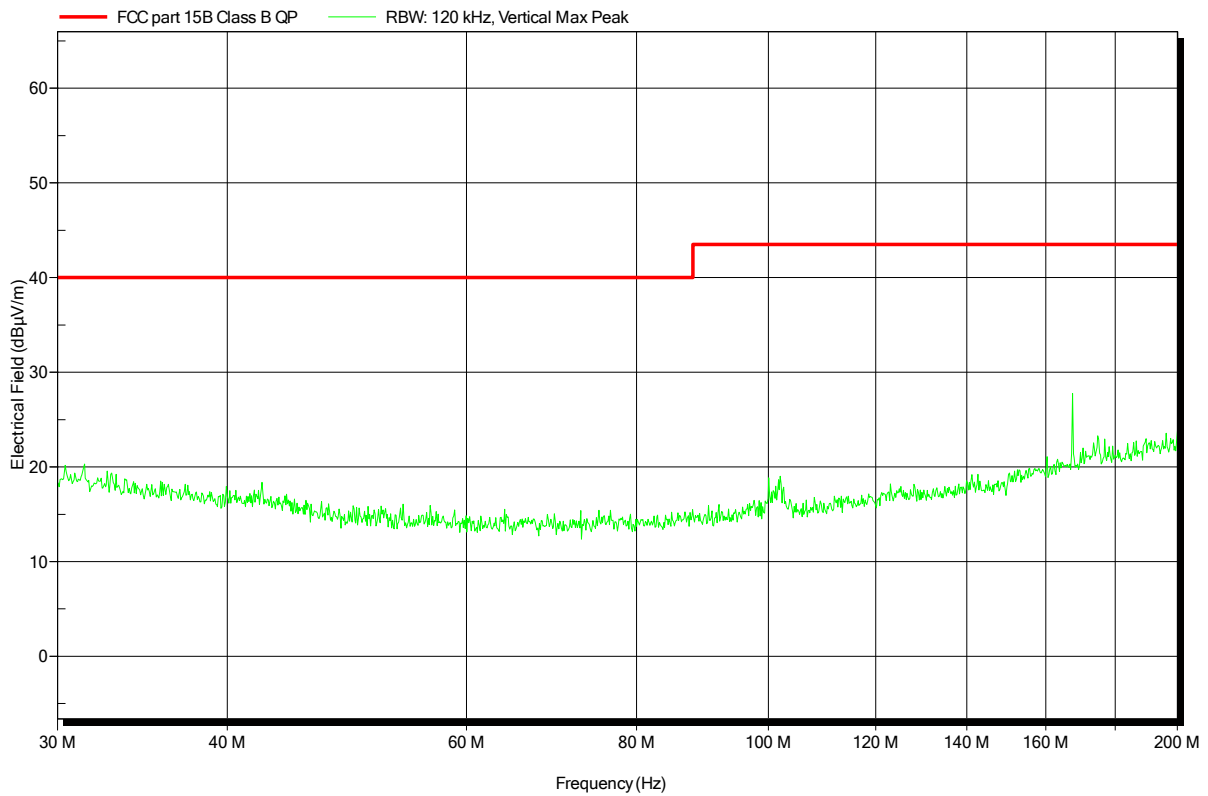




**Spurious emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1411-4308

Manufacturer:	Spectralink Europe ApS
EUT Name:	DECT handset 7522
Model:	K022b
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 3.7VDC via rechargeable Battery
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	DECT link to another phone
Test Date:	2014-12-23
Note:	

Index 10

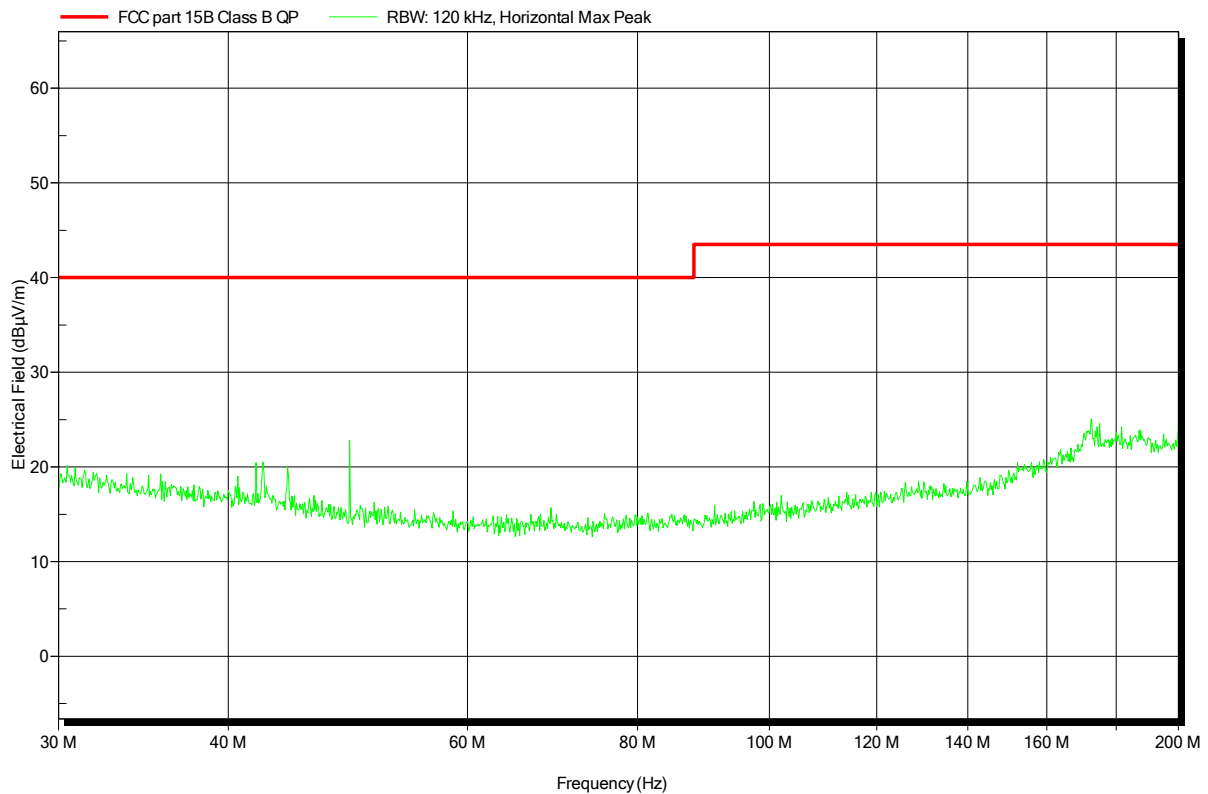


**Spurious emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1411-4308

Manufacturer:	Spectralink Europe ApS
EUT Name:	DECT handset 7522
Model:	K022b
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 3.7VDC via rechargeable Battery
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	DECT link to another phone
Test Date:	2014-12-23
Note:	

Index 11

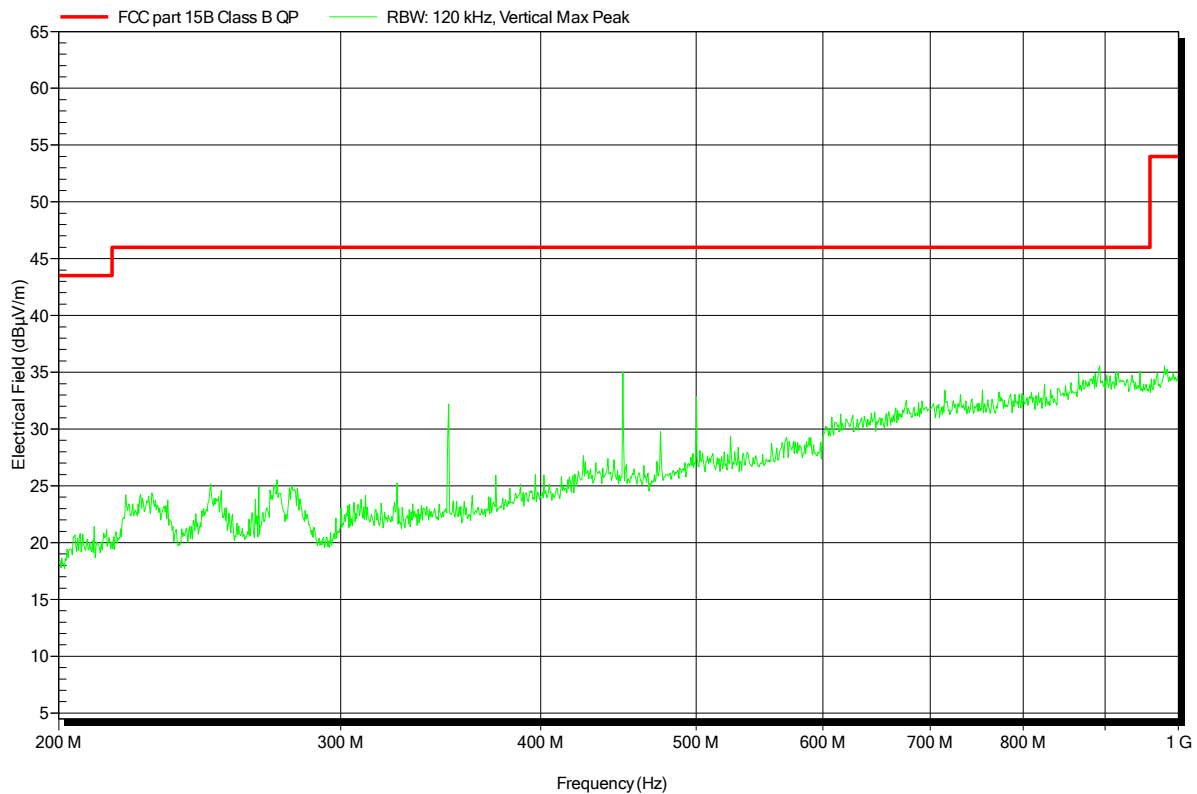


**Spurious emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1411-4308

Manufacturer:	Spectralink Europe ApS
EUT Name:	DECT handset 7522
Model:	K022b
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 3.7VDC via rechargeable Battery
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3m
Mode:	DECT link to another phone
Test Date:	2014-12-23
Note:	

Index 12

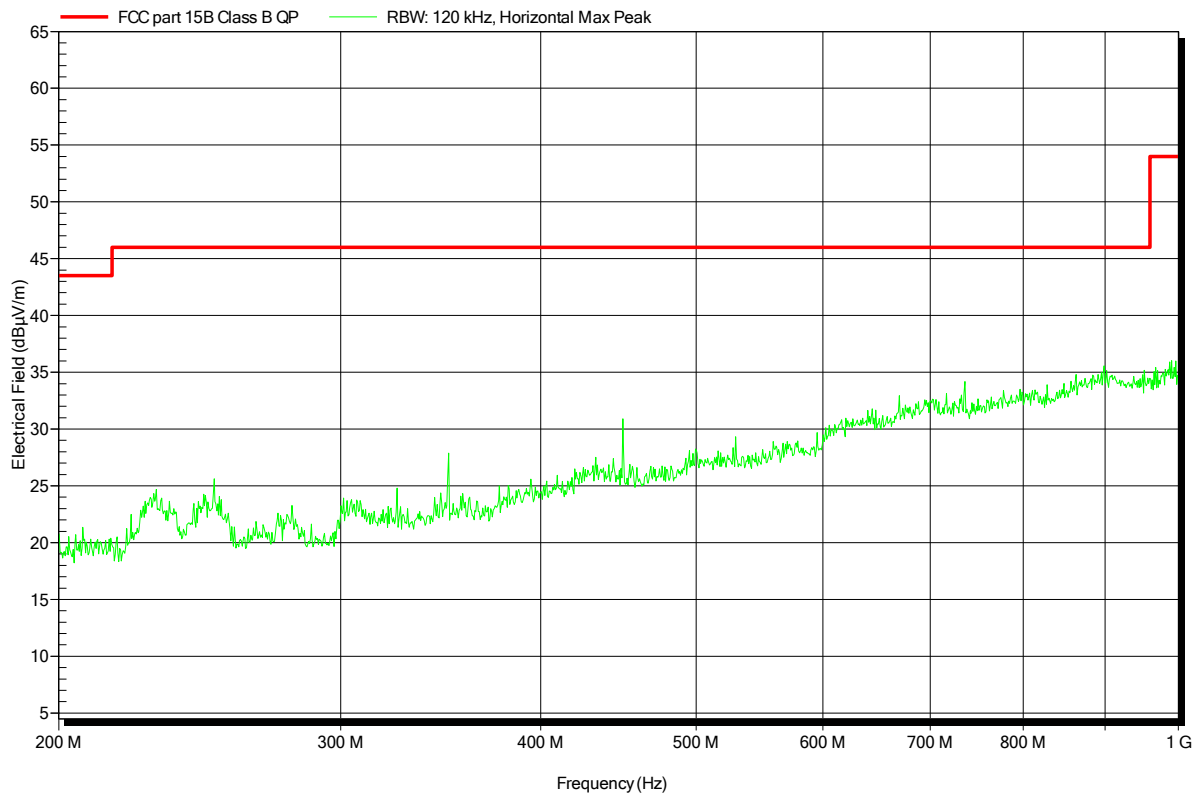


**Spurious emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1411-4308

Manufacturer:	Spectralink Europe ApS
EUT Name:	DECT handset 7522
Model:	K022b
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 3.7VDC via rechargeable Battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	DECT link to another phone
Test Date:	2014-12-23
Note:	

Index 14

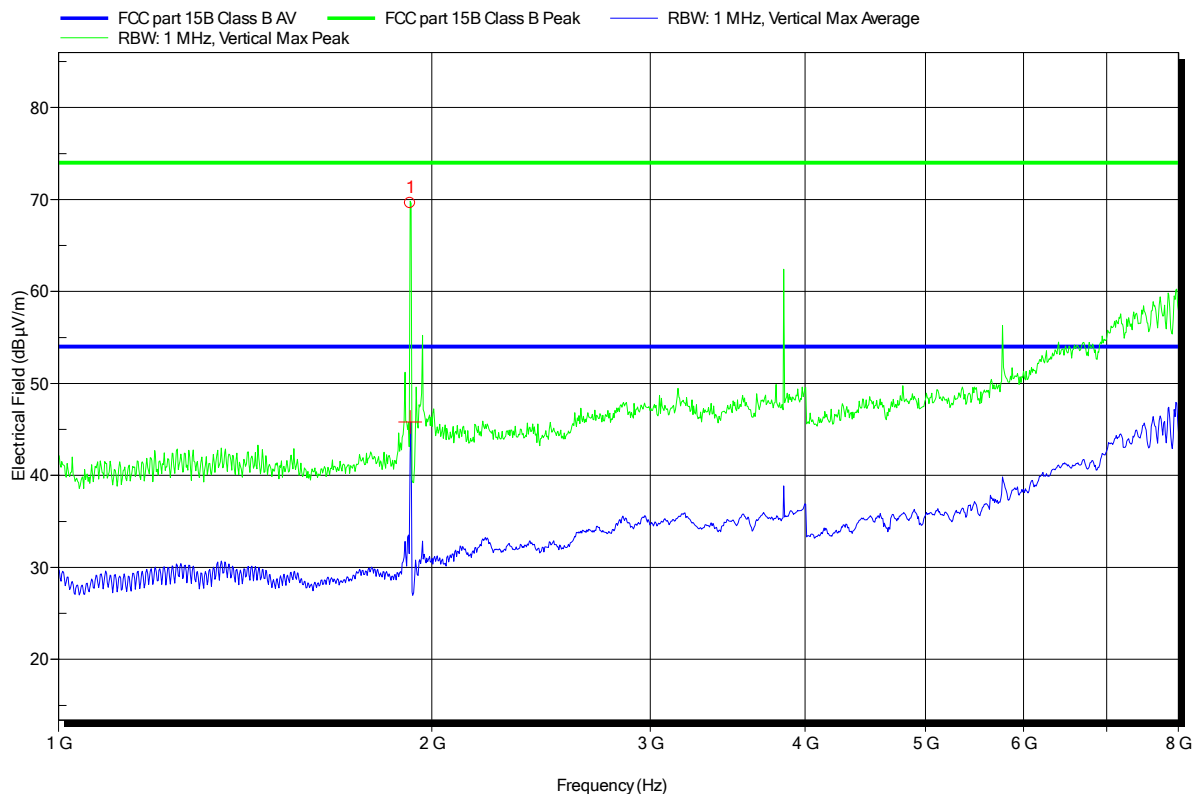


Frequency  
1.922 GHz DECT carrier

**Spurious emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1411-4308

Manufacturer:	Spectralink Europe ApS
EUT Name:	DECT handset 7522
Model:	K022b
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 3.7VDC via rechargeable Battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	DECT link to another phone
Test Date:	2014-12-23
Note:	

Index 13

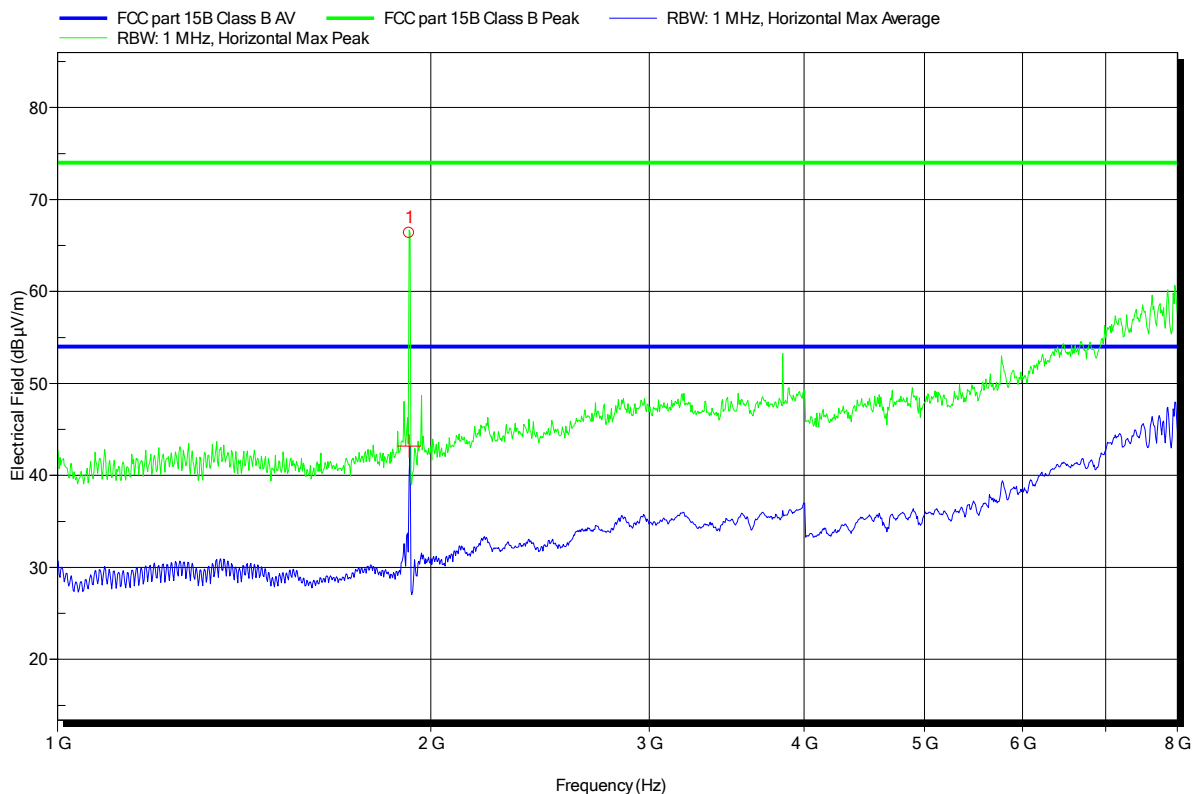


Frequency  
1.922 GHz DECT carrier

**Spurious emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1411-4308

Manufacturer:	Spectralink Europe ApS
EUT Name:	DECT handset 7522
Model:	K022b
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 3.7VDC via rechargeable Battery
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	DECT link to another phone
Test Date:	2014-12-23
Note:	

Index 15

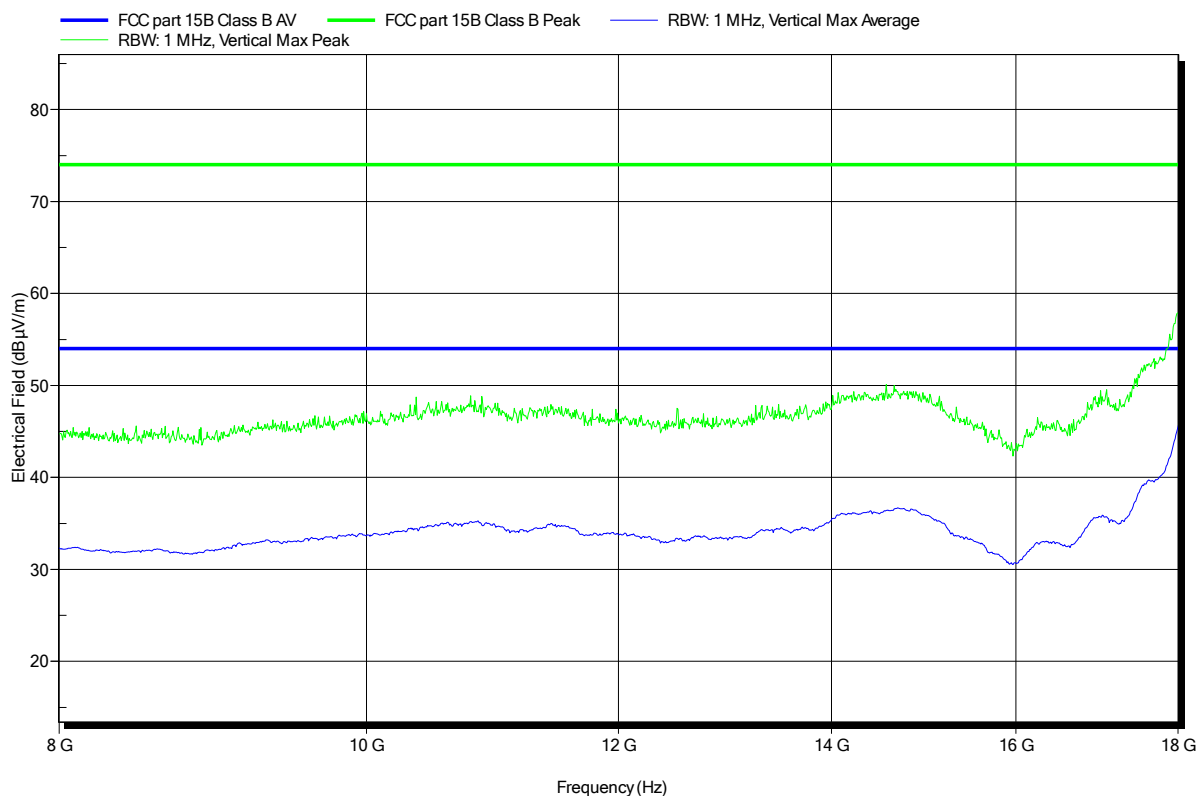

**Spurious emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1411-4308

Manufacturer:	Spectralink Europe ApS
EUT Name:	DECT handset 7522
Model:	K022b
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 3.7VDC via rechargeable Battery
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	DECT link to another phone
Test Date:	2014-12-23
Note:	

Index 16

