




Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 25.10 dBm VBW 1 MHz
31 dBm 2.40122257 GHz SWT 5 ms Unit dBm

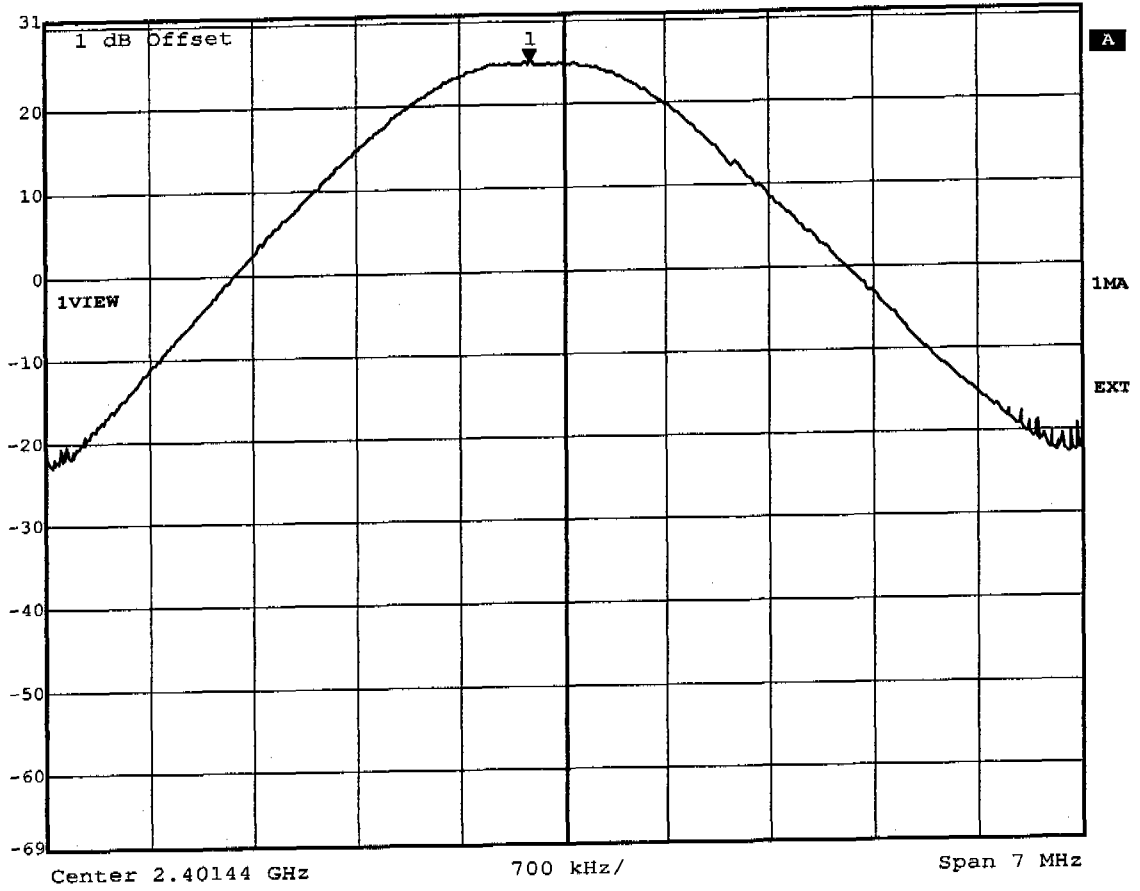

Title: Peak Output Power conducted Ch.: 0
Comment A: IP600-ISM
Date: 16.OCT.2003 12:49:11




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 25.30 dBm VBW 1 MHz
31 dBm 2.44118868 GHz SWT 5 ms Unit dBm

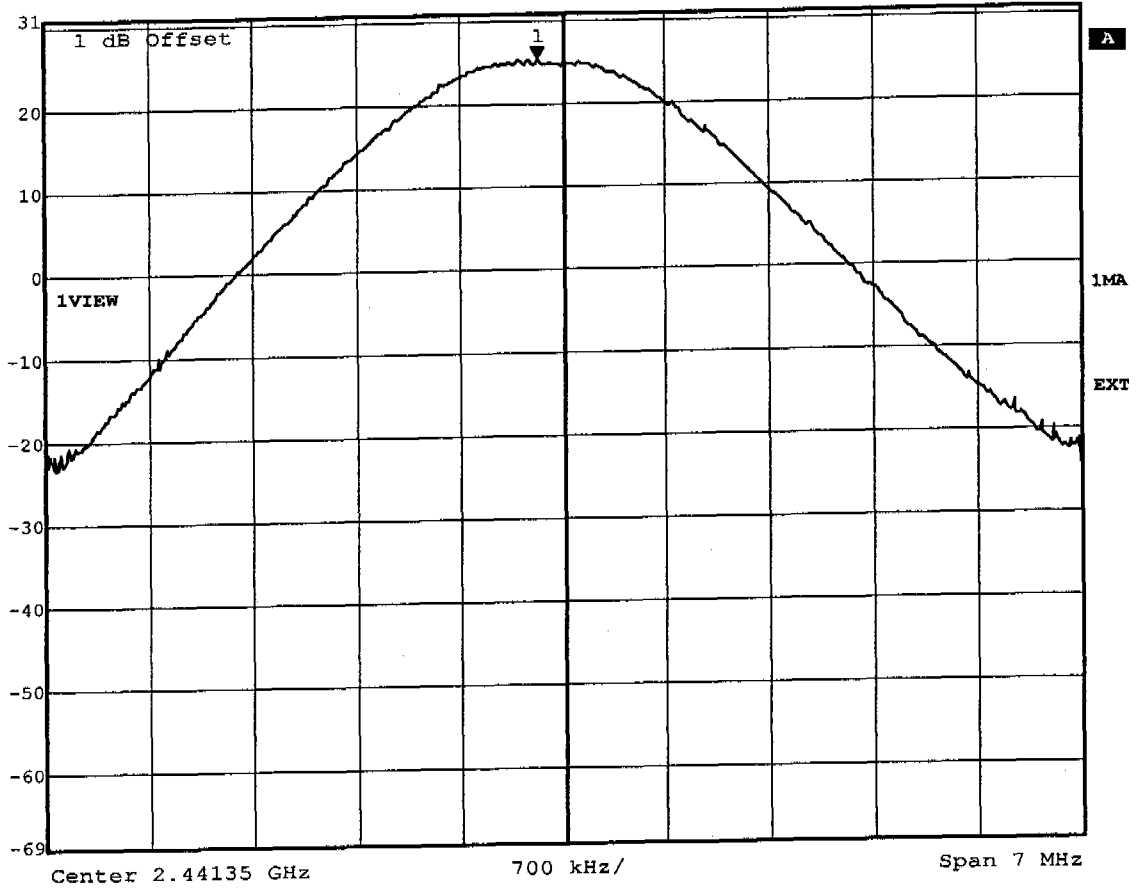

Title: Peak Output Power conducted Ch.: 39
Comment A: IP600-ISM
Date: 16.OCT.2003 12:46:49




Marker 1 [T1]	RBW	1 MHz	RF Att	60 dB
Ref Lvl	25.14 dBm	VBW	1 MHz	
31 dBm	2.48119687 GHz	SWT	5 ms	Unit
				dBm

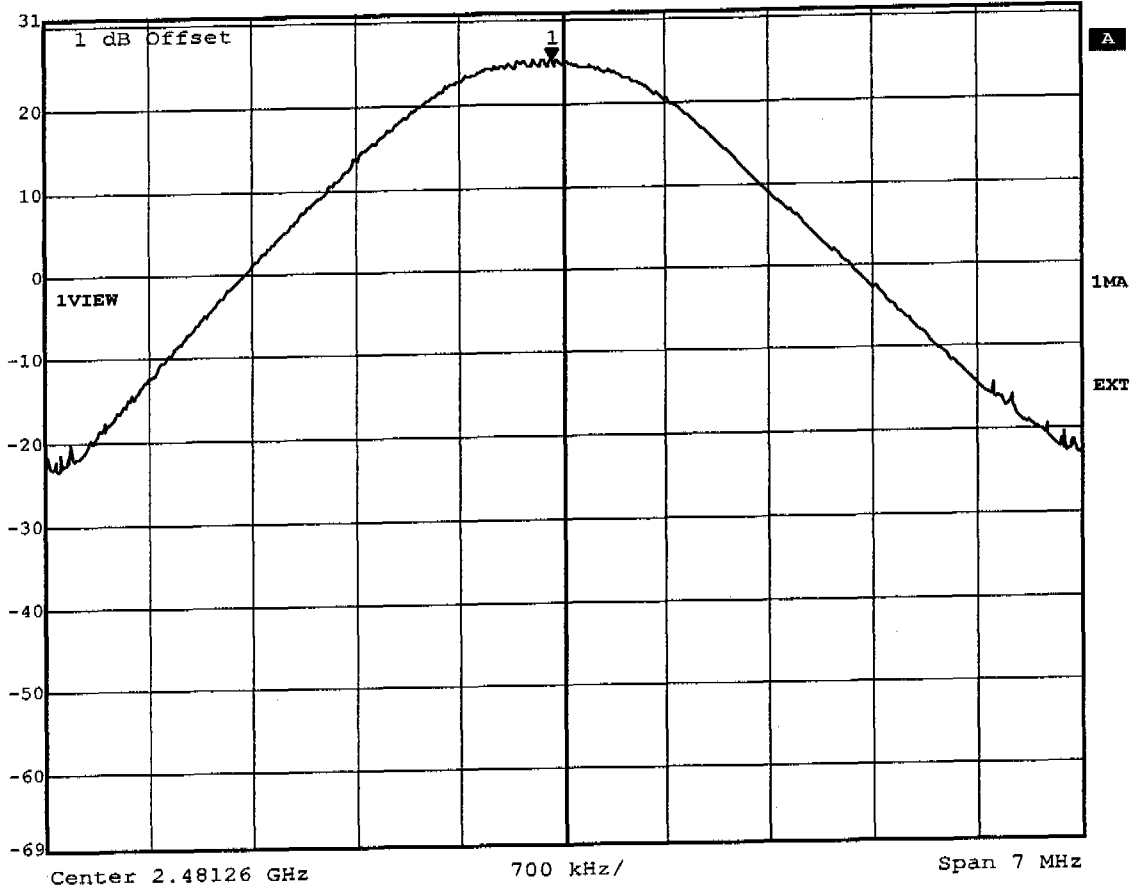

Title: Peak Output Power conducted Ch.: 78
Comment A: IP600-ISM
Date: 16.OCT.2003 12:43:57


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 15.31dBm, RBW: 5MHz

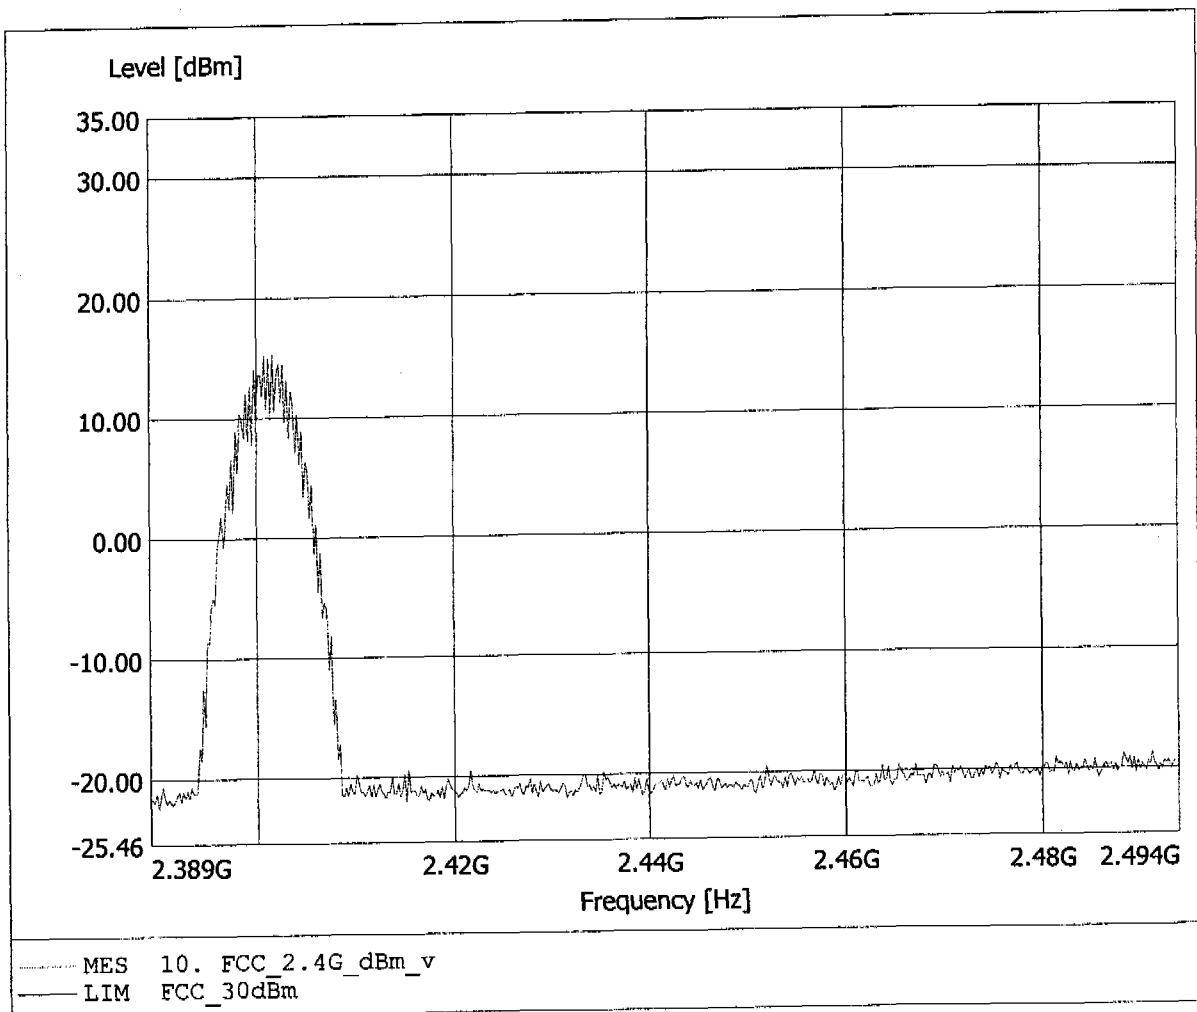


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 25.05dBm, RBW: 5MHz

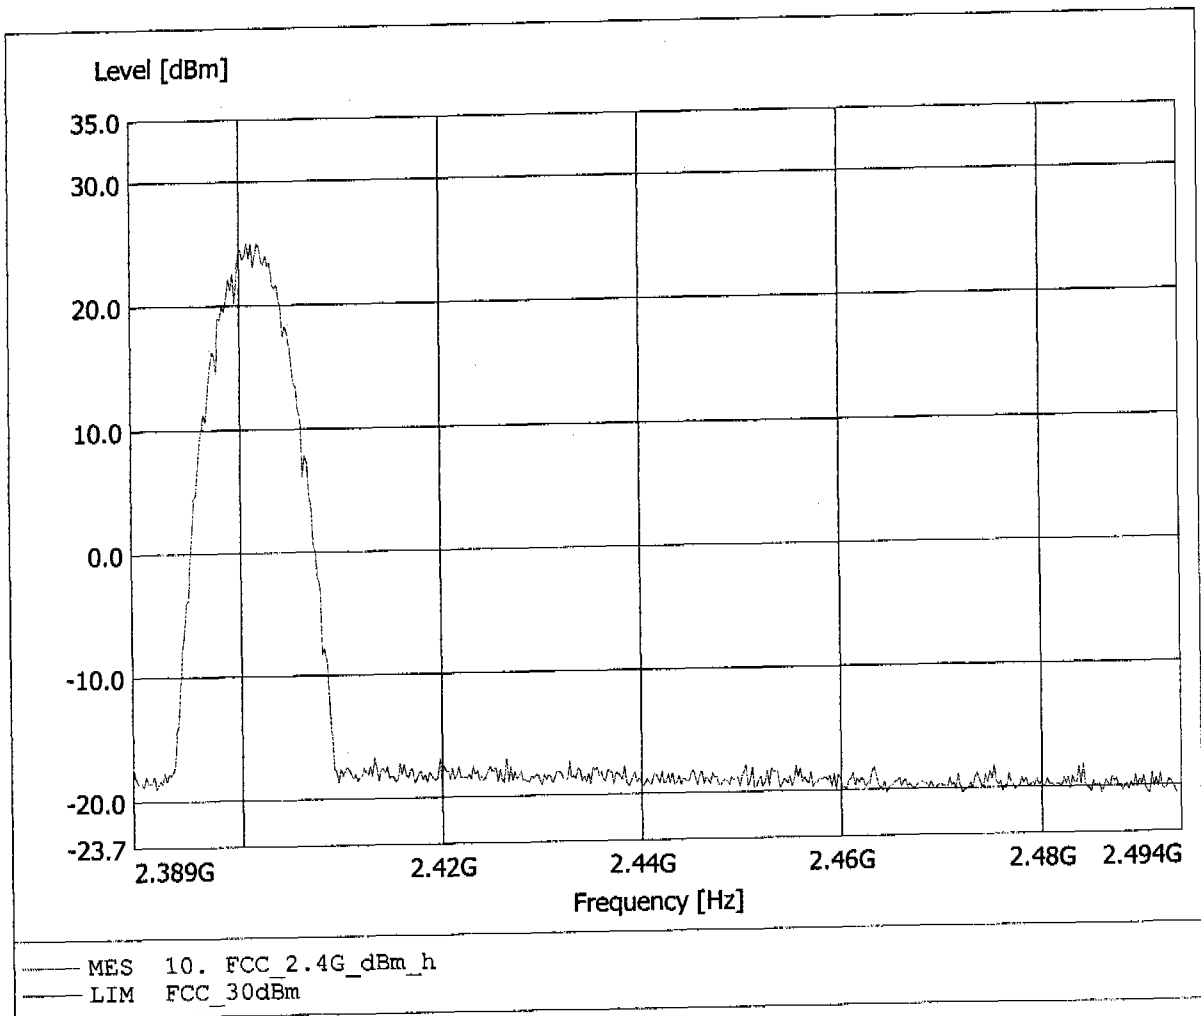


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 15.38dBm, RBW: 5MHz

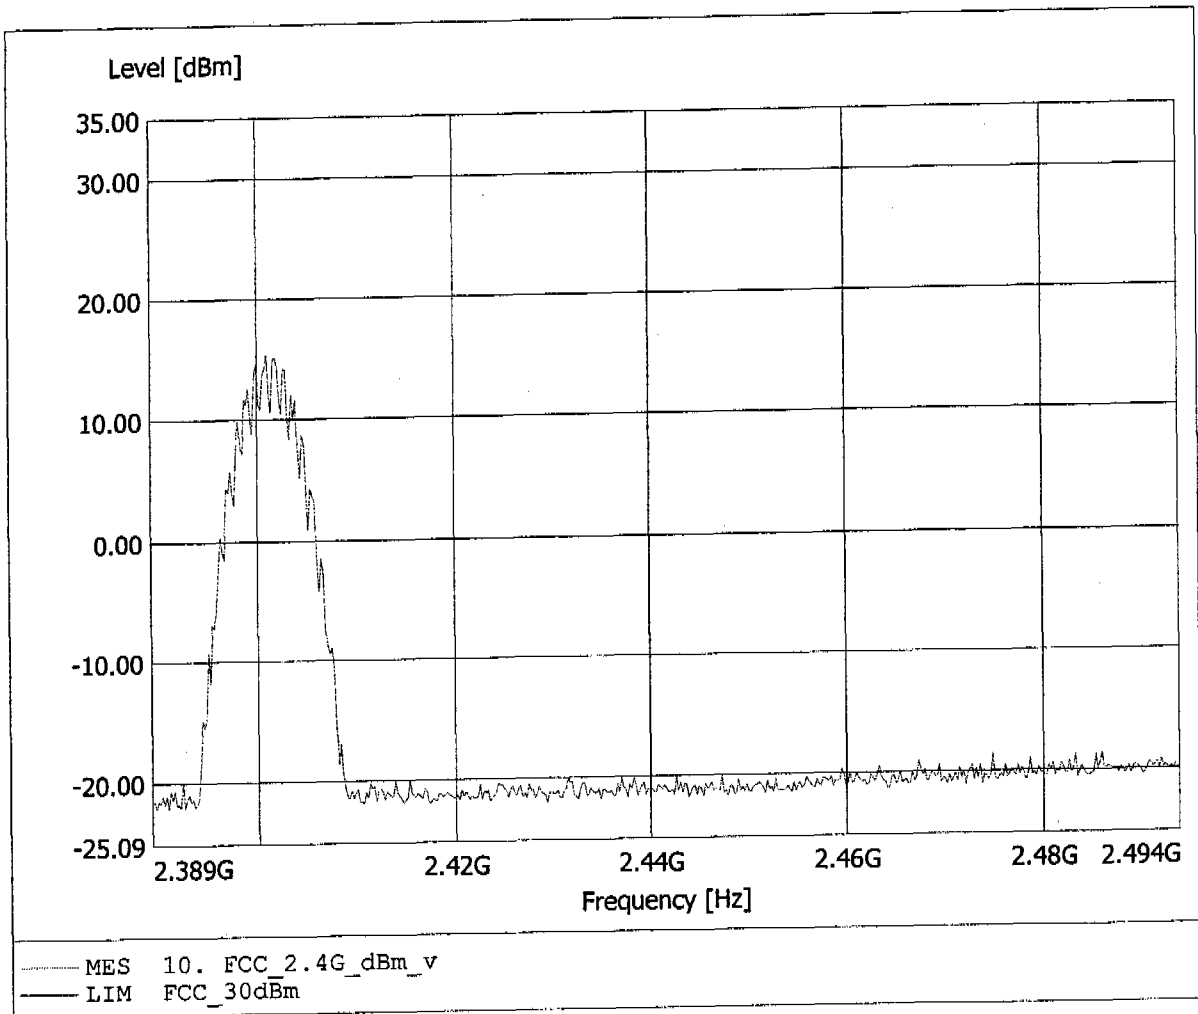


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 25.27dBm, RBW: 5MHz

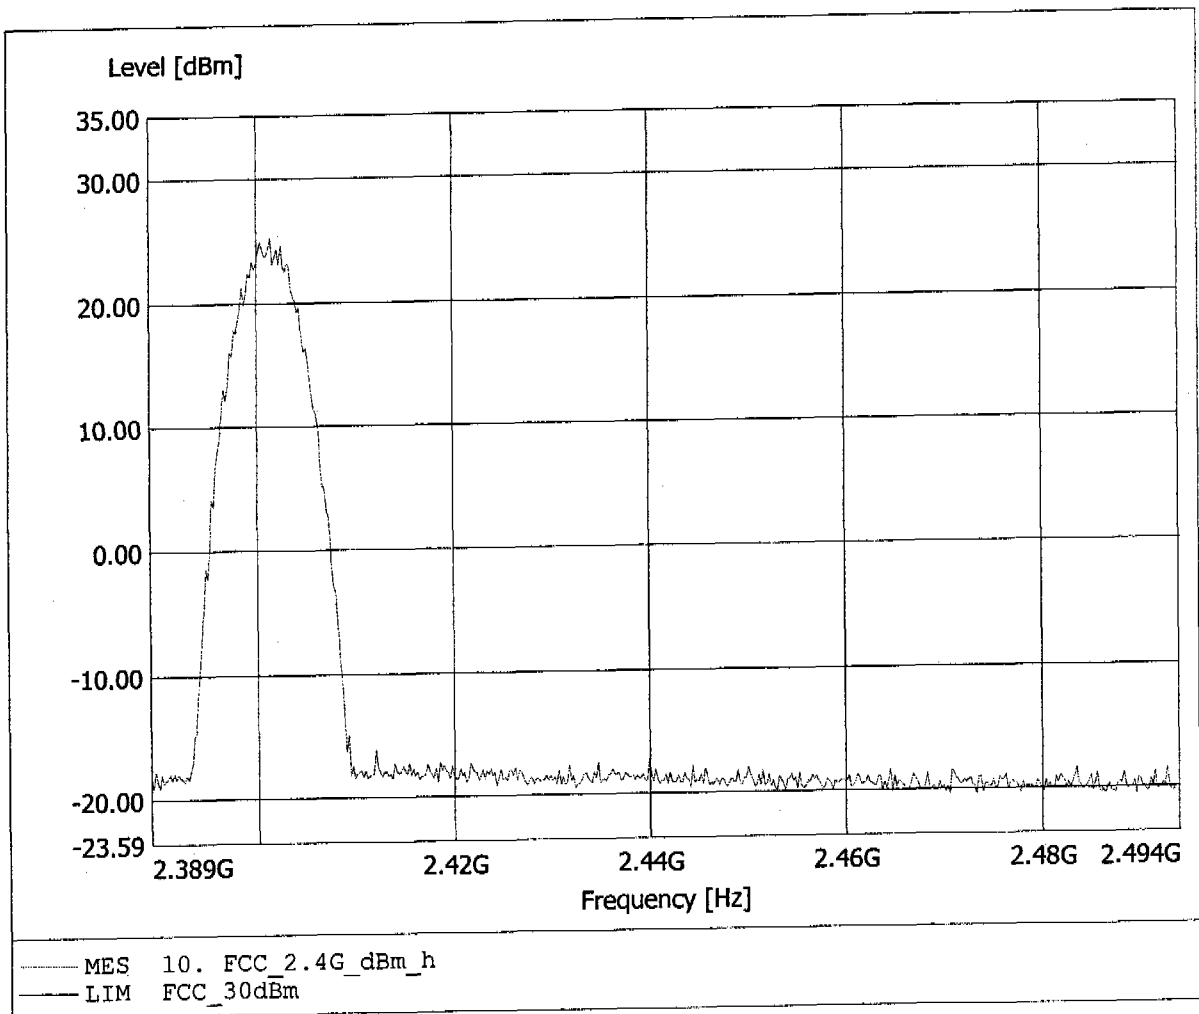


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 15.24dBm, RBW: 5MHz

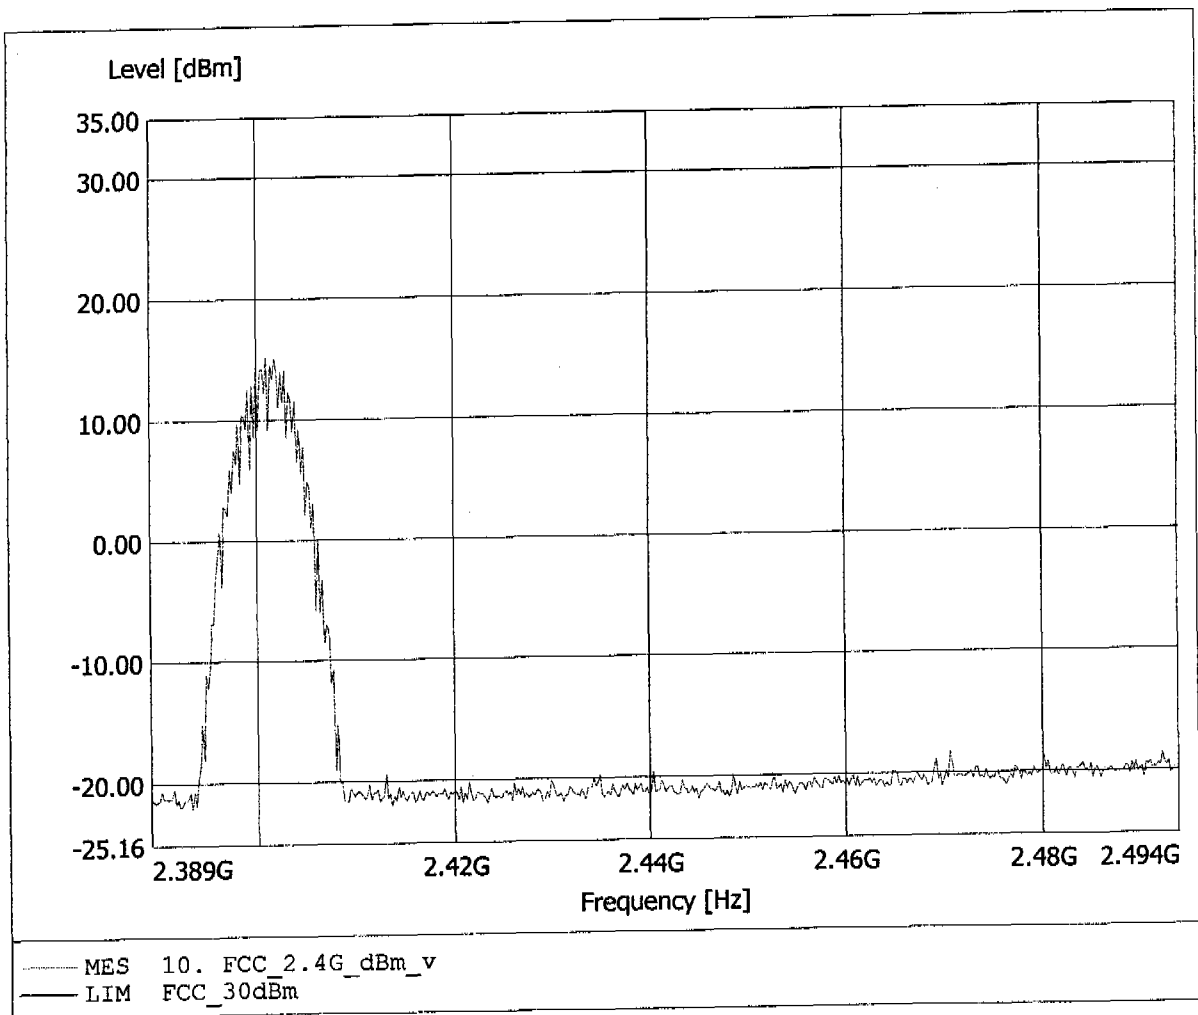


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 24.95dBm, RBW: 5MHz

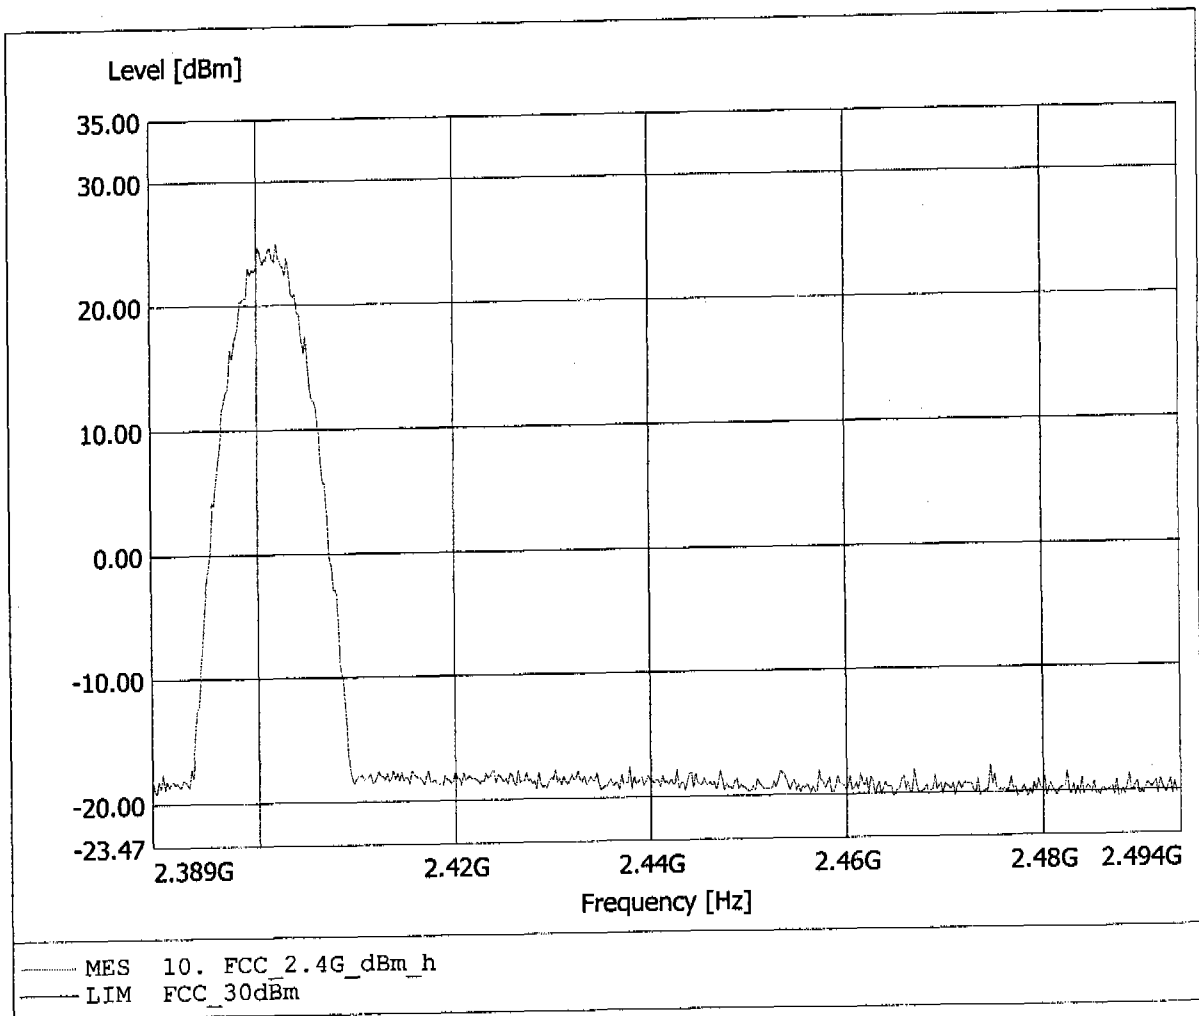


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 13.68dBm, RBW: 5MHz

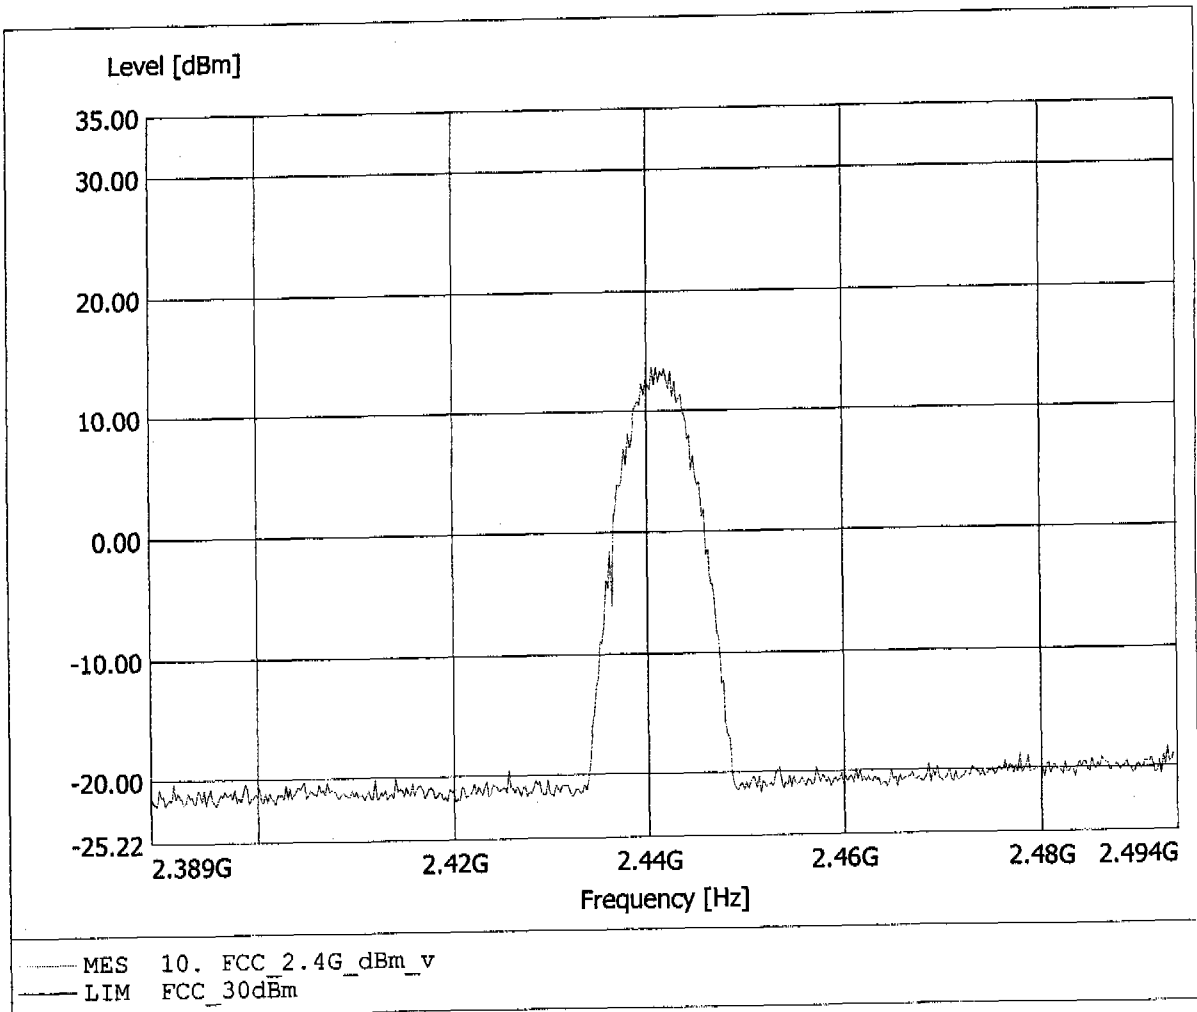


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 26.03dBm, RBW: 5MHz

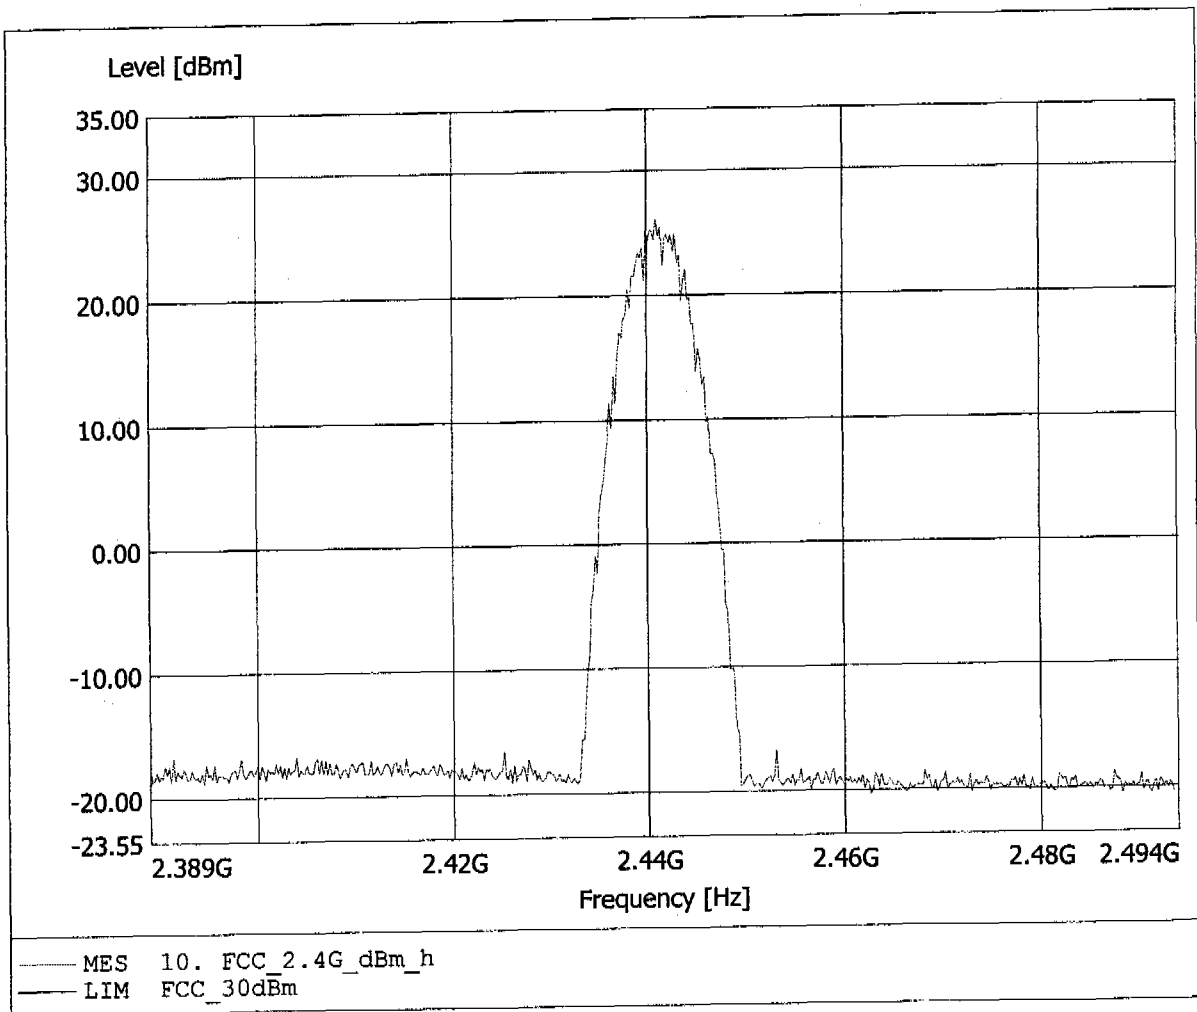


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Fmax: 13.88dBm, RBW: 5MHz

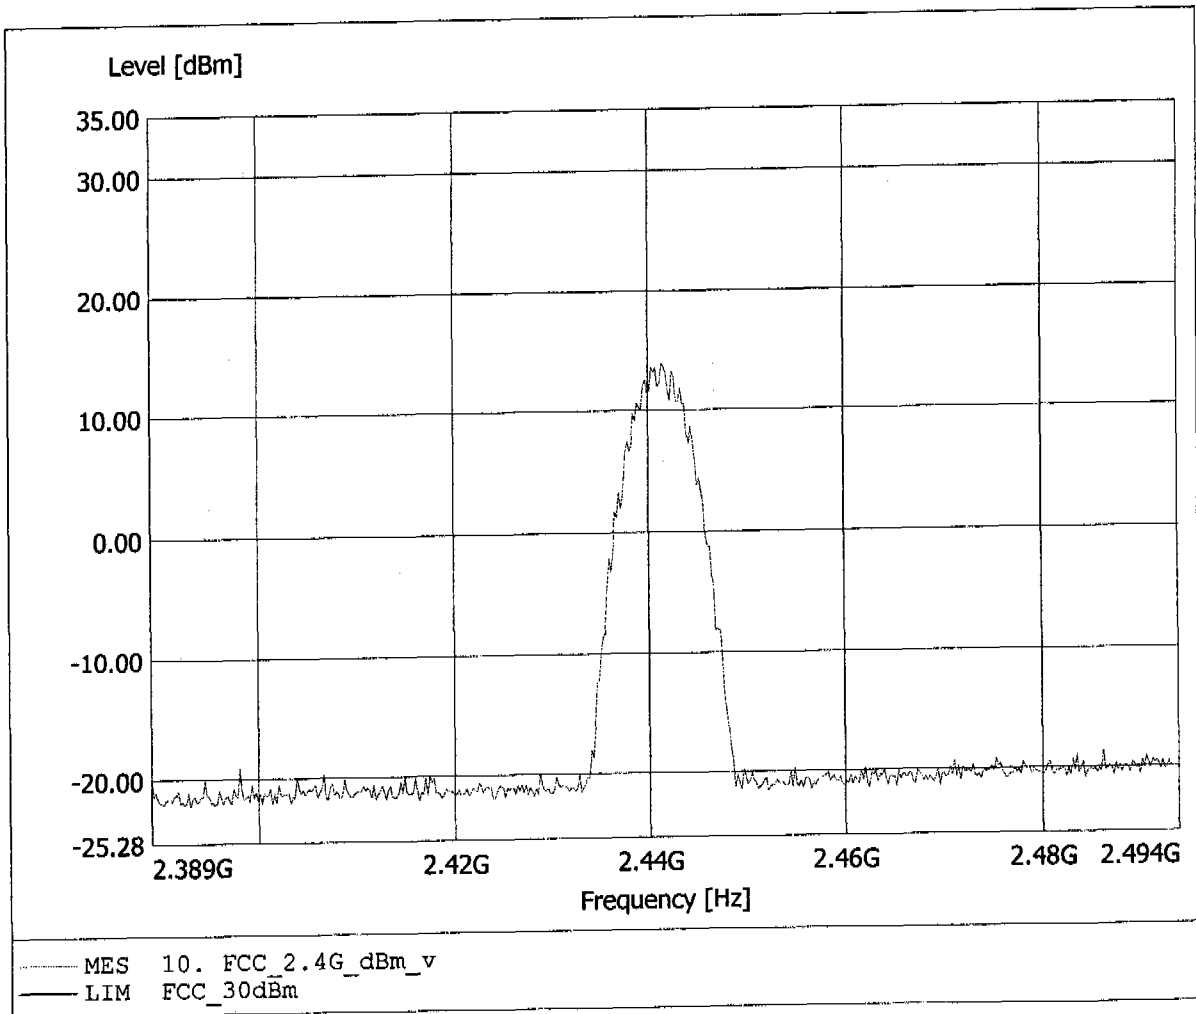


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 26.10dBm, RBW: 5MHz

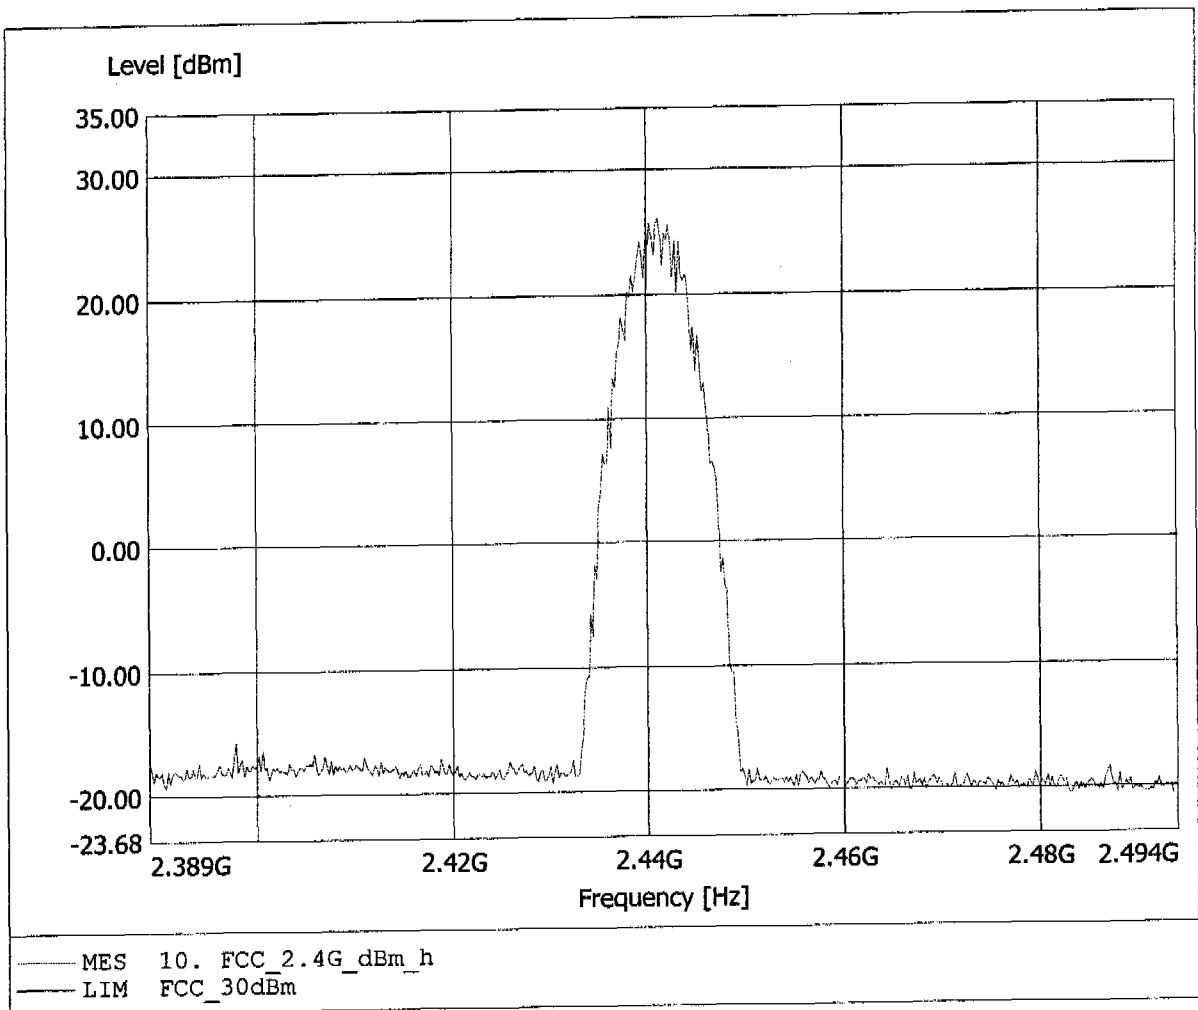


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 14.16dBm, RBW: 5MHz

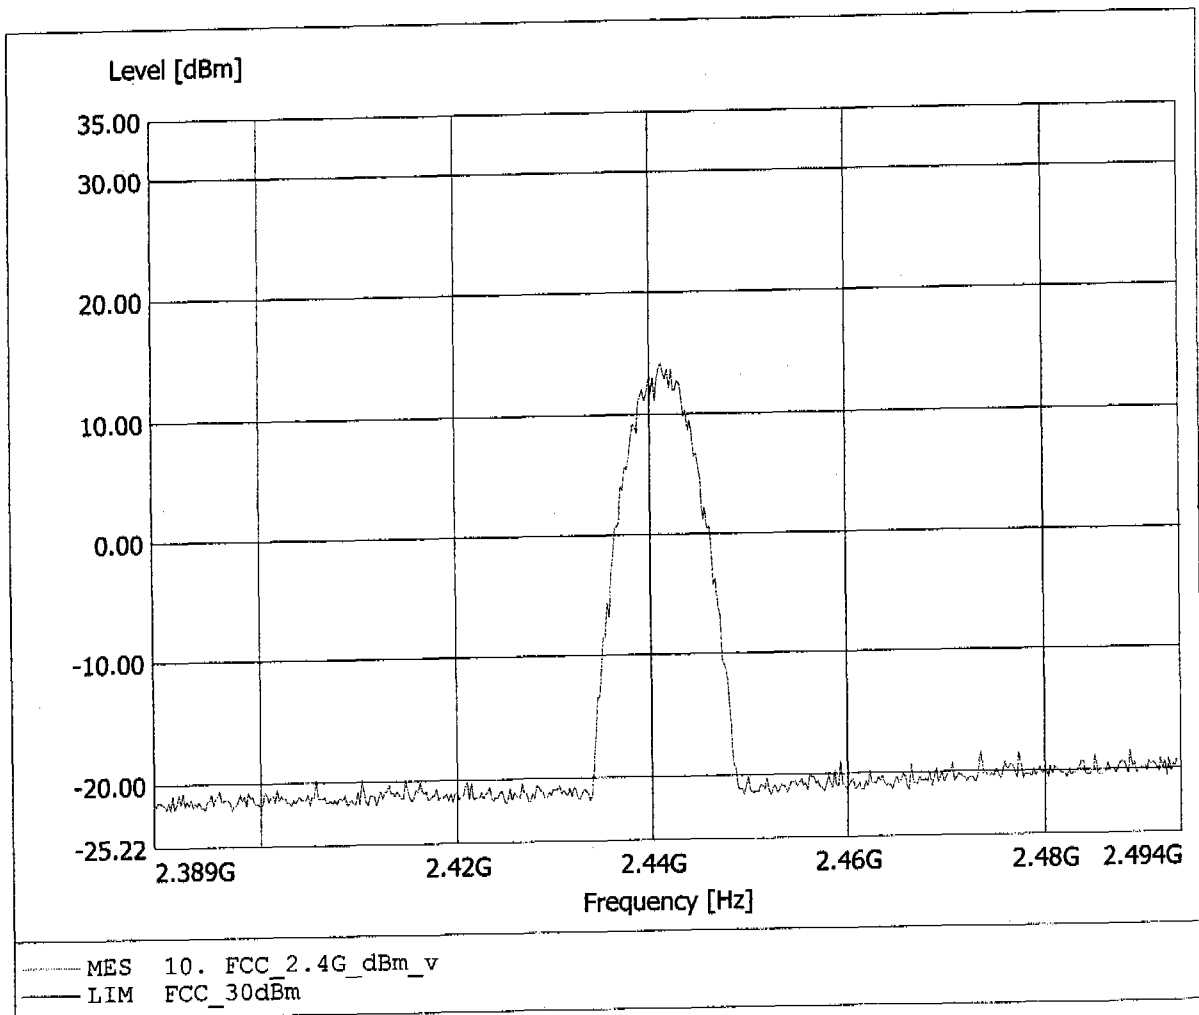


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 25.86dBm, RBW: 5MHz

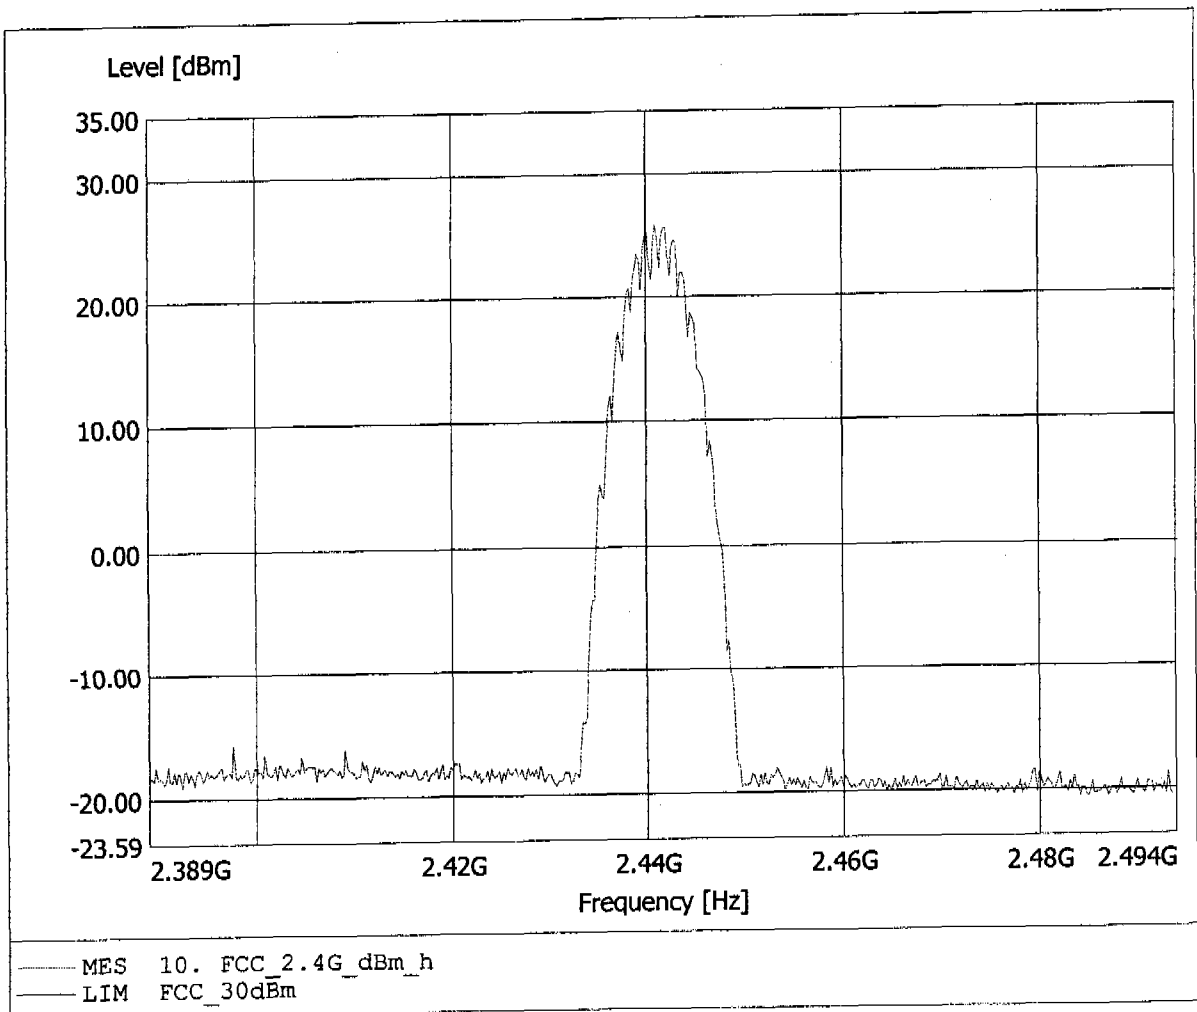


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 16.50dBm, RBW: 5MHz

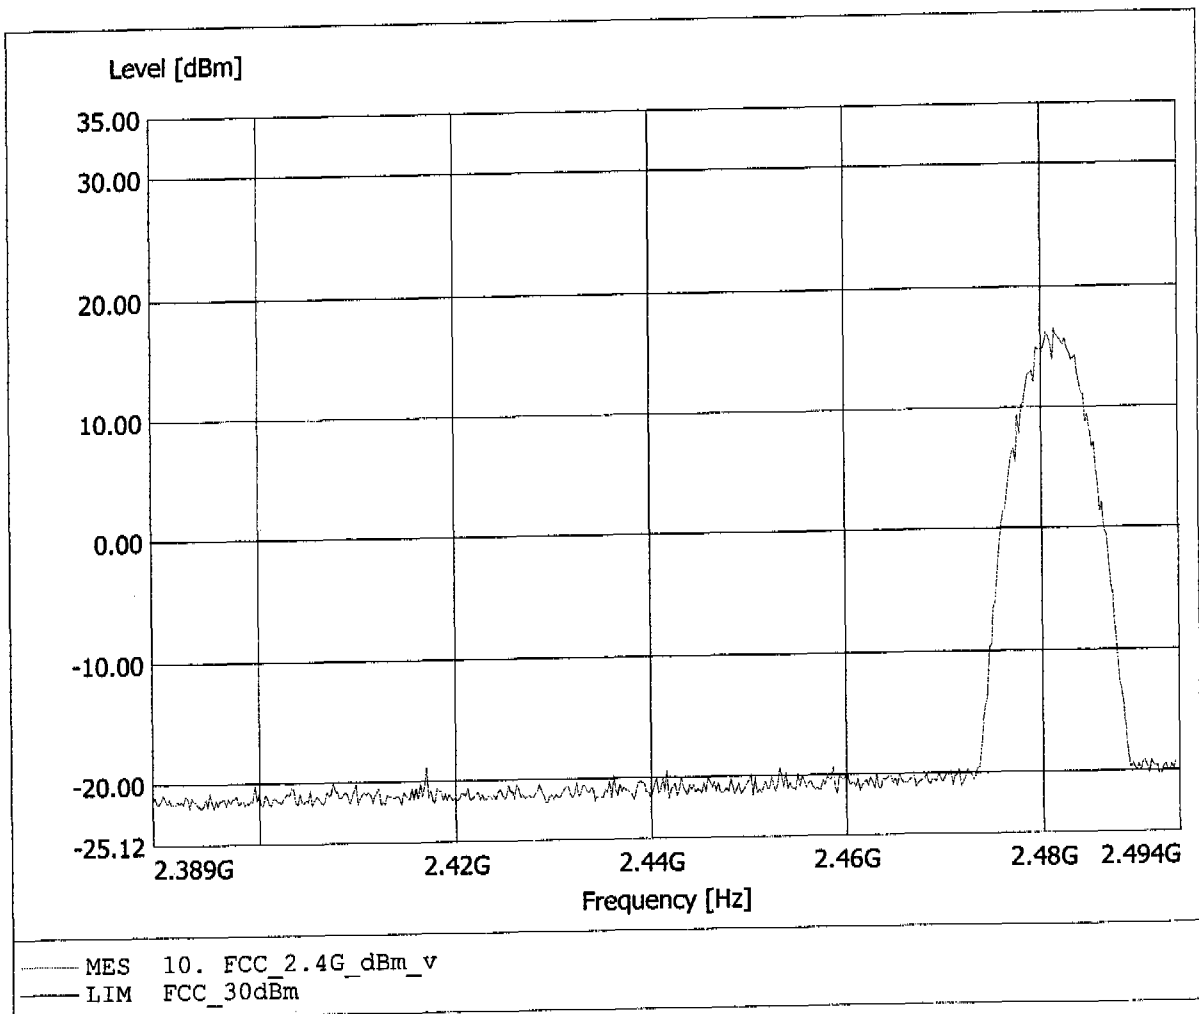


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 24.84dBm, RBW: 5MHz

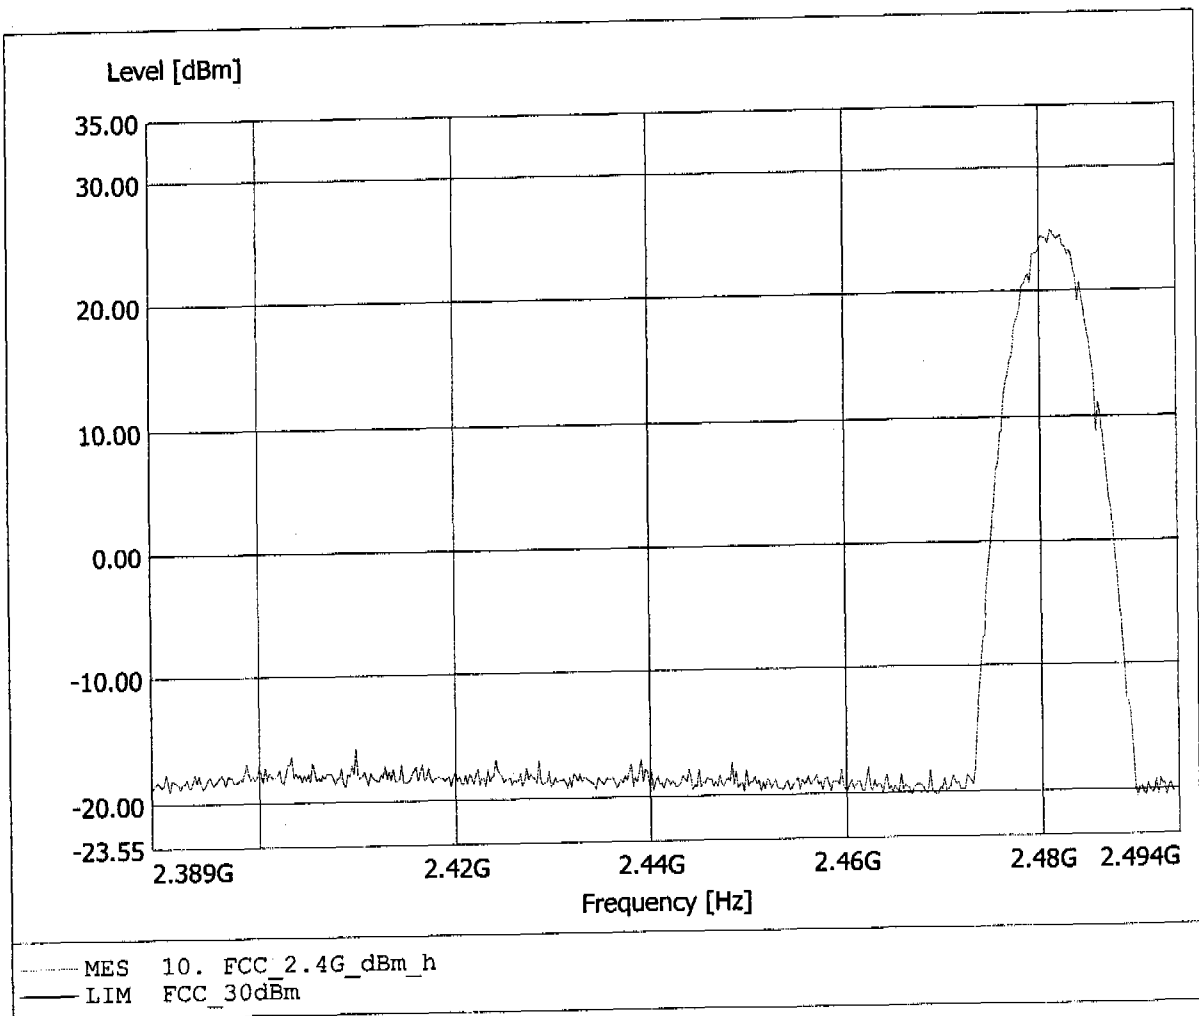


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 16.37dBm, RBW: 5MHz

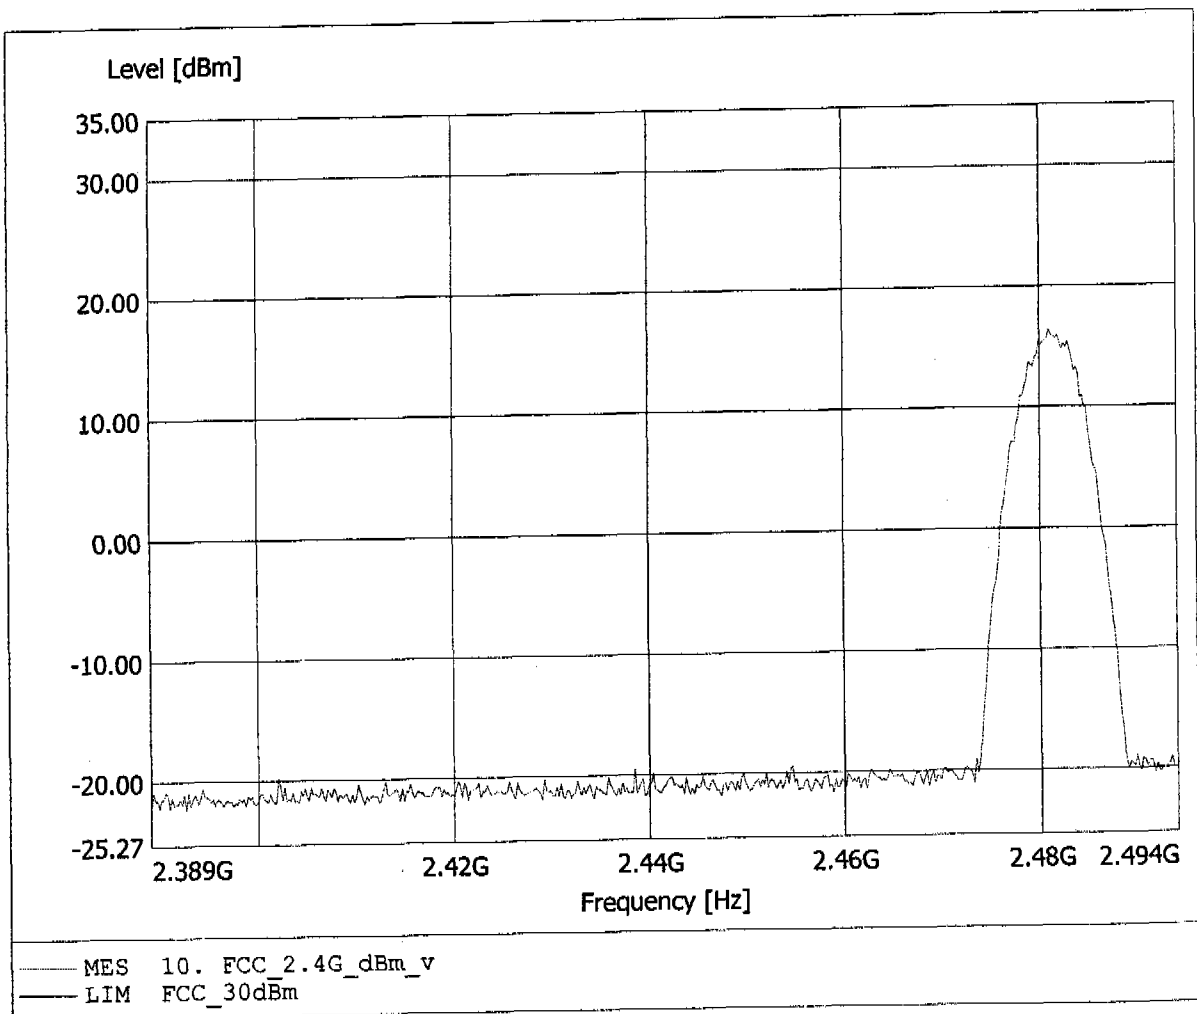


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 24.85dBm, RBW: 5MHz

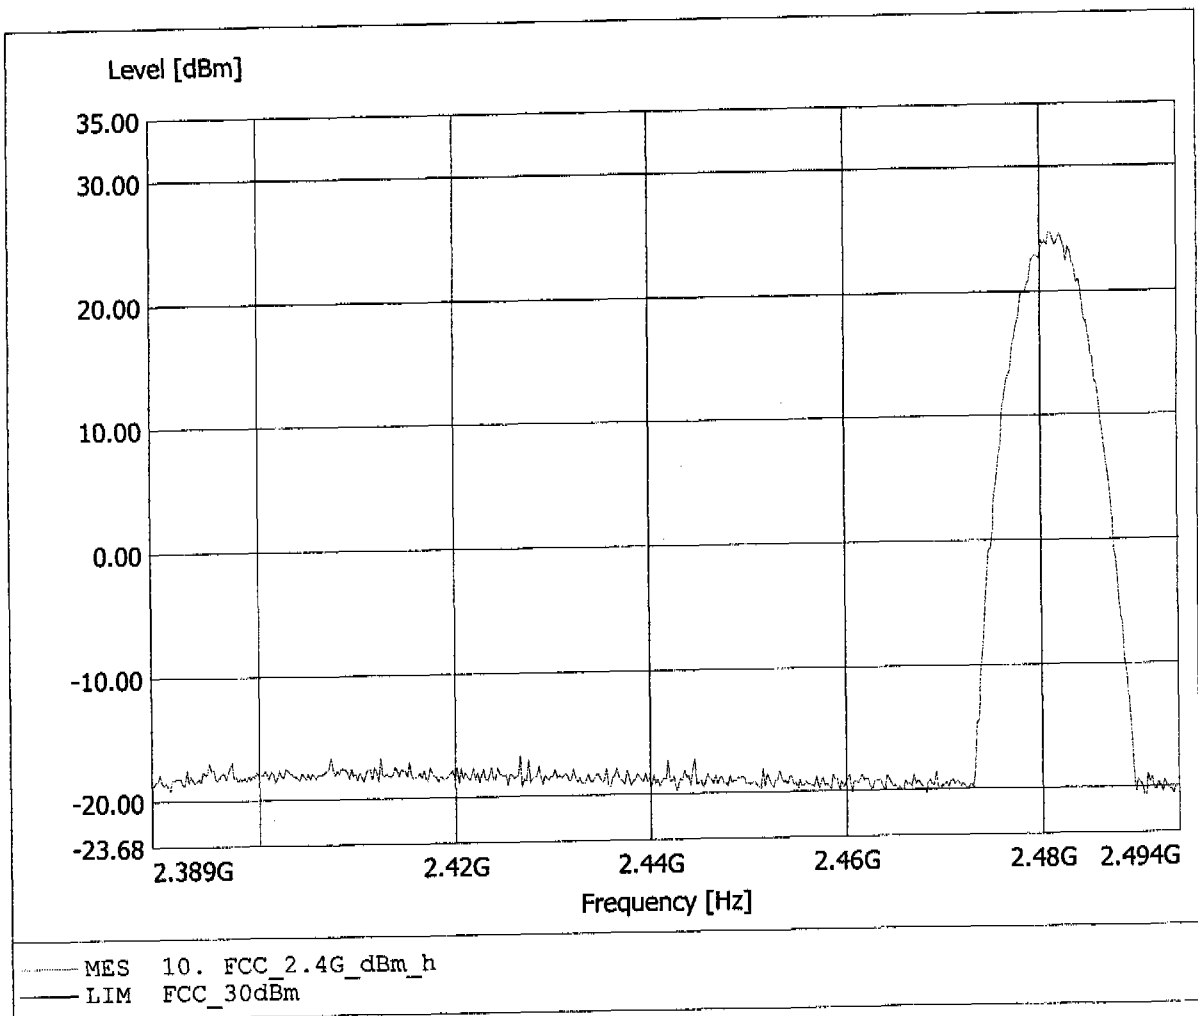


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 16.37dBm, RBW: 5MHz

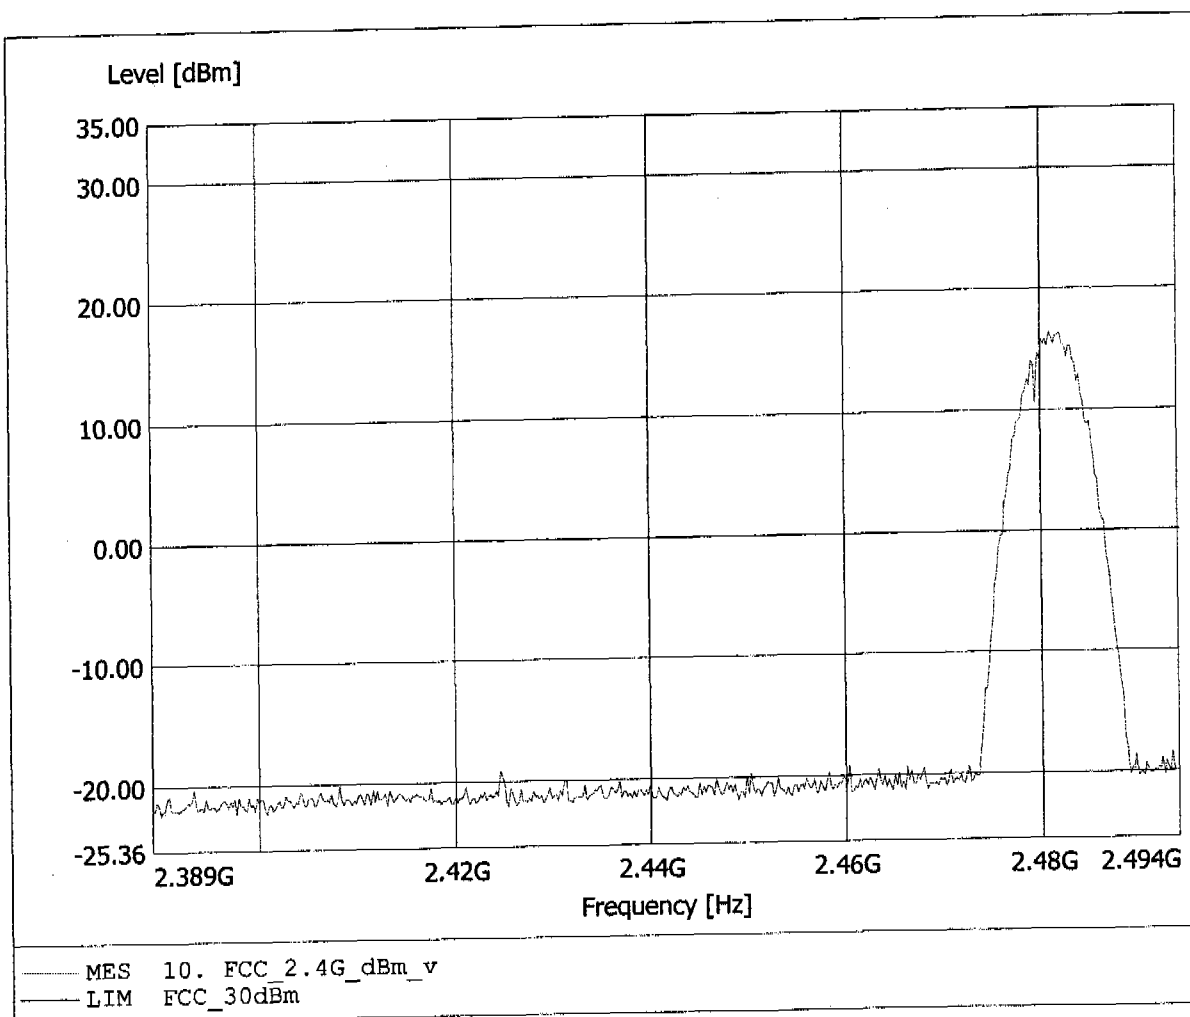


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 24.95dBm, RBW: 5MHz

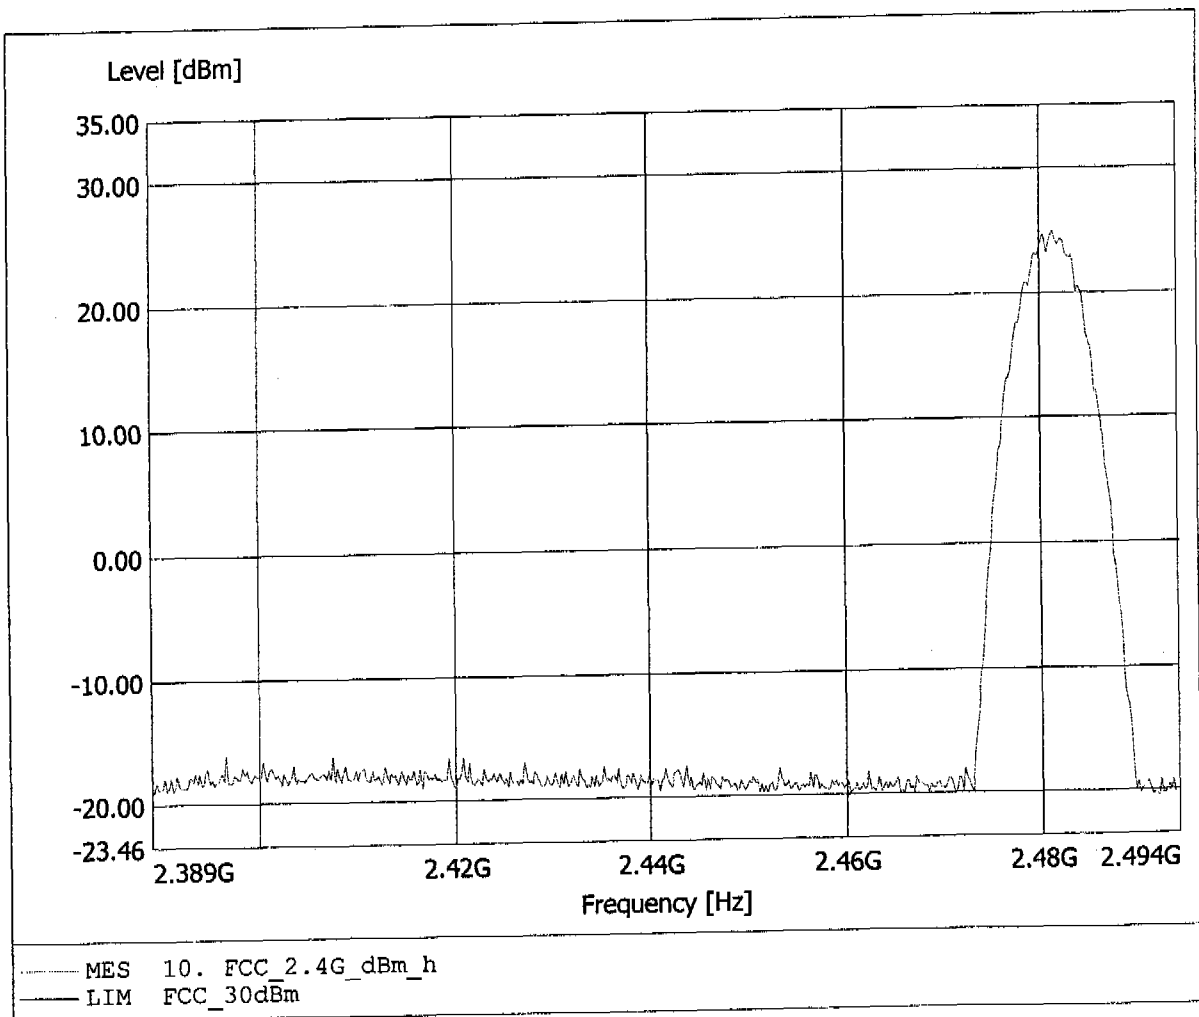


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 10.63dBm, RBW: 5MHz

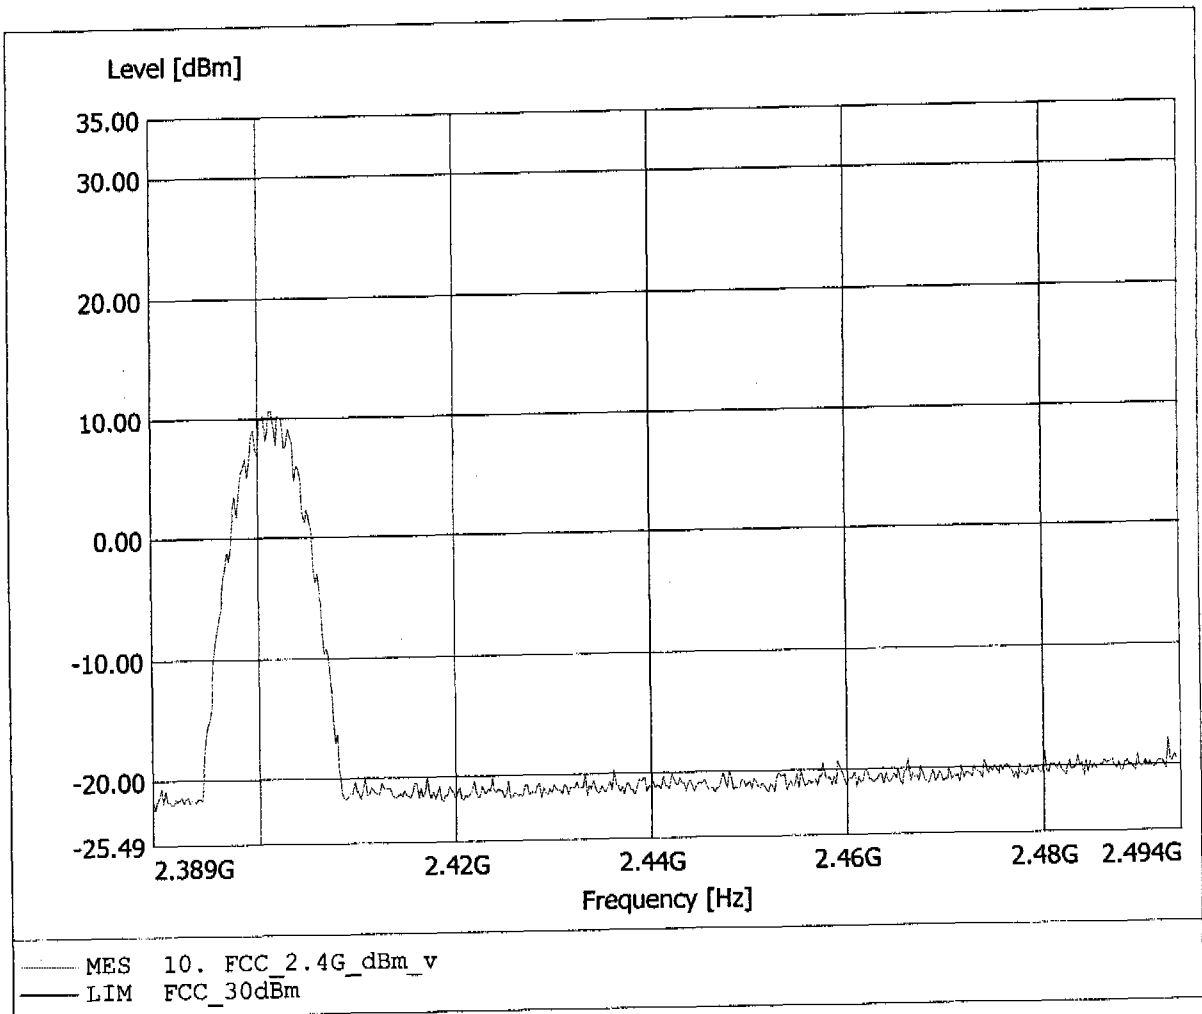


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 25.62dBm, RBW: 5MHz

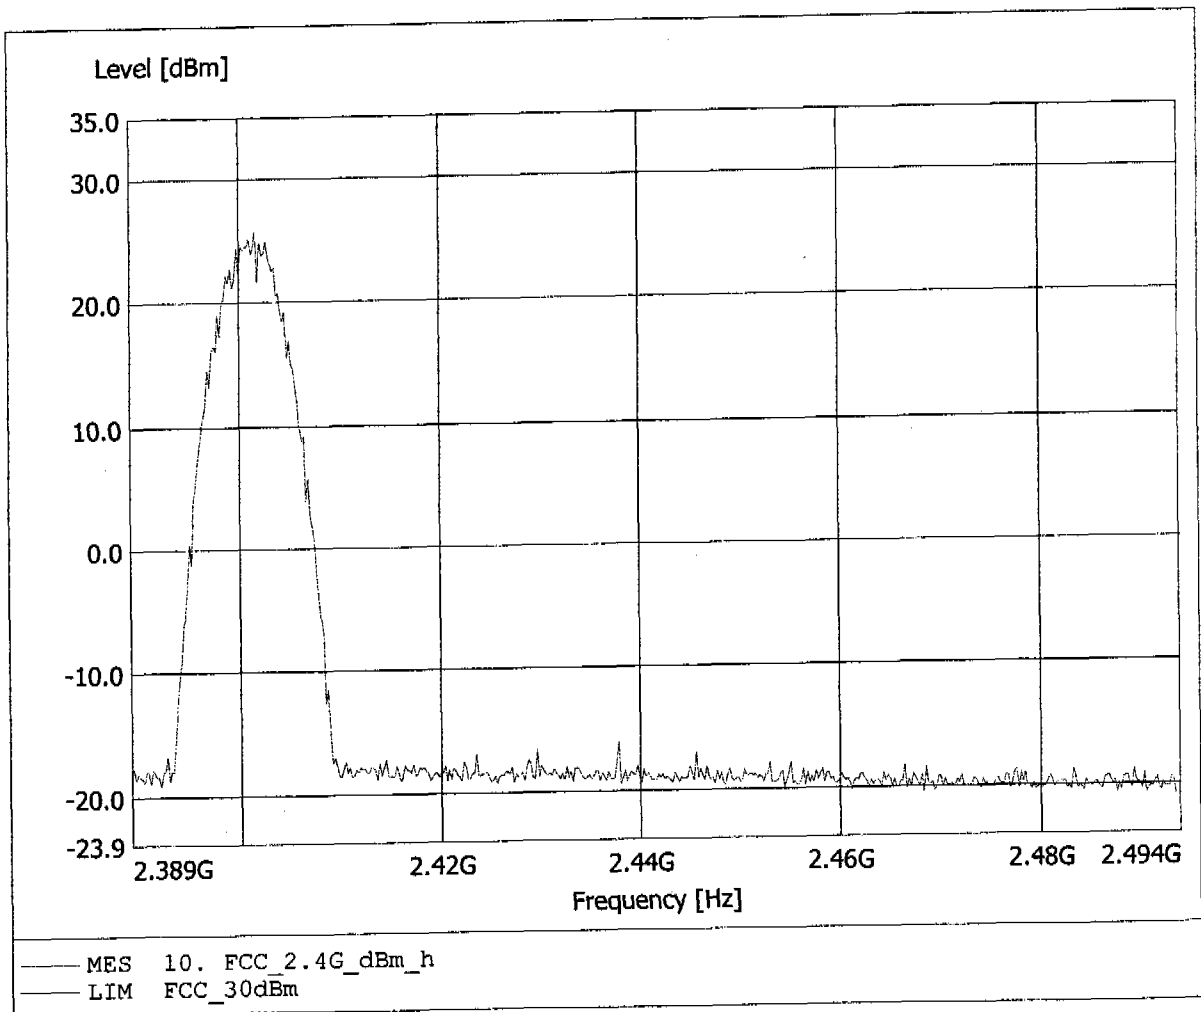


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 10.95dBm, RBW: 5MHz

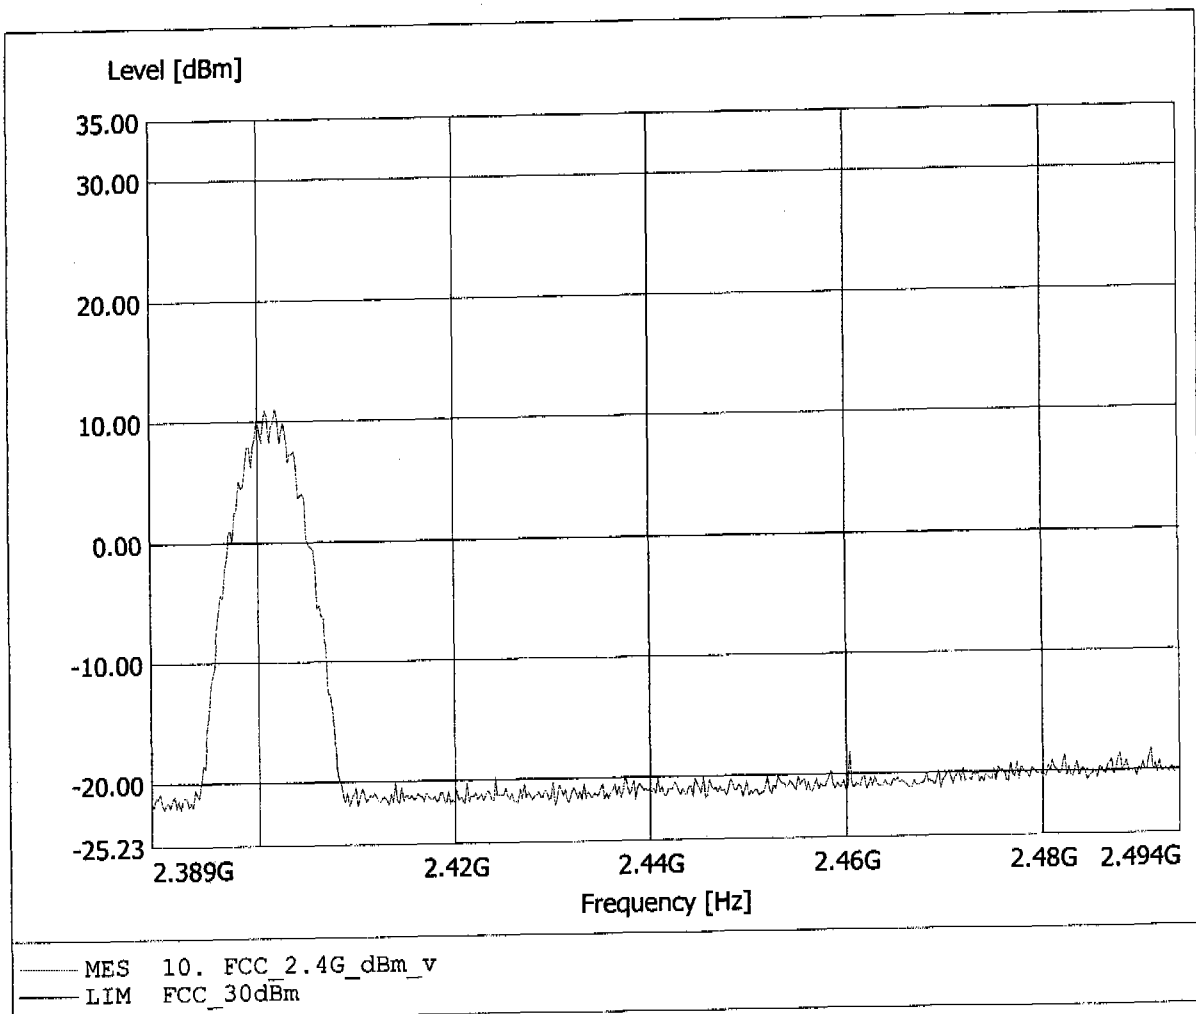


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 25.57dBm, RBW: 5MHz

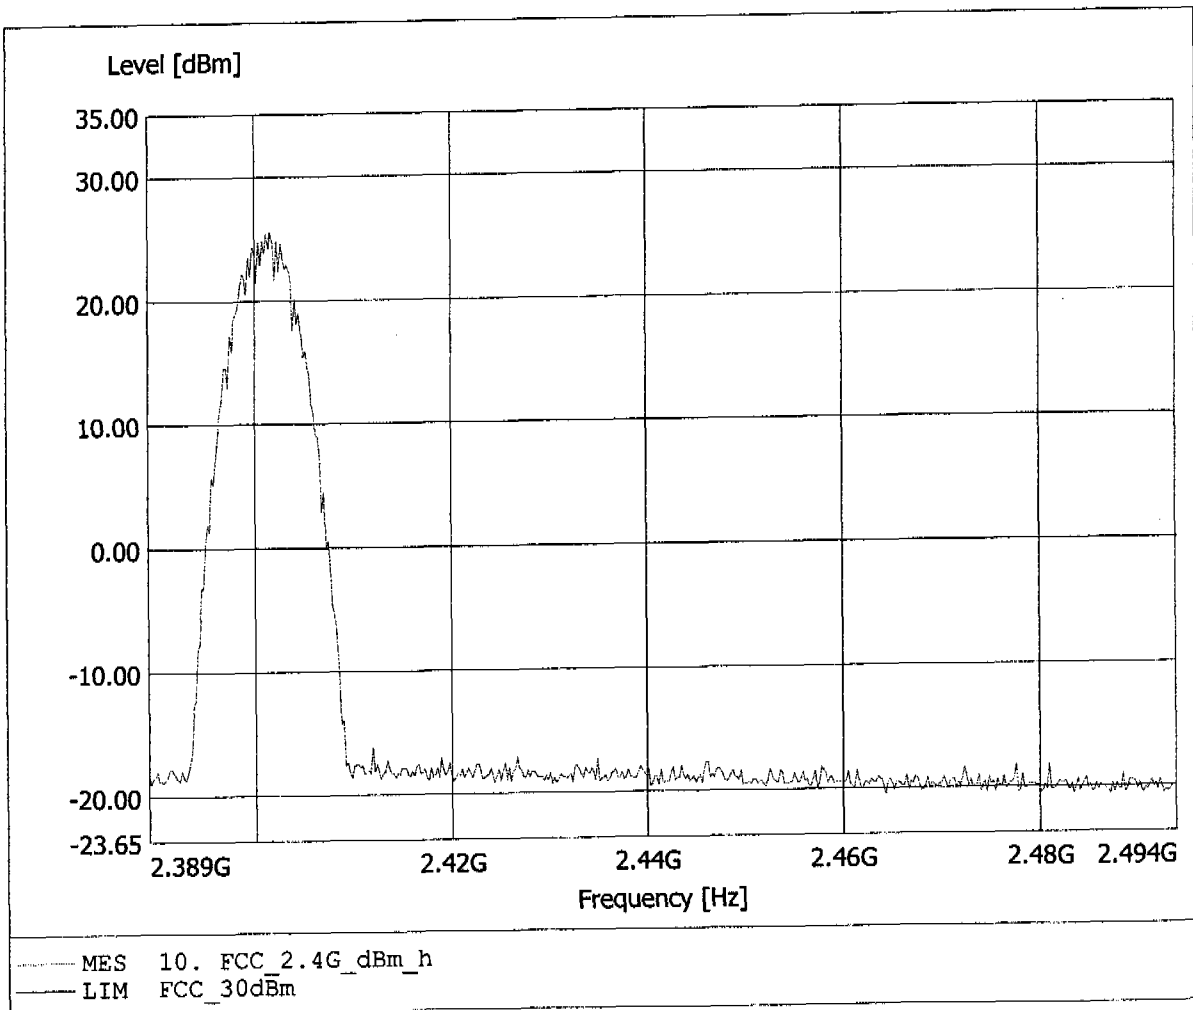


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 11.02dBm, RBW: 5MHz

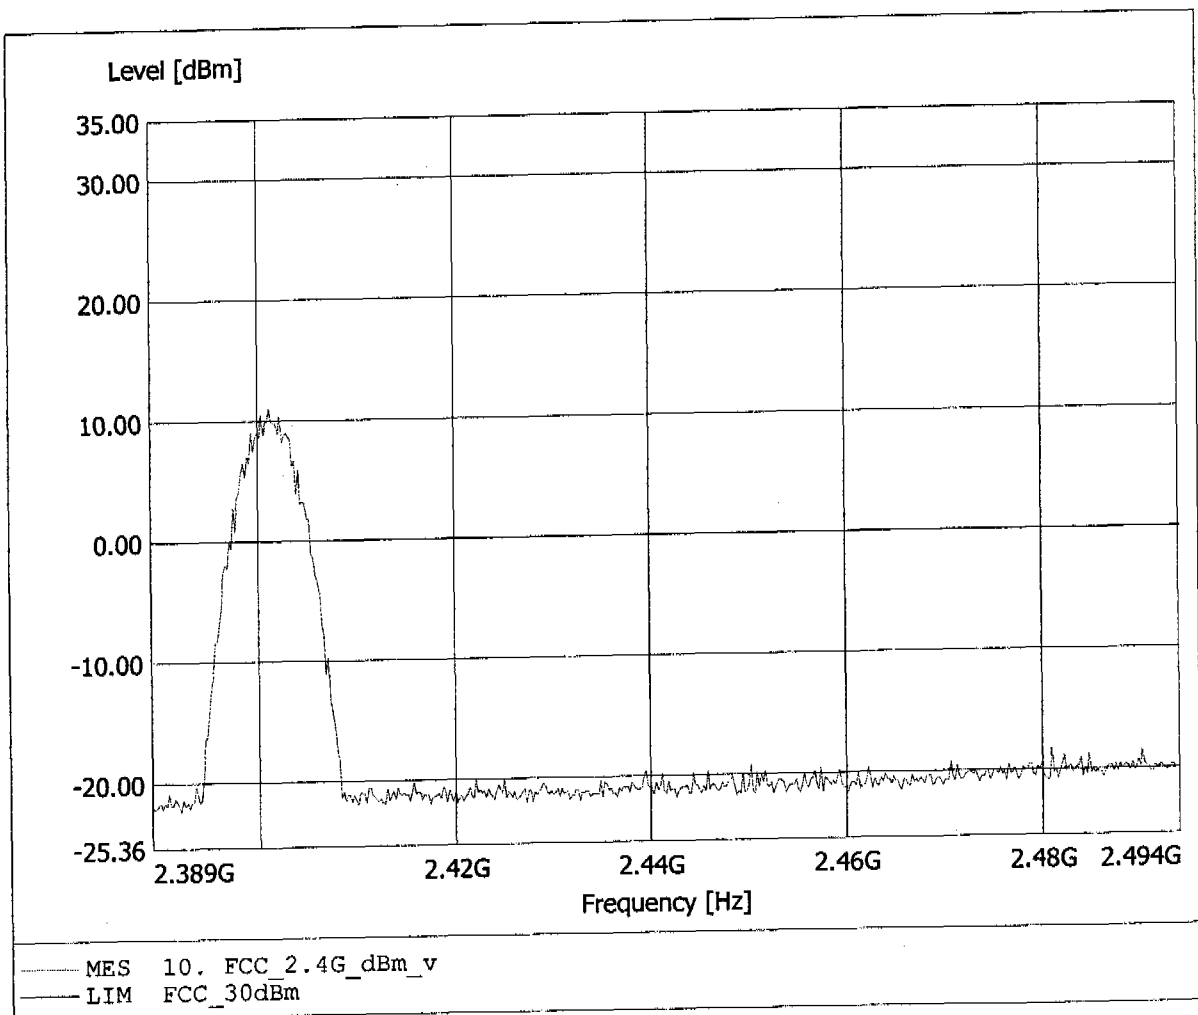


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 25.53dBm, RBW: 5MHz

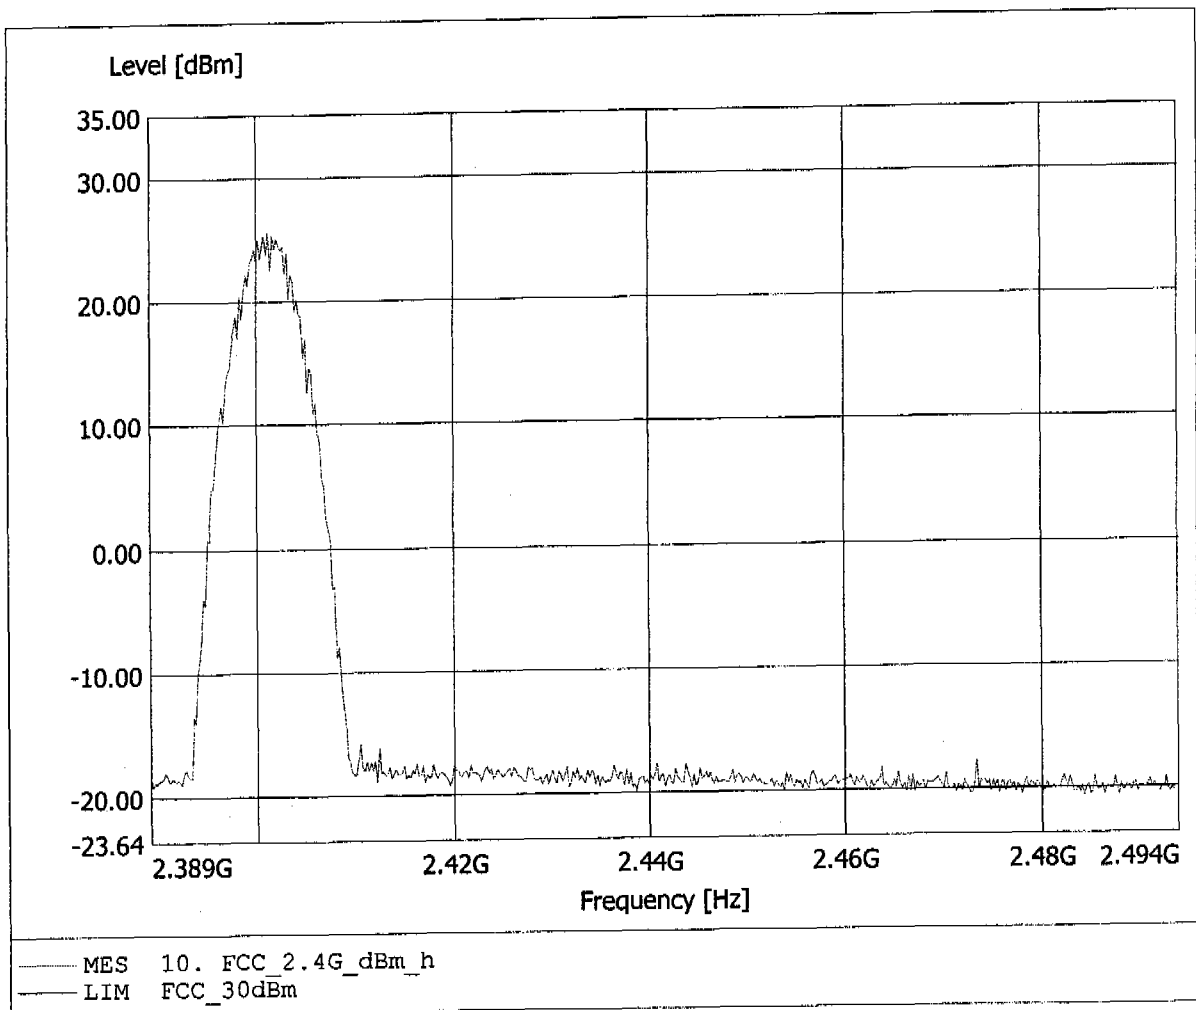


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 13.09dBm, RBW: 5MHz

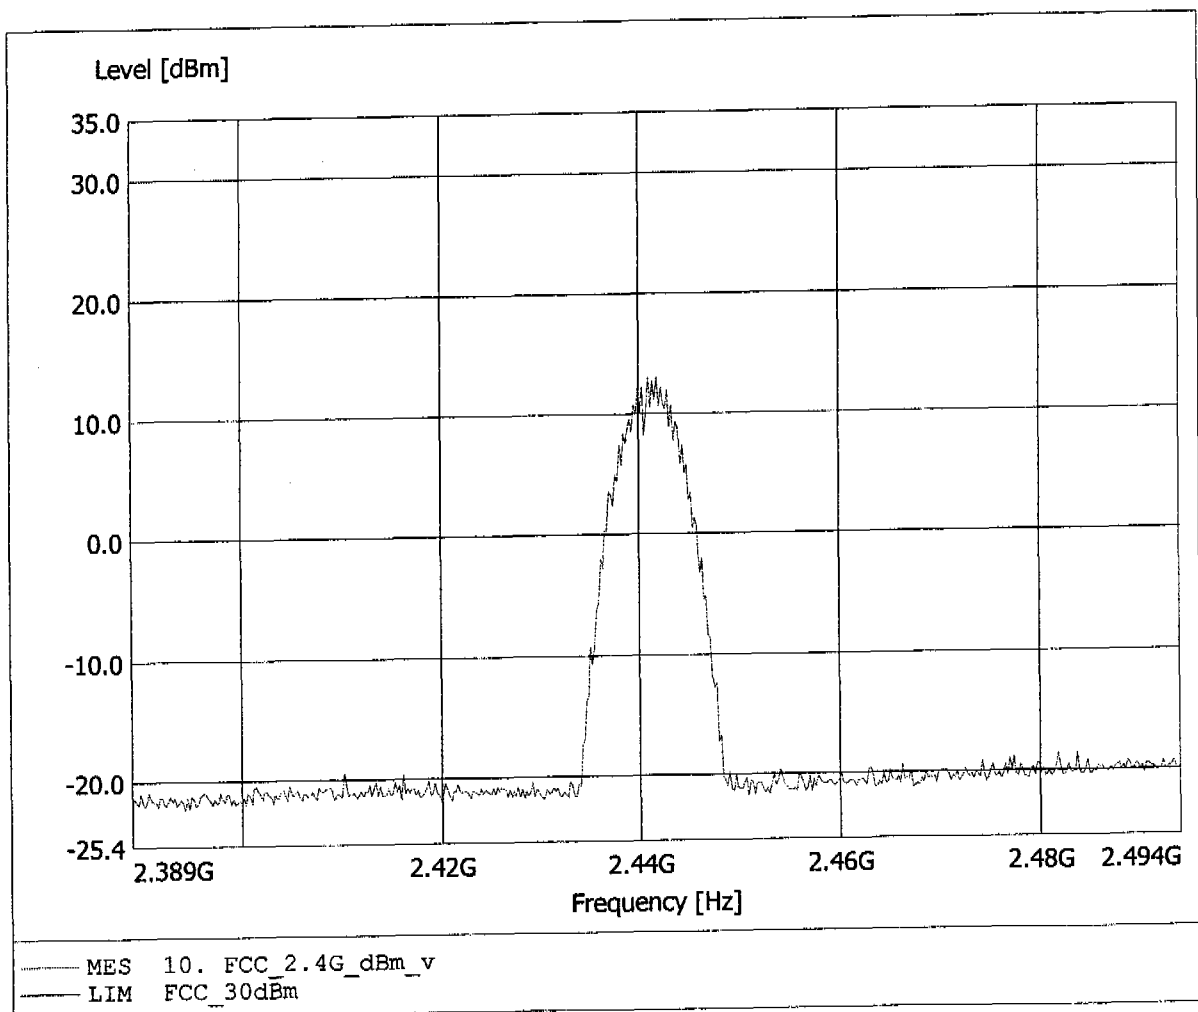


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 24.94dBm, RBW: 5MHz

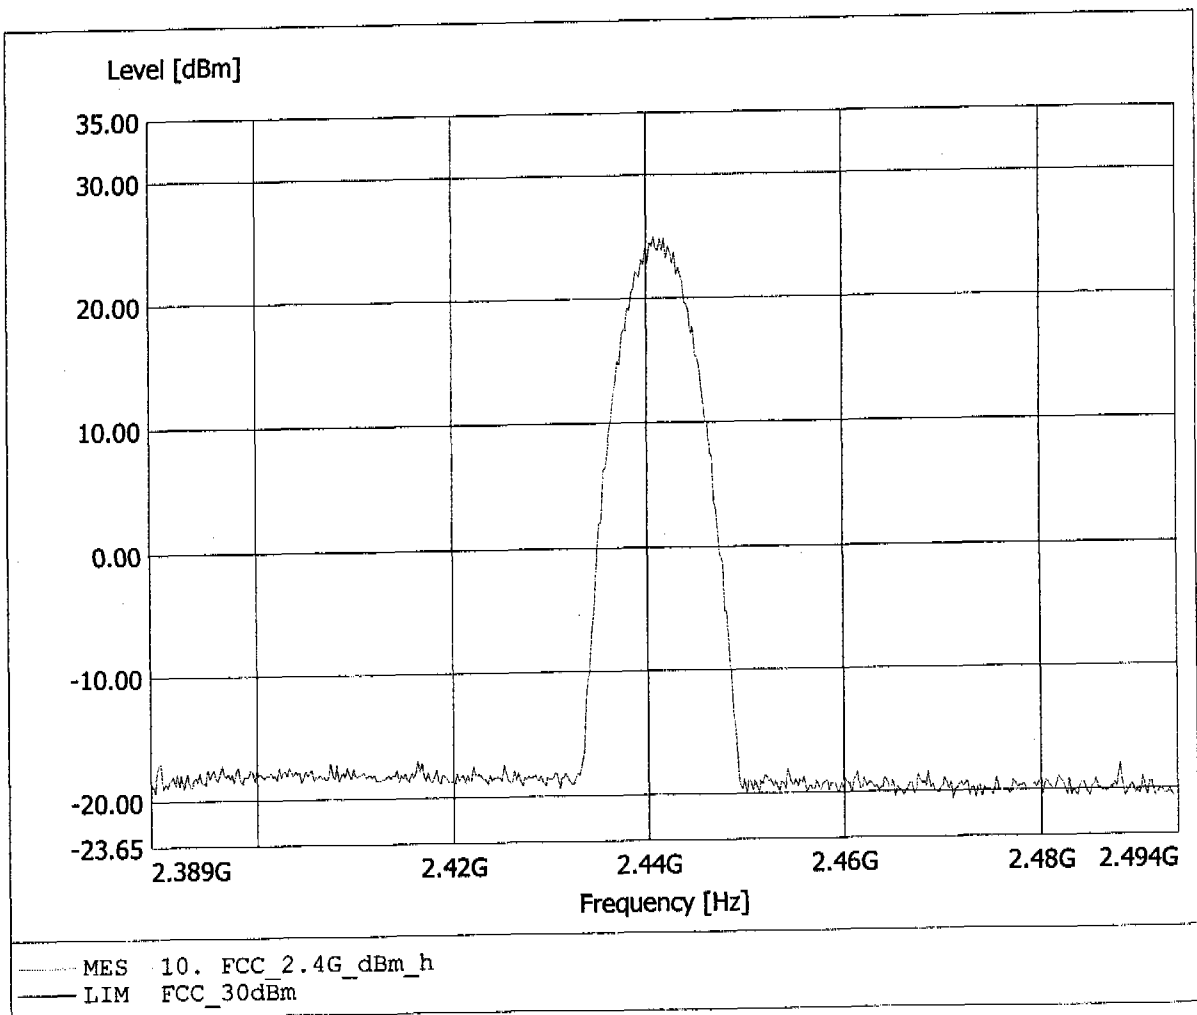


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 13.16dBm, RBW: 5MHz

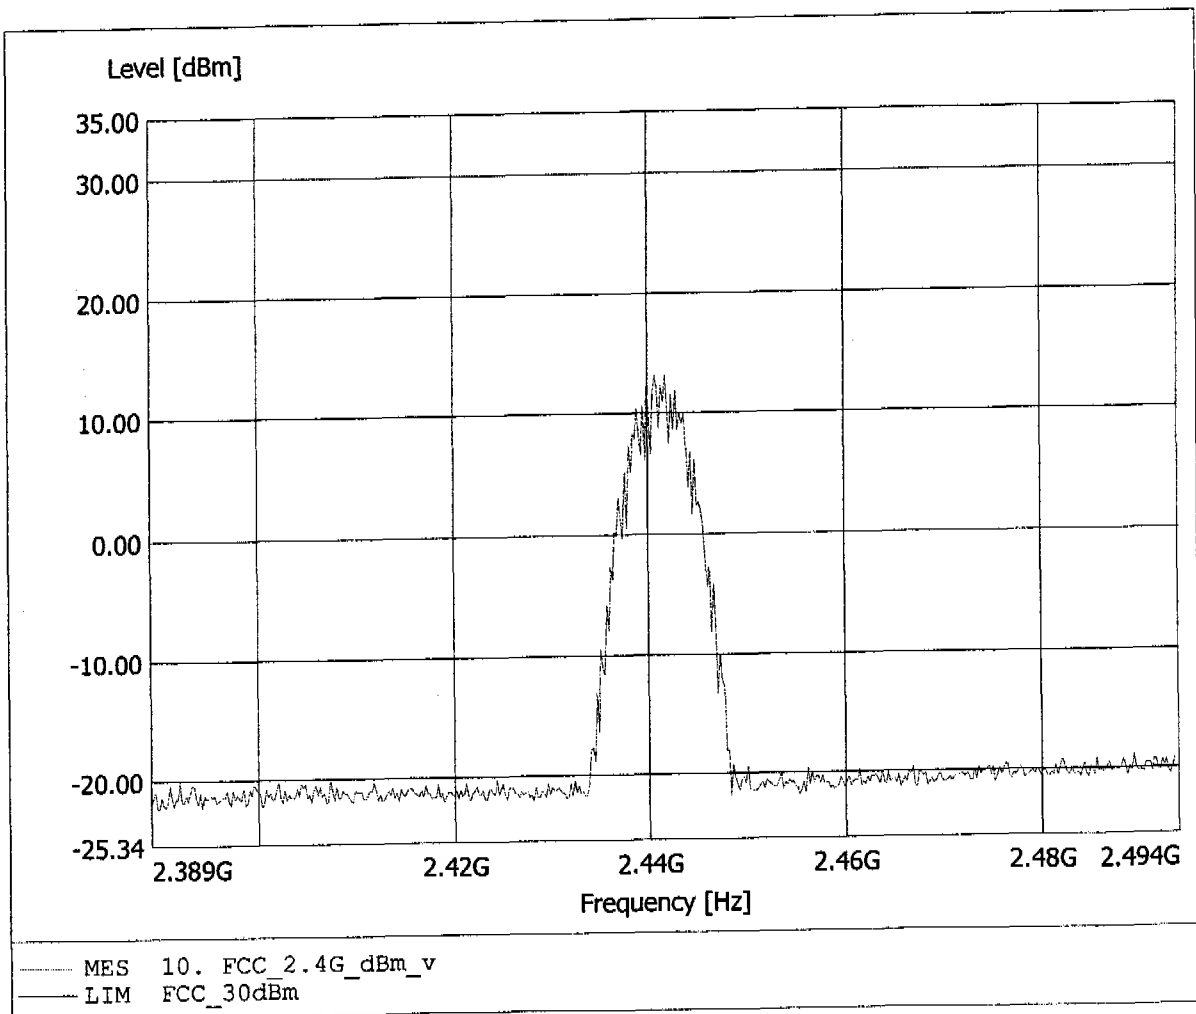


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9t20D
Comment 2: Freq: 2.442GHz, Pmax: 24.92dBm, RBW: 5MHz

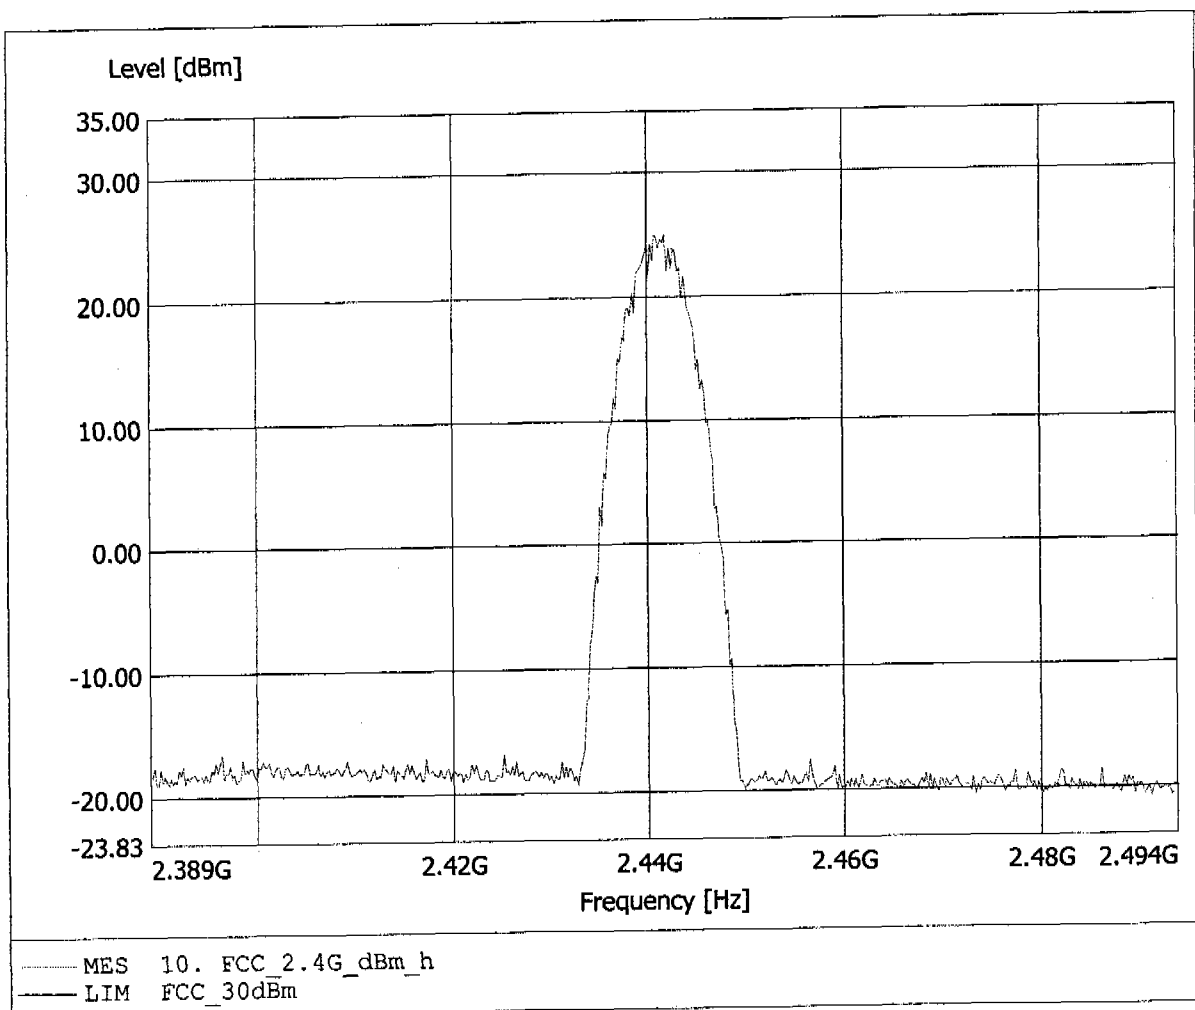


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 13.21dBm, RBW: 5MHz

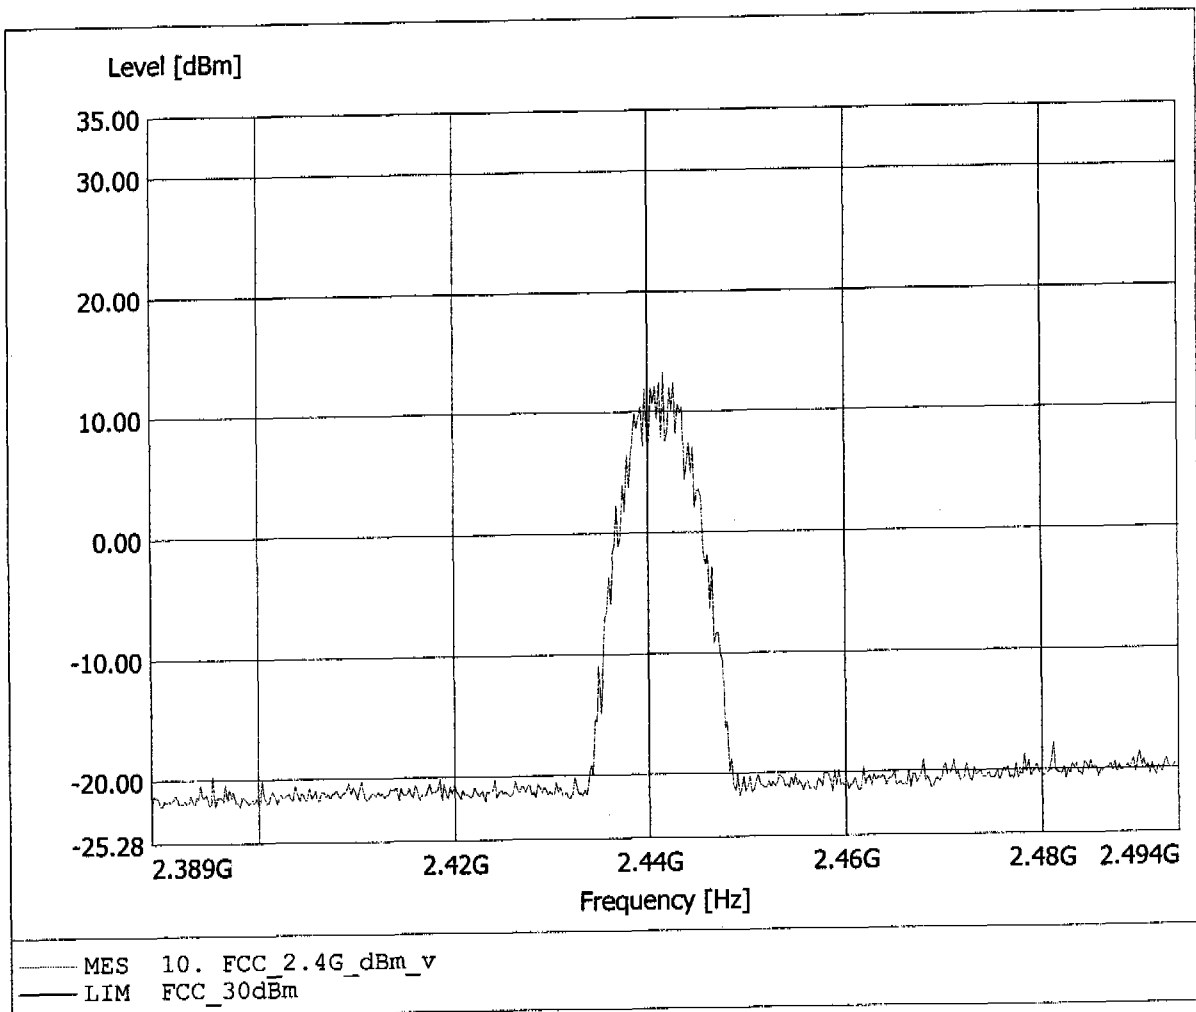


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 24.98dBm, RBW: 5MHz

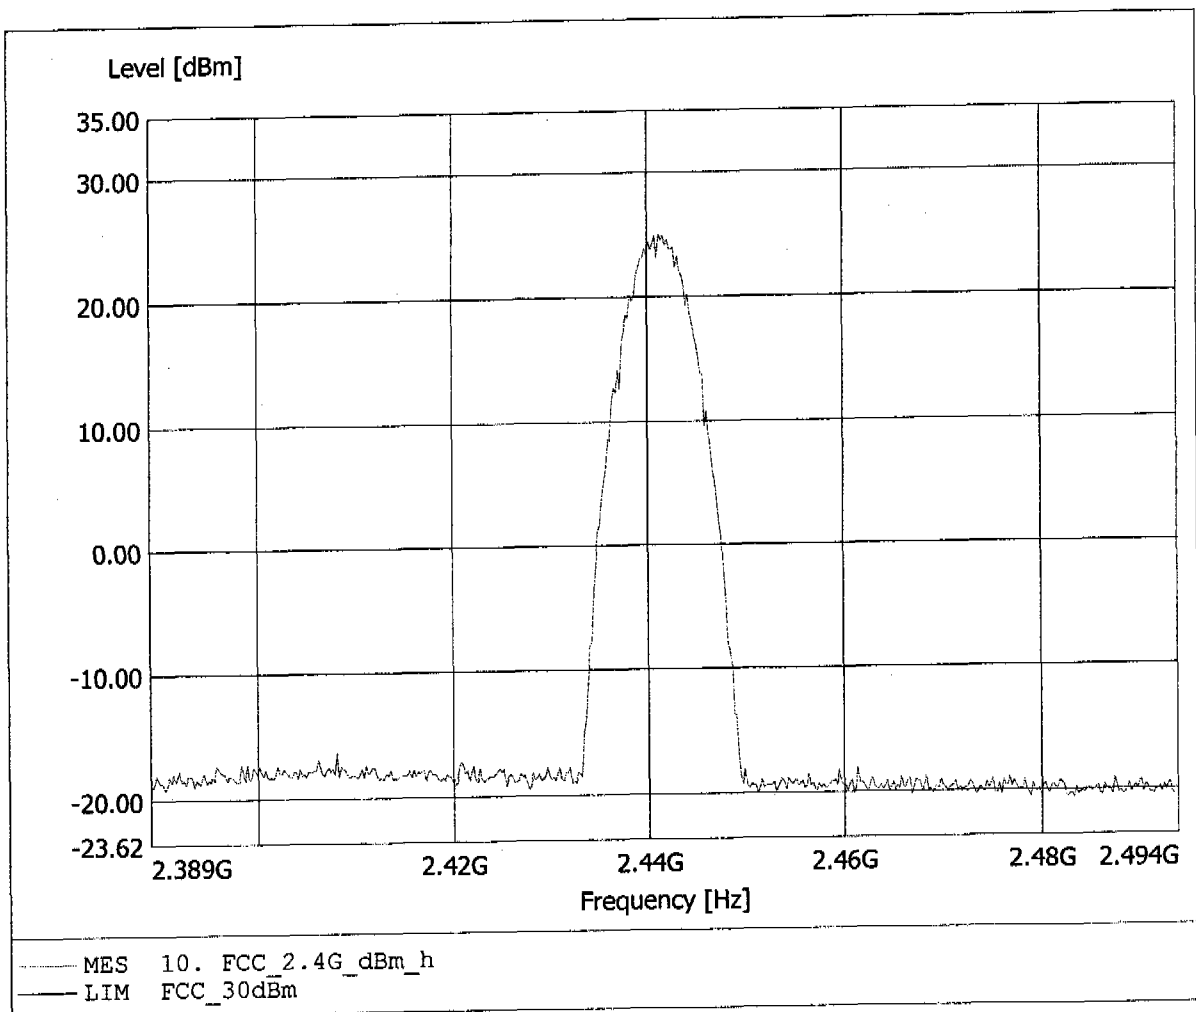


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 12.94dBm, RBW: 5MHz

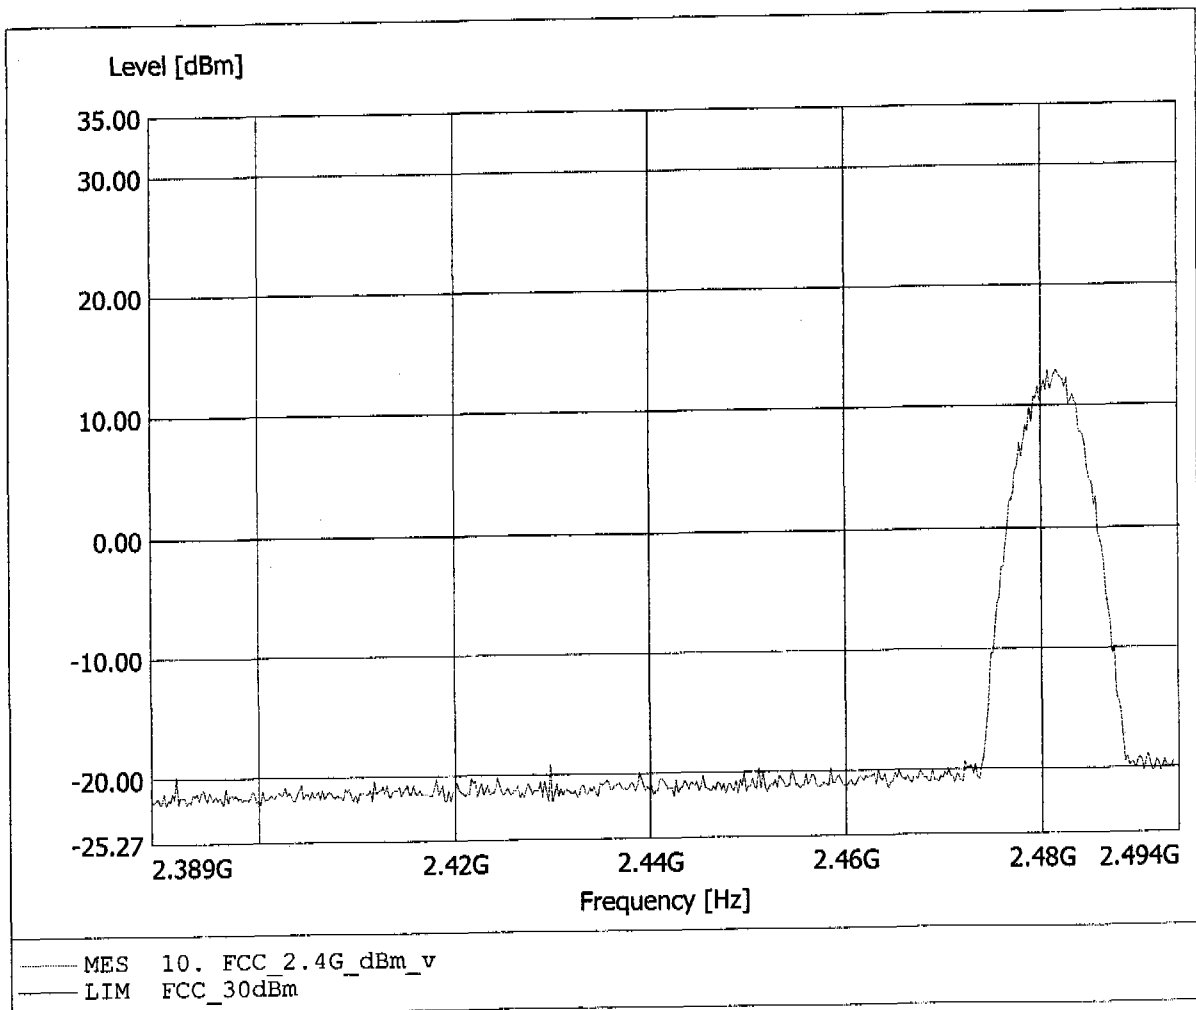


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D -
Comment 2: Freq: 2.481GHz, Pmax: 24.41dBm, RBW: 5MHz

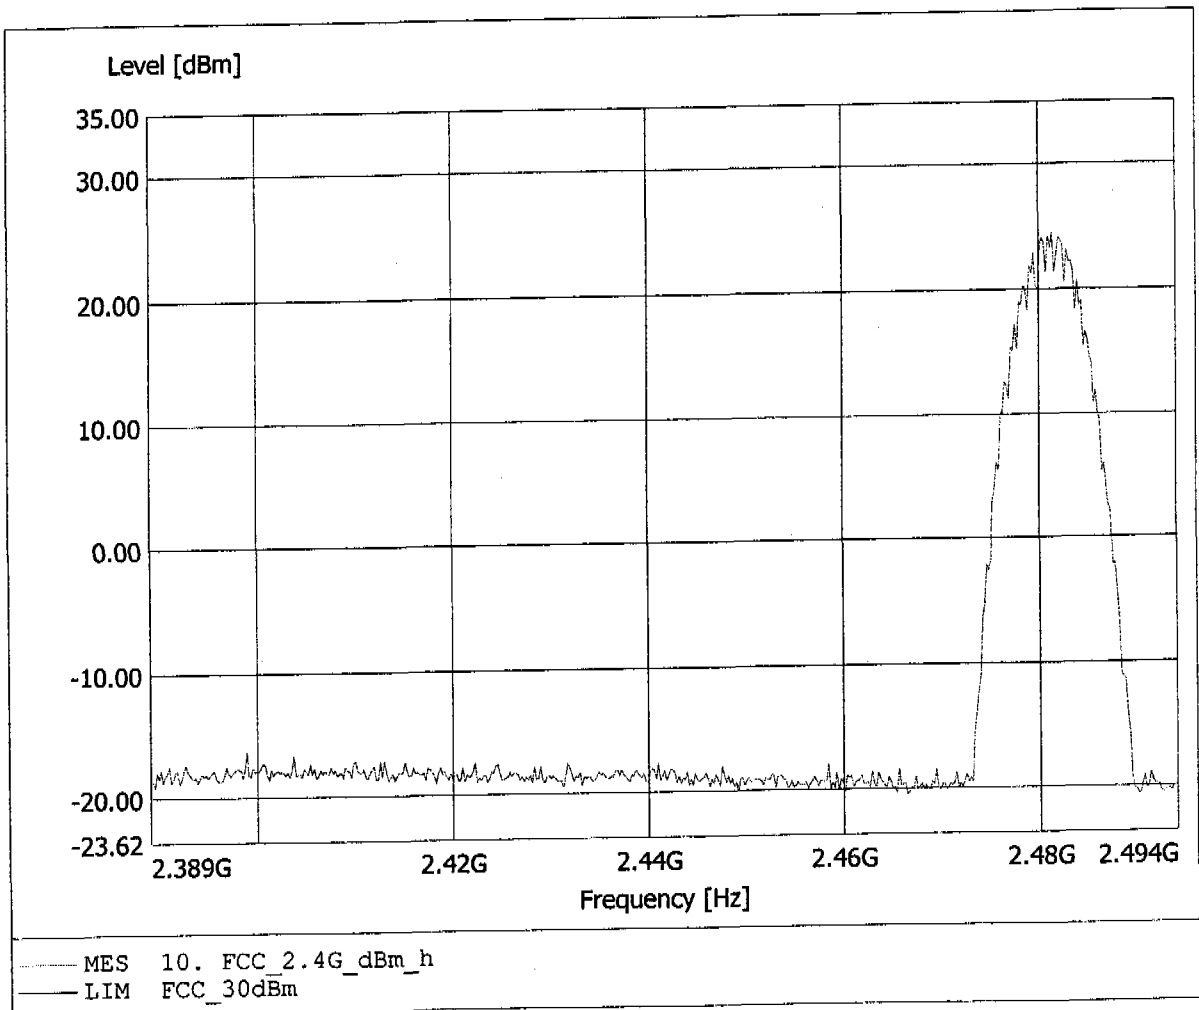


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 12.94dBm, RBW: 5MHz

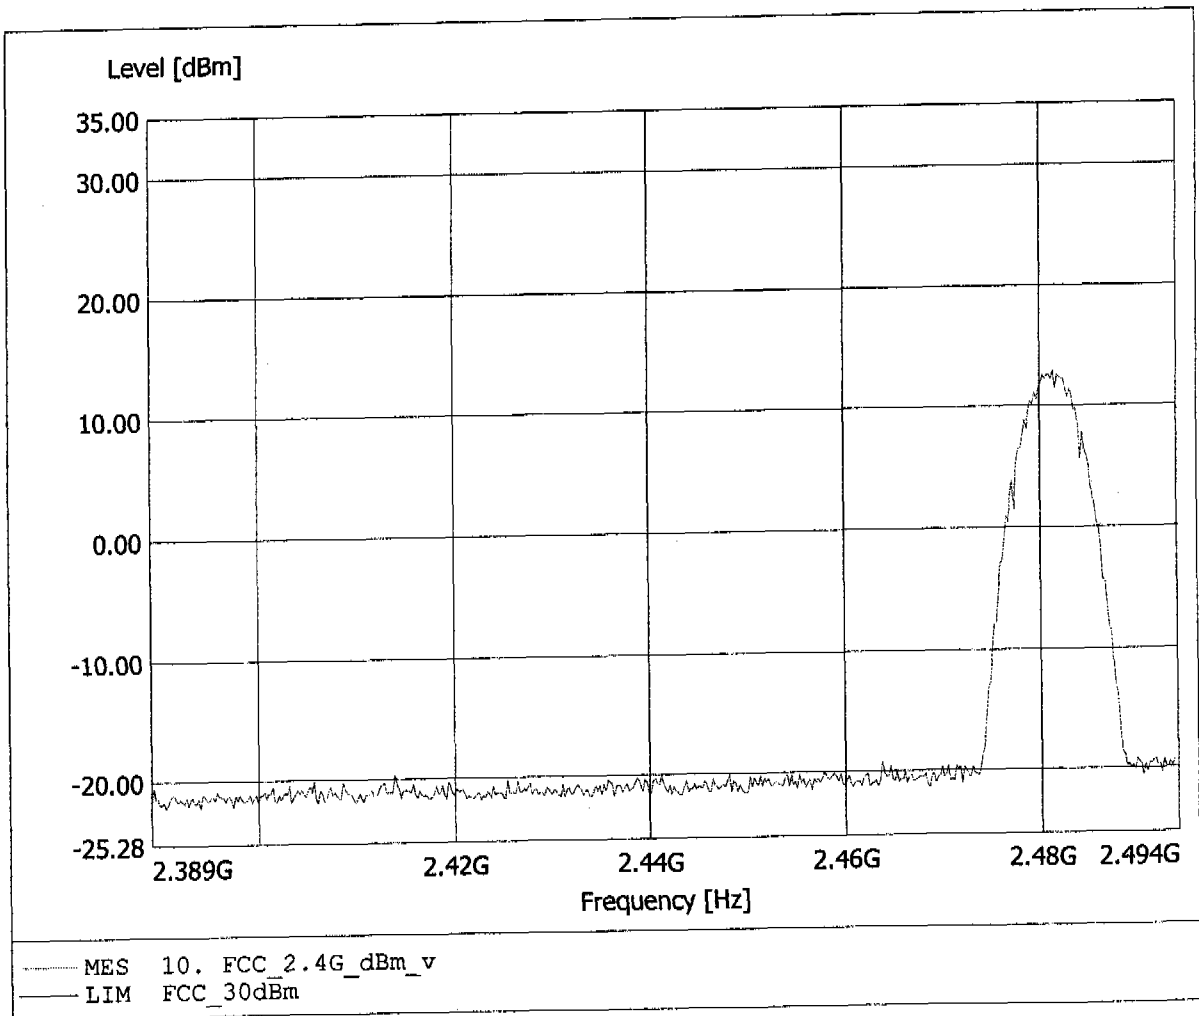


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 24.41dBm, RBW: 5MHz

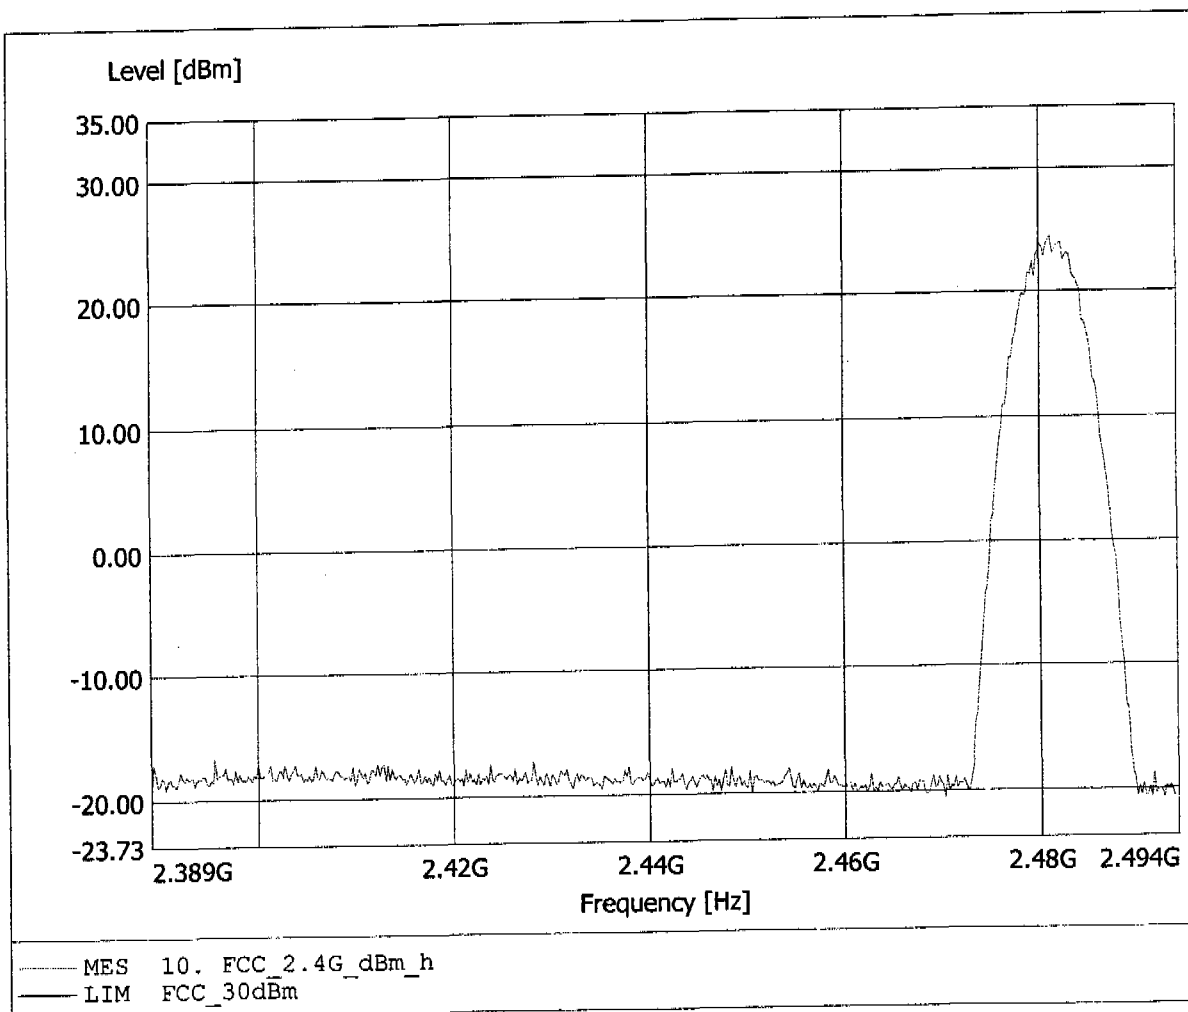


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 13.05dBm, RBW: 5MHz

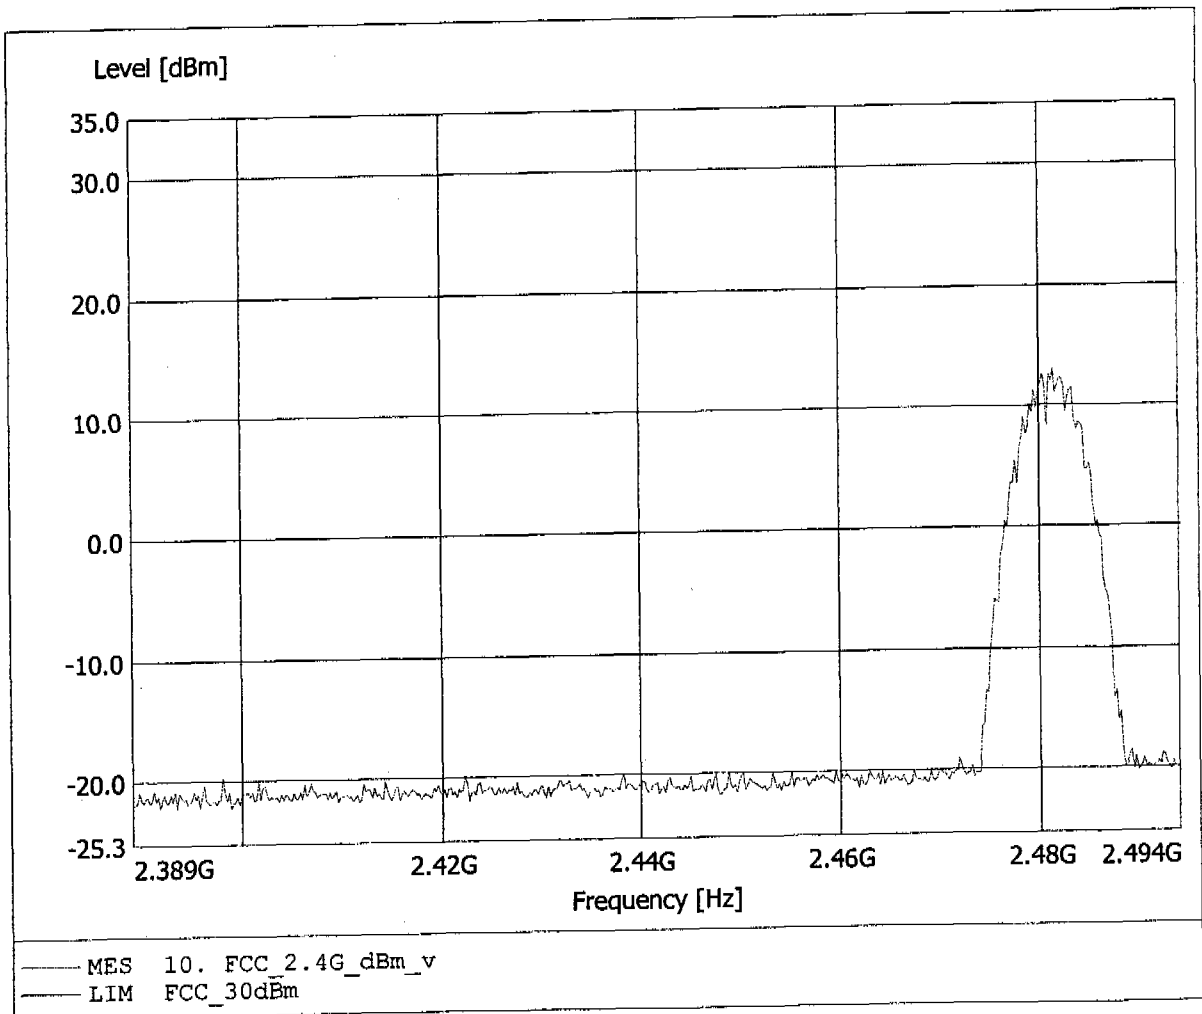

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 2 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 24.33dBm, RBW: 5MHz

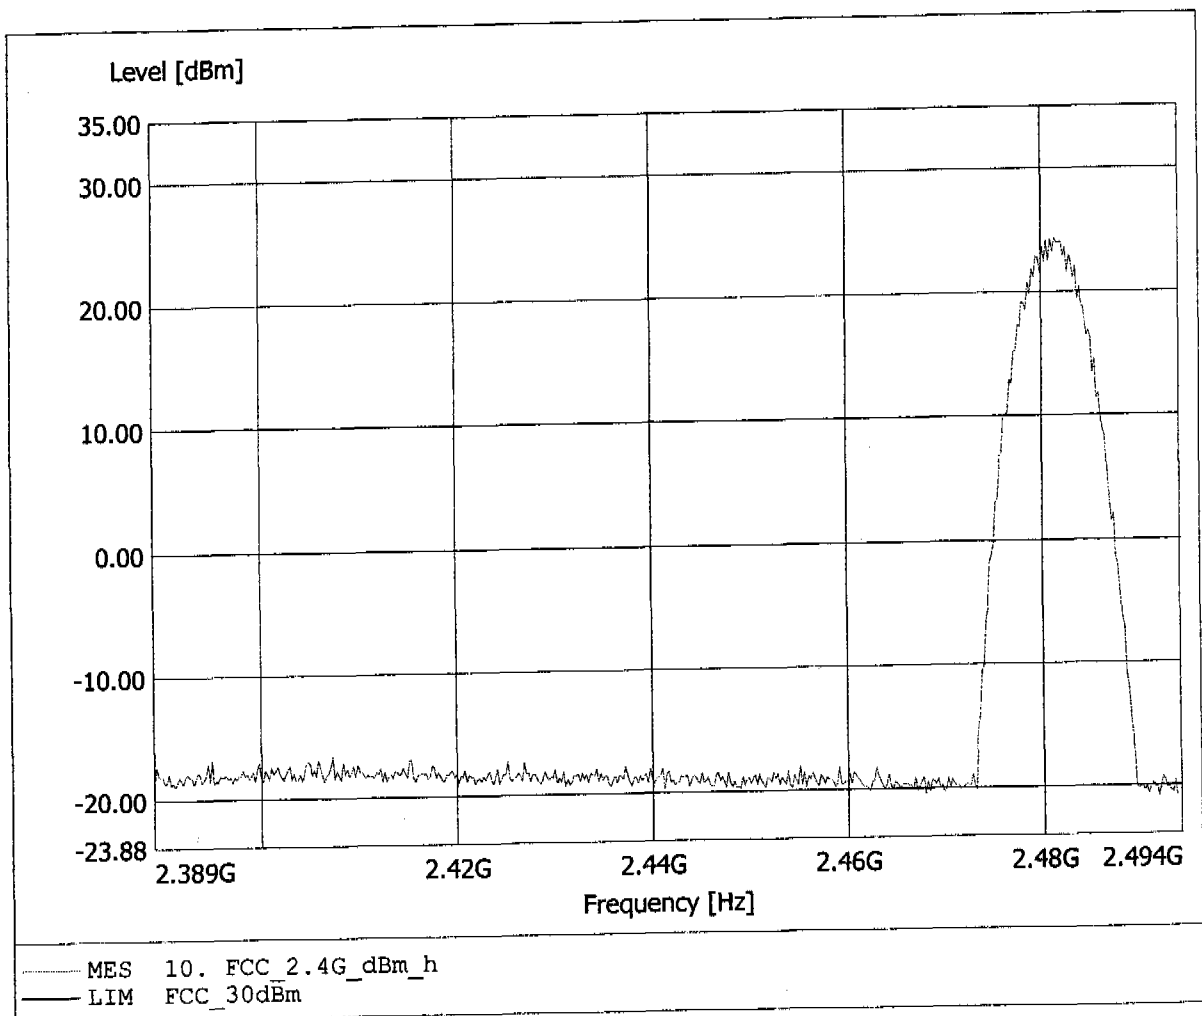




Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Emax: 119.31dBµV/m, RBW: 1MHz

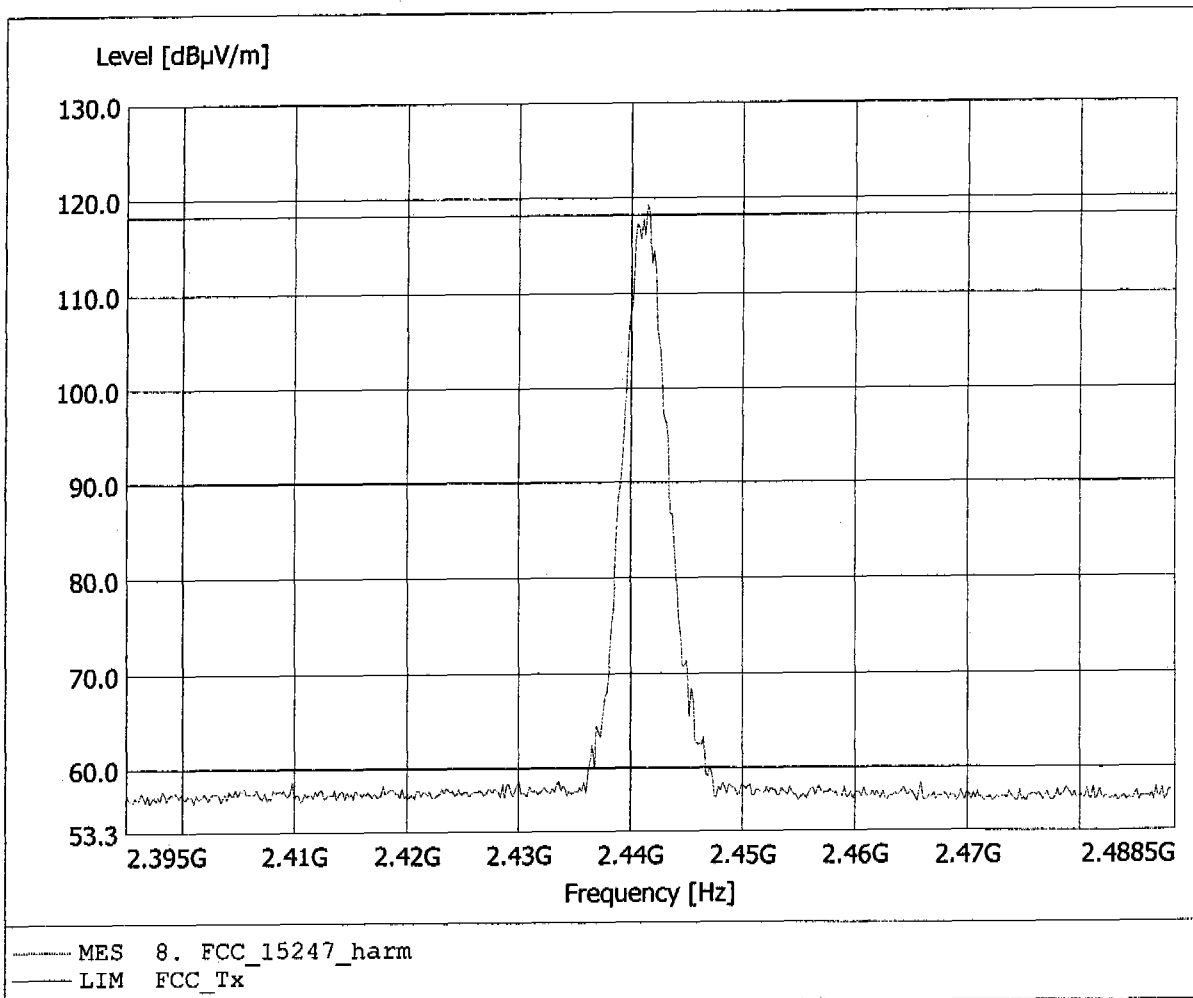


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
 Model: IP600-ISM / Ant.: 1 / Ch.: 0
 Approval Holder: KIRK telecom A/S
 Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247
 Comment 1: Dist.: 3m, Ant.: HK 116
 Comment 2: Freq: 175.130MHz, Emax: 31.14dBµV/m, RBW: 100kHz

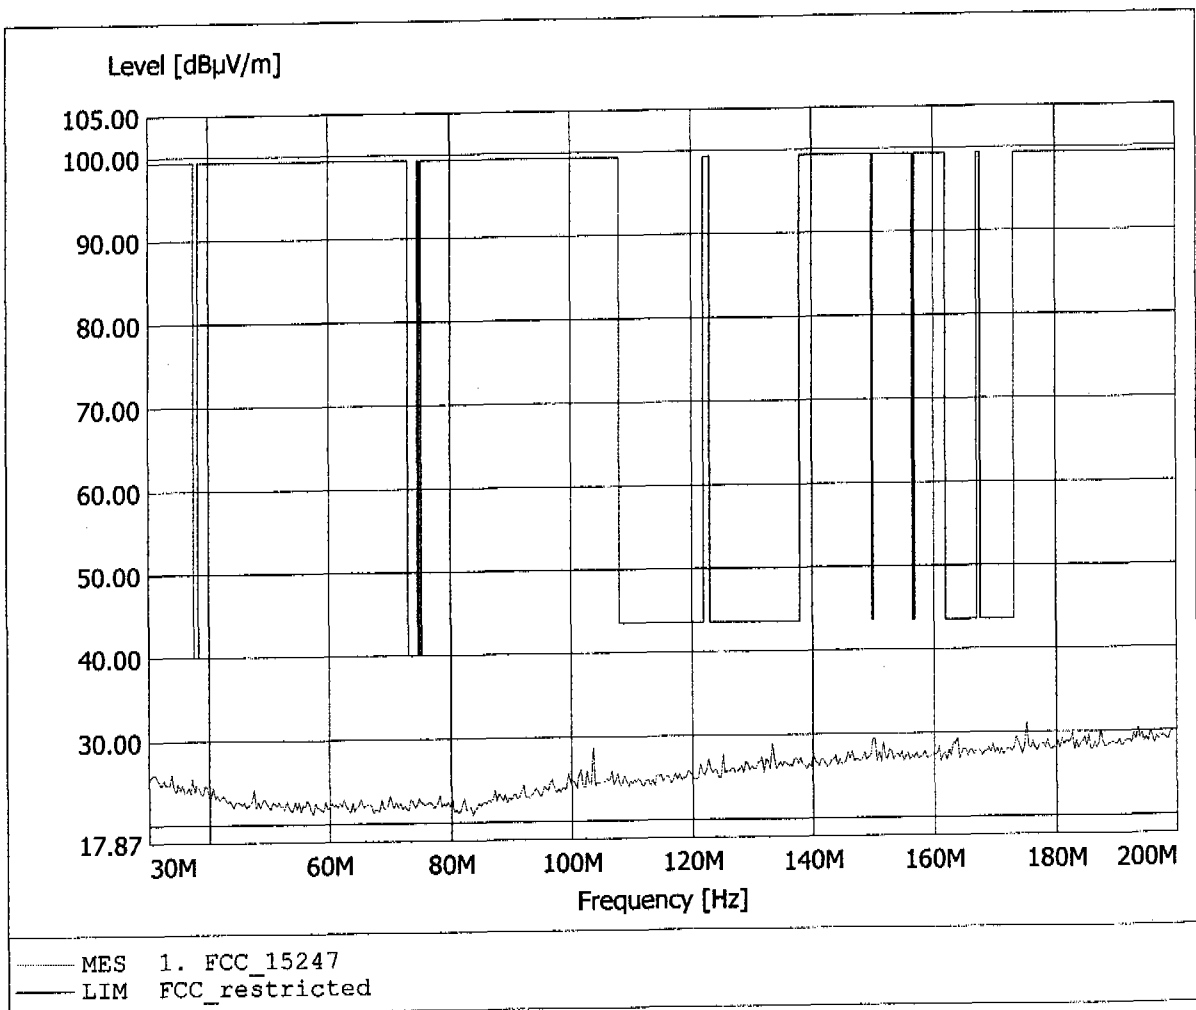


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 133.226MHz, Emax: 34.58dBµV/m, RBW: 100kHz

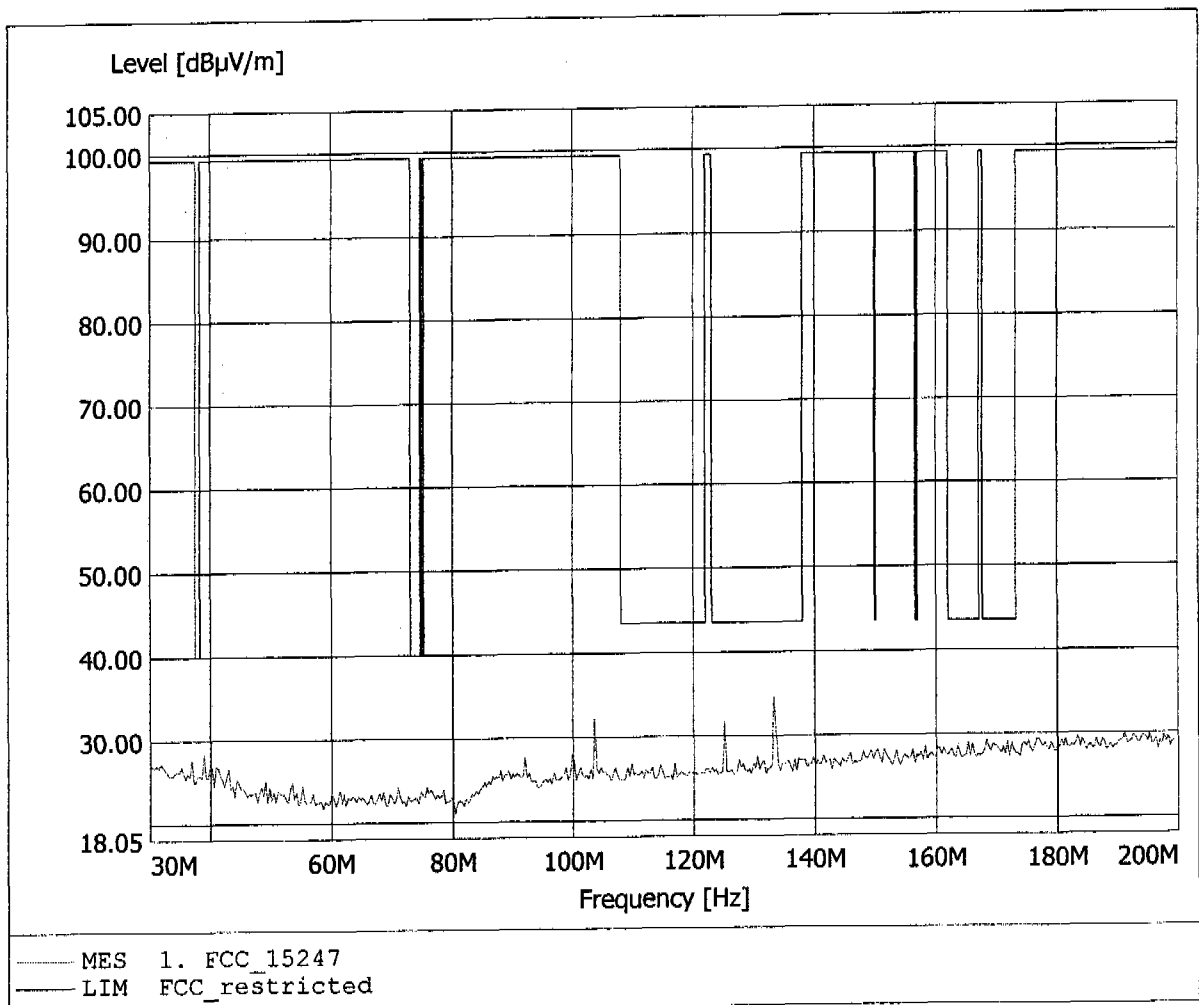


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 934.269MHz, Emax: 43.64dBuV/m, RBW: 100kHz

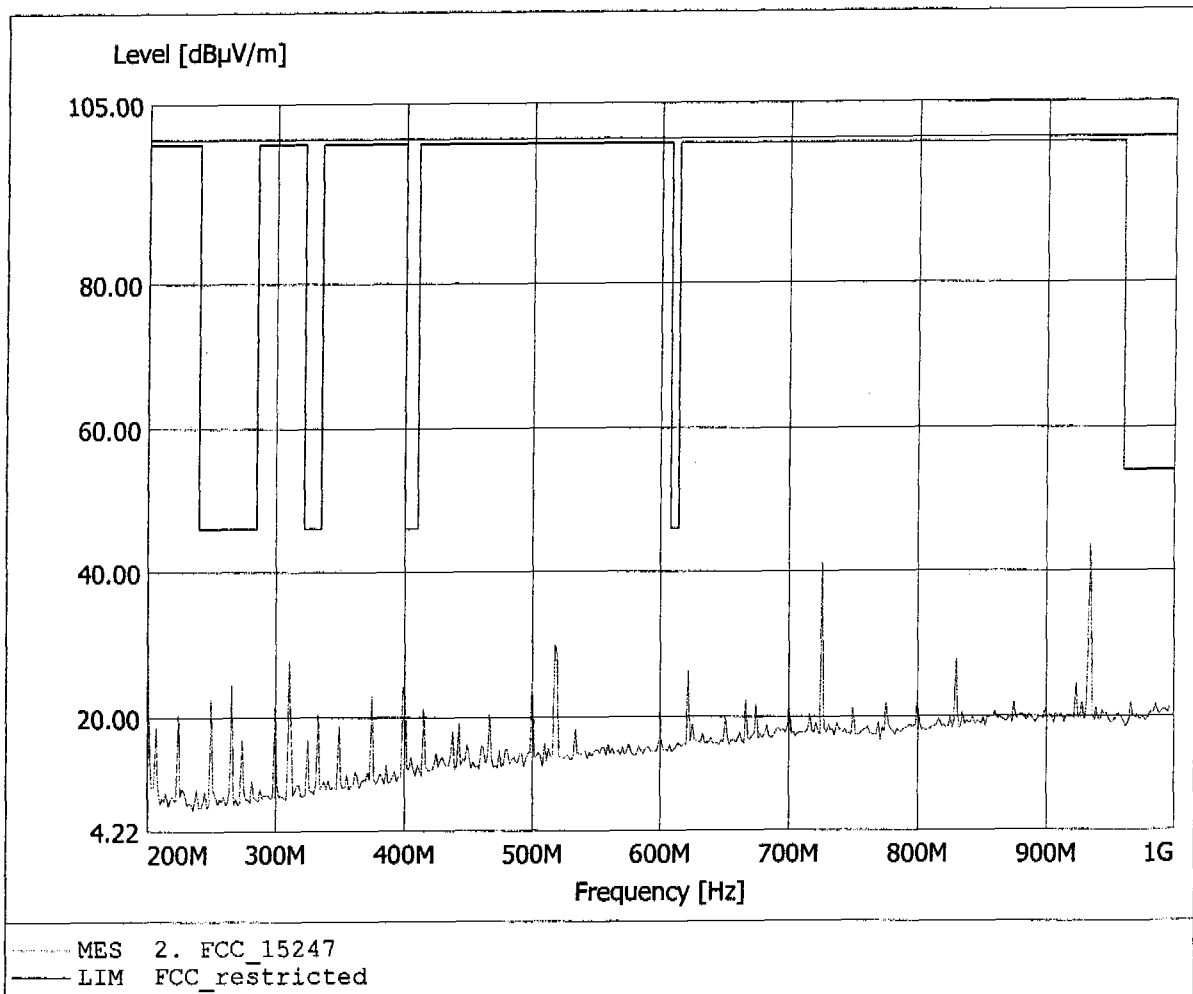


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 934.269MHz, Emax: 53.00dBµV/m, RBW: 100kHz

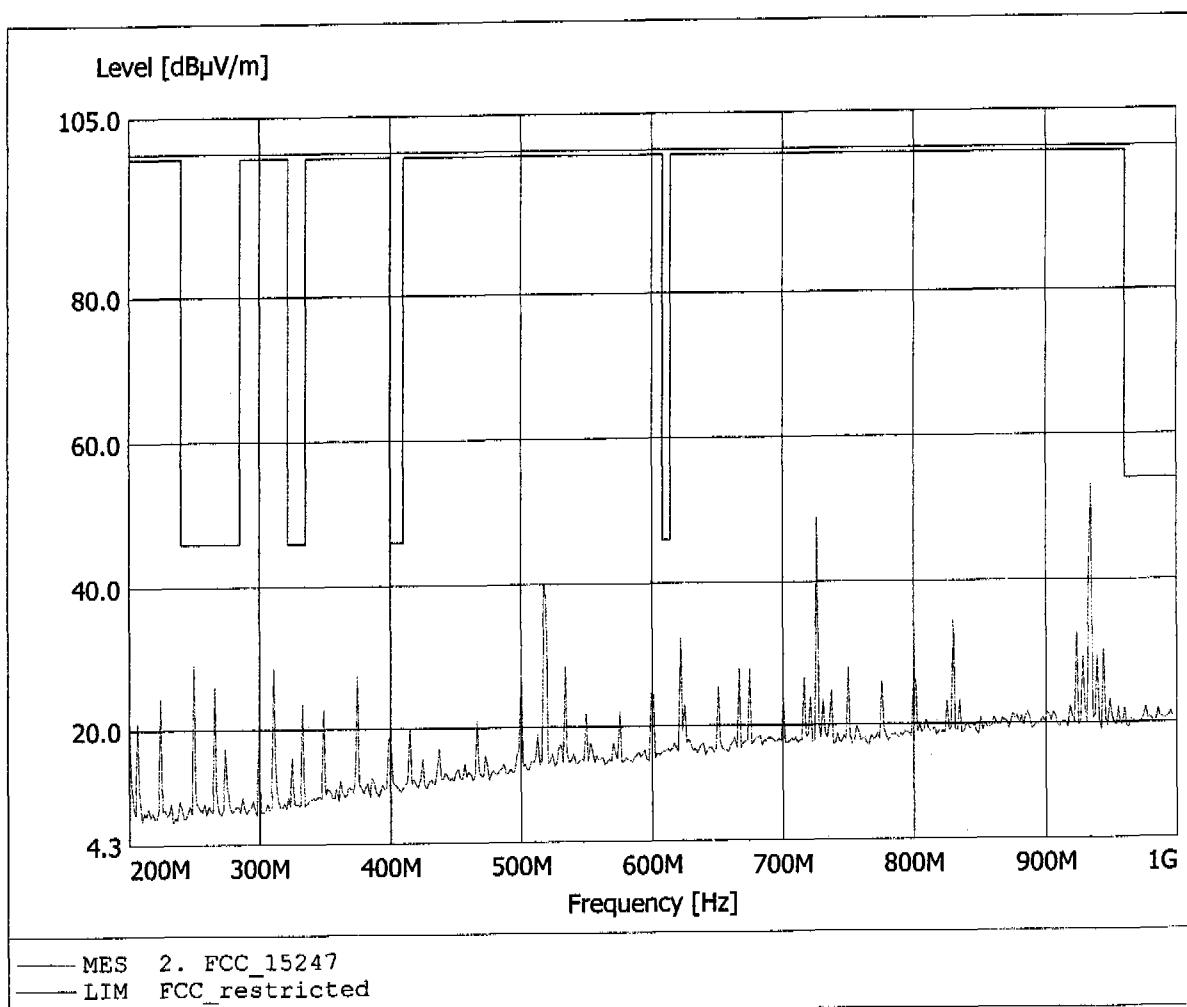


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 88.89dBµV/m, RBW: 1MHz

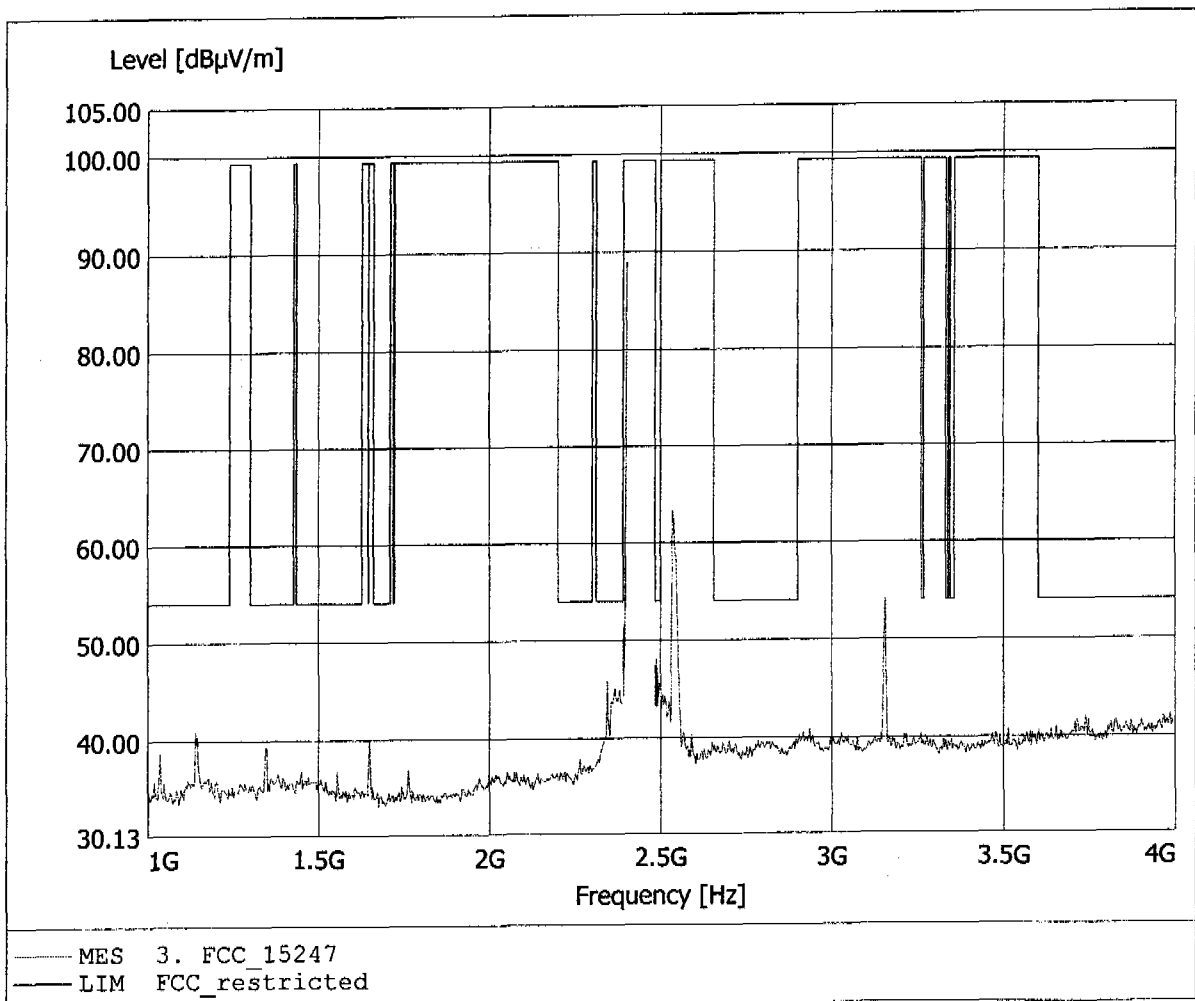


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 88.89dBµV/m, RBW: 1MHz

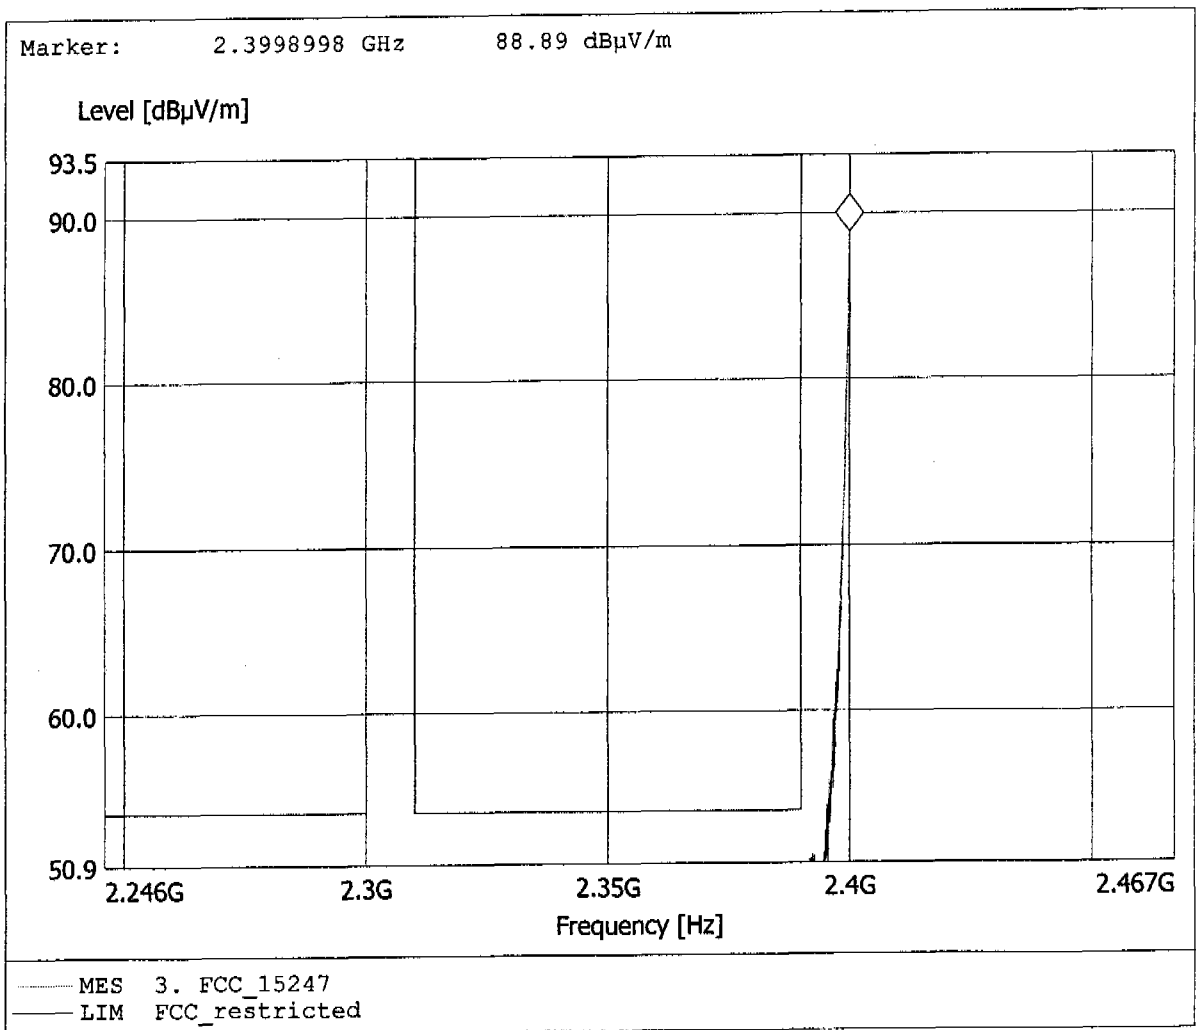


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 88.89dBµV/m, RBW: 1MHz

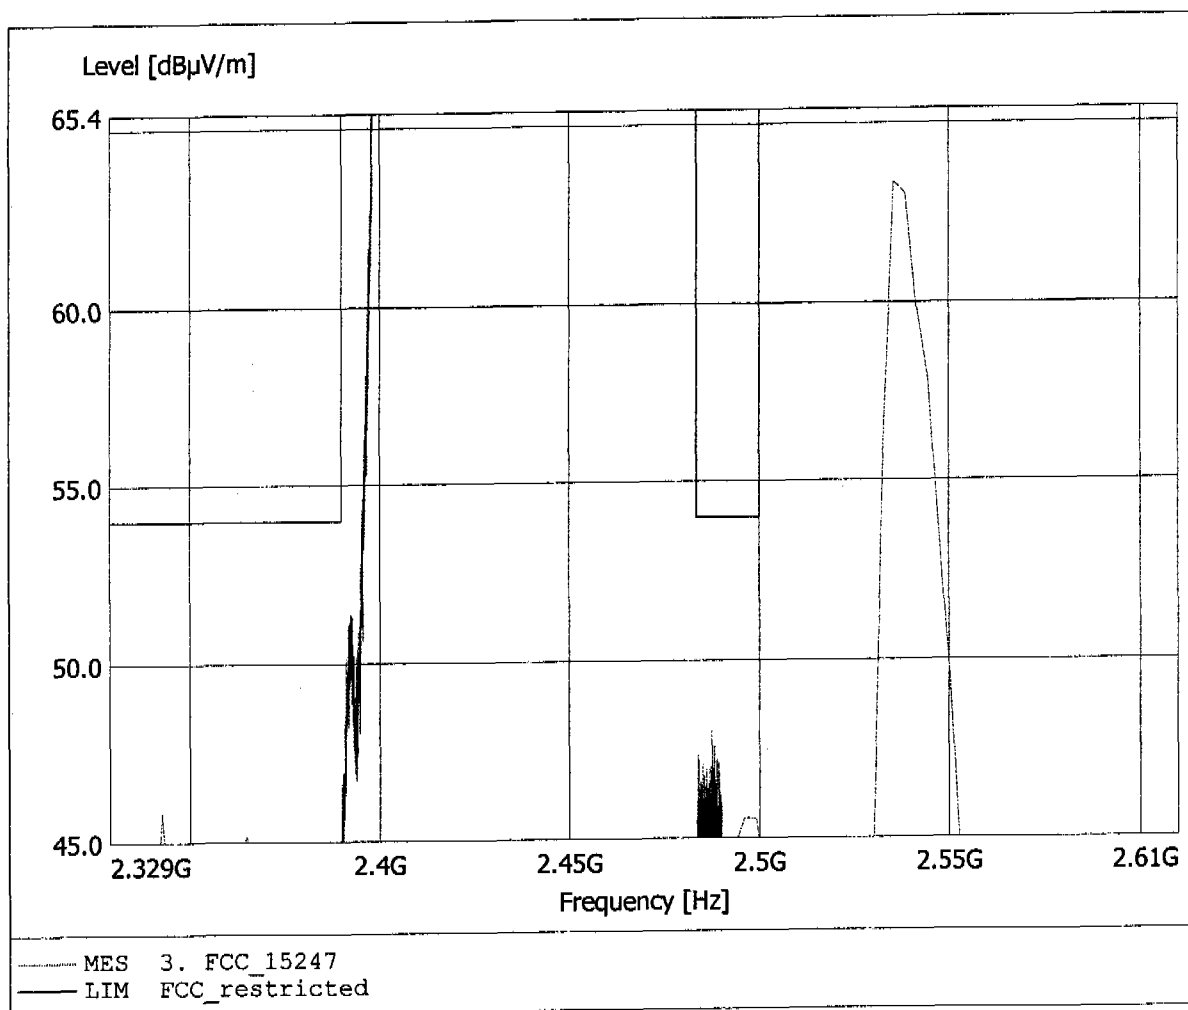


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 82.32dBuV/m, RBW: 1MHz

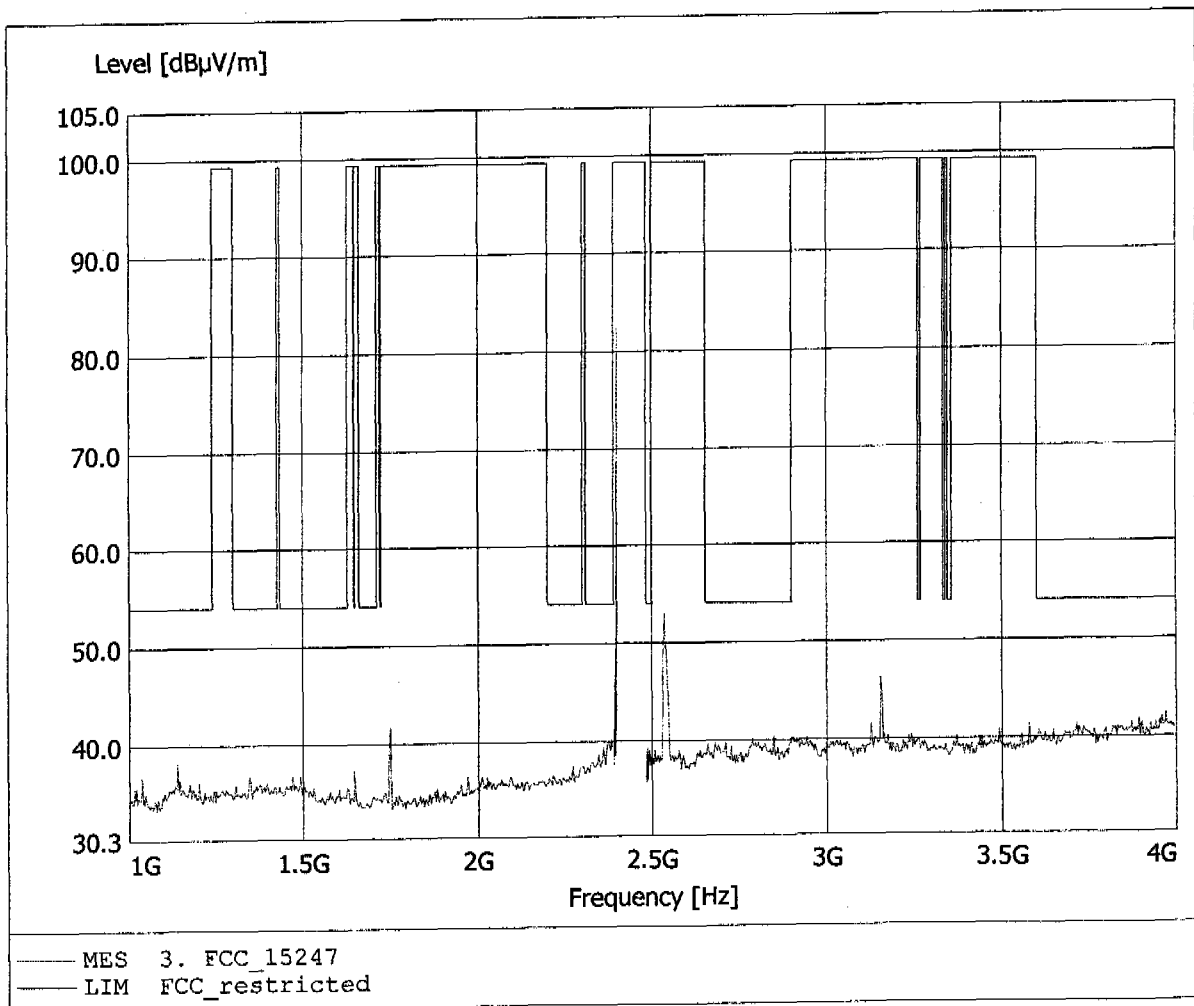


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
 Model: IP600-ISM / Ant.: 1 / Ch.: 0
 Approval Holder: KIRK telecom A/S
 Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
 Comment 2: Freq: 2.400GHz, Emax: 82.32dBµV/m, RBW: 1MHz

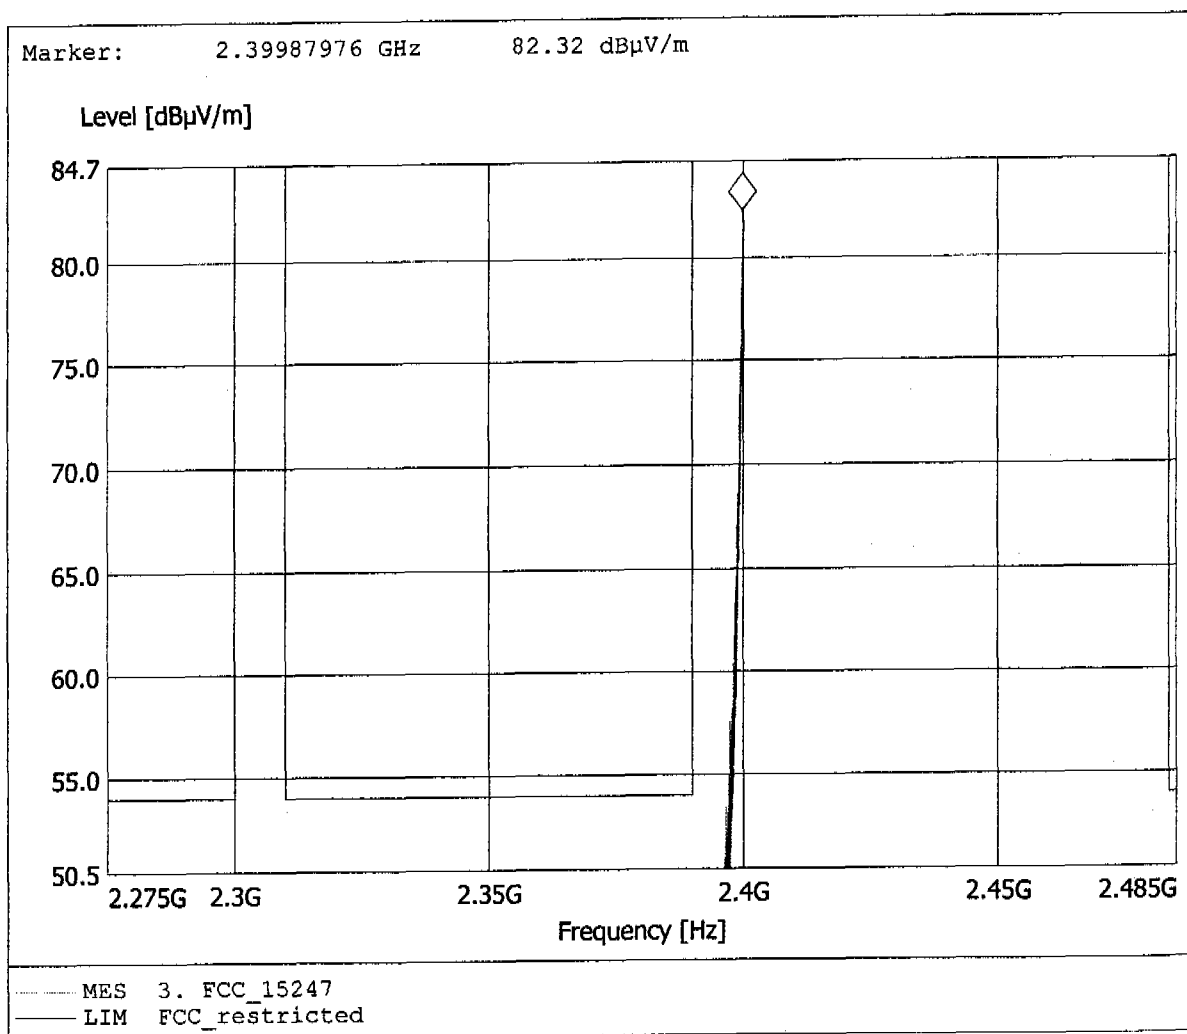


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 52.65dBµV/m, RBW: 1MHz

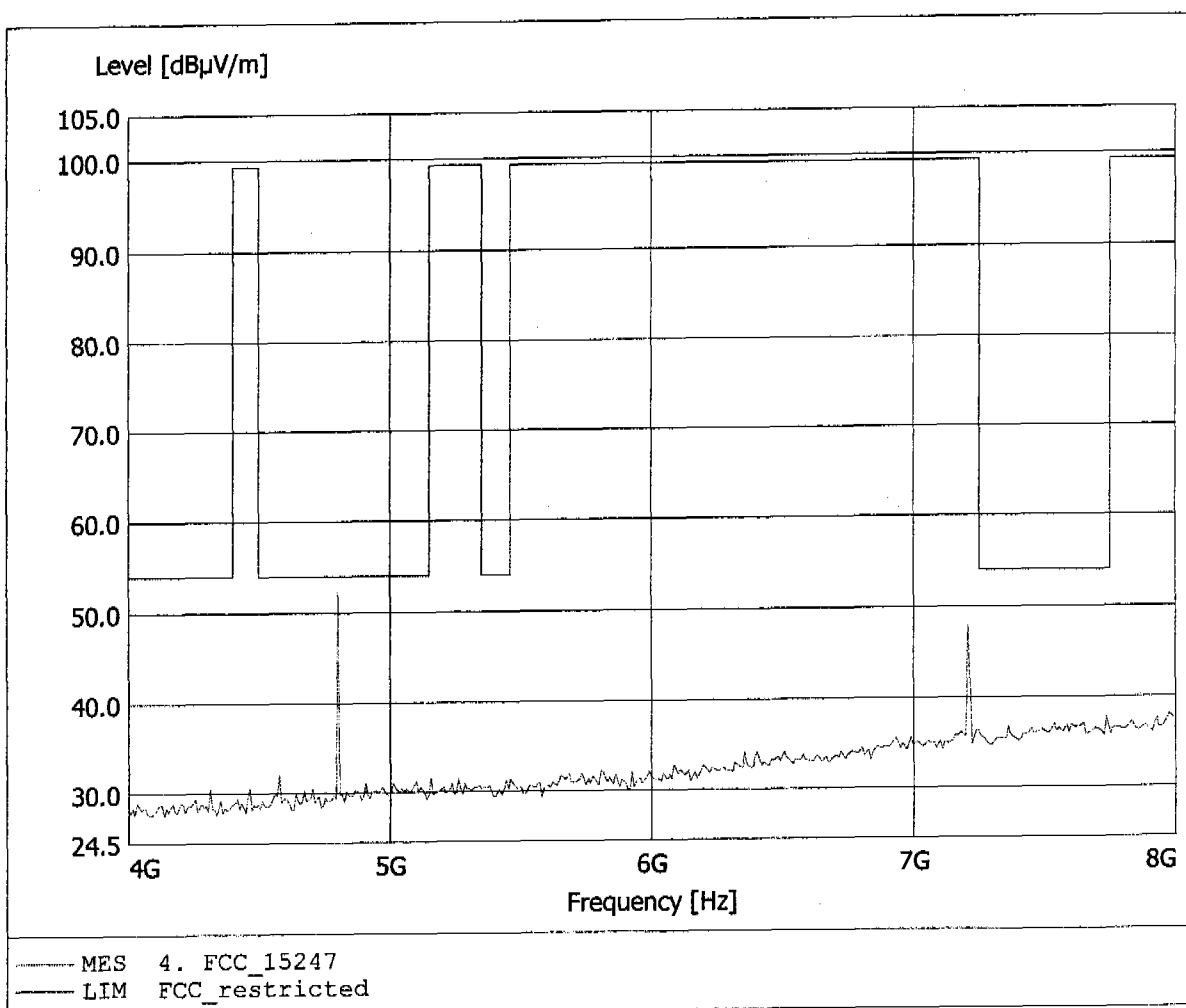


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 61.82dBµV/m, RBW: 1MHz

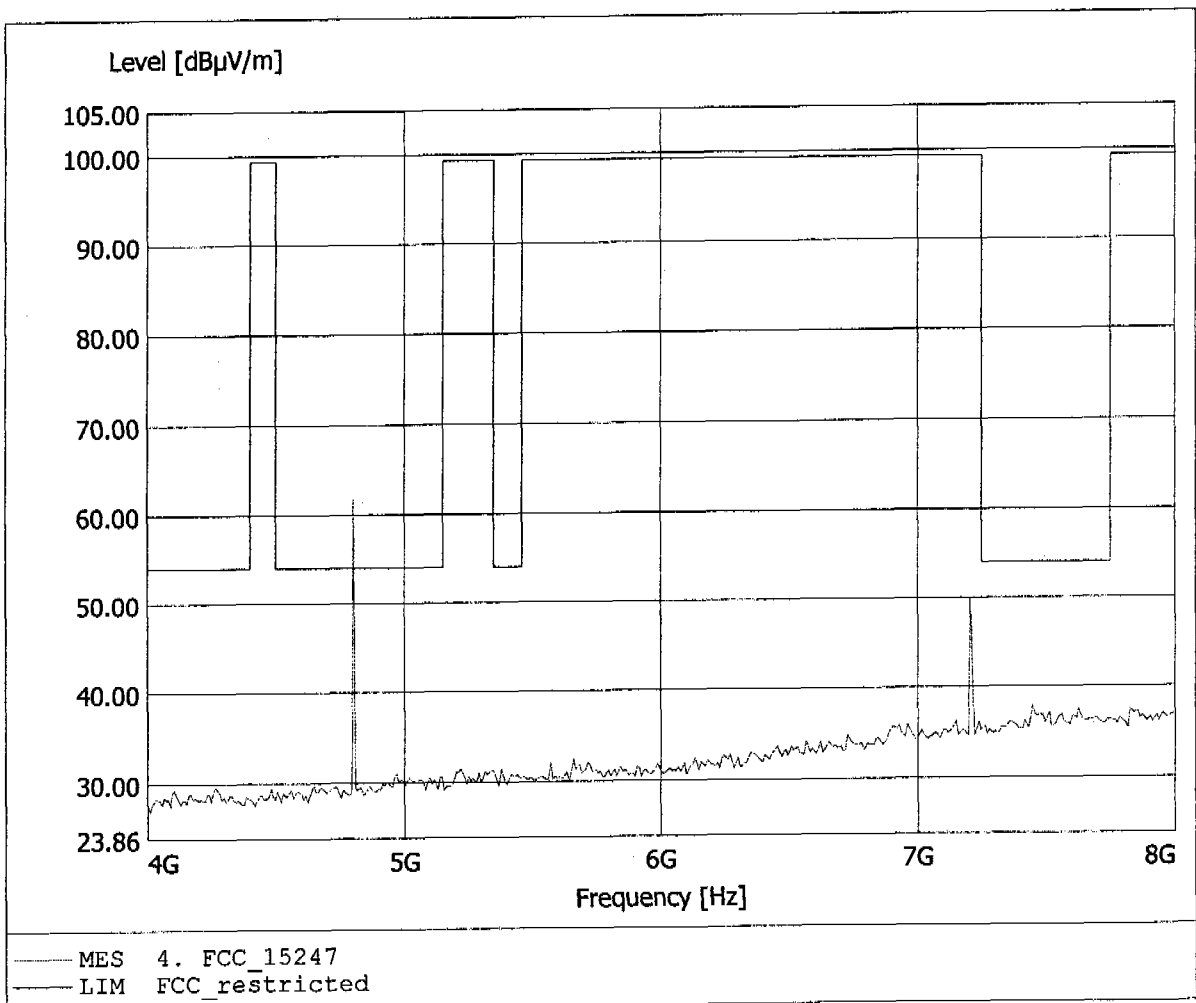


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 32.17dBµV/m, RBW: 1MHz

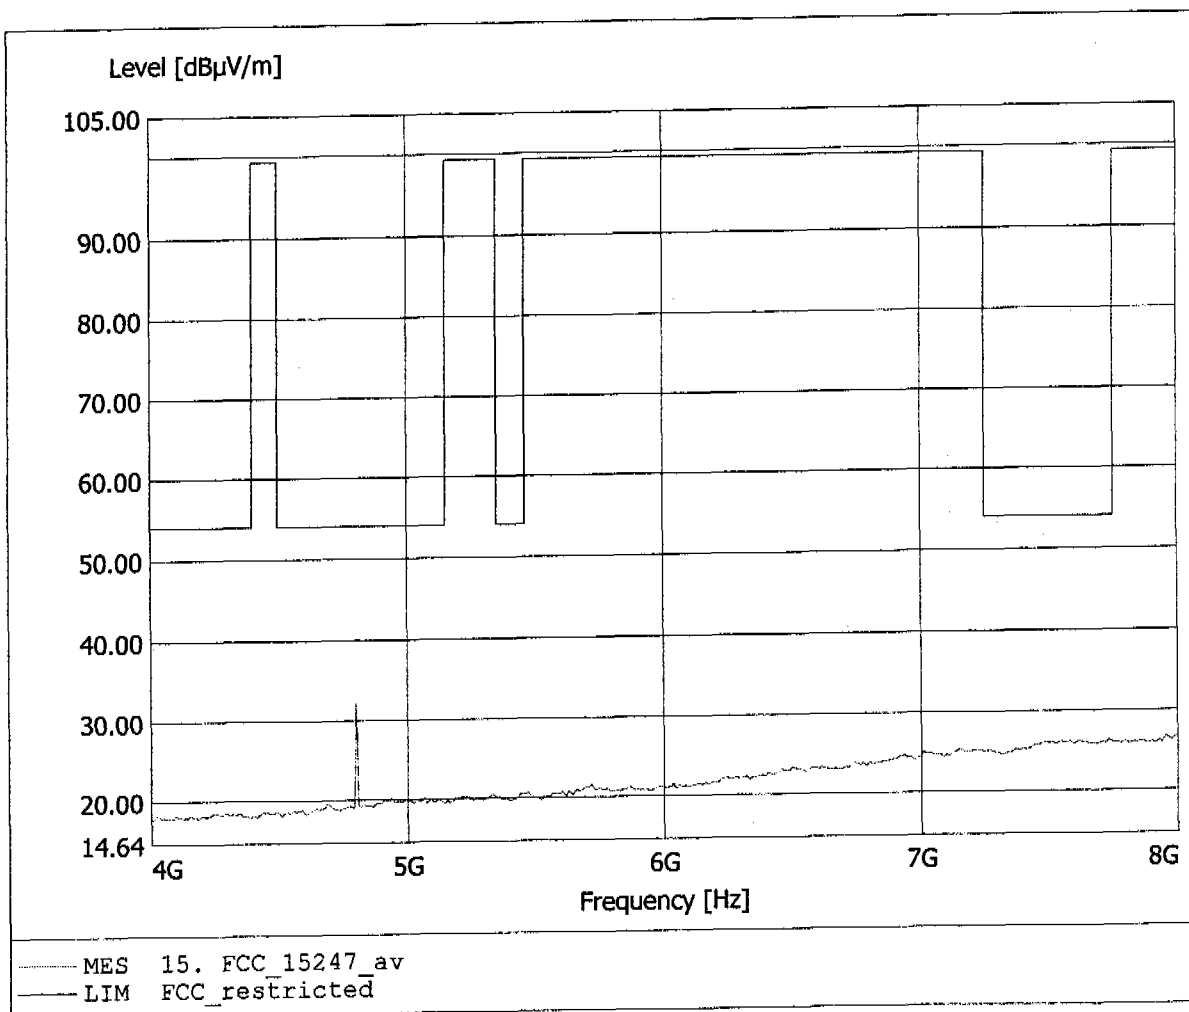


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
 Model: IP600-ISM / Ant.: 1 / Ch.: 0
 Approval Holder: KIRK telecom A/S
 Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to S15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
 Comment 2: Freq: 11.166GHz, Emax: 41.96dBµV/m, RBW: 1MHz

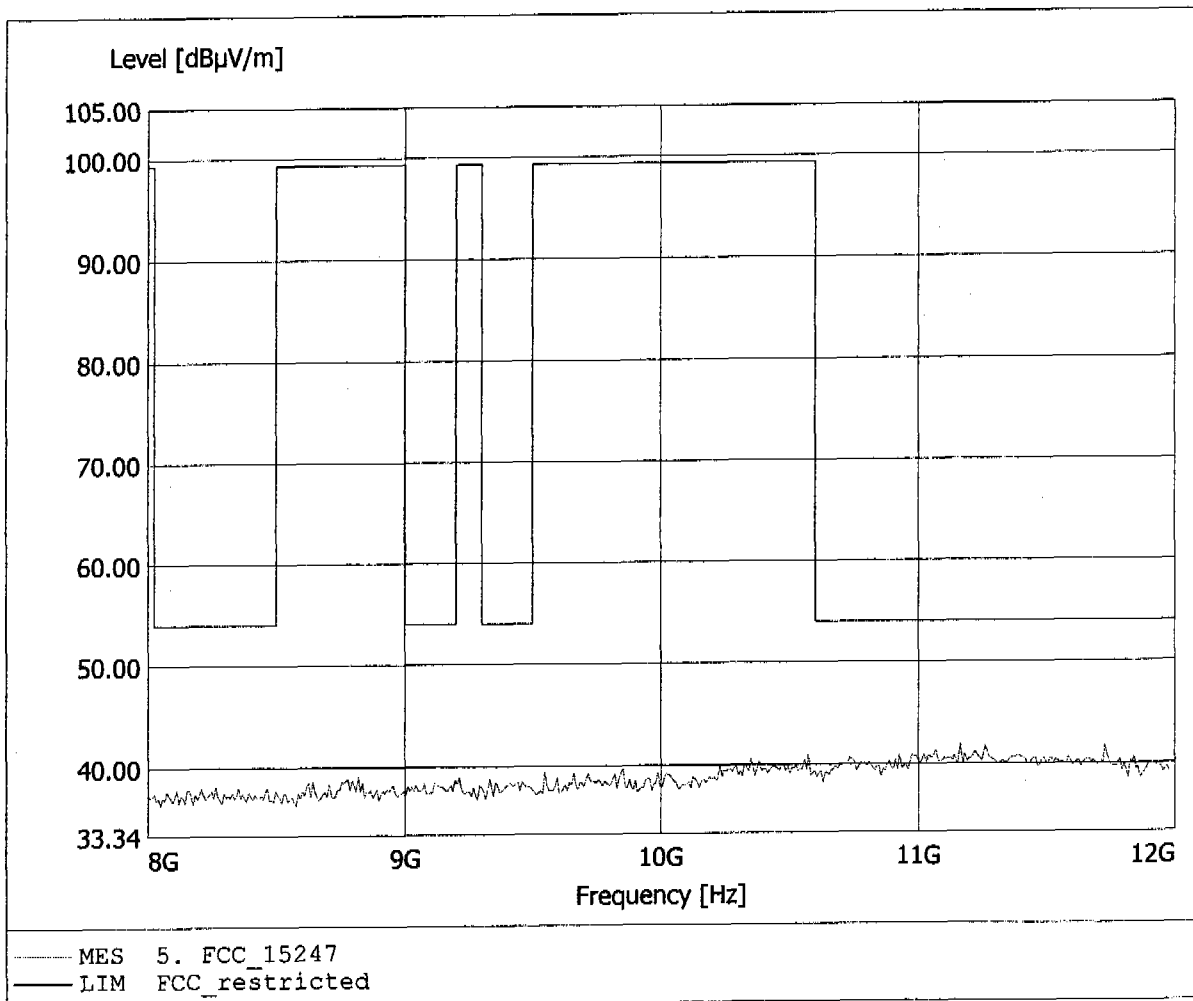


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.238GHz, Emax: 41.36dBµV/m, RBW: 1MHz

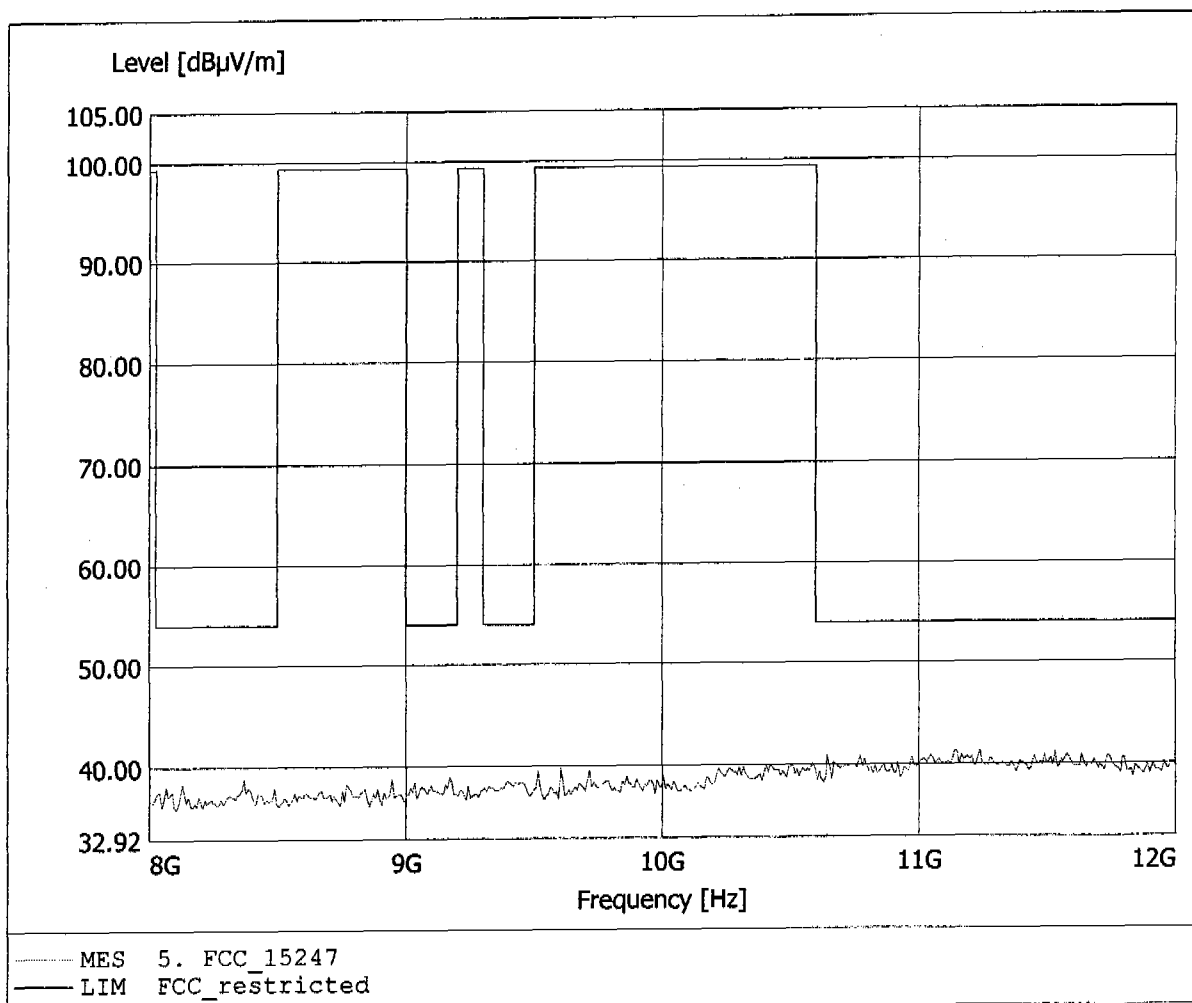


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.425GHz, Emax: 44.37dBµV/m, RBW: 1MHz

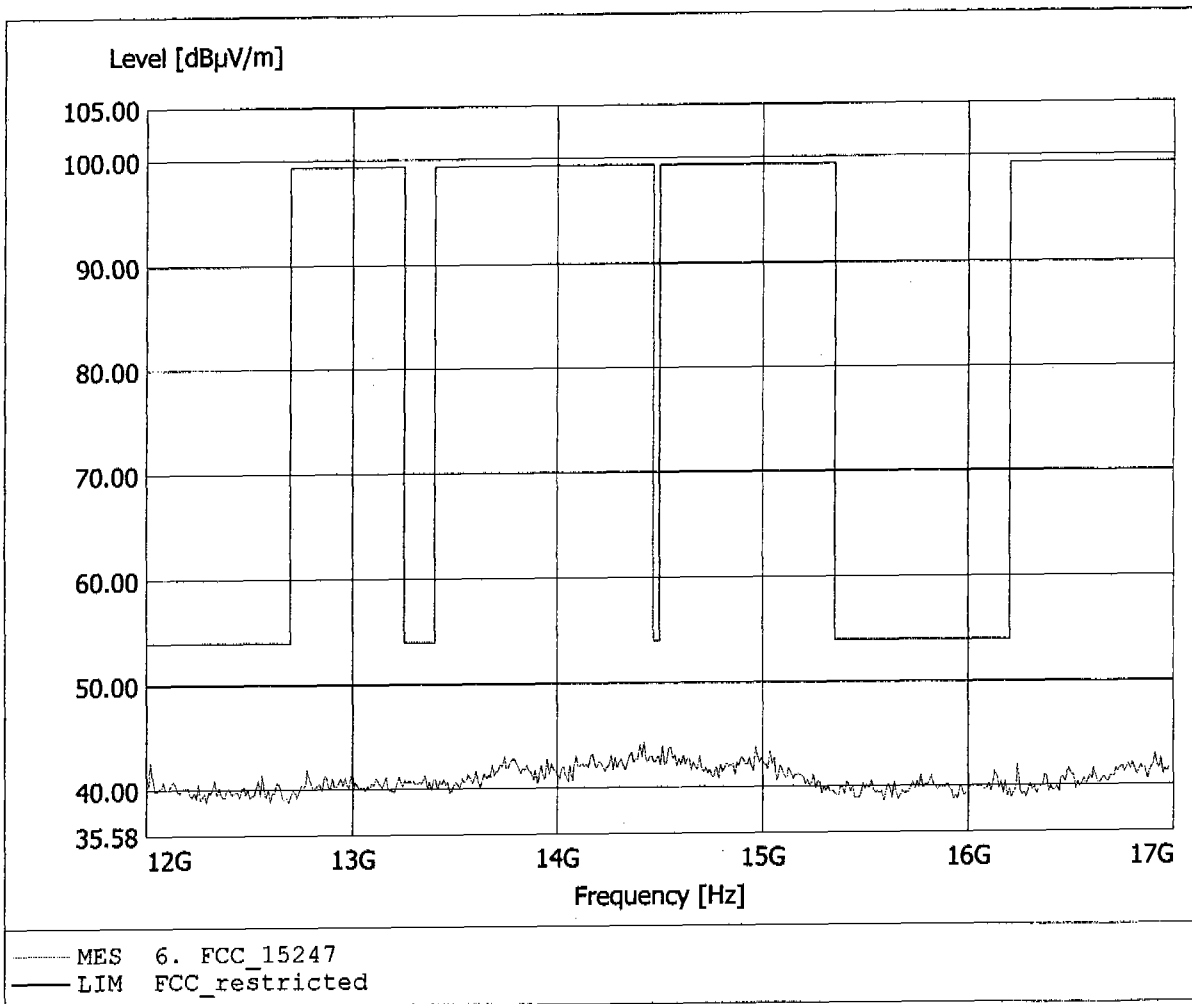


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 55.36dBµV/m, RBW: 1MHz

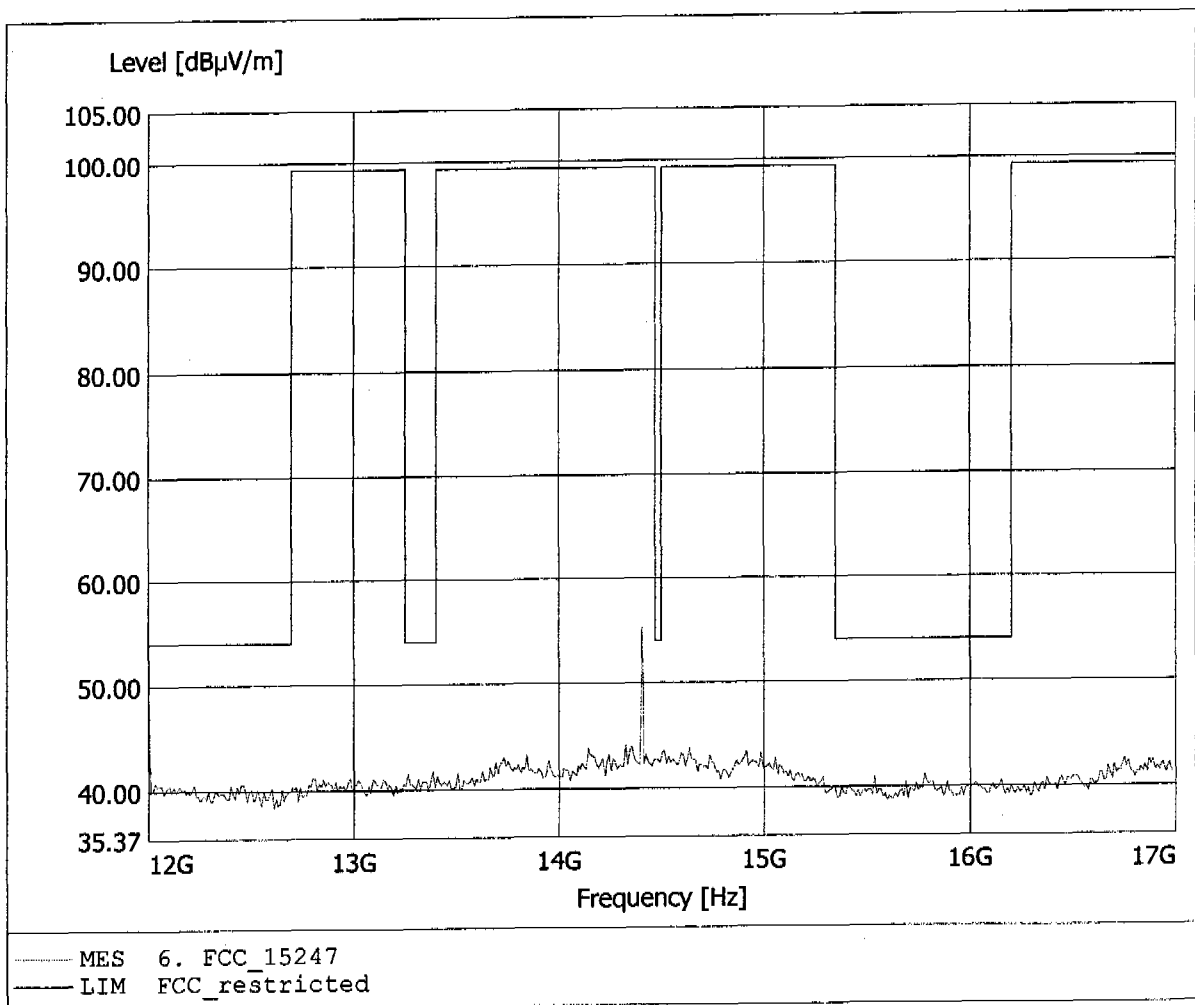


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 23.892GHz, Emax: 45.30dBµV/m, RBW: 1MHz

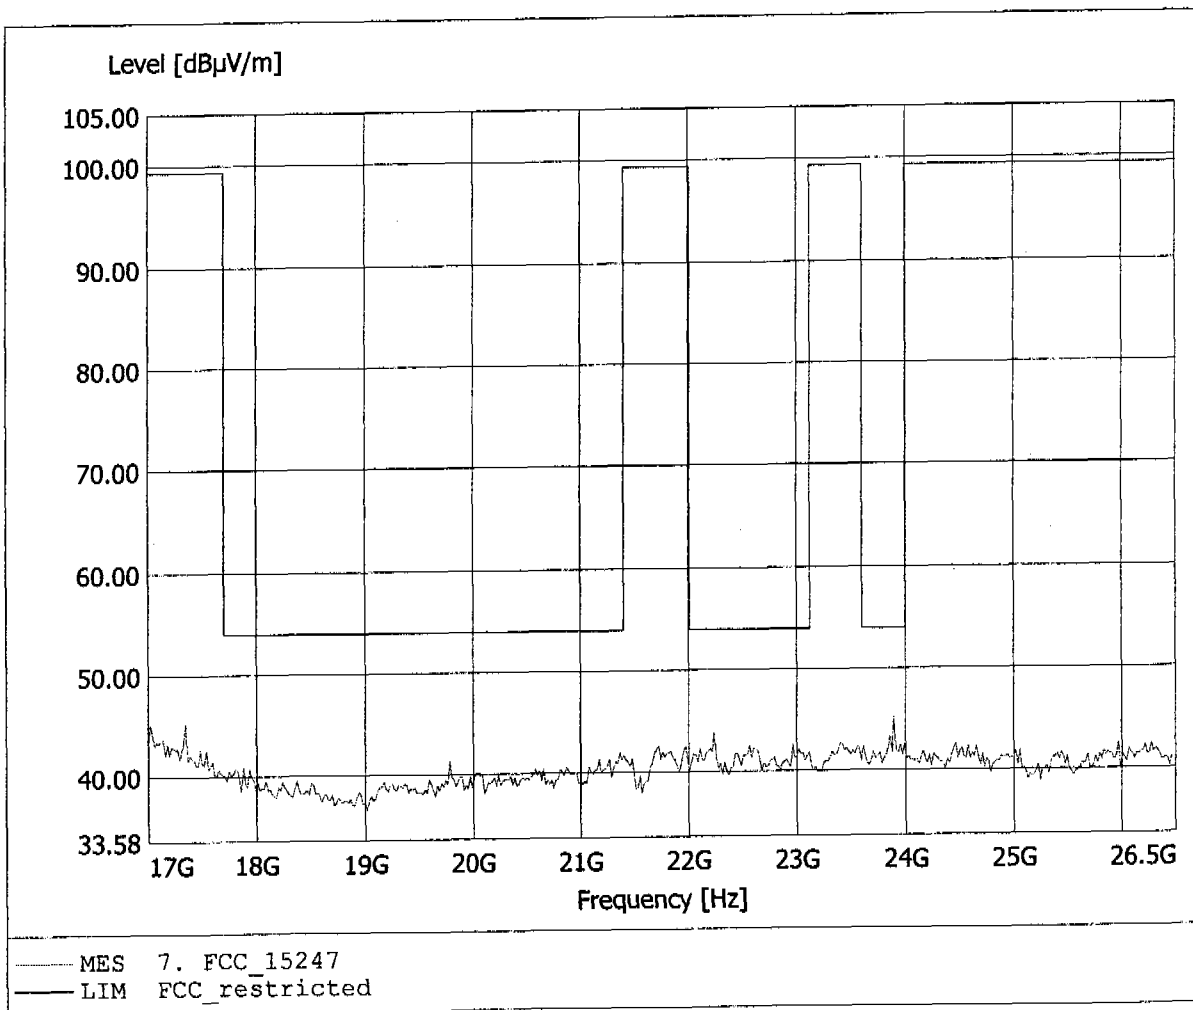


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 0
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.15dBµV/m, RBW: 1MHz

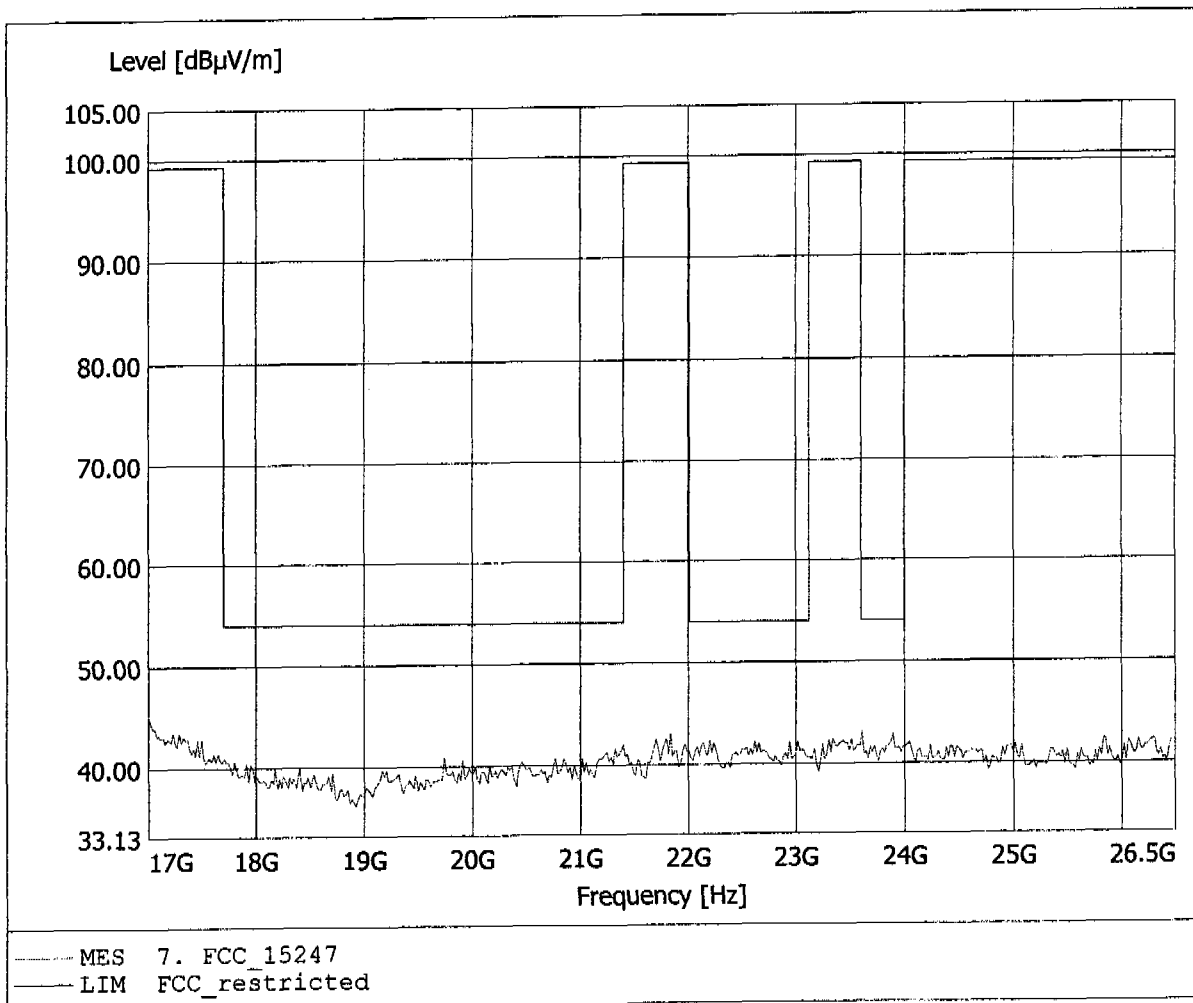


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 149.920MHz, Emax: 30.68dBµV/m, RBW: 100kHz

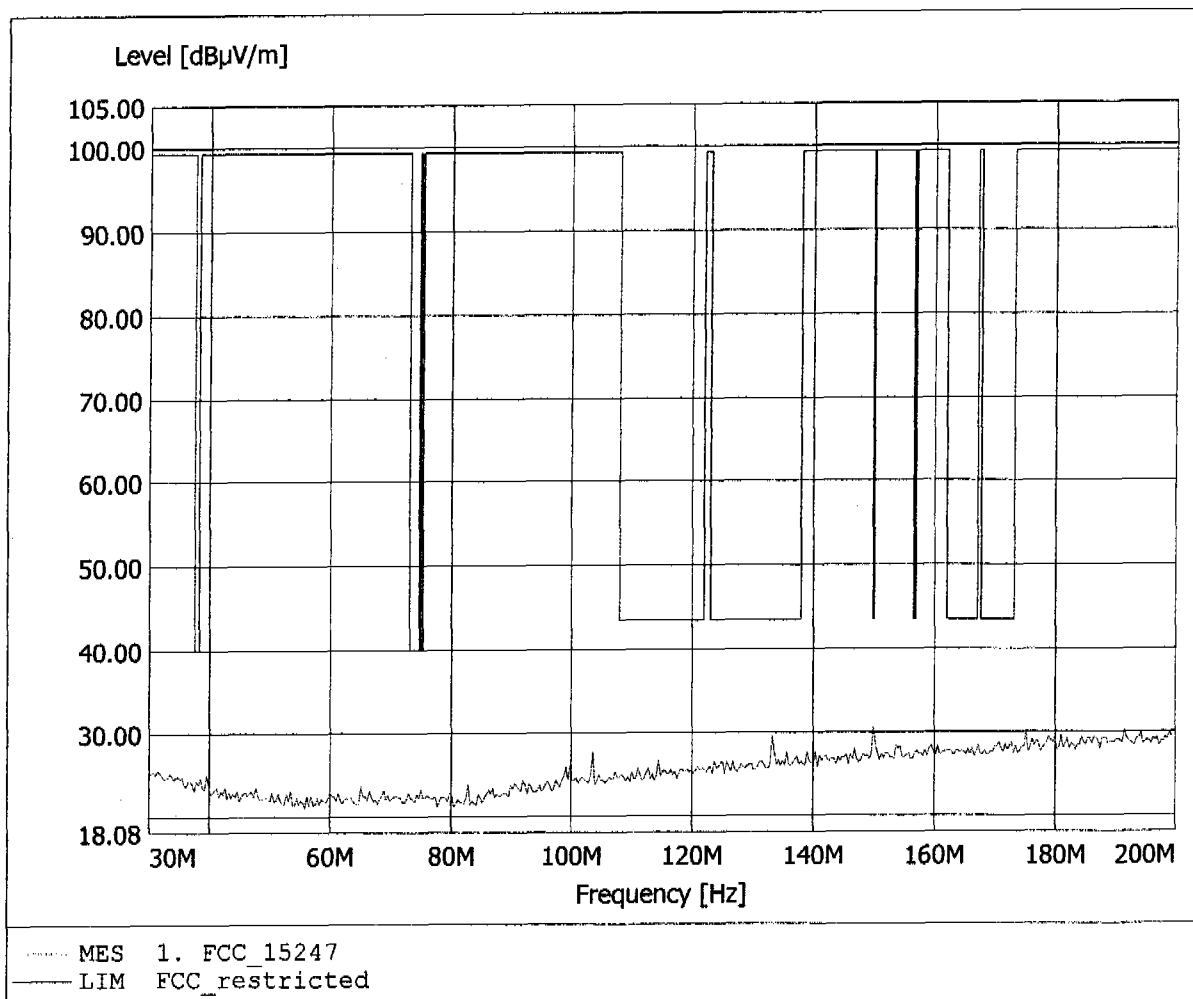


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 133.226MHz, Emax: 34.01dBµV/m, RBW: 100kHz

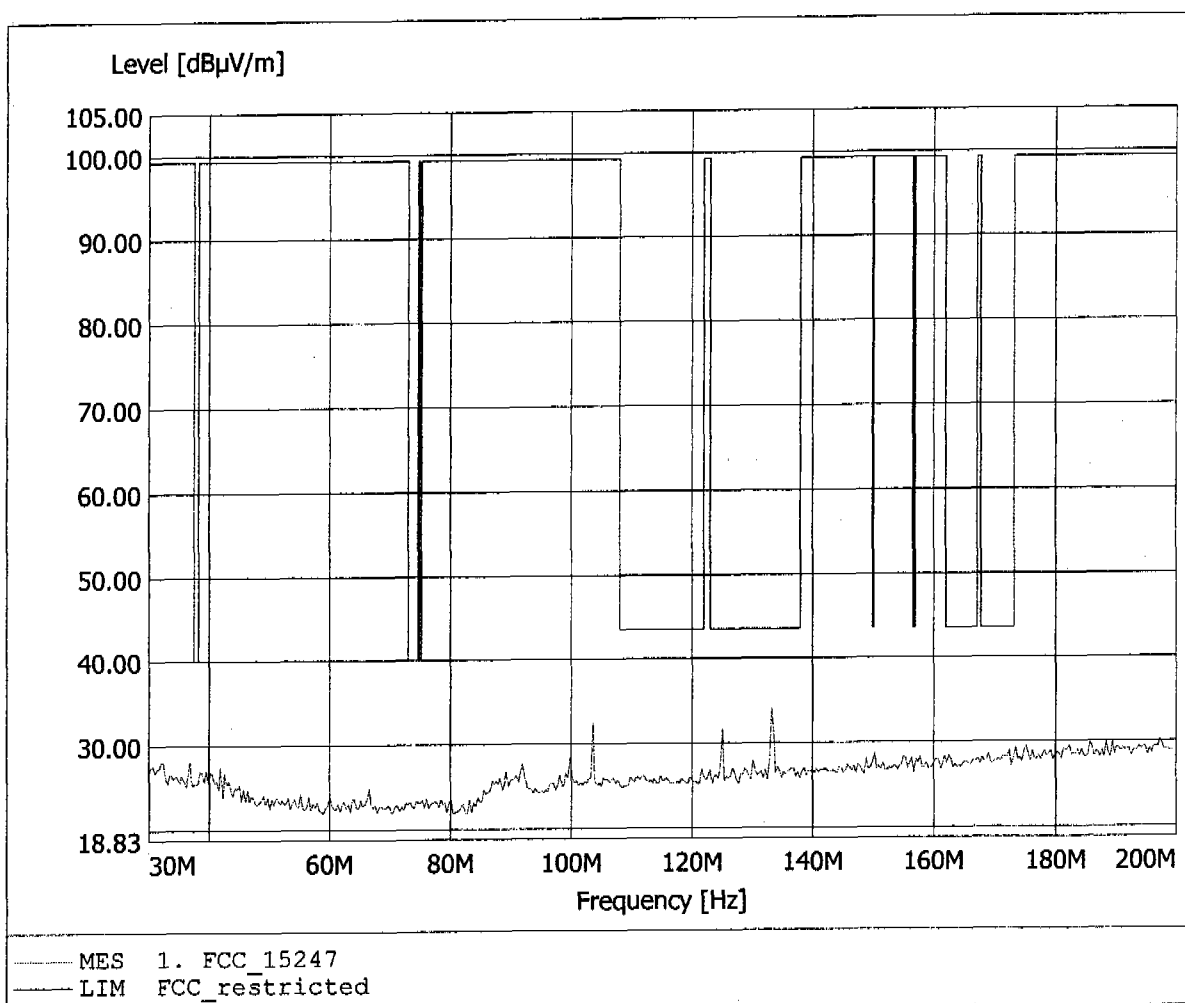


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 934.269MHz, Emax: 52.60dBµV/m, RBW: 100kHz

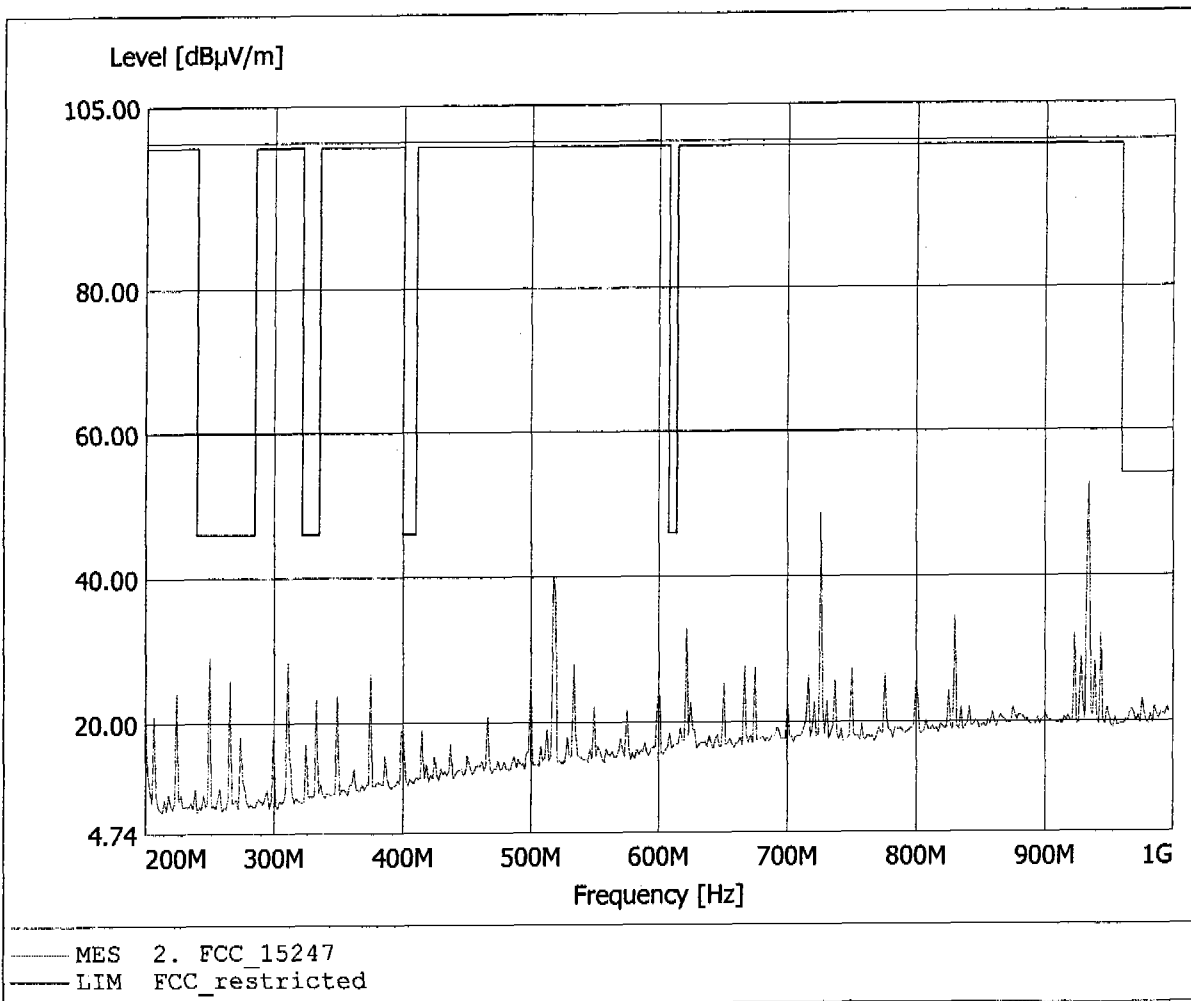


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 934.269MHz, Emax: 42.54dBµV/m, RBW: 100kHz

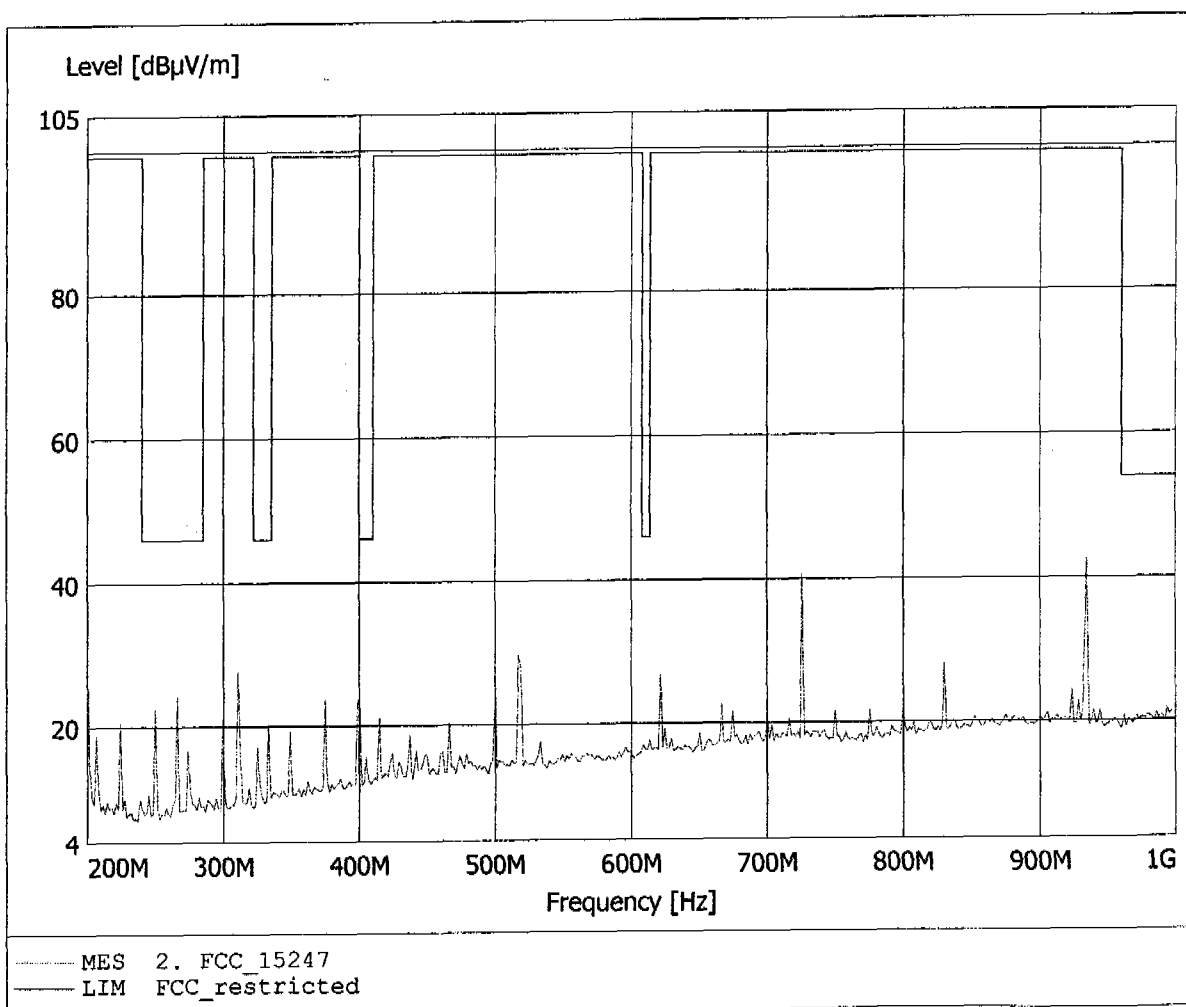


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.486GHz, Emax: 47.75dBuV/m, RBW: 1MHz

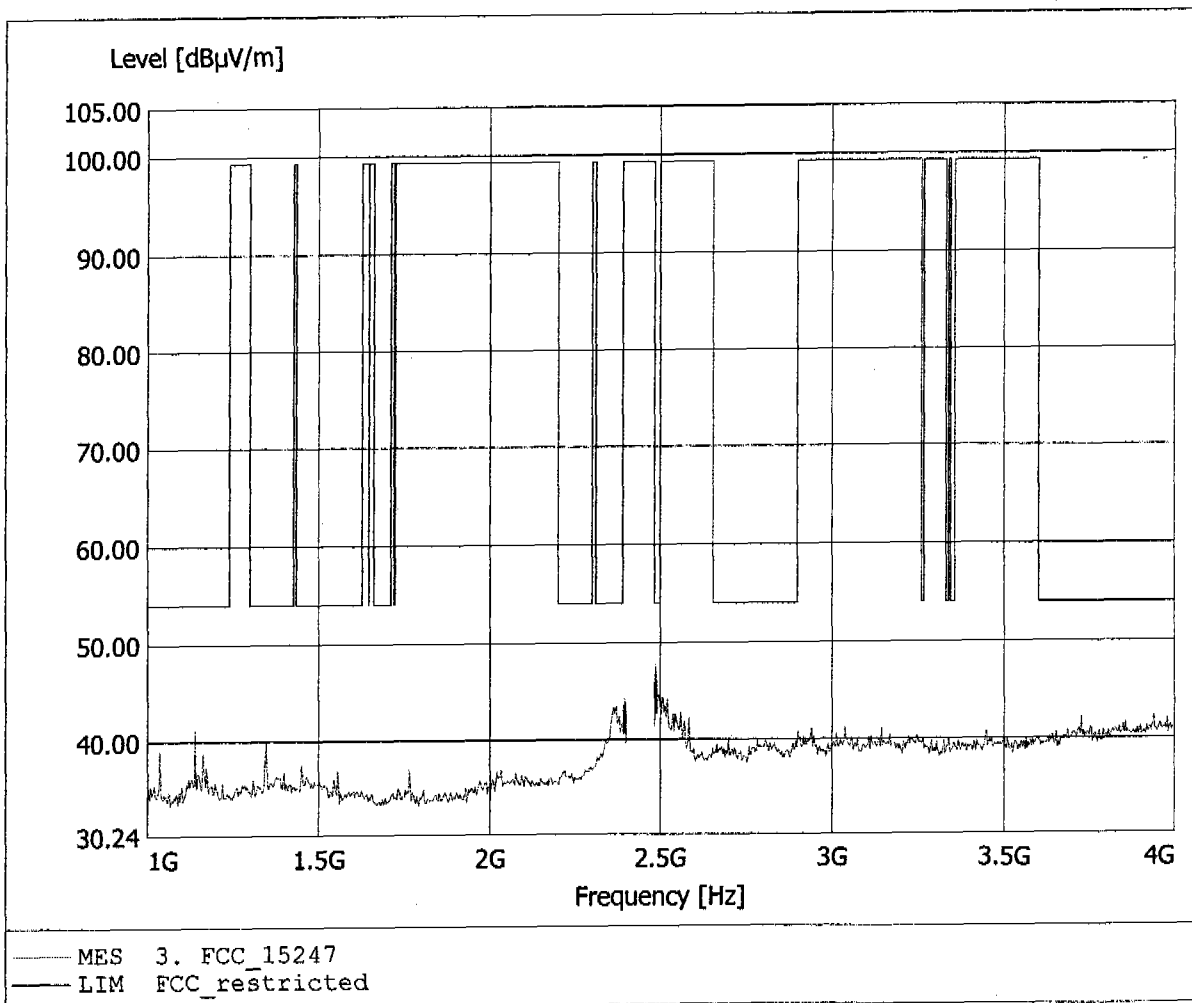


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.952GHz, Emax: 41.87dB μ V/m, RBW: 1MHz

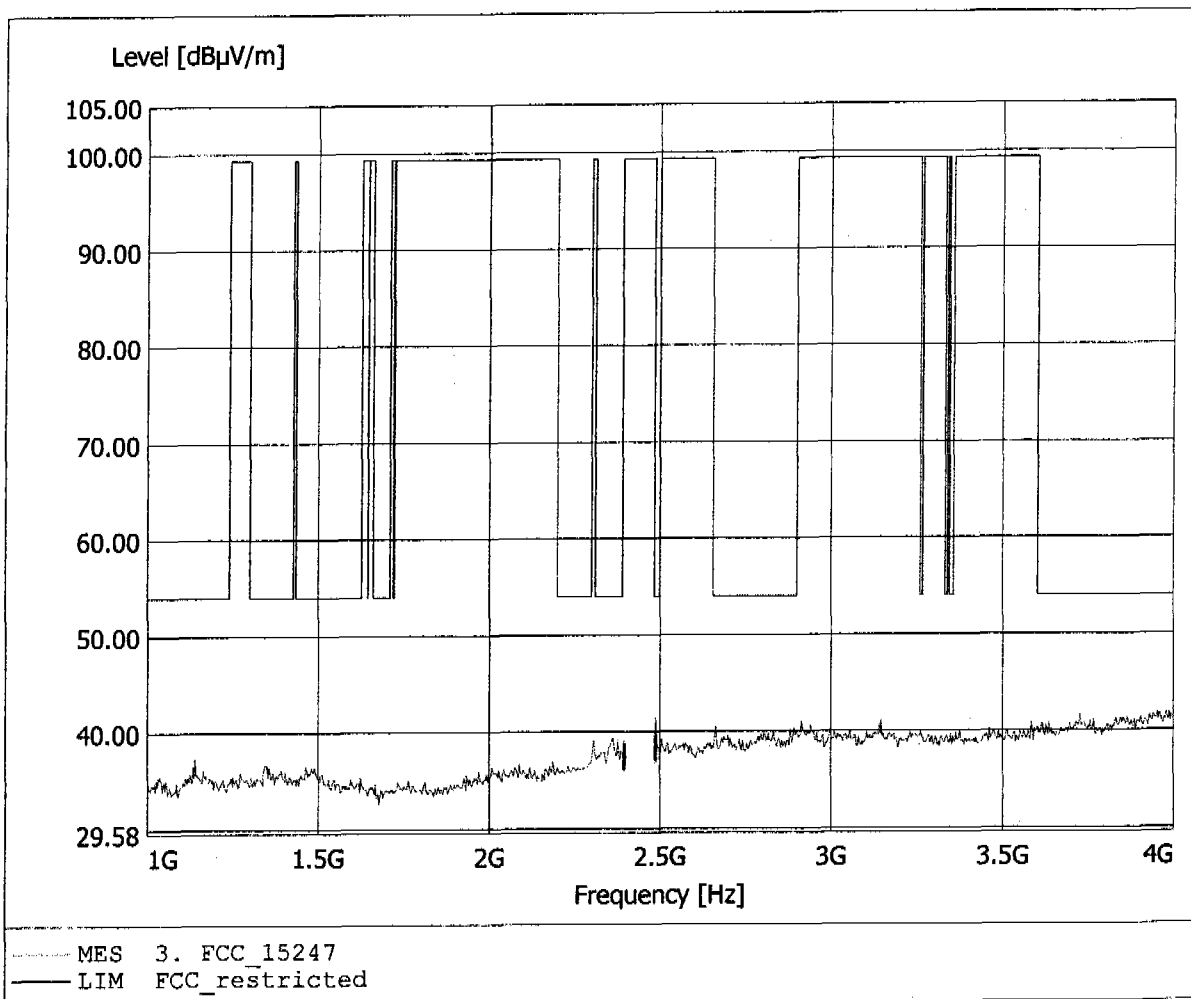


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 57.20dBuV/m, RBW: 1MHz

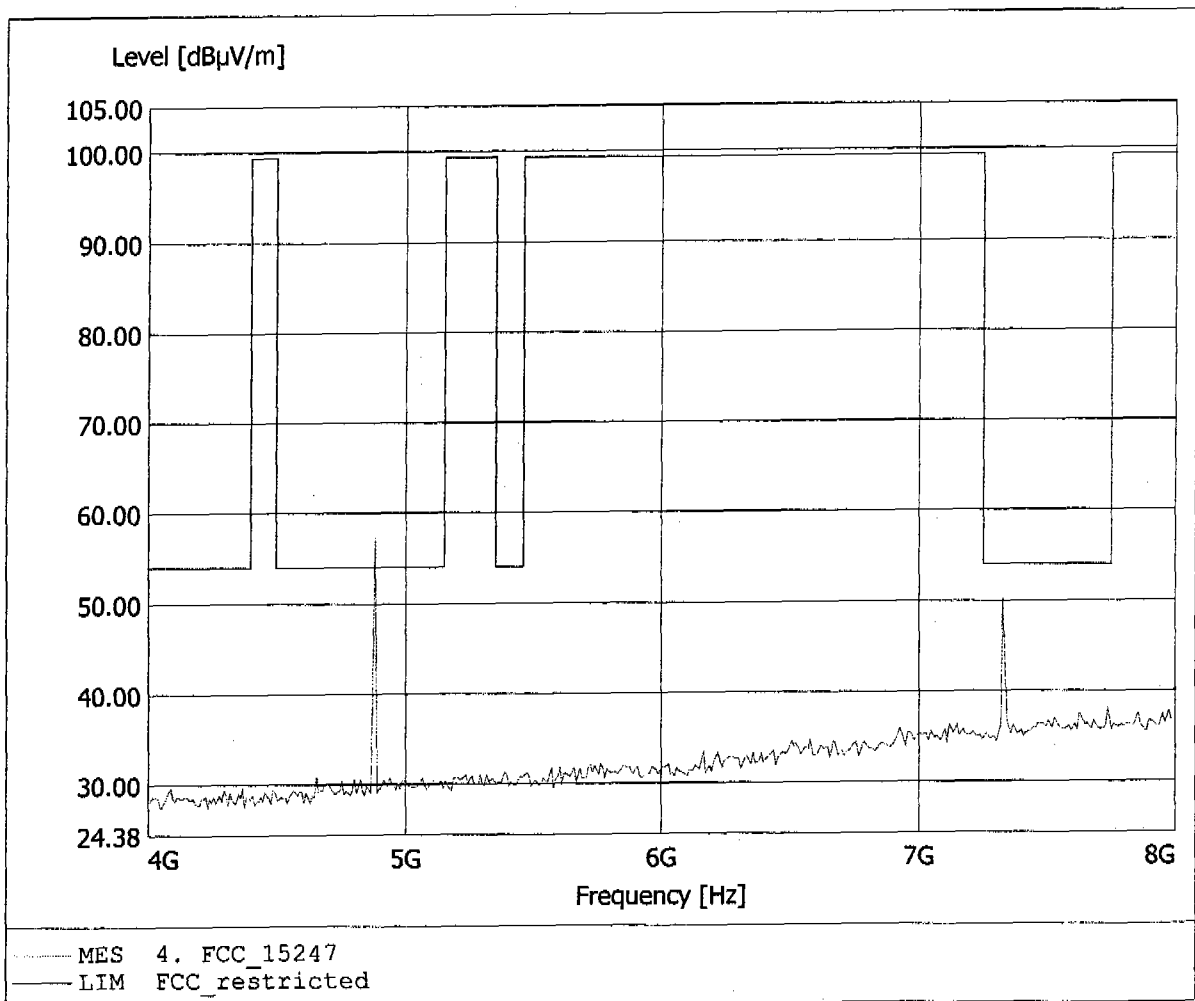


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 30.46dBµV/m, RBW: 1MHz

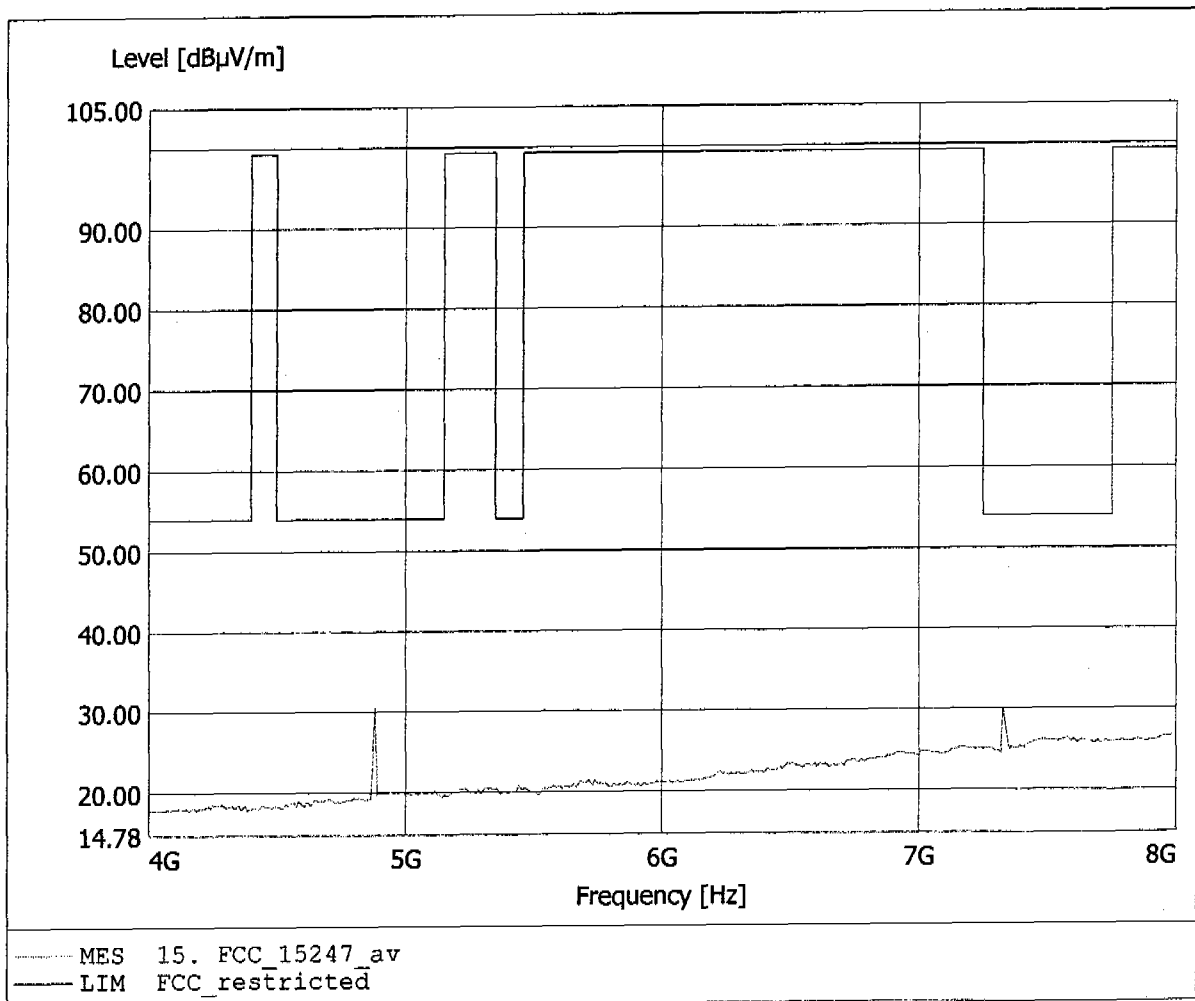


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 56.10dBµV/m, RBW: 1MHz

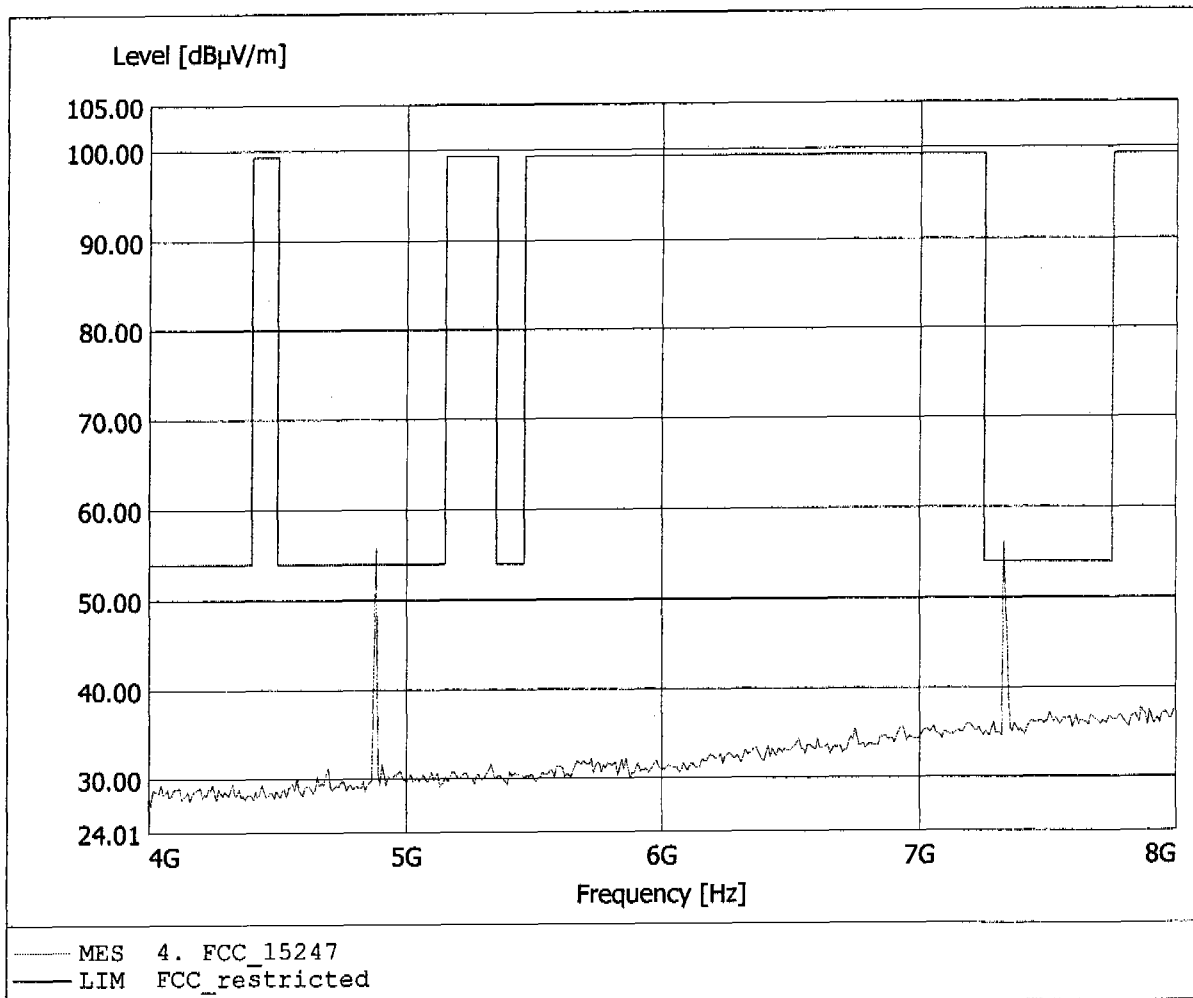


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 29.27dBµV/m, RBW: 1MHz

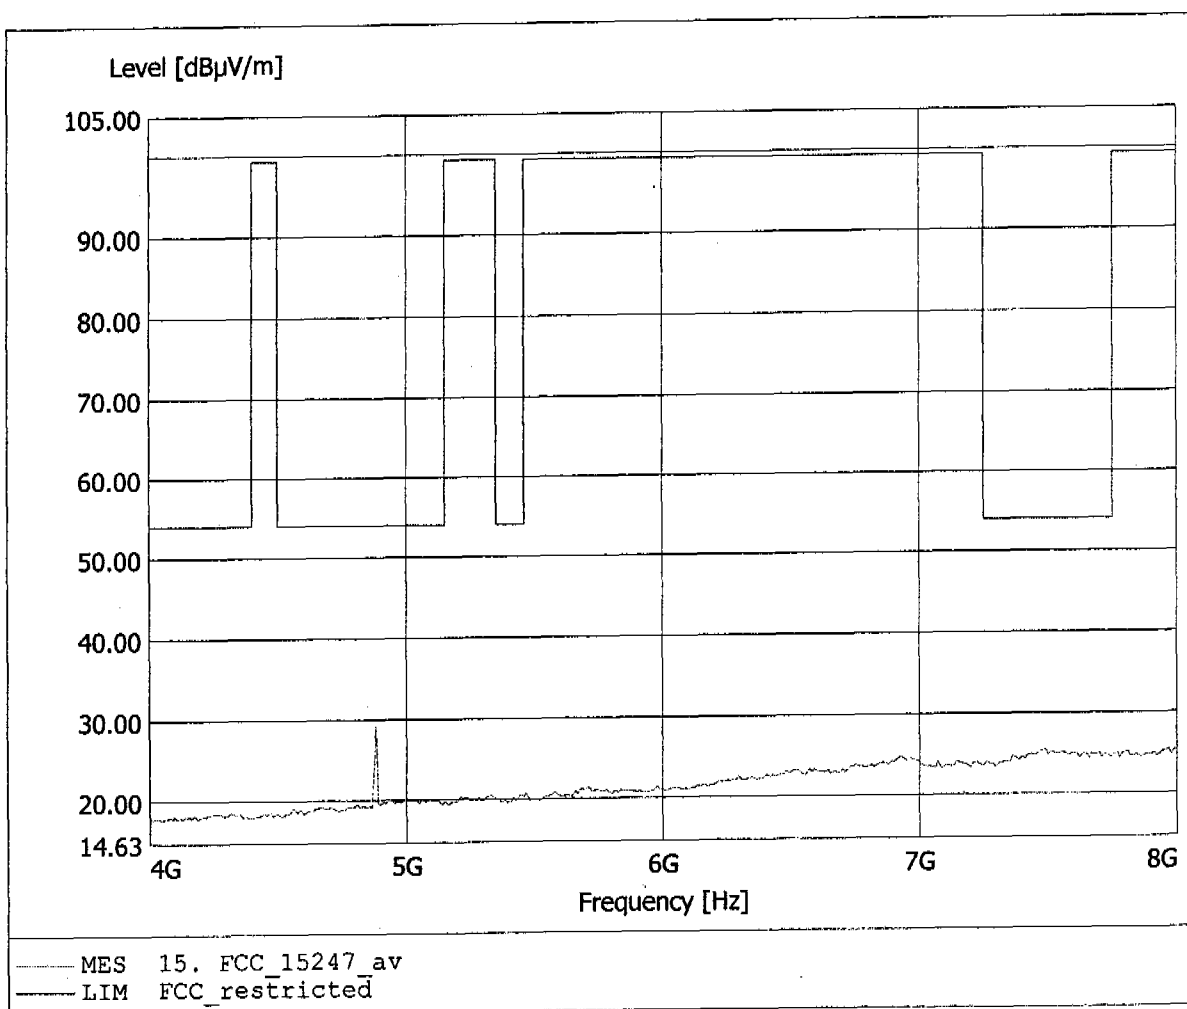


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 42.06dBµV/m, RBW: 1MHz

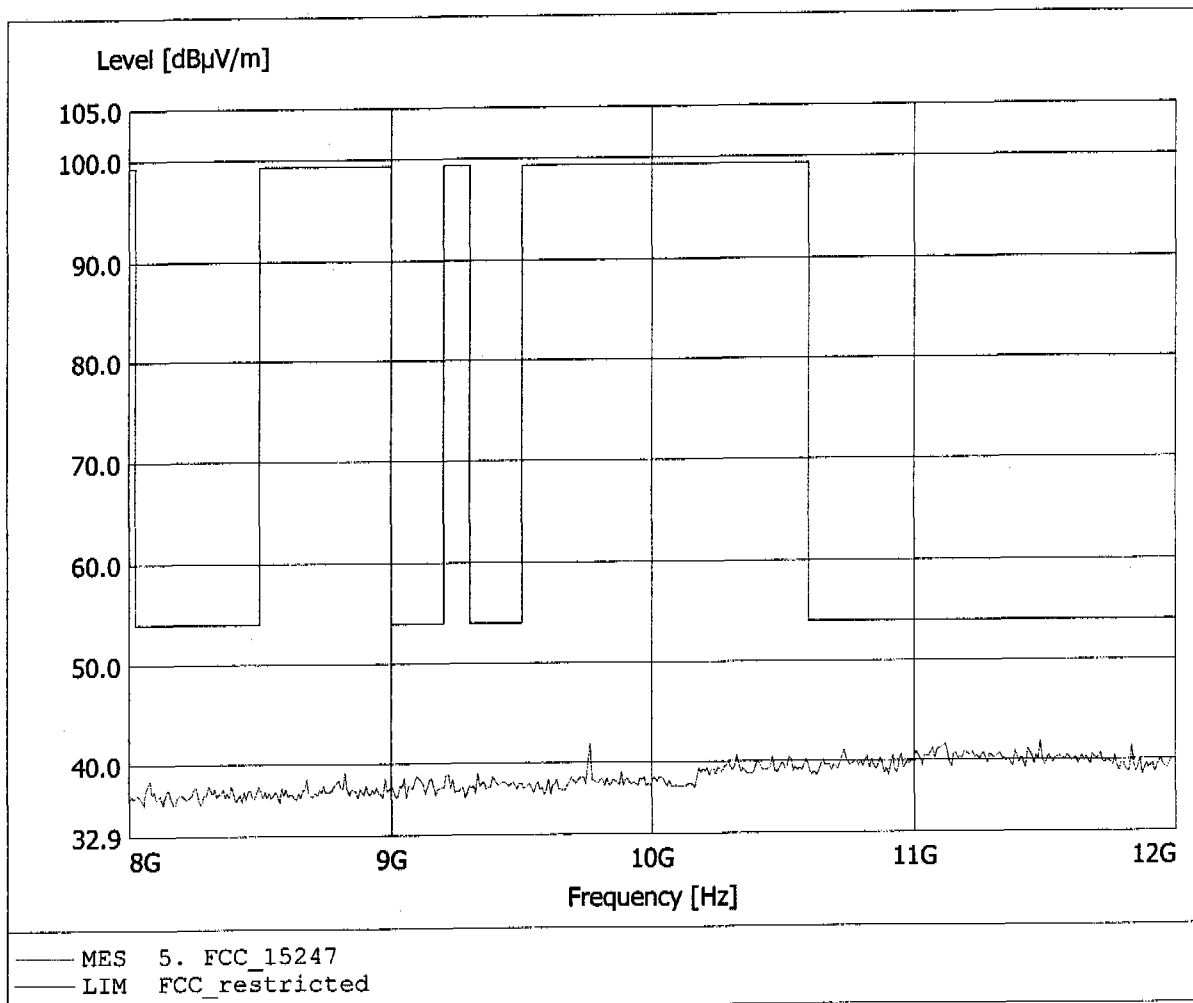


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
 Model: IP600-ISM / Ant.: 1 / Ch.: 39
 Approval Holder: KIRK telecom A/S
 Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
 Comment 2: Freq: 9.764GHz, Emax: 43.00dBµV/m, RBW: 1MHz

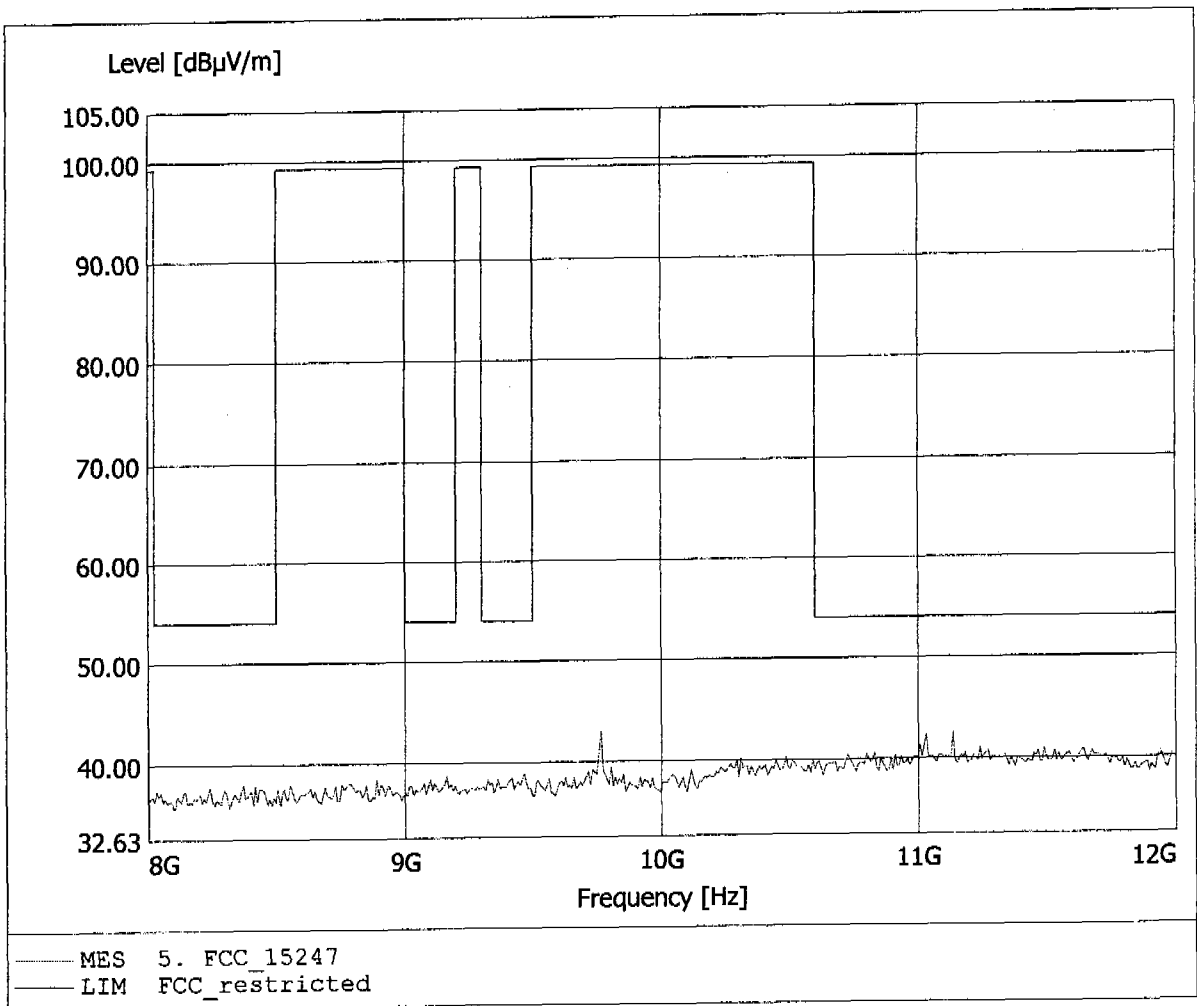


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.645GHz, Emax: 46.89dBµV/m, RBW: 1MHz

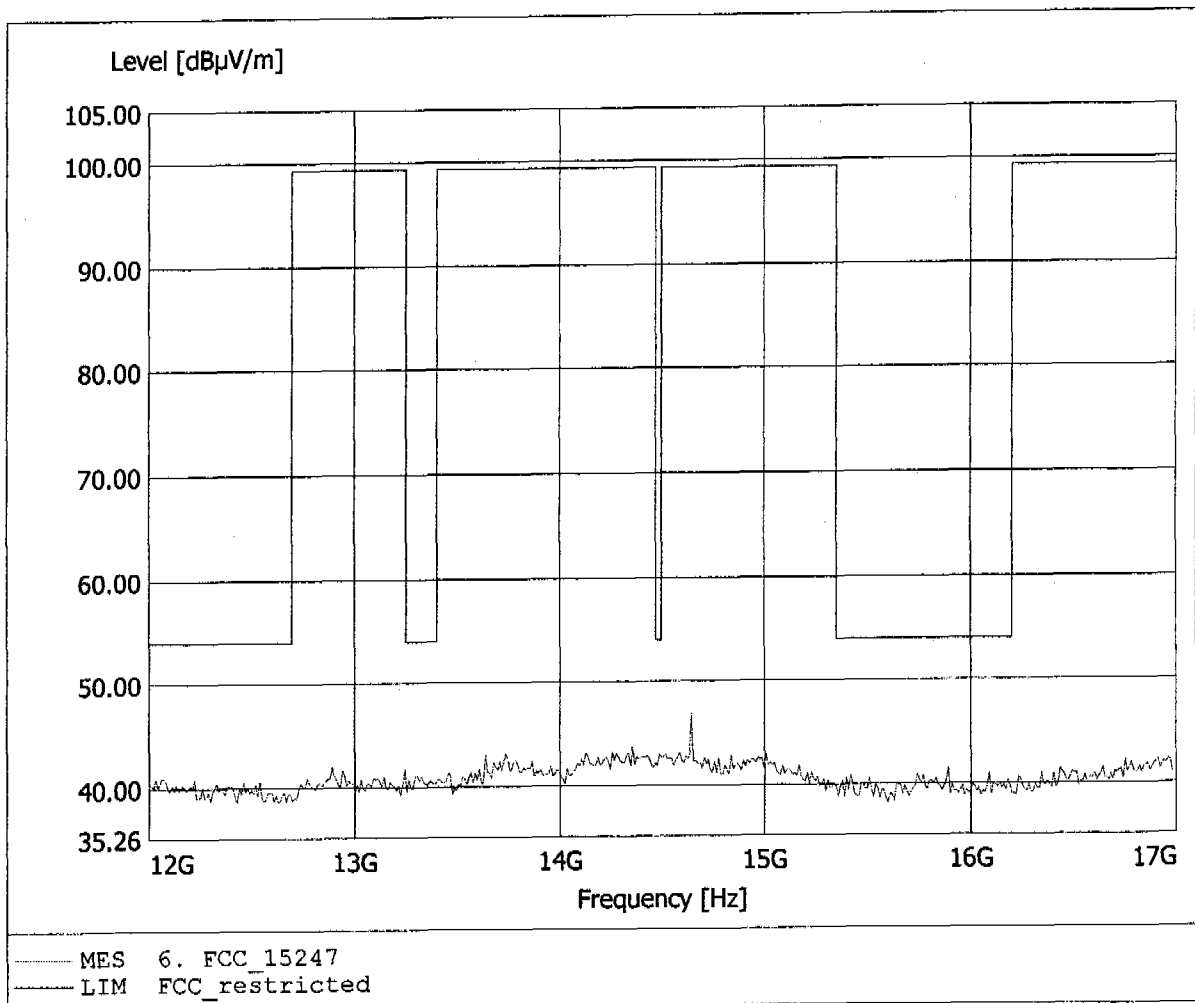


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.645GHz, Emax: 52.75dBµV/m, RBW: 1MHz

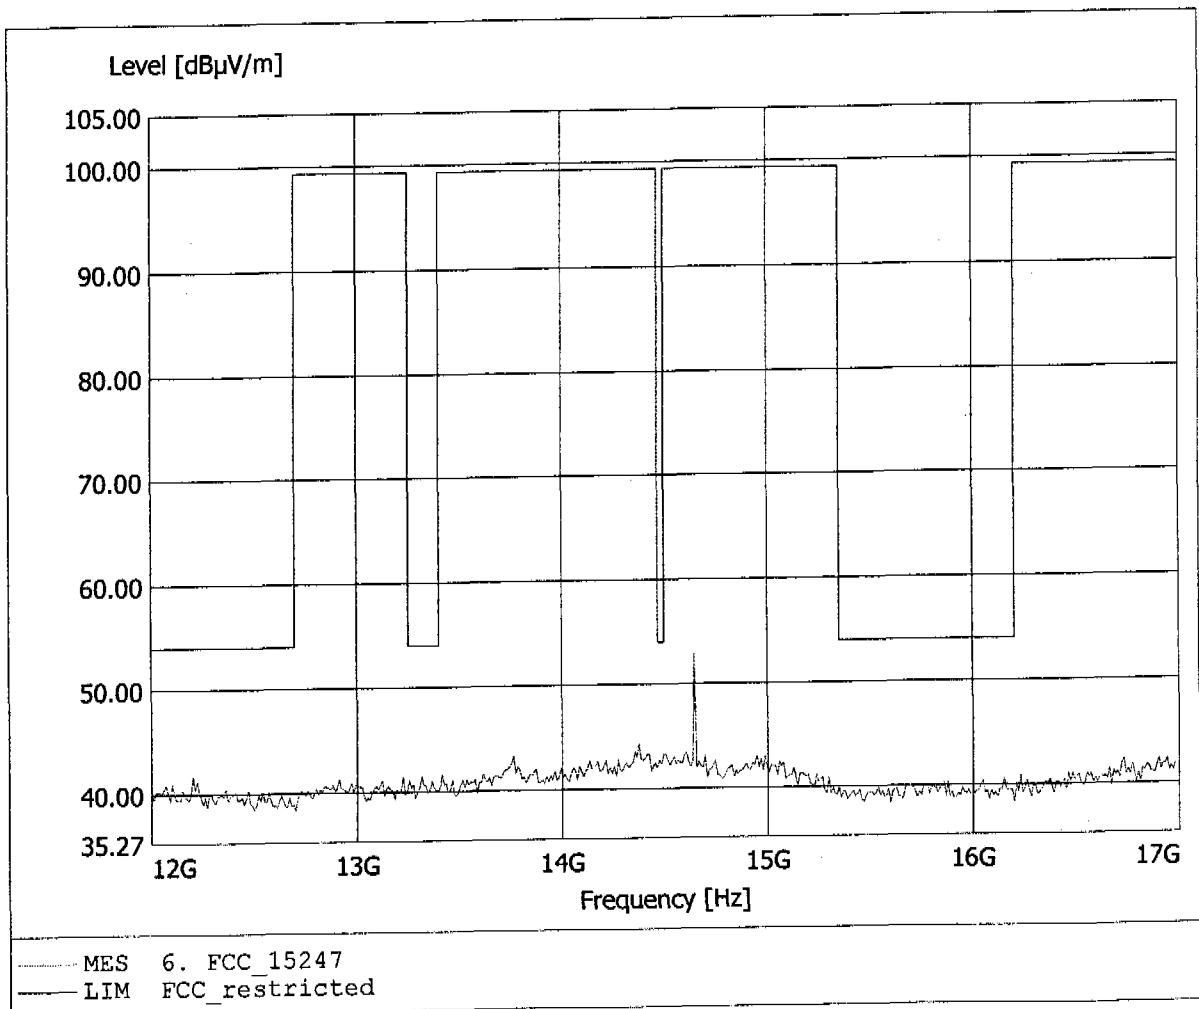


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 45.60dBpV/m, RBW: 1MHz

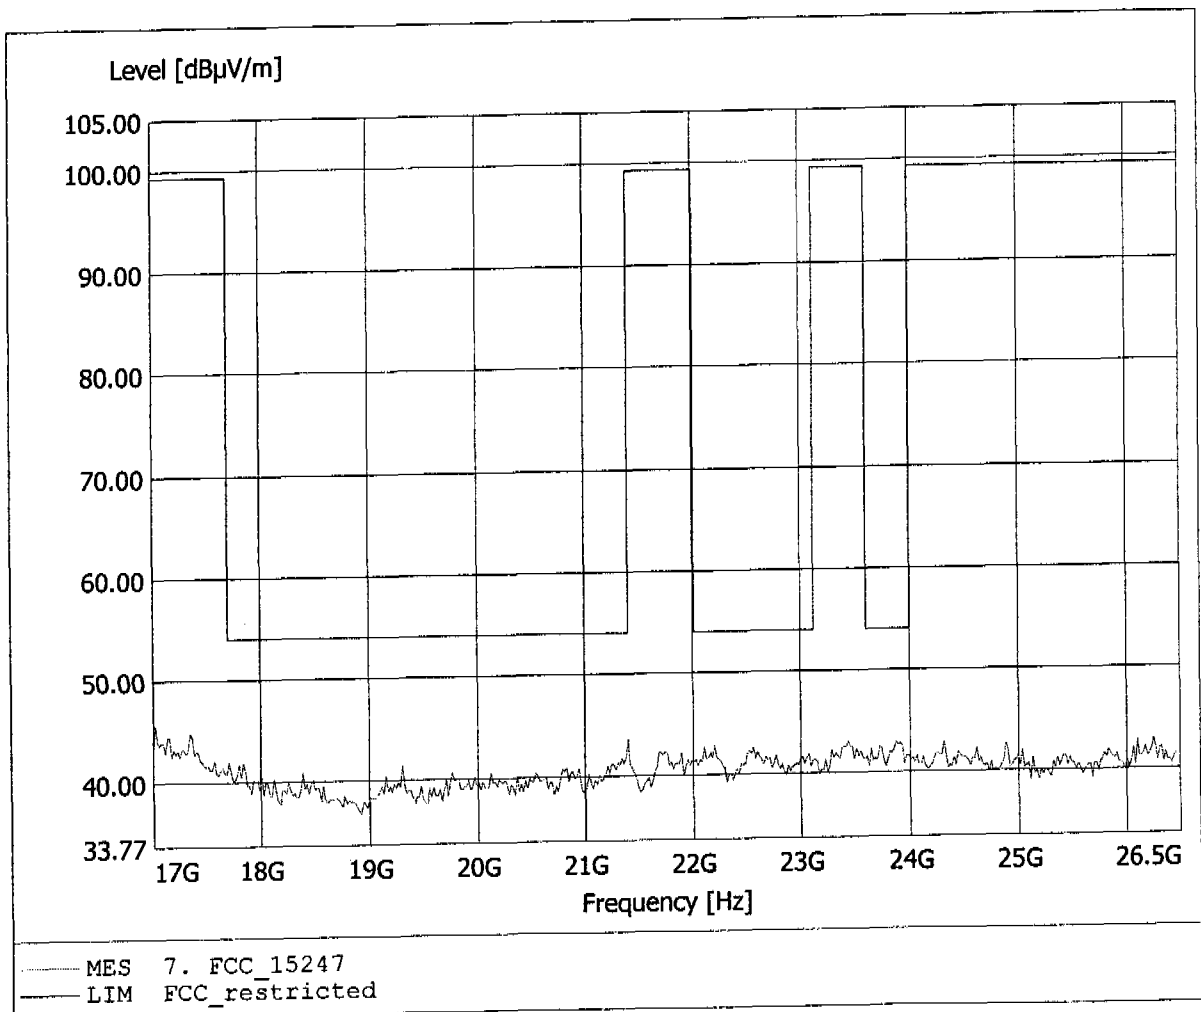


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 39
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 45.10dBµV/m, RBW: 1MHz

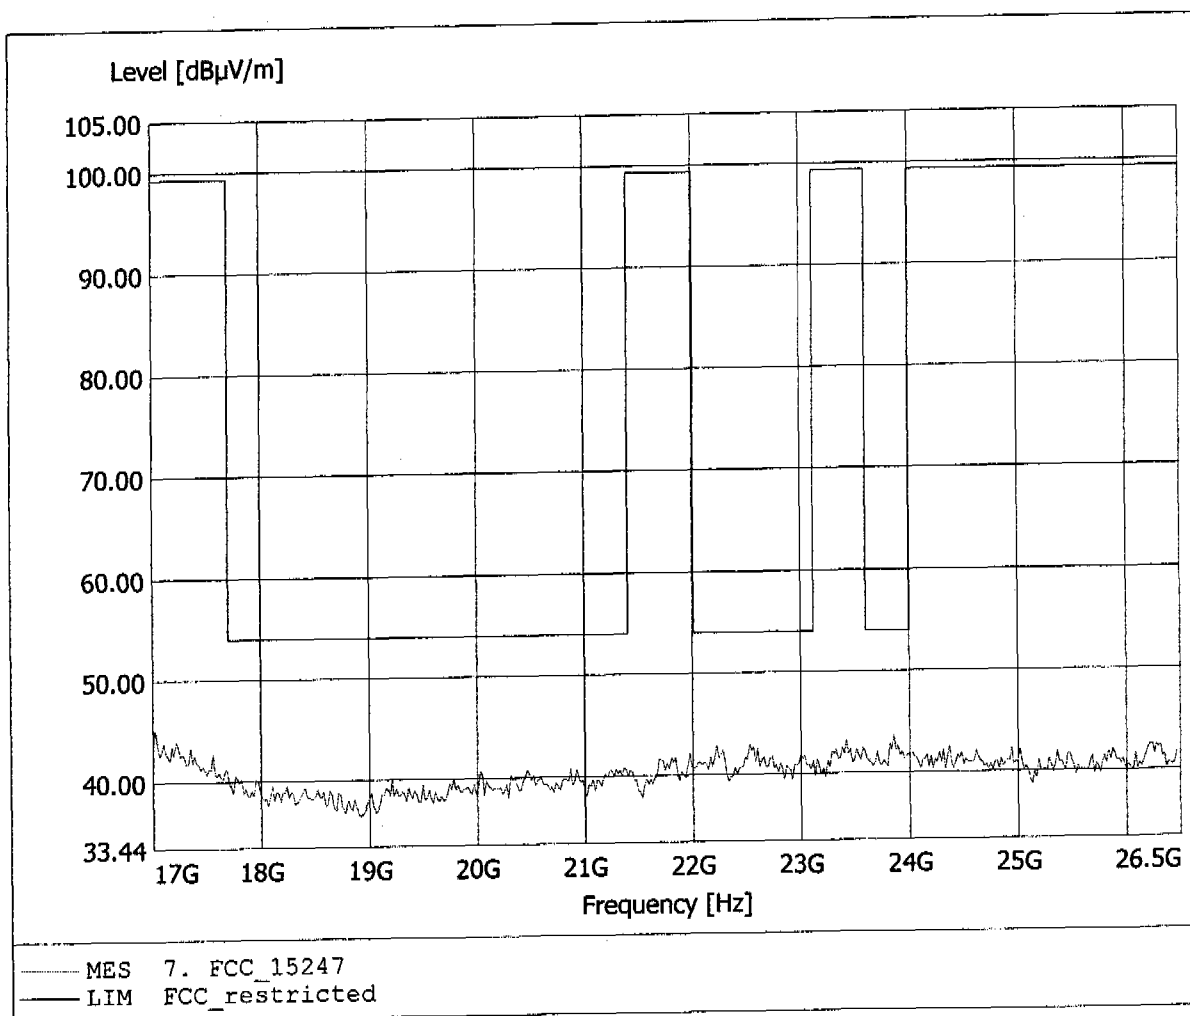


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 183.988MHz, Emax: 30.90dBµV/m, RBW: 100kHz

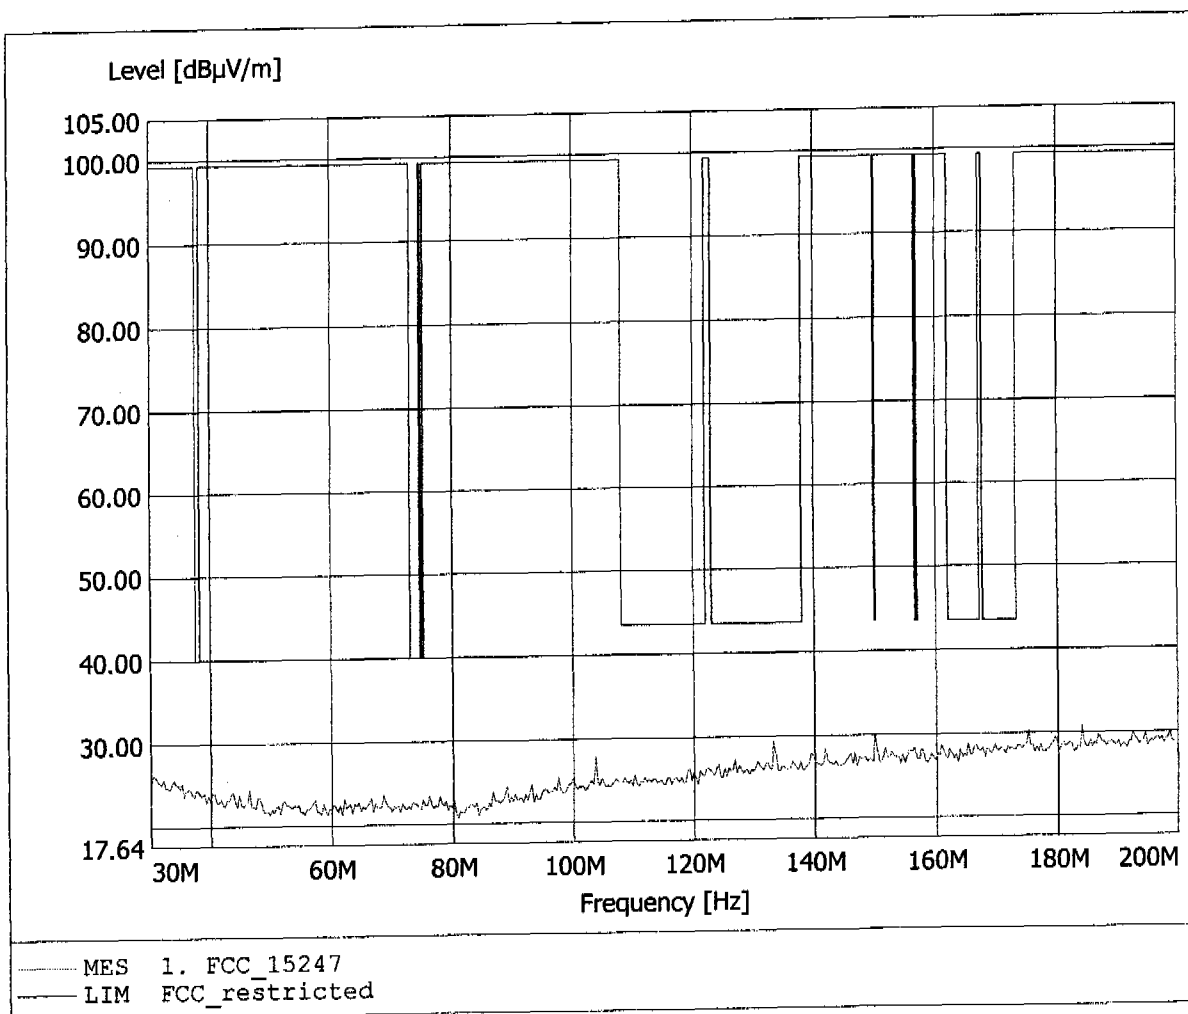


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 133.226MHz, Emax: 33.82dBµV/m, RBW: 100kHz

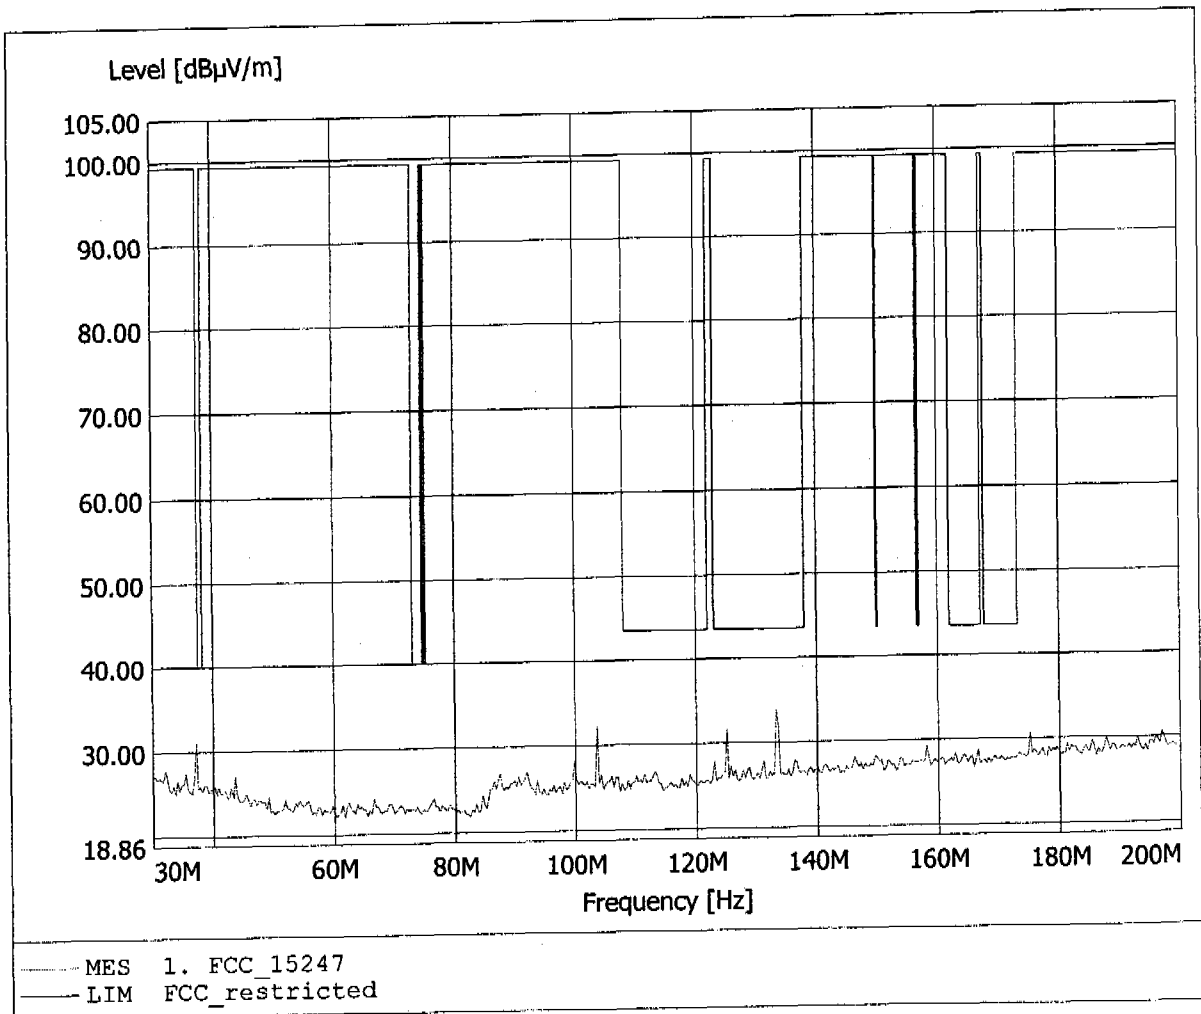


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 934.269MHz, Emax: 52.82dBµV/m, RBW: 100kHz

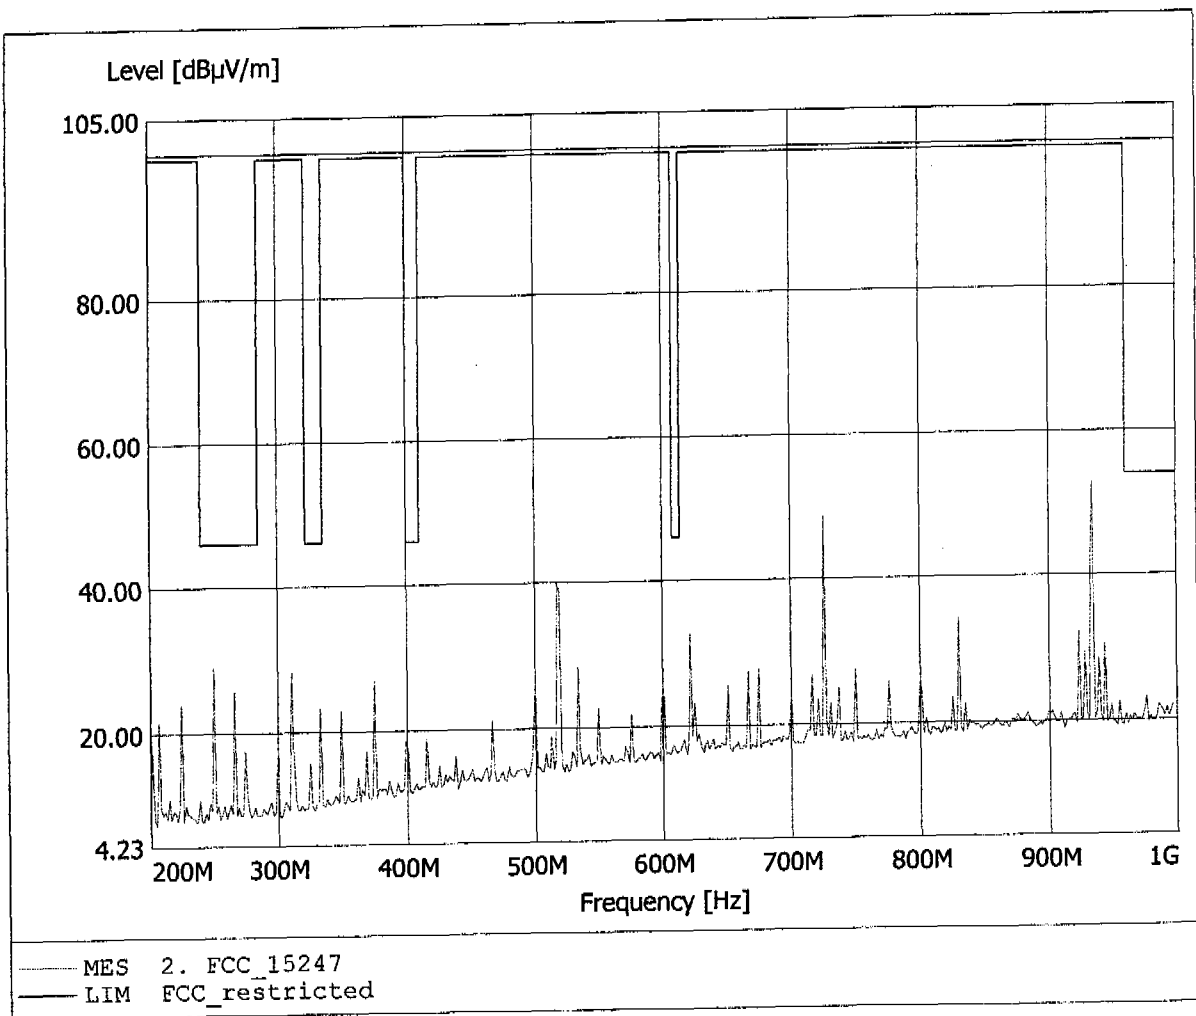


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 934.269MHz, Emax: 42.56dBuV/m, RBW: 100kHz

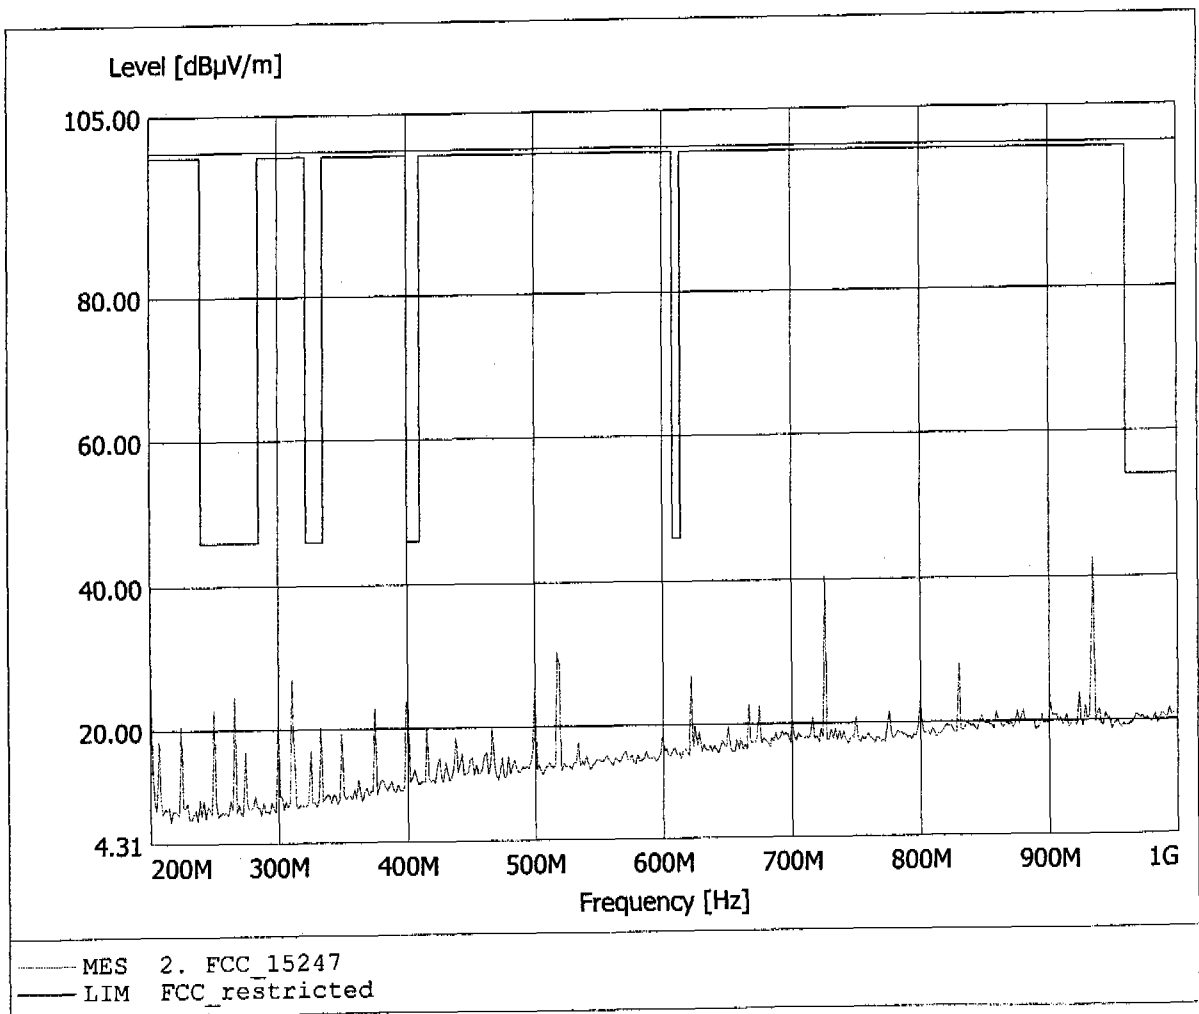


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 83.33dBµV/m, RBW: 1MHz

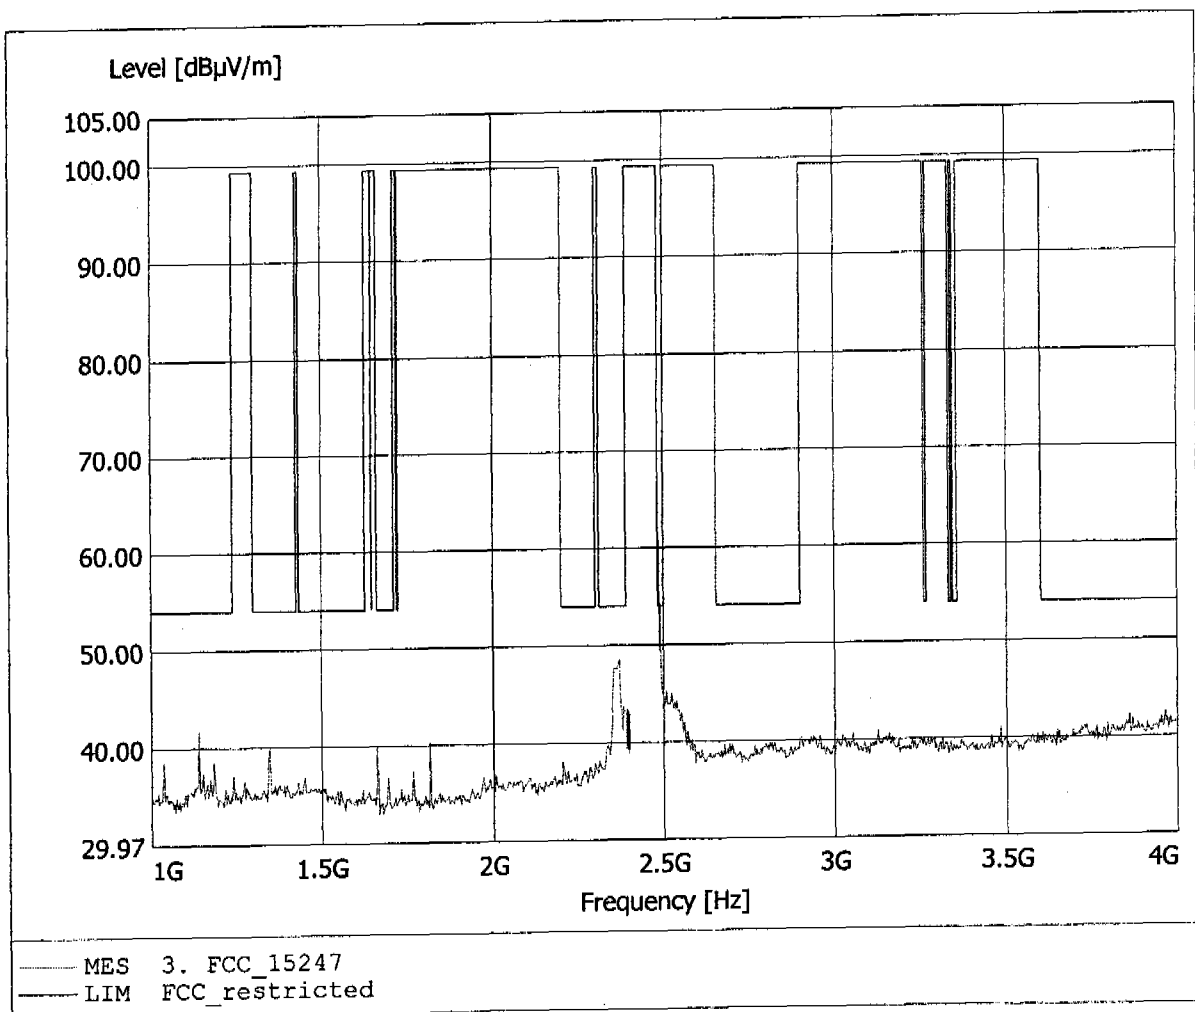

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 83.33dBuV/m, RBW: 1MHz

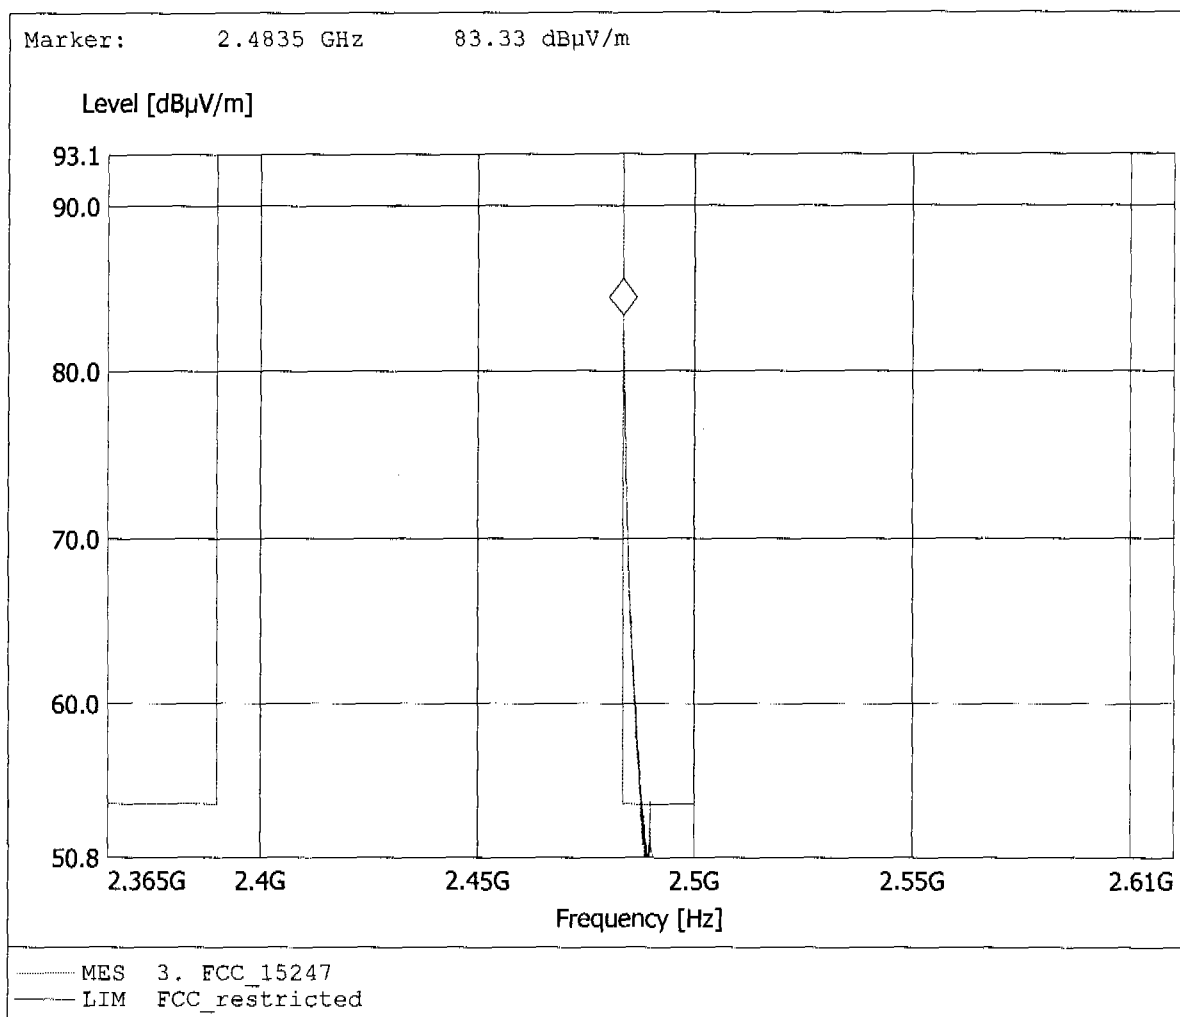


DA 00-705 Marker-Delta Method:

The value measured with average detector may be reduced by the "delta" value according to Marker-delta Method.

Please see next page for Marker-Delta plot.




Delta 1 [T1] RBW 30 kHz RF Att 50 dB
Ref Lvl 68.27 dB VBW 30 kHz
30 dBm -2.40531062 MHz SWT 14 ms Unit dBm

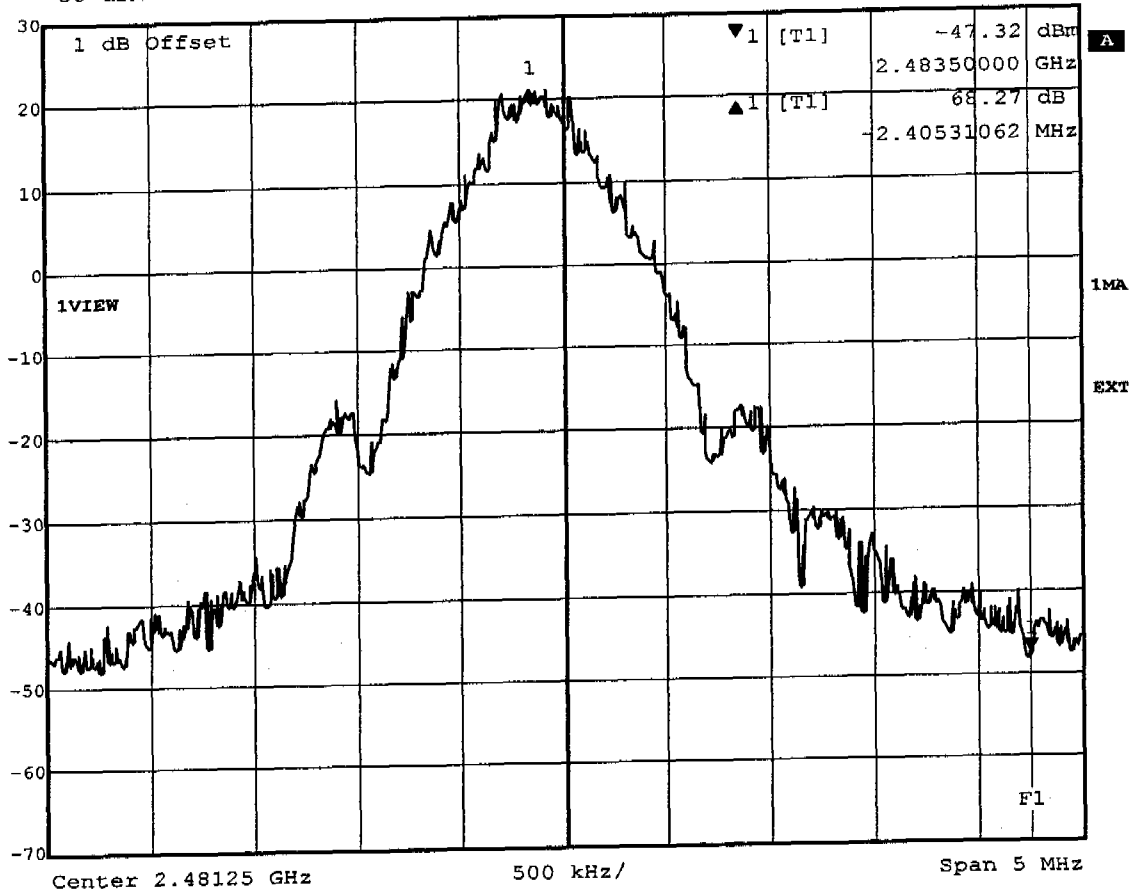

Title: Marker-Delta Method
Comment A: IP600-ISM
Date: 16.OCT.2003 12:30:08


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 51.51dBµV/m, RBW: 1MHz

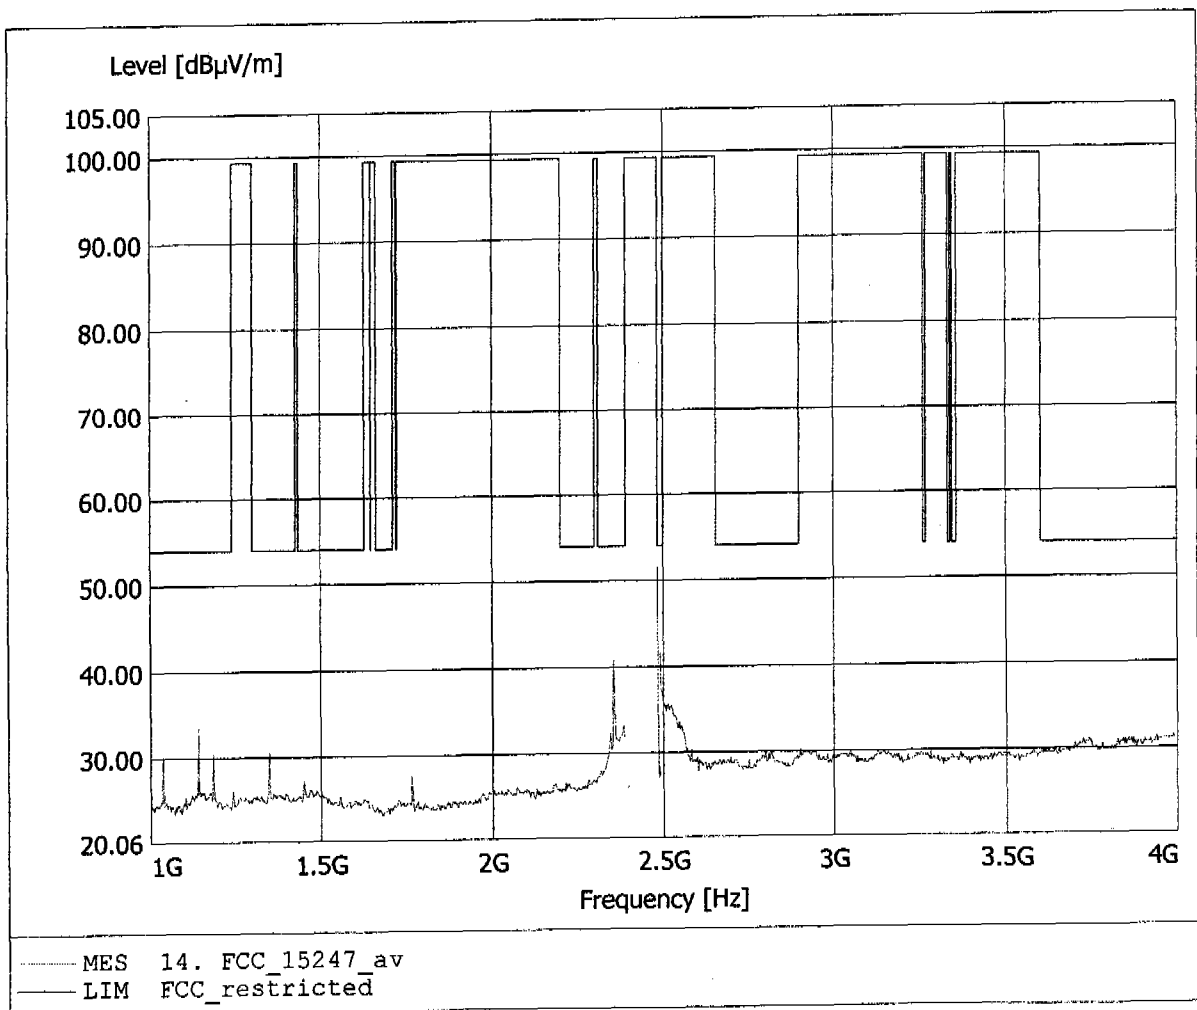


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 73.06dBµV/m, RBW: 1MHz

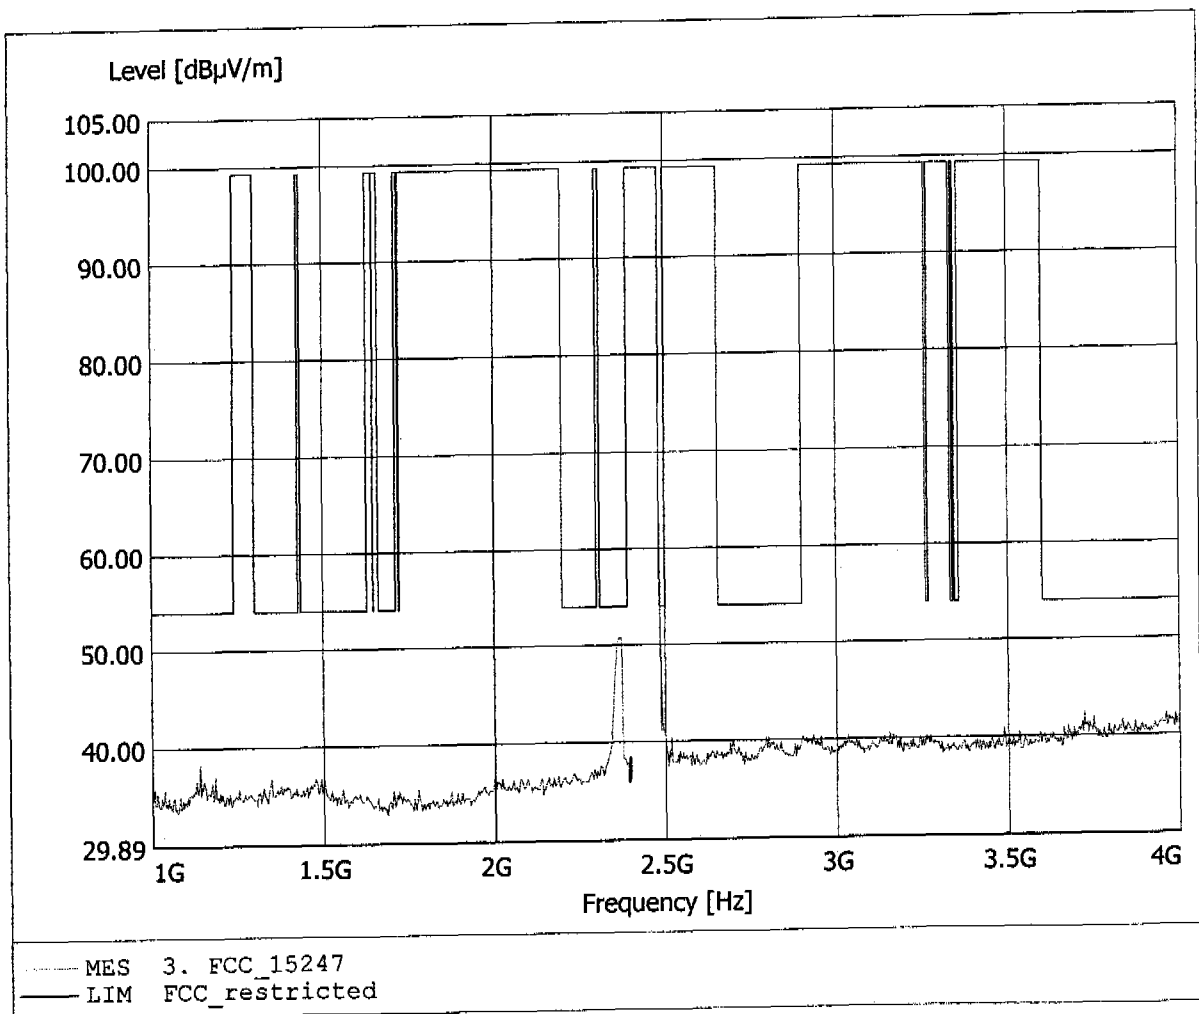


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
 Model: IP600-ISM / Ant.: 1 / Ch.: 78
 Approval Holder: KIRK telecom A/S
 Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
 Comment 2: Freq: 2.484GHz, Emax: 73.06dBµV/m, RBW: 1MHz

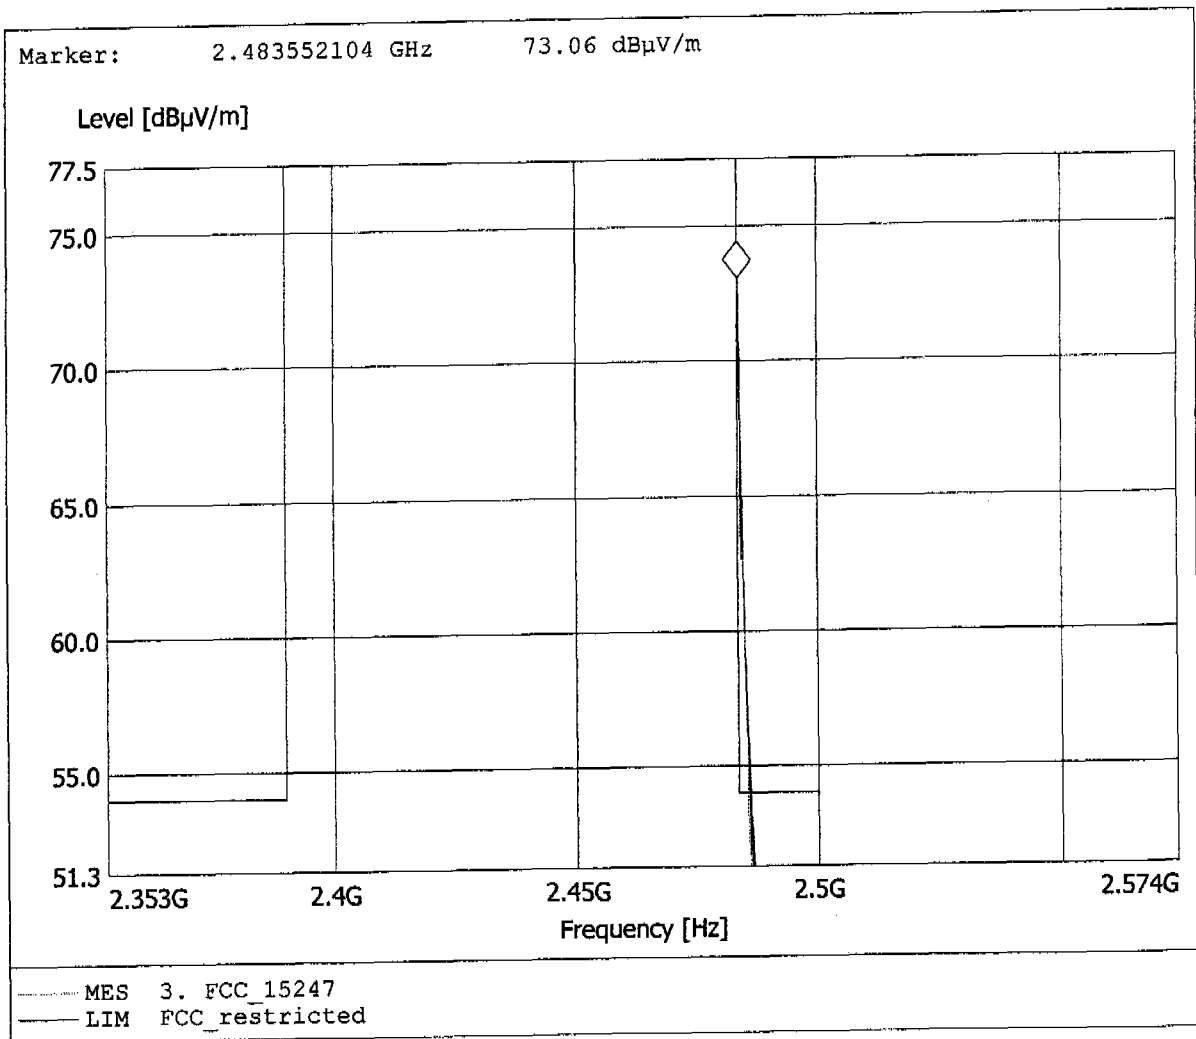


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 44.53dBµV/m, RBW: 1MHz

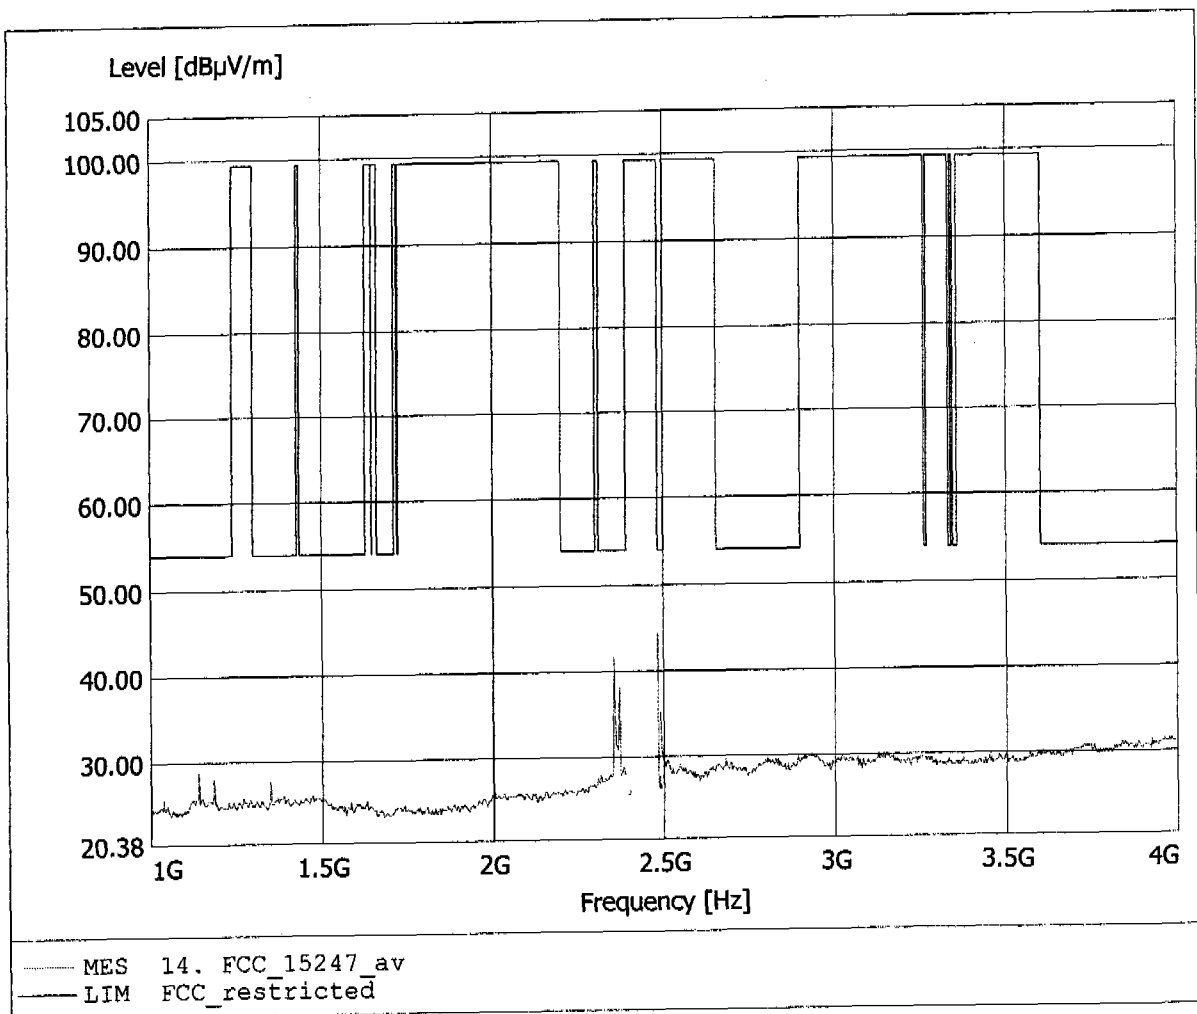


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
 Model: IP600-ISM / Ant.: 1 / Ch.: 78
 Approval Holder: KIRK telecom A/S
 Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
 Comment 2: Freq: 4.962GHz, Emax: 60.28dBµV/m, RBW: 1MHz

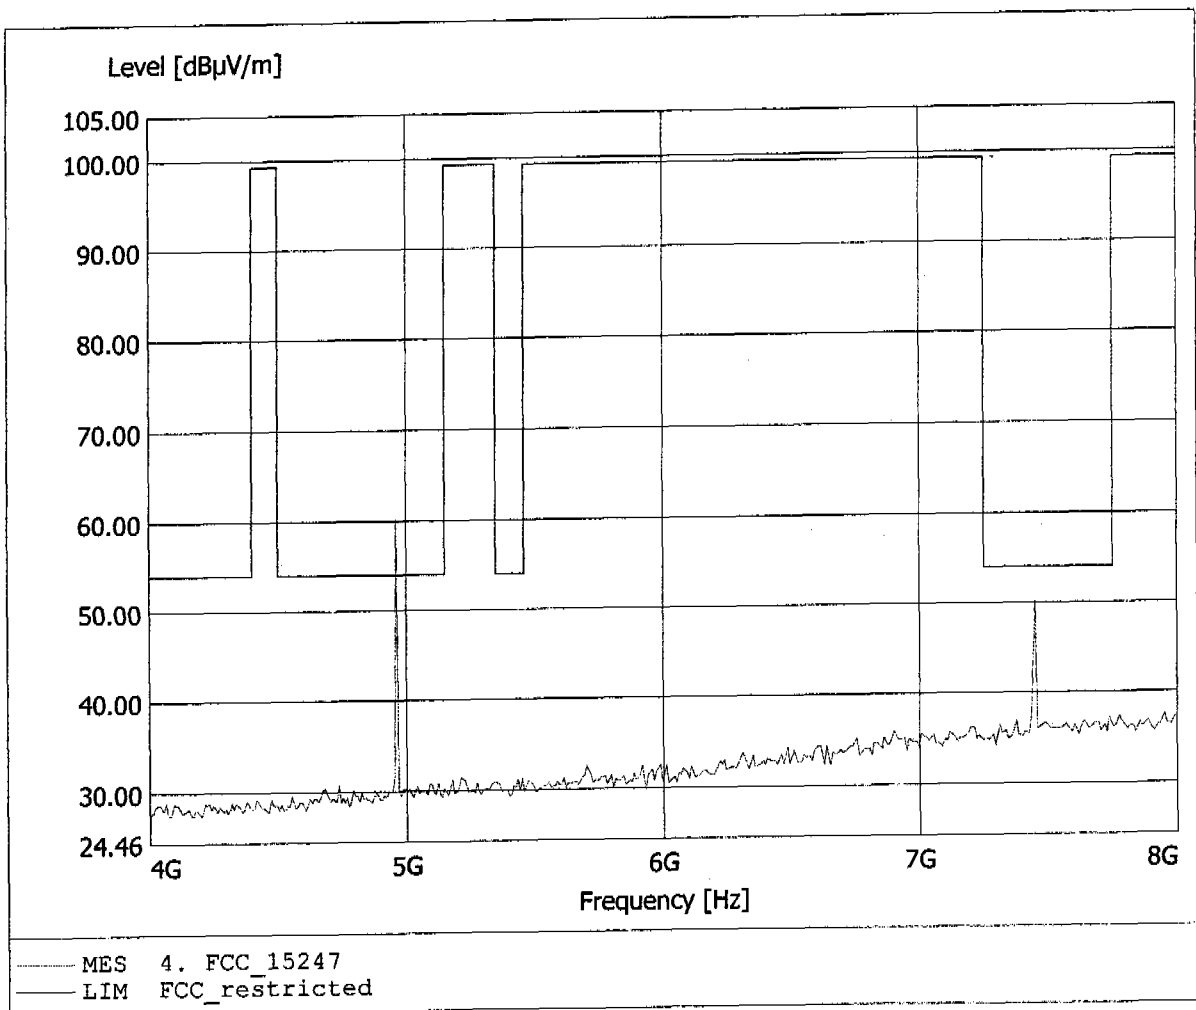


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 32.20dBµV/m, RBW: 1MHz

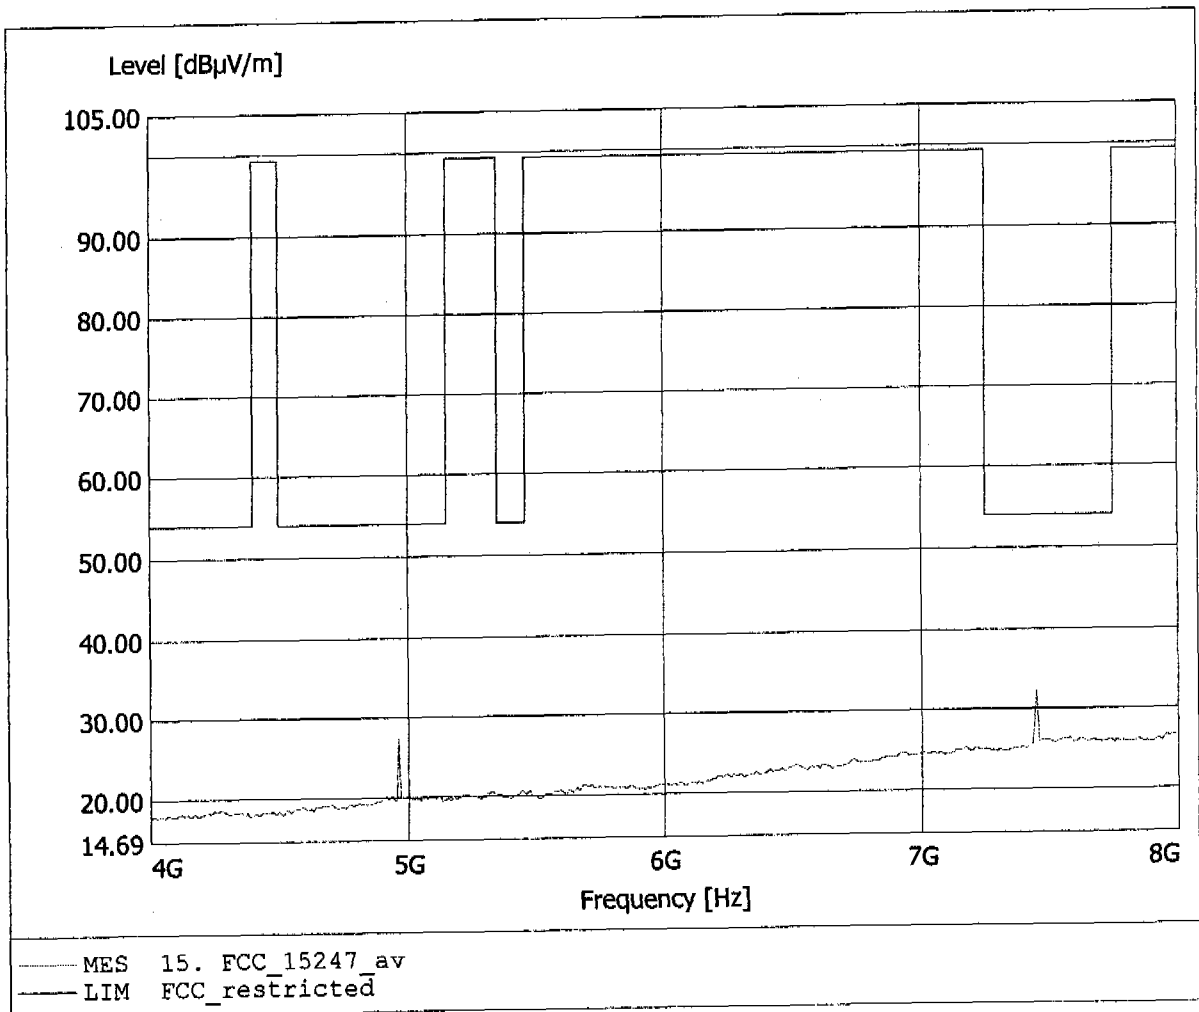


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 58.46dBµV/m, RBW: 1MHz

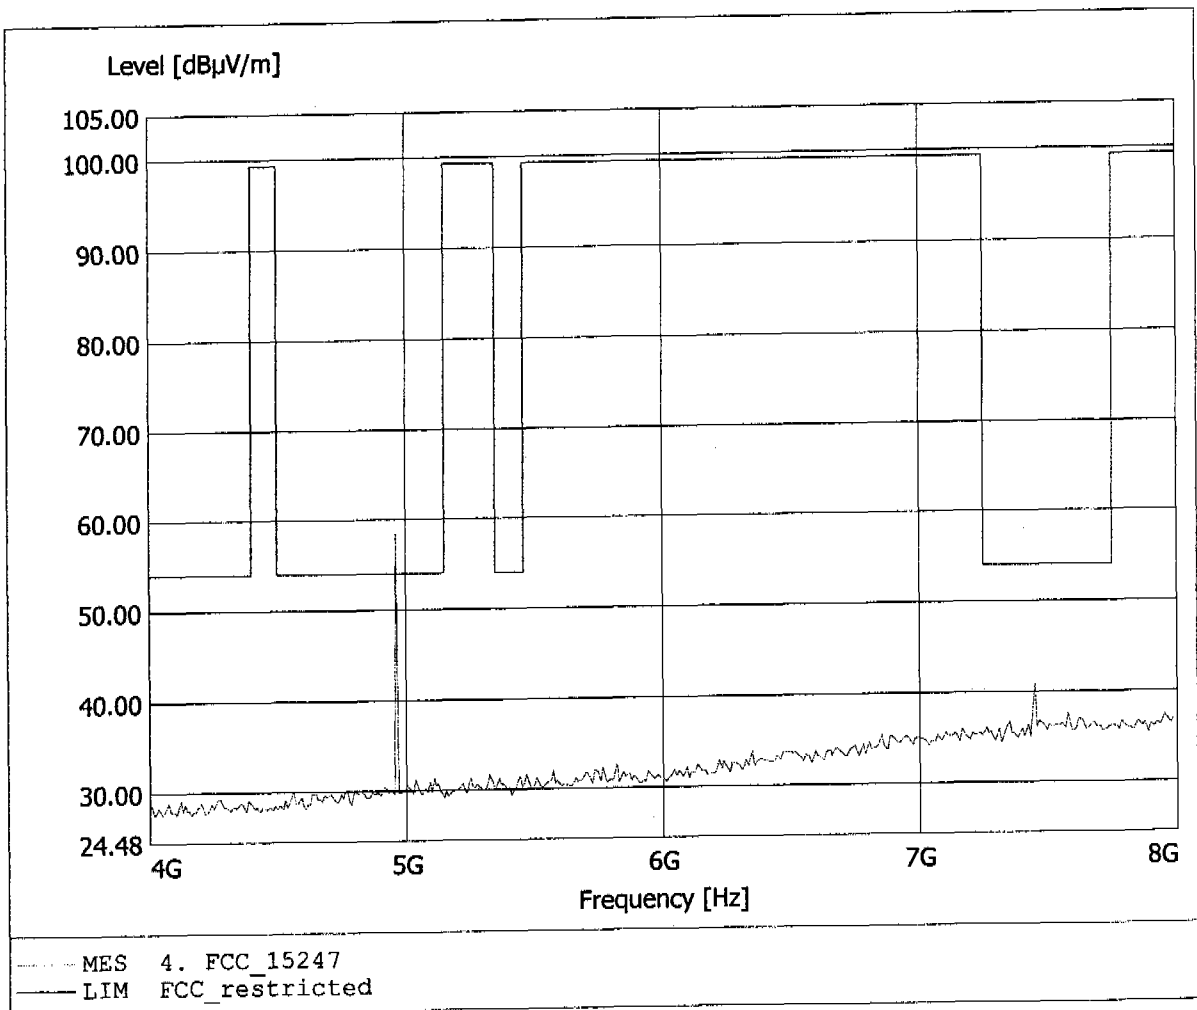


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 28.83dBµV/m, RBW: 1MHz

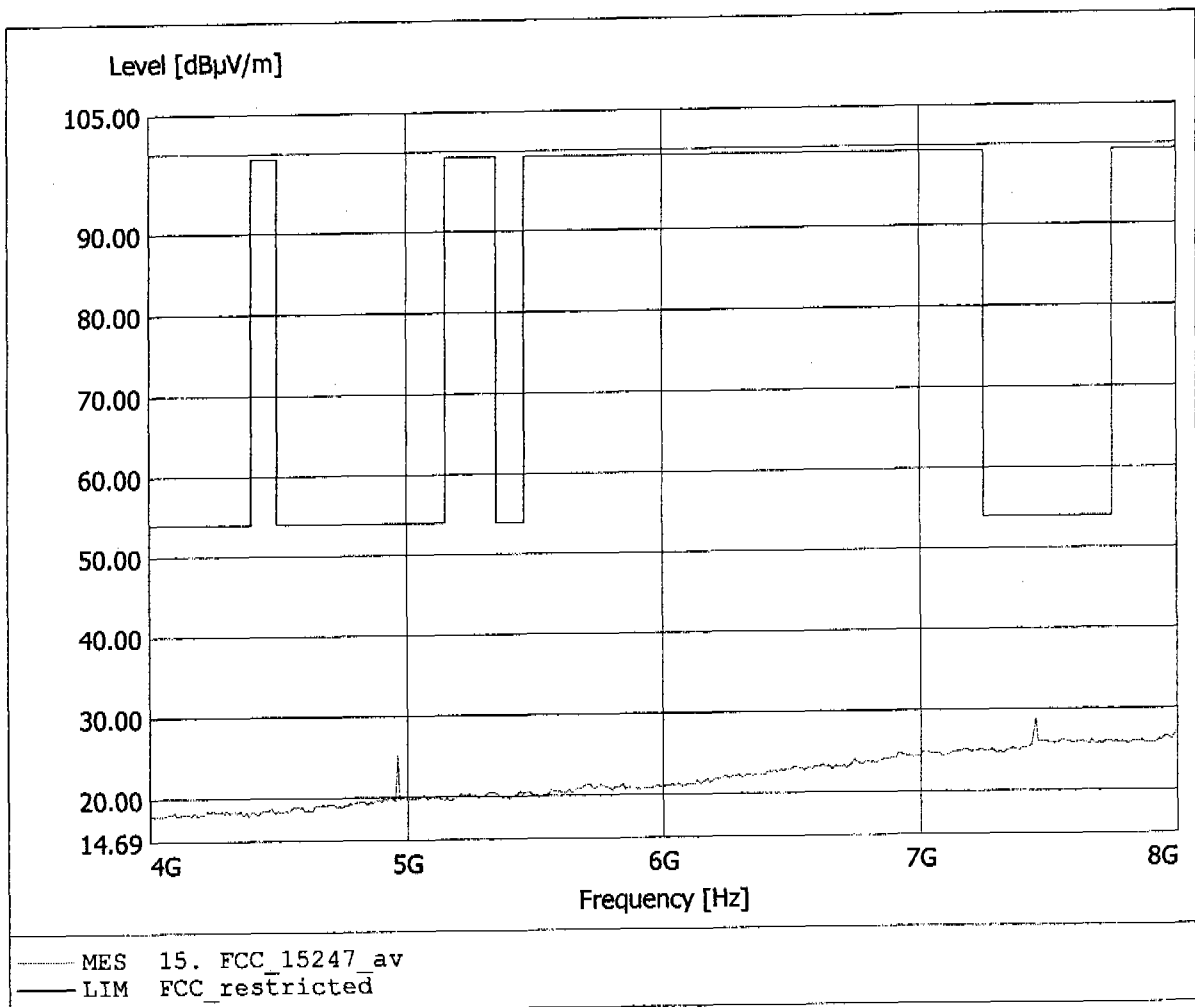


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
 Model: IP600-ISM / Ant.: 1 / Ch.: 78
 Approval Holder: KIRK telecom A/S
 Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
 Comment 2: Freq: 9.924GHz, Emax: 43.40dBµV/m, RBW: 1MHz

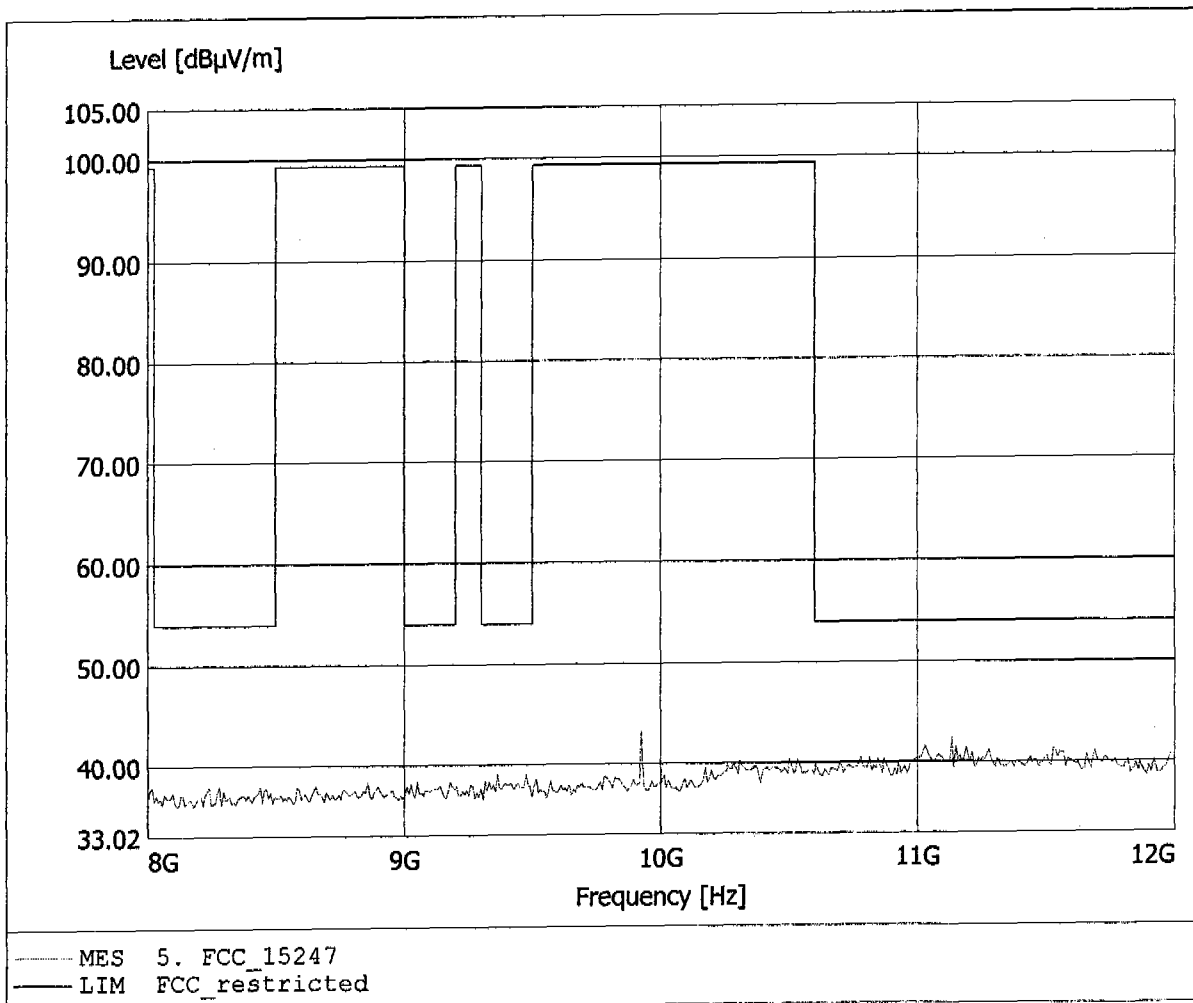


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.711GHz, Emax: 41.88dBµV/m, RBW: 1MHz

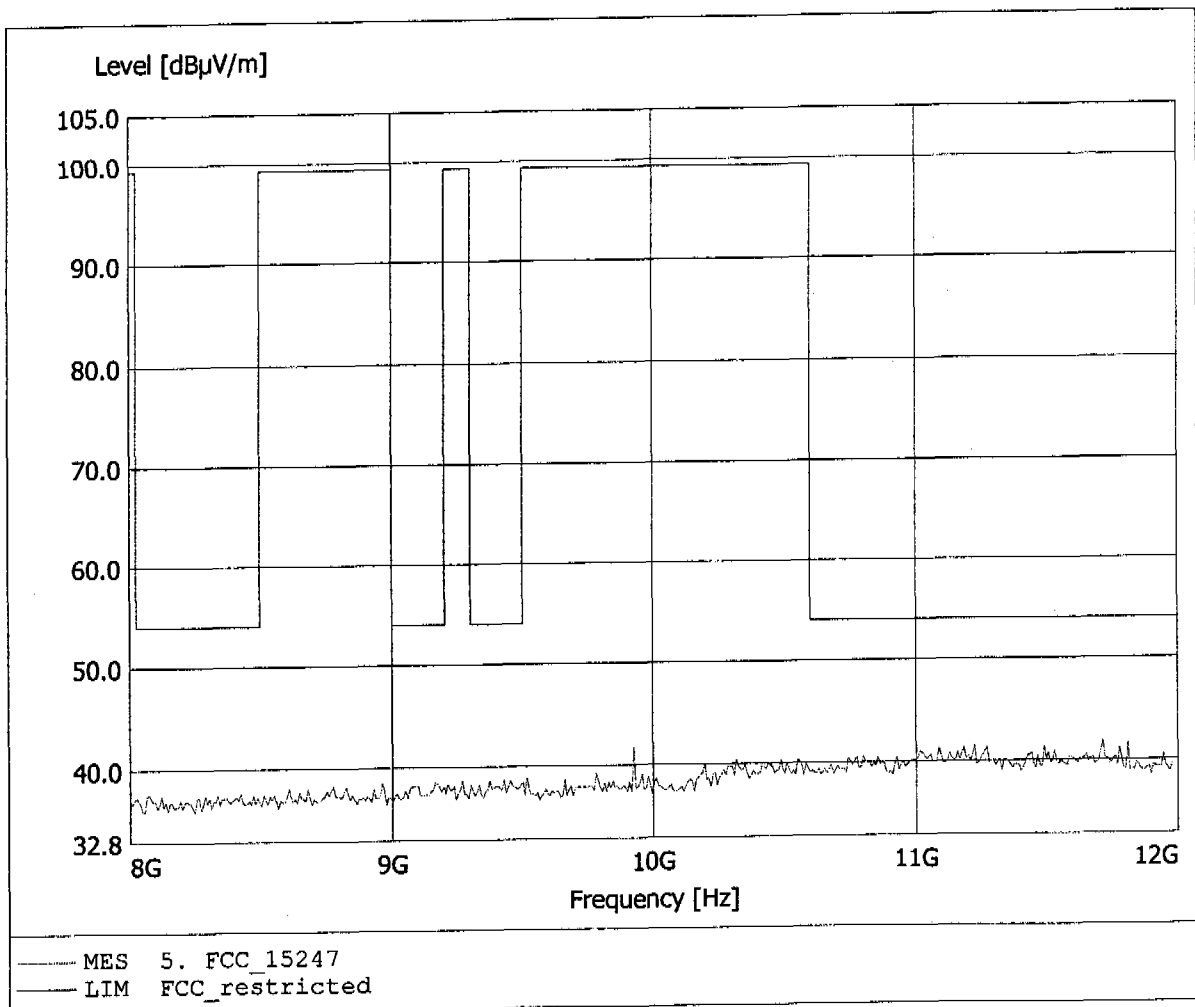


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.595GHz, Emax: 44.09dBµV/m, RBW: 1MHz

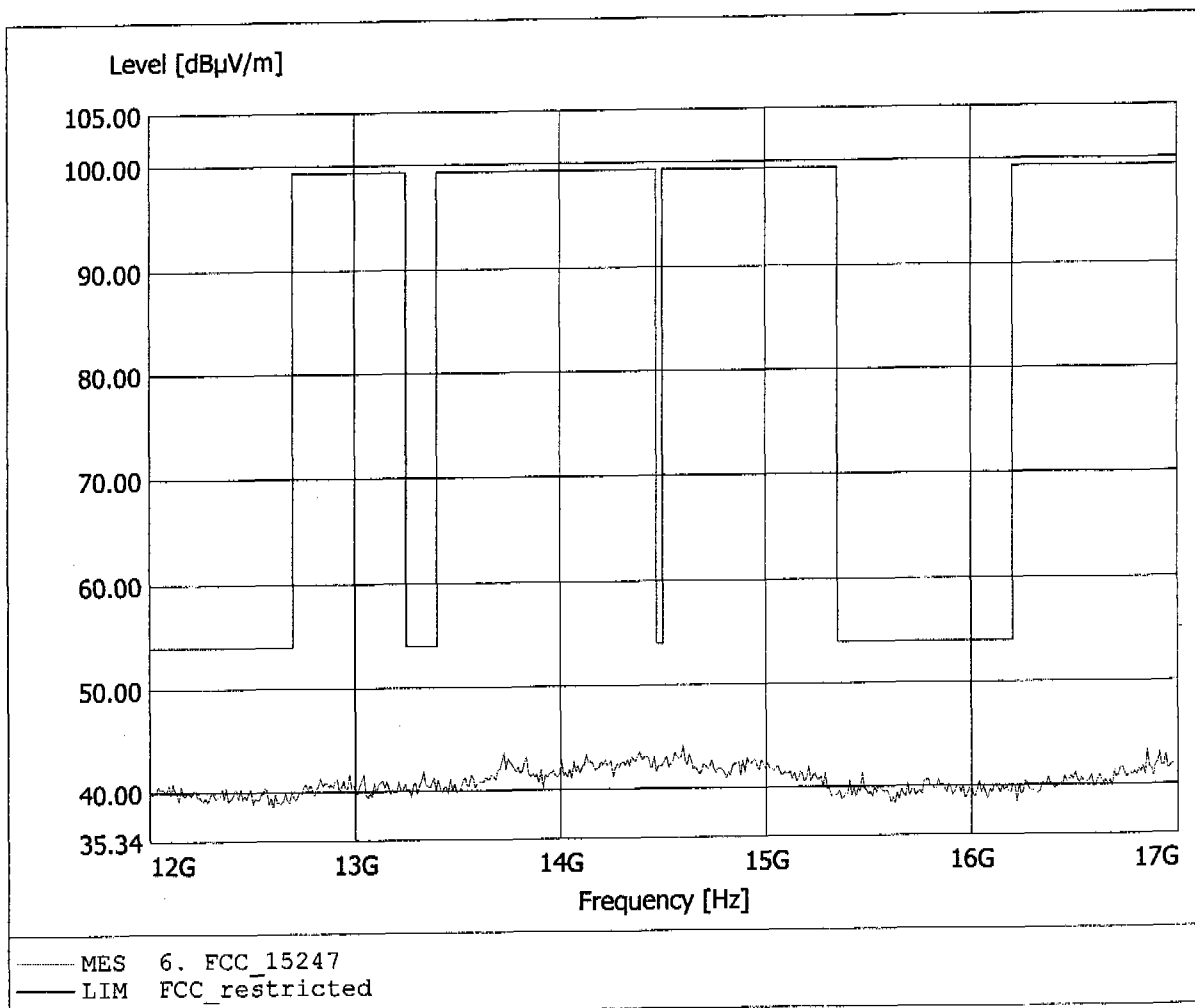


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.401GHz, Emax: 48.98dBµV/m, RBW: 1MHz

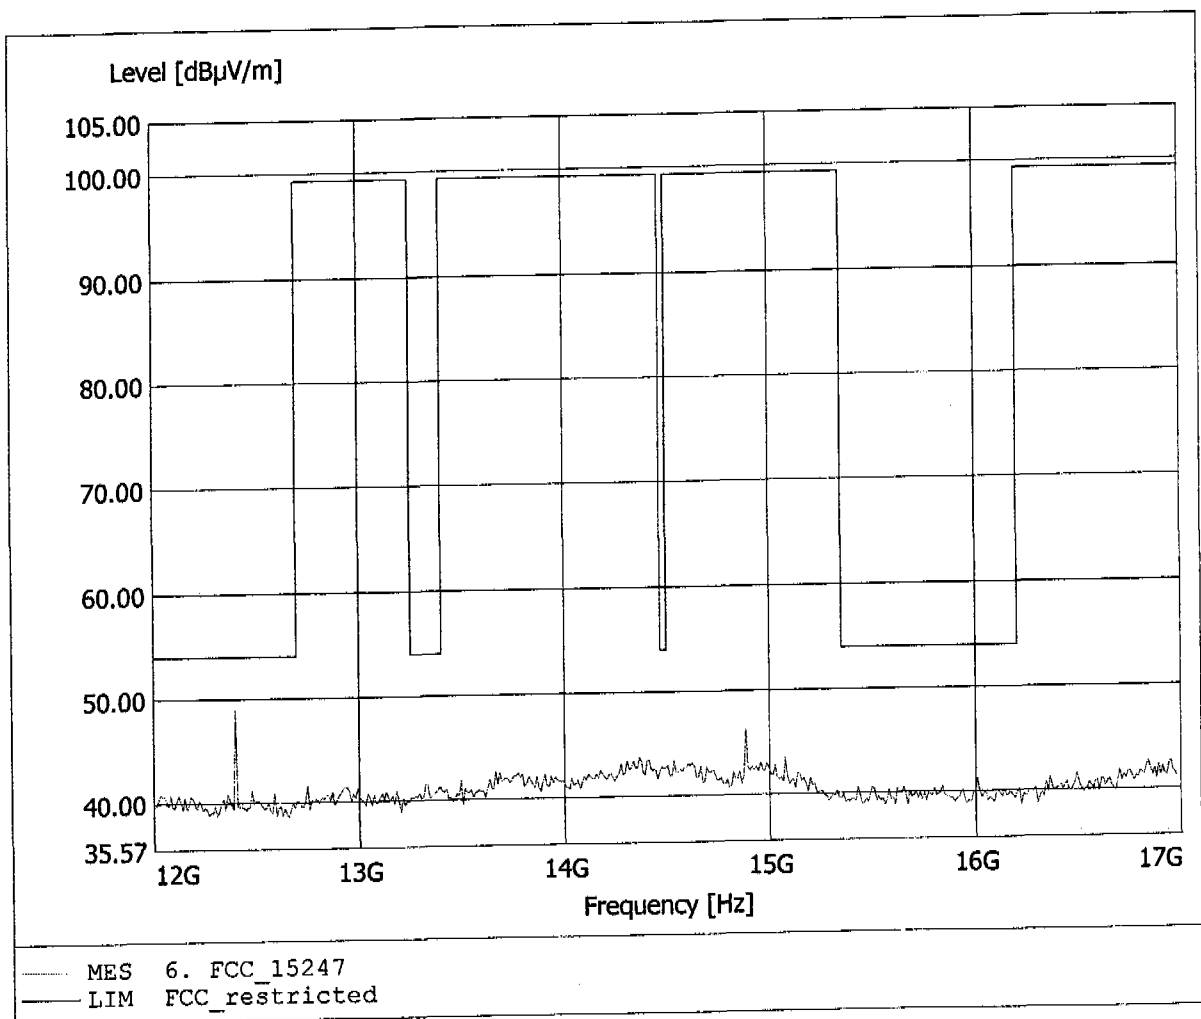

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 45.03dBµV/m, RBW: 1MHz

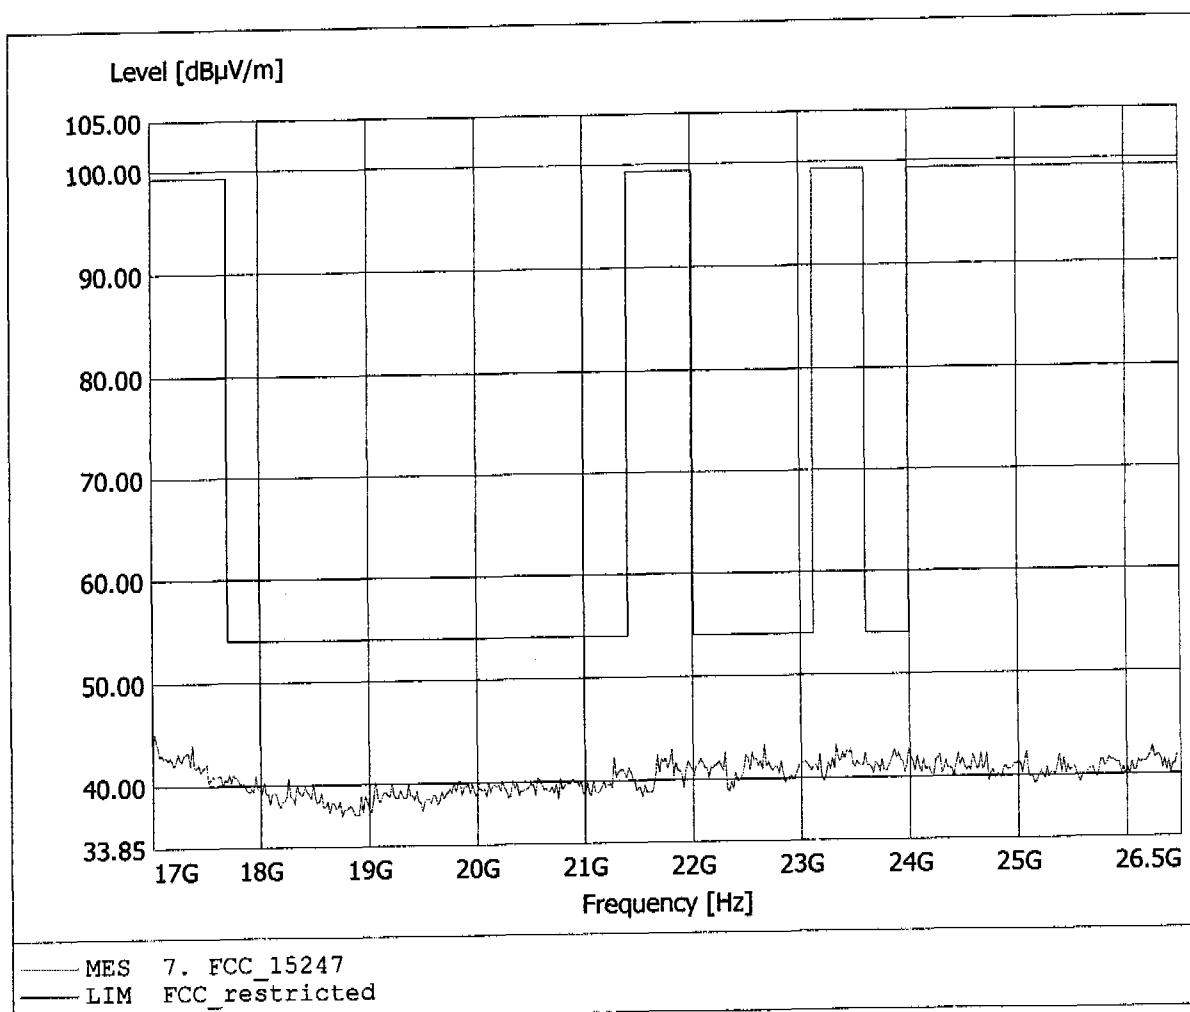

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: 2.4 GHz Communication System (Base)
Model: IP600-ISM / Ant.: 1 / Ch.: 78
Approval Holder: KIRK telecom A/S
Operating Condition: Tnom: 23°C / Unom: 24 V DC (120 V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 44.61dBµV/m, RBW: 1MHz

