




Appendix B

Peak Output Power

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2,4 GHz DECT / PP4 2G4 PP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2401,02MHz Pmax:23,46dBm RBW:4MHz

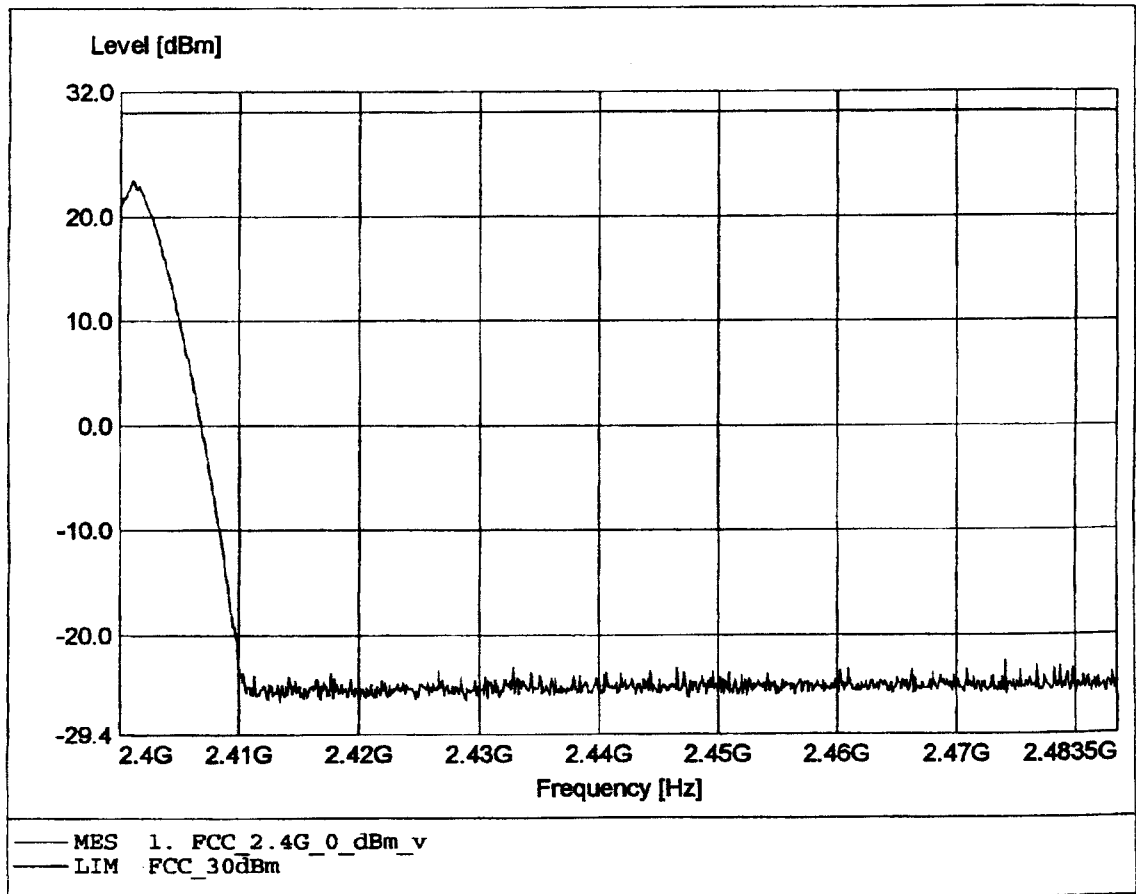

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2,4 GHz DECT / PP4 2G4 PP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2401,02MHz Pmax:17,94dBm RBW:4MHz

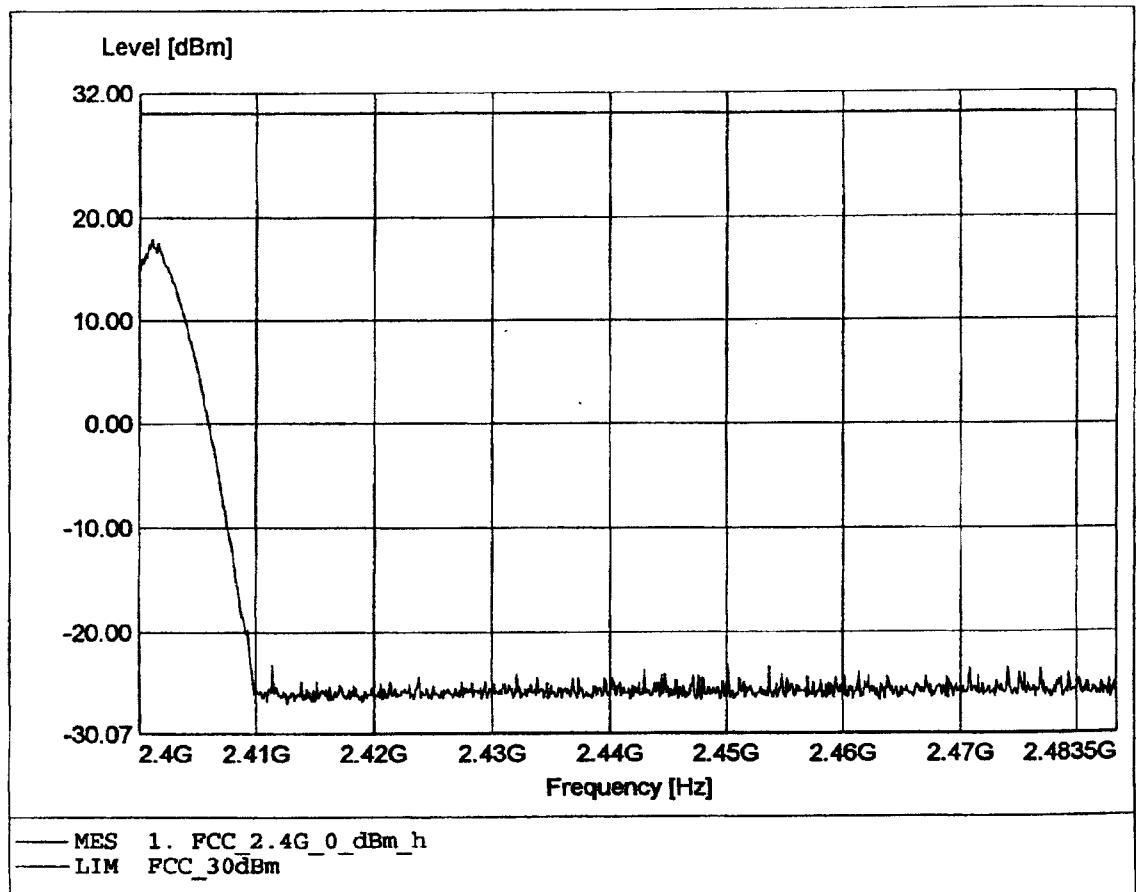

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2,4 GHz DECT / PP4 2G4 PP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2441,93MHz Pmax:21,57dBm RBW:4MHz

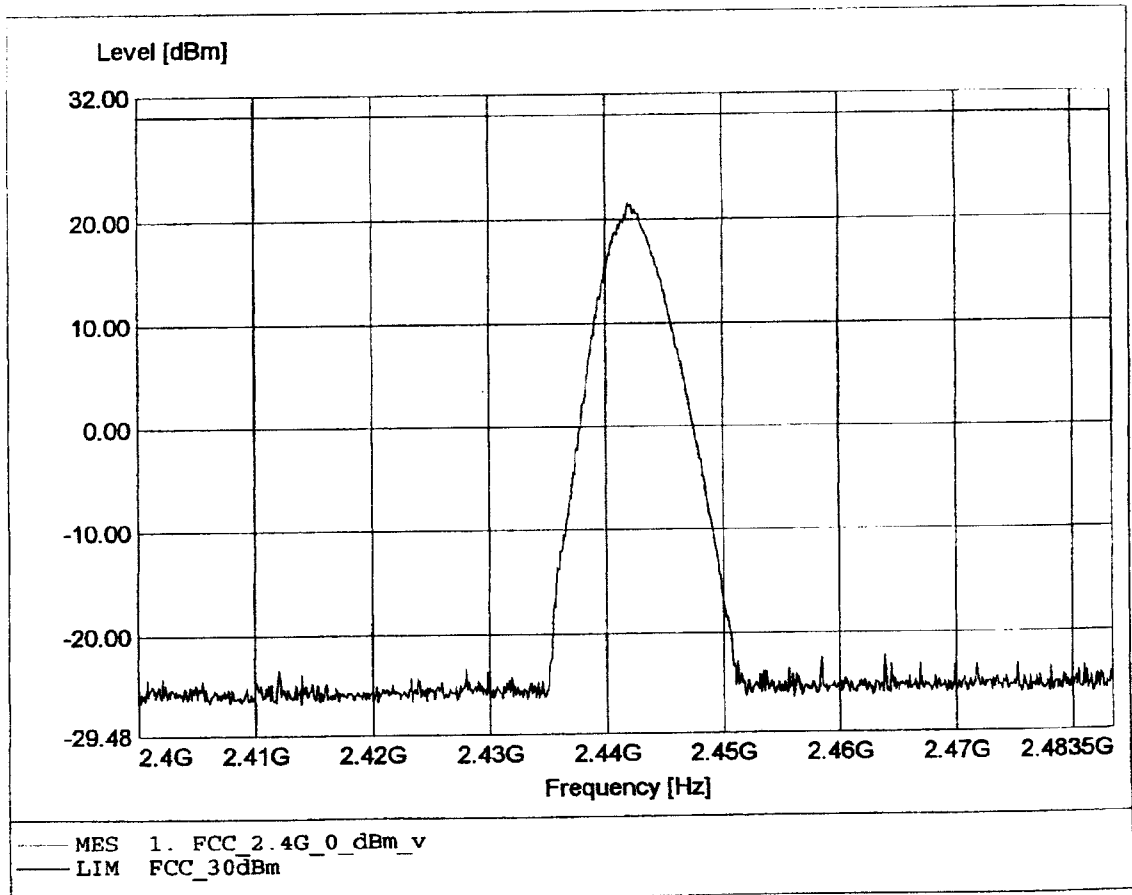

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2,4 GHz DECT / PP4 2G4 PP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2441,93MHz Pmax:14,92dBm RBW:4MHz

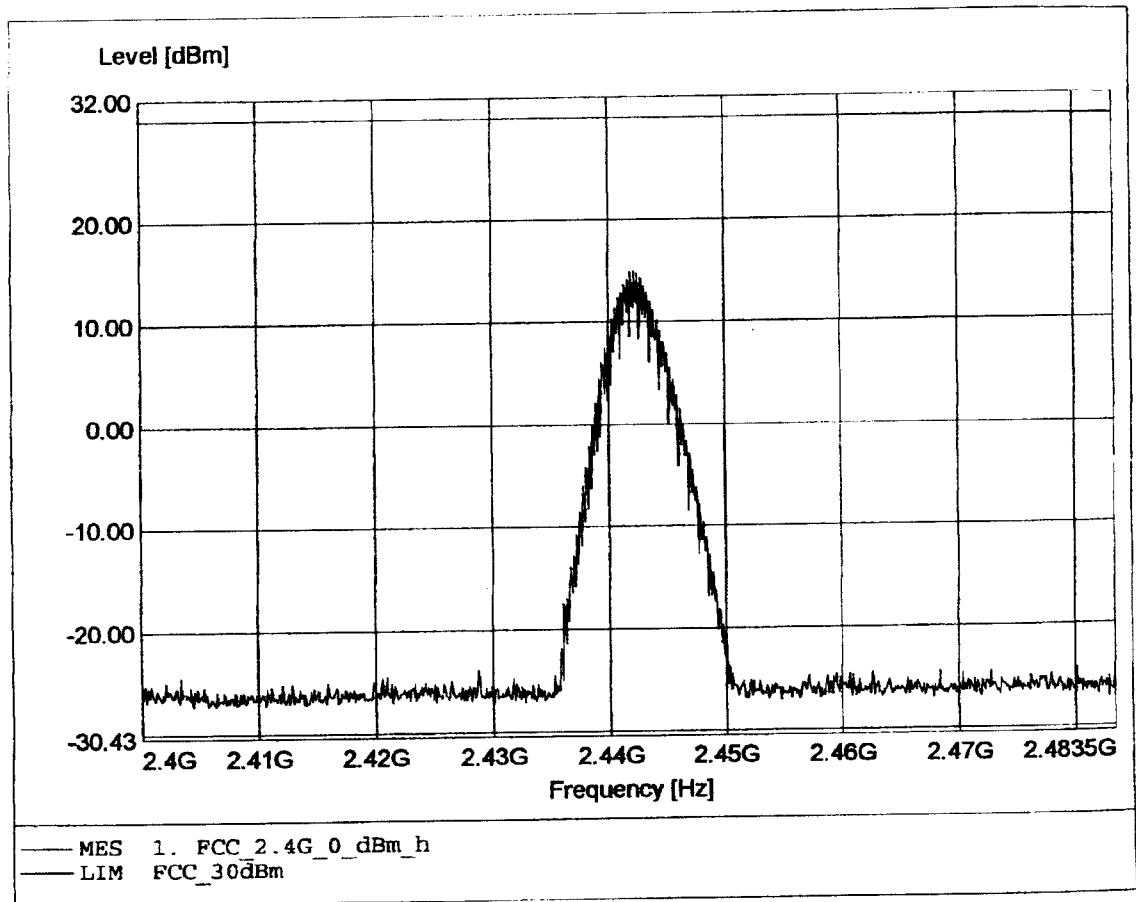

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2,4 GHz DECT / PP4 2G4 PP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,18MHz Pmax:20,83dBm RBW:4MHz

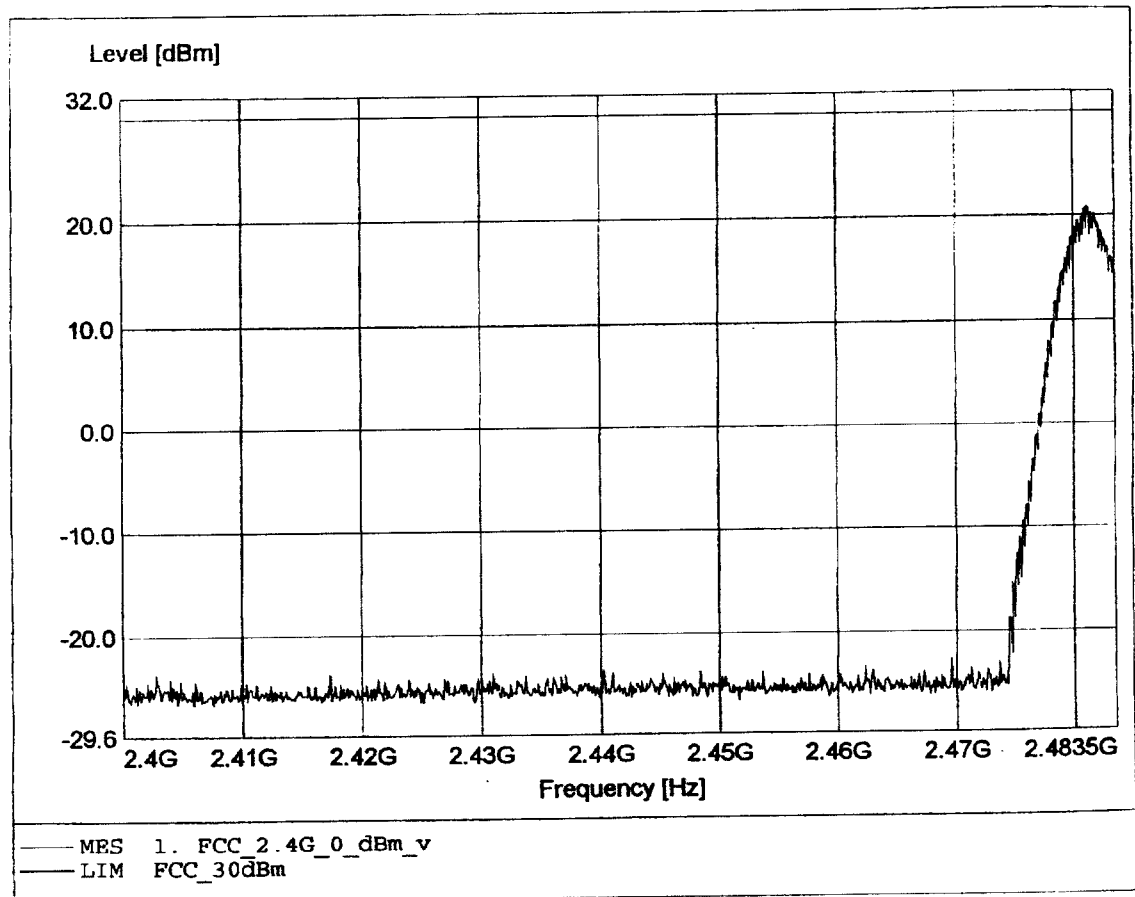

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2,4 GHz DECT / PP4 2G4 PP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S

Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2480,99MHz Pmax:13,06dBm RBW:4MHz

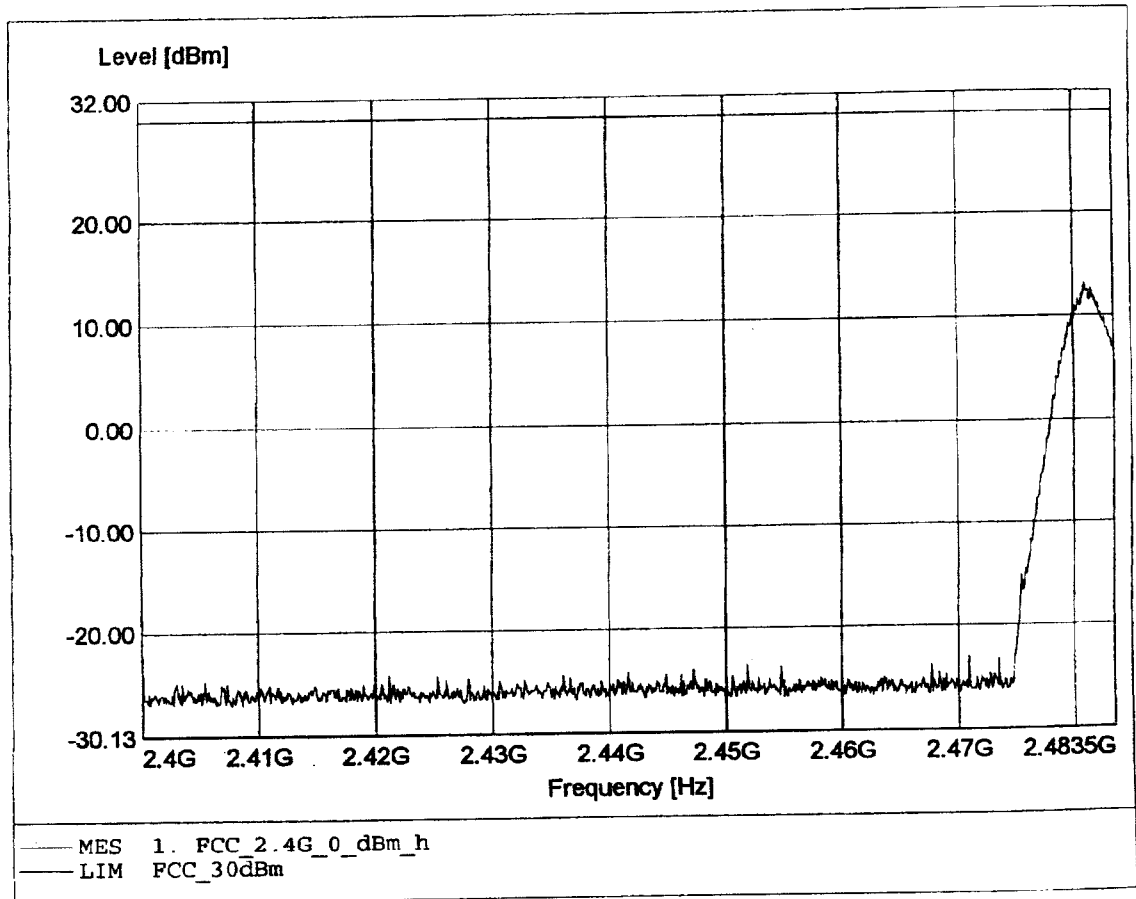




Appendix C

Spurious Emissions radiated - Transmitter operating

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:25,00MHz Pmax:28,66dBμV/m RBW=100KHz

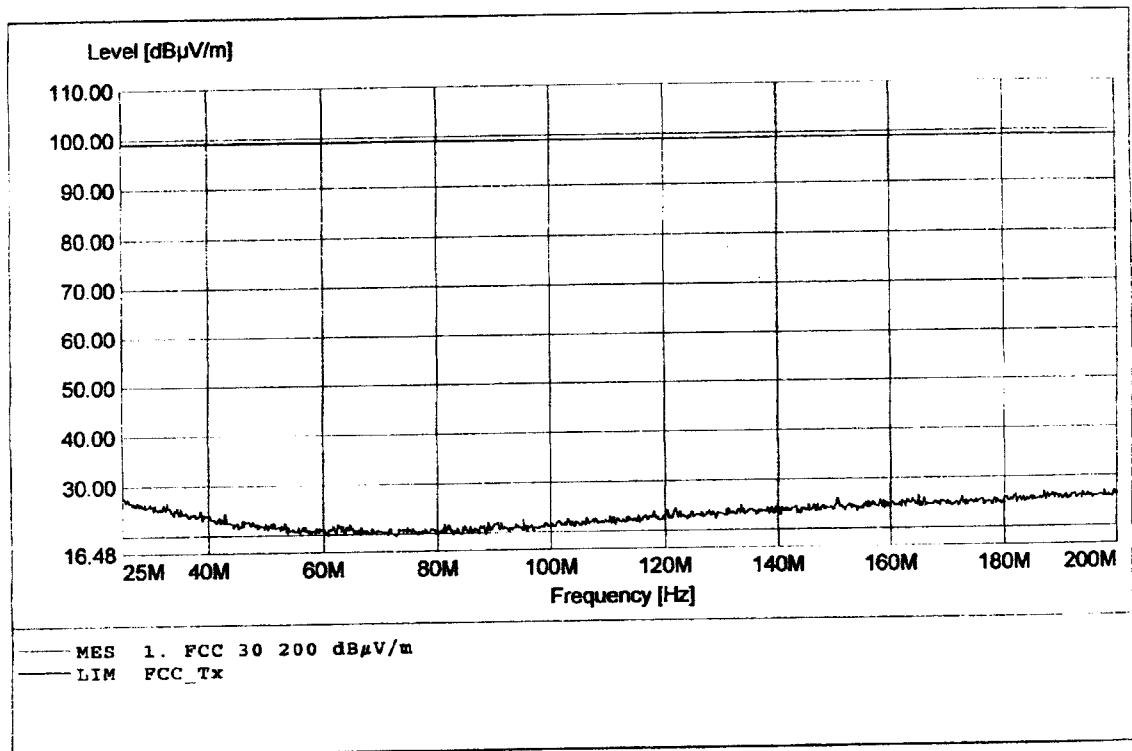

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:25,00MHz Pmax:28,12dBµV/m RBW=100KHz

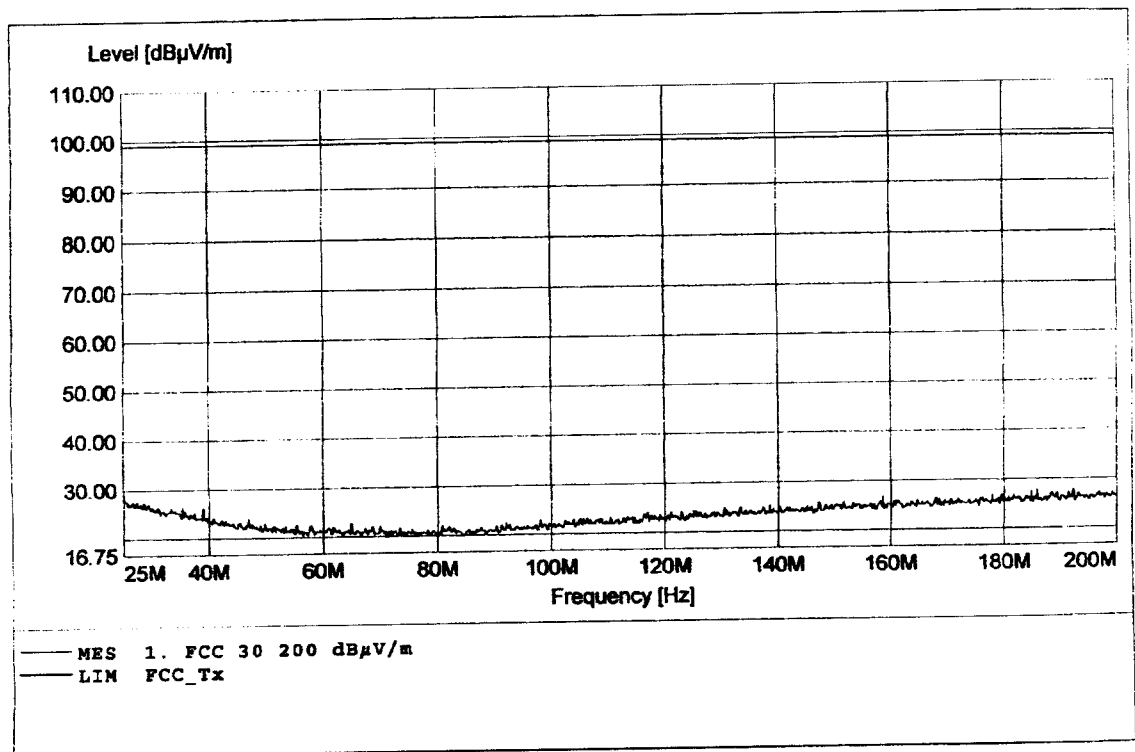

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:198,83MHz Pmax:28,12dBμV/m RBW=100KHz

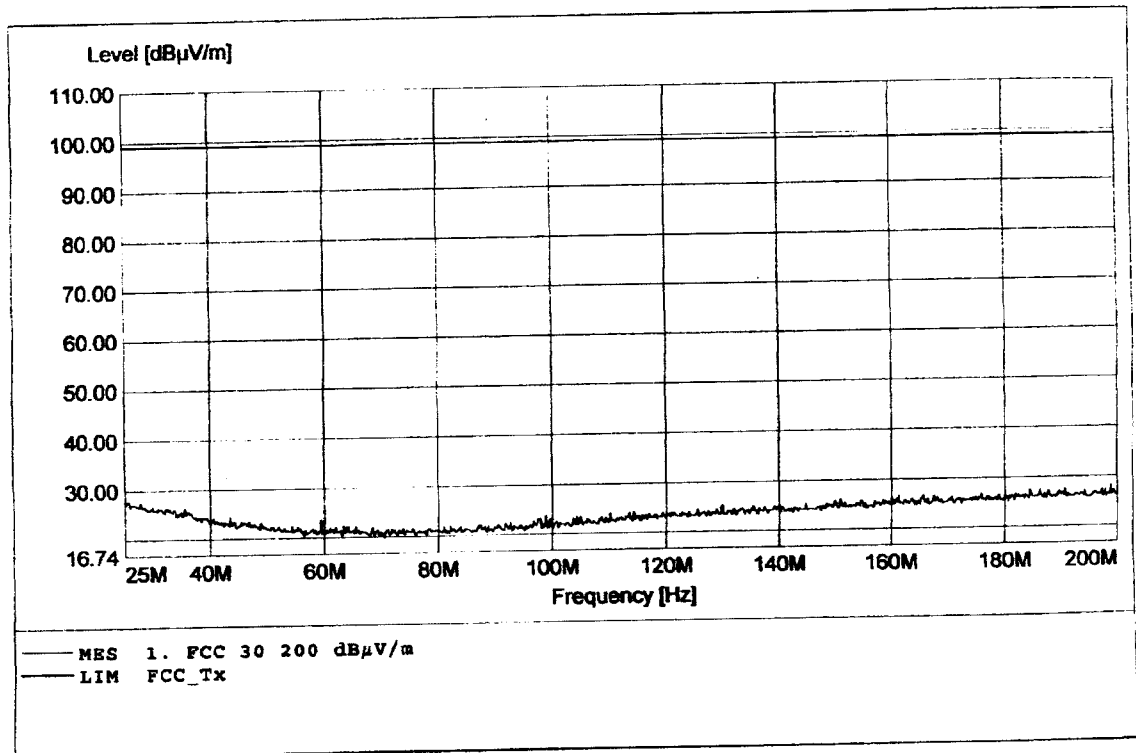

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:25,77MHz Pmax:28,56dBμV/m RBW=100KHz

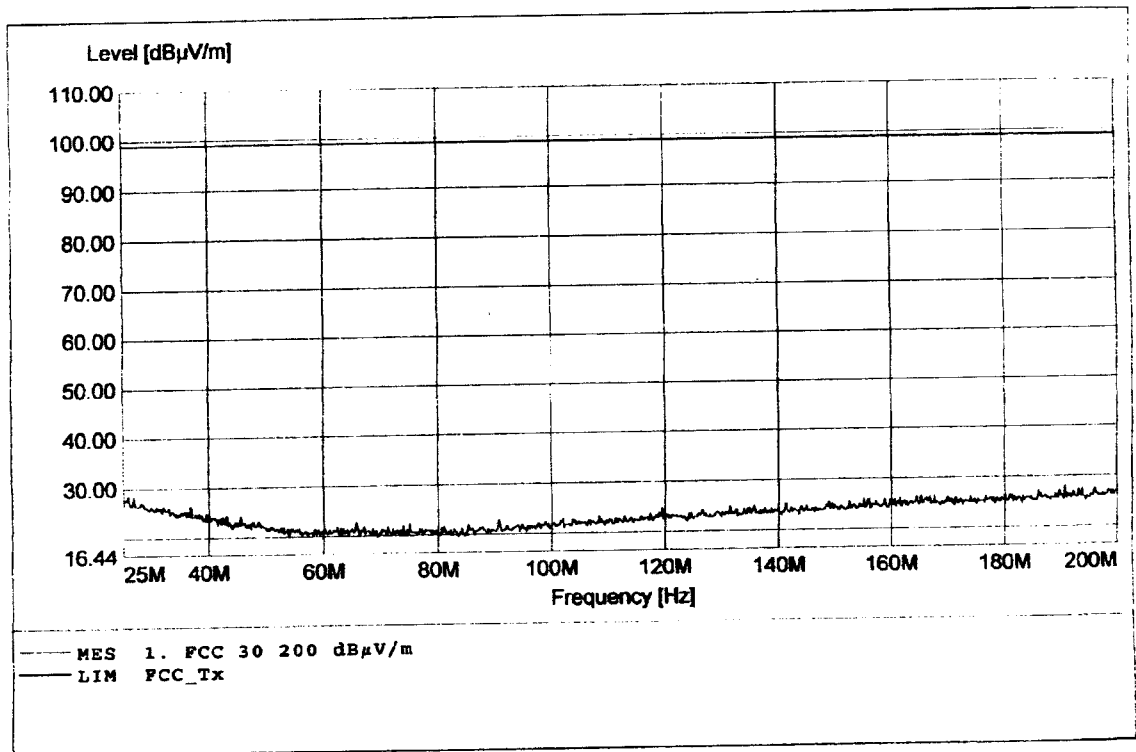

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:26,36MHz Pmax:27,98dBµV/m RBW=100KHz

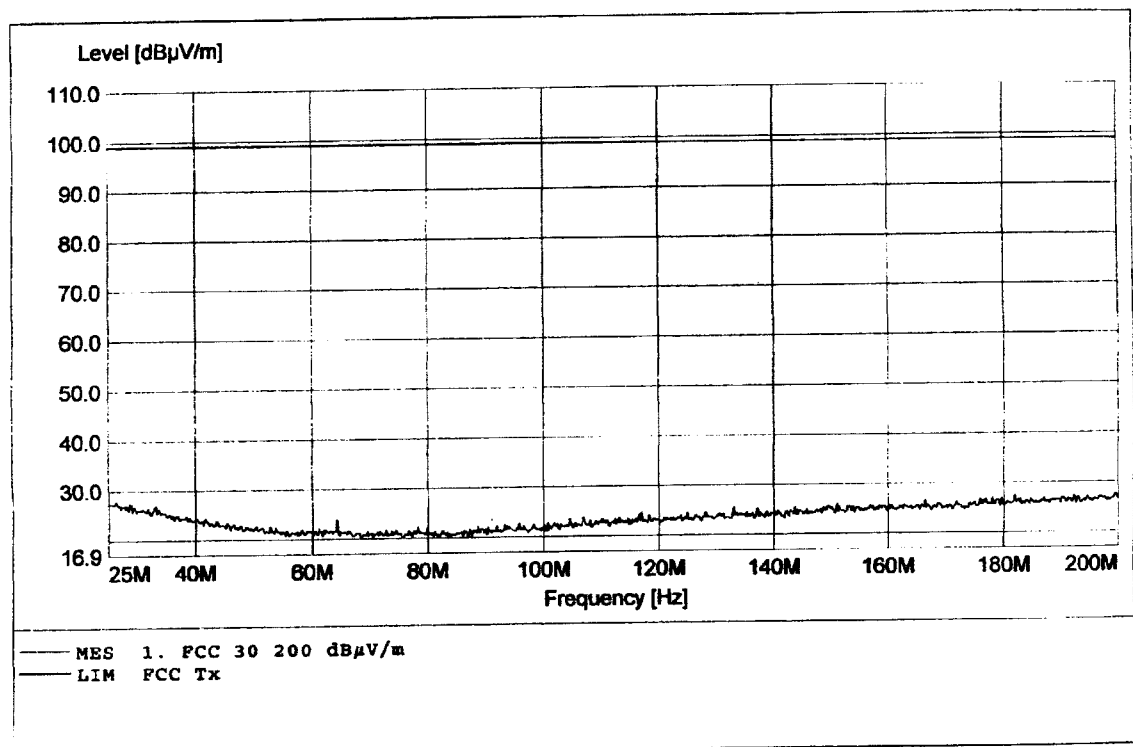

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:26,74MHz Pmax:27,74dBµV/m RBW=100KHz

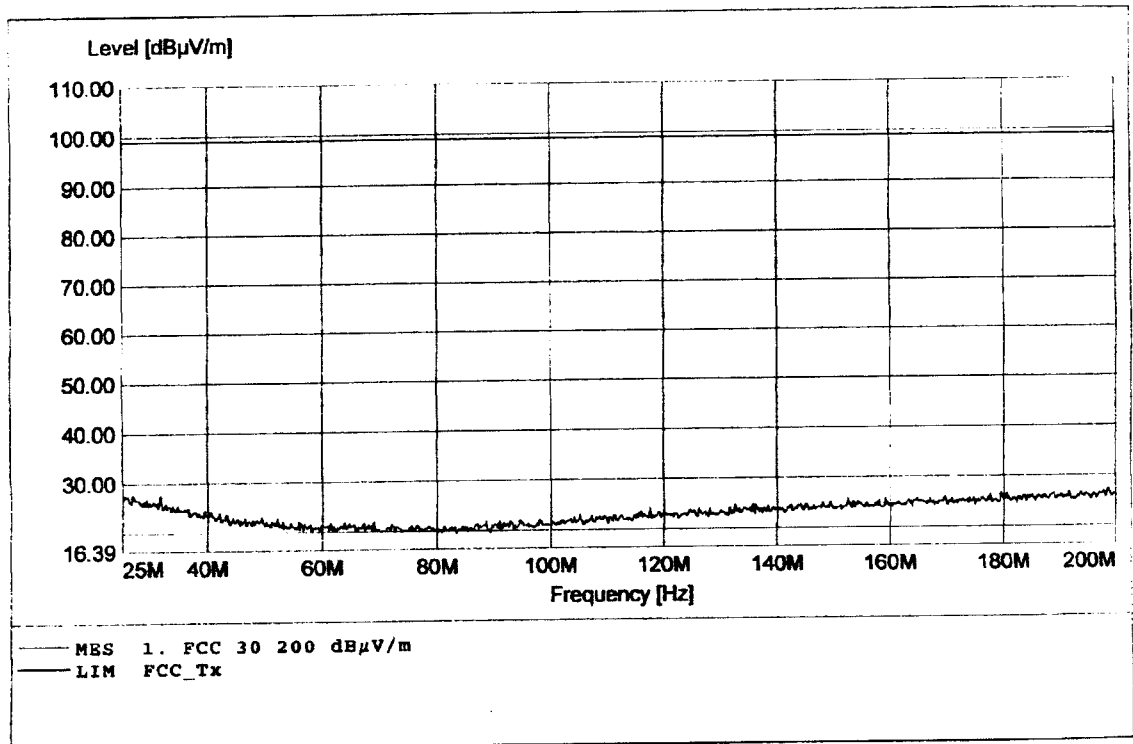

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:992,88MHz Pmax:36,65dBµV/m RBW=100KHz

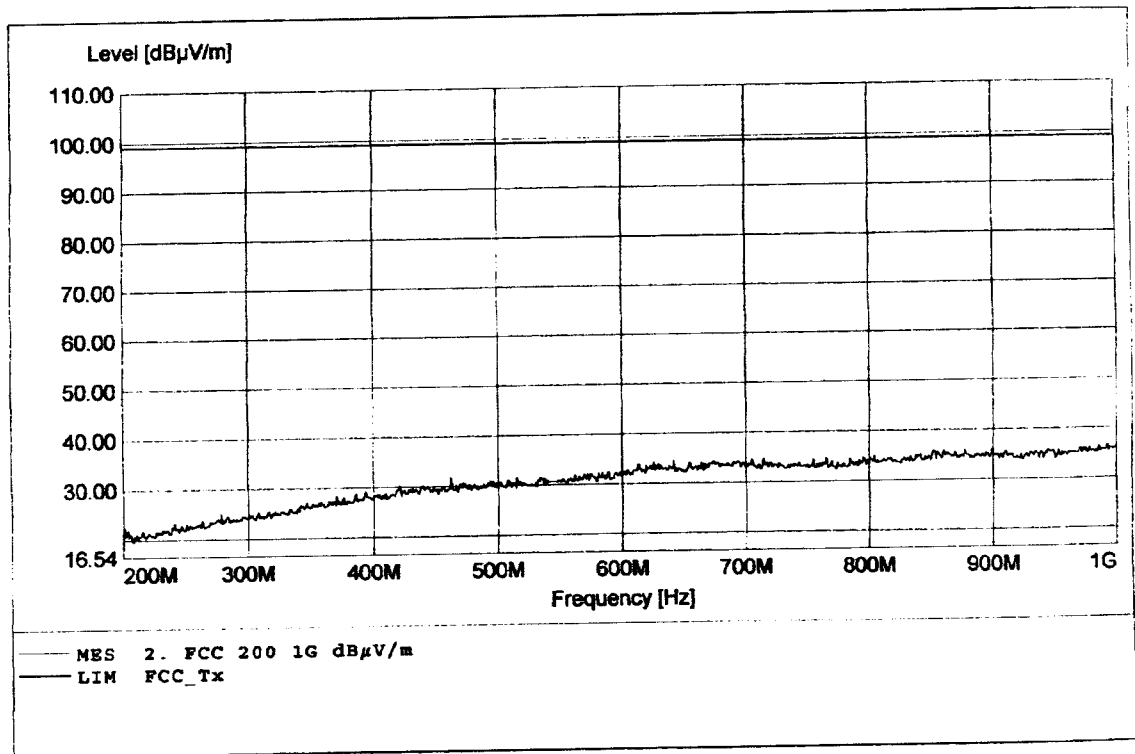

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:984,88MHz Pmax:37,24dBµV/m RBW=100KHz

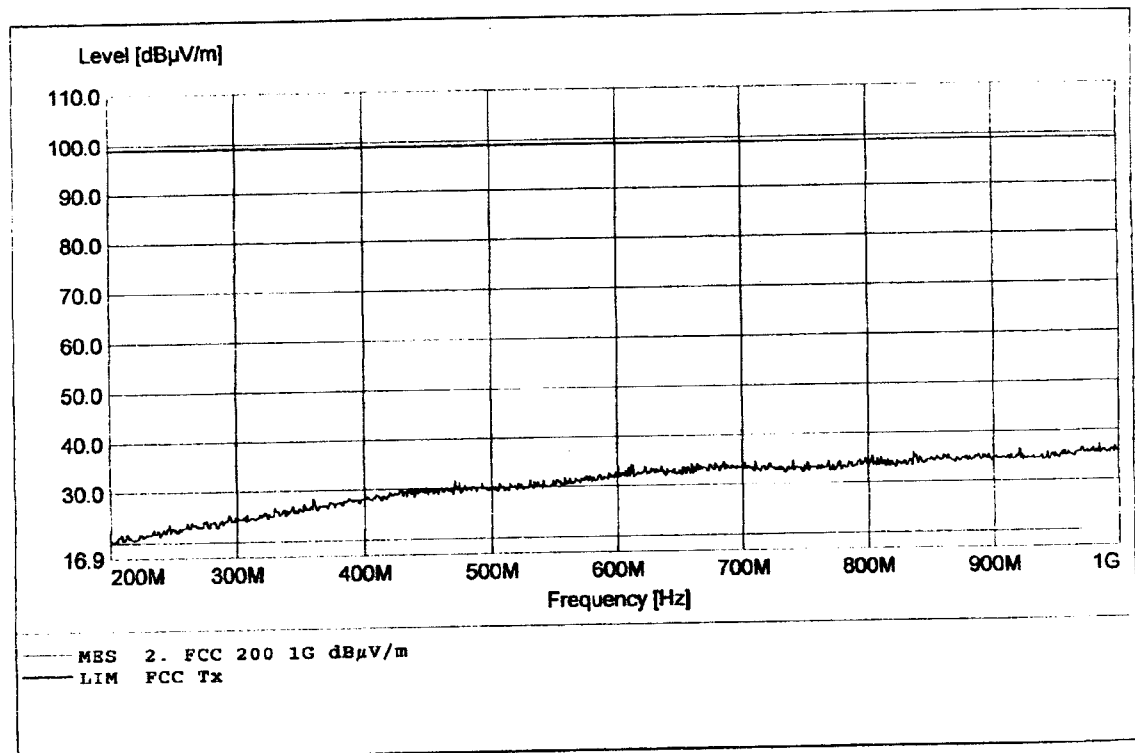

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:992,88MHz Pmax:36,80dBμV/m RBW=100KHz

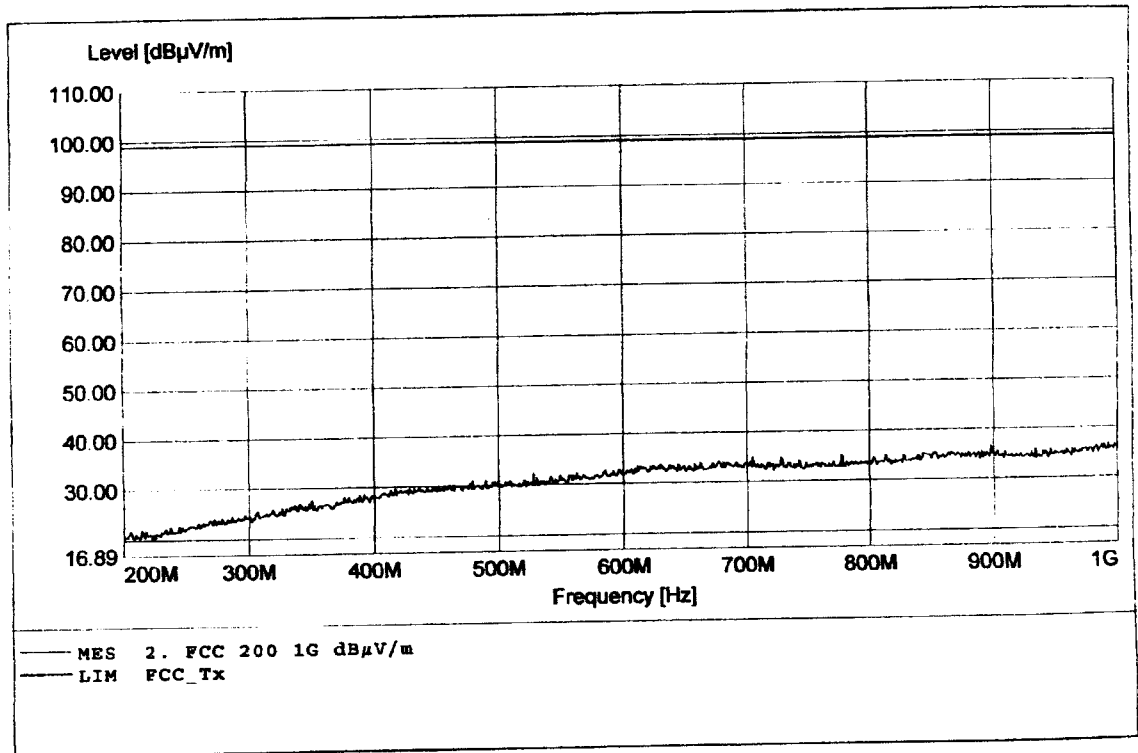

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:992,88MHz Pmax:37,41dBµV/m RBW=100KHz

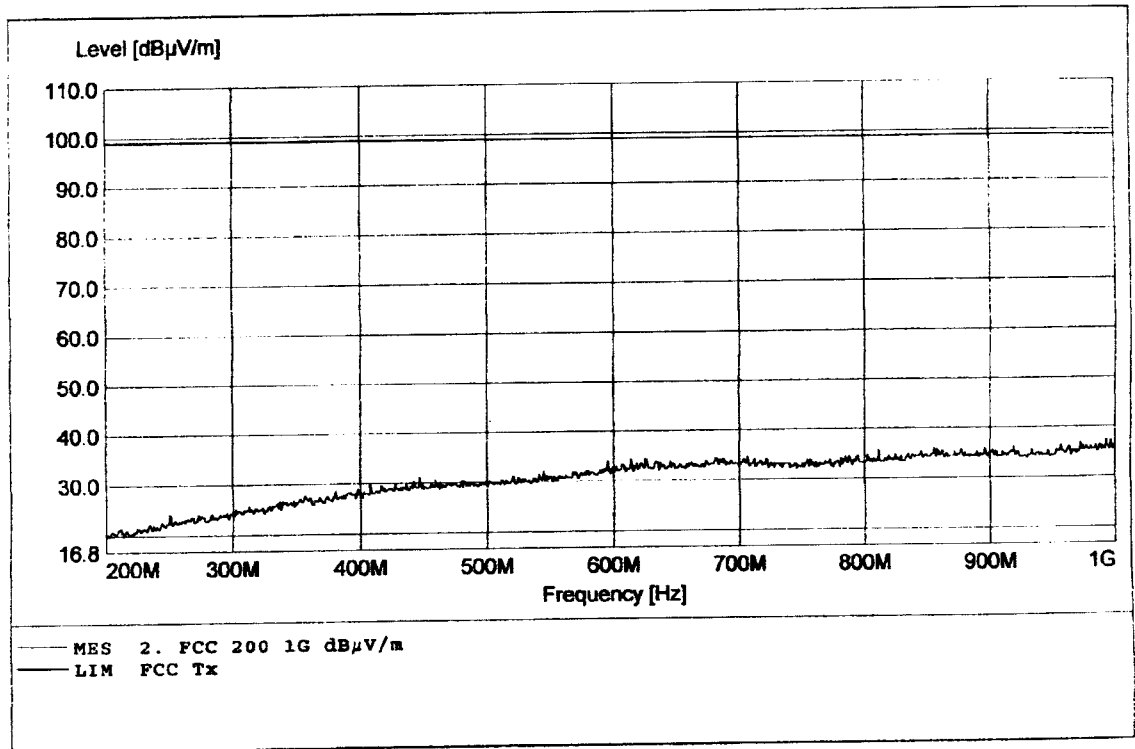

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:999,99MHz Pmax:36,80dBμV/m RBW=100KHz

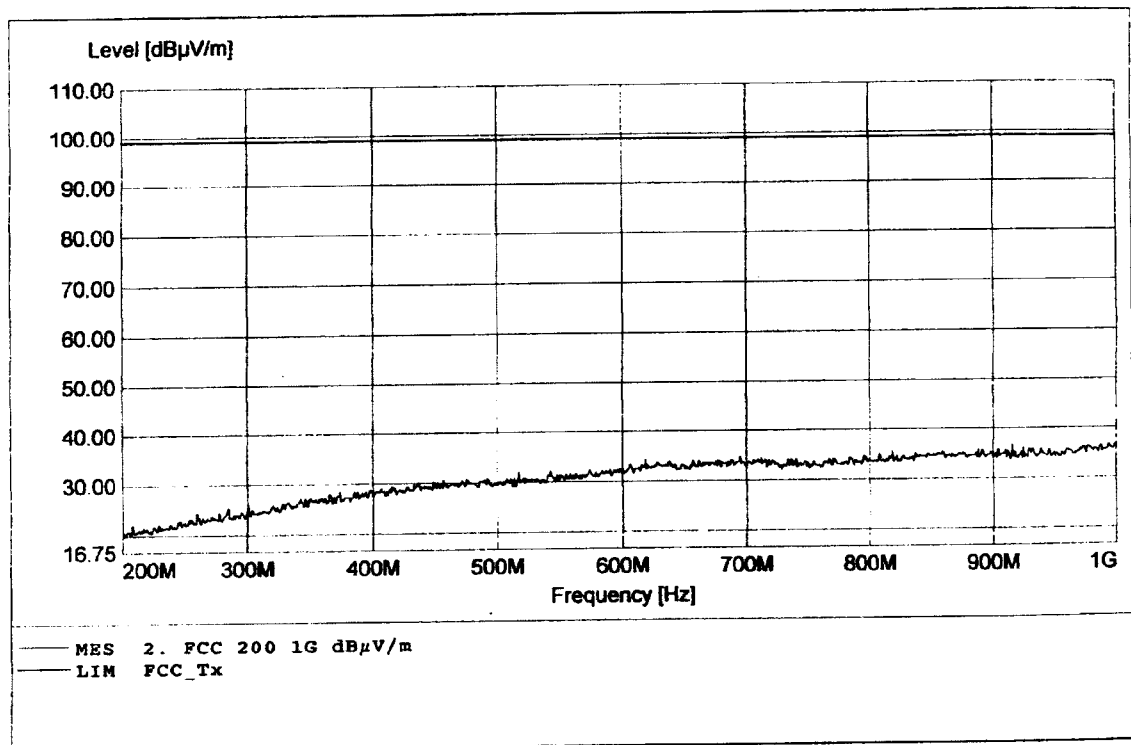

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:977,77MHz Pmax:37,16dBµV/m RBW=100KHz

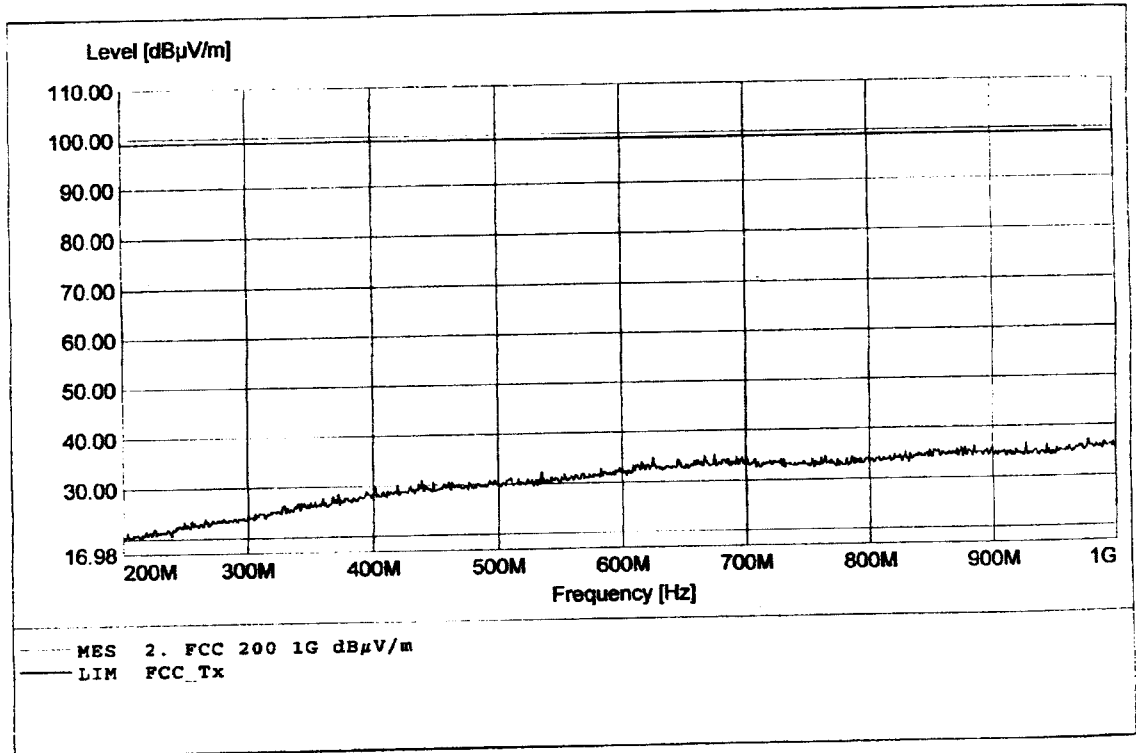

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr. Treffke
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2403,33MHz Pmax:113,89dBµV/m RBW=1MHz

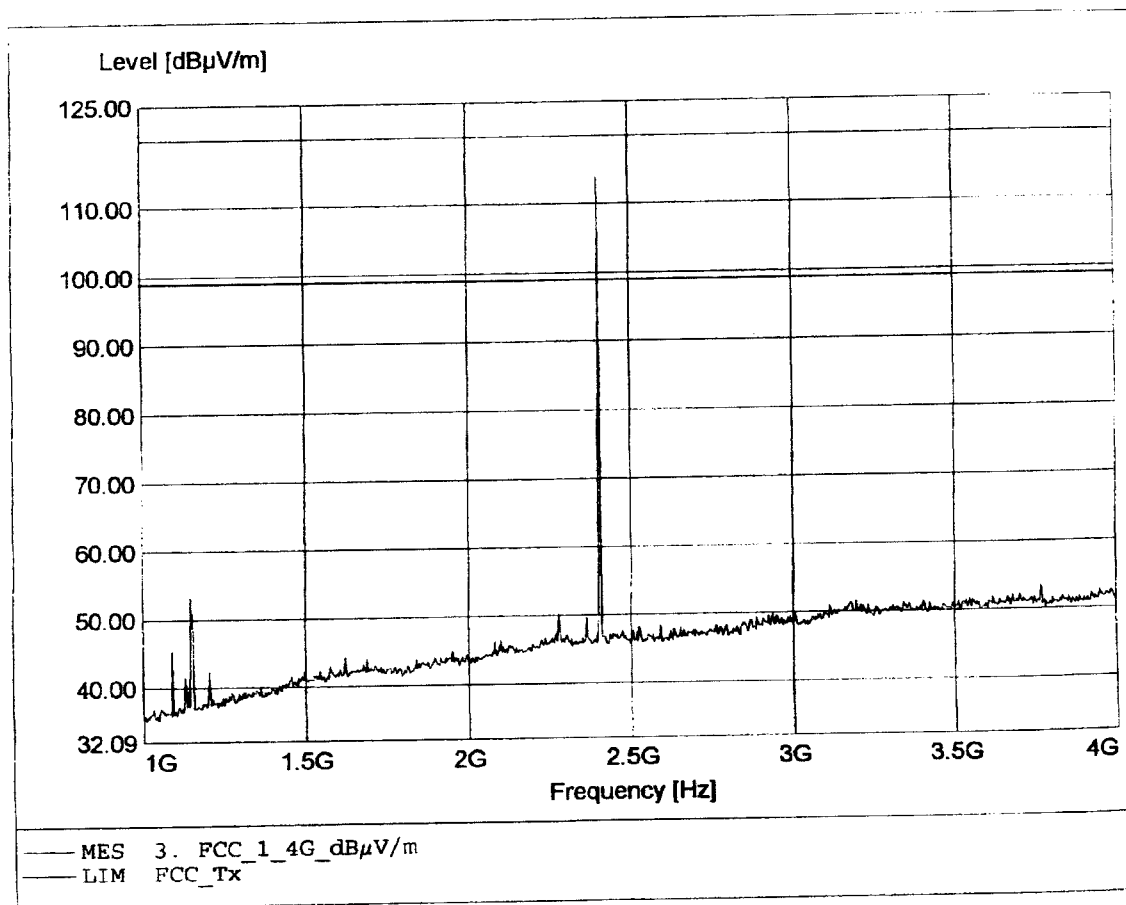

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr. Treffke
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2403,33MHz Pmax:106,52dBµV/m RBW=1MHz

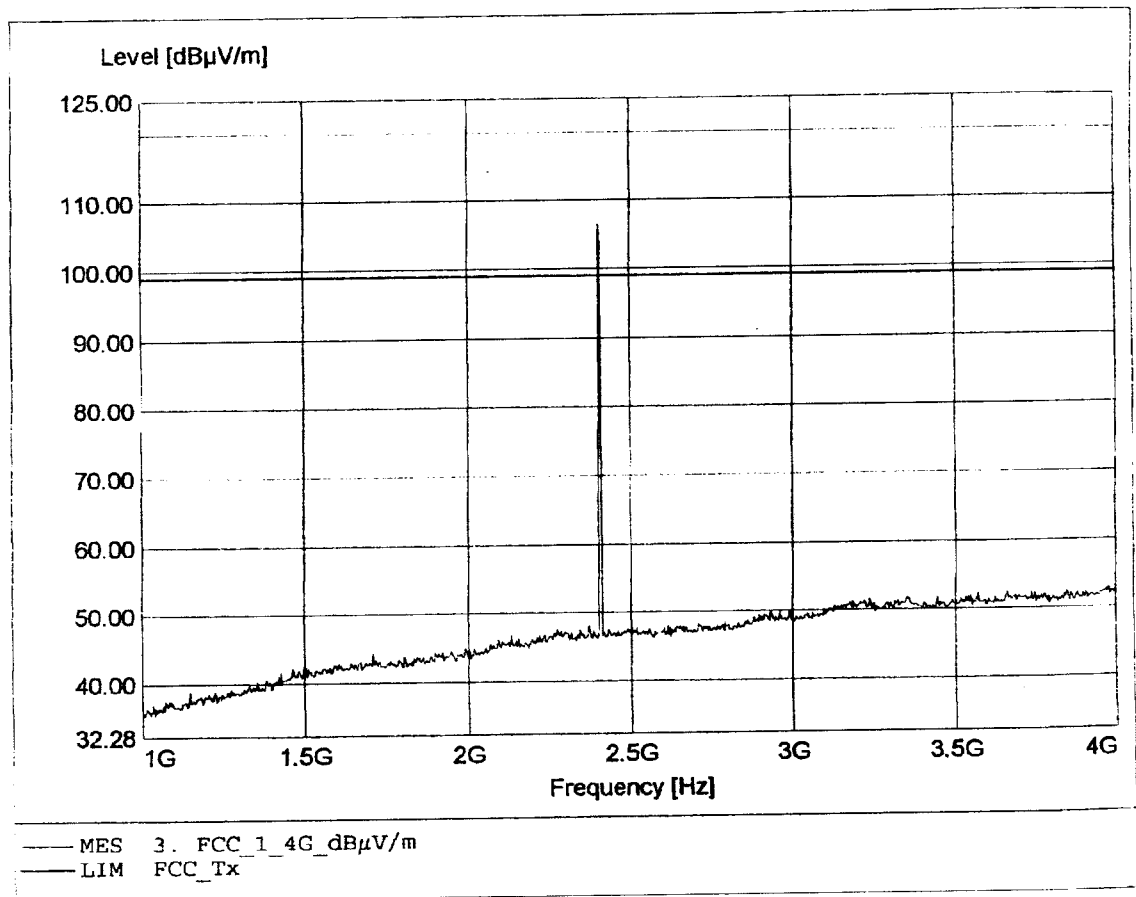

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr. Treffke
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2443,33MHz Pmax:113,92dBμV/m RBW=1MHz

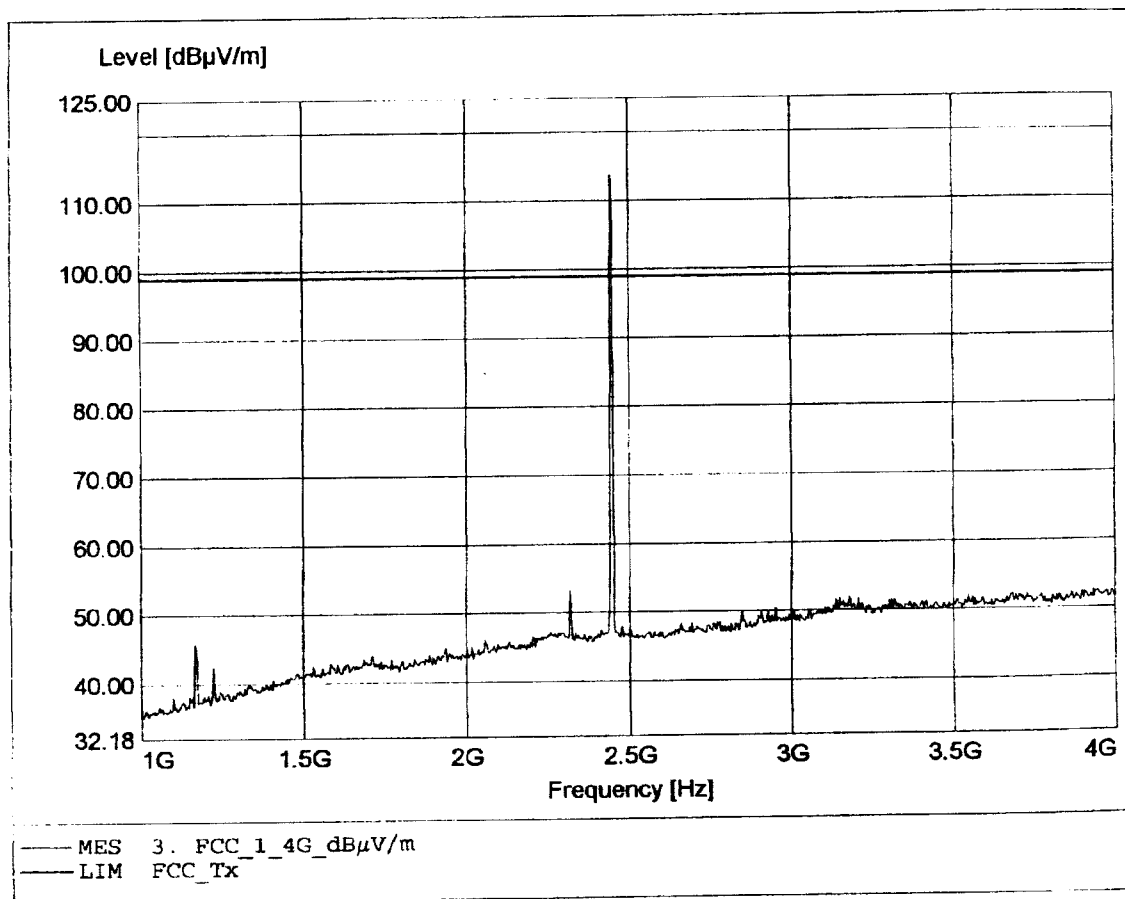

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr. Treffke
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2446,66MHz Pmax:109,96dBμV/m RBW=1MHz

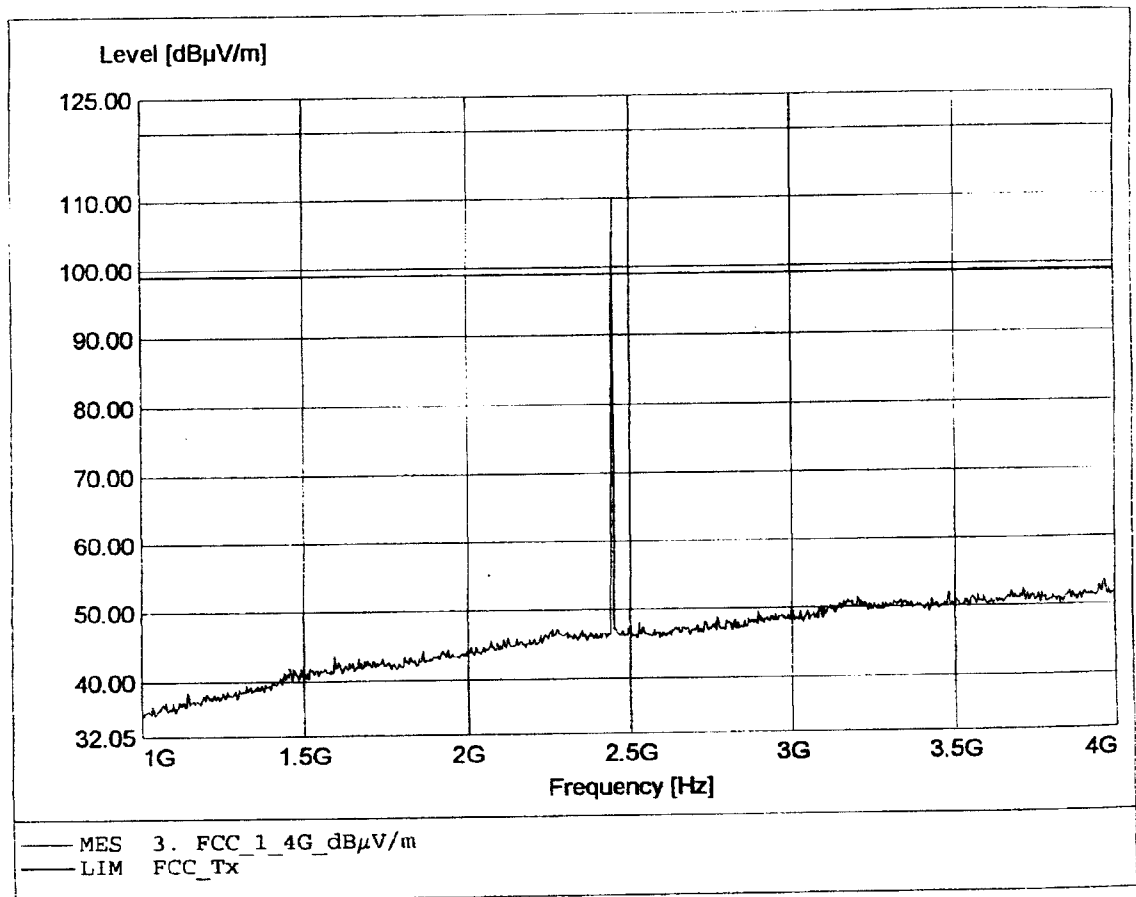

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr. Treffke
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2483,33MHz Pmax:112,36dBµV/m RBW=1MHz

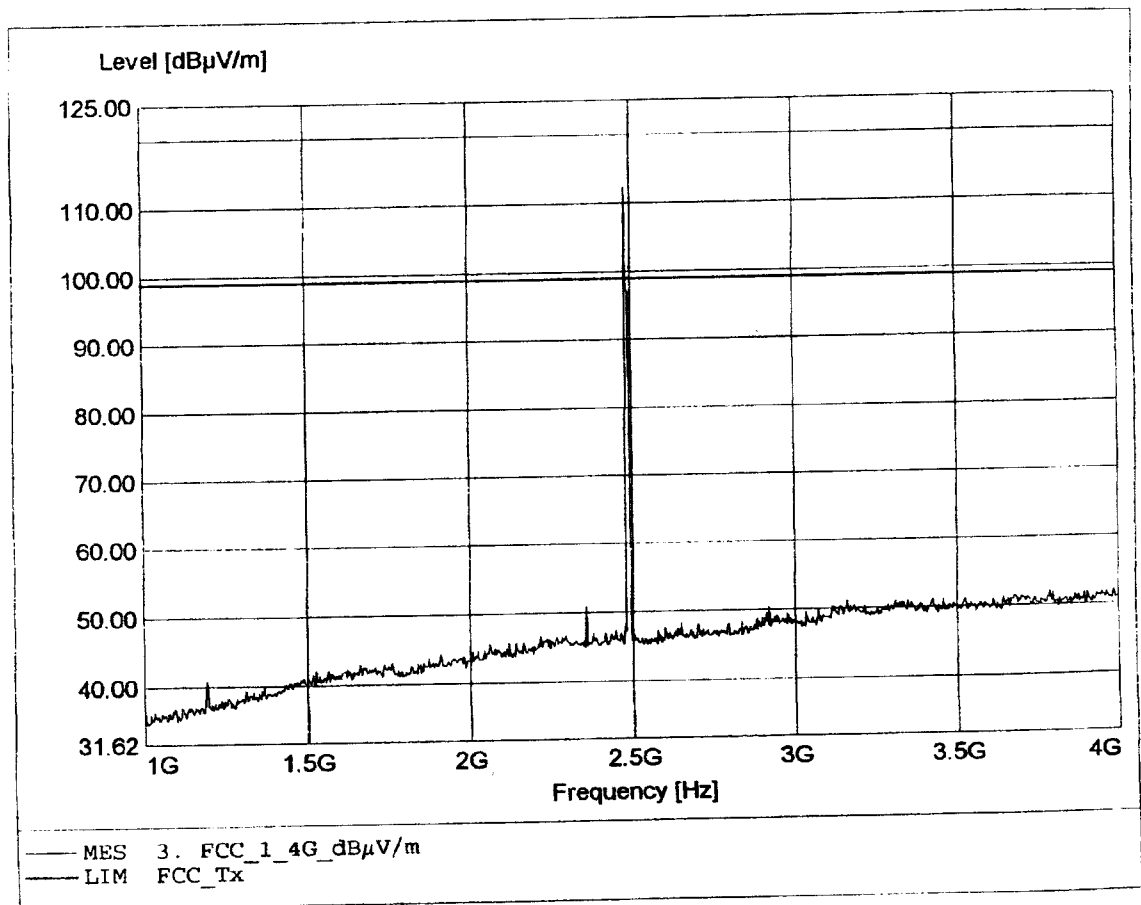

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr. Treffke
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2483,06MHz Pmax:106,6dBμV/m RBW=1MHz

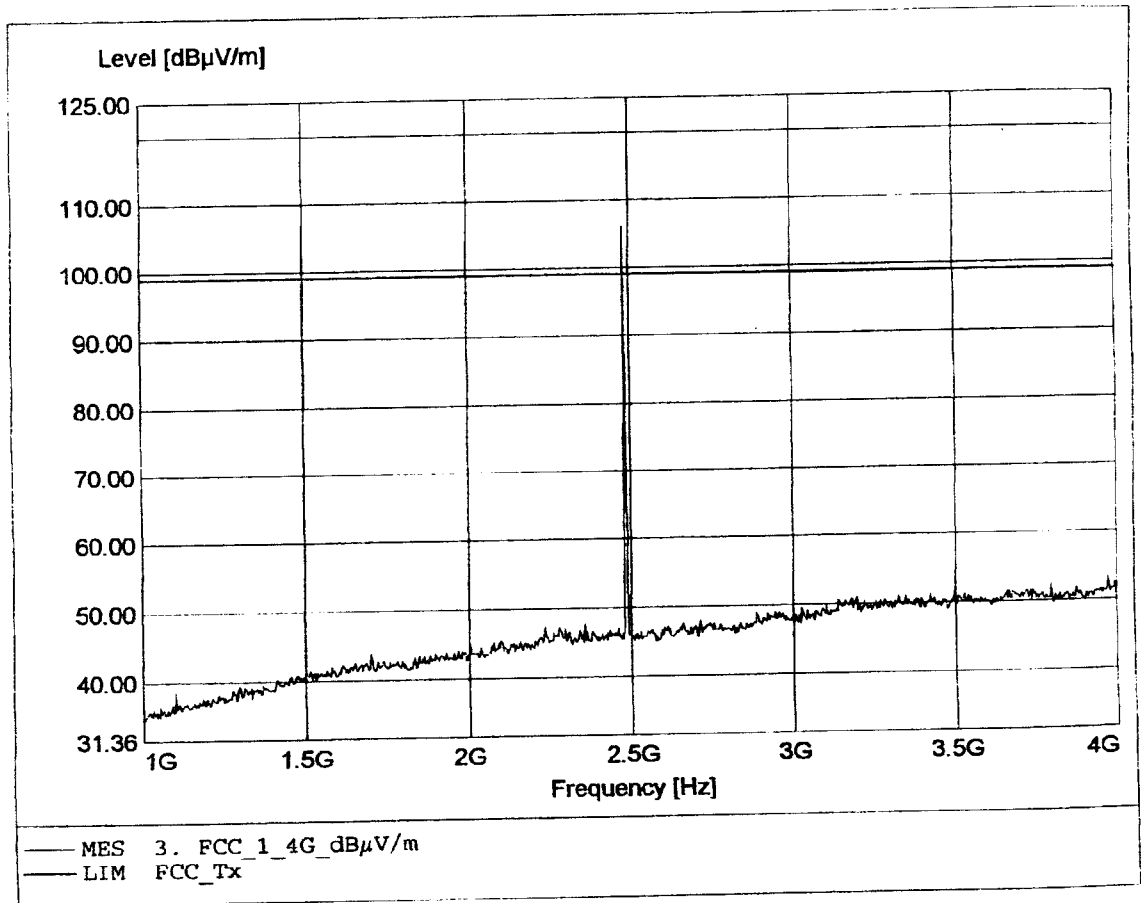

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: AT4004, amplif.
Comment 2: Freq:4795,03MHz Pmax:63,3dBµV/m RBW=1 MHz

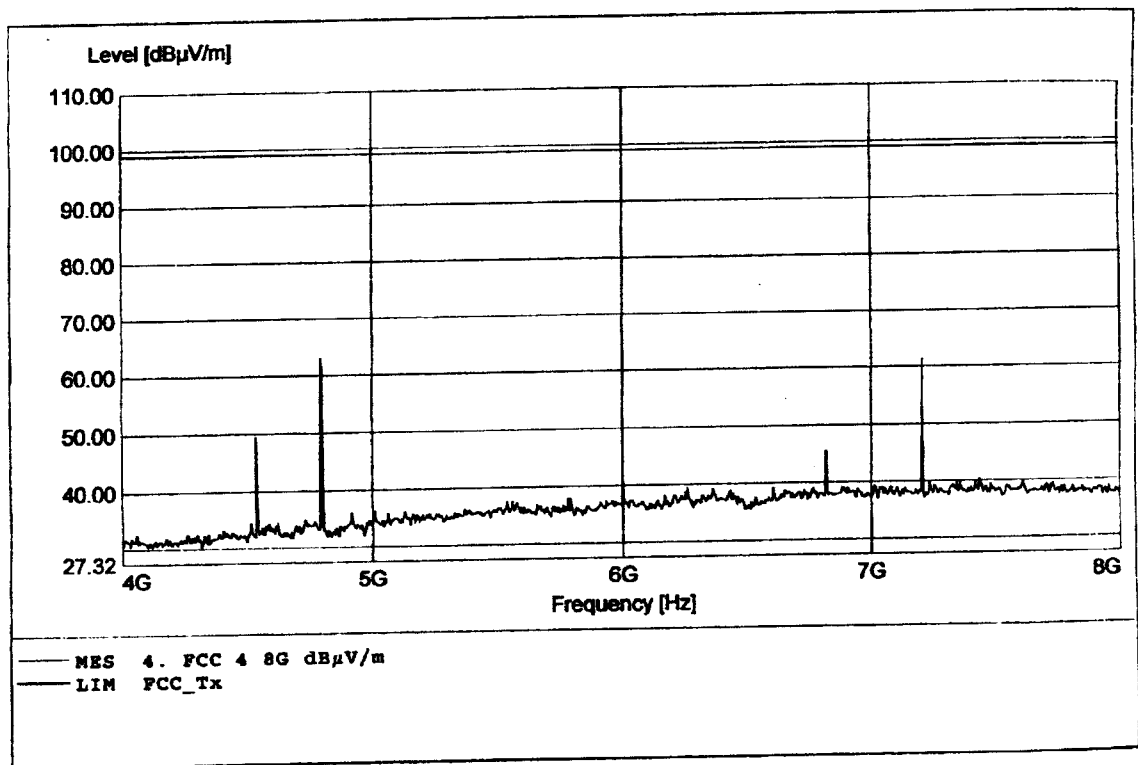

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: AT4004, amplif.
Comment 2: Freq:7204,44MHz Pmax:59,21dB μ V/m RBW=1MHz

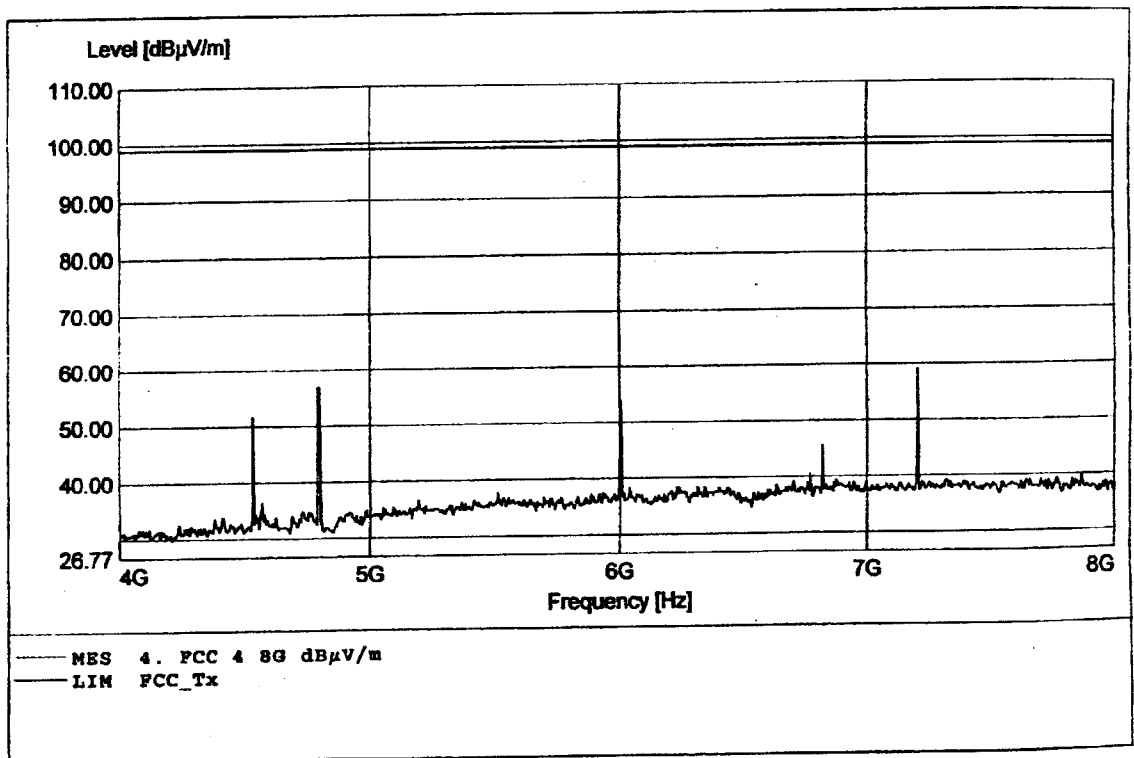

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: AT4004, amplif.
Comment 2: Freq:4884,01MHz Pmax:65,1dBµV/m RBW=1MHz

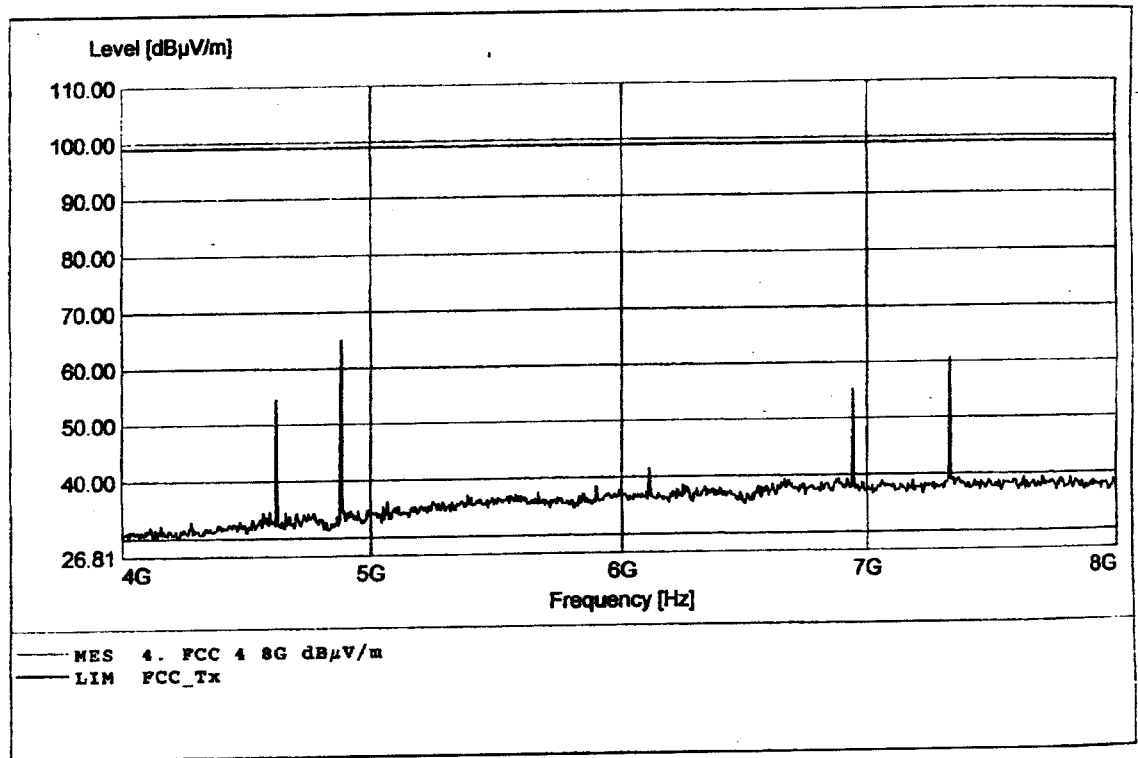

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: BTS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: AT4004, amplif.
Comment 2: Freq:7328,04MHz Pmax:70,4dBµV/m RBW=1MHz

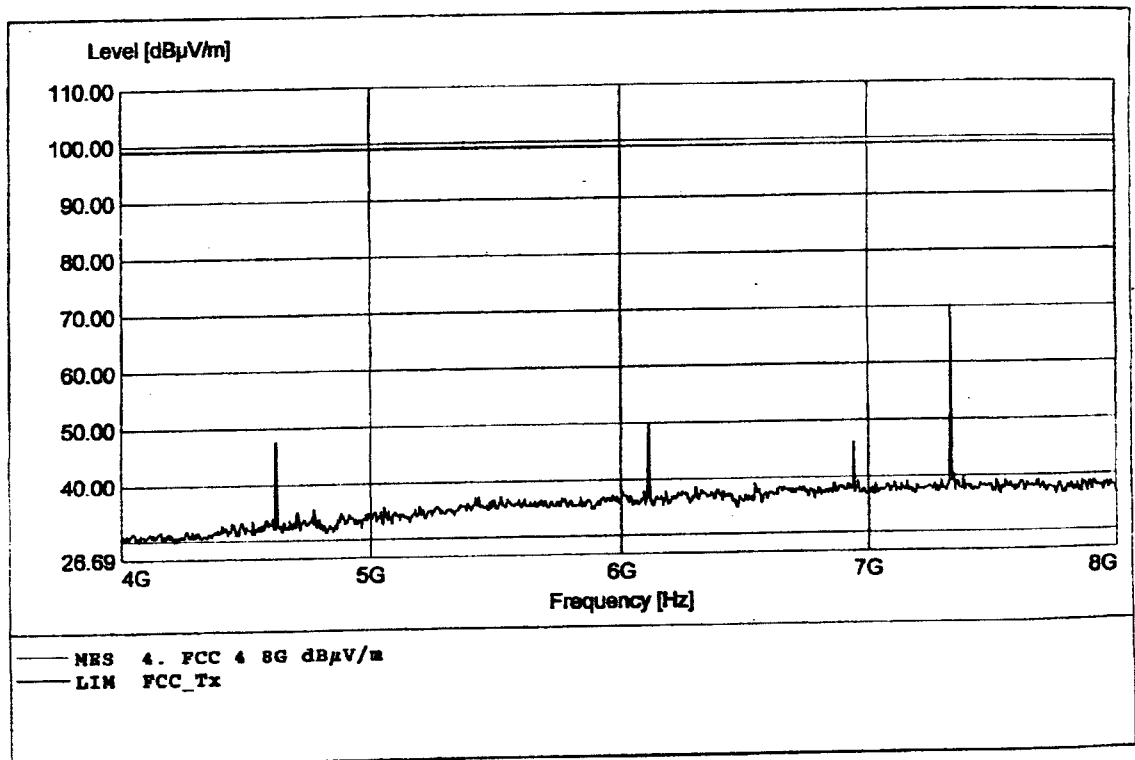

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: AT4004, amplif.
Comment 2: Freq:7444,44MHz Pmax:65,87dBµV/m RBW=1MHz

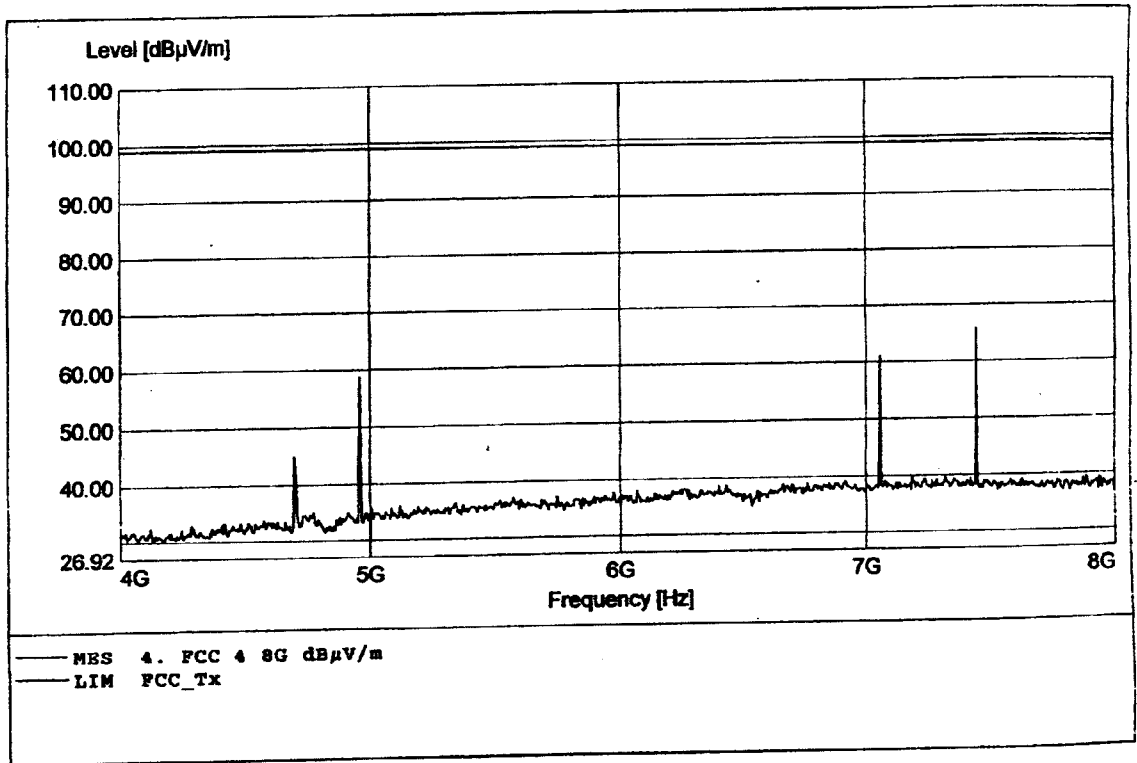

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: AT4004, amplif.
Comment 2: Freq:7444,44MHz Pmax:63,33dB μ V/m RBW=1MHz

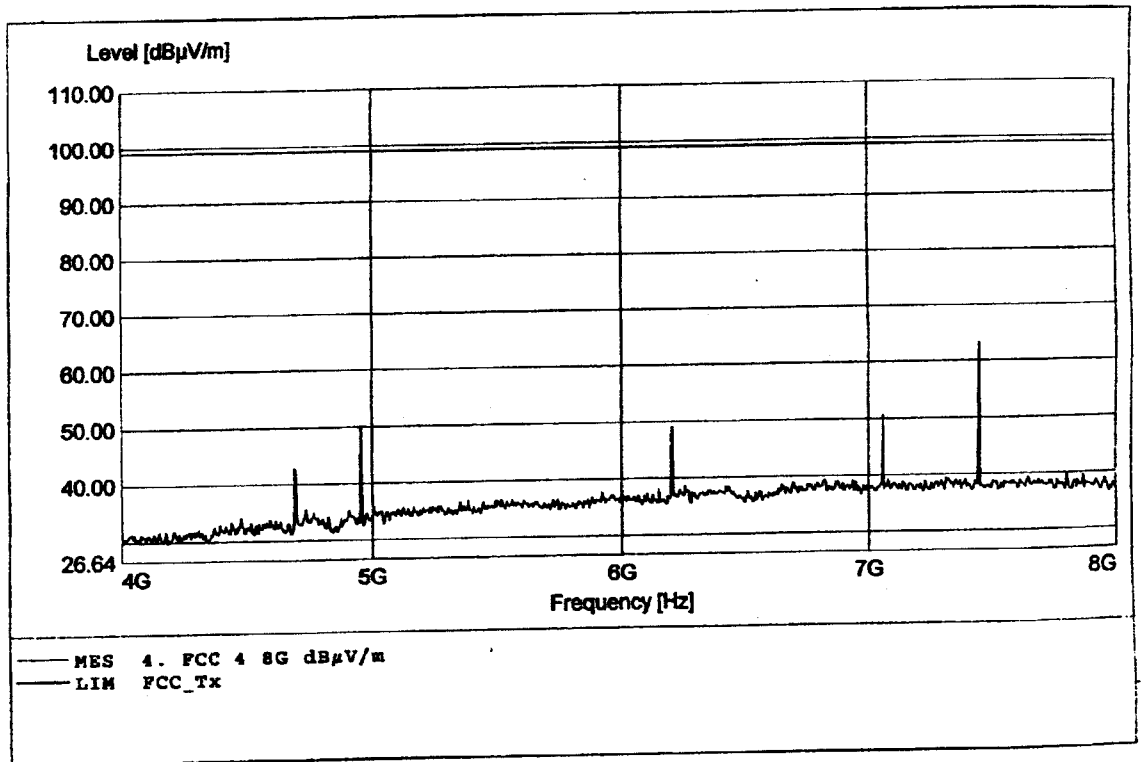

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14401,11MHz Pmax:52,54dB μ V/m RBW=1MHz

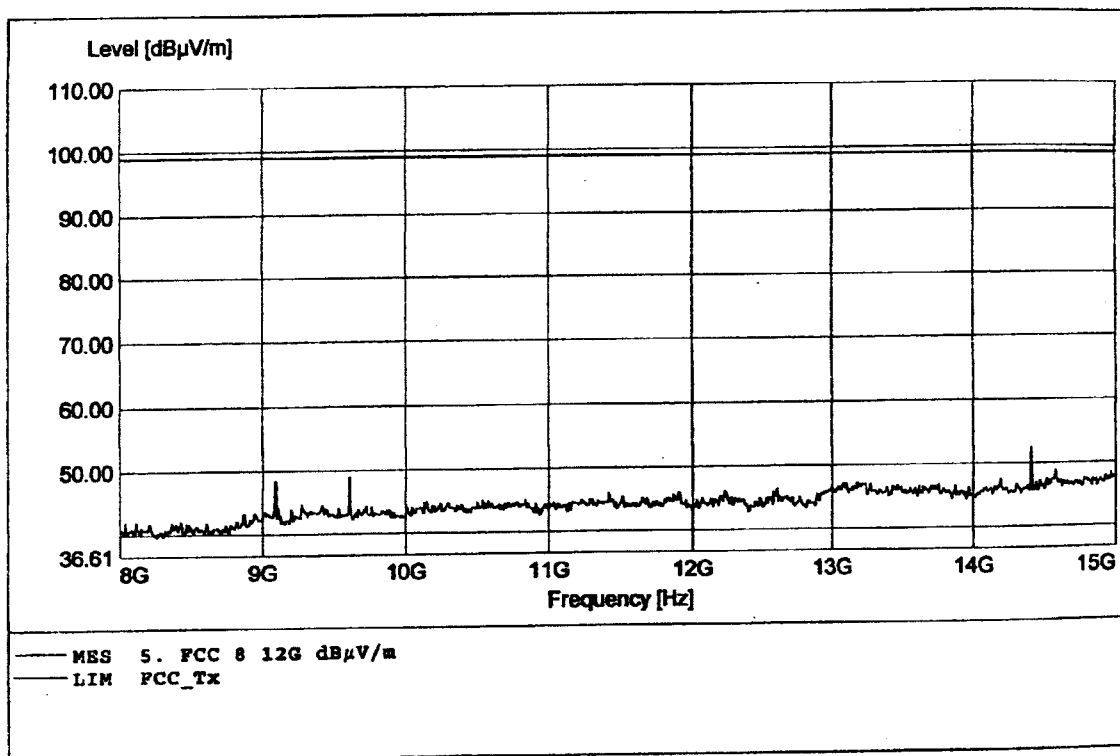

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14401,11MHz Pmax:63,53dBµV/m RBW=1MHz

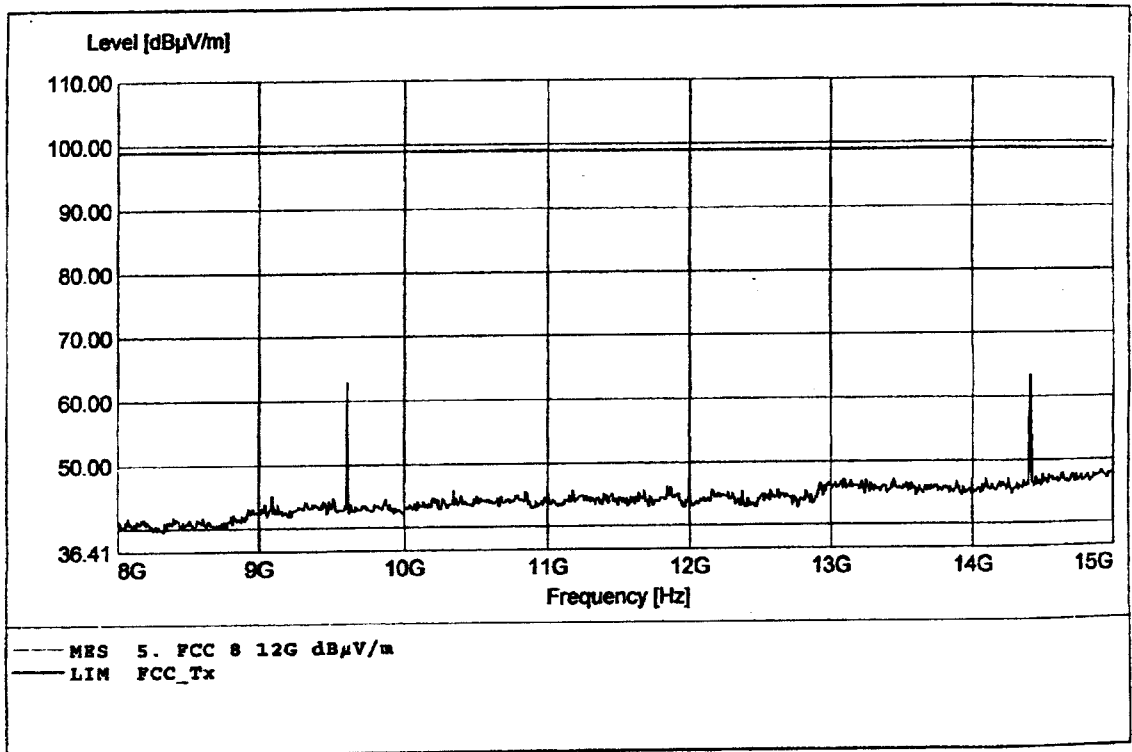

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:9765,55MHz Pmax:62,93dBµV/m RBW=1MHz

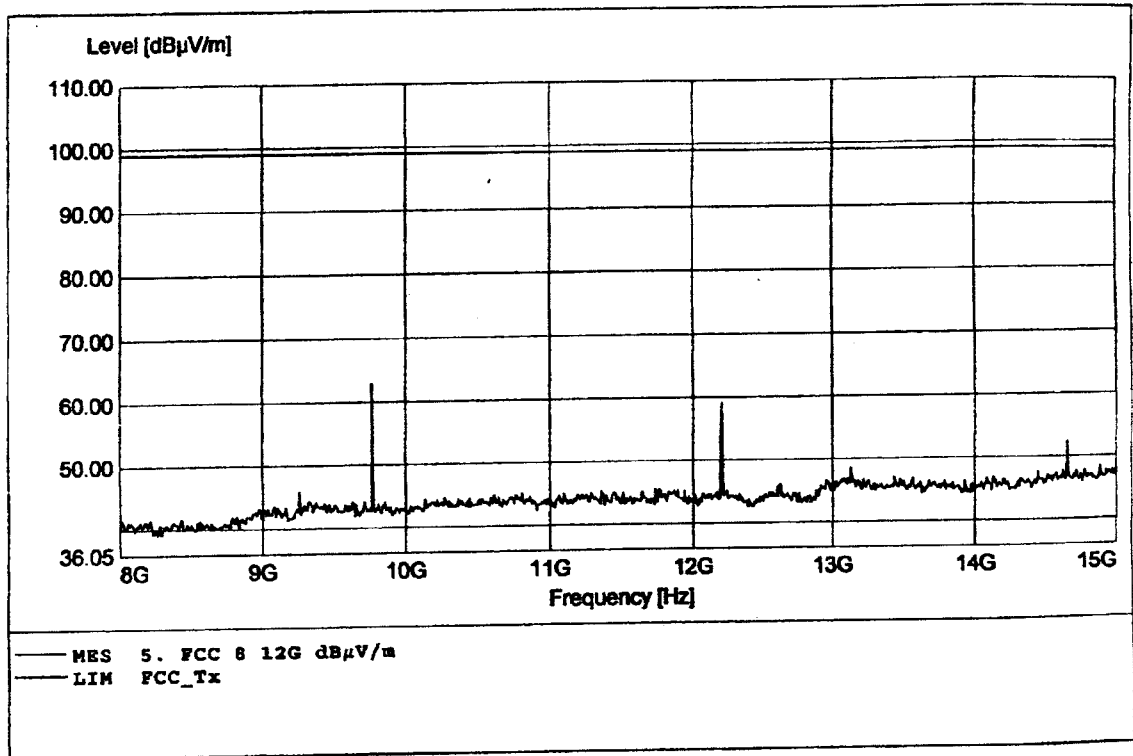

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:9765,07MHz Pmax:61,7dBµV/m RBW=1MHz

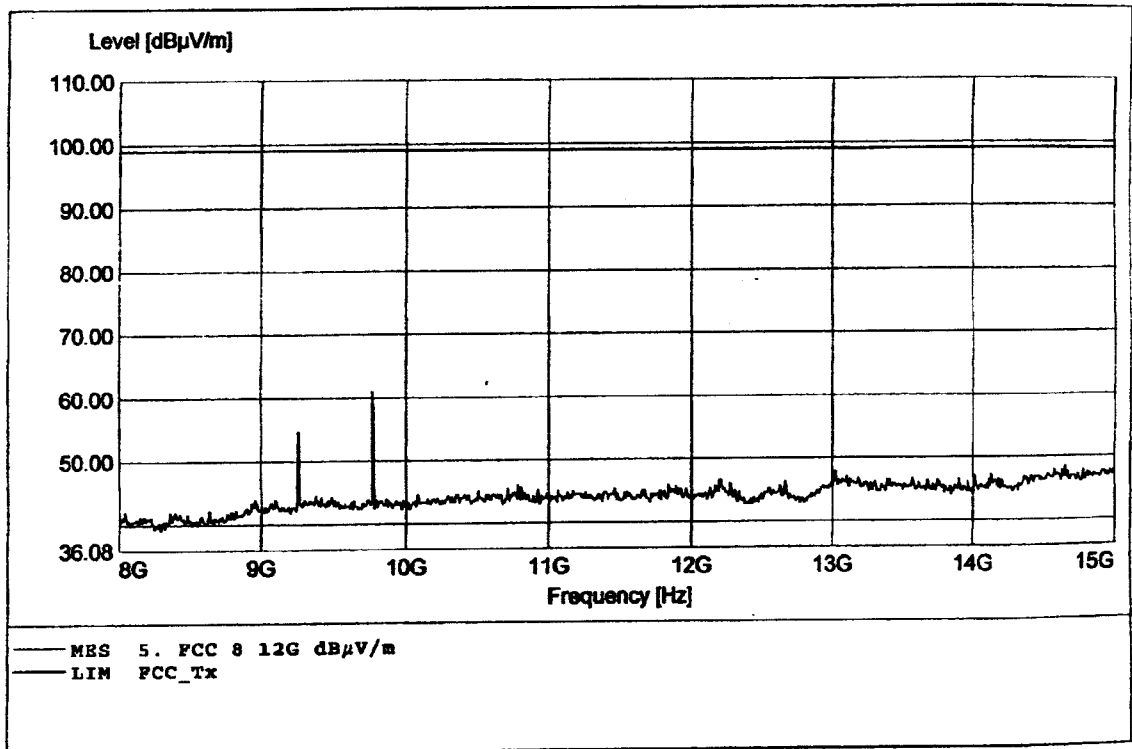

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:9921,11MHz Pmax:64,74dBµV/m RBW=1 MHz

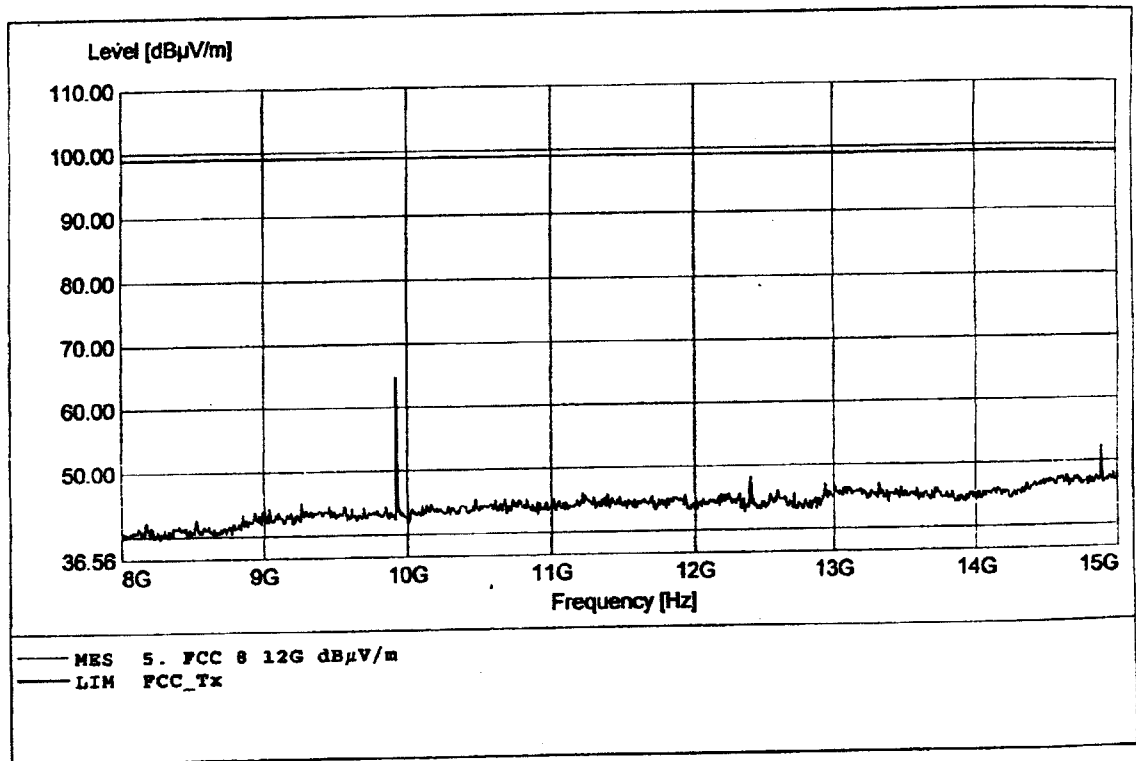

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:9921,11MHz Pmax:67,89dBµV/m RBW=1MHz

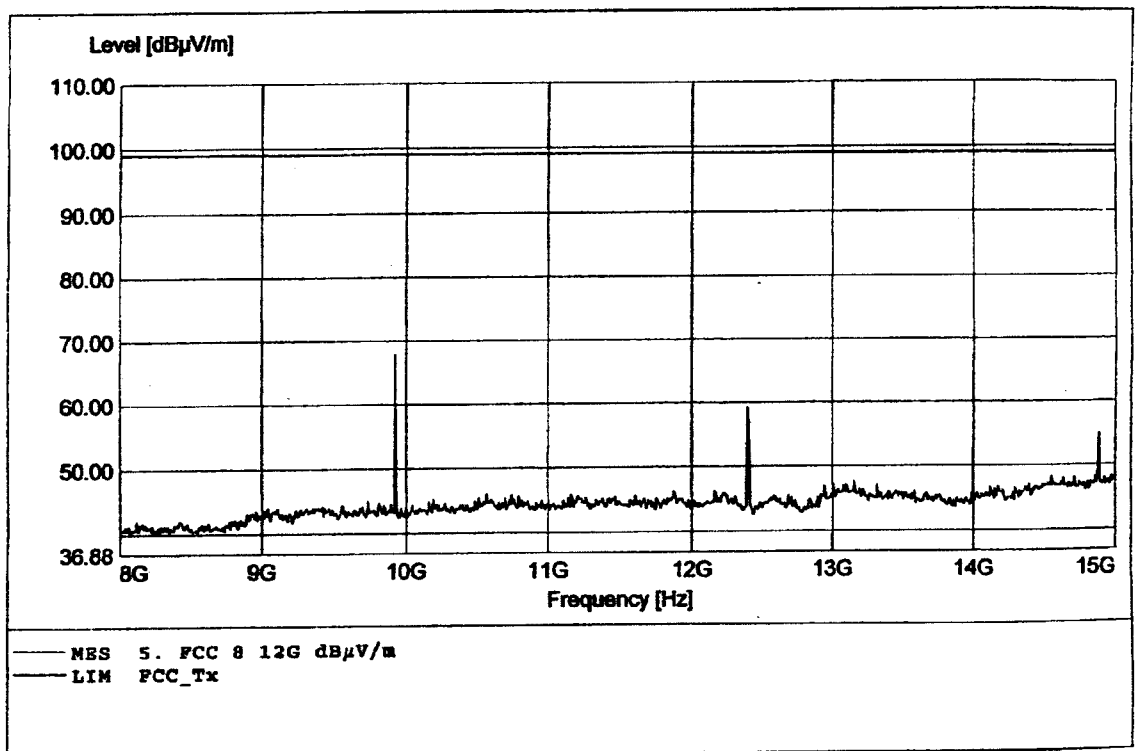

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26410,55MHz Pmax:47,26dB μ V/m RBW=1MHz

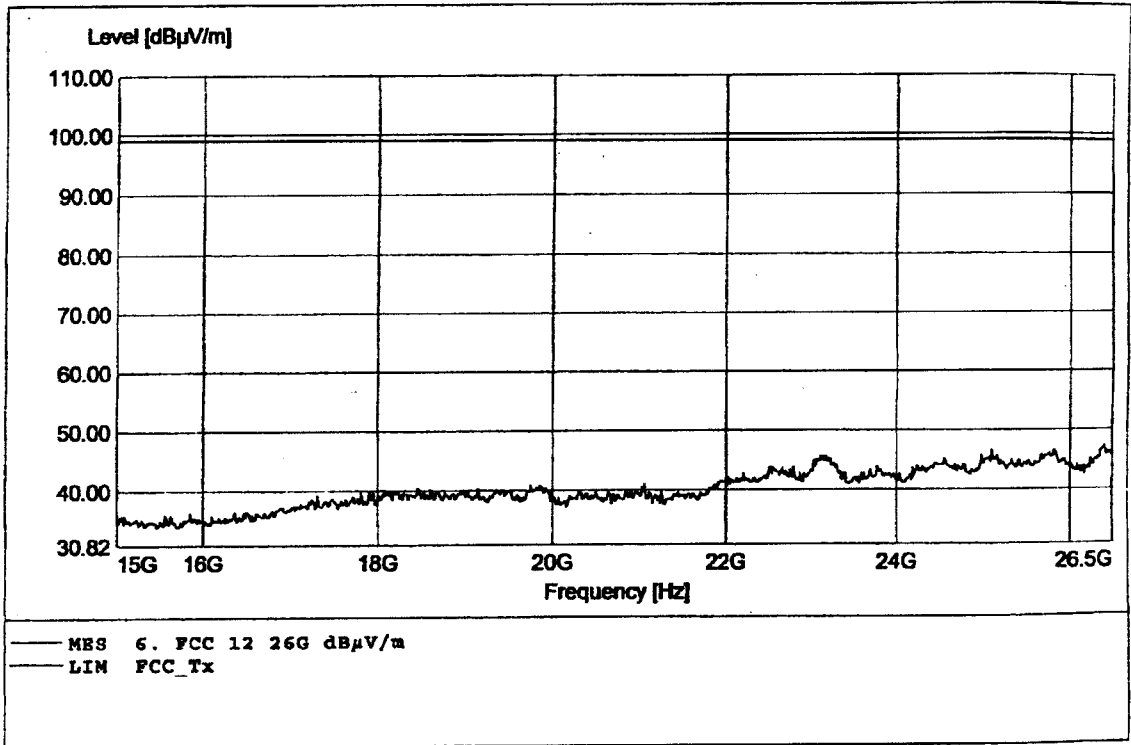

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26423,09MHz Pmax:47,9dBµV/m RBW=1 MHz

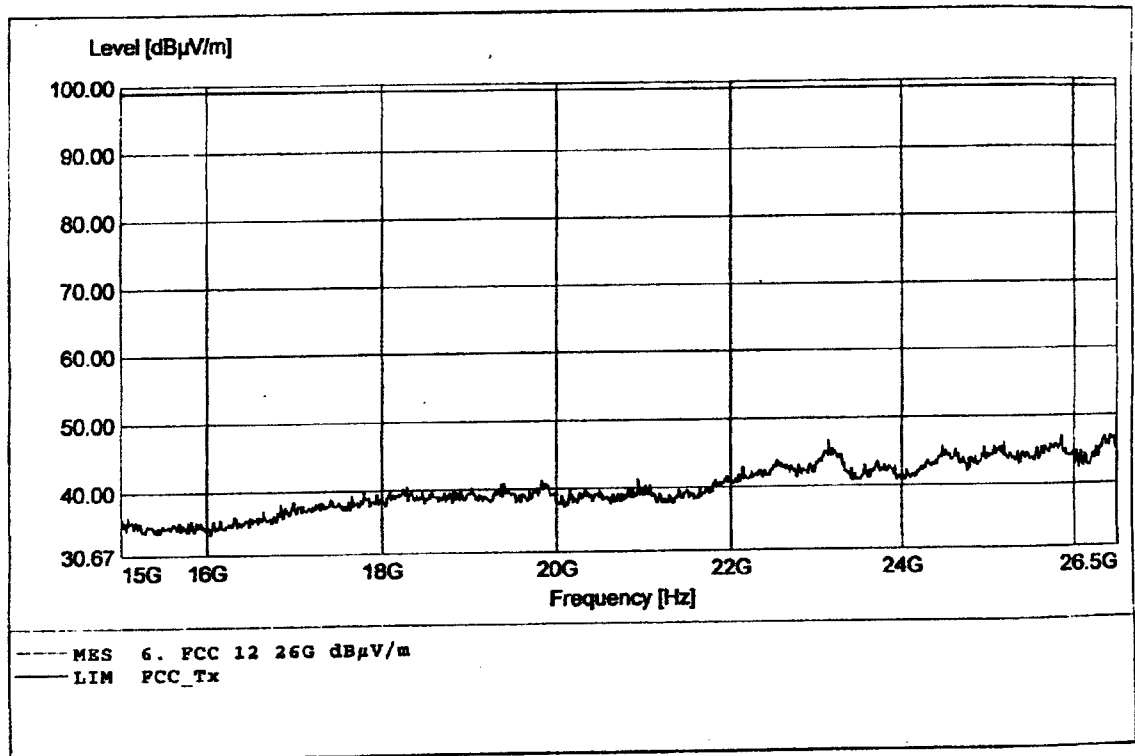

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26410,55MHz Pmax:46,88dBµV/m RBW=1MHz

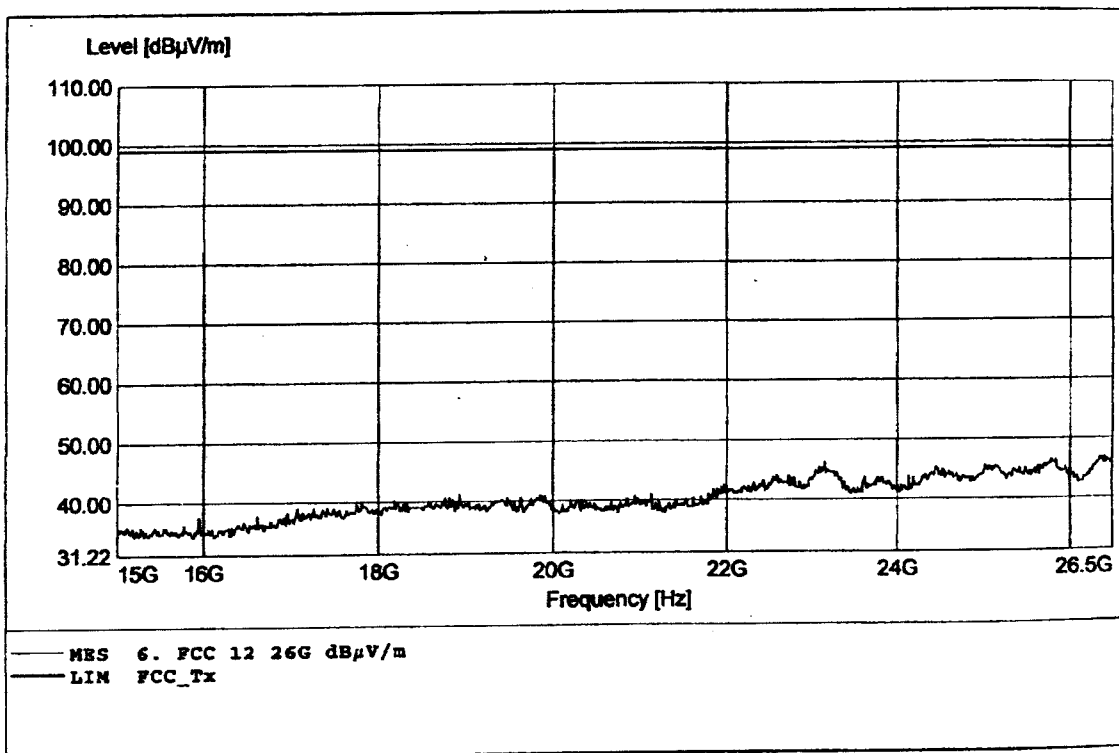

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26372,22MHz Pmax:46,96dBµV/m RBW=1MHz

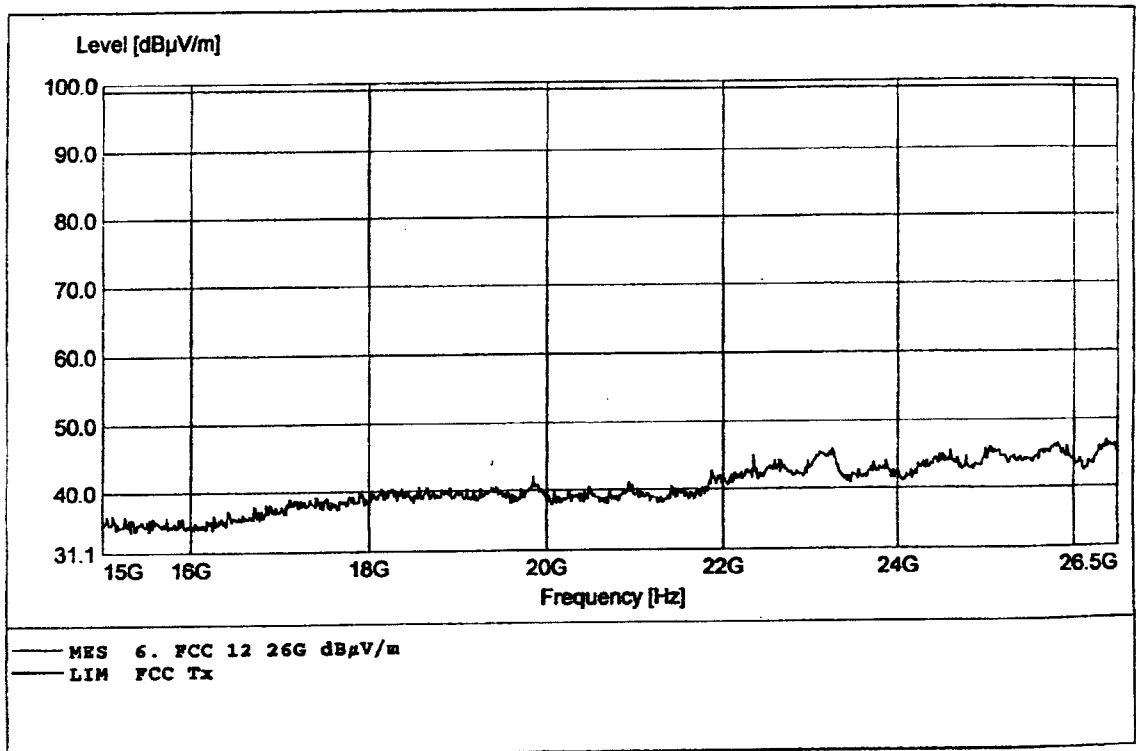

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25746,11MHz Pmax:47,40dB μ V/m RBW=1MHz

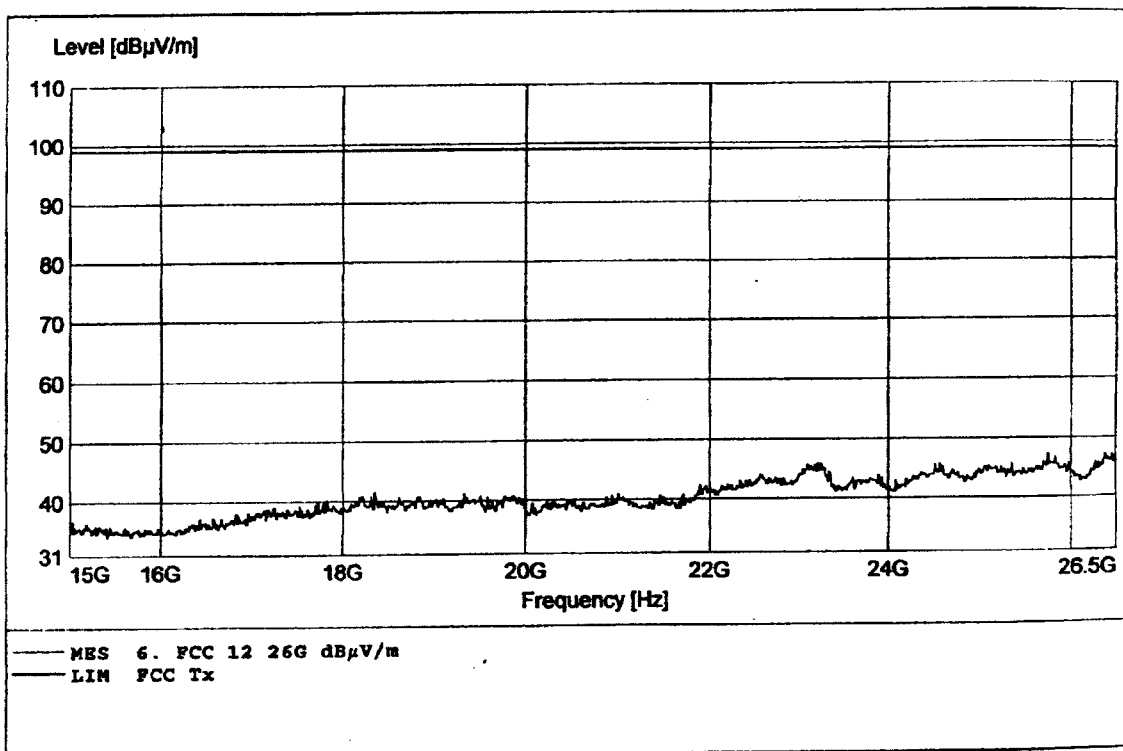

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2.4 GHz Communication System / PP4-2G4
Manufacturer: KIRK telecom A/S

Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 3,6 V DC (accu-pack), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26461,66MHz Pmax:47,34dBµV/m RBW=1MHz

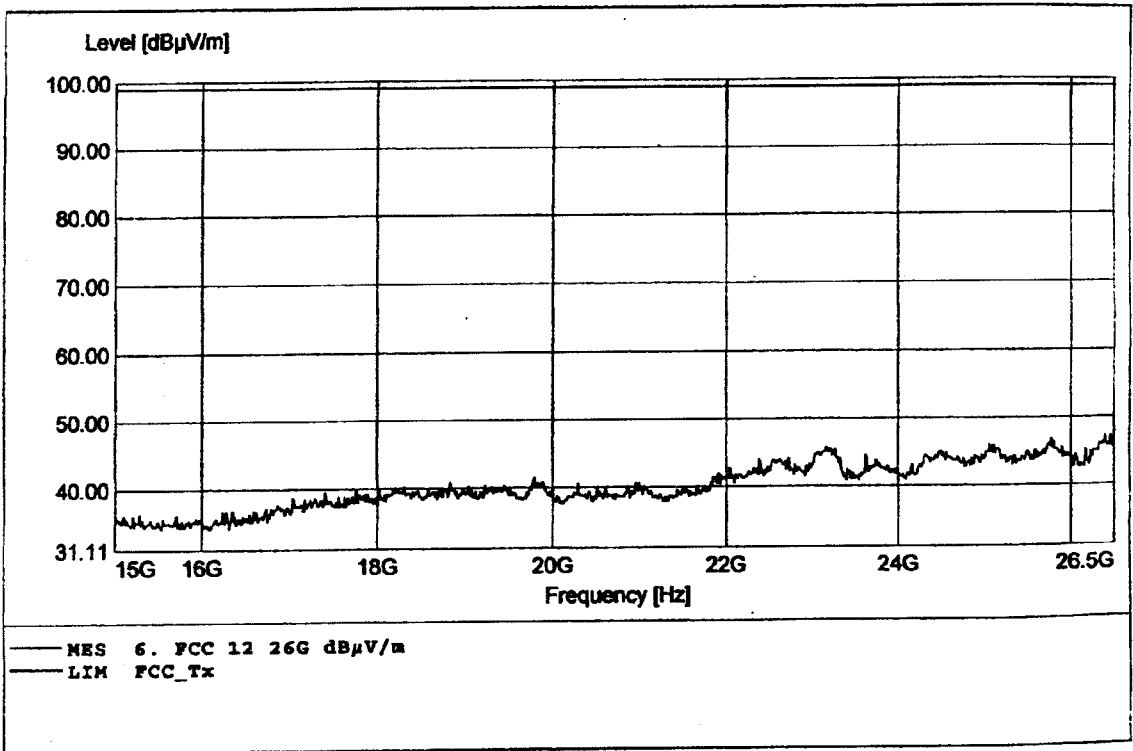



Appendix D

Spurious Emissions conducted - Transmitter operating




Appendix E

Carrier Frequency Separation



Date 10.Nov.'00 Time 09:57:17 Res.Bw 201.3 kHz[imp] Vid.Bw 3 MHz
Ref.Lvl 135.70 dBμV Delta 0.28 dB TG.Lvl off RF.Att 40 dB
CF.Stp 307.200 kHz Unit [dBμV]

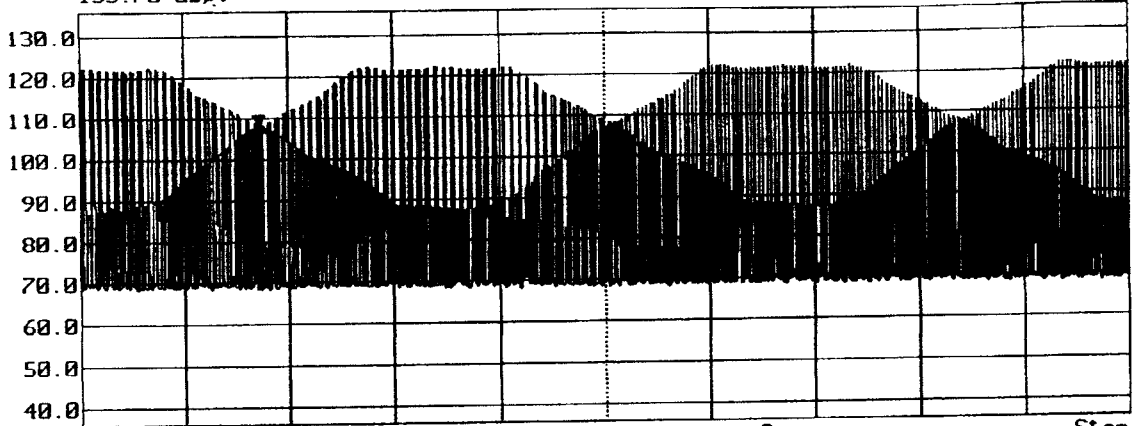

Start 2.44224 GHz Span 3.072 MHz Center 2.443776 GHz Sweep 100 s Stop 2.445312 GHz



Appendix F

Number of Hopping Frequencies



Date 10.Nov.'00 Time 09:09:37
Ref. Lvl
135.70 dBμV

Res. Bw 495.5 kHz [imp] Vid. Bw 3 MHz
TG. Lvl off
CF. Stp 2.176 MHz RF. Att. 40 dB
Unit [dBμV]




Start 2.4 GHz Span 21.76 MHz Center 2.41088 GHz Sweep 100 s Stop 2.42176 GHz



Date 10.Nov.'00 Time 09:43:23
Ref. Lvl
135.70 dBu

Res. Bw 495.5 kHz [imp] Vid. Bw 3 MHz
TG. Lvl off
CF. Stp 2.048 MHz RF. Att 40 dB
Unit [dBu]

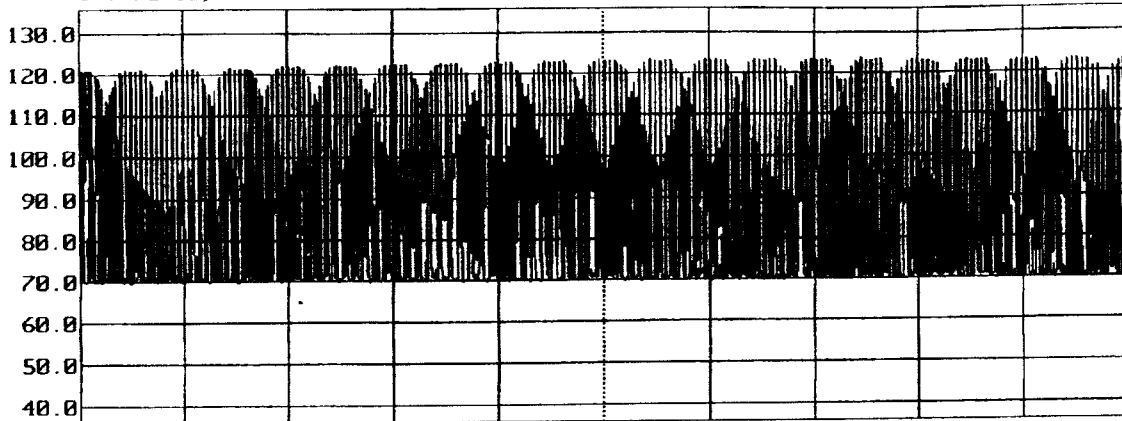


Start 2.42176 GHz Span 20.48 MHz Center 2.432 GHz Sweep 80 s Stop 2.44224 GHz



Date 10.Nov.'00 Time 09:33:22
Ref.Lvl
135.70 dBμV

Res.Bw 495.5 kHz[imp] Vid.Bw 3 MHz
TC.Lvl off
CF.Stp 2.048 MHz RF.Att 40 dB
Unit [dBμV]

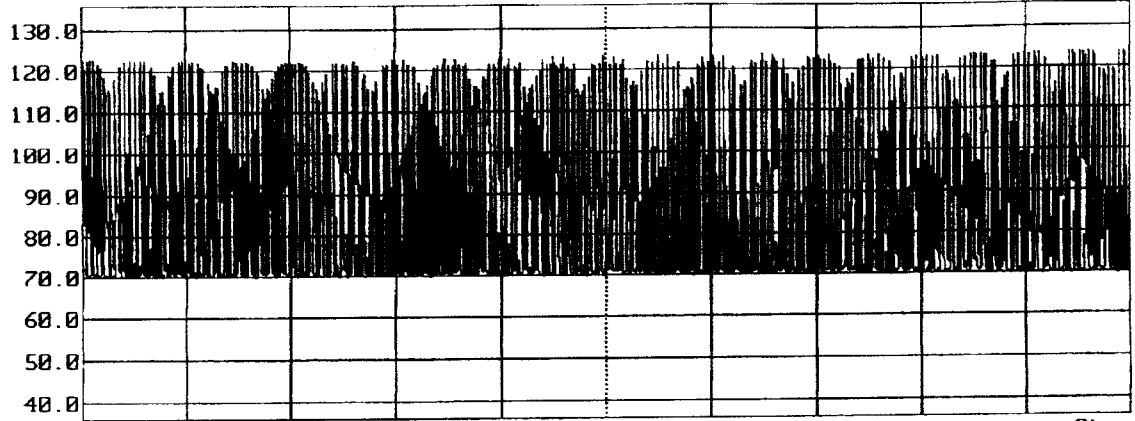


Start 2.44224 GHz Span 20.48 MHz Center 2.45248 GHz Sweep 80 s Stop 2.46272 GHz



Date 10.Nov.'00 Time 09:38:40
Ref.Lvl
135.70 dBμV

Res.Bw 495.5 kHz [impl] Vid.Bw 3 MHz
TC.Lvl off
CF.Stp 2.078 MHz RF.Att 40 dB
Unit [dBμV]

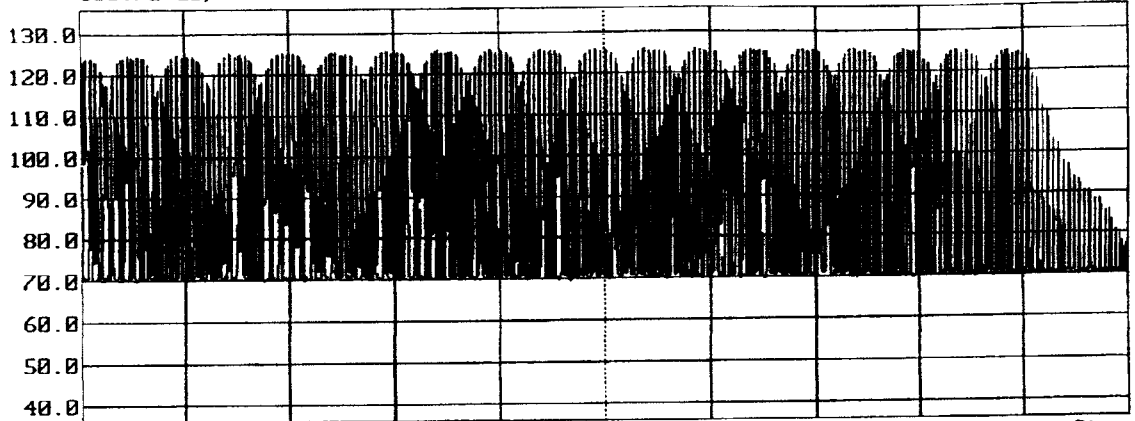


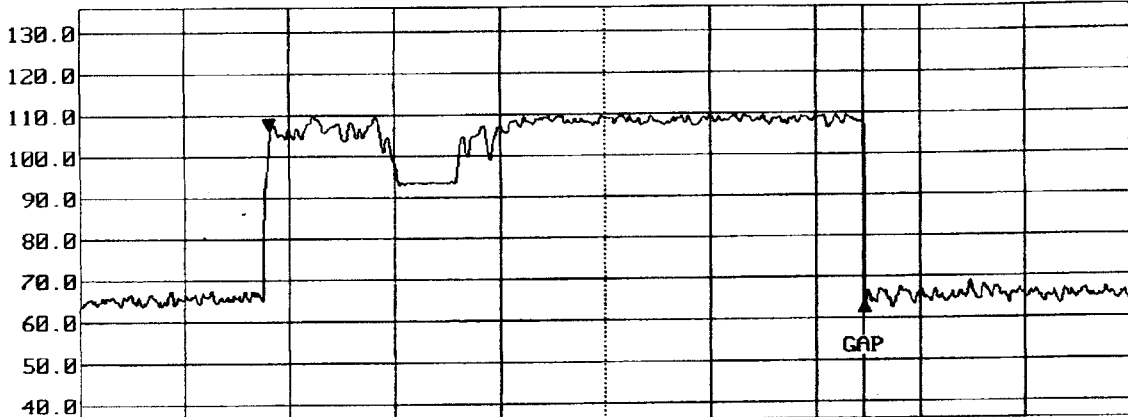
Start 2.46272 GHz Span 20.78 MHz Center 2.47311 GHz Sweep 80 s Stop 2.4835 GHz



Appendix G

Time of Occupancy (Dwell Time)


 Date 10.Nov.'00 TRG Time 10:05:01 Res.Bw 201.3 kHz[imp] Vid.Bw 3 MHz
 Ref.Lvl 135.70 dBμU Delta -42.05 dB TG.Lvl off
 CF.Stp 13.883 kHz RF.Att 40 dB Unit [dBμU]



Span 0 Hz Center 2.443776 GHz Sweep 500 μs




Appendix H

20dB Bandwidth




Date 08.Sep.'10 Time 11:46:26 Res.Bw 10.0 kHz(3dB) Vid.Bw 30 kHz
Ref.Lvl 30.00 dBm Marker 13.07 dBm CF.Stp 200.000 kHz RF.Att 40 dB
Unit [dBm]
F1 2.40080444441 GHz D1 13.07 dBm
F2 2.40179777780 GHz D2 -6.93 dBm
F2-F1 -993.33339 kHz D1-D2 -20.00 dB

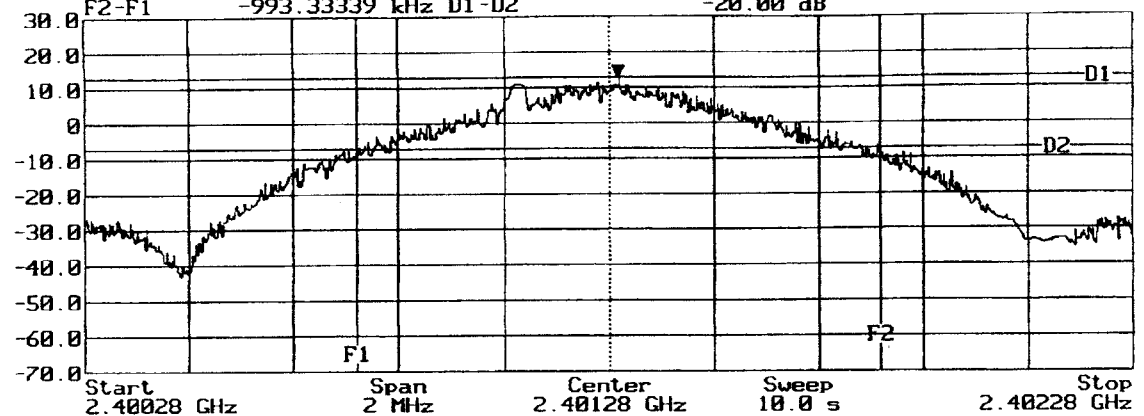




Date 08.Sep.'0 Time 11:32:14 Res.Bw 10.0 kHz(3dB) Vid.Bw 30 kHz
Ref.Lvl 30.00 dBm Marker 11.39 dBm CF.Stp 200.000 kHz RF.Att 40 dB
Unit [dBm]
F1 2.44179277772 GHz D1 11.39 dBm
F2 2.44279166671 GHz D2 -8.61 dBm
F2-F1 -998.88899 kHz D1-D2 -20.00 dB

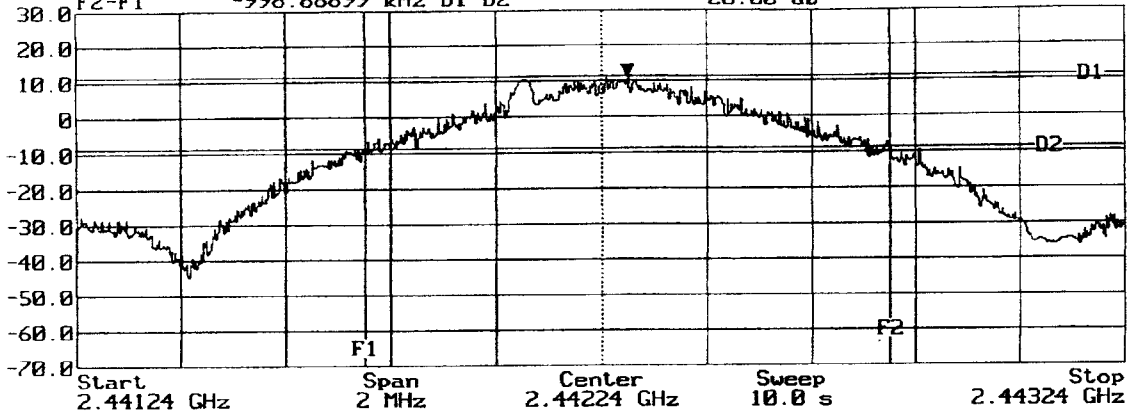



Date 08.Sep.'0 Time 12:45:51 Res.Bw 10.0 kHz(3dB) Vid.Bw 30 kHz
Ref.Lvl 30.00 dBm Marker 11.14 dBm CF.Stp 200.000 kHz RF.Att 40 dB
Unit (dBm)
F1 2.48074977777 GHz D1 11.14 dBm
F2 2.48171200002 GHz D2 -8.86 dBm
F2-F1 -962.22225 kHz D1-D2 -20.00 dB

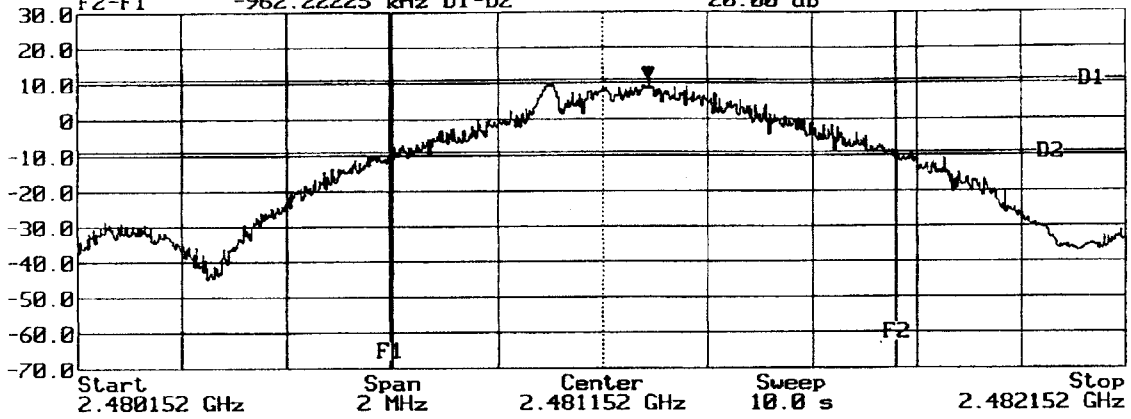




Appendix I

Band-edge Compliance of RF Emissions




Date 08.Sep.'10 Time 12:34:09 Res.Bw 100.0 kHz(3dB) Vid.Bw 300 kHz
Ref.Lvl 30.00 dBm Marker 18.37 dBm CF.Stp 1.000 MHz RF.Att 40 dB
Unit [dBm]
F1 2.4000000000 GHz D1 18.37 dBm
F2 2.406644447 GHz D2 -1.58 dBm
F2-F1 -664.4447 kHz D1-D2 -19.95 dB

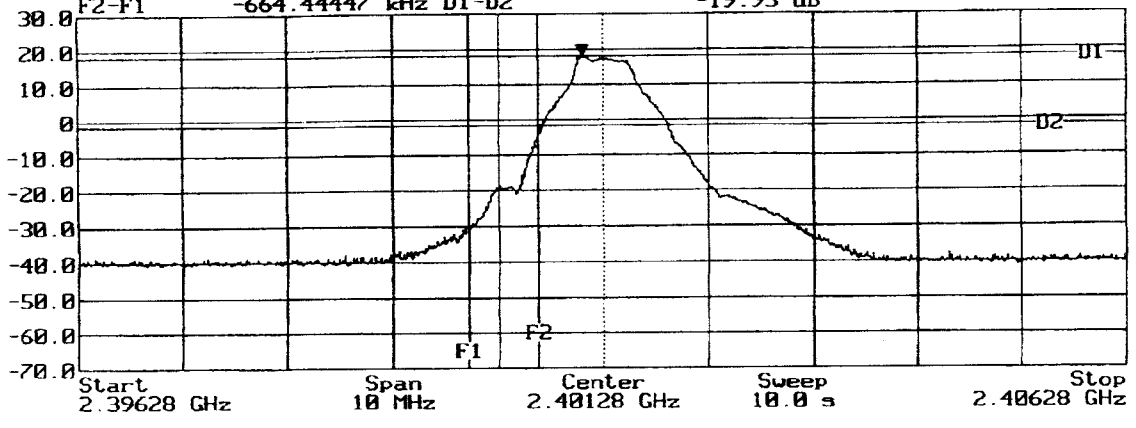



Date 08.Sep.'10 Time 12:40:26 Res.Bw 100.0 kHz(3dB) Vid.Bw 300 kHz
Ref.Lvl 30.00 dBm Marker 16.27 dBm CF.Stp 1.000 MHz RF.Att 40 dB
Unit (dBm)
F1 2.48350000000 GHz D1 16.27 dBm
F2 2.48184088891 GHz D2 -3.73 dBm
F2-F1 1.65911109 MHz D1-D2 -20.00 dB

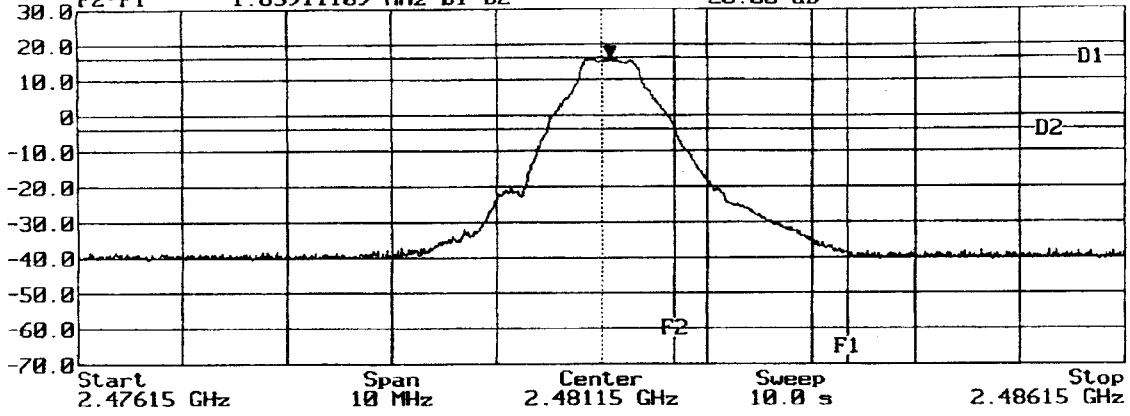



Appendix J

Conducted Measurement at (AC) Power Line