

## Appendix R

Emissions inside and outside the sub-band

### FCC Part 15.323(d.2) In-band unwanted emission

#### Testprocedure ANSI 63.17-1998 6.1.6.1 UPCS

EUT	DECT PP, Portable Part
Model	PP6N20 1G9
Applicant	KIRK telecom A/S
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.1 In-band unwanted emission
	1.45MHz



In-band unwanted emis

\*RBW 10 kHz


\*VBW 30 kHz

\*SWT 23 s

Ref 10 dBm

\*Att 20 dB

1 PK  
MAXH

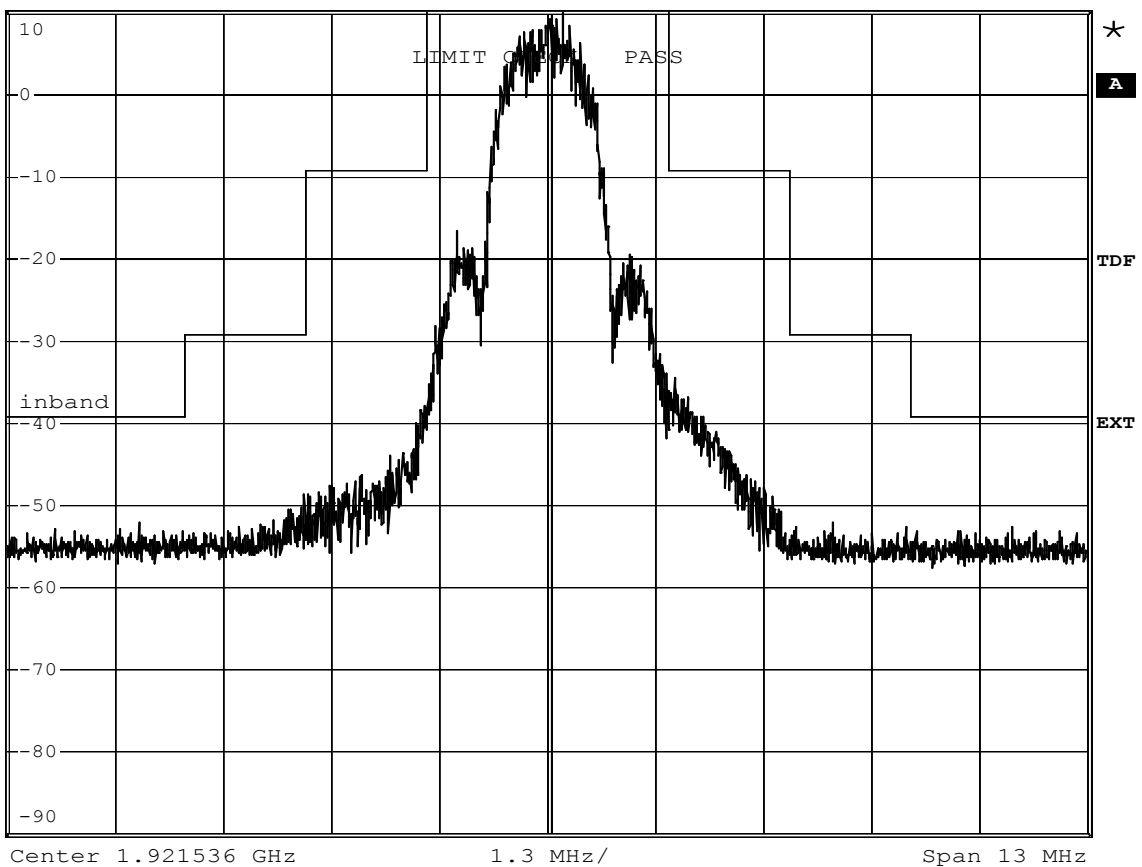


Comment: Ansi C63.17-1998 6.1.6.1  
Date: 27.SEP.2006 12:54:29

Measurement diagram

## FCC Part 15.323(d.2) In-band unwanted emission

### Testprocedure ANSI 63.17-1998 6.1.6.1 UPCS

EUT	DECT PP, Portable Part
Model	PP6N20 1G9
Applicant	KIRK telecom A/S
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.1 In-band unwanted emission
	1.45MHz

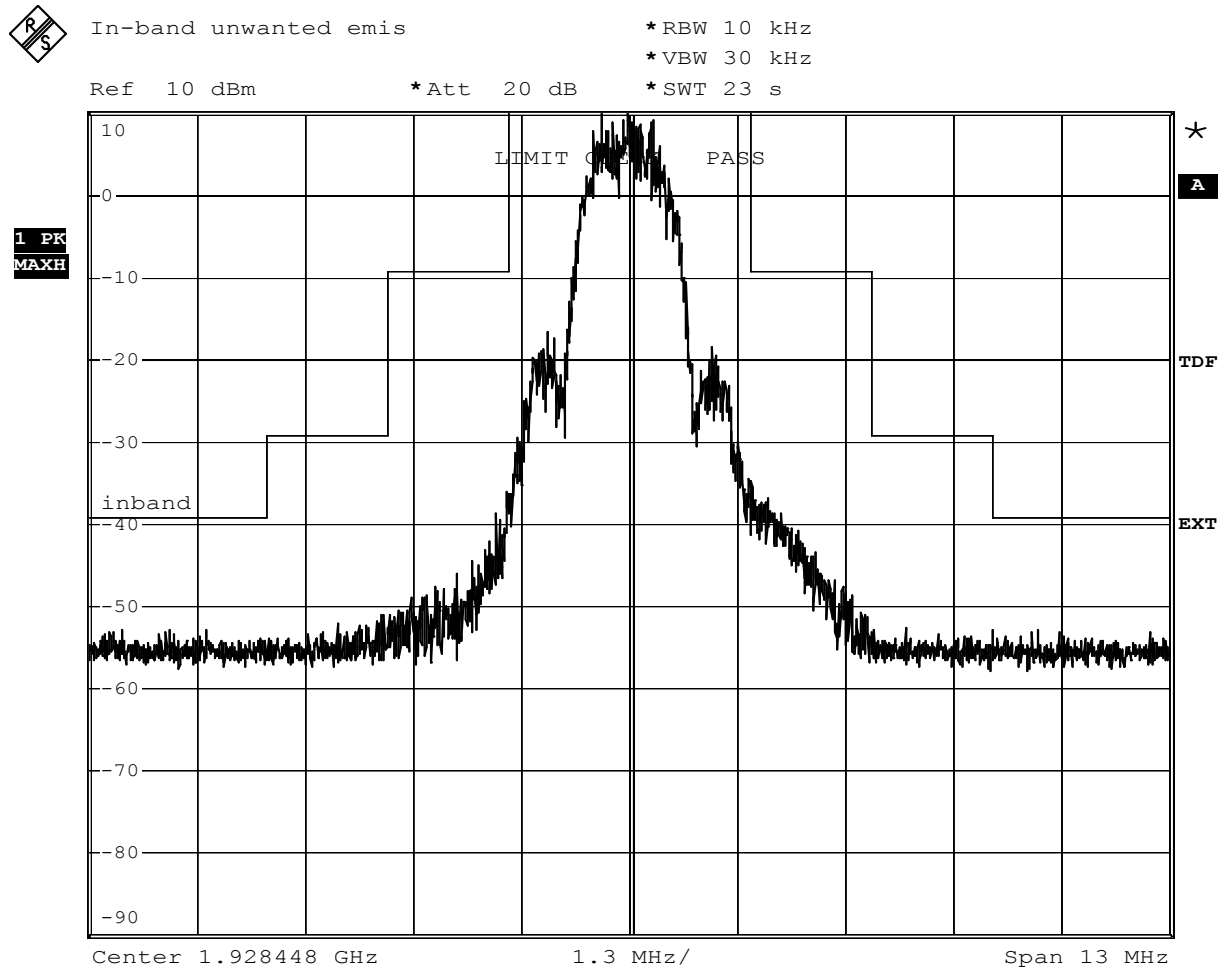

Comment: Ansi C63.17-1998 6.1.6.1  
 Date: 27.SEP.2006 12:59:45

Measurement diagram

### FCC Part 15.323(d.1) Out-of-band emission

#### Testprocedure ANSI 63.17-1998 6.1.6.2 UPCS

EUT	DECT PP, Portable Part
Model	PP6N20 1G9
Applicant	KIRK telecom A/S
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.2 Out-of-band emission


measurement on the lowest carrier  
Carrier=1921.536MHz



Out-of-band emission

\* RBW 10 kHz  
\* VBW 30 kHz  
\* SWT 23 s

Ref 20 dBm      \*Att 30 dB

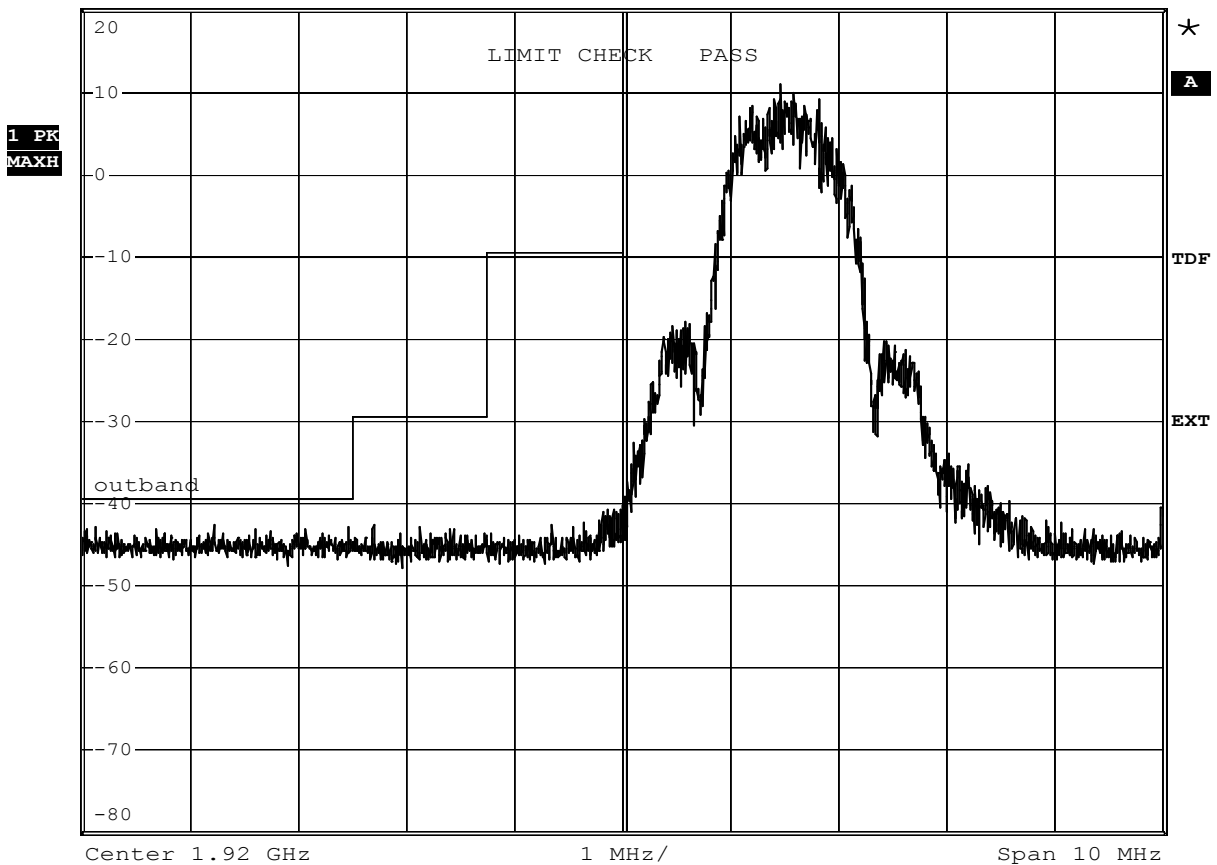

Comment: Ansi C63.17-1998 6.1.6.2  
Date: 27.SEP.2006 13:01:35

Measurement diagram

### FCC Part 15.323(d.1) Out-of-band emission

#### Testprocedure ANSI 63.17-1998 6.1.6.2 UPCS

EUT	DECT PP, Portable Part
Model	PP6N20 1G9
Applicant	KIRK telecom A/S
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.2 Out-of-band emission


measurement on the highest carrier  
Carrier=1928.448MHz



Out-of-band emission

\* RBW 10 kHz  
\* VBW 30 kHz  
\* SWT 23 s

Ref 20 dBm      \*Att 30 dB

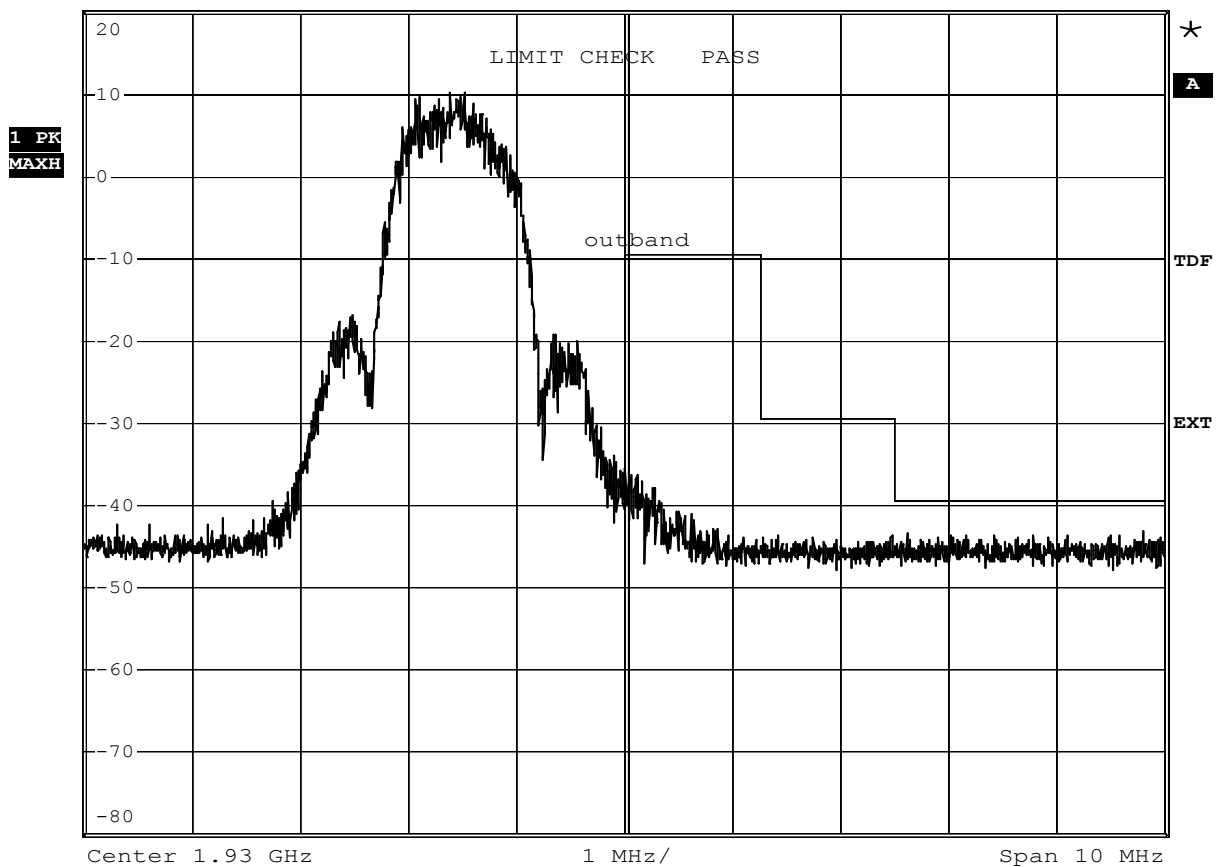


Comment: Ansi C63.17-1998 6.1.6.2  
Date: 27.SEP.2006 13:02:58

Measurement diagram

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116,  
Comment 2: Freq:198.867MHz Pmax:-61.25dBm RBW: 100 kHz

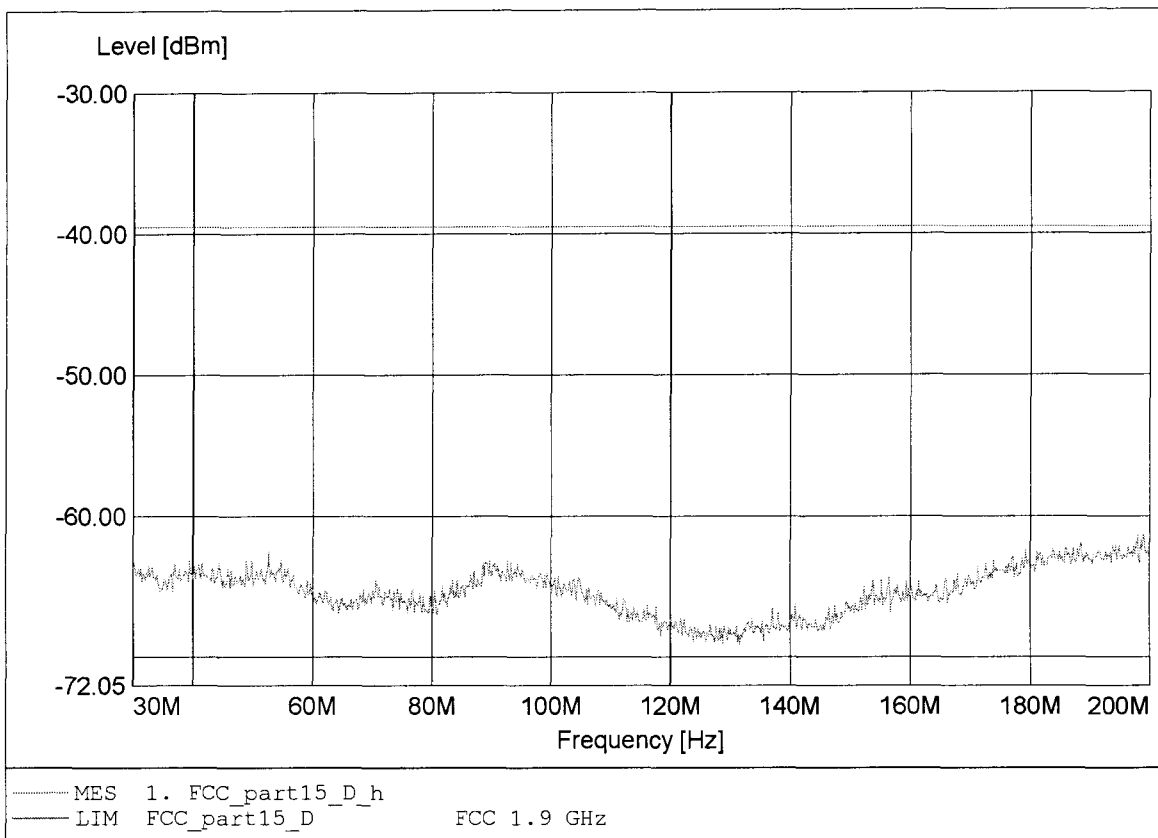

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116,  
Comment 2: Freq:176.767MHz Pmax:-55.33dBm RBW: 100 kHz

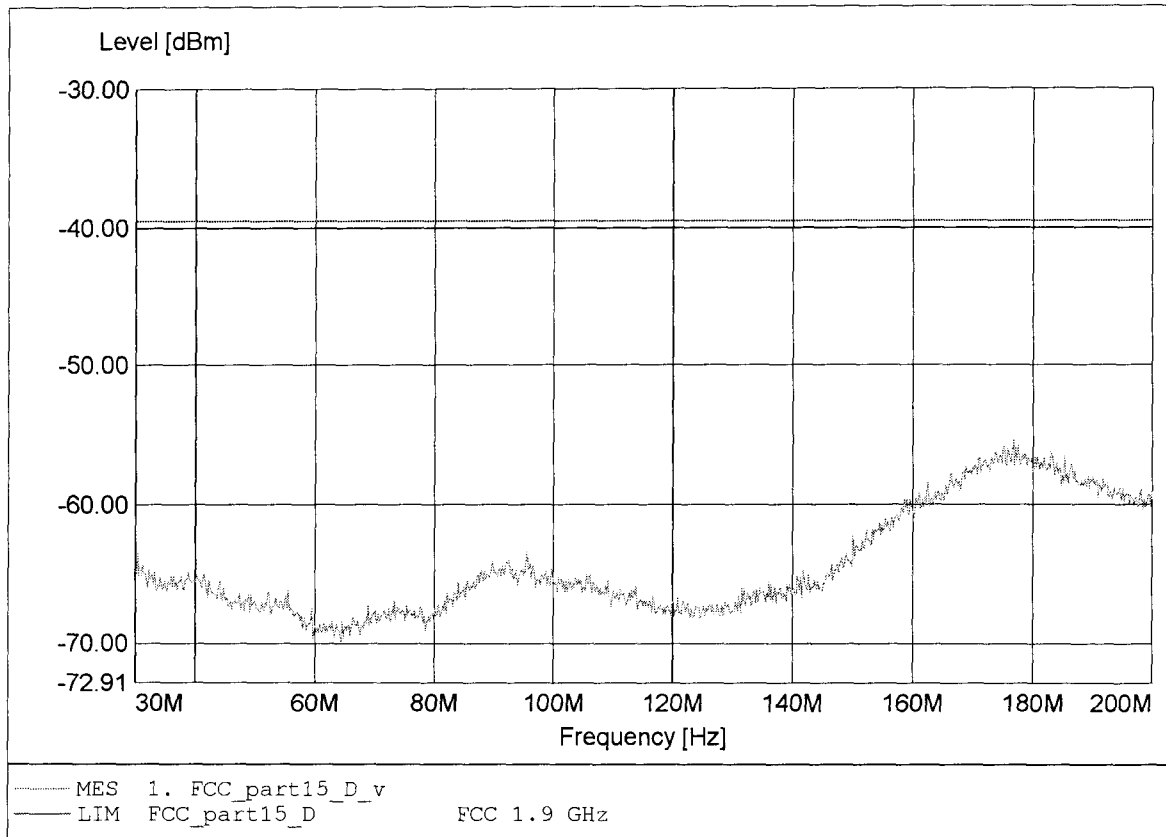

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**

Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Comment 2: Freq: 897.778MHz Pmax: -74.69dBm RBW: 100 kHz

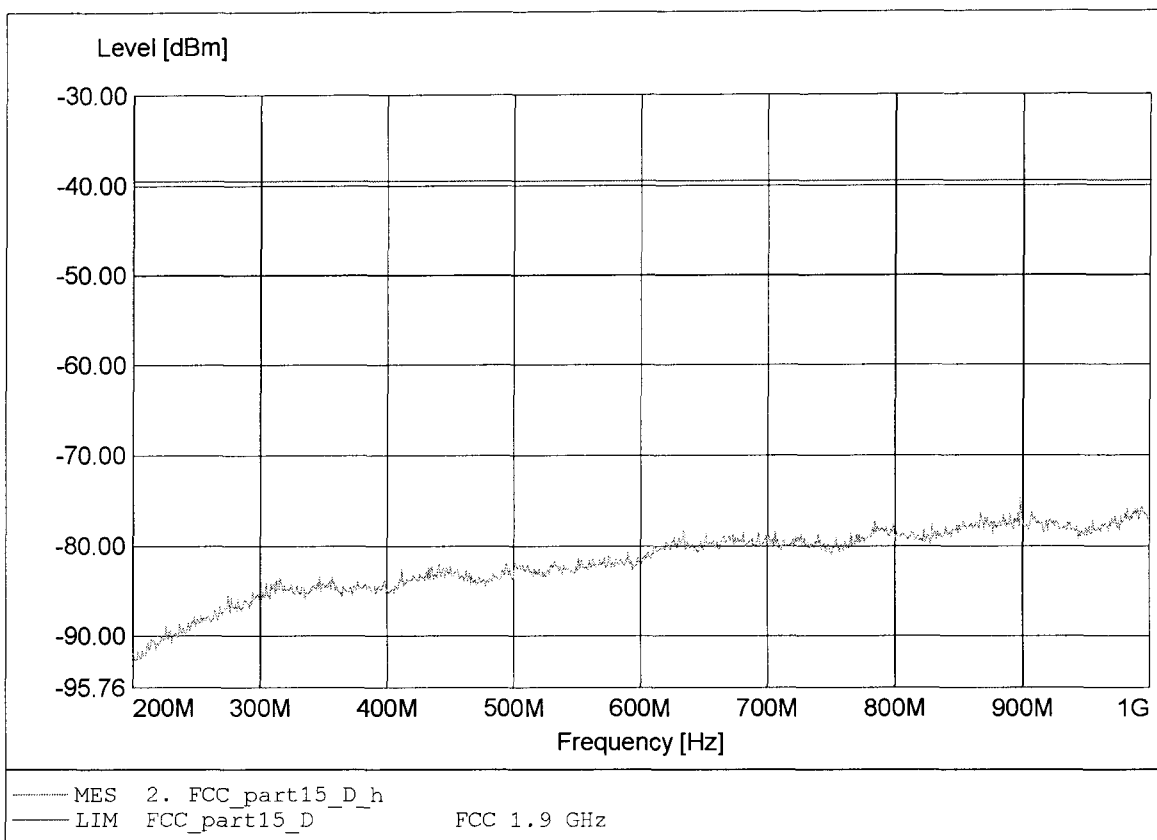




**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 44 ; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Comment 2: Freq: 995.556MHz Pmax: -73.26dBm RBW: 100 kHz

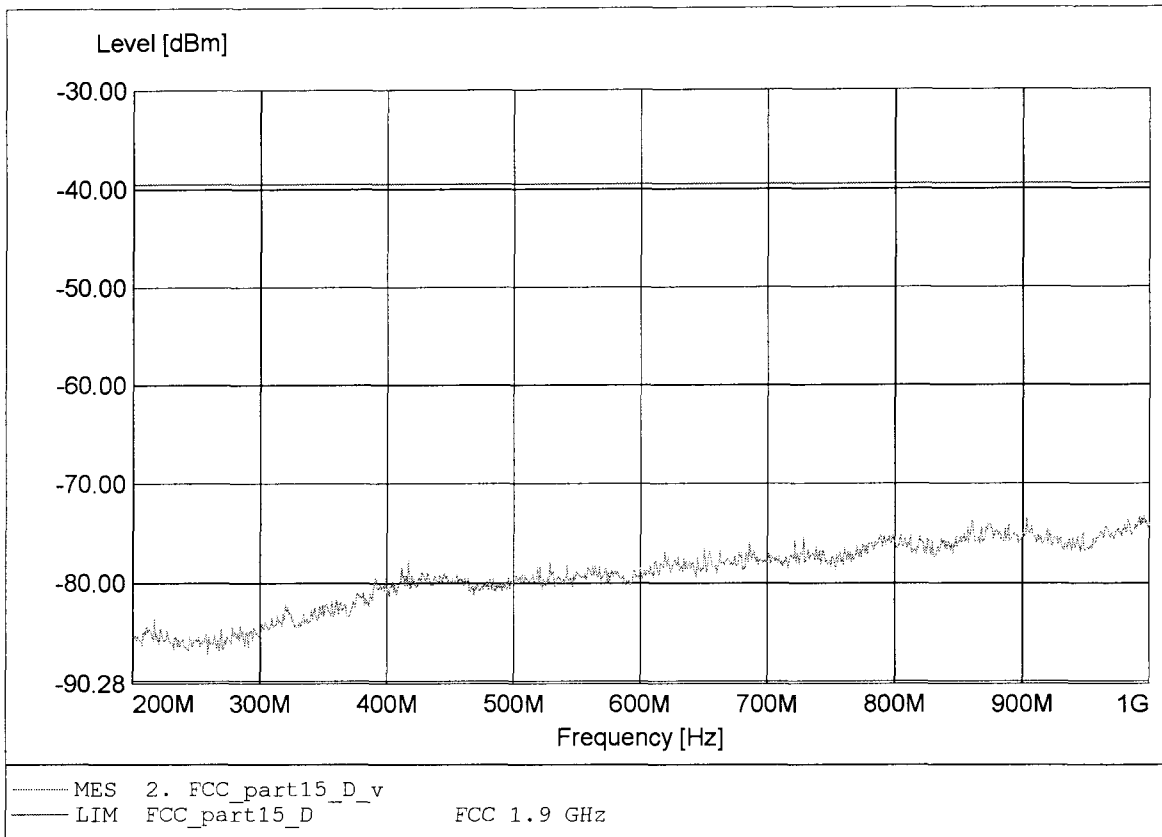

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:1.915GHz Pmax:-63.80dBm RBW: 100 kHz

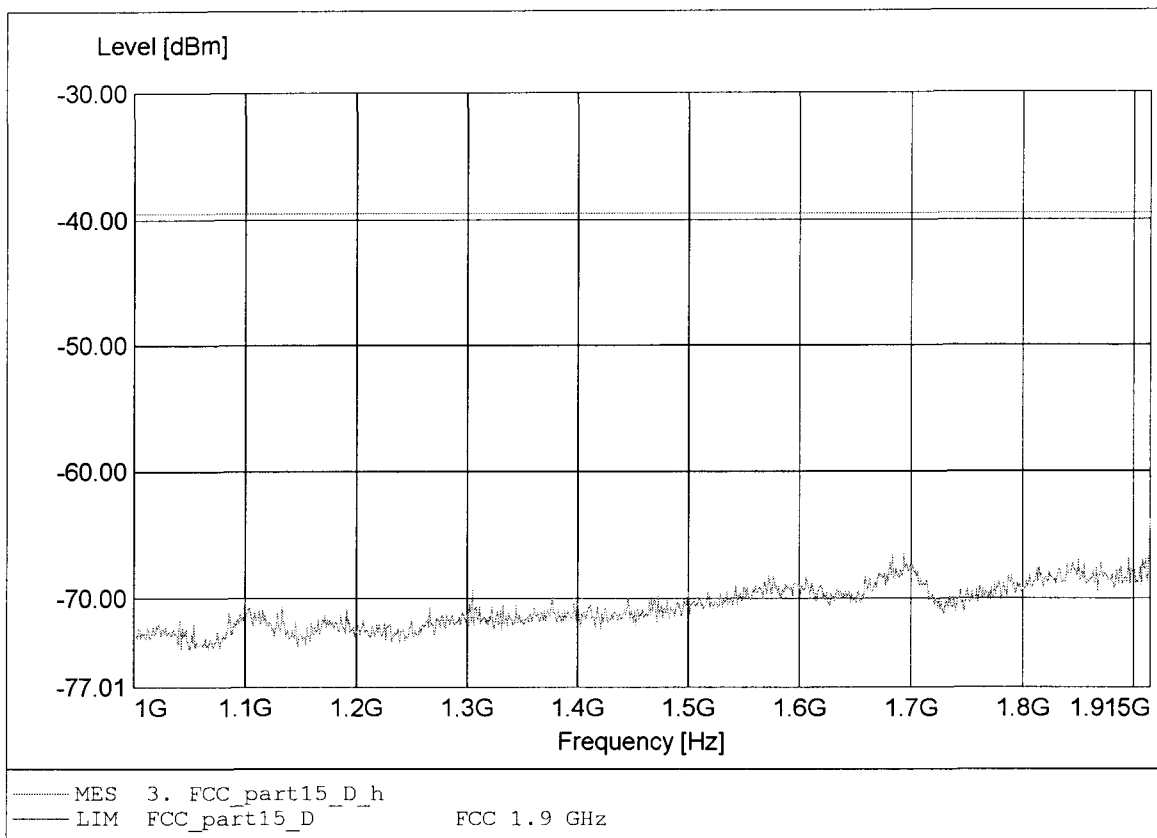

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 1.915GHz Pmax: -64.05dBm RBW: 100 kHz

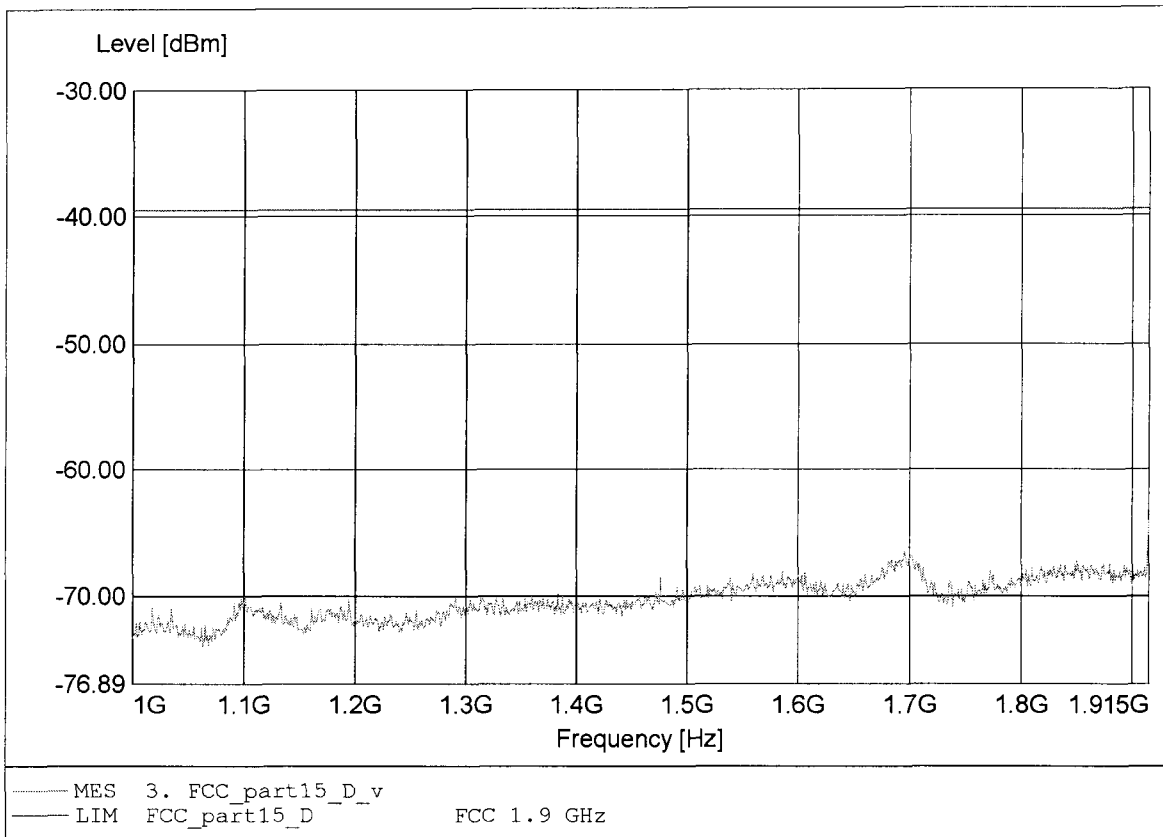

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:1.930GHz Pmax:-44.26dBm RBW: 10 kHz

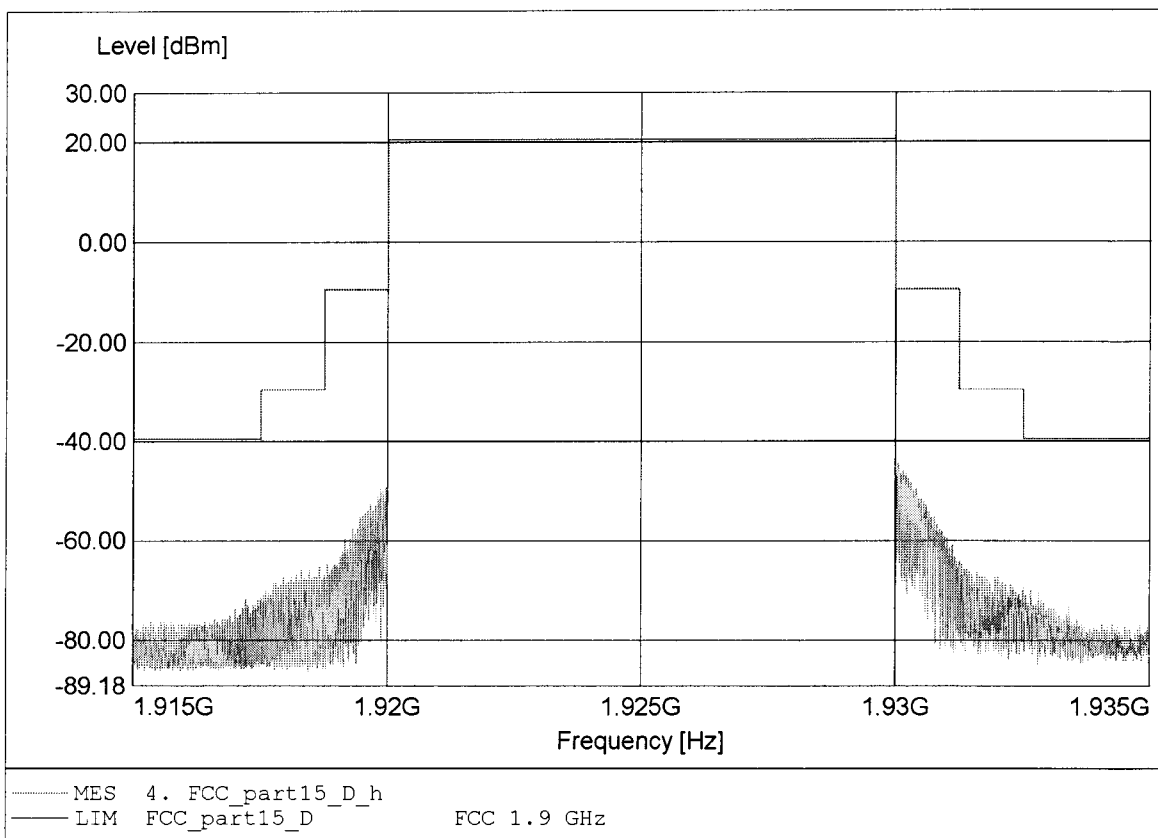

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 1.930GHz Pmax: -46.72dBm RBW: 10 kHz

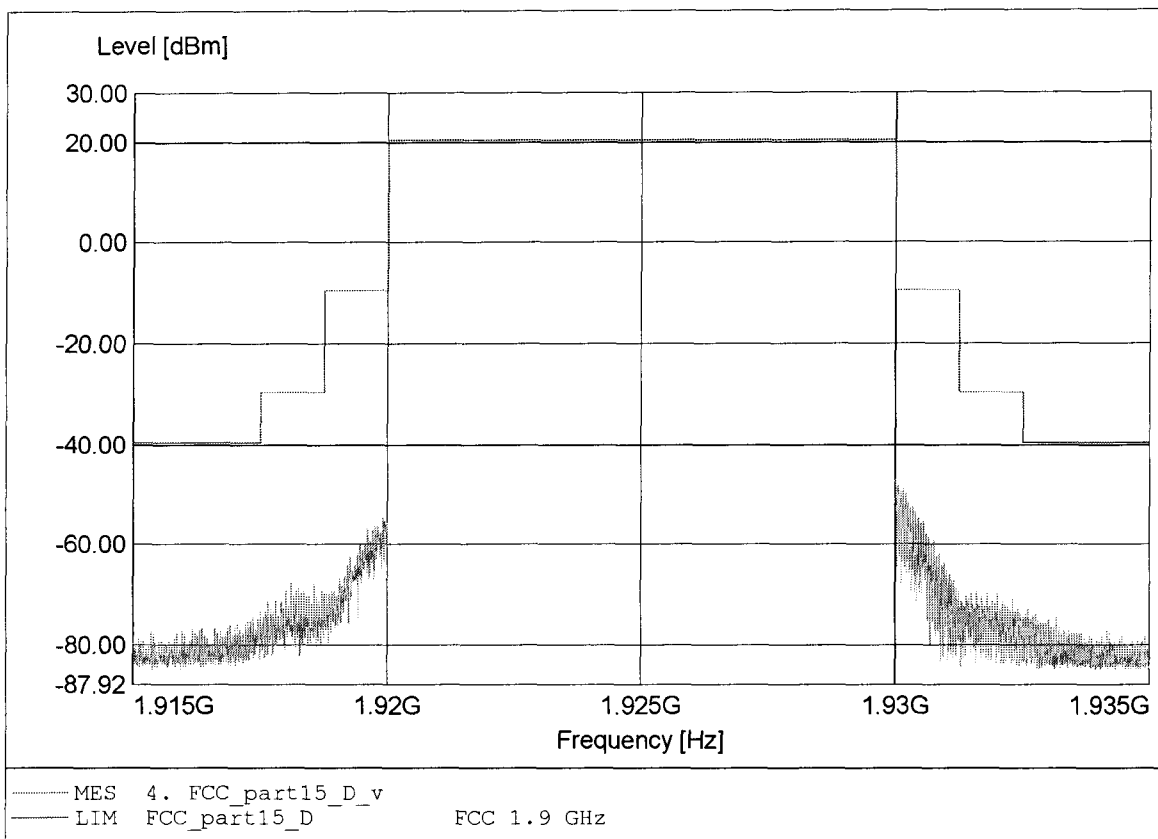

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 3.858GHz Pmax: -47.89dBm RBW: 100 kHz

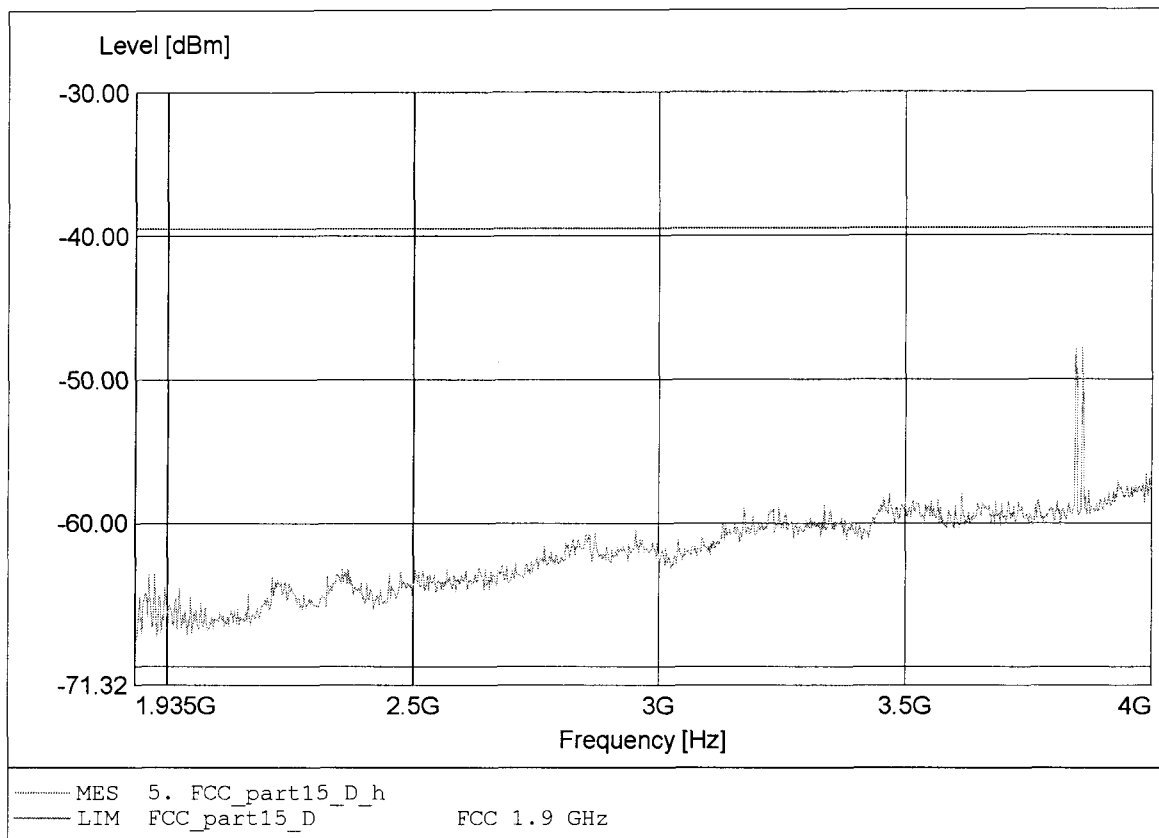

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 3.858GHz Pmax: -44.25dBm RBW: 100 kHz

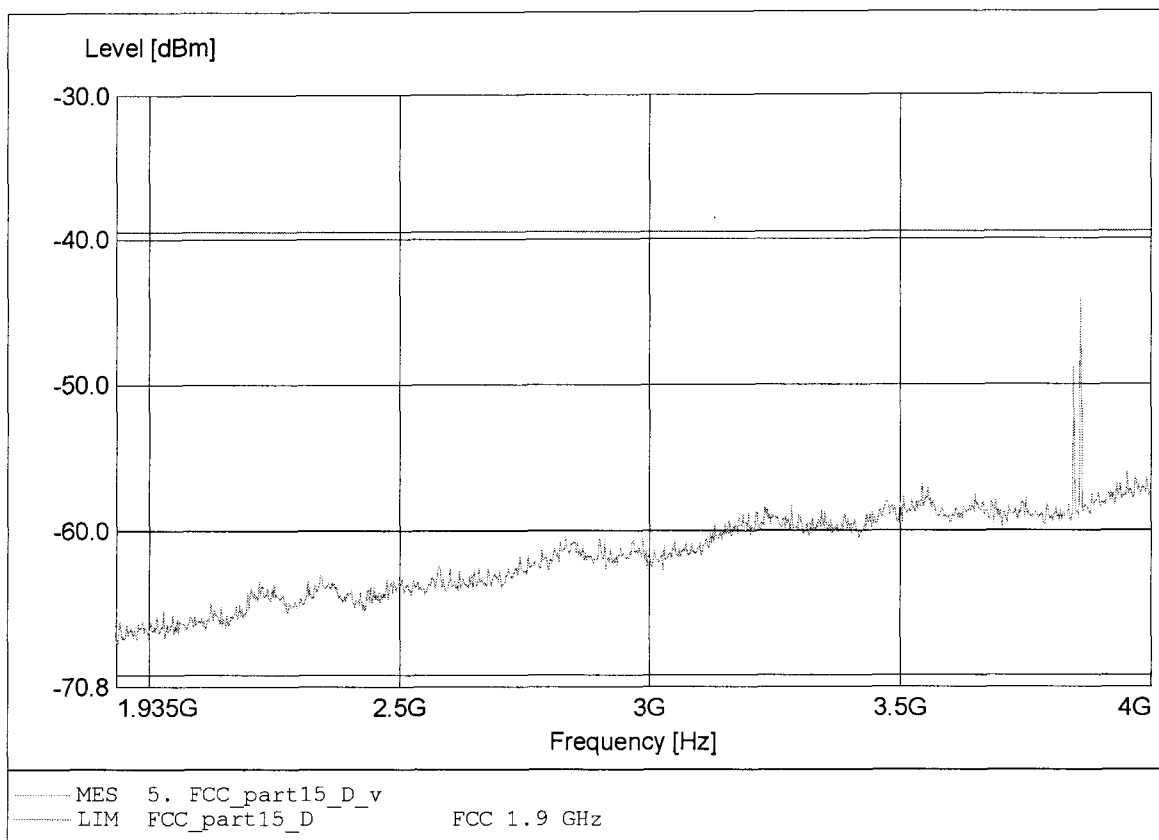

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**

Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:3.842GHz Pmax:-49.66dBm RBW:10 kHz

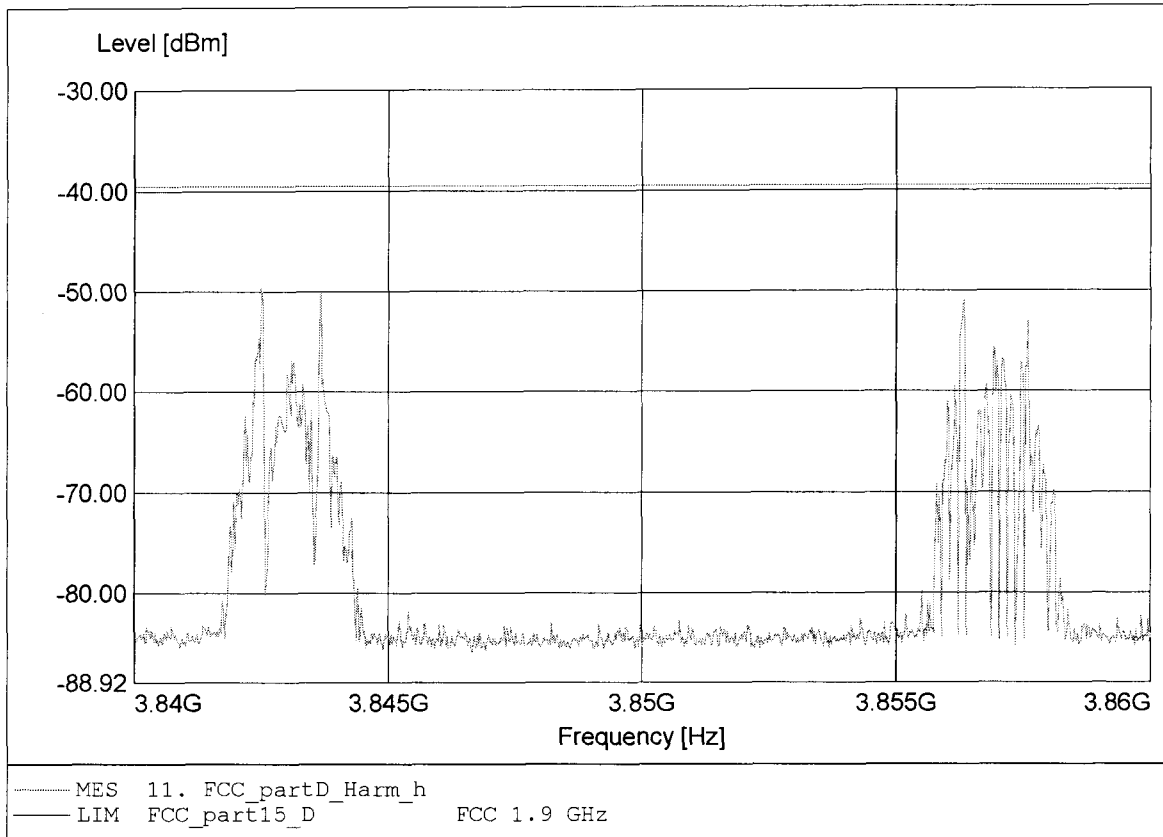




**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 3.856GHz Pmax: -52.21dBm RBW: 10 kHz

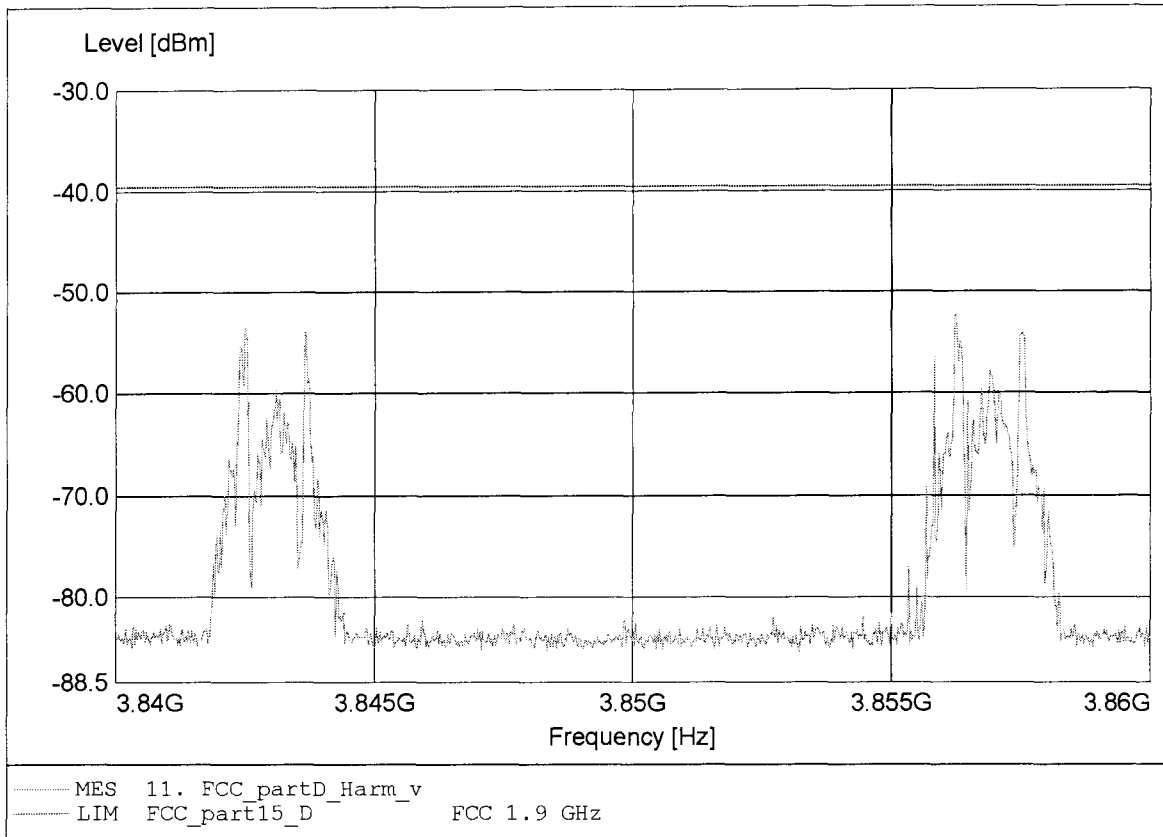

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP,Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:5.784GHz Pmax:-63.47dBm RBW:10 kHz

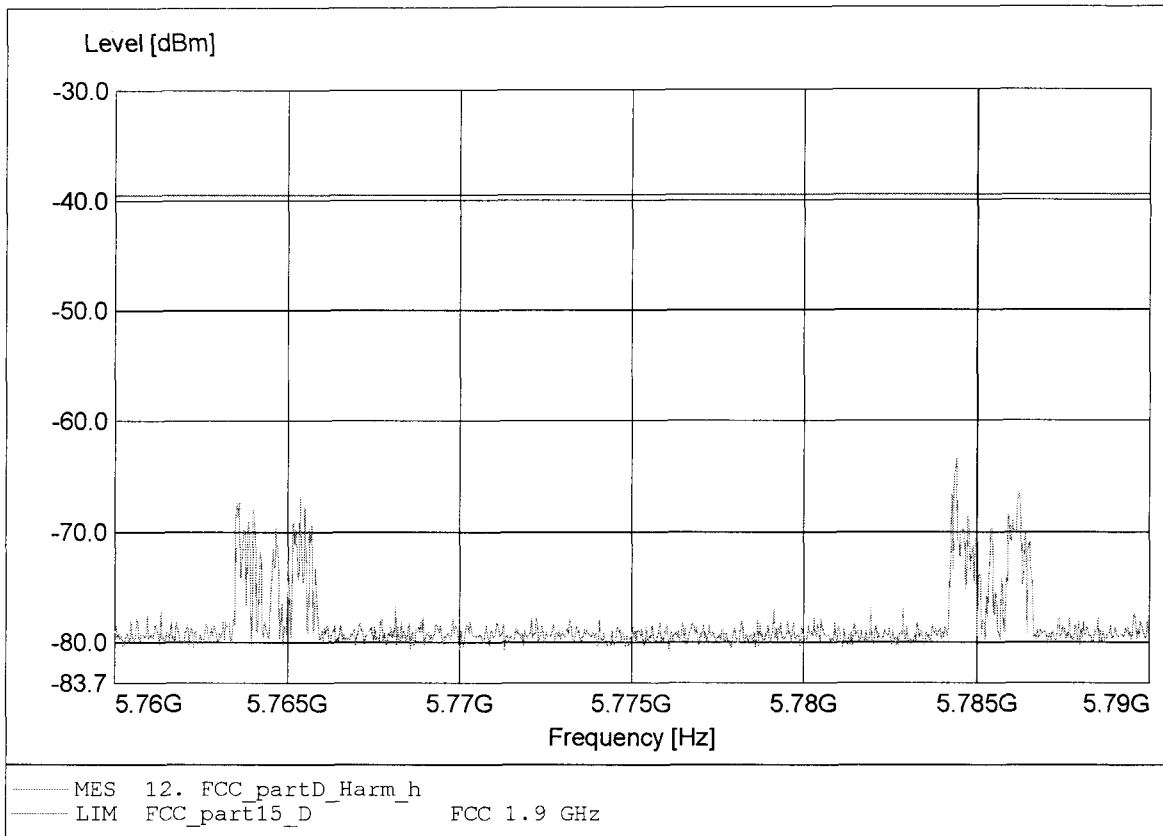

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 5.764GHz Pmax: -63.45dBm RBW: 10 kHz

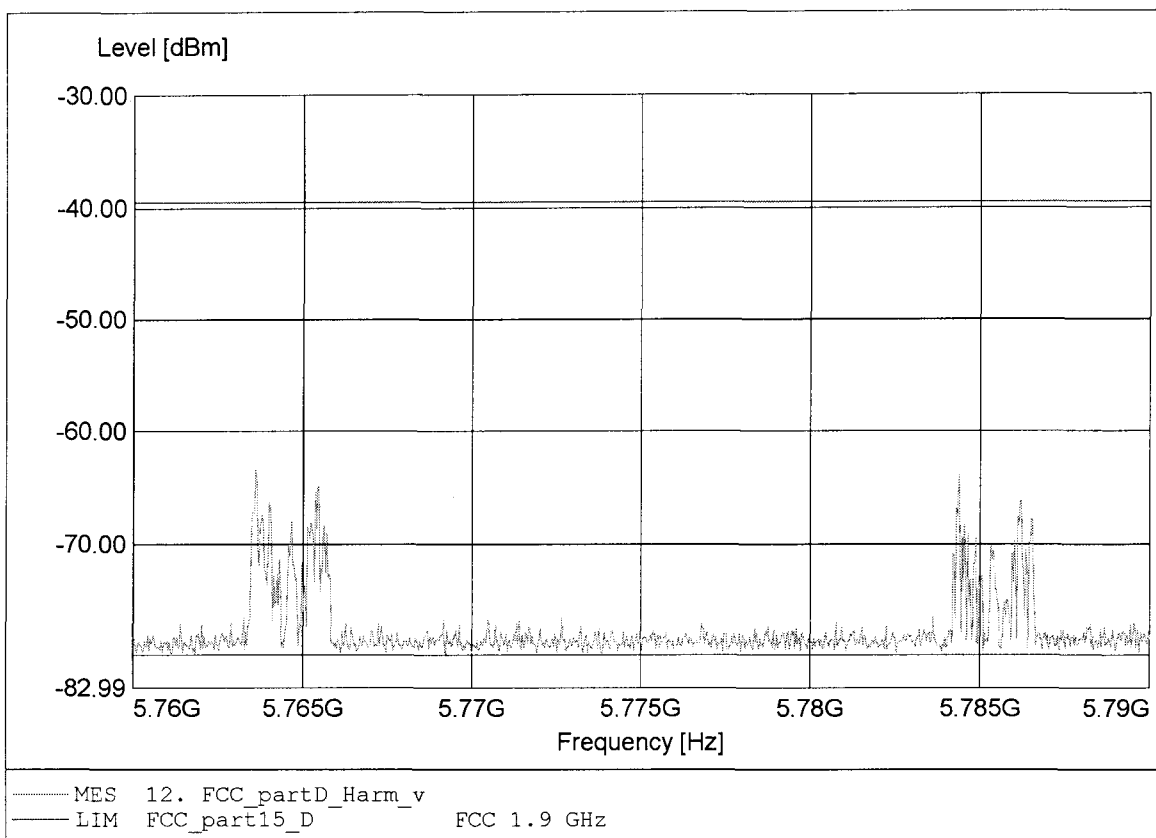

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 7.712GHz Pmax: -53.03dBm RBW: 10 kHz

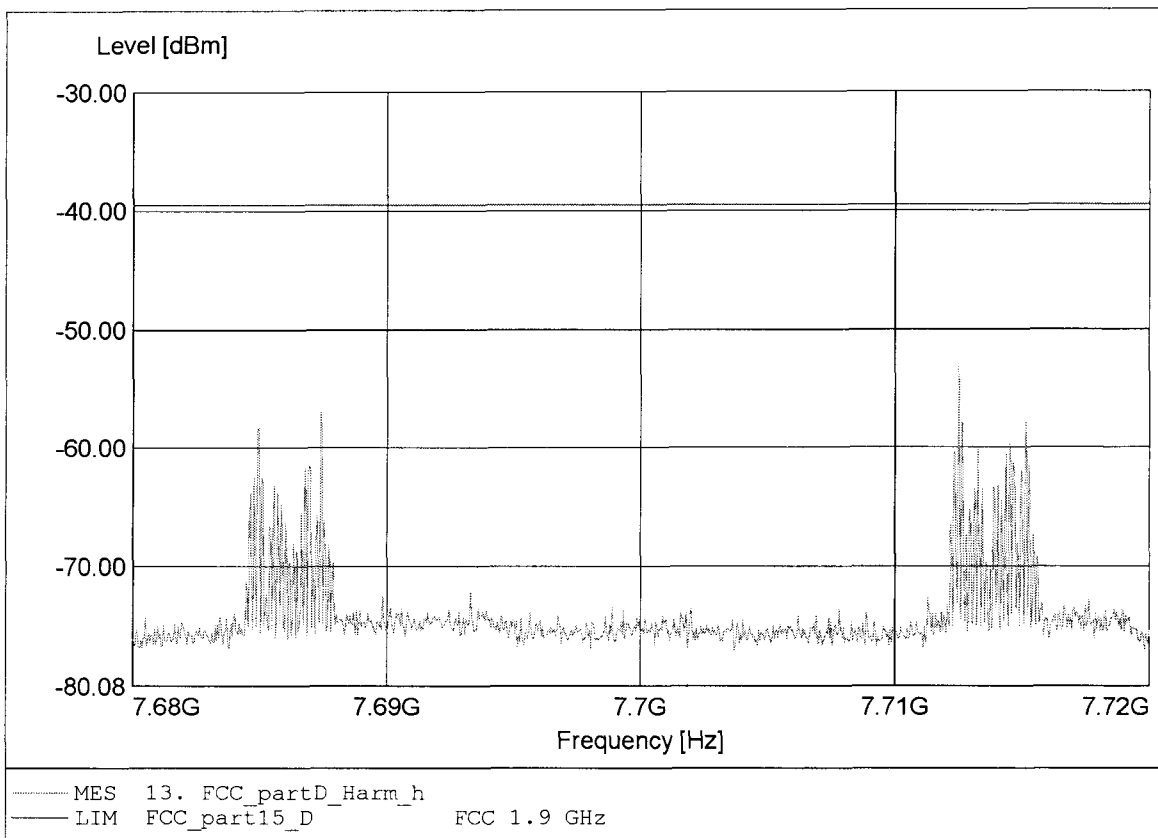

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 7.715GHz Pmax: -53.55dBm RBW: 10 kHz

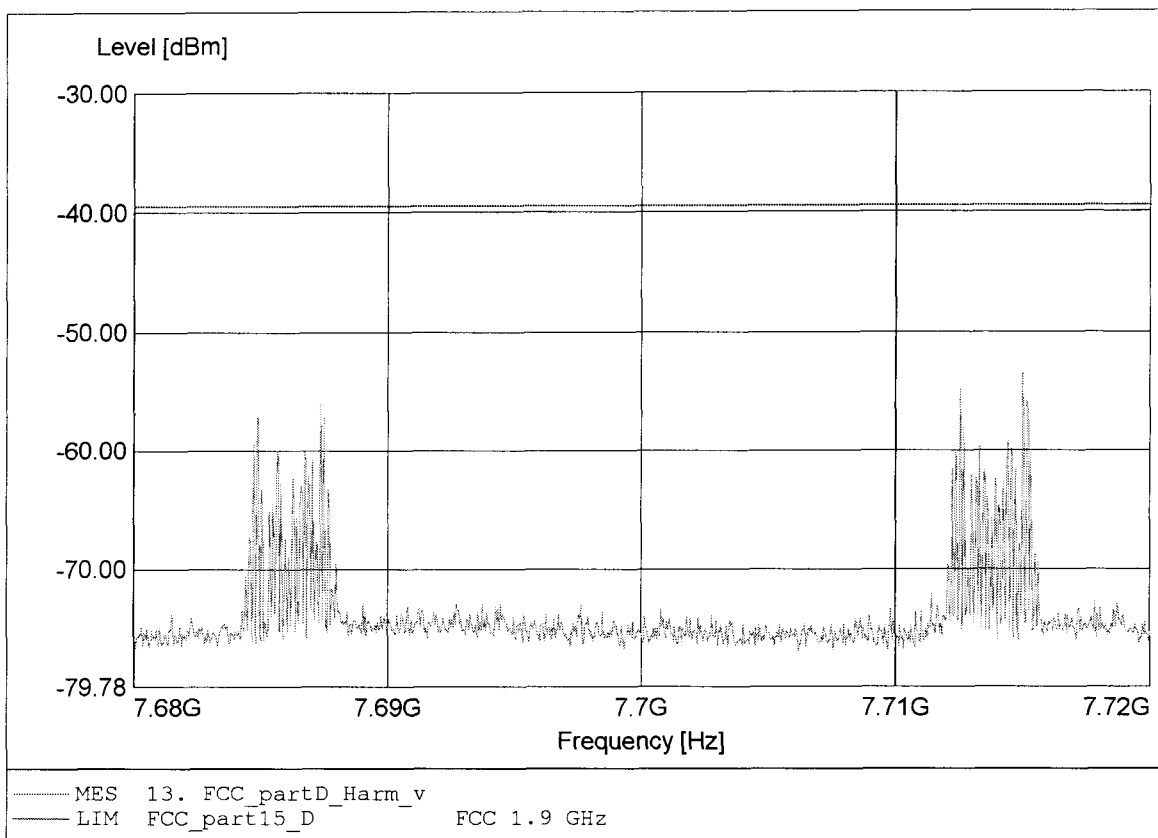

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 9.641GHz Pmax: -51.09dBm RBW: 10 kHz

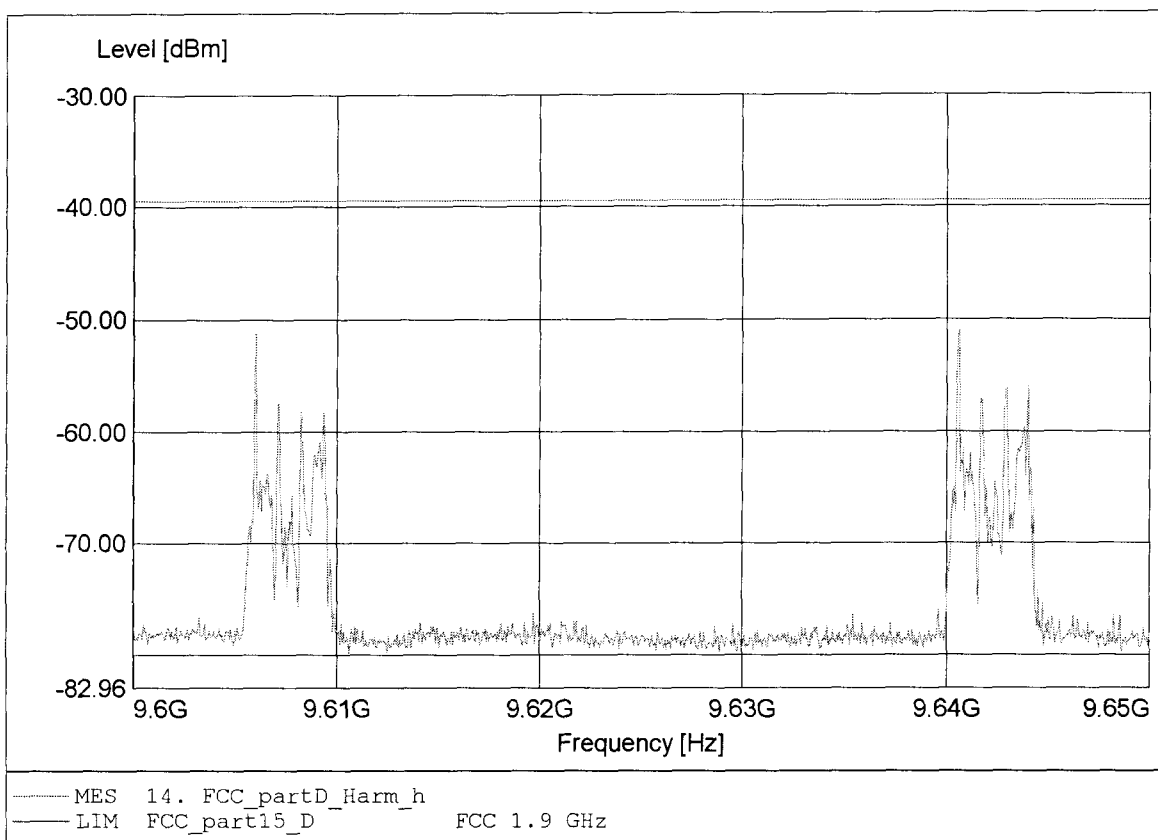

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 9.641GHz Pmax: -49.52dBm RBW: 10 kHz

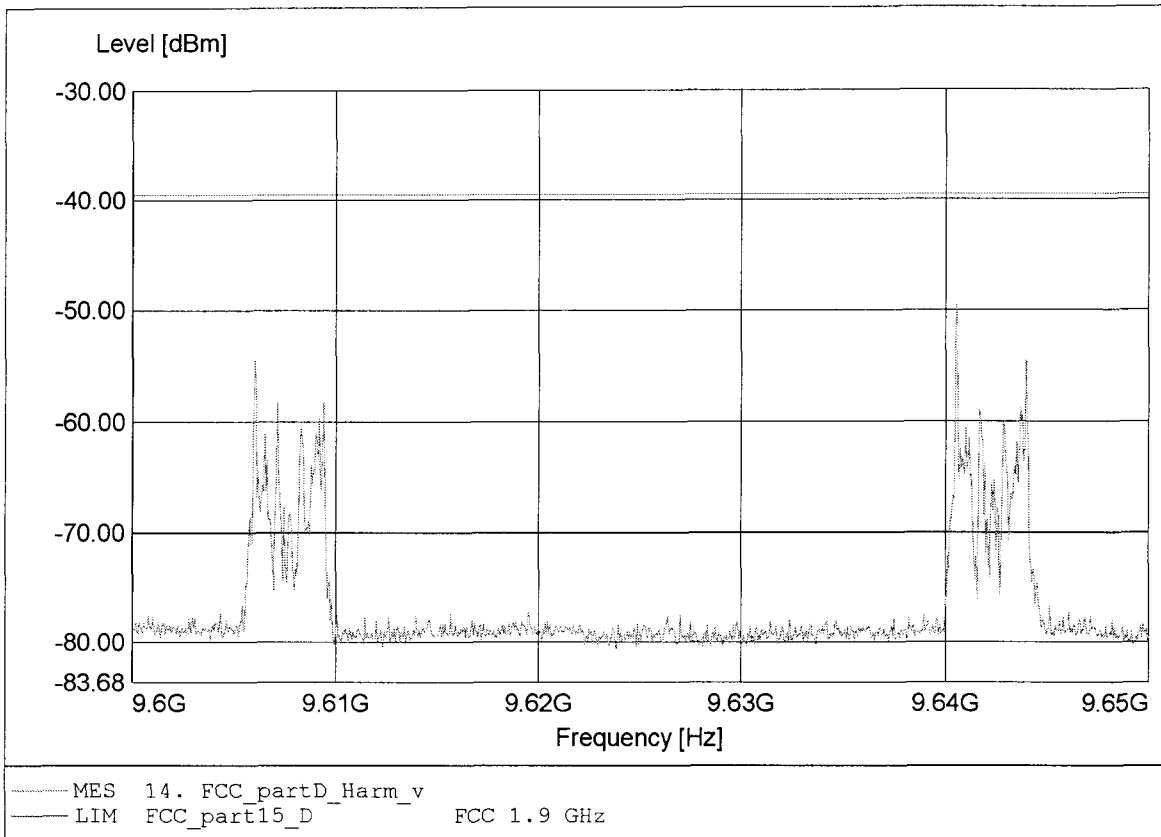

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**

Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 11.527GHz Pmax: -47.08dBm RBW: 10 kHz

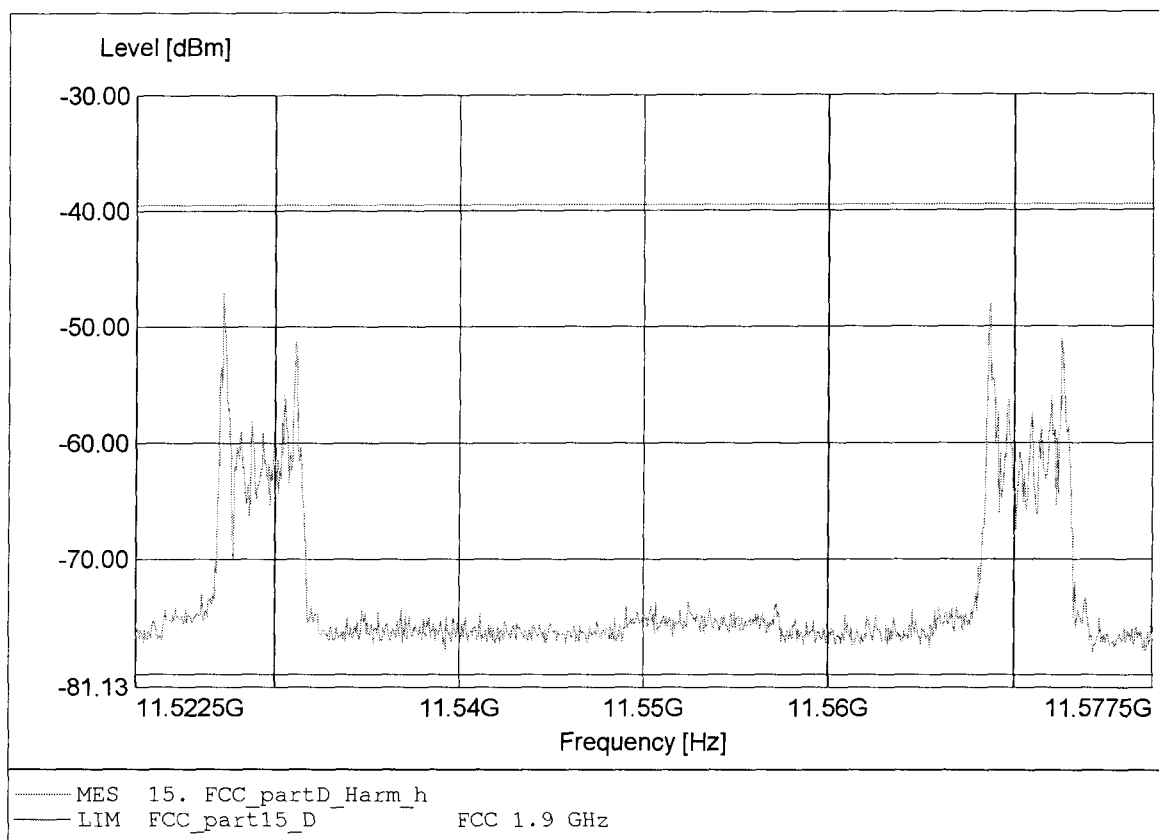




**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 11.569GHz Pmax: -53.17dBm RBW: 10 kHz

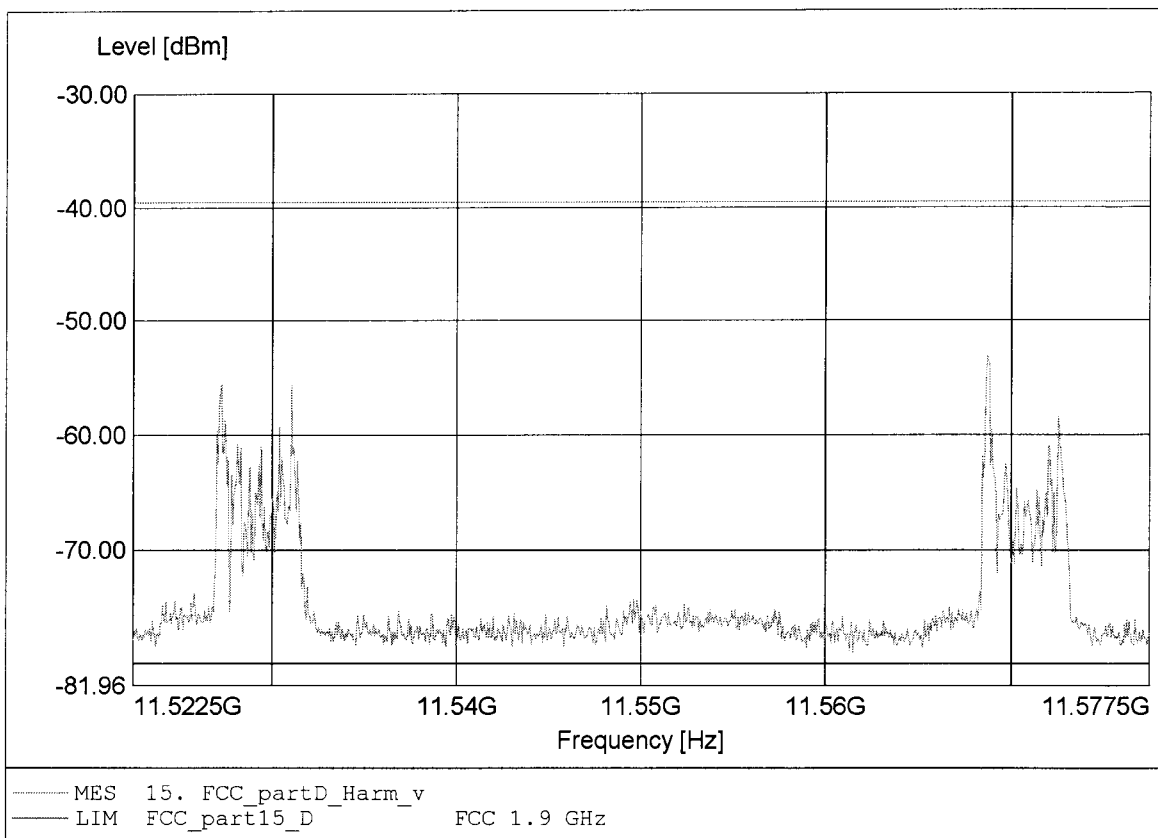

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:13.453GHz Pmax:-62.23dBm RBW:10 kHz

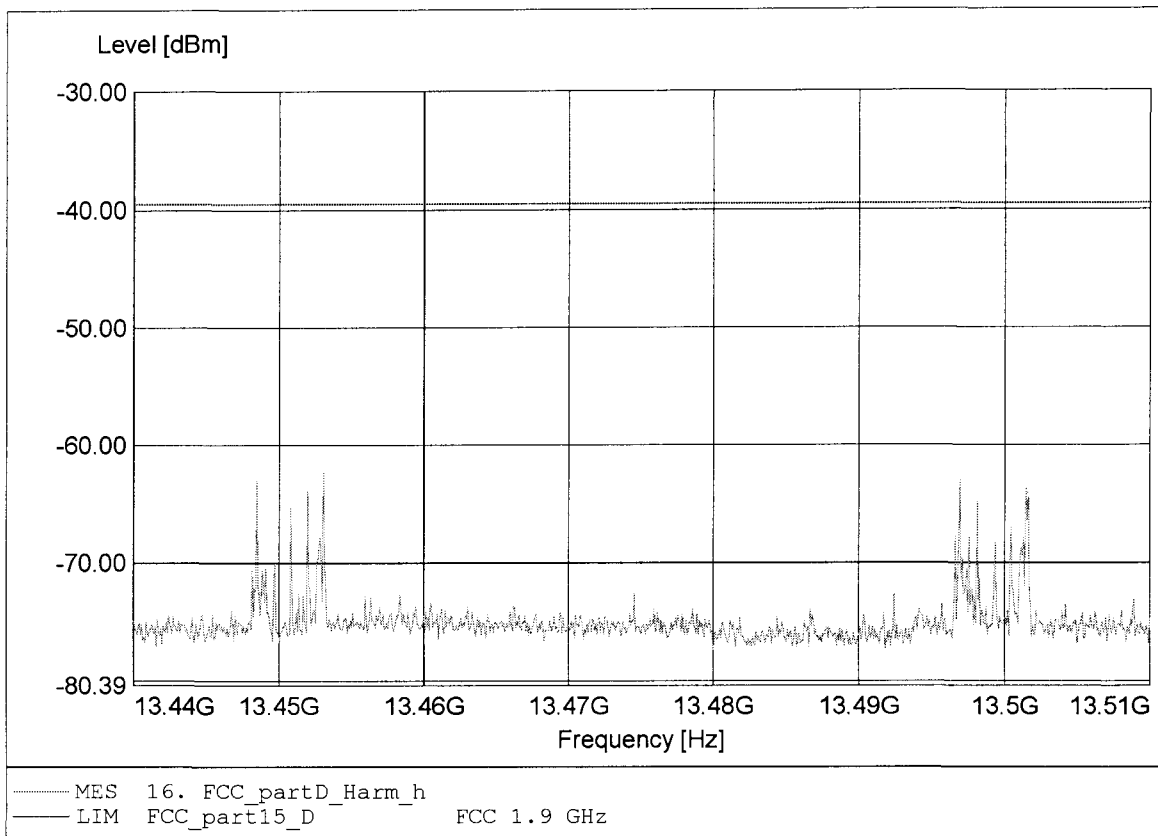

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:13.497GHz Pmax:-62.63dBm RBW:10 kHz

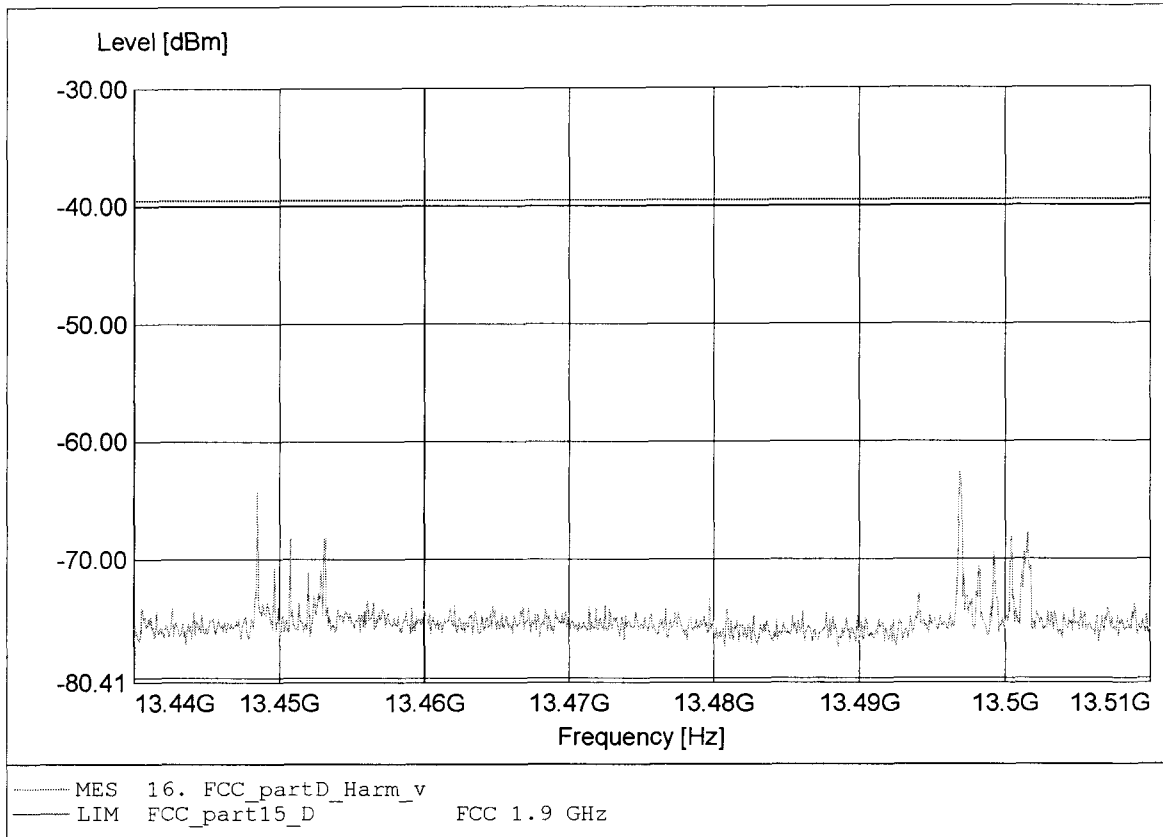

*Spurious emissions under normal conditions*

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:15.425GHz Pmax:-68.57dBm RBW:10 kHz

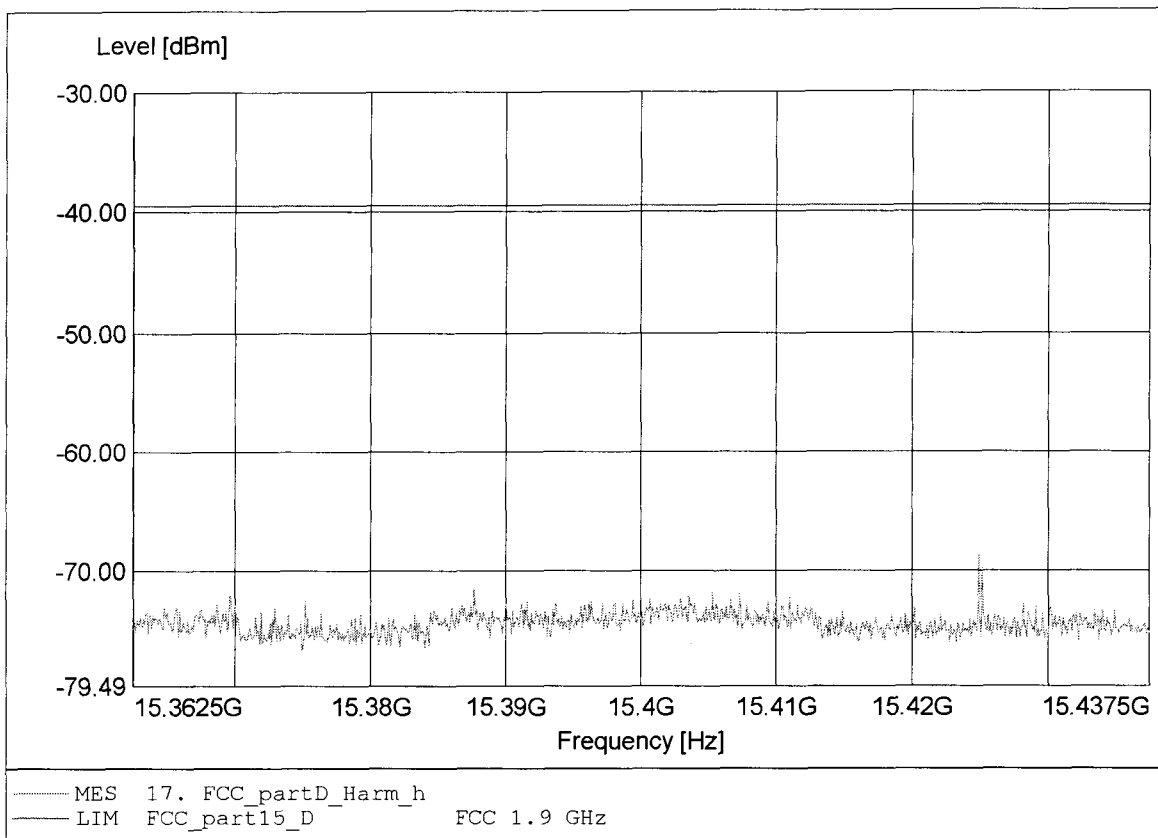

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 15.388GHz Pmax: -72.24dBm RBW: 10 kHz

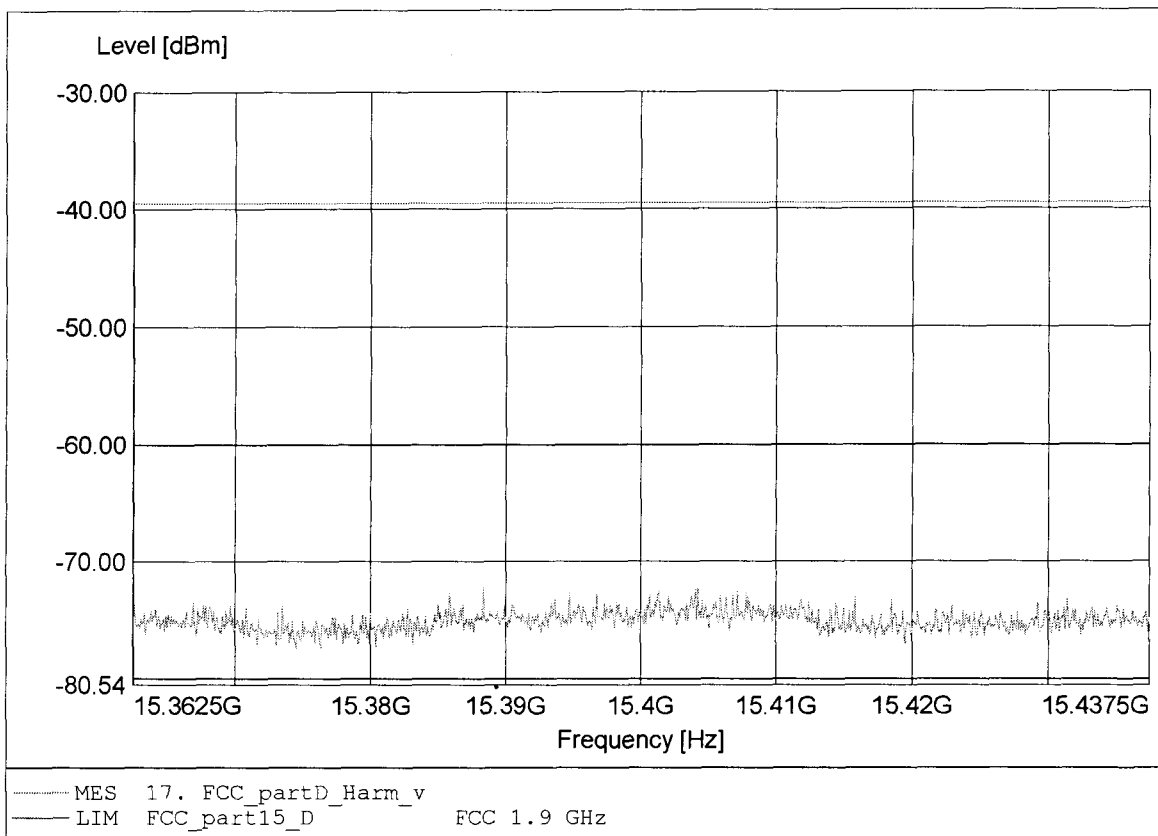

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:17.344GHz Pmax:-69.68dBm RBW:10 kHz

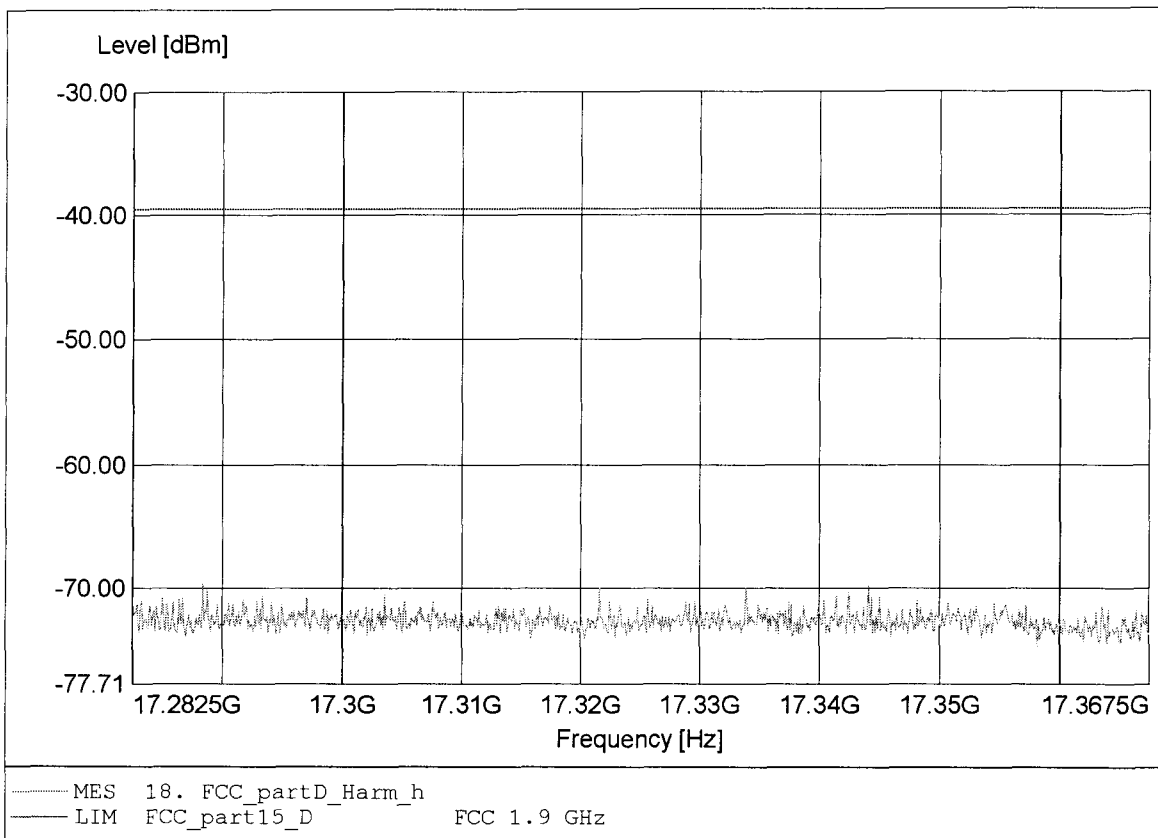

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq: 17.338GHz Pmax: -70.51dBm RBW: 10 kHz

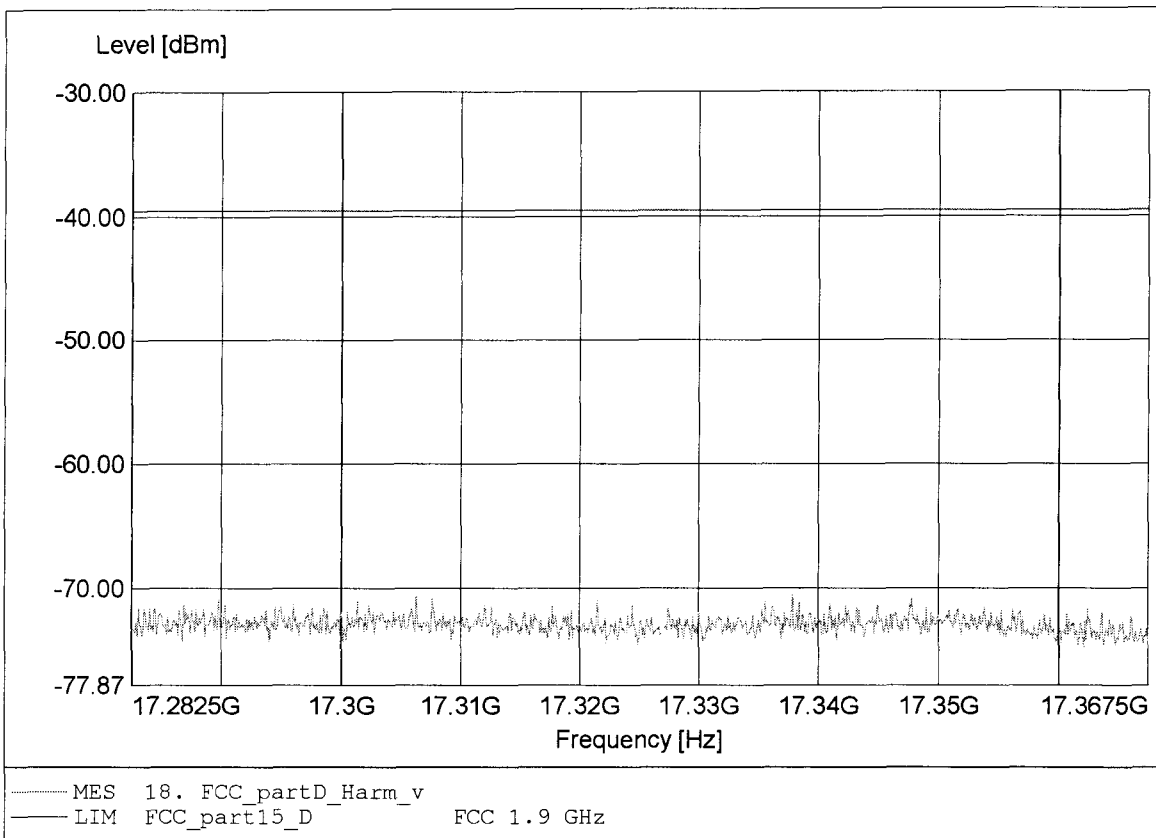

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**

Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:19.212GHz Pmax:-62.87dBm RBW:10 kHz

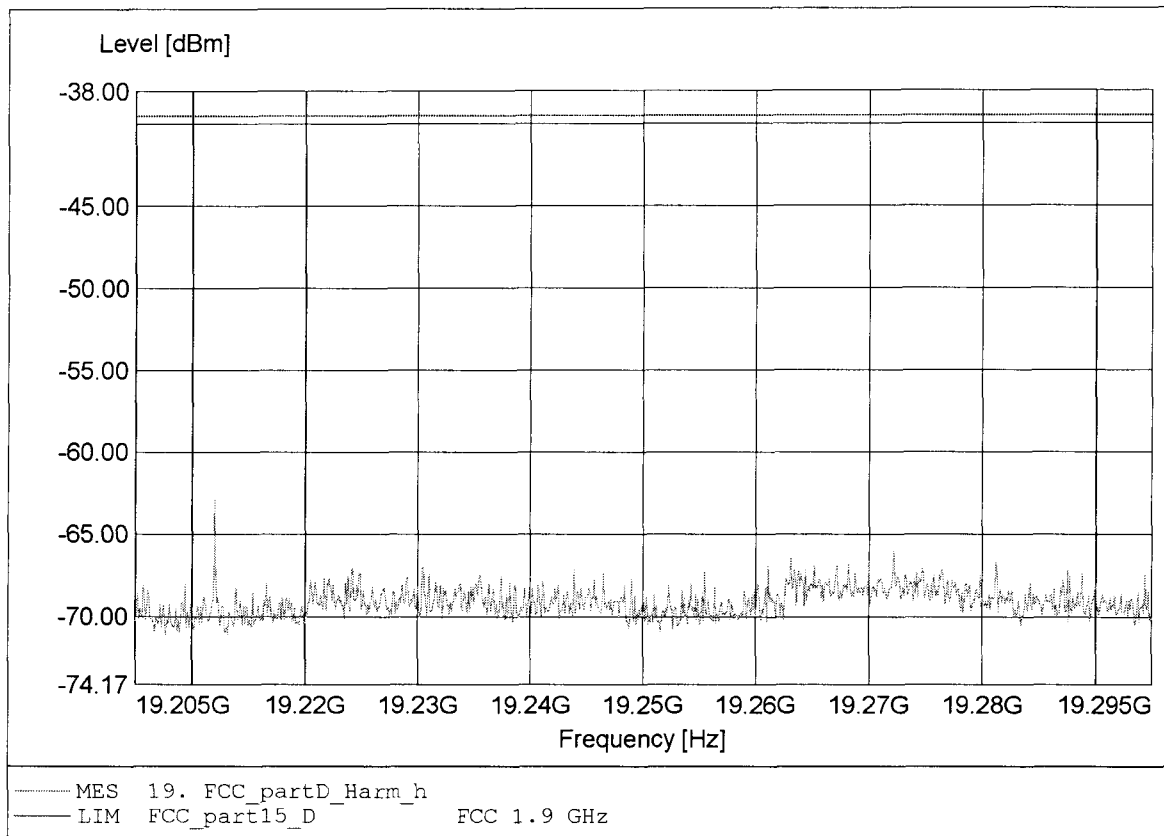




*Spurious emissions under normal conditions*

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model /Ch. /Ant.: PP6N20 1G9 / 4; 0 / 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.7 VDC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:19.227GHz Pmax:-64.26dBm RBW:10 kHz

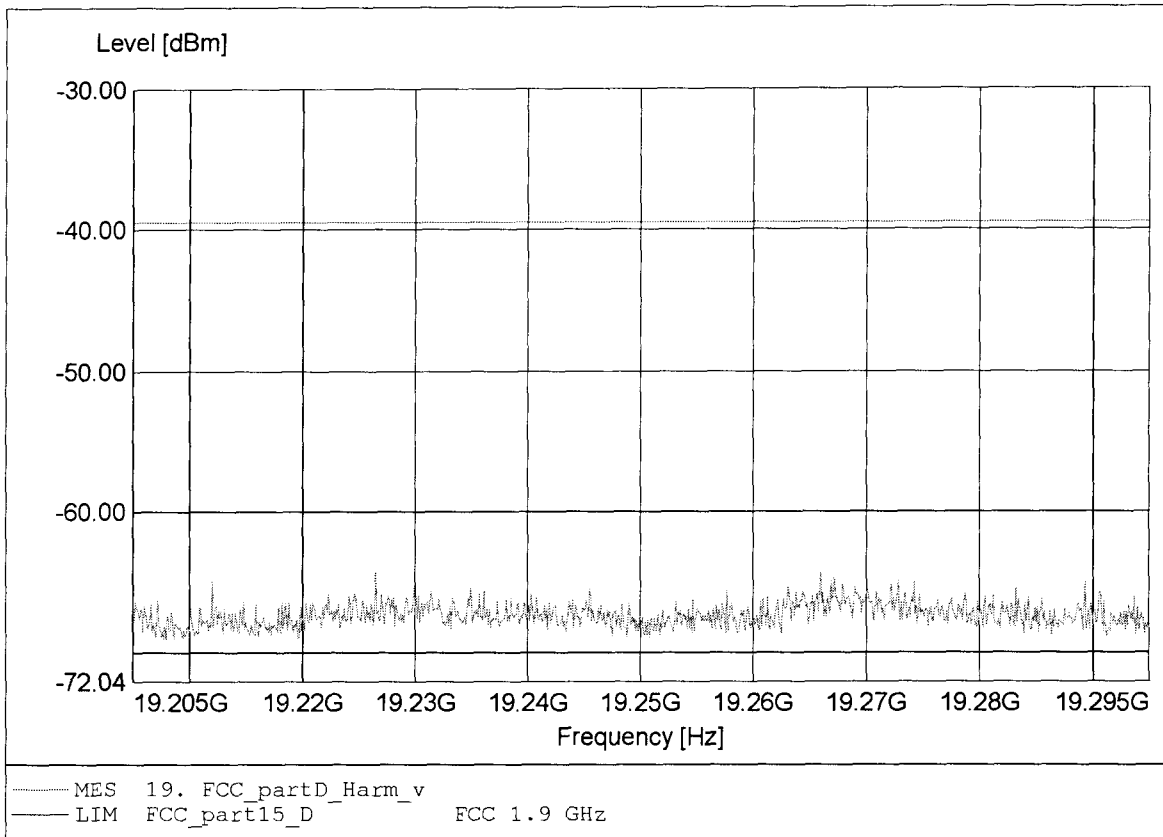

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116,  
Comment 2: Freq:191.311MHz Pmax:-61.22dBm RBW: 100 kHz

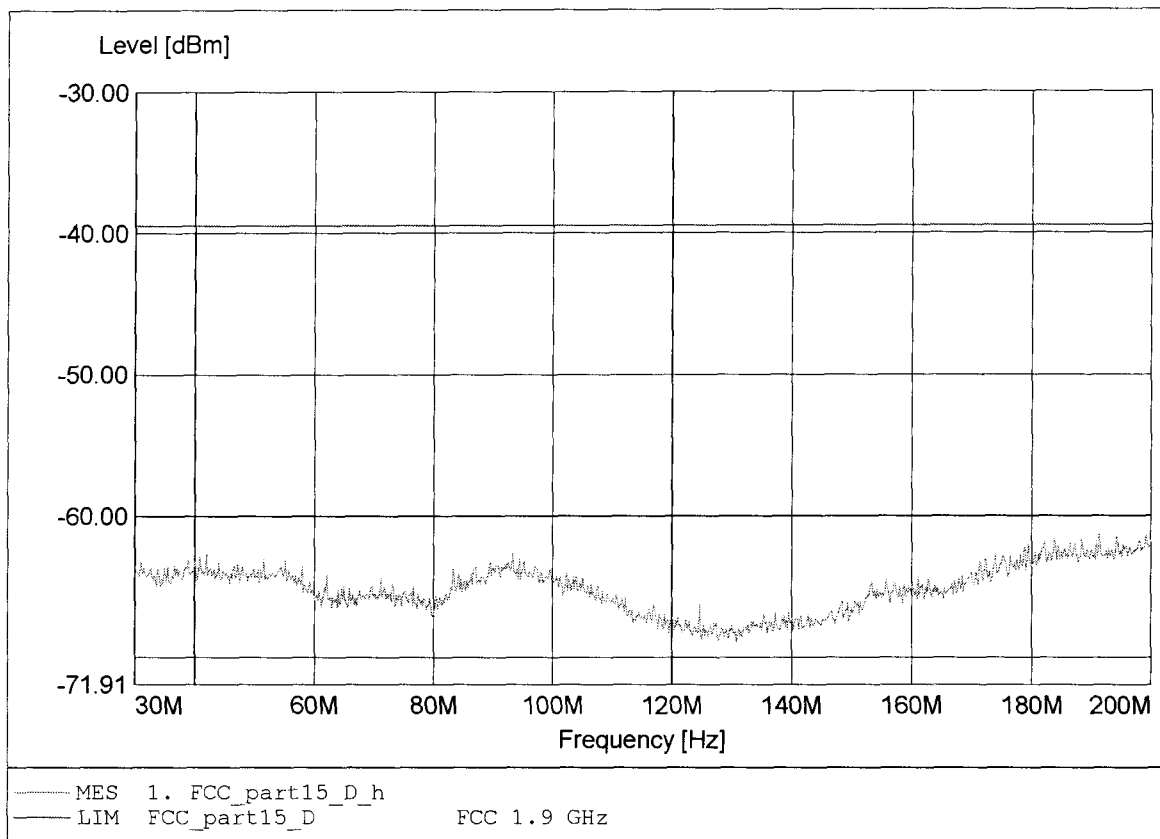

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116,  
Comment 2: Freq:175.633MHz Pmax:-55.55dBm RBW: 100 kHz

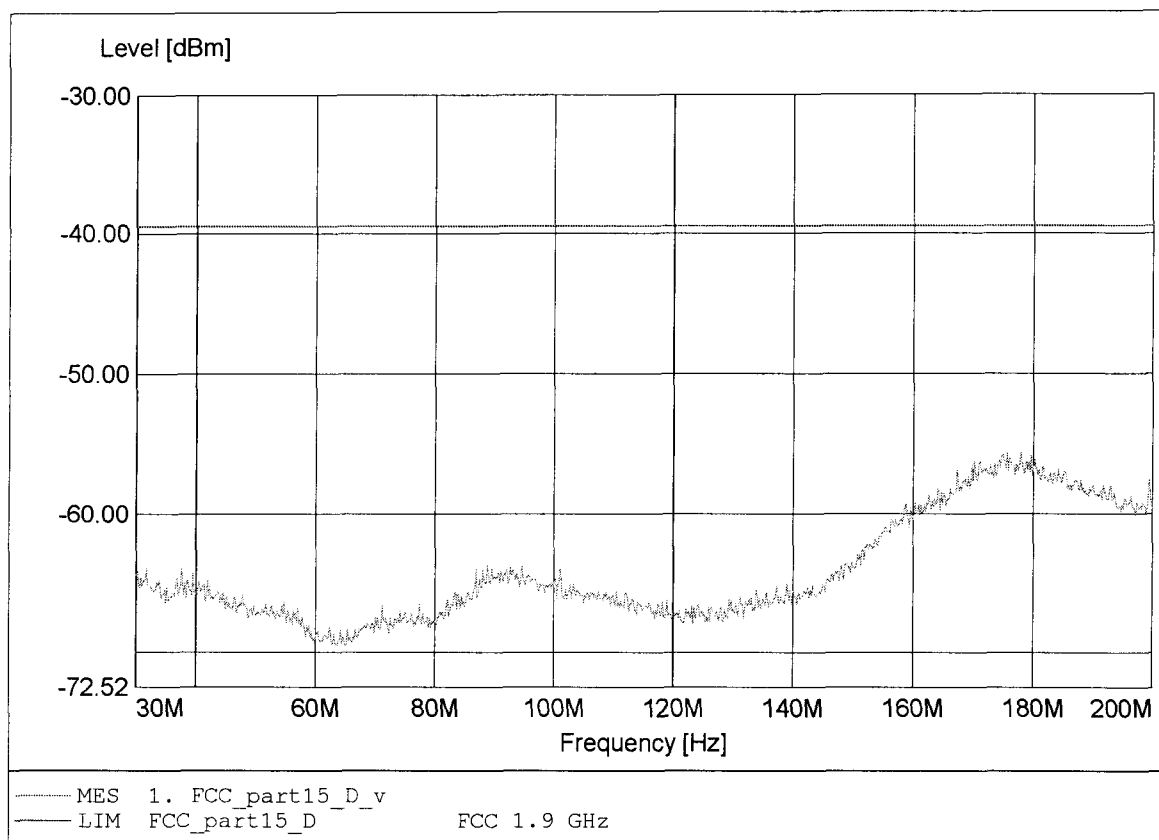

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Comment 2: Freq:988.444MHz Pmax:-75.37dBm RBW: 100 kHz

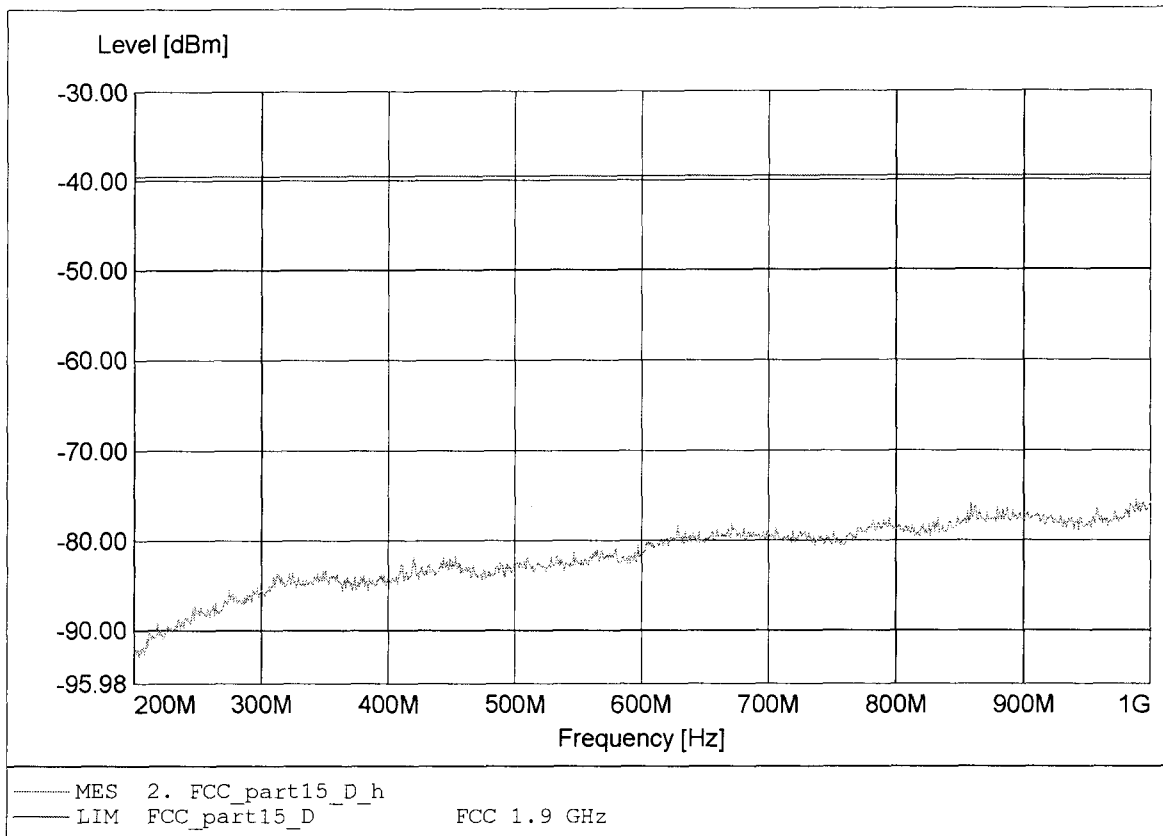

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Comment 2: Freq:990.222MHz Pmax:-72.61dBm RBW: 100 kHz

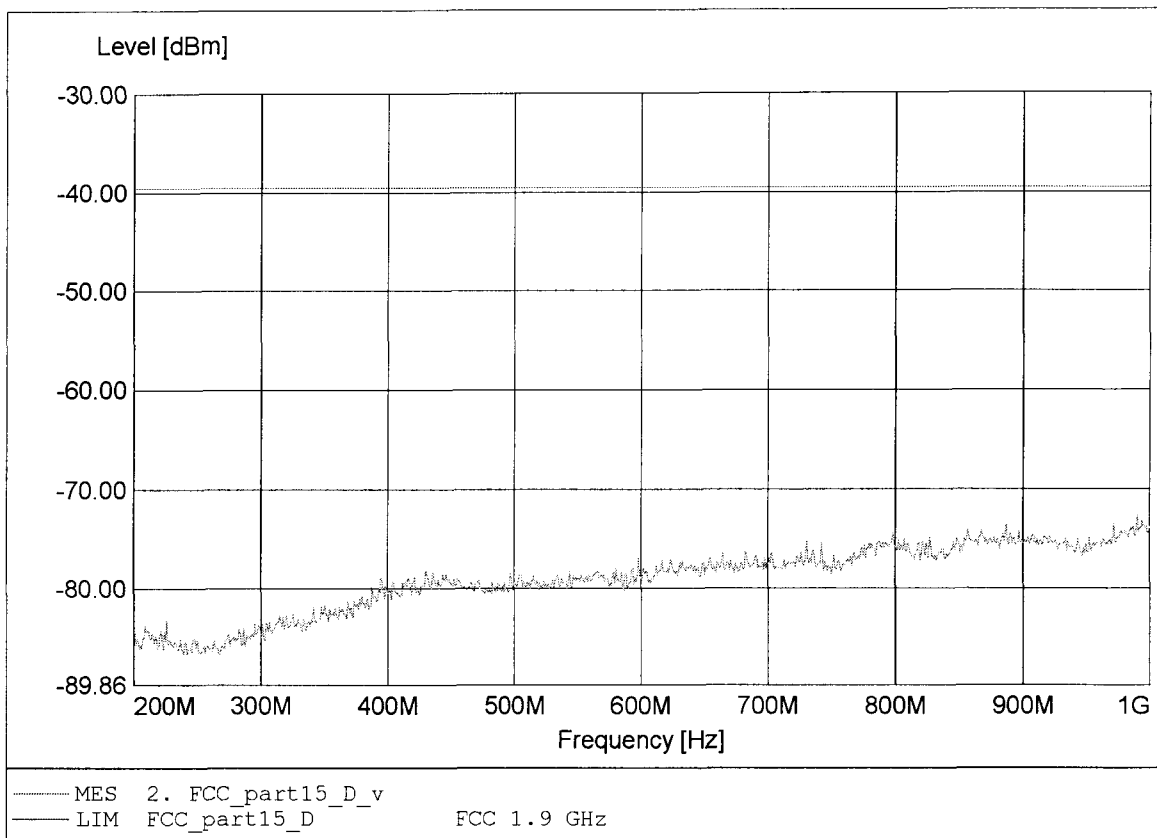

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:1.915GHz Pmax:-63.75dBm RBW: 100 kHz

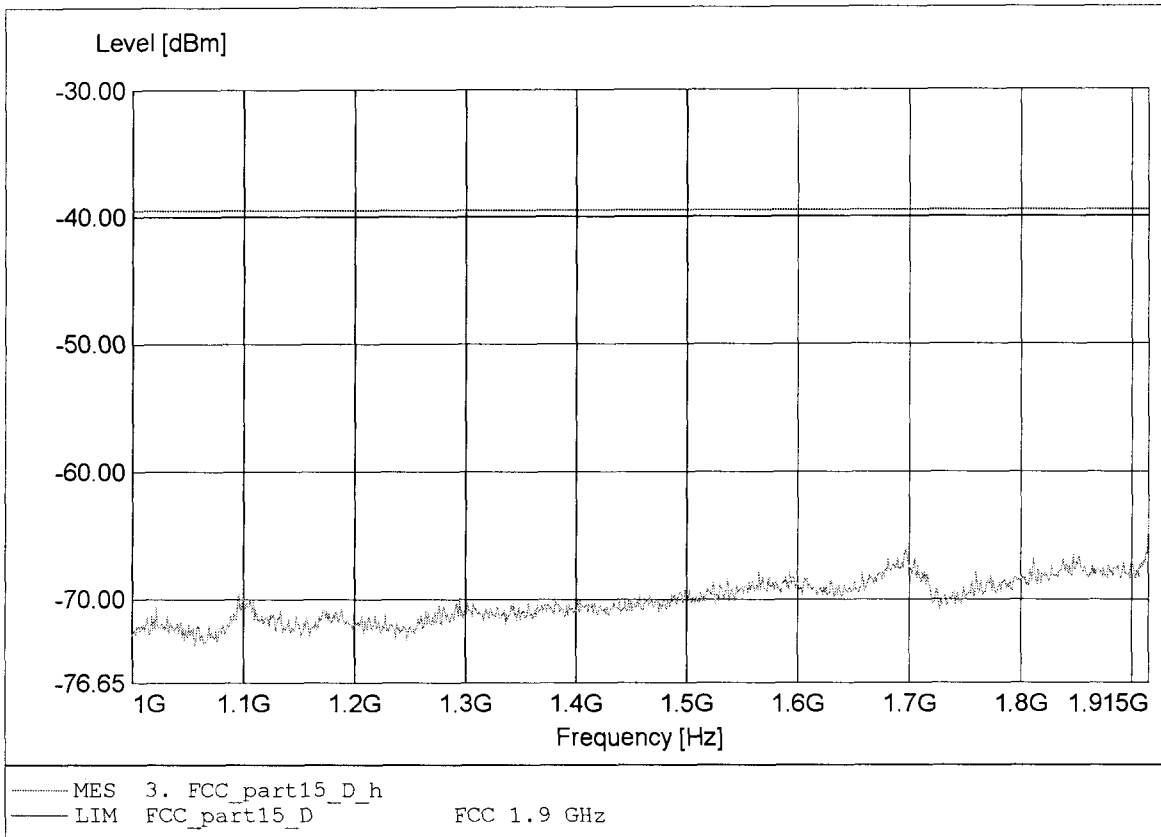

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:1.915GHz Pmax:-64.89dBm RBW: 100 kHz

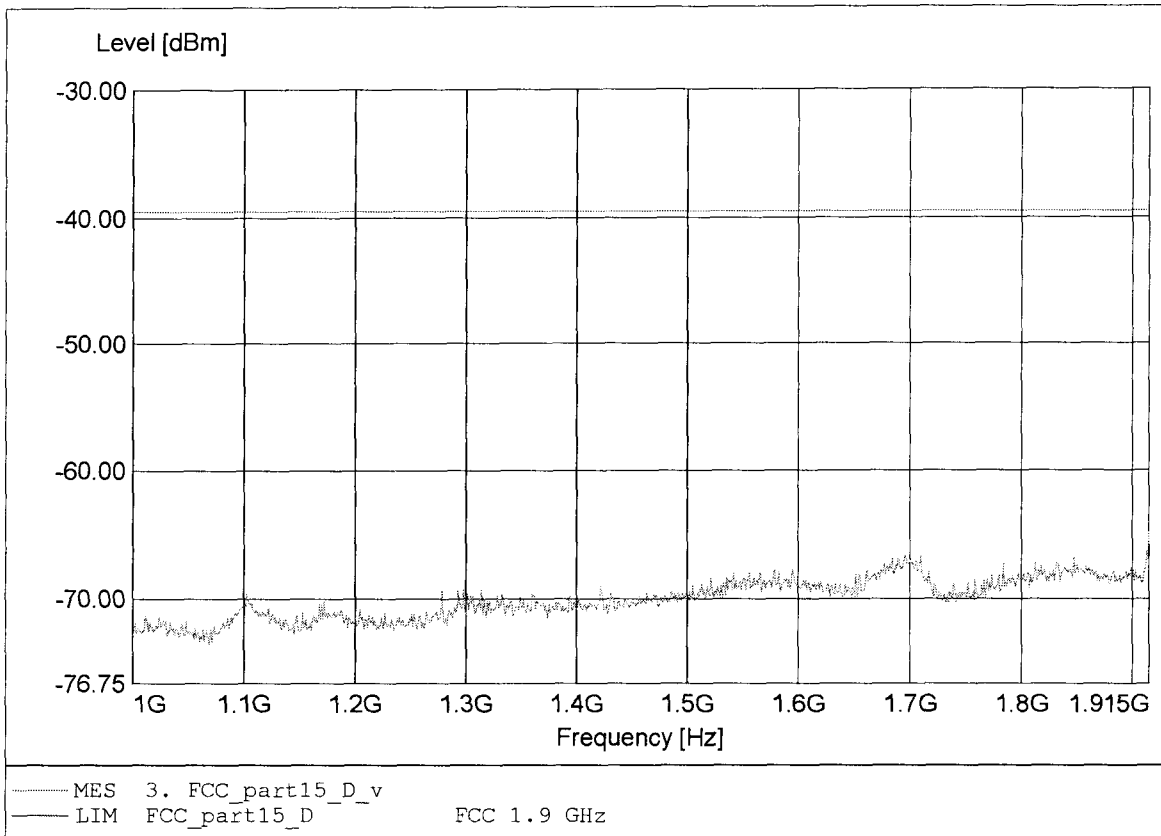

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**

Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:1.930GHz Pmax:-43.80dBm RBW: 10 kHz

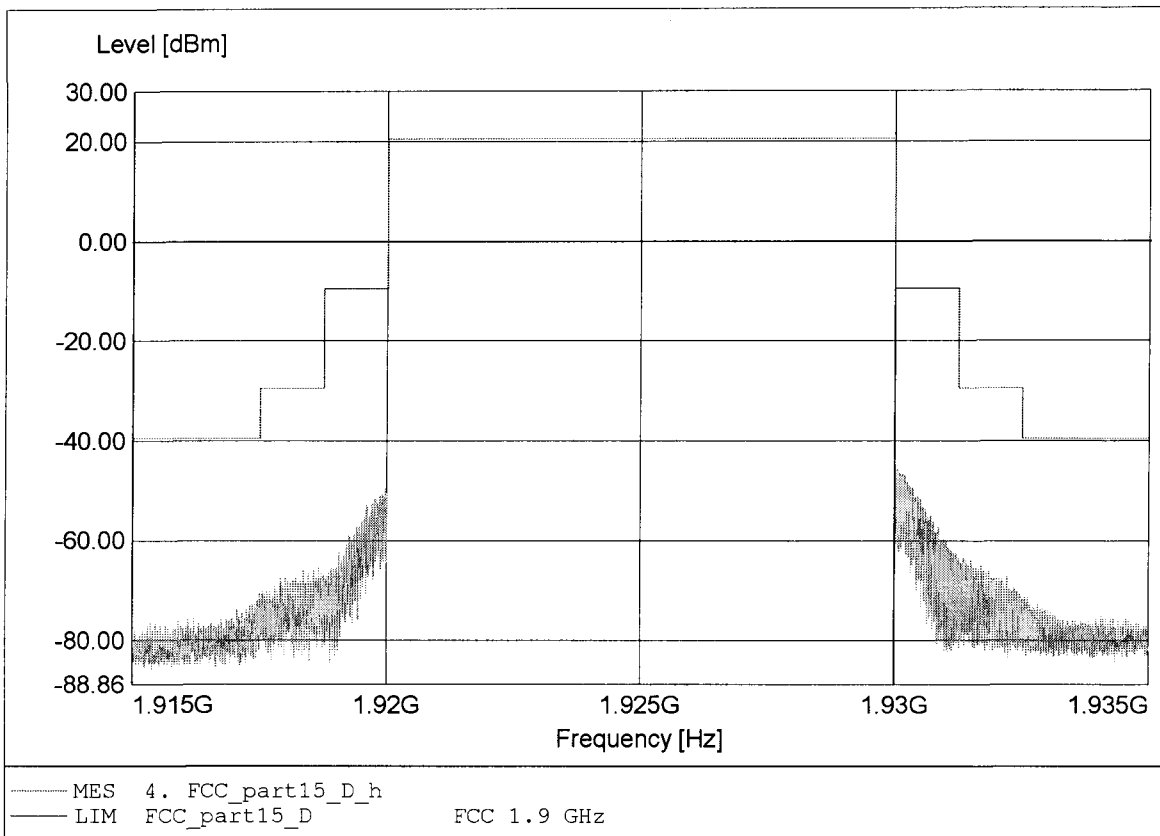




**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:1.930GHz Pmax:-47.15dBm RBW: 10 kHz

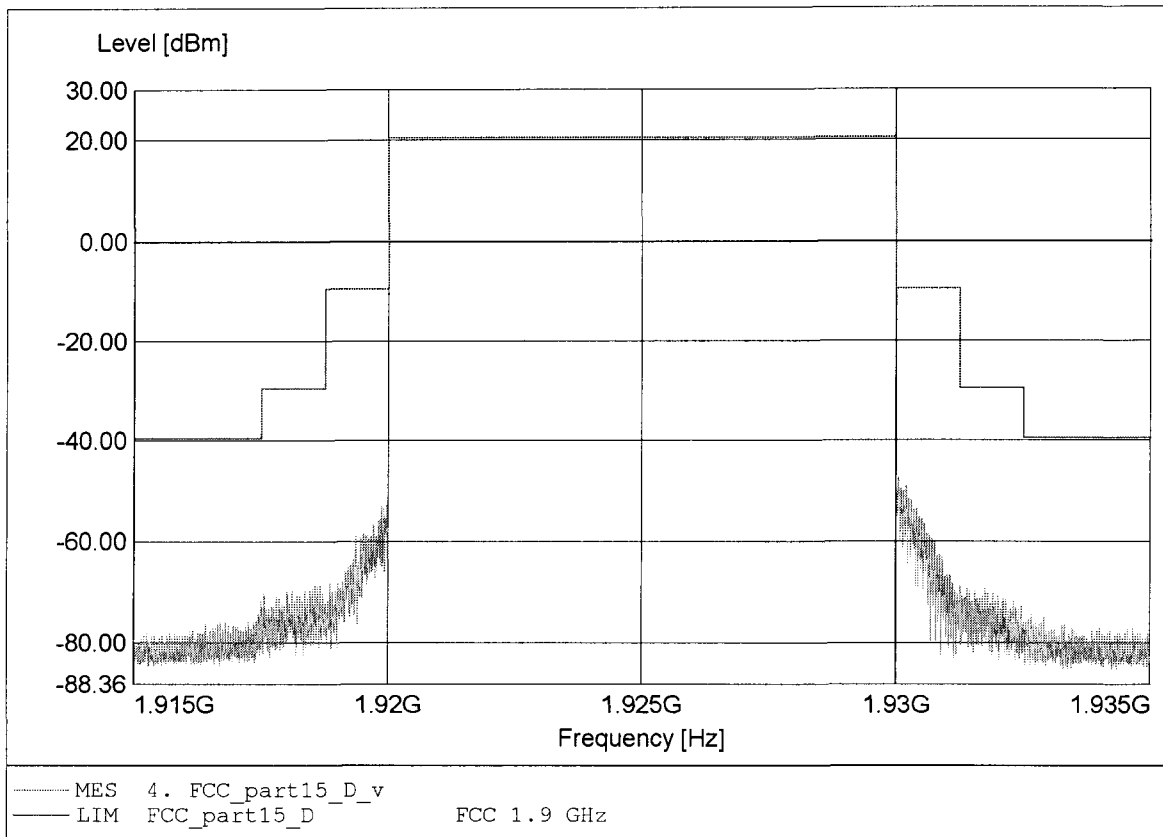

# Spurious emissions under normal conditions

## FCC RULES PART 15, SUBPART D


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:3.844GHz Pmax:-40.08dBm RBW: 100 kHz

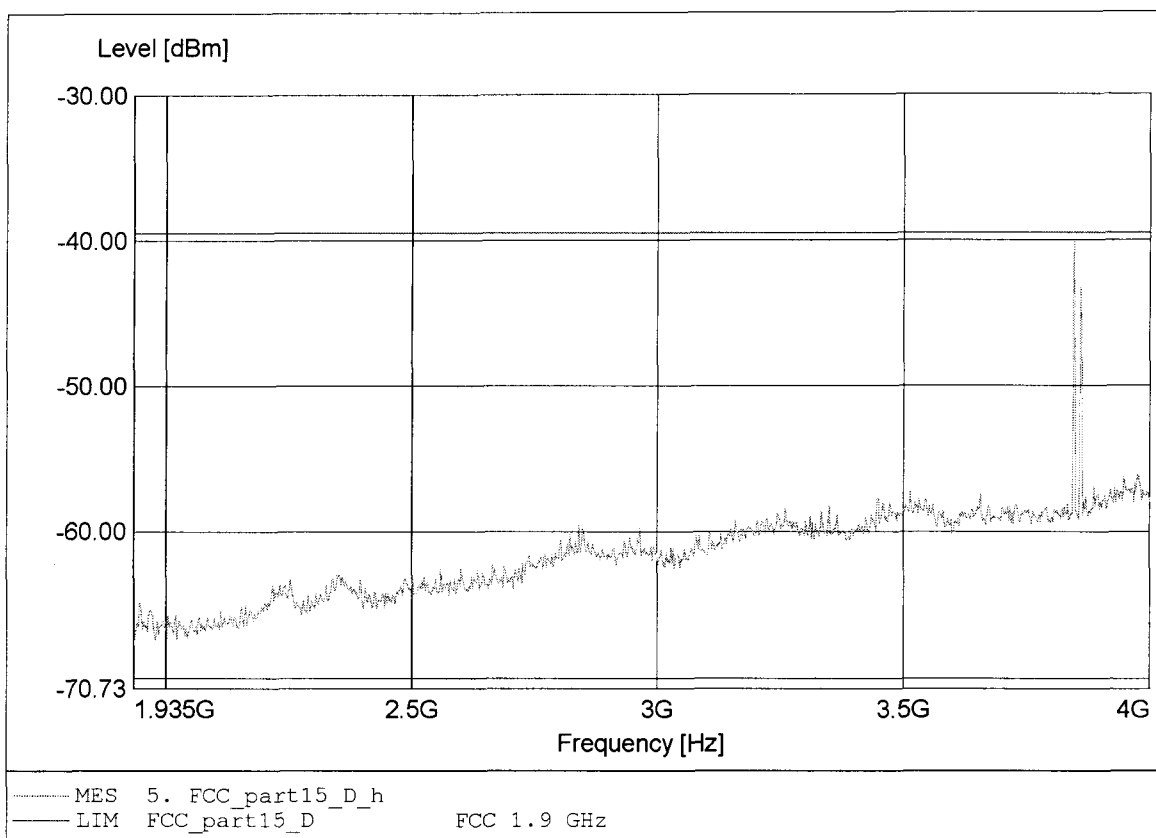

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:3.844GHz Pmax:-43.68dBm RBW: 100 kHz

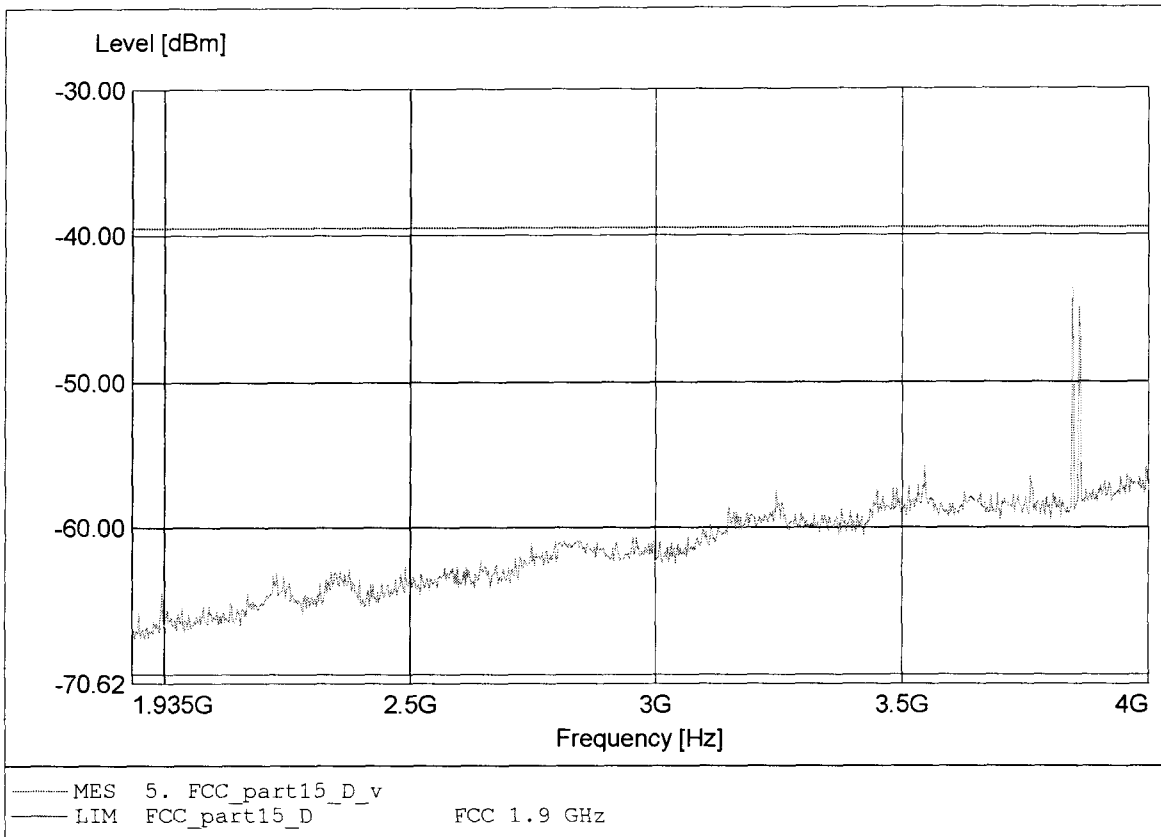

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:3.857GHz Pmax:-47.82dBm RBW:10 kHz

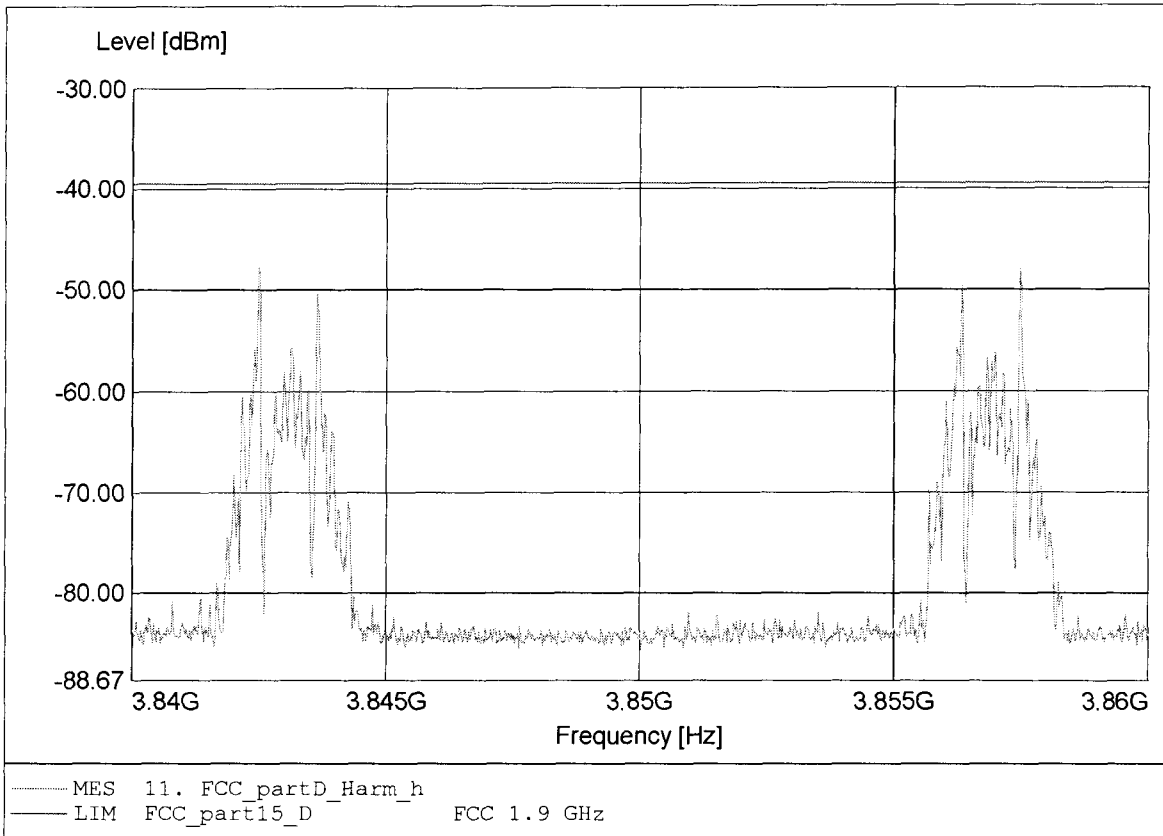

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:3.856GHz Pmax:-52.39dBm RBW:10 kHz

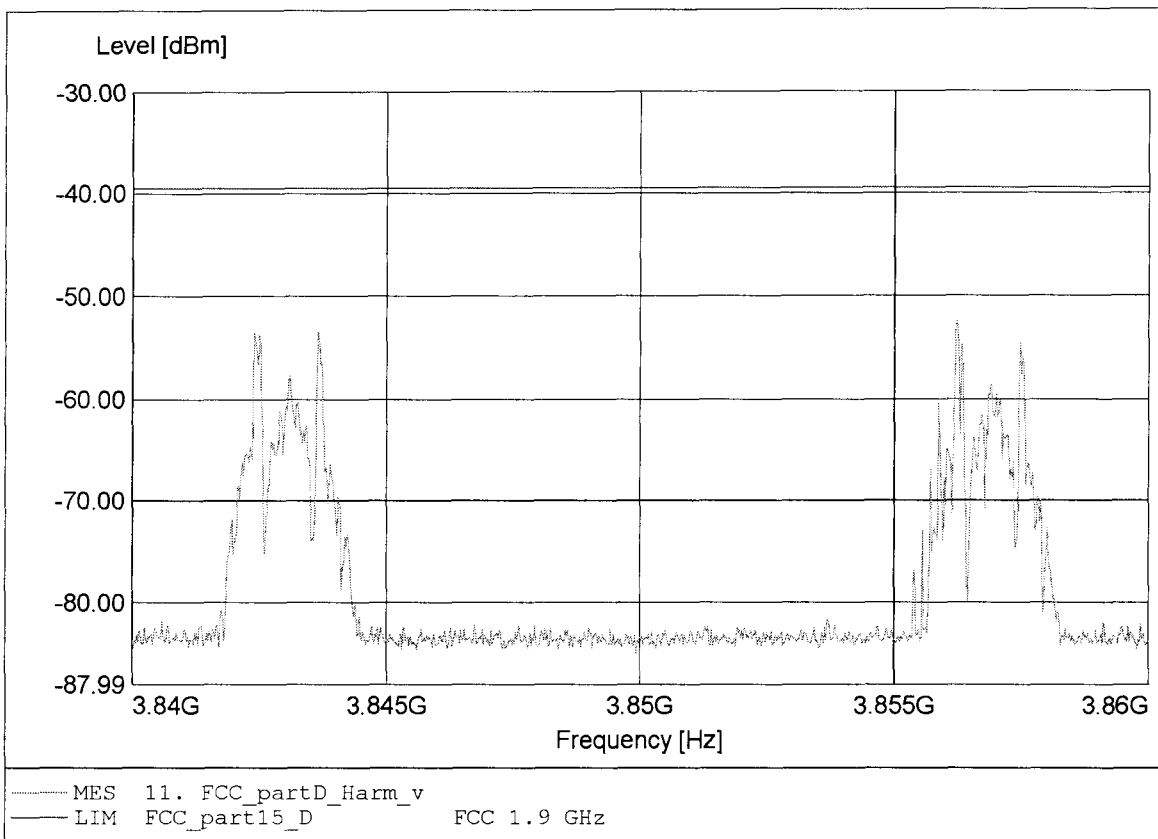

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:5.786GHz Pmax:-62.64dBm RBW:10 kHz

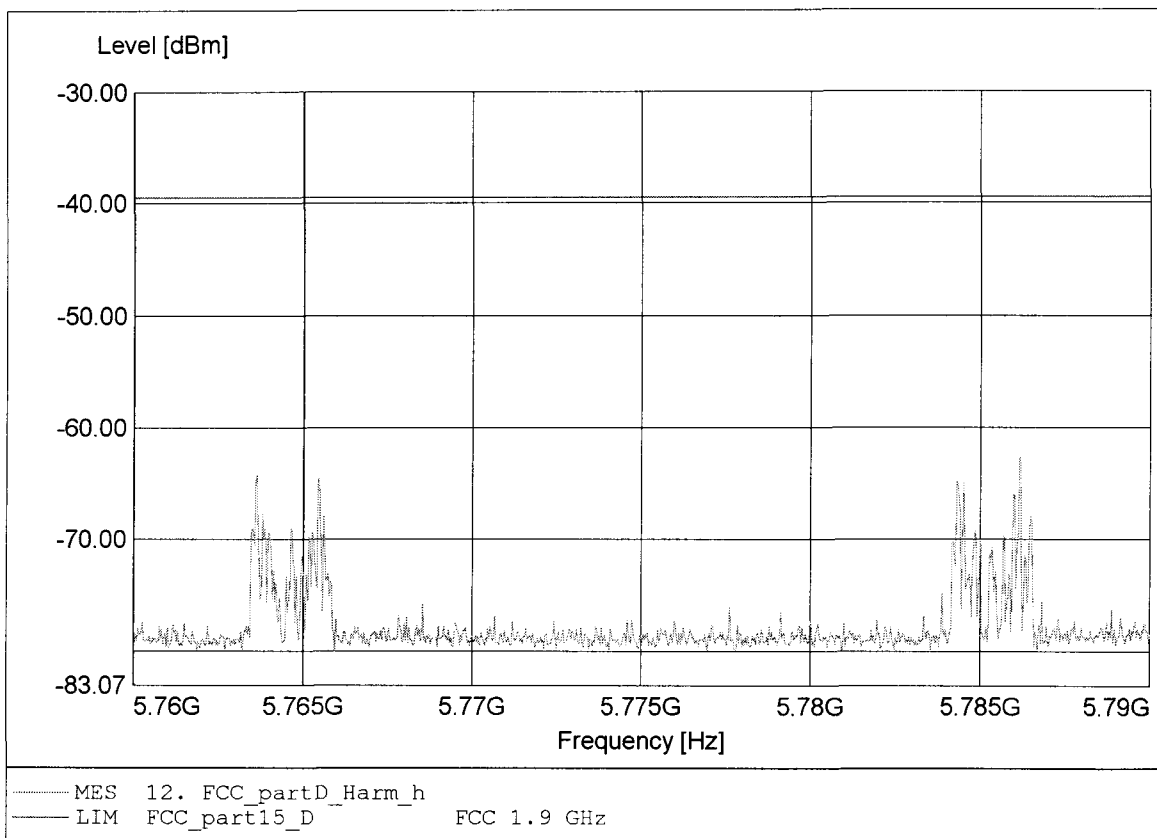

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:5.786GHz Pmax:-64.11dBm RBW:10 kHz

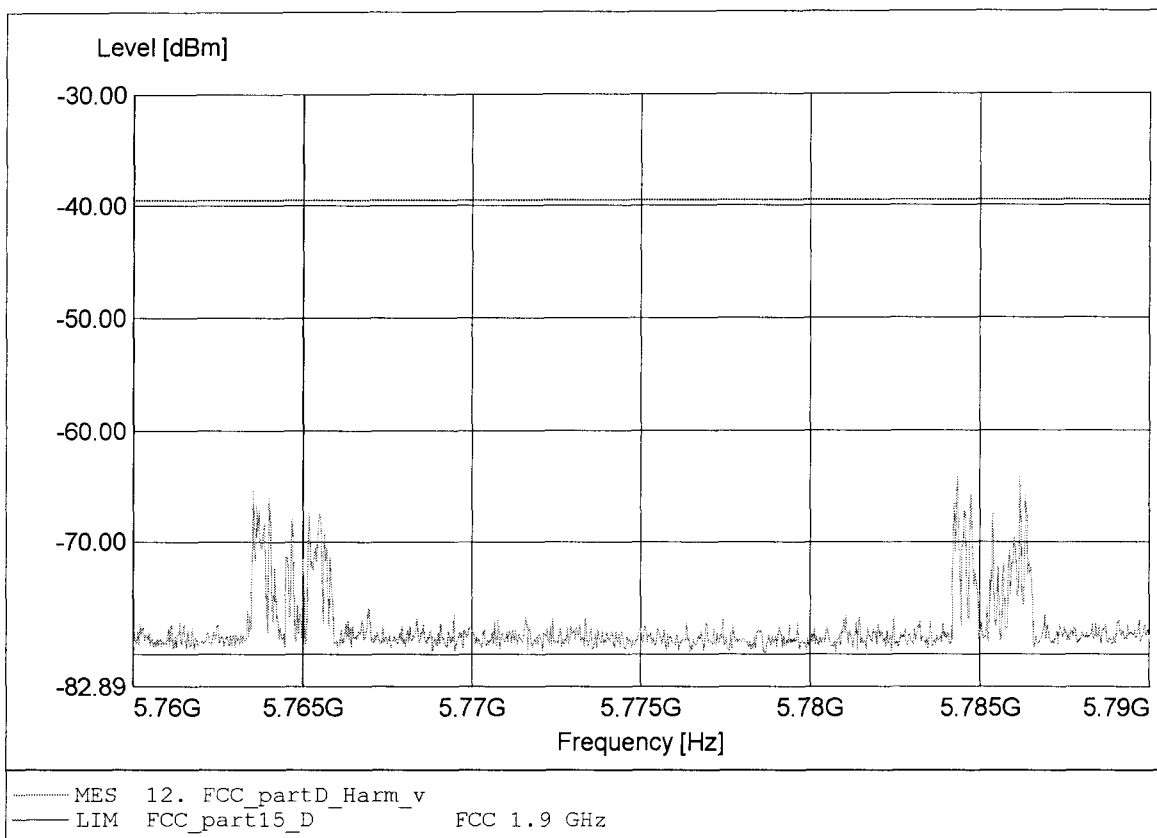

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**

Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:7.685GHz Pmax:-54.11dBm RBW:10 kHz

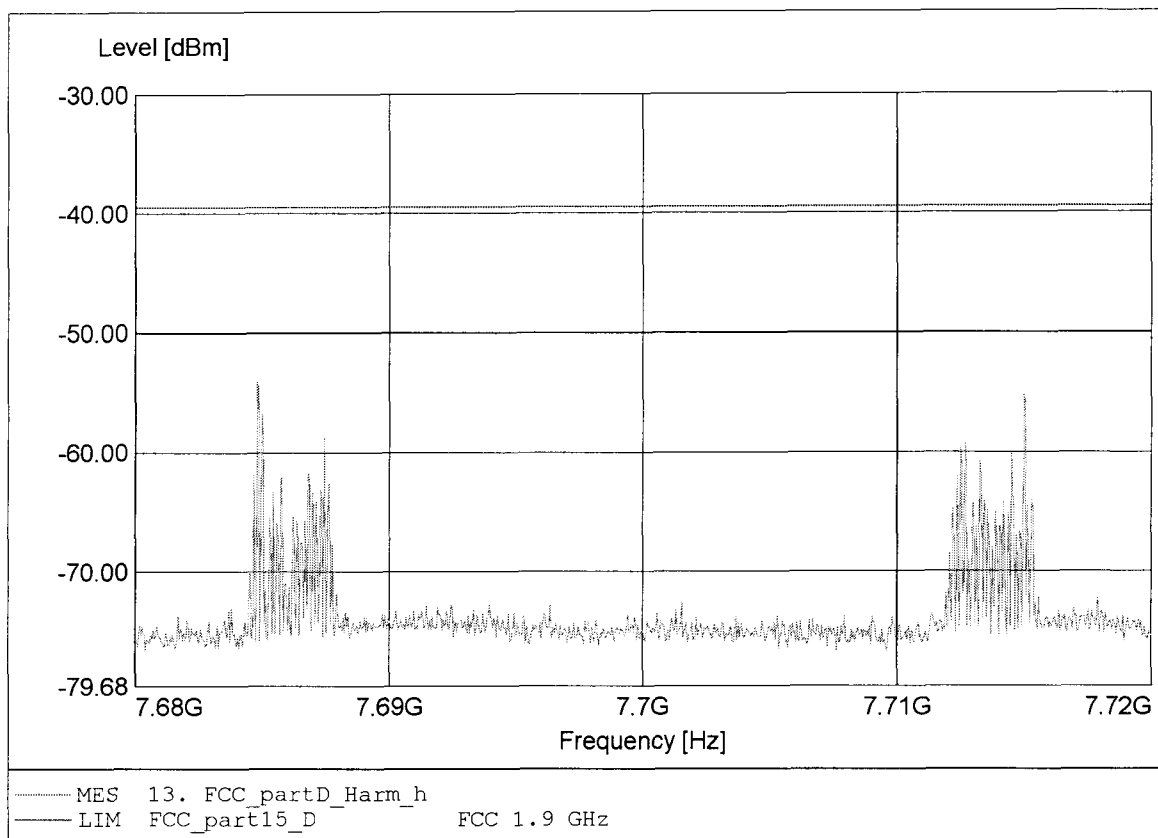




**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:7.712GHz Pmax:-53.14dBm RBW:10 kHz

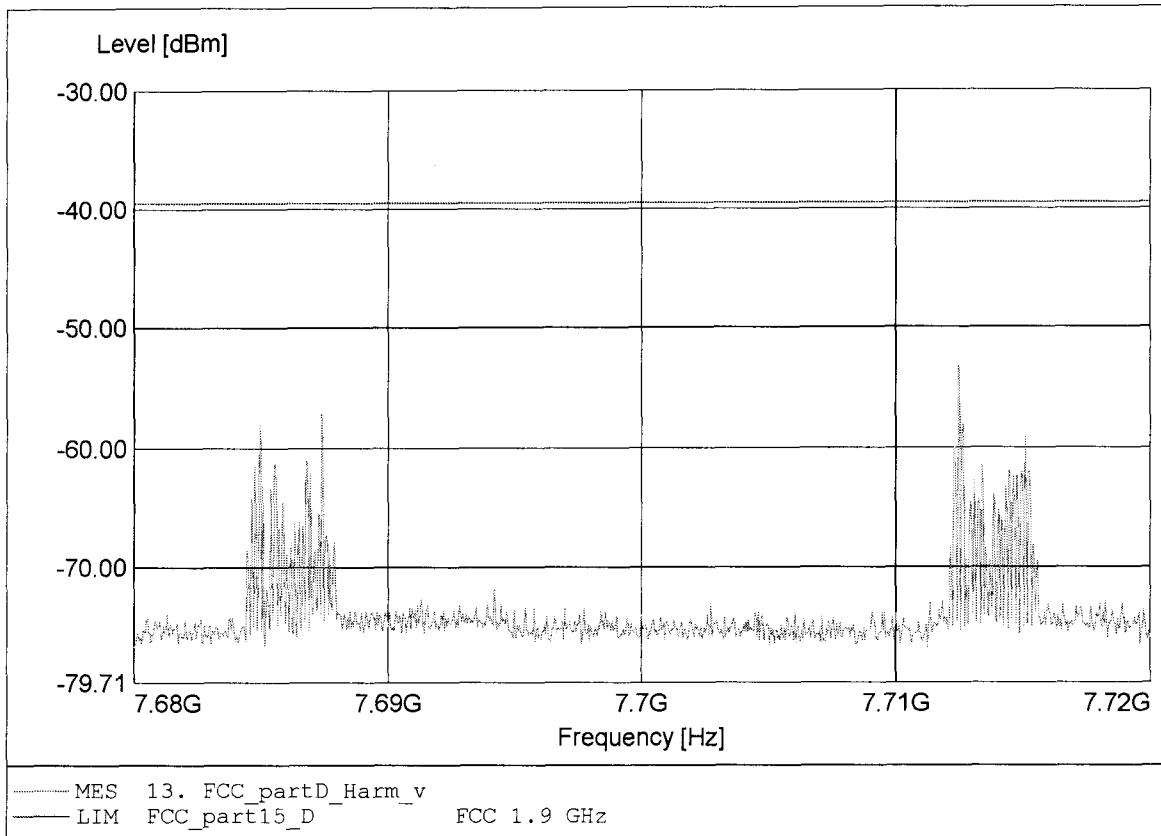

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:9.606GHz Pmax:-52.84dBm RBW:10 kHz

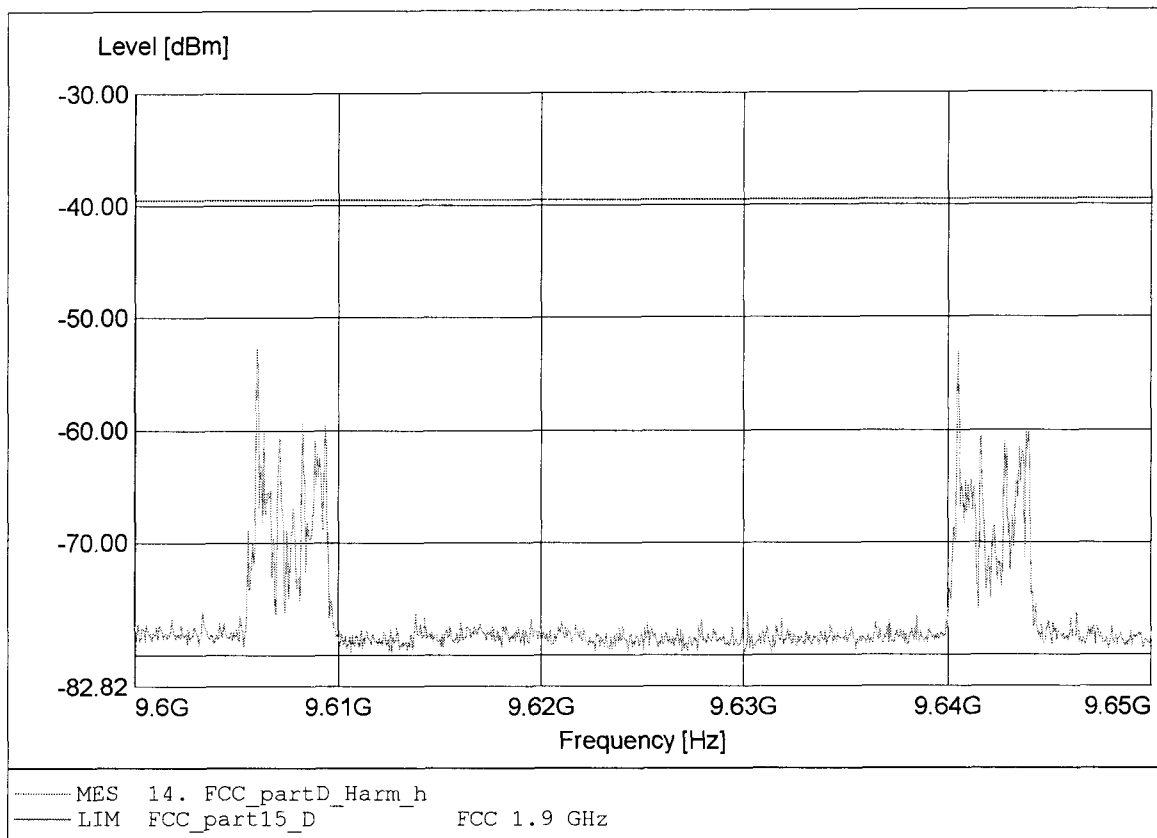

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:9.606GHz Pmax:-49.86dBm RBW:10 kHz

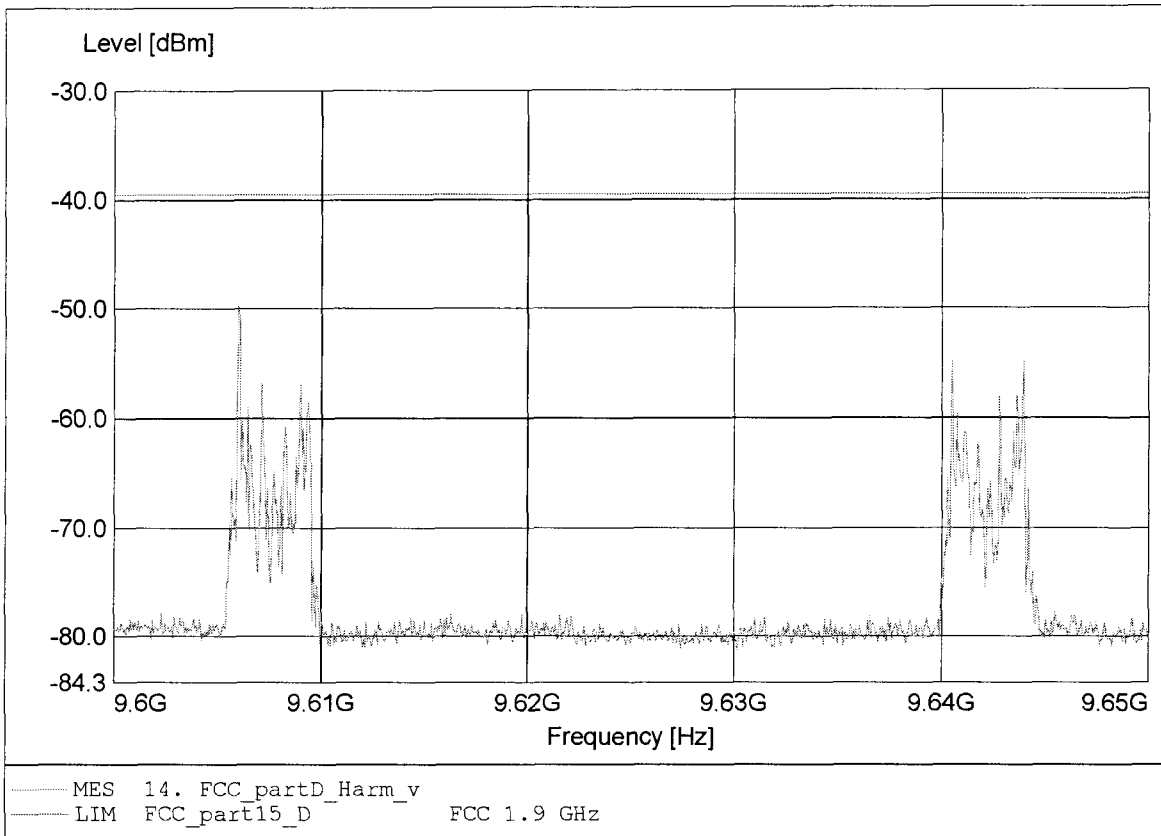

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:11.527GHz Pmax:-44.82dBm RBW:10 kHz

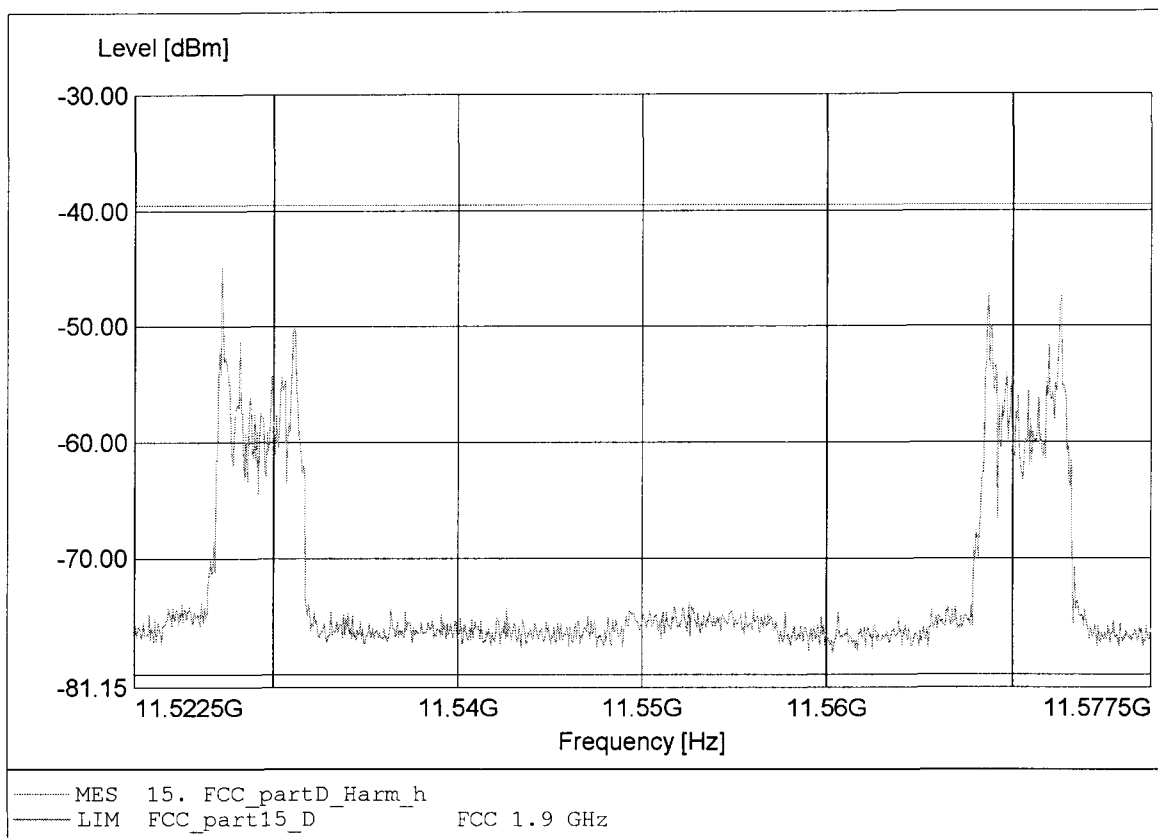

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:11.569GHz Pmax:-46.16dBm RBW:10 kHz

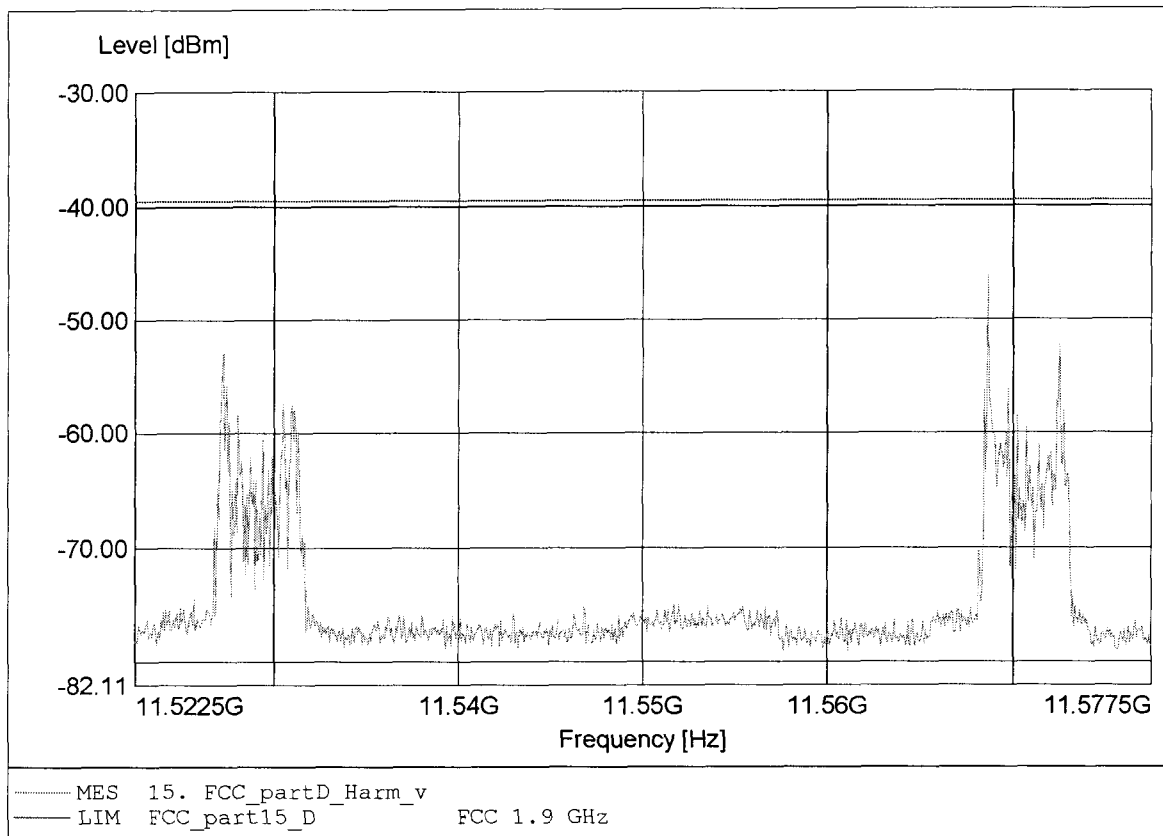

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:13.497GHz Pmax:-56.82dBm RBW:10 kHz

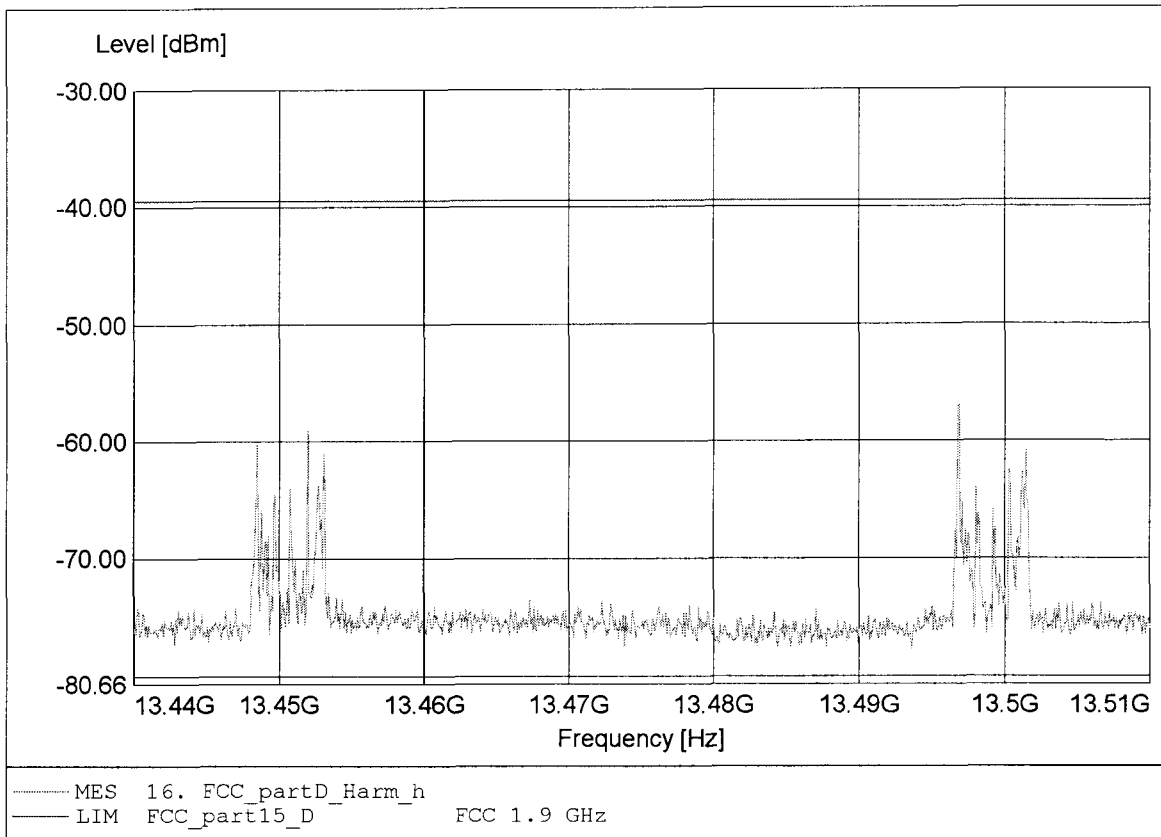

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:13.497GHz Pmax:-60.29dBm RBW:10 kHz

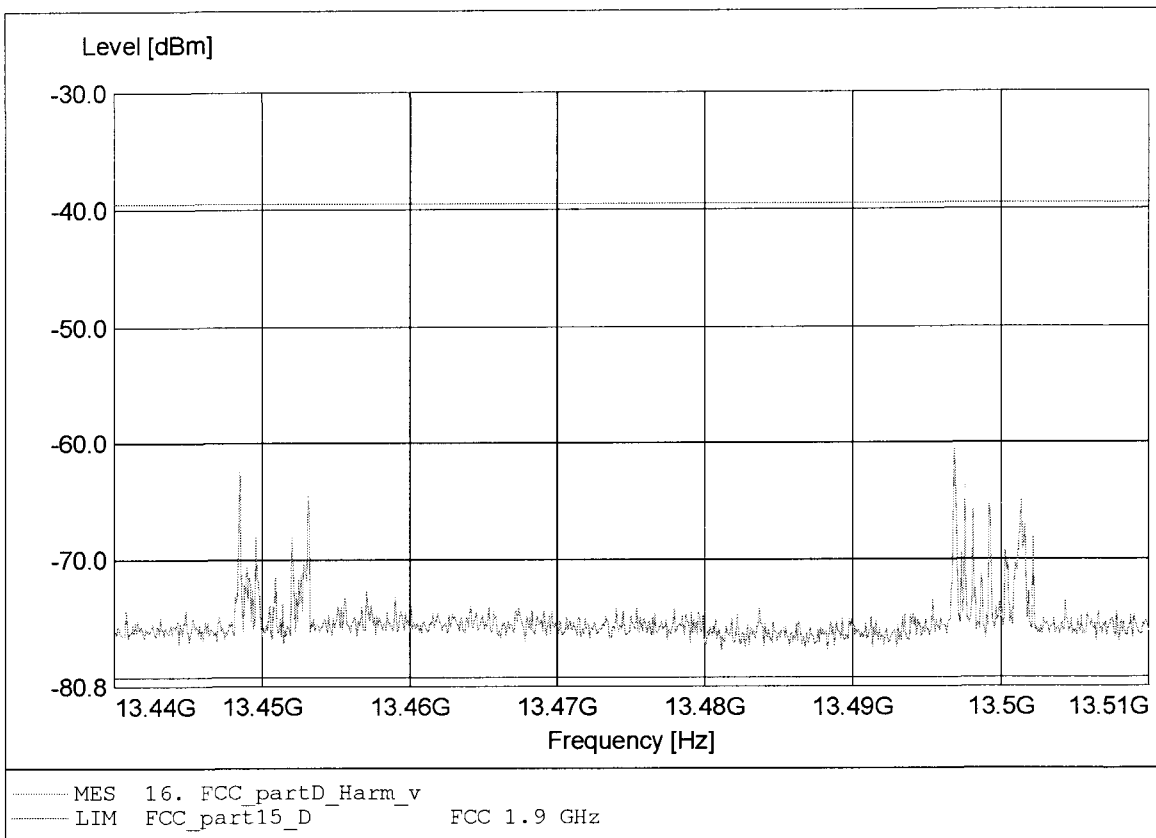

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**

Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:15.425GHz Pmax:-65.04dBm RBW:10 kHz

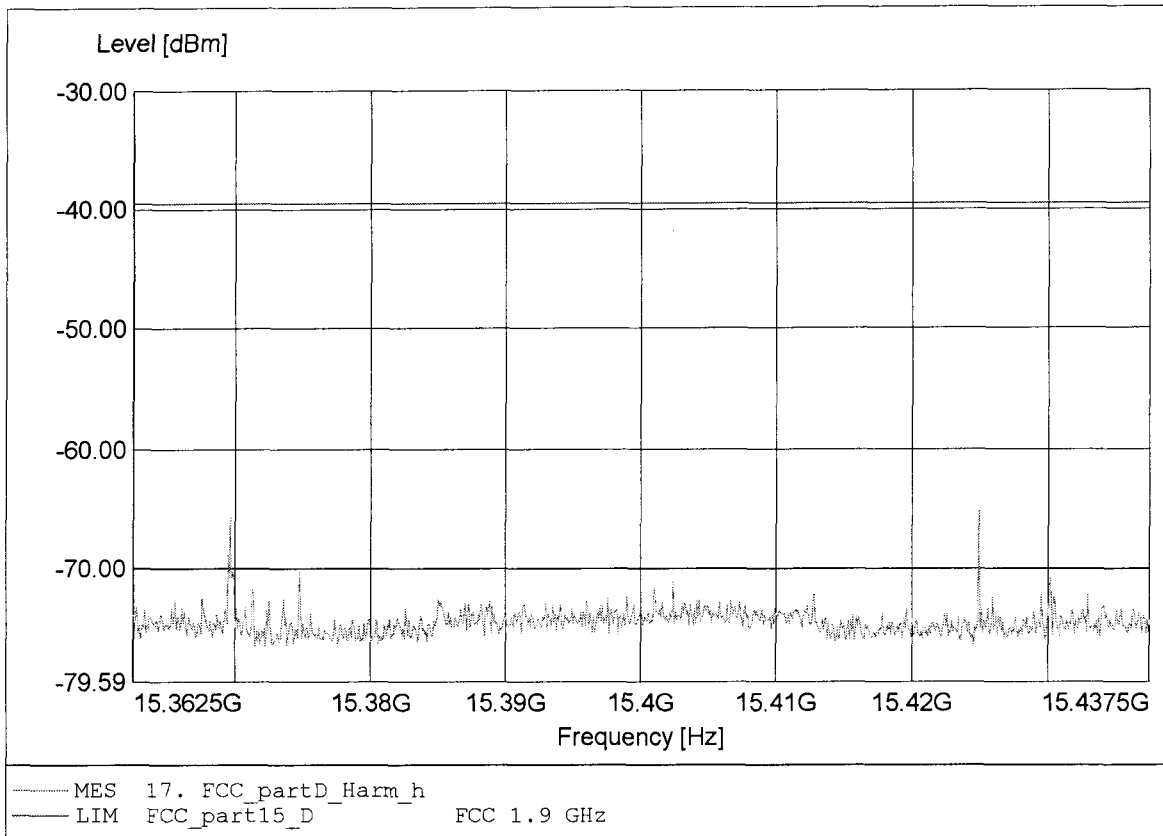




**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:15.370GHz Pmax:-66.43dBm RBW:10 kHz

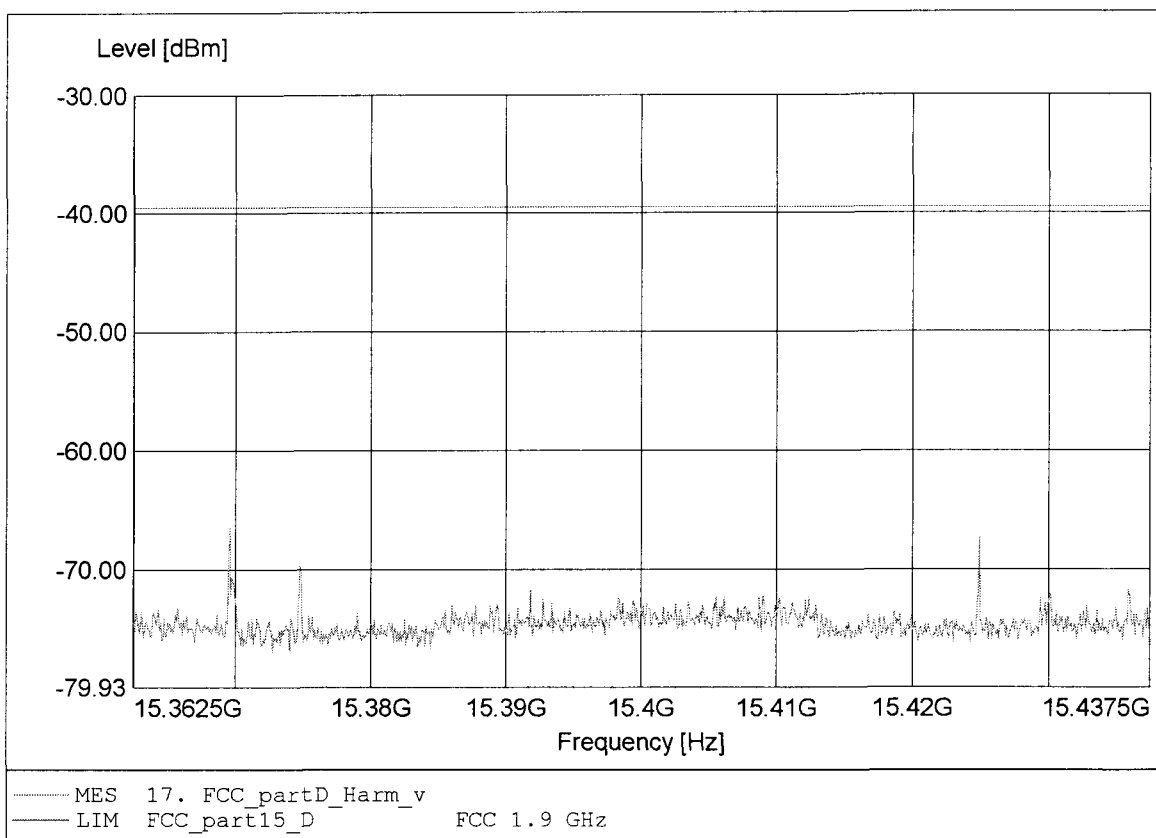

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:17.353GHz Pmax:-69.02dBm RBW:10 kHz

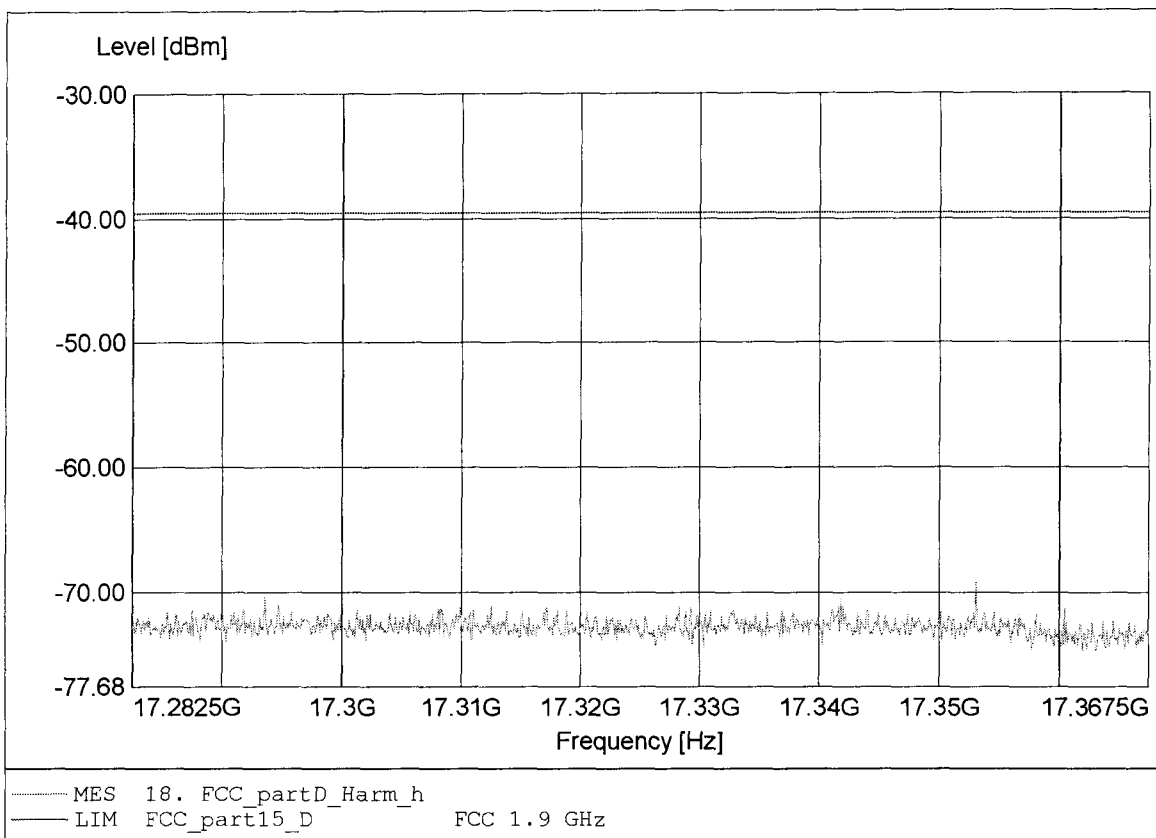

*Spurious emissions under normal conditions*

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:17.299GHz Pmax:-70.15dBm RBW:10 kHz

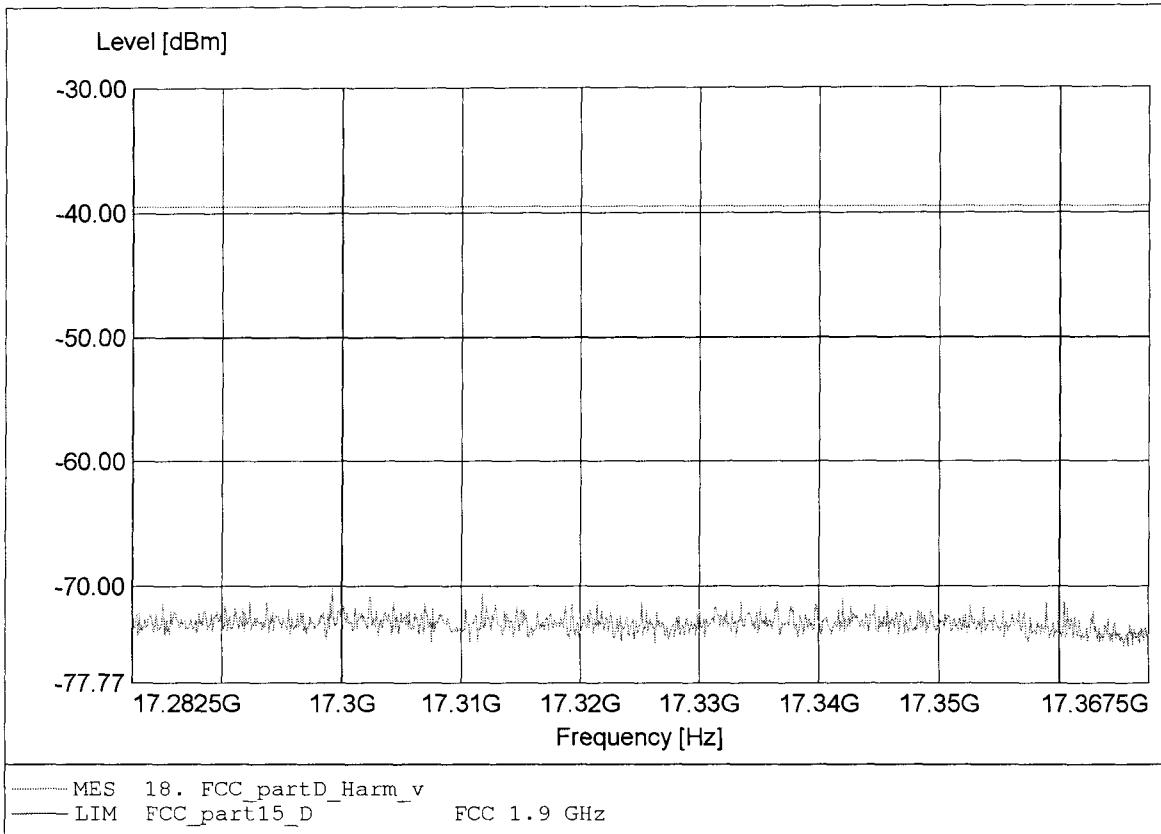

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:19.212GHz Pmax:-64.93dBm RBW:10 kHz

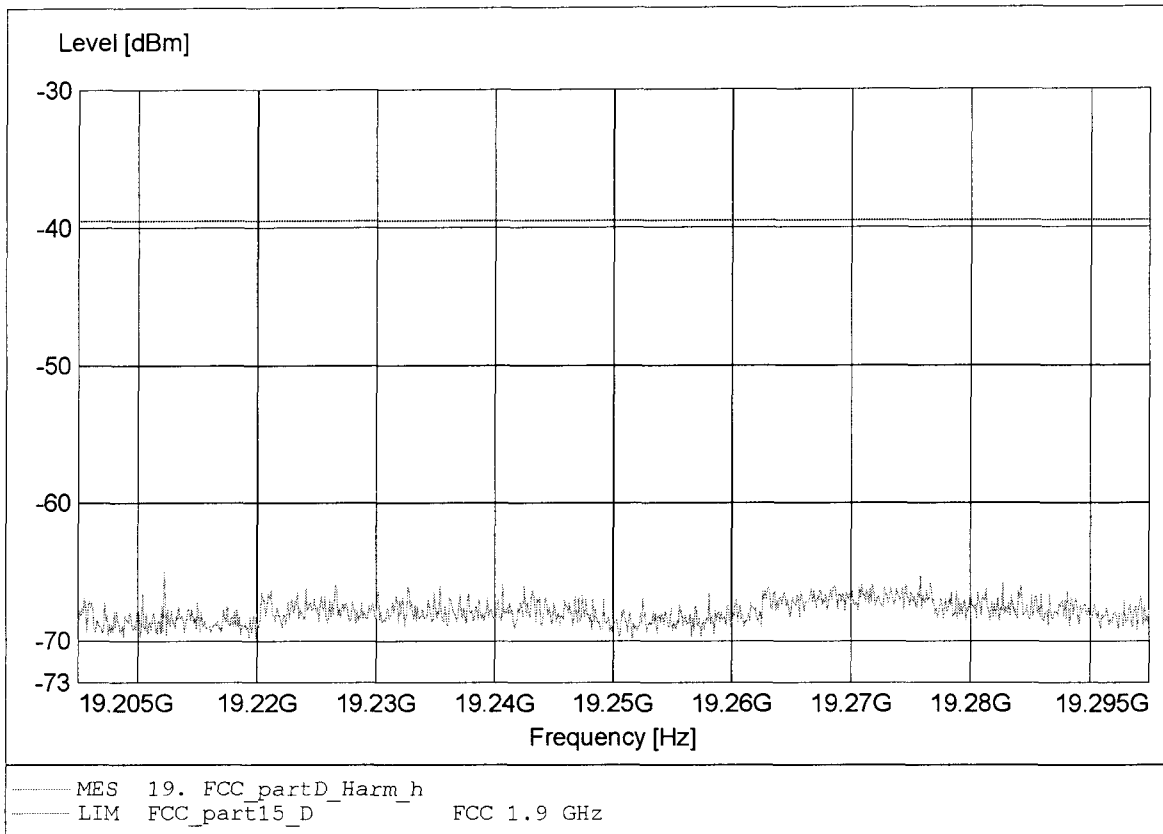

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**

Approval Holder: KIRK telecom A/S  
EUT: DECT PP, Portable Part  
Model/Channel/Ant.: PP6N20 1G9 / 0; 4 / 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Conditions: 23°C / Unom: 3.70 V DC  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:19.282GHz Pmax:-67.31dBm RBW:10 kHz

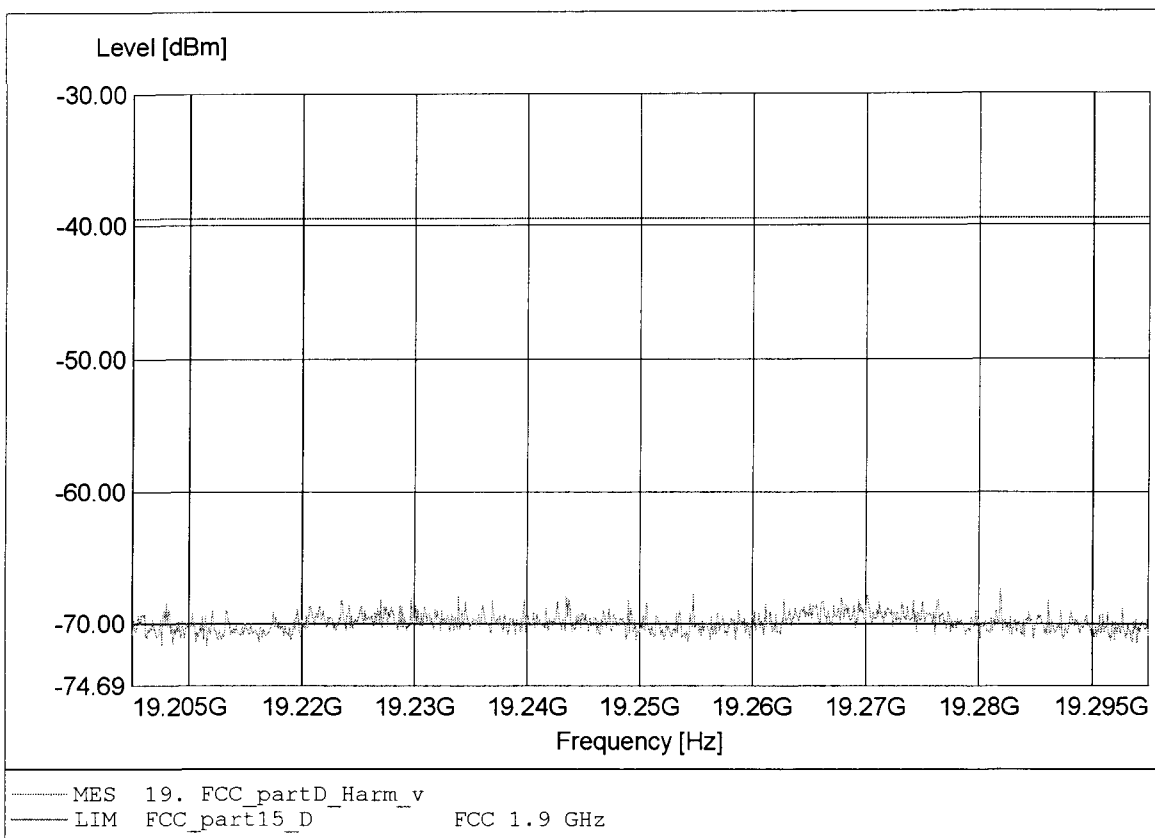

## Appendix S

Frame period



### FCC Part 15.323(e.1) Frame repetition


#### Testprocedure ANSI 63.17-1998 6.2.2

#### UCPS

EUT	DECT PP, Portable Part
Model	PP6N20 1G9
Applicant	KIRK telecom A/S
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.2 Frame repetition

Width of the frequency class	0,000001 Hz
Mean	99,999784 Hz
Deviation	0,000004
Stability in ppm	0,111721 ppm
Test result	Verdict = PASS

Histogram

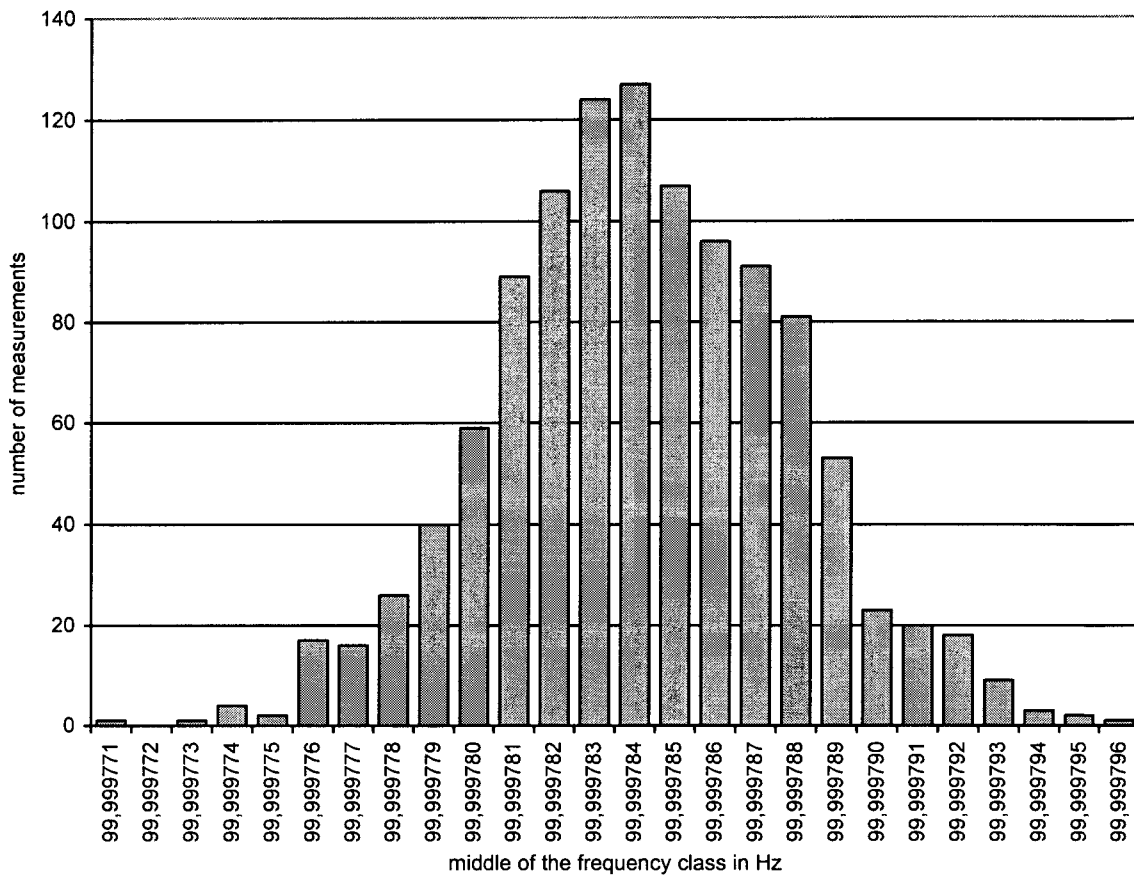

Measurement diagram



**FCC Part 15.323(e.4) Frame Period and jitter**


**Testprocedure ANSI 63.17-1998 6.2.3**

**UCPS**

EUT	DECT PP, Portable Part
Model	PP6N20 1G9
Applicant	KIRK telecom A/S
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.3 Frame Period and jitter

Width of the time class	0,036396 $\mu$ s
Mean	9,996773 ms
Deviation	0,000133
Max-Min	0,909902 $\mu$ s
Test result	Verdict = PASS

**Histogram**

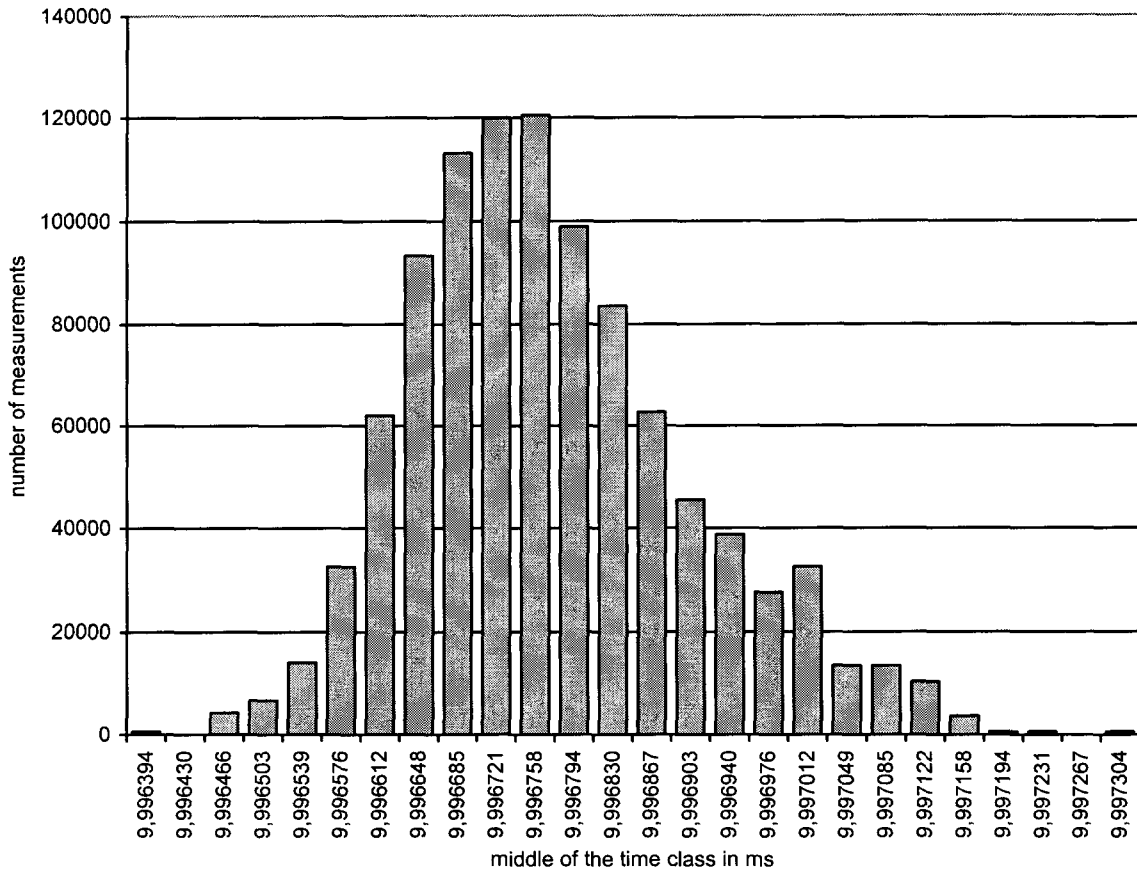

Measurement diagram



## Appendix T

Frequency stability


## FCC Part 15.323(f) Frequency Stability

### Testprocedure ANSI 63.17-1998 6.2.1

EUT	DECT PP, Portable Part
Model	PP6N20 1G9
Applicant	KIRK telecom A/S
Temperature	25 °C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.1 Frequency stability

Power supply	Vnom
Frequency of carrier	1925,000202 MHz
Measured mean	1925,000230 MHz
Stability (supply temp)	reference
Result	Verdict = PASS
Stability over time	fmax : 1,70 ppm fmin : 3,08 ppm
Result	Verdict = PASS

### Histogram

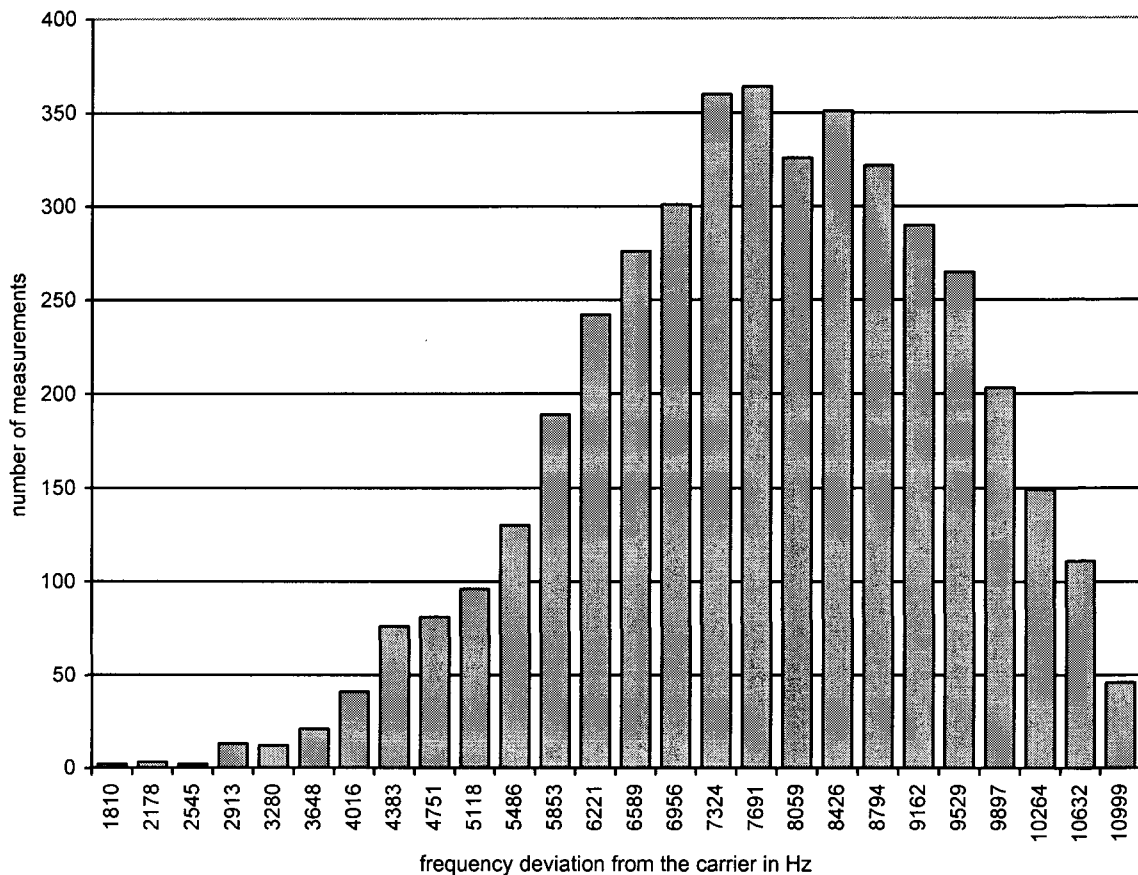

Measurement diagram




## FCC Part 15.323(f) Frequency Stability

### Testprocedure ANSI 63.17-1998 6.2.1

EUT	DECT PP, Portable Part
Model	PP6N20 1G9
Applicant	KIRK telecom A/S
Temperature	55 °C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.1 Frequency stability

Power supply	Vnom
Frequency of carrier	1925,000230 MHz
Measured mean	1924,995062 MHz
Stability (supply temp)	2,68 ppm
Result	Verdict = PASS
Stability over time	fmax : 7,12 ppm fmin : 5,30 ppm
Result	Verdict = PASS

**Histogram**

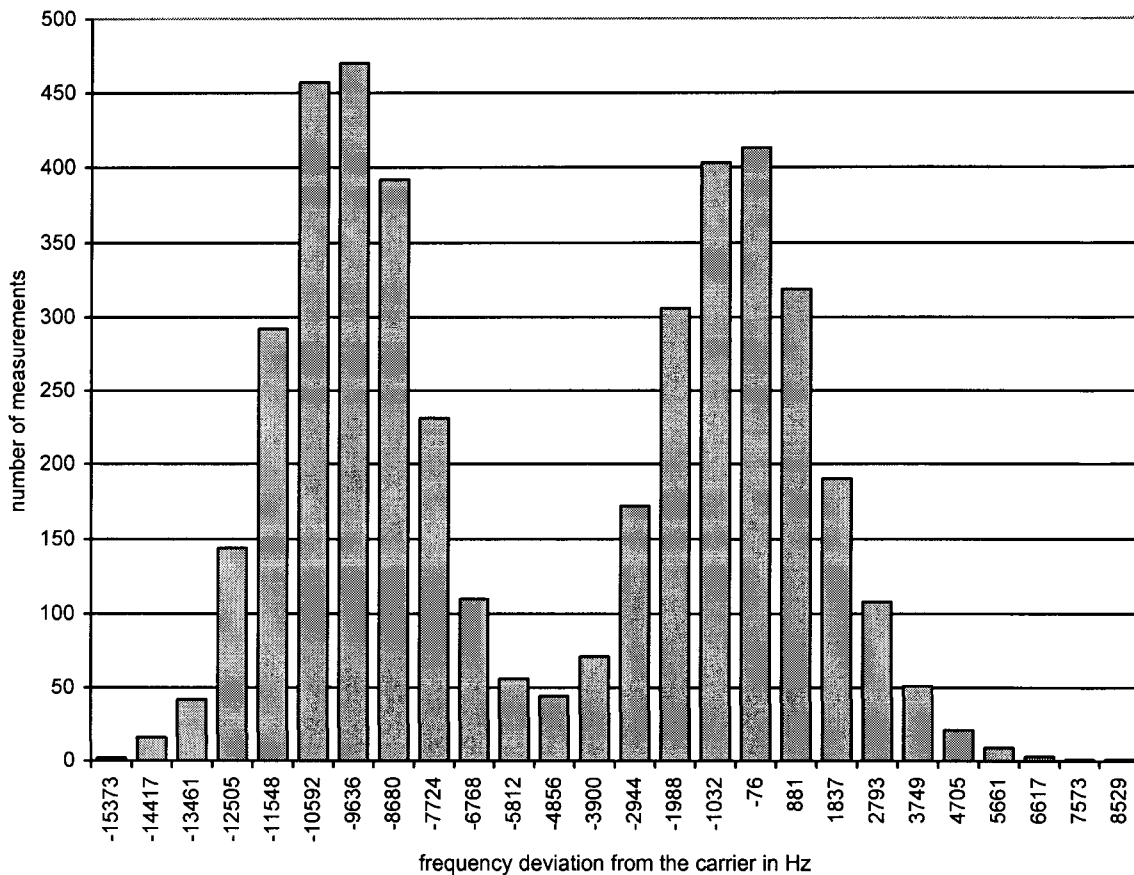

Measurement diagram


## FCC Part 15.323(f) Frequency Stability

### Testprocedure ANSI 63.17-1998 6.2.1

EUT	DECT PP, Portable Part
Model	PP6N20 1G9
Applicant	KIRK telecom A/S
Temperature	-10 °C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.1 Frequency stability

Power supply	Vnom
Frequency of carrier	1925,000230 MHz
Measured mean	1925,008673 MHz
Stability (supply temp)	-4,39 ppm
Result	Verdict = PASS
Stability over time	fmax : 1,33 ppm fmin : 3,66 ppm
Result	Verdict = PASS

### Histogram

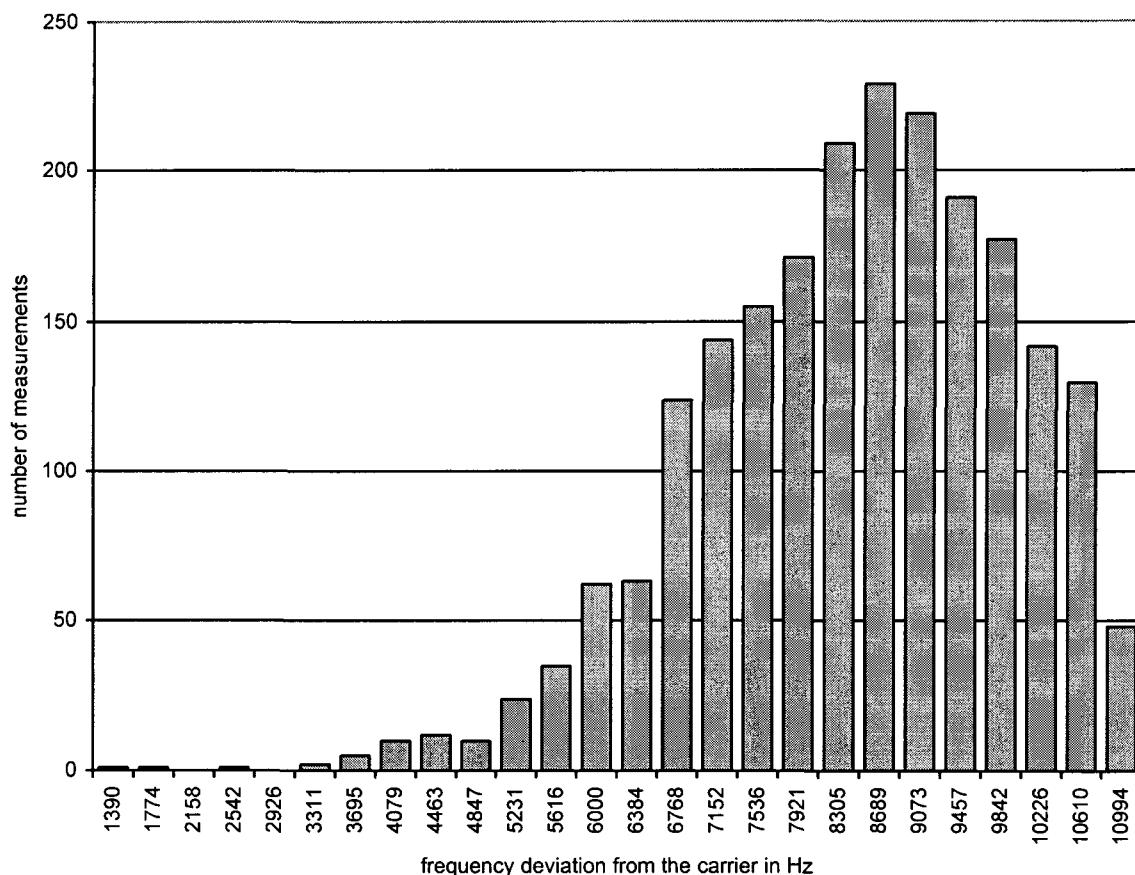

Measurement diagram




## Appendix U

Receiver spurious emissions


**Field Strength under normal conditions  
Standards Industry Canada, RSS-GEN**

Approval Holder: KIRK telecom A/S  
EUT: DECT Portable Part  
Model: PP6N20 / 1924.992 MHz  
Test Site / Operator: ETS / Mr. Handrik  
Operating Conditions: 23°C / Unom.: 3.7 V DC  
Test Specification: according to RSS-Gen Issue 1  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:31.022MHz Emax:36.17dBµV/m RBW: 100 kHz

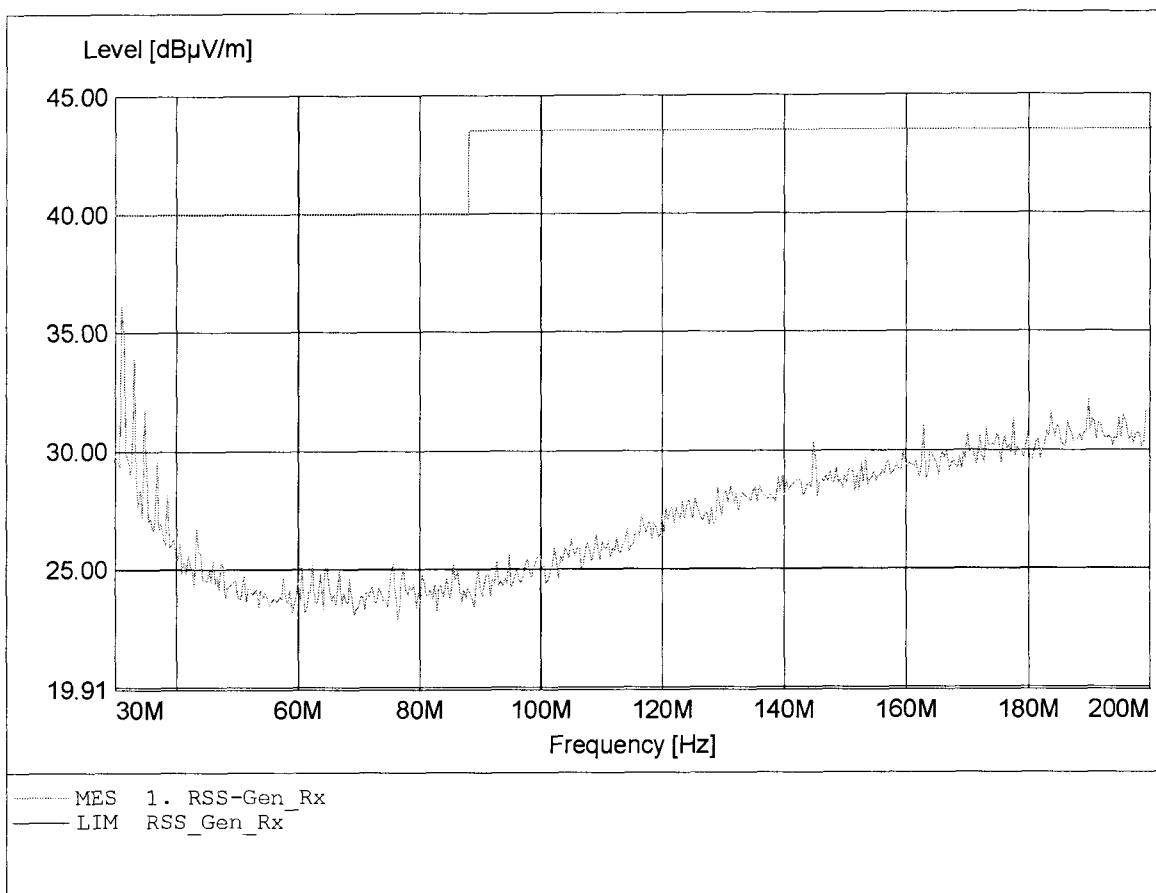


**Field Strength under normal conditions  
Standards Industry Canada, RSS-GEN**

Approval Holder: KIRK telecom A/S  
EUT: DECT Portable Part  
Model: PP6N20 / 1924.992 MHz  
Test Site / Operator: ETS / Mr. Handrik  
Operating Conditions: 23°C / Unom.: 3.7 V DC  
Test Specification: according to RSS-Gen Issue 1  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:31.022MHz Emax:36.92dBµV/m RBW: 100 kHz

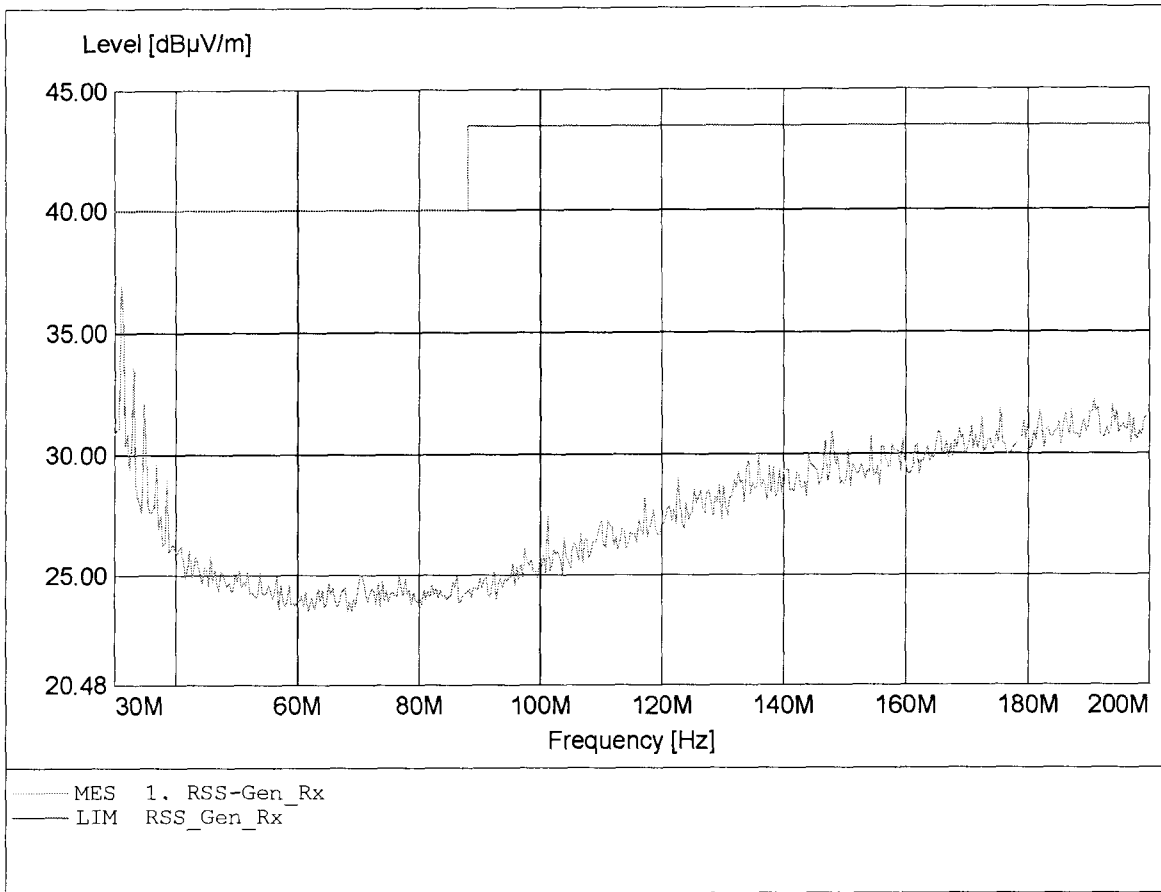

**Field Strength under normal conditions  
Standards Industry Canada, RSS-GEN**


Approval Holder: KIRK telecom A/S  
EUT: DECT Portable Part  
Model: PP6N20 / 1924.992 MHz  
Test Site / Operator: ETS / Mr. Handrik  
Operating Conditions: 23°C / Unom.: 3.7 V DC  
Test Specification: according to RSS-Gen Issue 1  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Comment 2: Freq:988.778MHz Emax:23.37dBµV/m RBW: 100 kHz

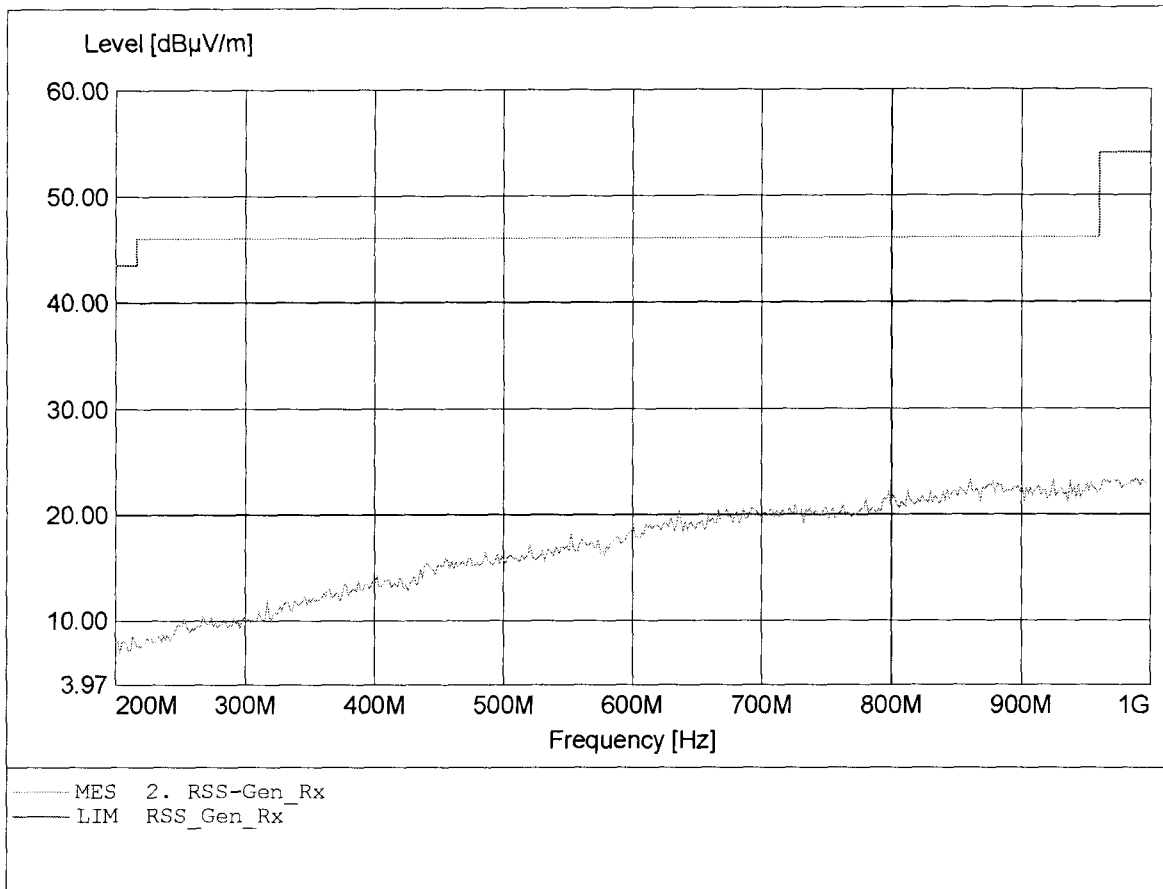




**Field Strength under normal conditions  
Standards Industry Canada, RSS-GEN**

Approval Holder: KIRK telecom A/S  
EUT: DECT Portable Part  
Model: PP6N20 / 1924.992 MHz  
Test Site / Operator: ETS / Mr. Handrik  
Operating Conditions: 23°C / Unom.: 3.7 V DC  
Test Specification: according to RSS-Gen Issue 1  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Comment 2: Freq:964.729MHz Emax:24.13dBµV/m RBW: 100 kHz

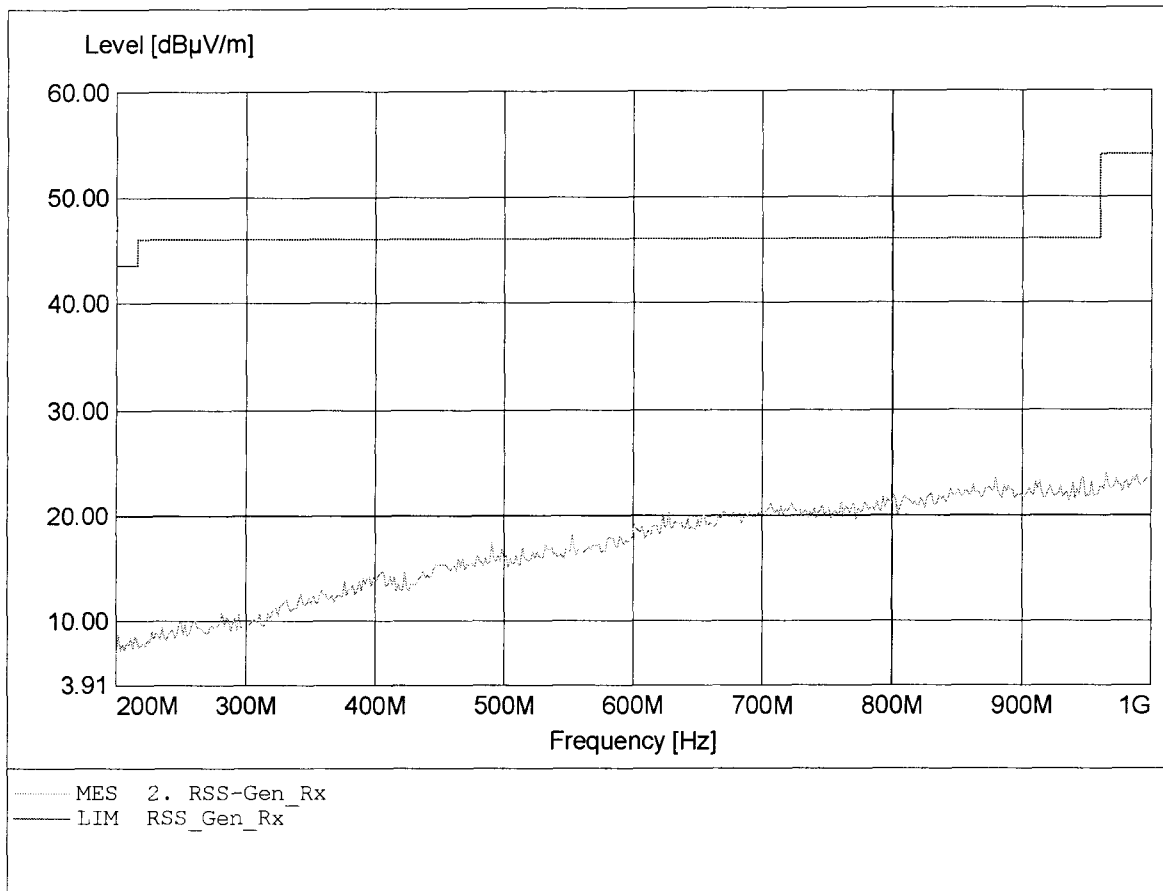


**Field Strength under normal conditions  
Standards Industry Canada, RSS-GEN**

Approval Holder: KIRK telecom A/S  
EUT: DECT Portable Part  
Model: PP6N20 1G9 / 1924.992 MHz  
Test Site / Operator: ETS / Mr. Handrik  
Operating Conditions: 23°C / Unom.: 3.7 V DC  
Test Specification: according to RSS-Gen Issue 1  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Comment 2: Freq:3.970GHz Emax:51.32dBµV/m RBW: 1 MHz

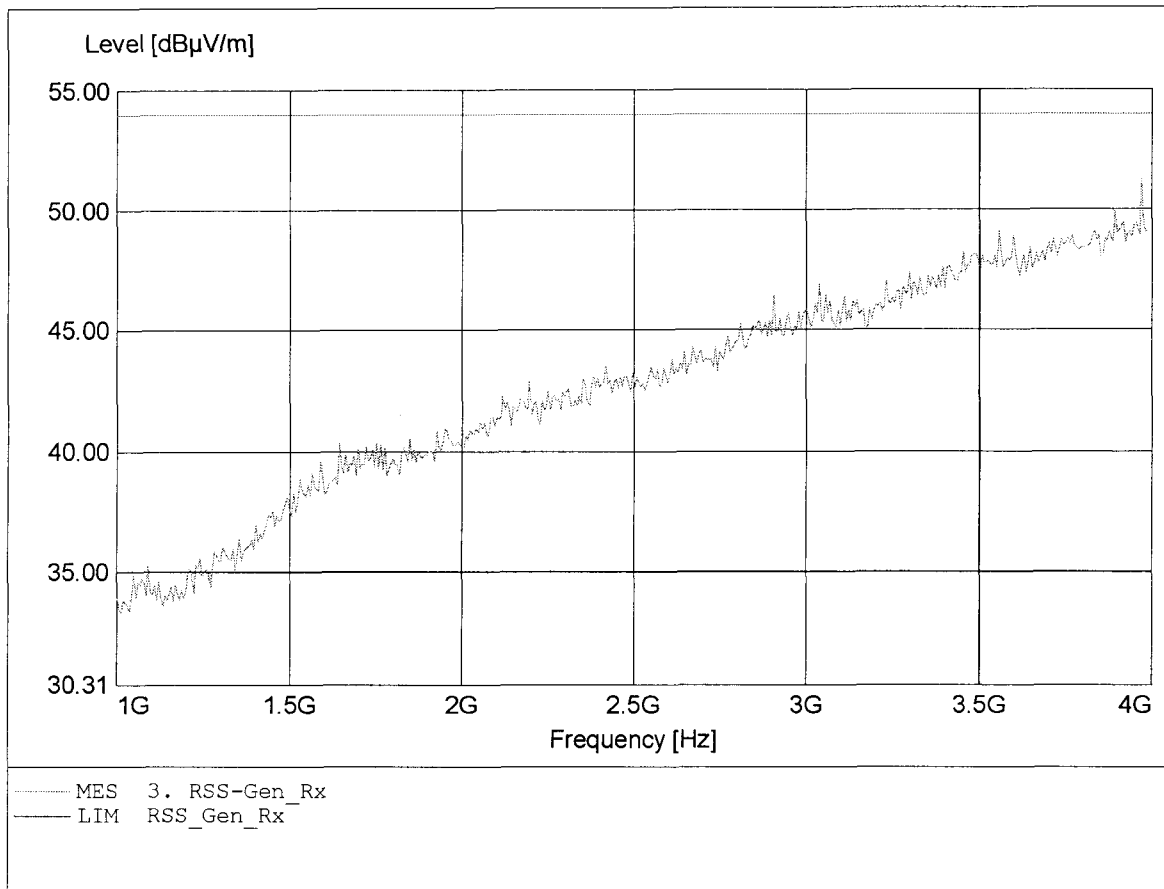


**Field Strength under normal conditions  
Standards Industry Canada, RSS-GEN**

Approval Holder: KIRK telecom A/S  
EUT: DECT Portable Part  
Model: PP6N20 / 1924.992 MHz  
Test Site / Operator: ETS / Mr. Handrik  
Operating Conditions: 23°C / Unom.: 3.7 V DC  
Test Specification: according to RSS-Gen Issue 1  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Comment 2: Freq:3.946GHz Emax:50.17dBµV/m RBW: 1 MHz

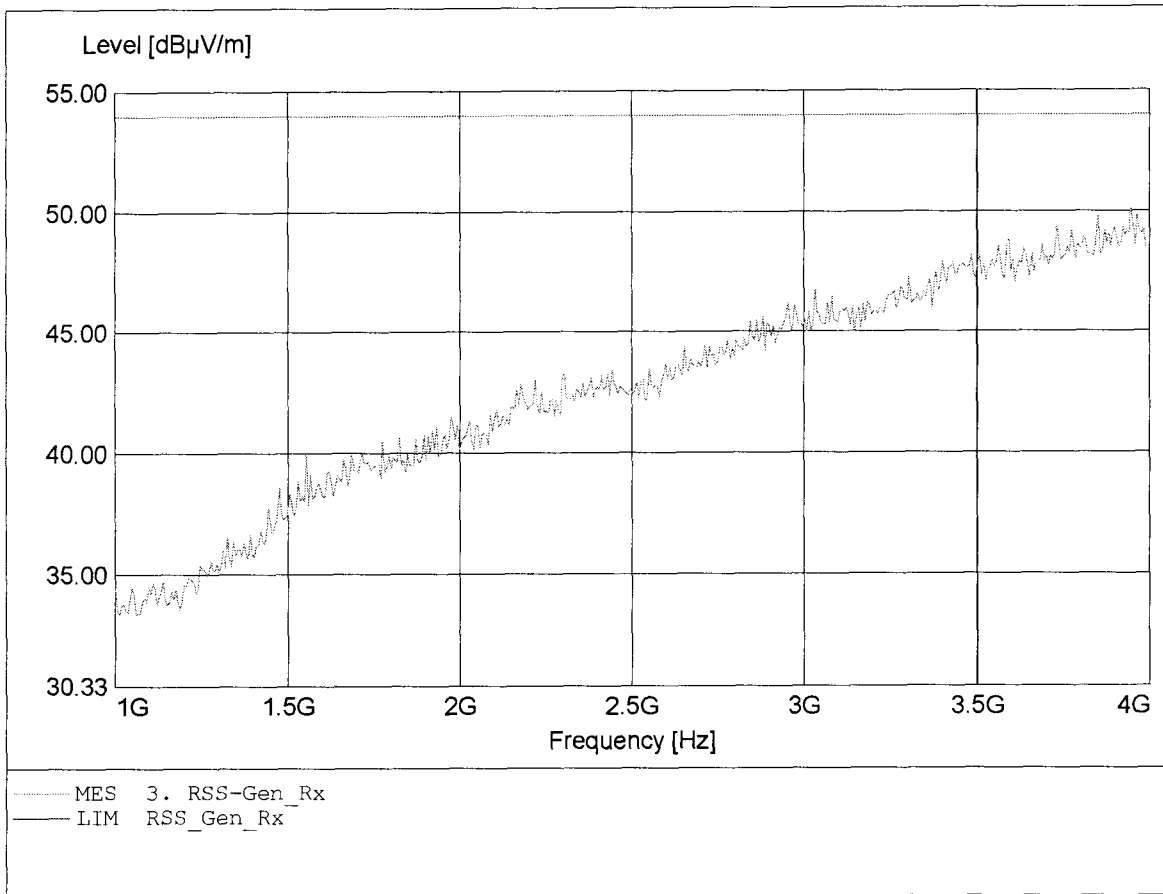


**Field Strength under normal conditions  
Standards Industry Canada, RSS-GEN**

Approval Holder: KIRK telecom A/S  
EUT: DECT Portable Part  
Model: PP6N20 1G9 / 1924.992 MHz  
Test Site / Operator: ETS / Mr. Handrik  
Operating Conditions: 23°C / Unom.: 3.7 V DC  
Test Specification: according to RSS-Gen Issue 1  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Comment 2: Freq:7.615GHz Emax:47.29dBµV/m RBW: 1 MHz

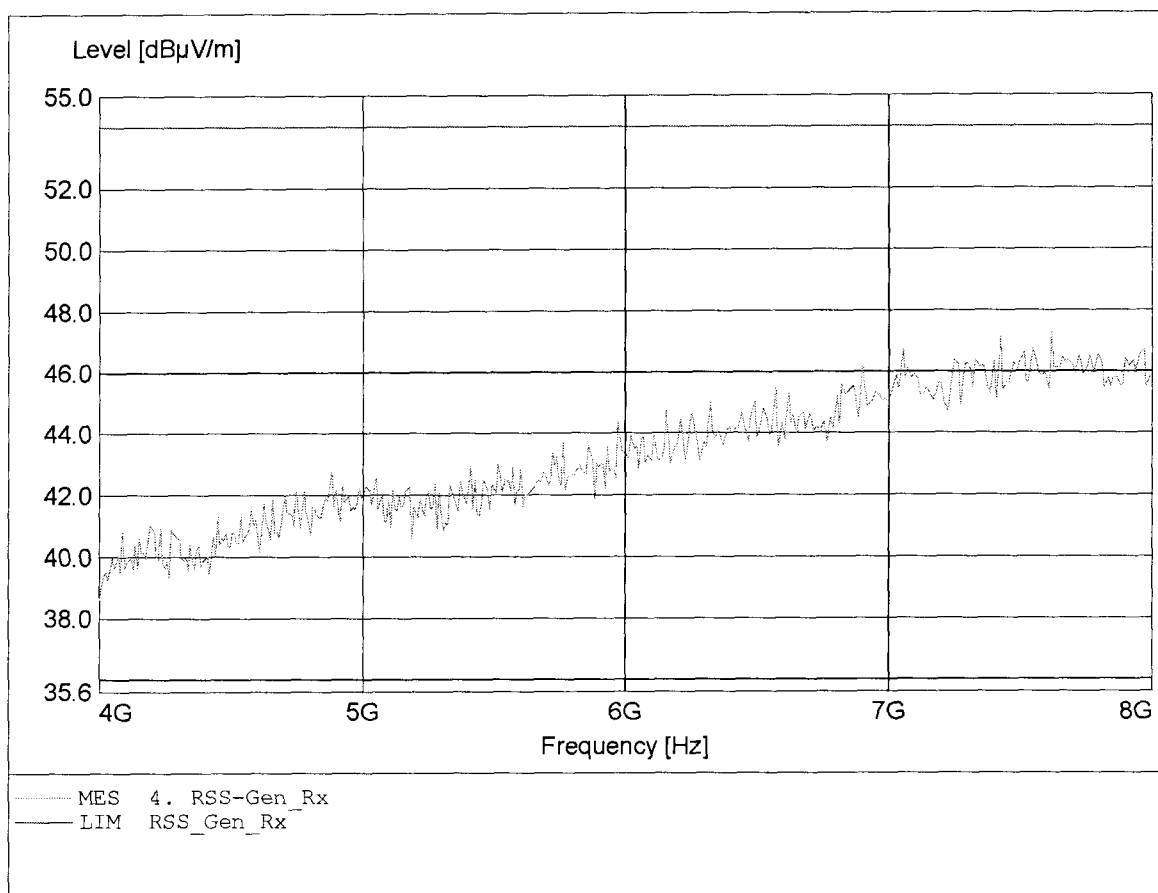


**Field Strength under normal conditions  
Standards Industry Canada, RSS-GEN**

Approval Holder: KIRK telecom A/S  
EUT: DECT Portable Part  
Model: PP6N20 / 1924.992 MHz  
Test Site / Operator: ETS / Mr. Handrik  
Operating Conditions: 23°C / Unom.: 3.7 V DC  
Test Specification: according to RSS-Gen Issue 1  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Comment 2: Freq:7.623GHz Emax:47.35dBµV/m RBW: 1 MHz

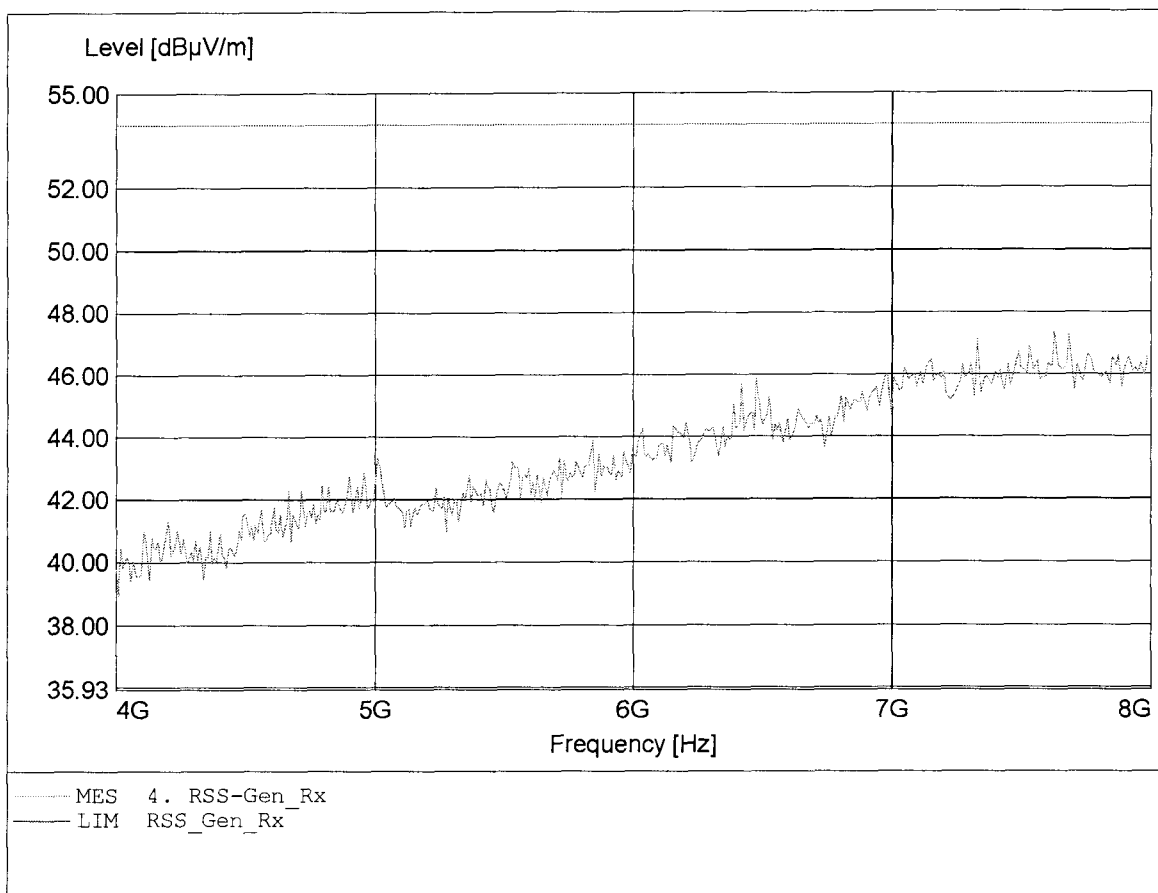

**Field Strength under normal conditions  
Standards Industry Canada, RSS-GEN**

Approval Holder: KIRK telecom A/S  
EUT: DECT Portable Part  
Model: PP6N20 1G9 / 1924.992 MHz  
Test Site / Operator: ETS / Mr. Handrik  
Operating Conditions: 23°C / Unom.: 3.7 V DC  
Test Specification: according to RSS-Gen Issue 1  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Comment 2: Freq:11.968GHz Emax:46.35dBµV/m RBW: 1 MHz

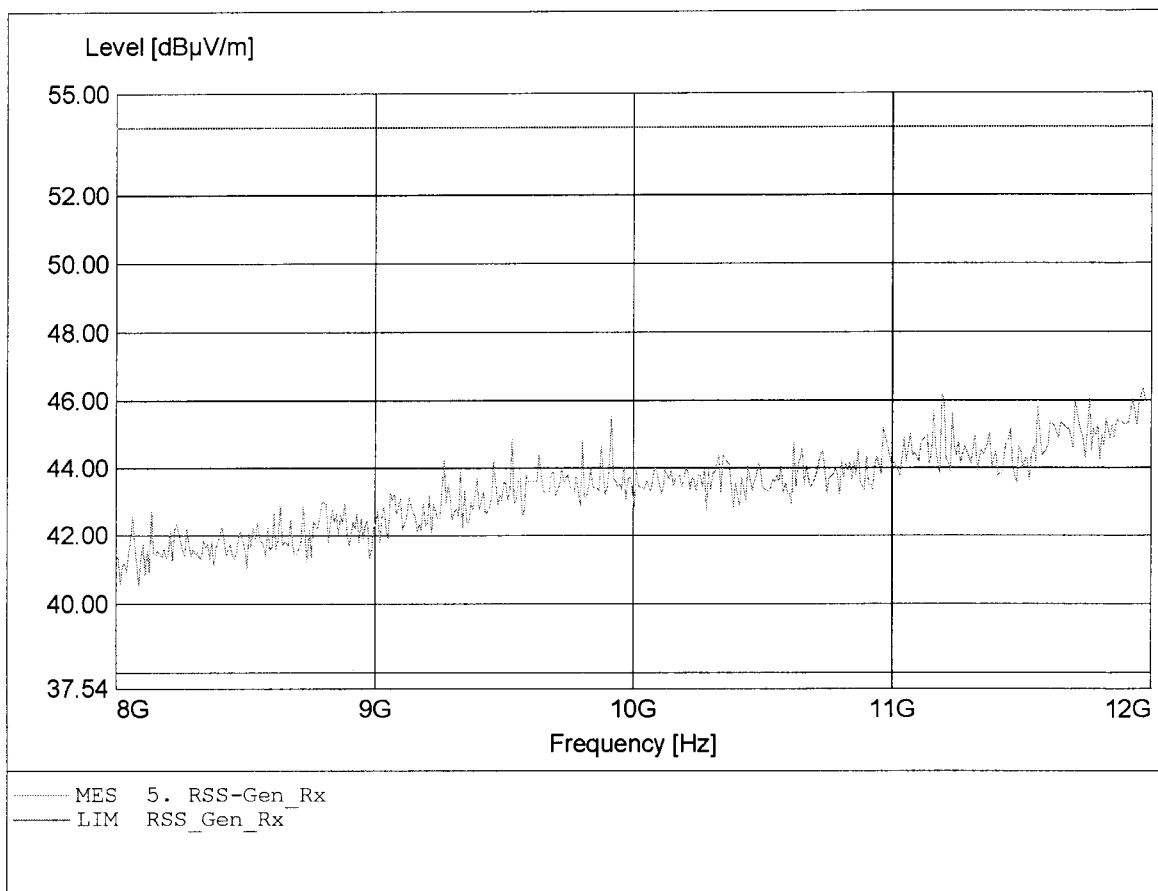

**Field Strength under normal conditions  
Standards Industry Canada, RSS-GEN**

Approval Holder: KIRK telecom A/S  
EUT: DECT Portable Part  
Model: PP6N20 1G9 / 1924.992 MHz  
Test Site / Operator: ETS / Mr. Handrik  
Operating Conditions: 23°C / Unom.: 3.7 V DC  
Test Specification: according to RSS-Gen Issue 1  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Comment 2: Freq:11.848GHz Emax:46.64dBuV/m RBW: 1 MHz

