

Annex B

Coordination with fixed microwave service

UTAM, Inc.


SECTION 15.307(b) AFFIDAVIT

I, Michael Stima, Managing Director of UTAM, Inc., hereby swear and affirm that:

KIRK Telecom, A/S

is a participating member of UTAM, Inc. in good standing for purposes of Section 15.307(b) of the FCC rules.

Subscribed to and sworn this 12th day of July, 2005

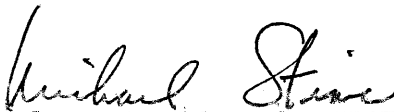

Michael Stima, Managing Director
UTAM, Inc.
1170 U.S. Hwy 22
P.O. Box 8126
Bridgewater, New Jersey 08807
Tel: (508) 526-3636

Affidavit #: KIRK071205


Annex C

Radio frequency radiation exposure

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.921GHz Pmax:11.13dBm RBW: 5 MHz

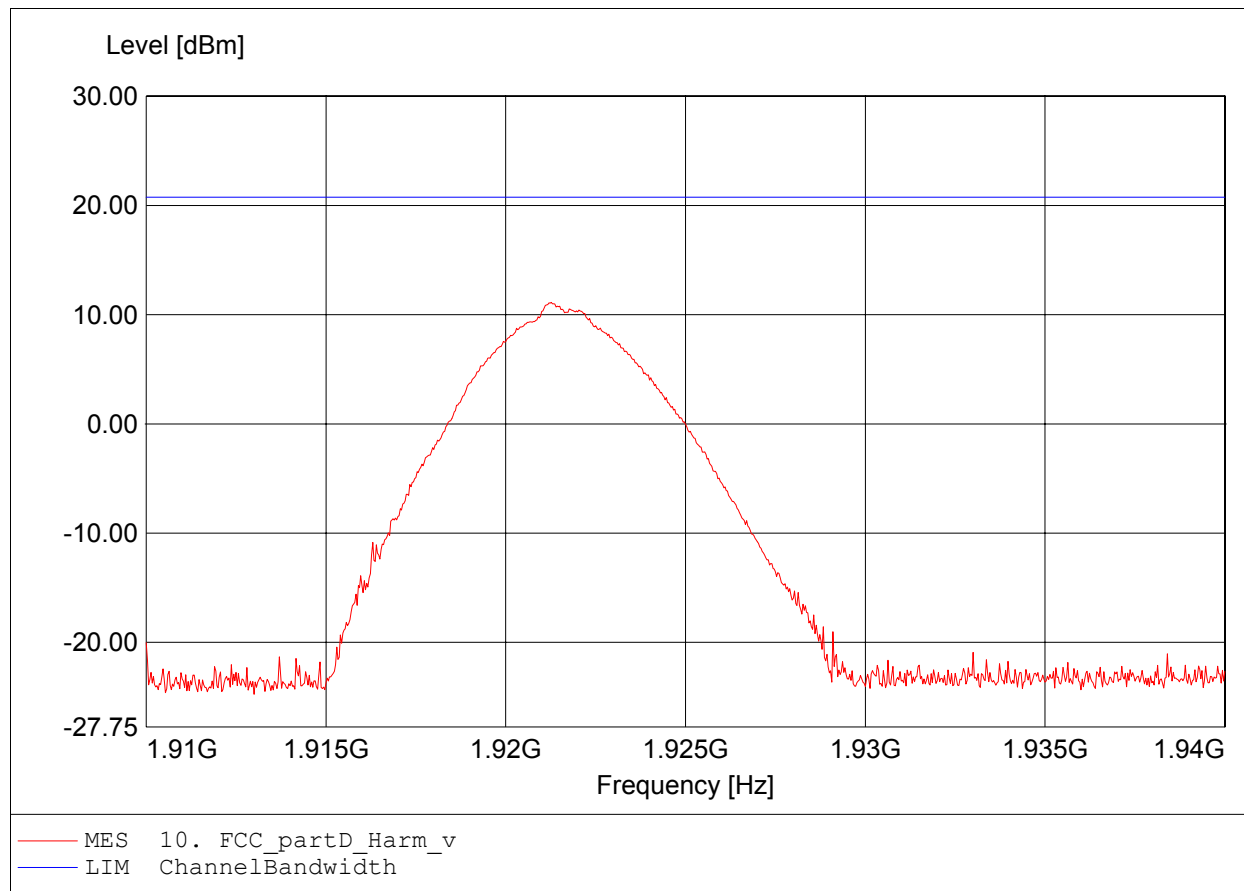

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.921GHz Pmax:13.83dBm RBW: 5 MHz

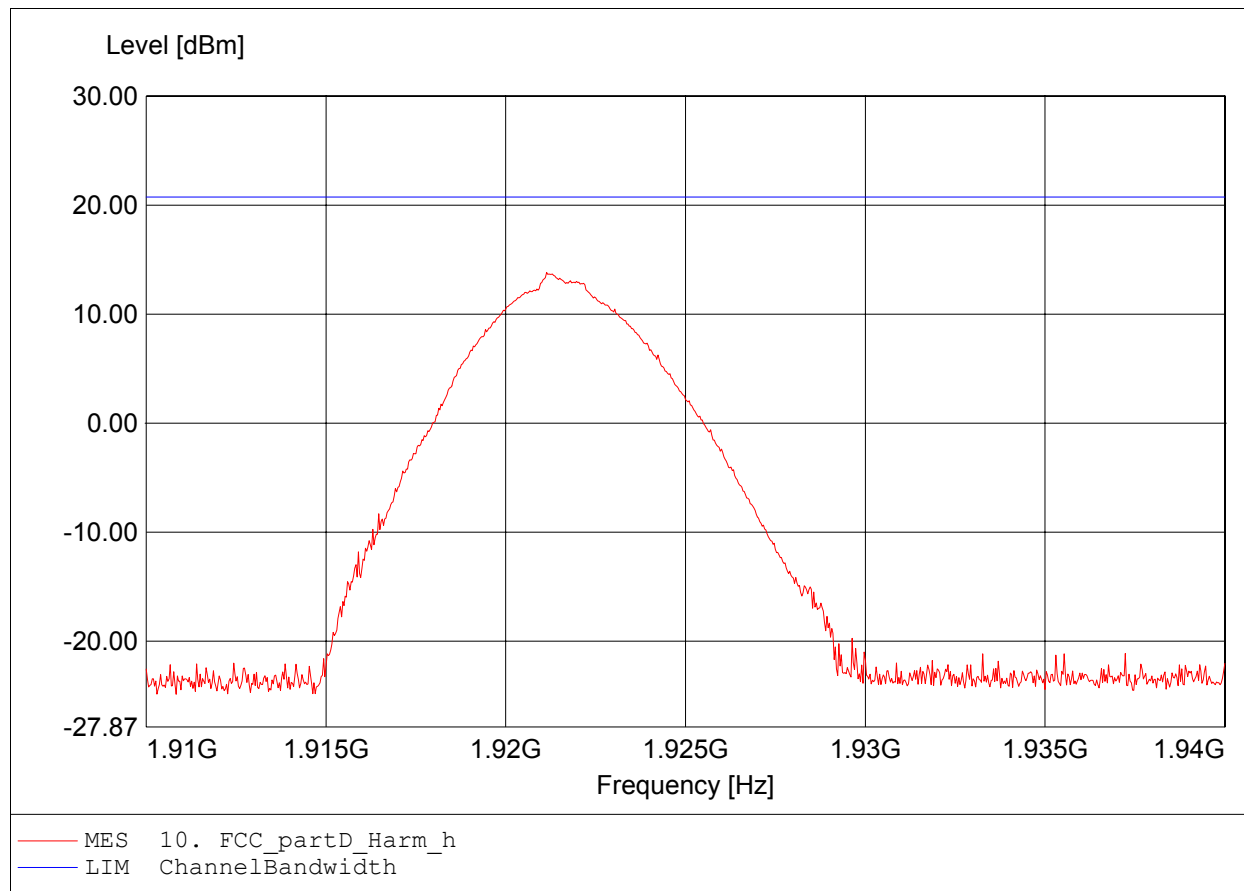

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 2 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.925GHz Pmax:11.70dBm RBW: 5 MHz

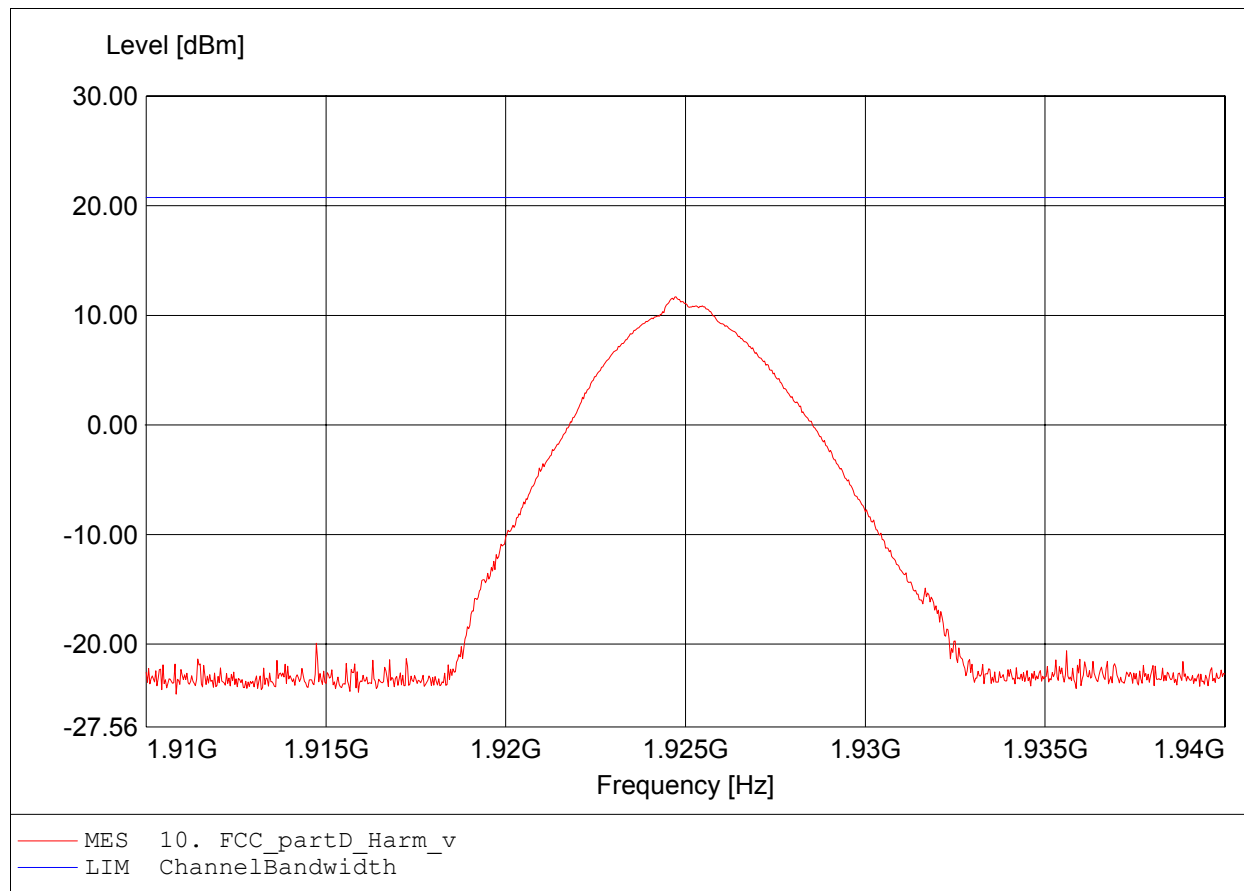

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 2 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.925GHz Pmax:13.81dBm RBW: 5 MHz

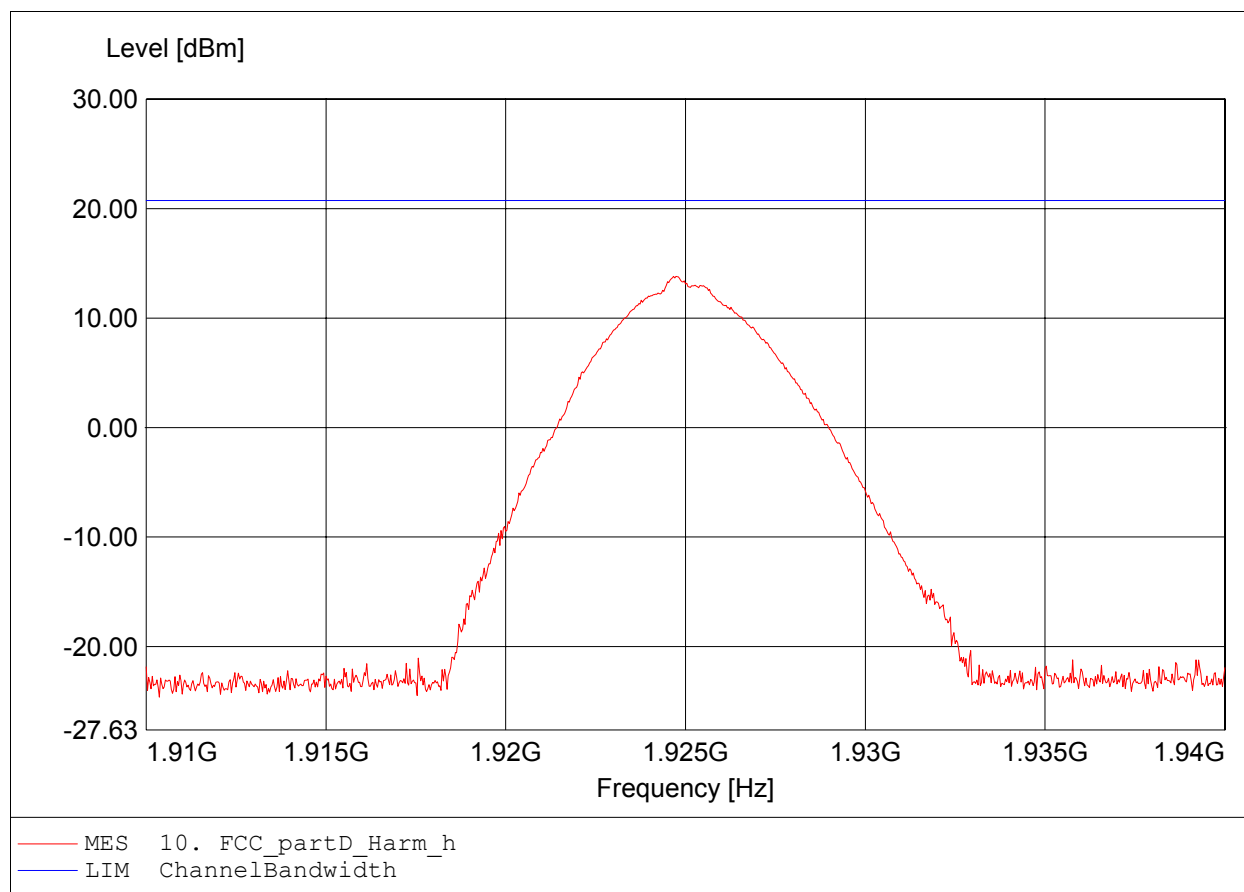

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.928GHz Pmax:12.01dBm RBW: 5 MHz

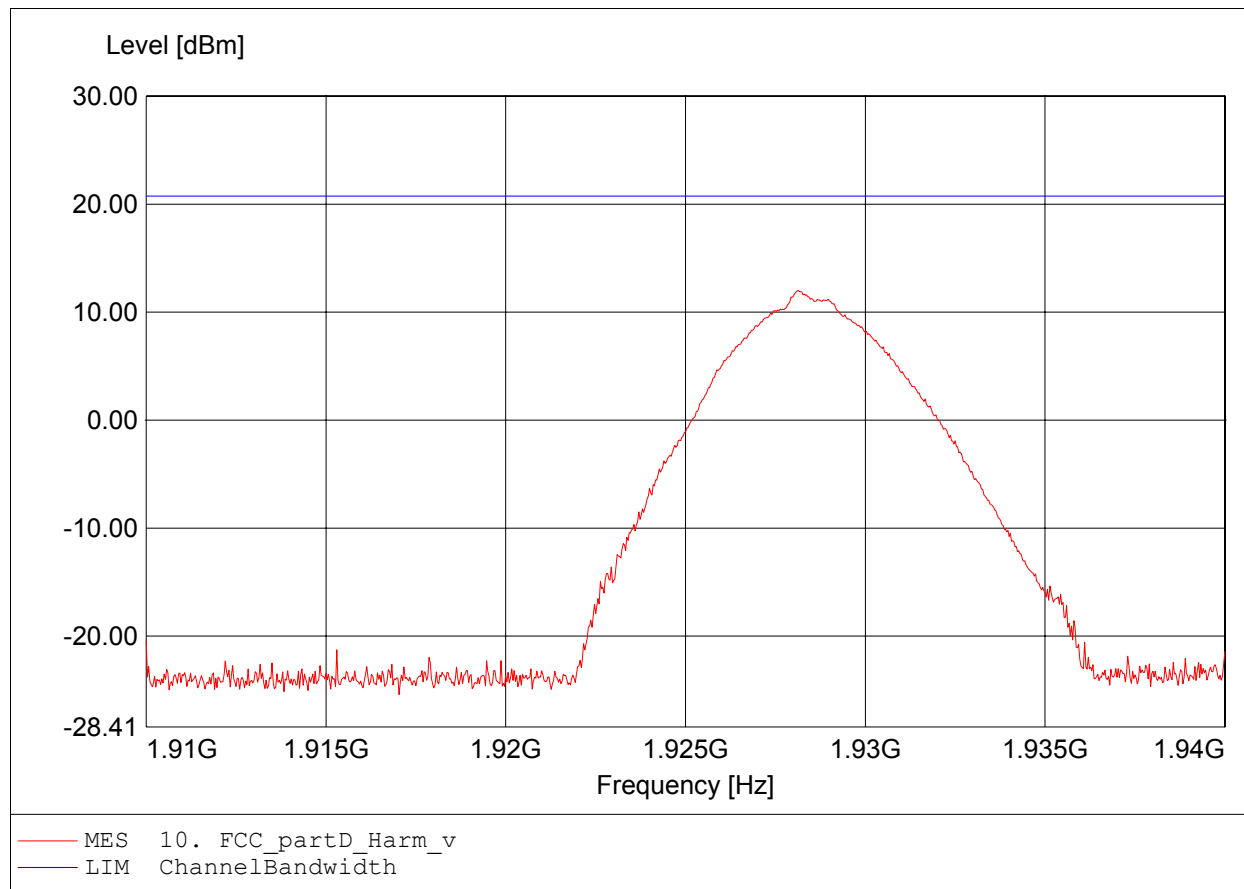

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.928GHz Pmax:13.93dBm RBW: 5 MHz

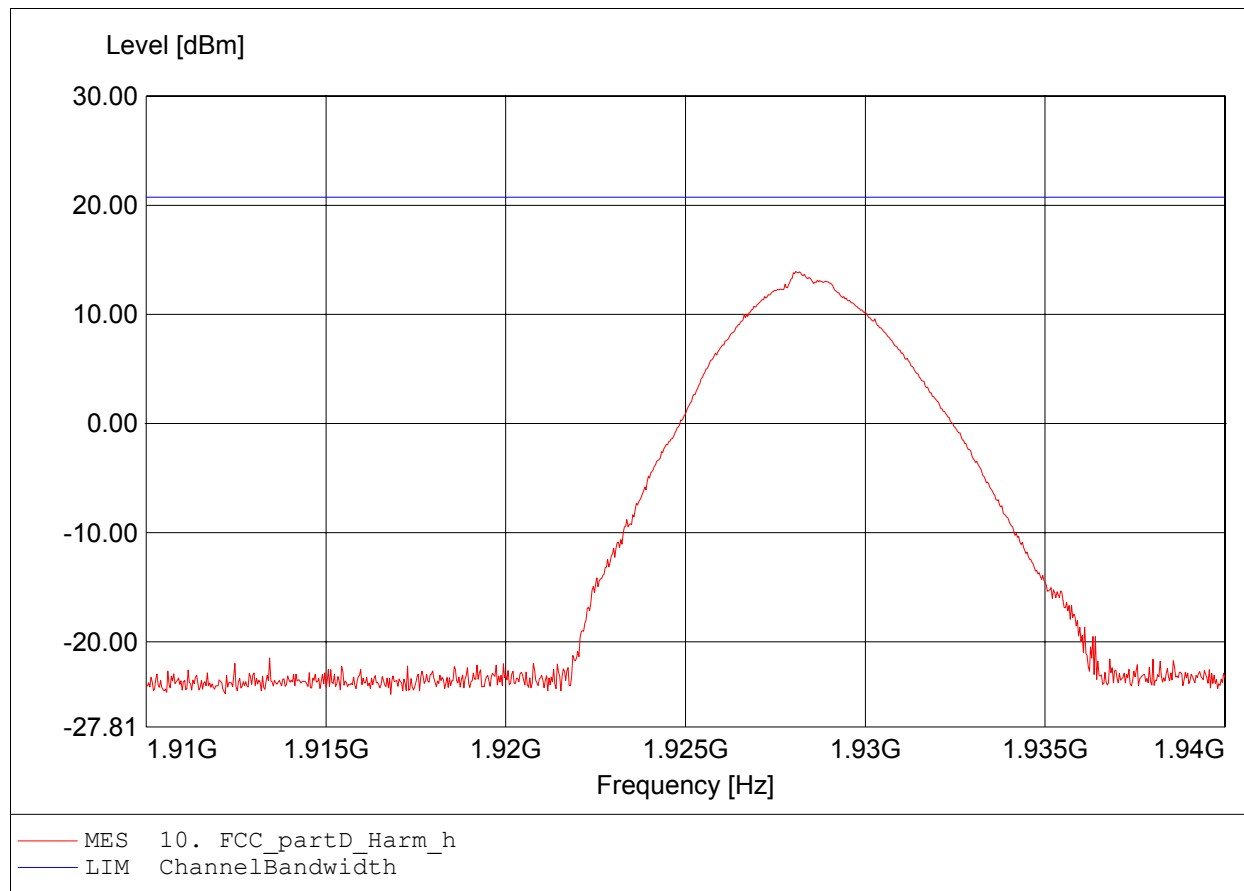

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.921GHz Pmax:11.13dBm RBW: 5 MHz

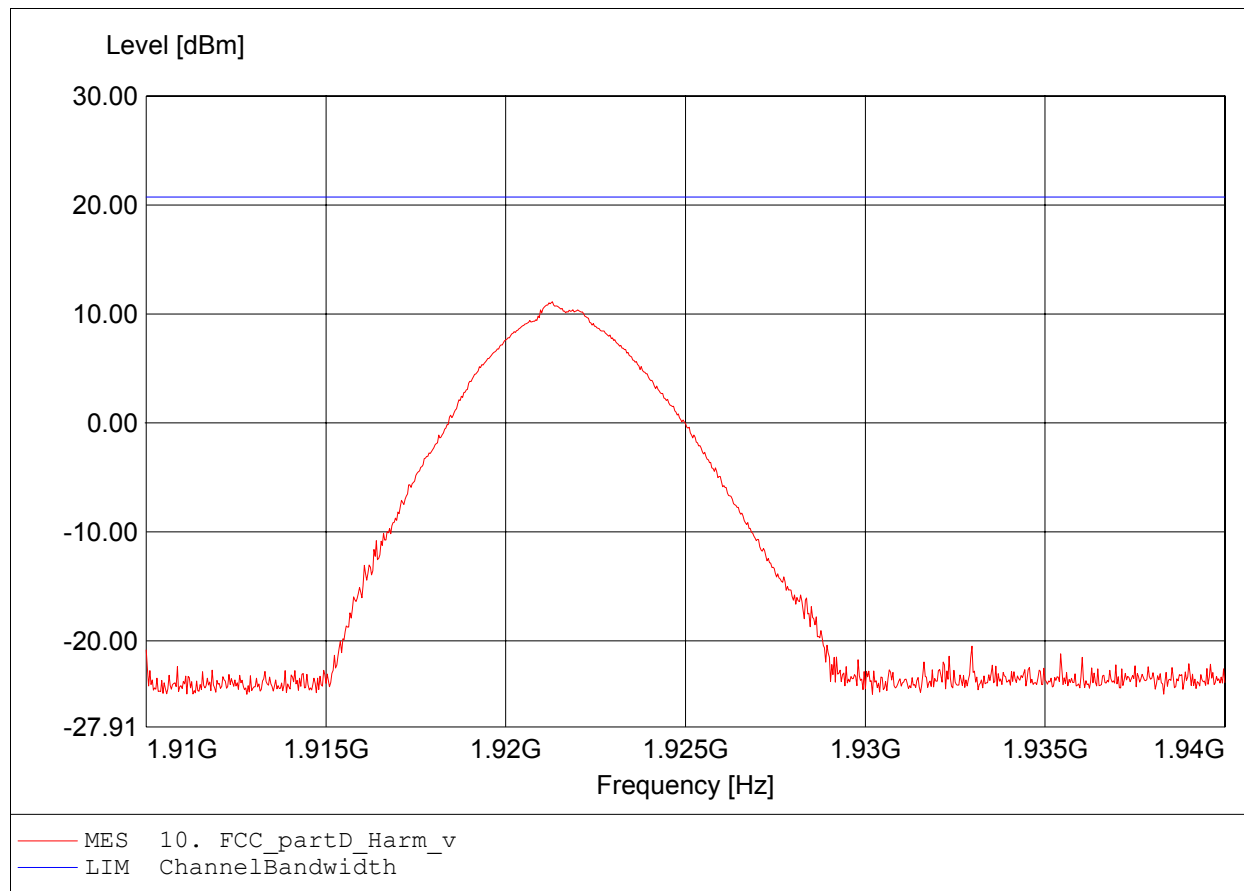

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.921GHz Pmax:13.78dBm RBW: 5 MHz

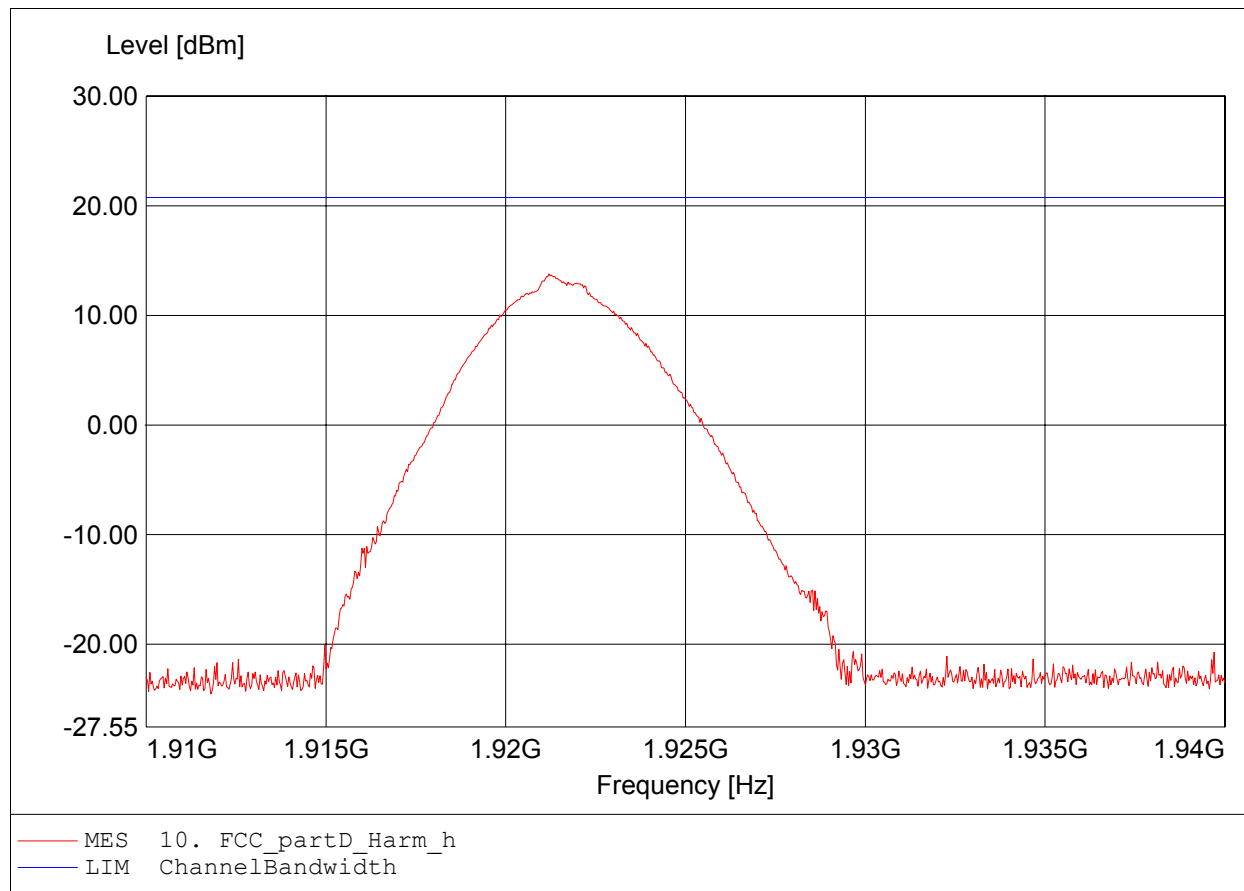

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 2 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.925GHz Pmax:11.60dBm RBW: 5 MHz

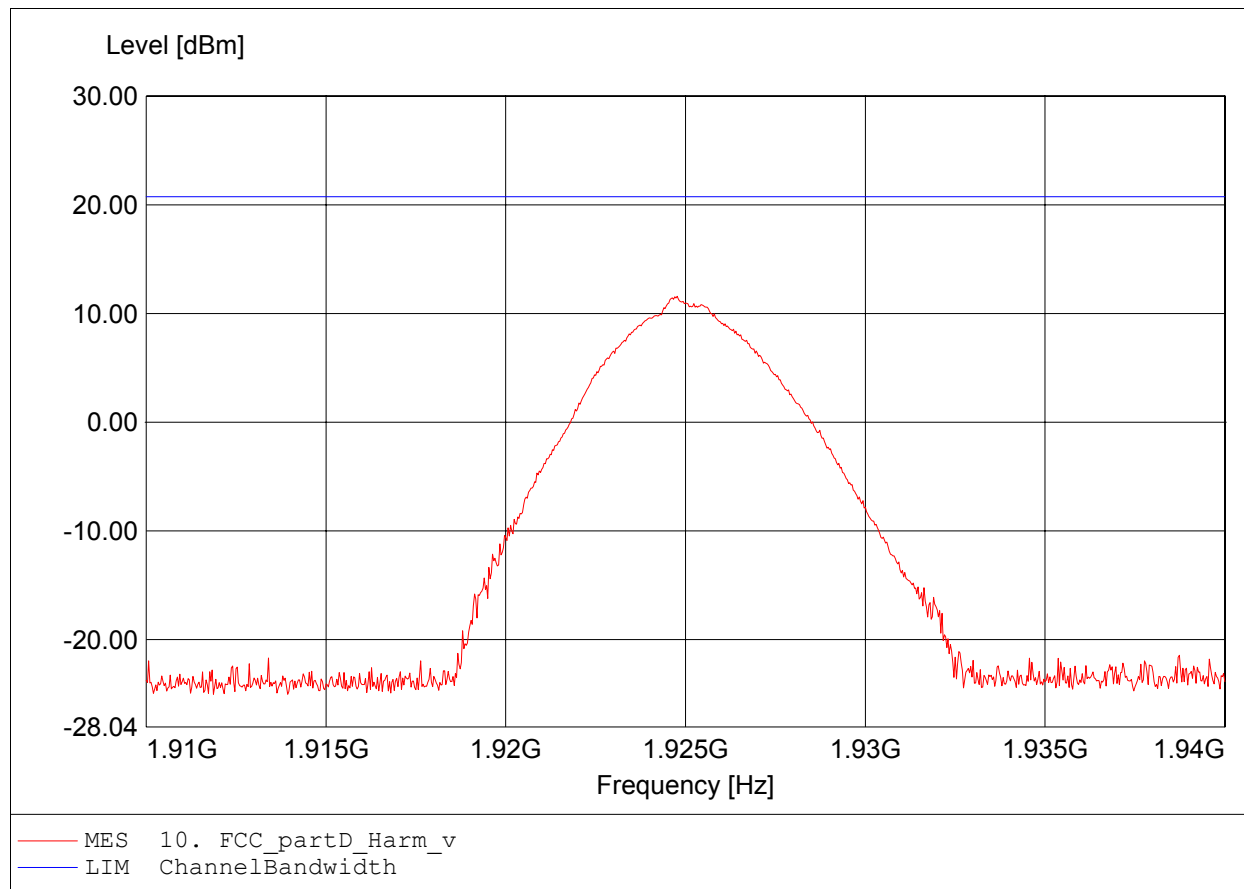

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 2 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.925GHz Pmax:14.01dBm RBW: 5 MHz

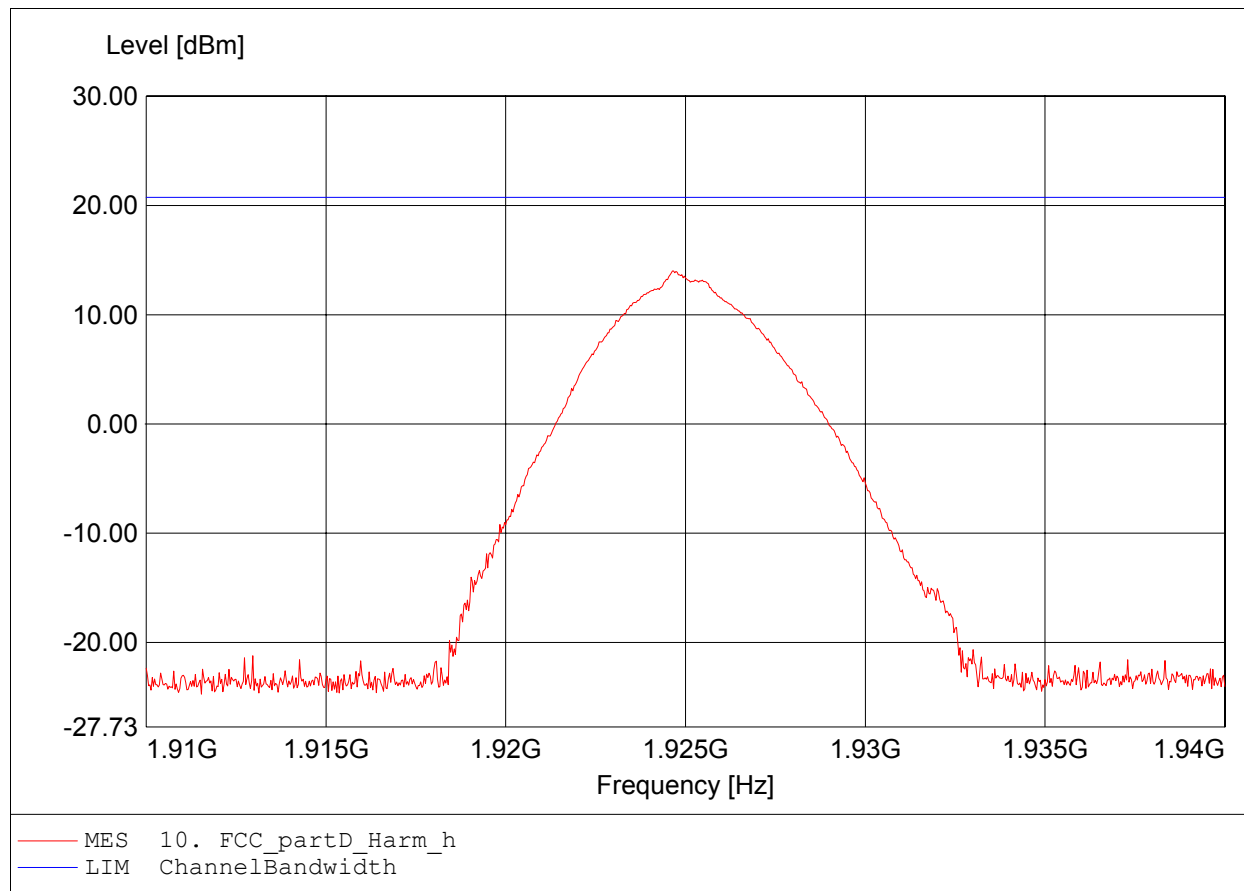

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.928GHz Pmax:11.81dBm RBW: 5 MHz

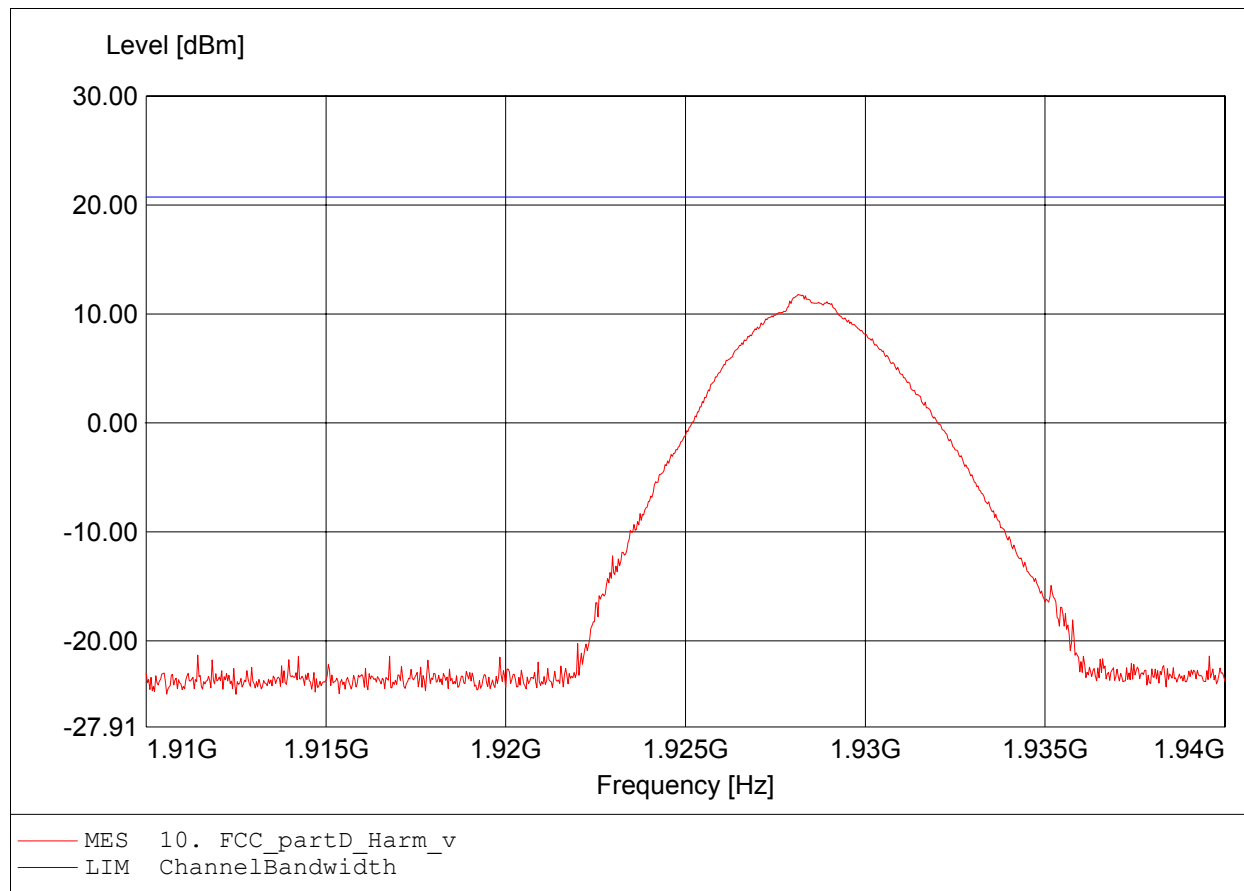

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D

Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.928GHz Pmax:13.95dBm RBW: 5 MHz

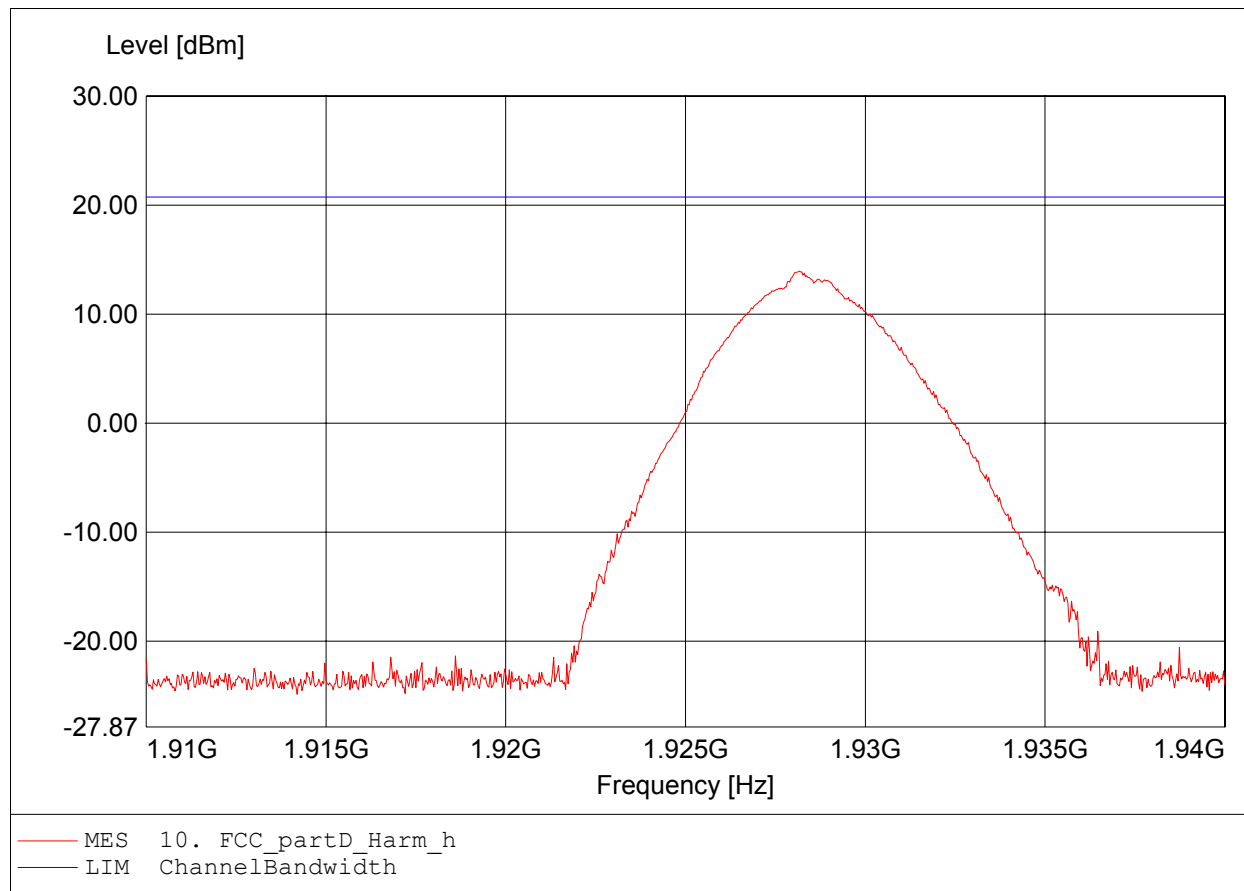


Annex D

Emissions inside and outside the sub-band

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:174.311MHz Pmax:-55.83dBm RBW: 100 kHz

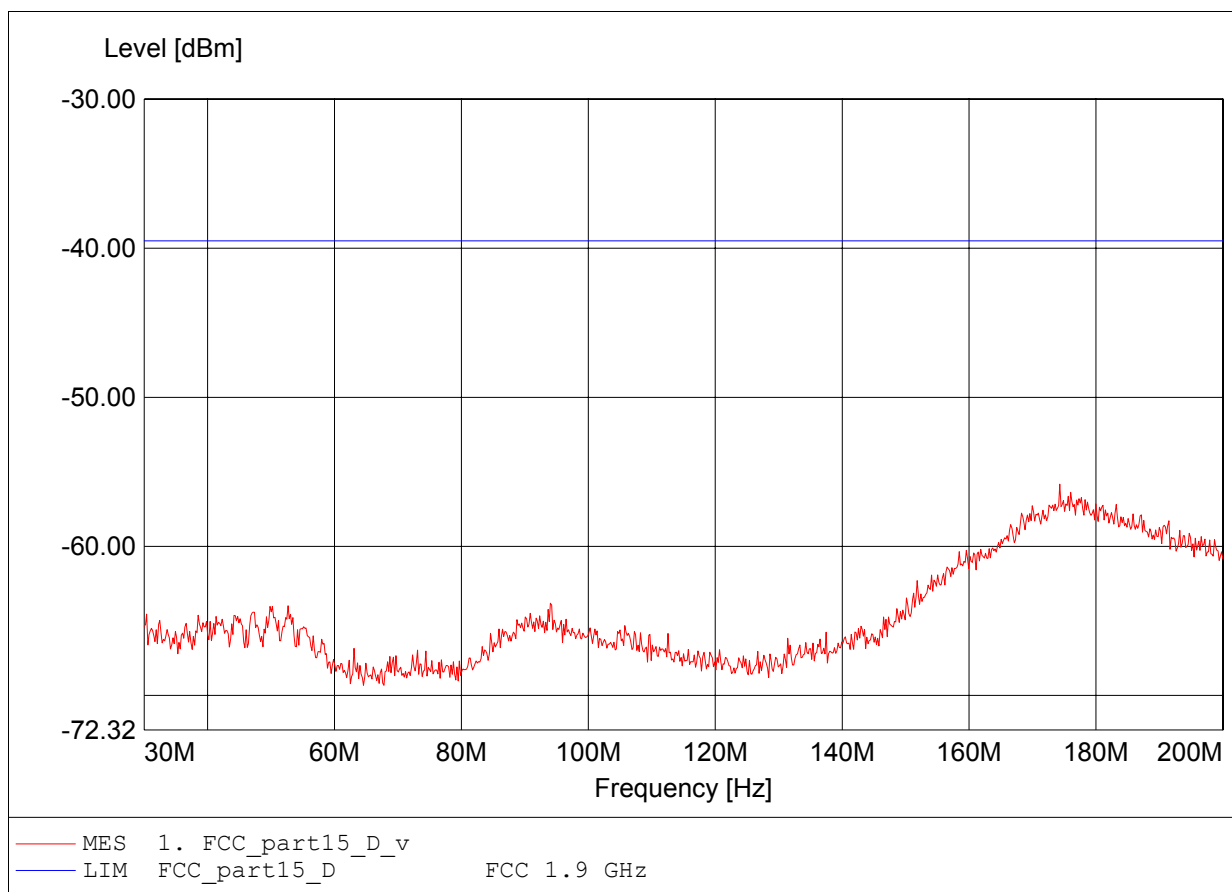

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:197.167MHz Pmax:-62.53dBm RBW: 100 kHz

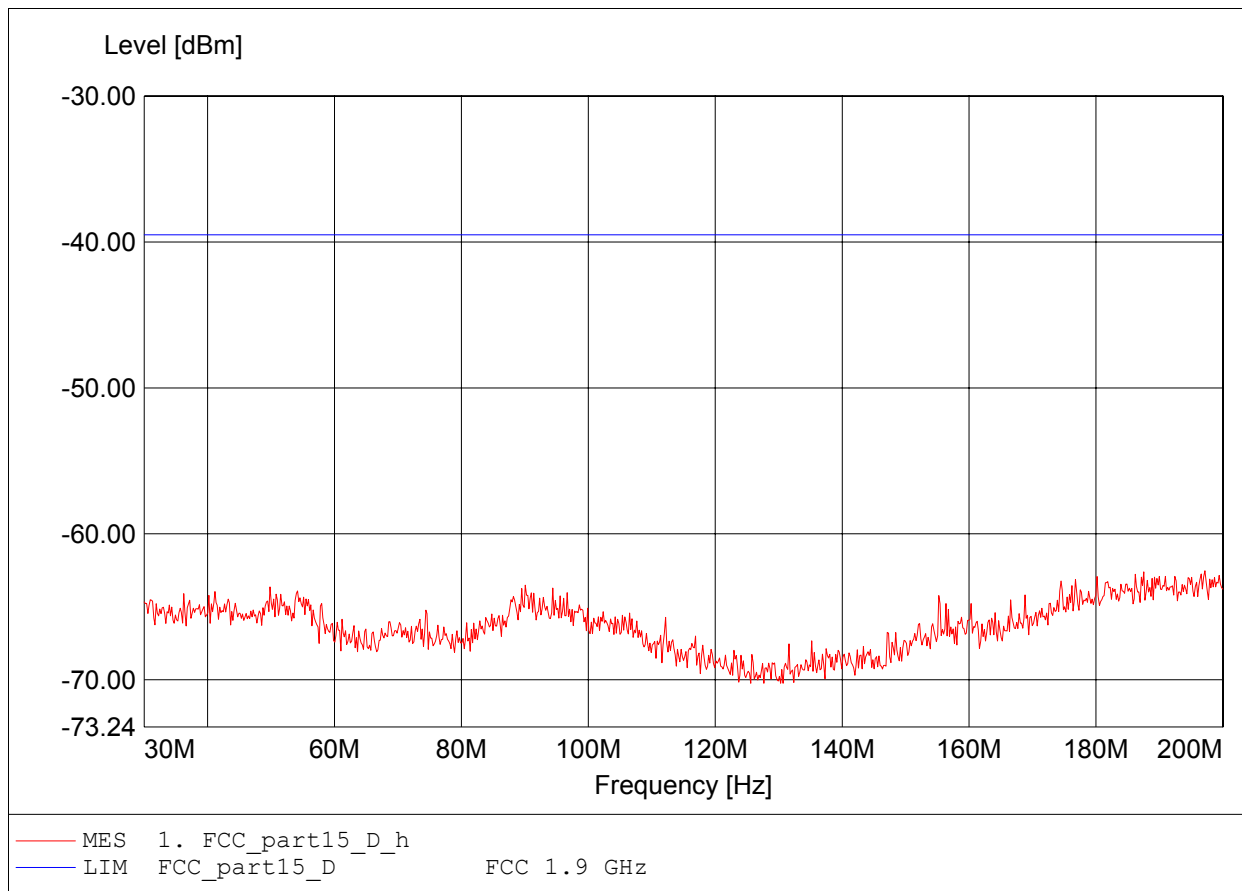

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:350.222MHz Pmax:-57.21dBm RBW: 100 kHz

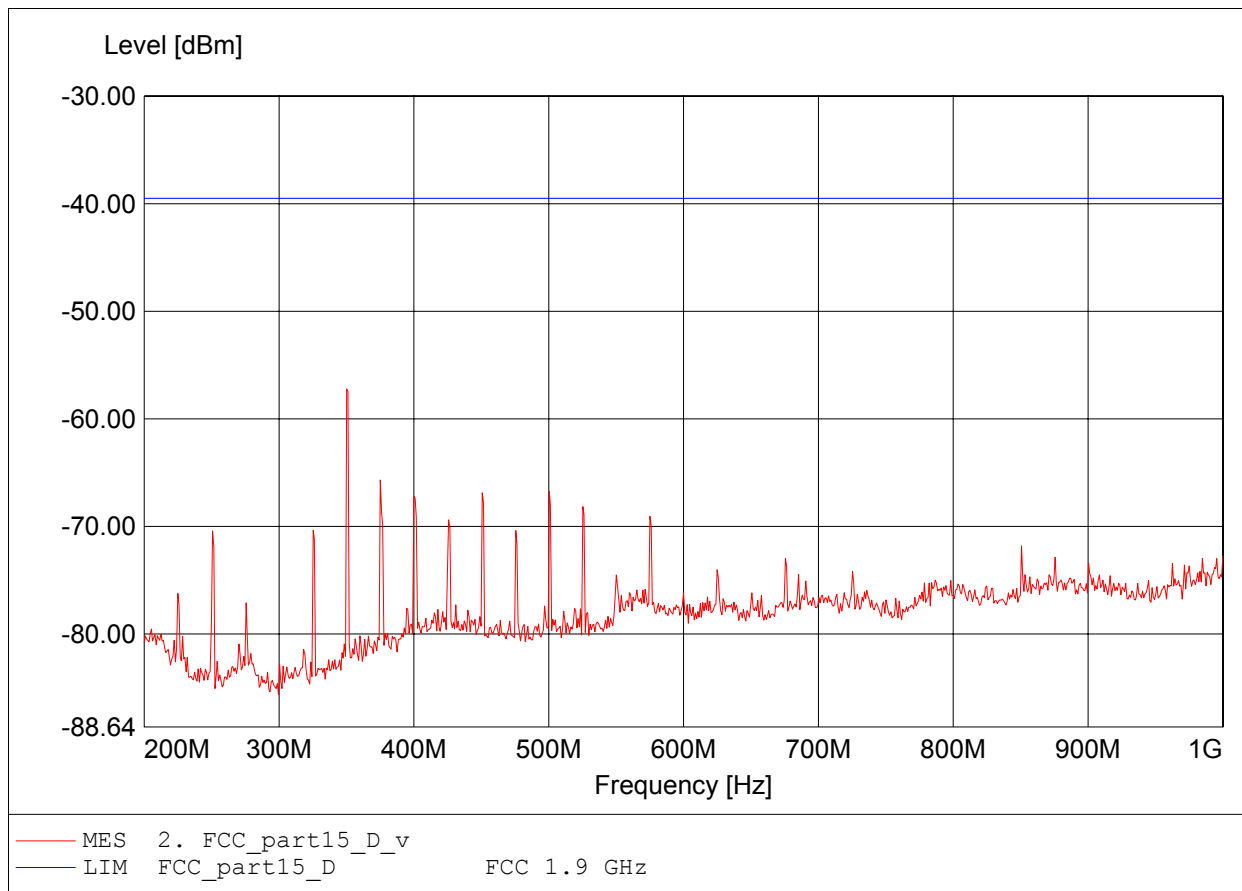

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:350.222MHz Pmax:-62.68dBm RBW: 100 kHz

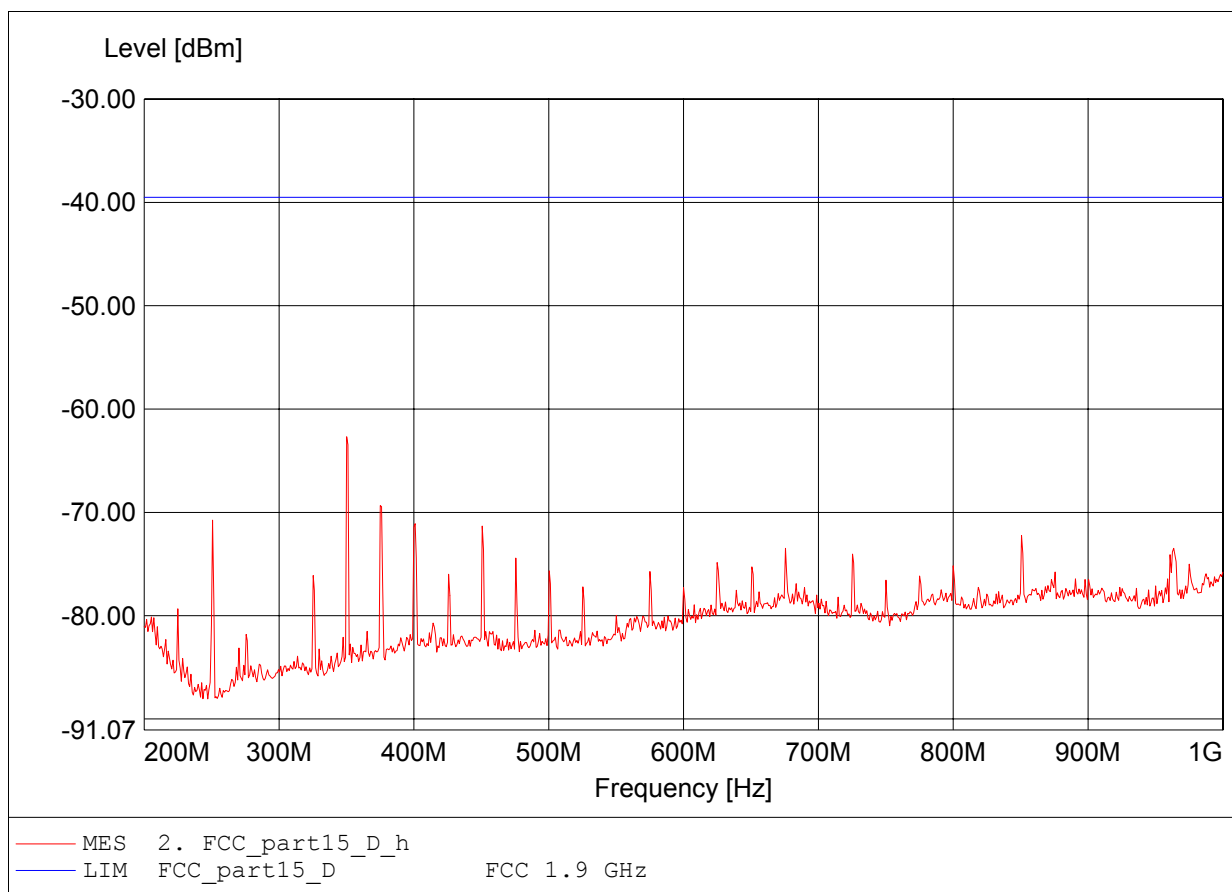

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.915GHz Pmax:-41.36dBm RBW: 100 kHz

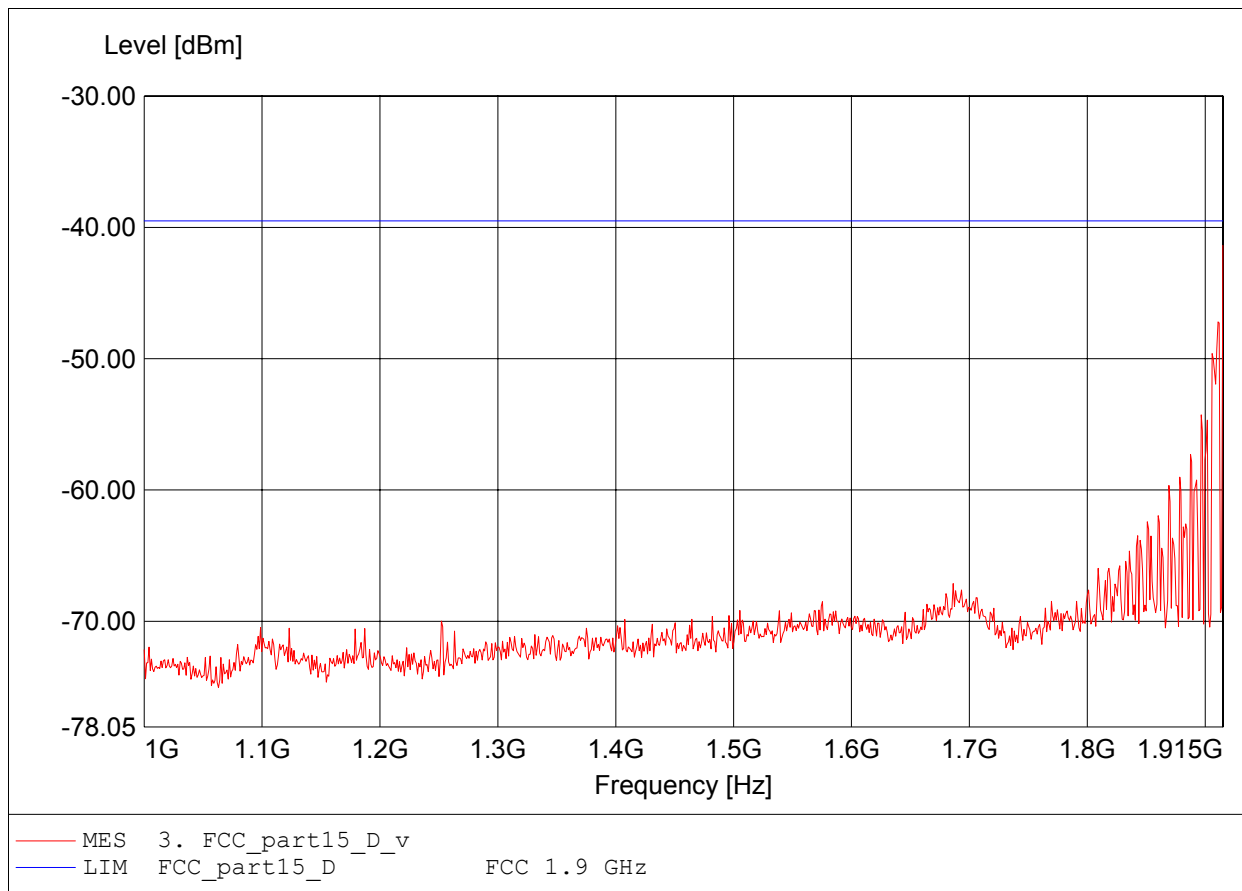

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.911GHz Pmax:-43.38dBm RBW: 100 kHz

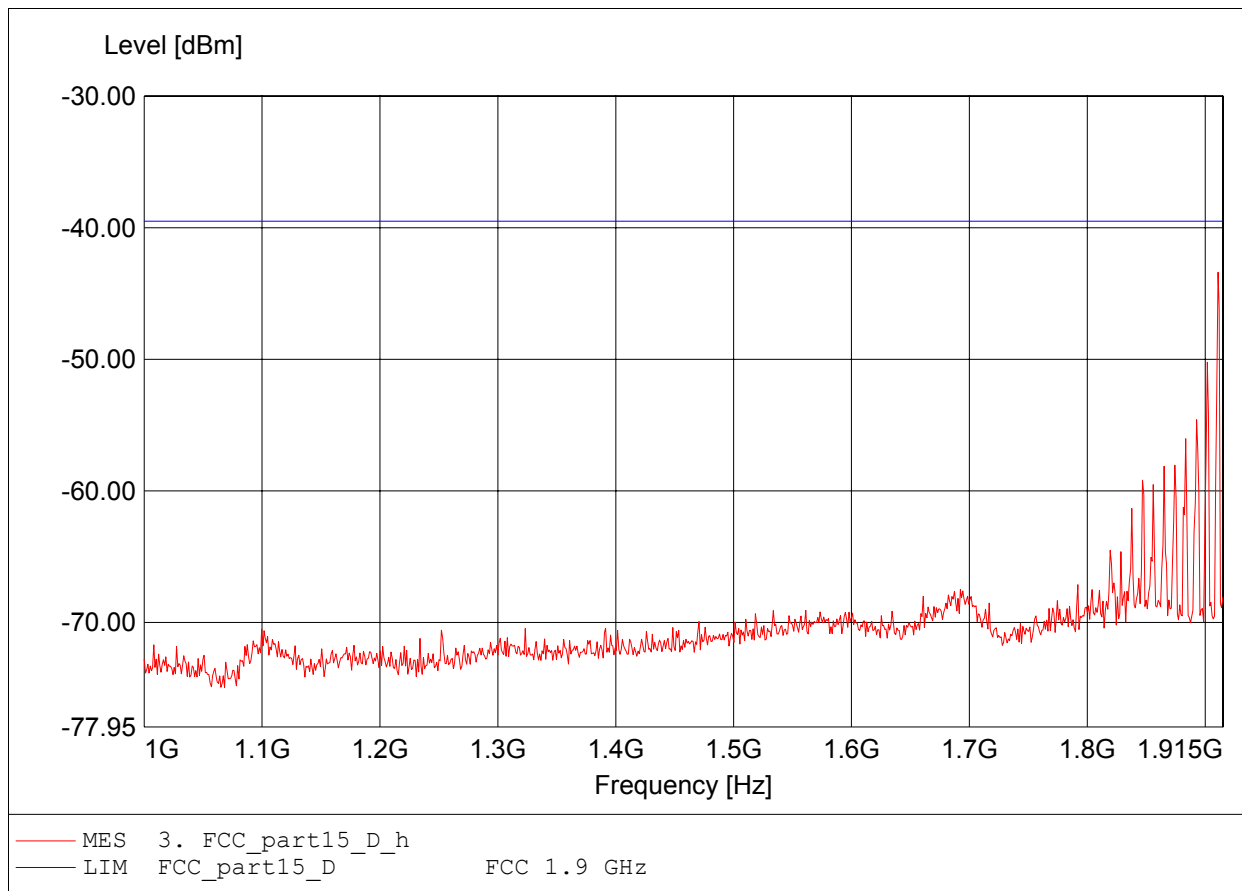

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-50.89dBm RBW: 10 kHz

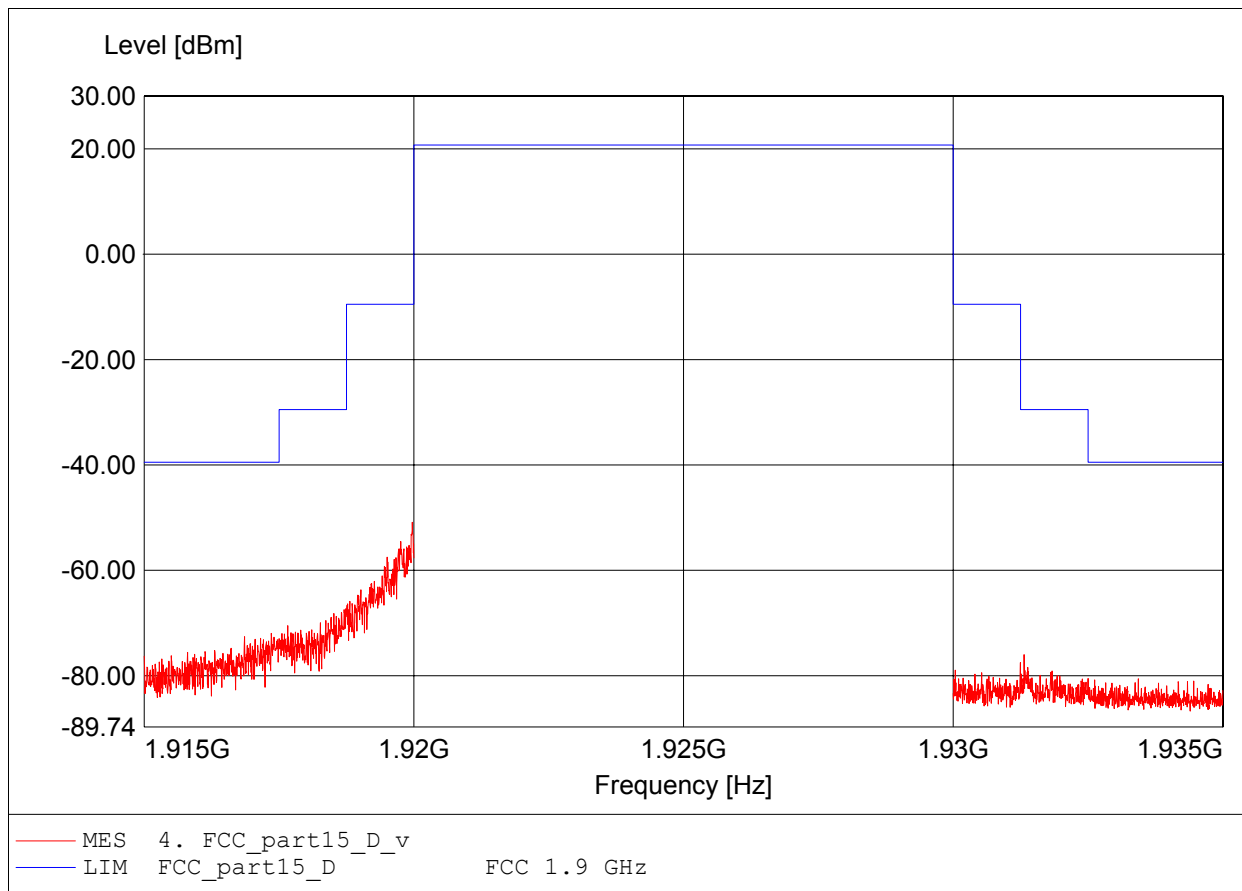

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-51.98dBm RBW: 10 kHz

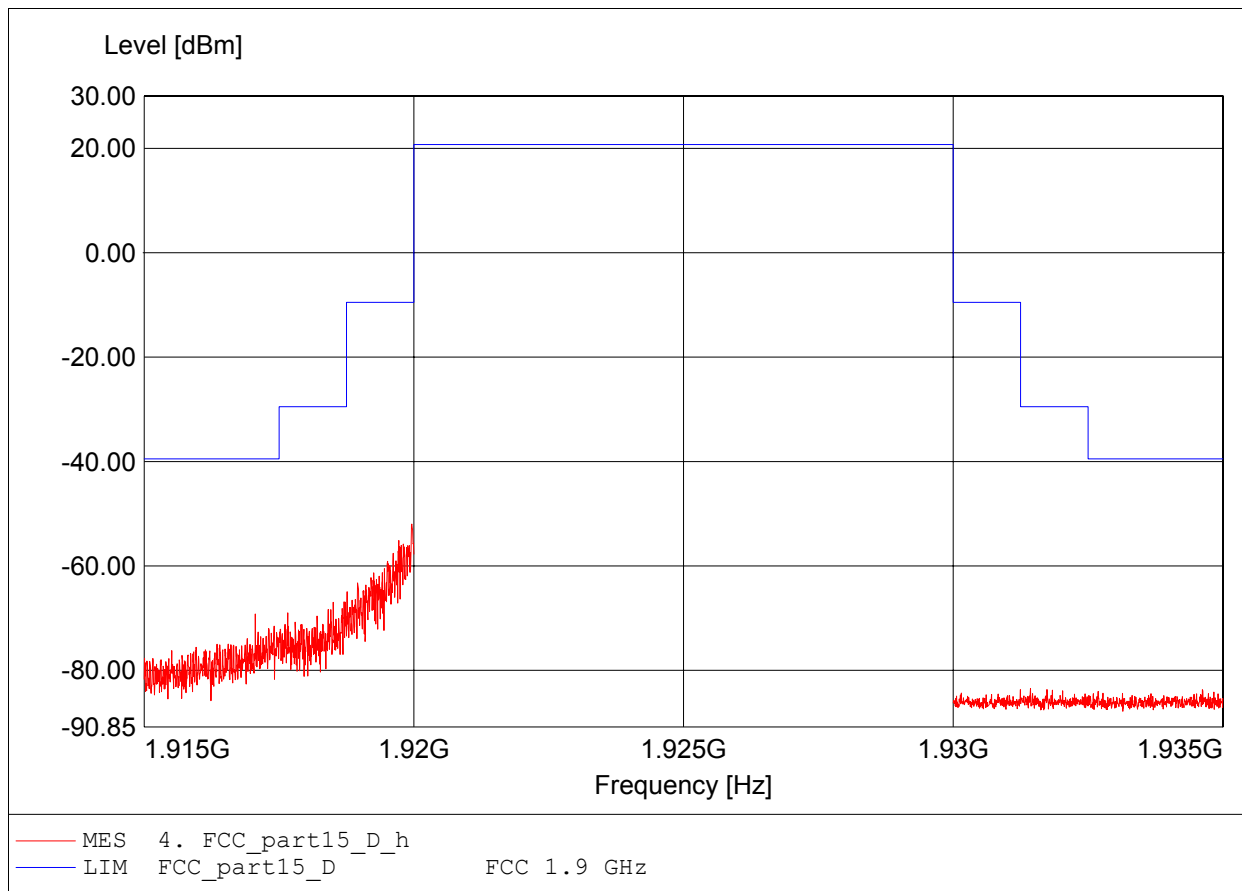

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-50.73dBm RBW: 10 kHz

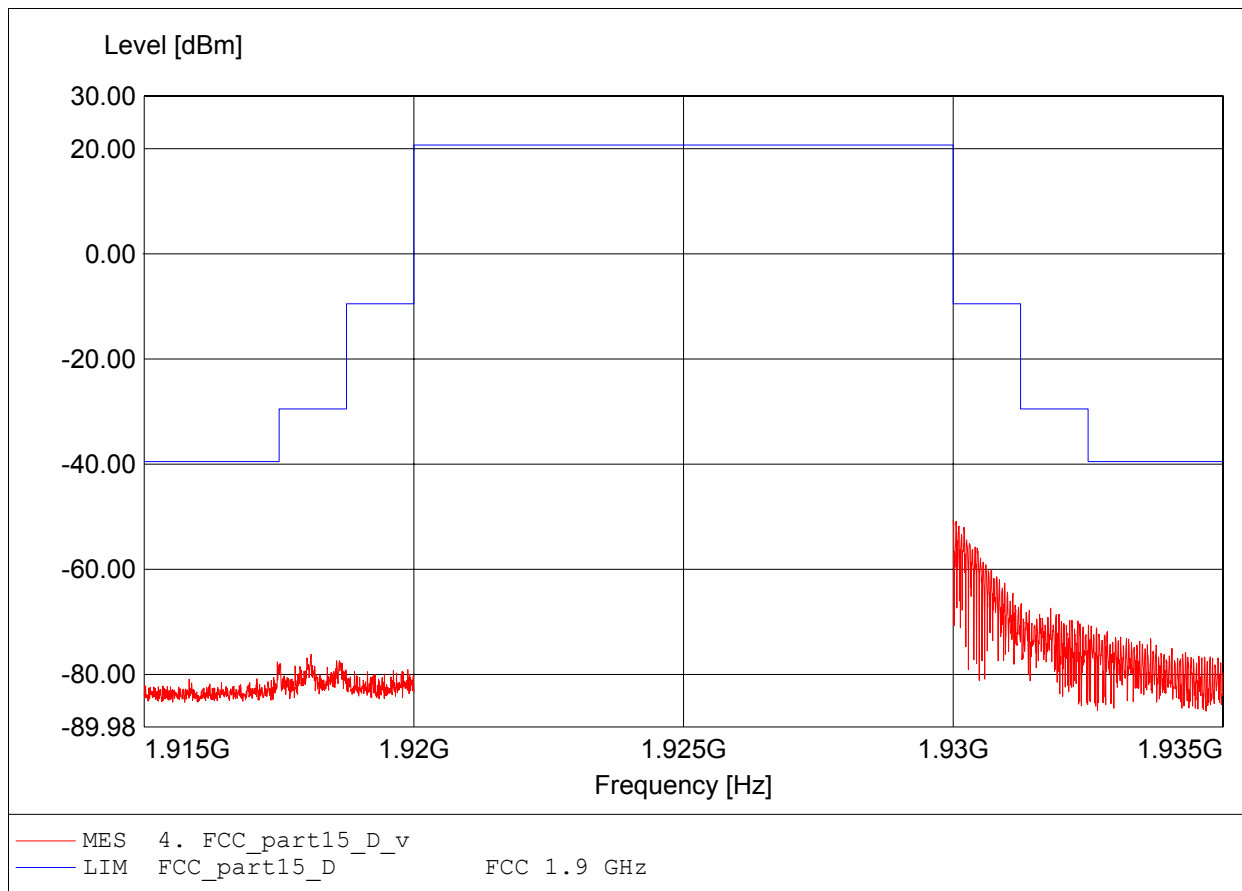

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-49.61dBm RBW: 10 kHz

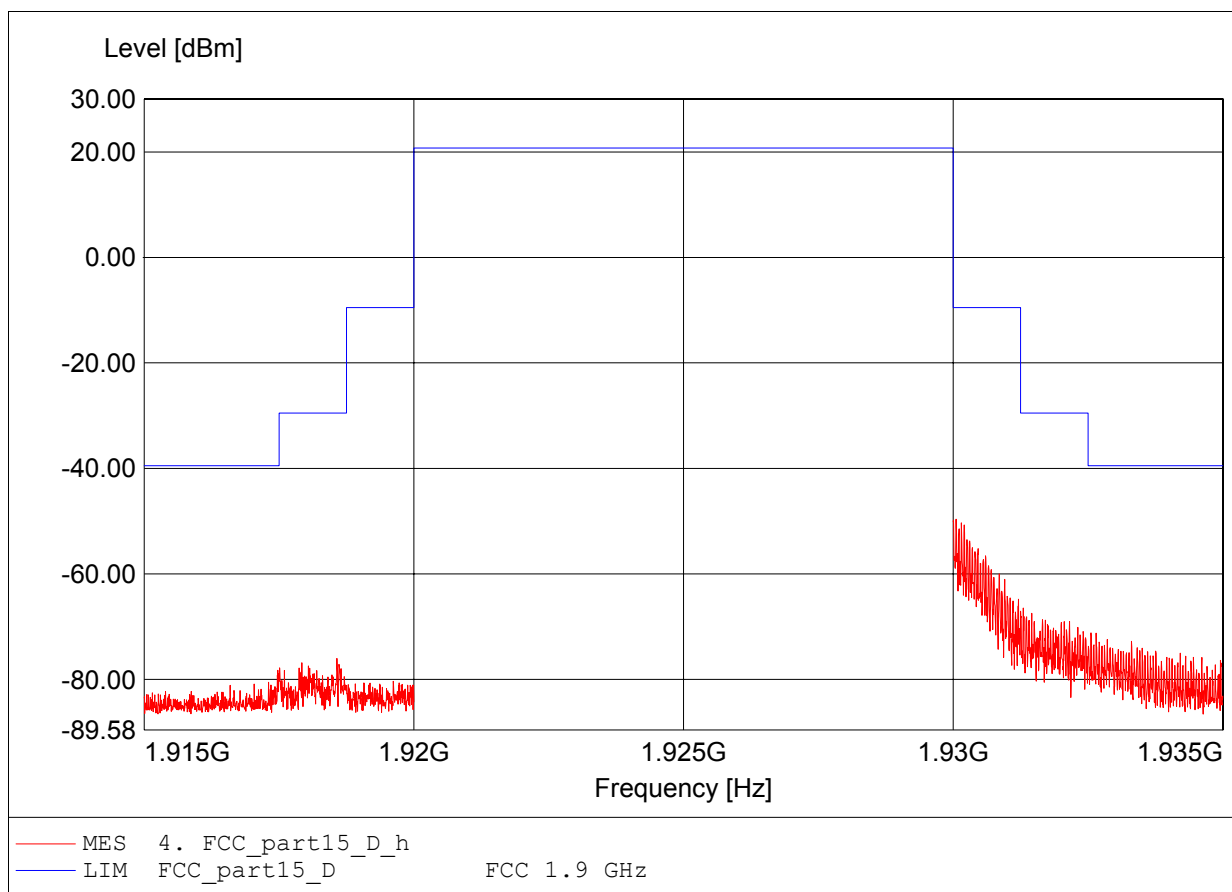

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.842GHz Pmax:-68.35dBm RBW:10 kHz

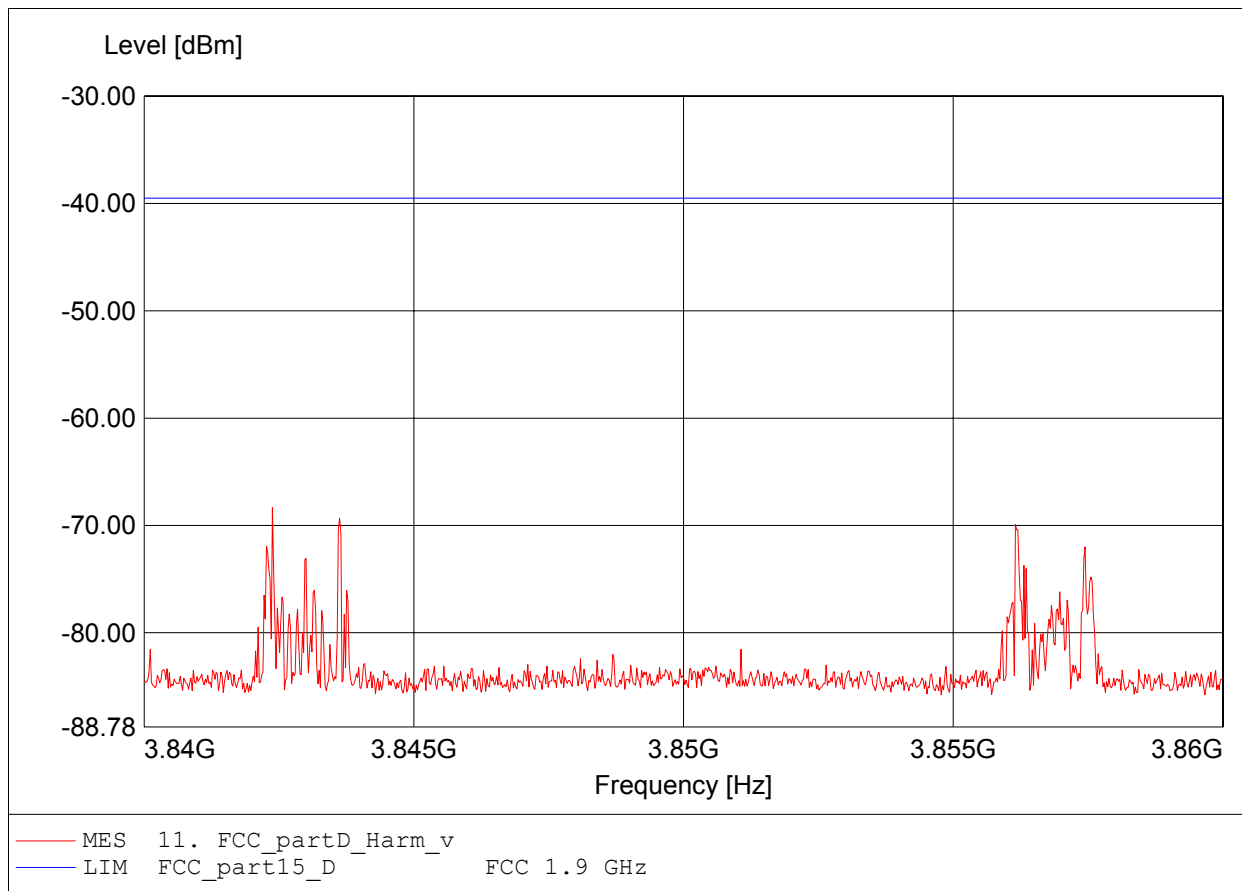

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.856GHz Pmax:-66.30dBm RBW:10 kHz

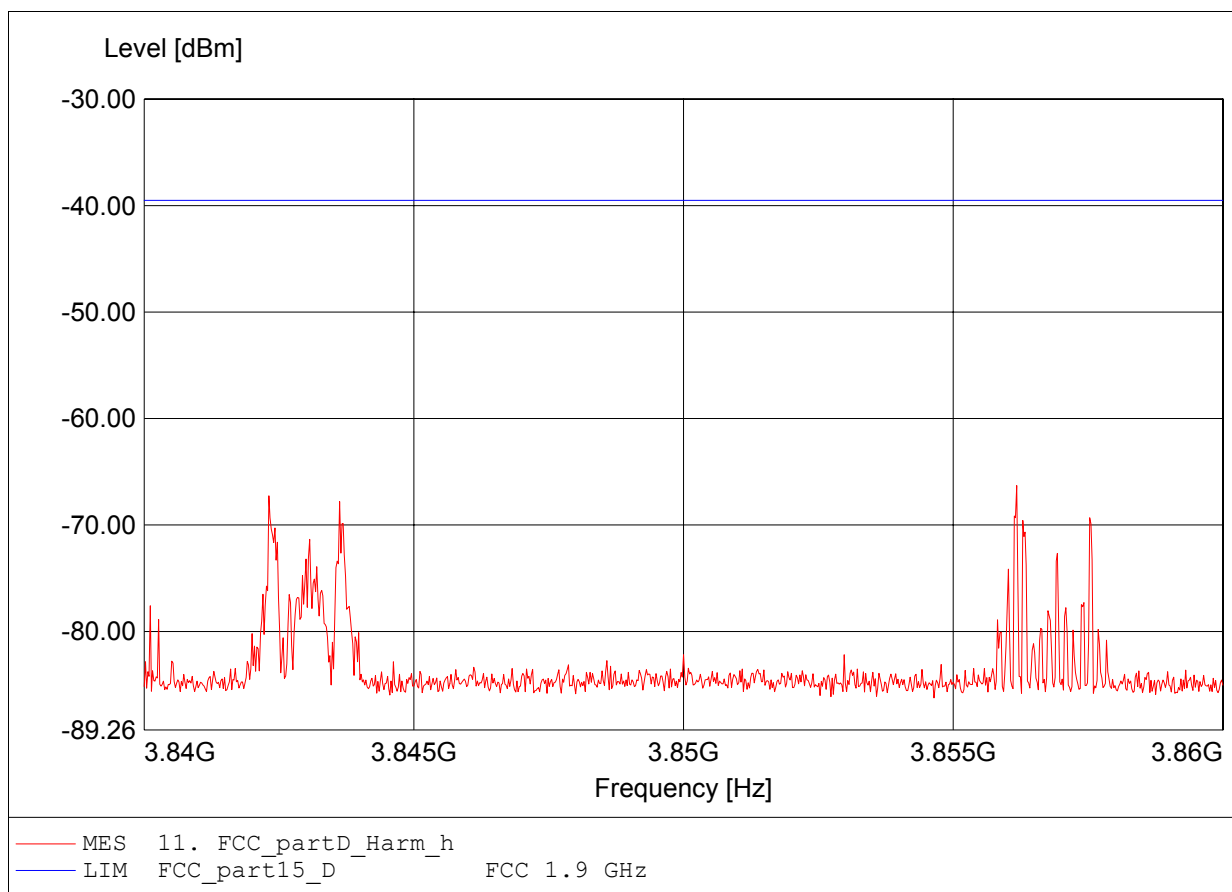

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.784GHz Pmax:-73.54dBm RBW:10 kHz

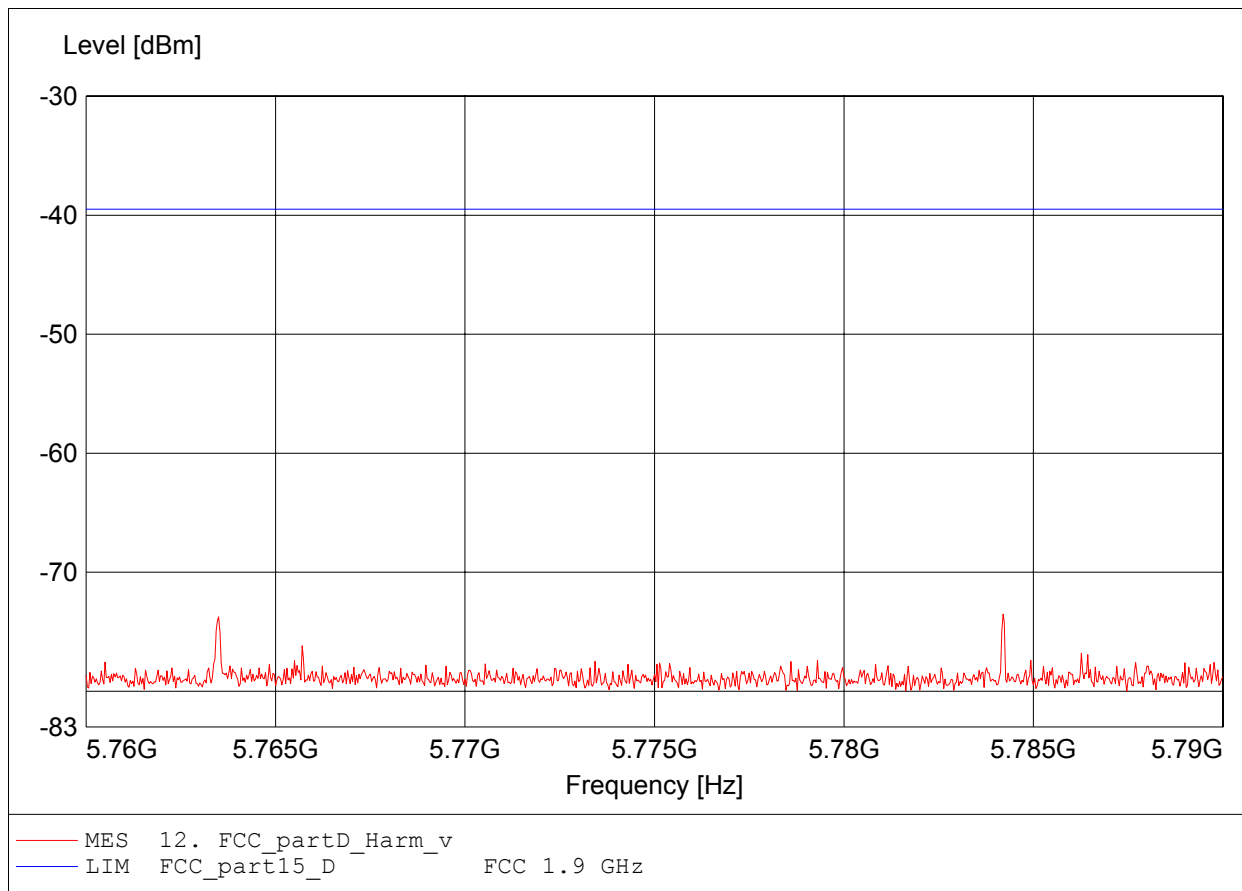

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.764GHz Pmax:-71.62dBm RBW:10 kHz

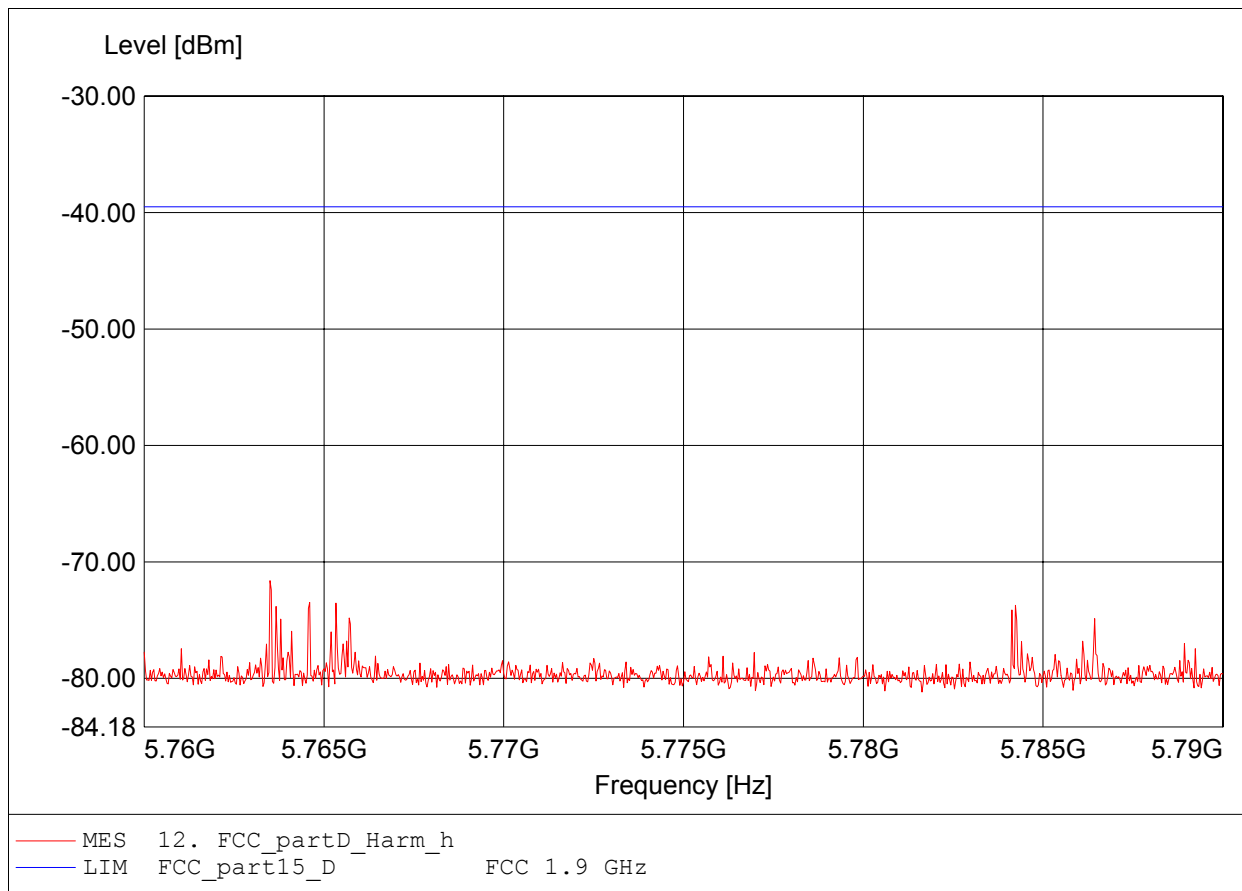

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:7.712GHz Pmax:-65.47dBm RBW:10 kHz

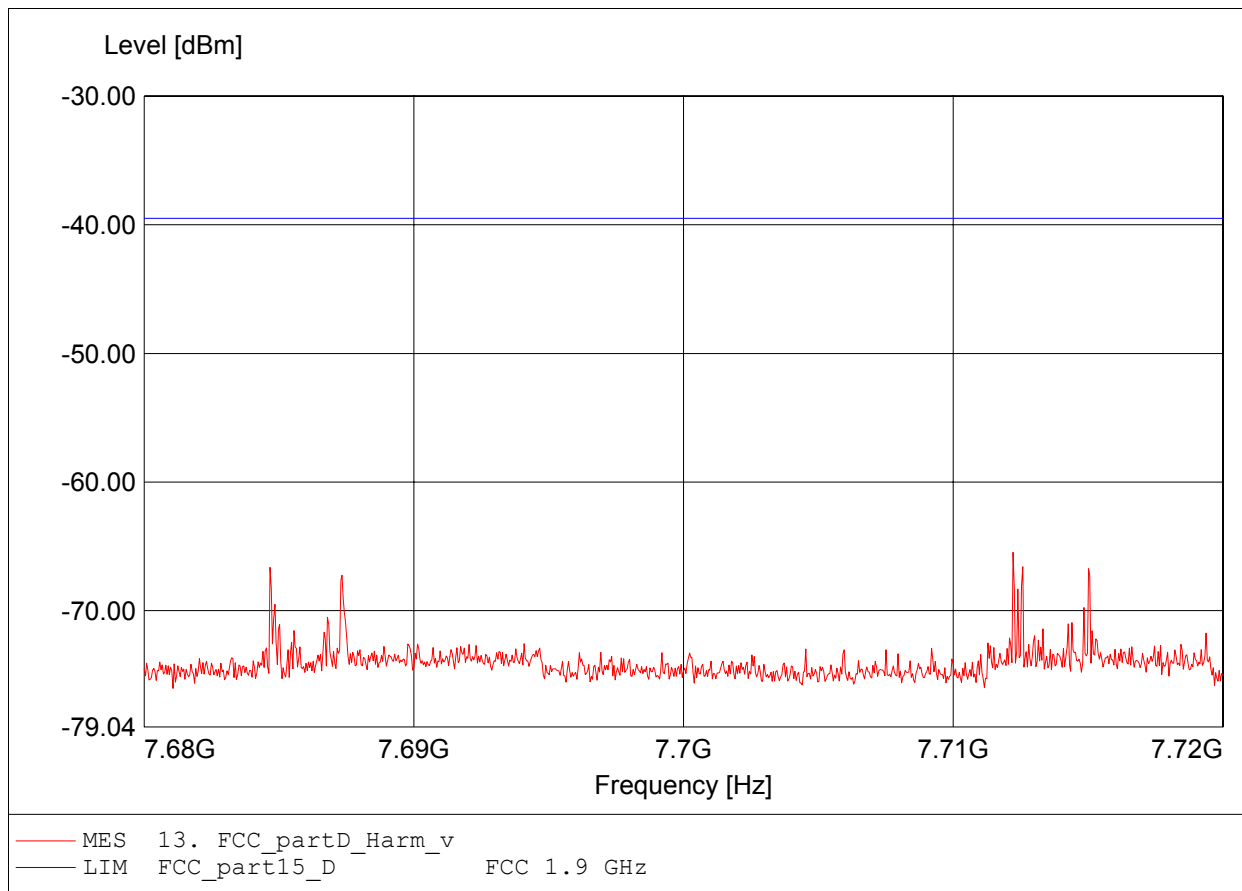

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:7.685GHz Pmax:-66.11dBm RBW:10 kHz

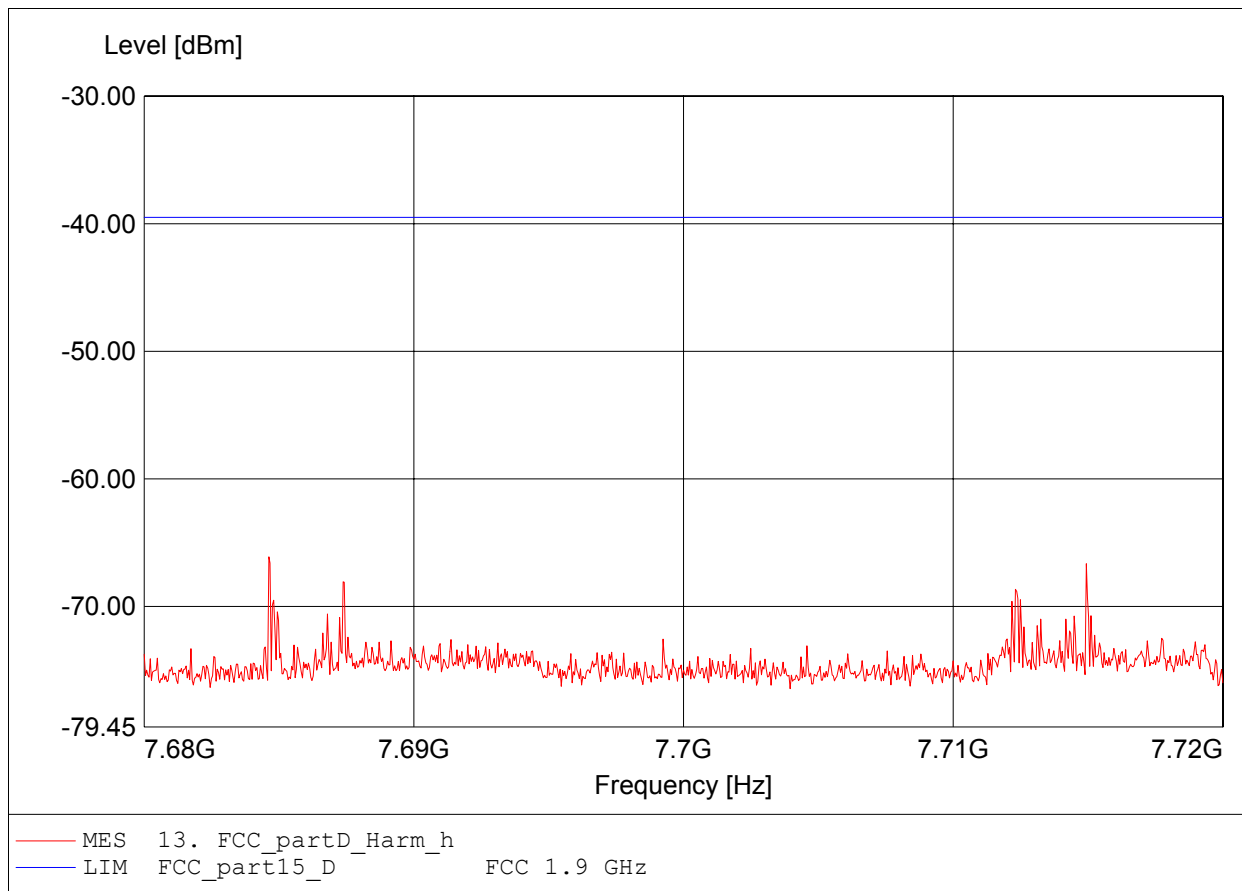

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.640GHz Pmax:-63.69dBm RBW:10 kHz

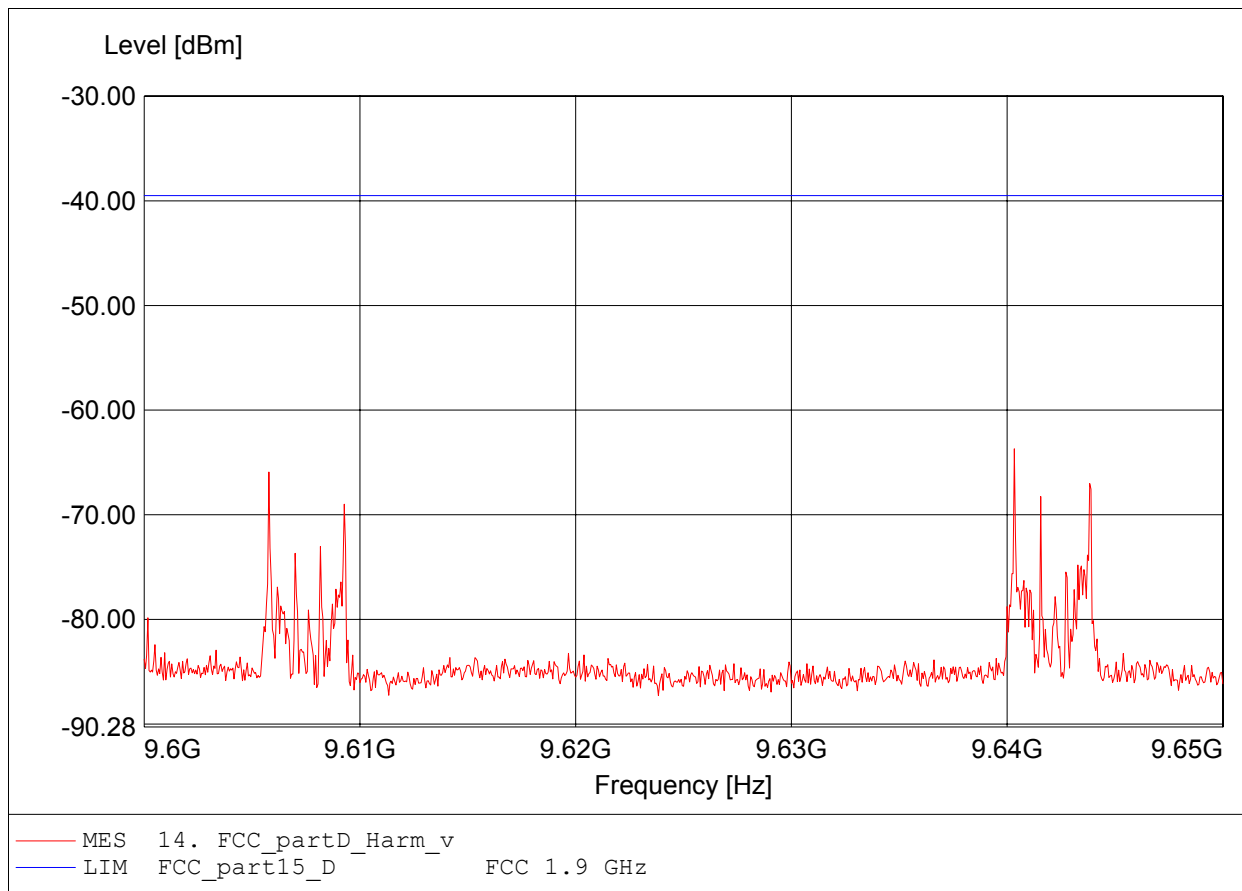

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.640GHz Pmax:-67.37dBm RBW:10 kHz

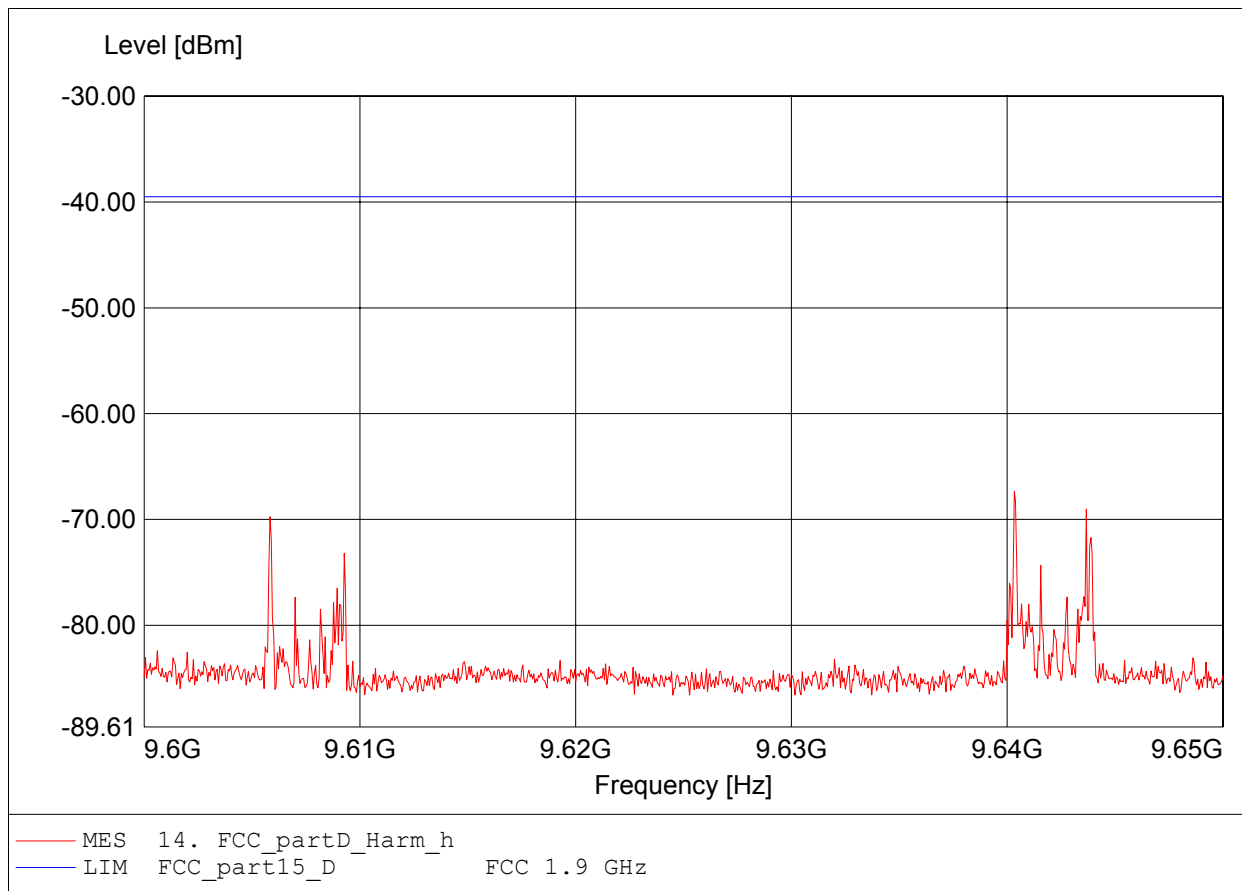

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.568GHz Pmax:-75.00dBm RBW:10 kHz

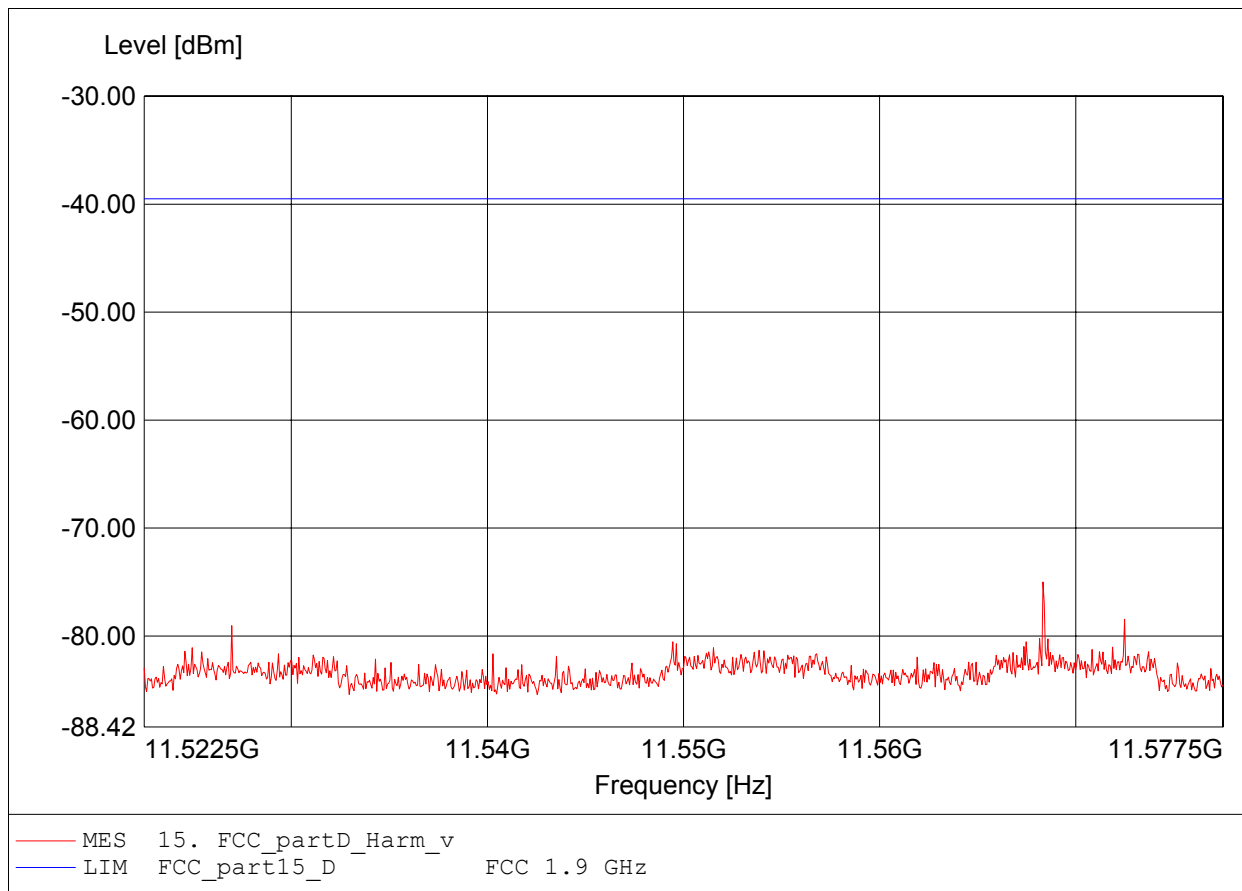

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.568GHz Pmax:-72.76dBm RBW:10 kHz

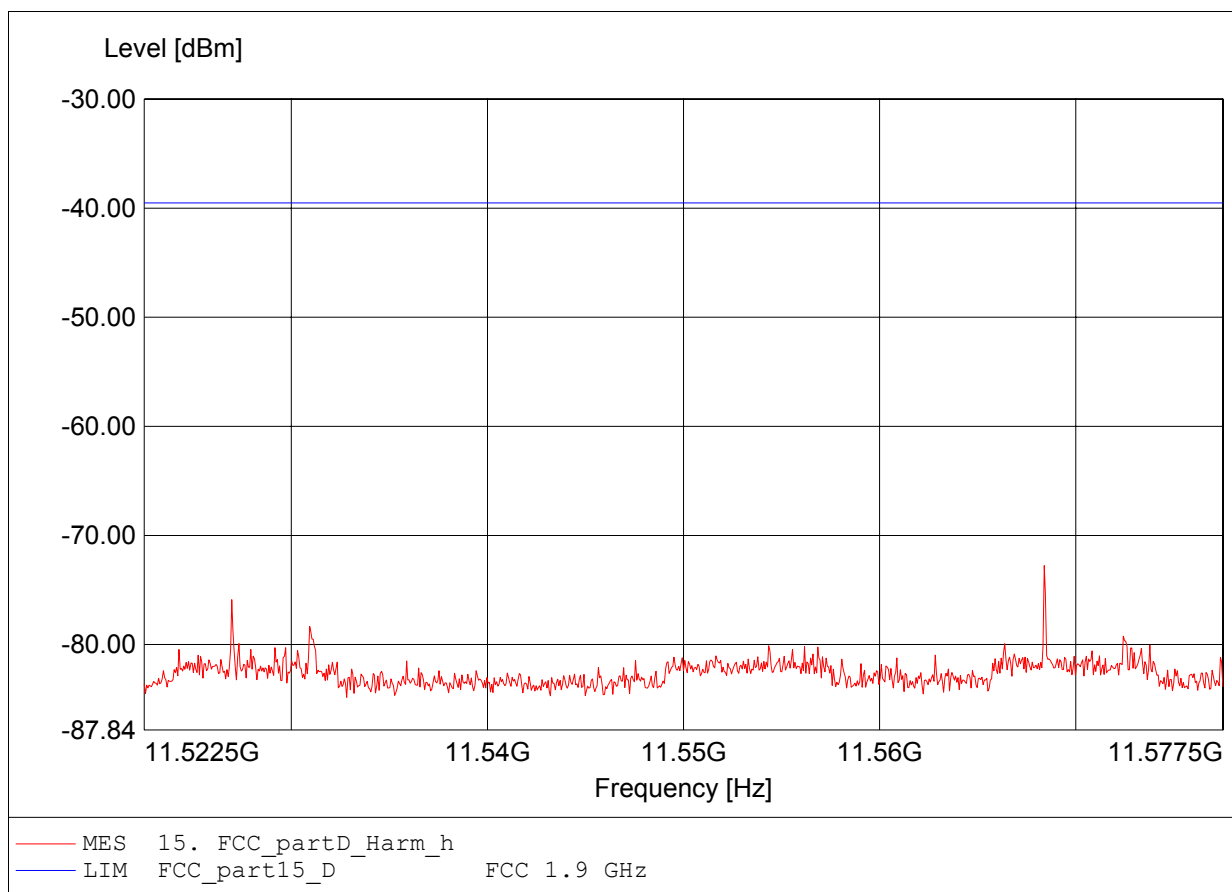

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.448GHz Pmax:-75.10dBm RBW:10 kHz

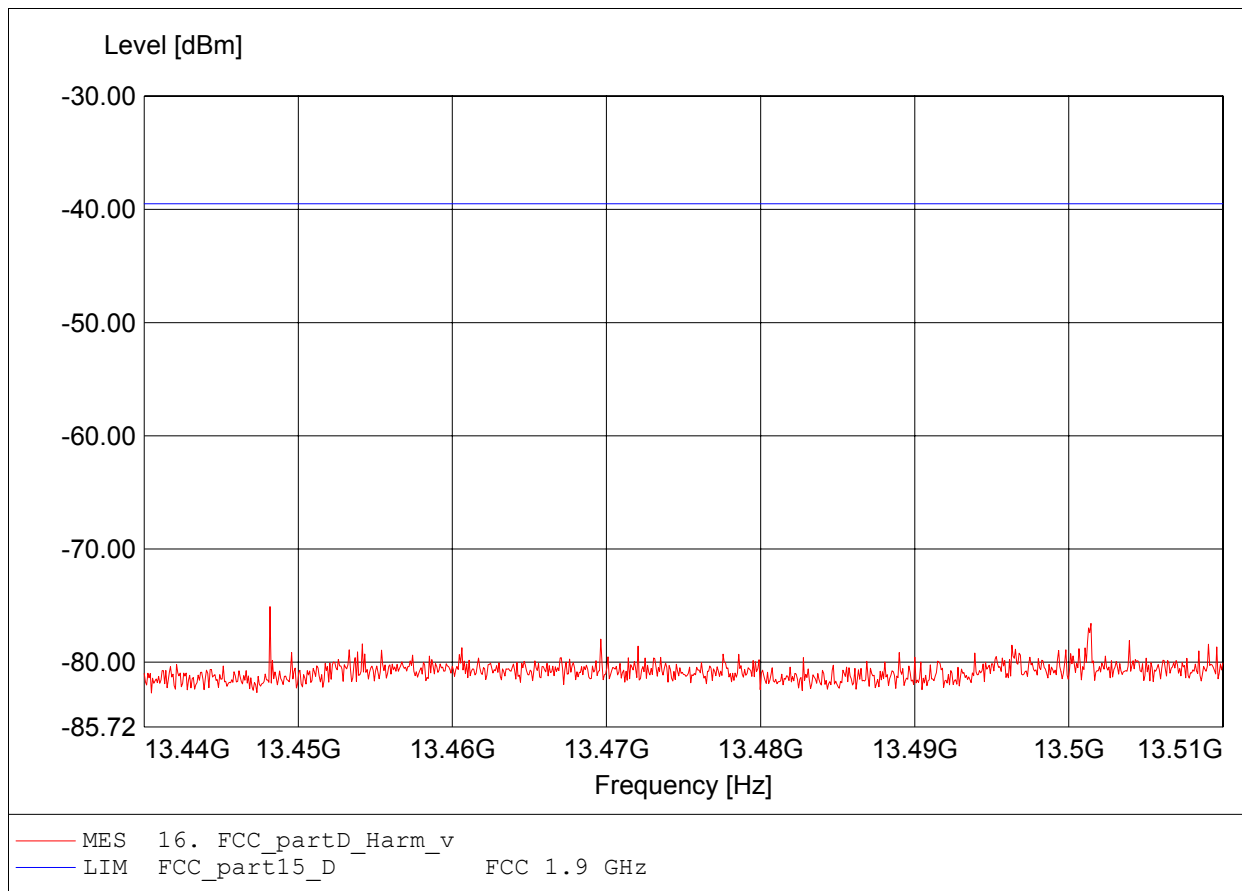

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.497GHz Pmax:-71.56dBm RBW:10 kHz

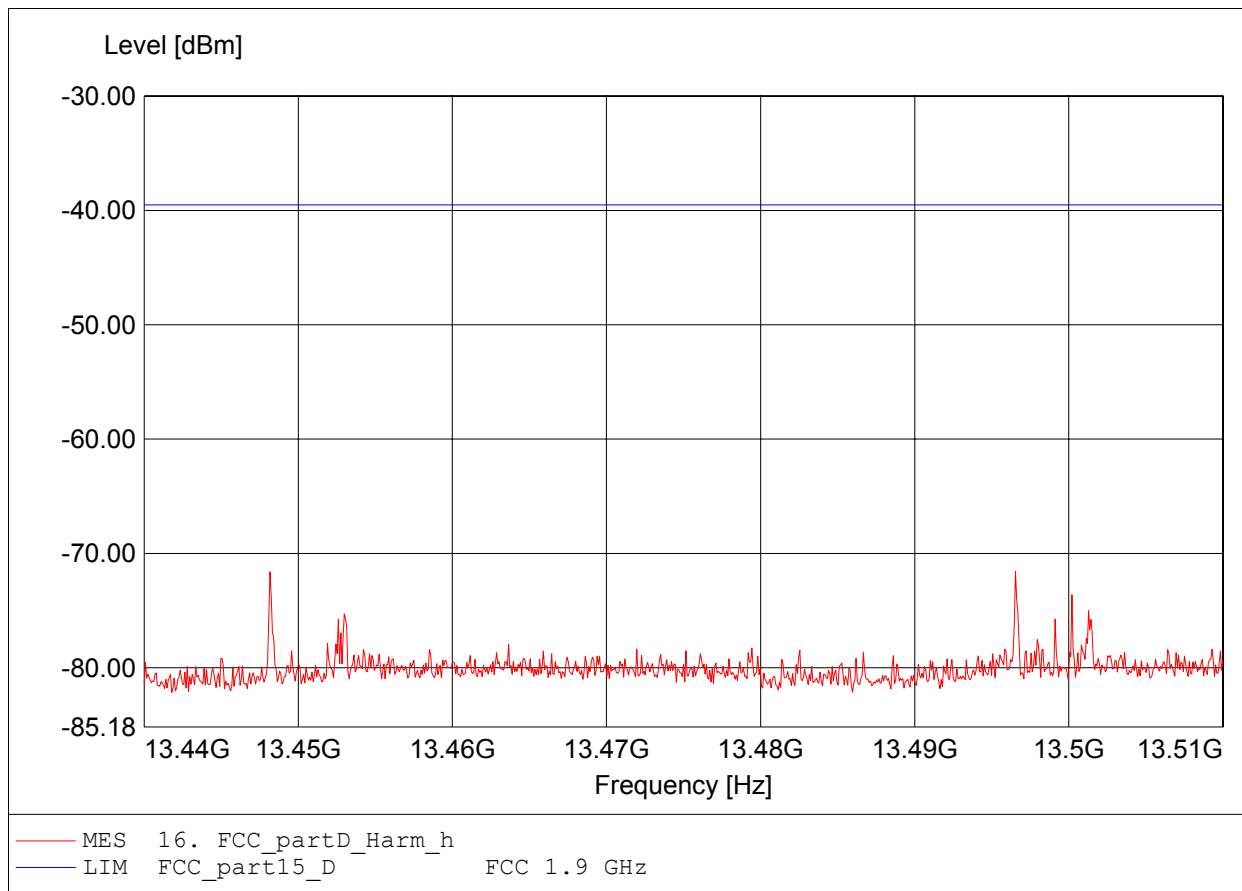

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.391GHz Pmax:-78.70dBm RBW:10 kHz

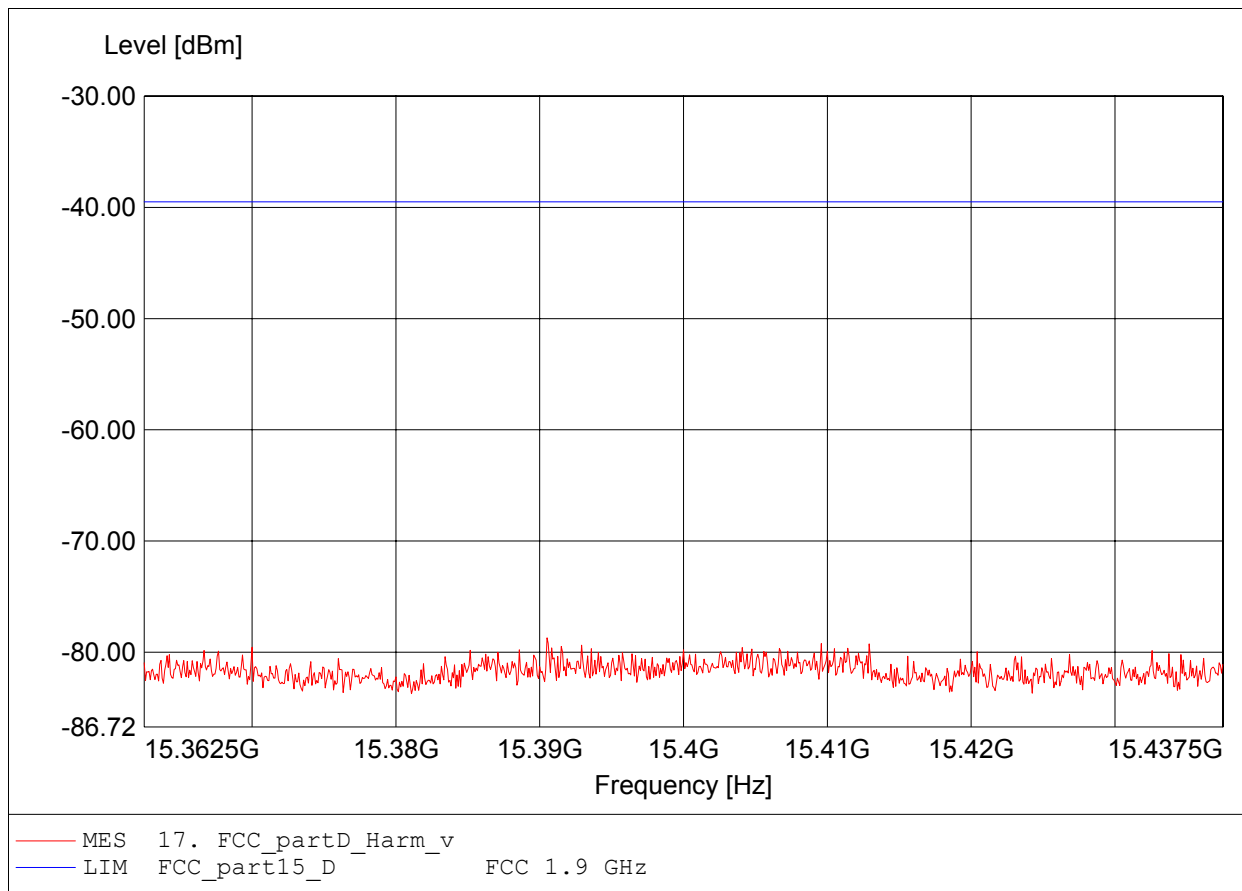

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.369GHz Pmax:-77.95dBm RBW:10 kHz

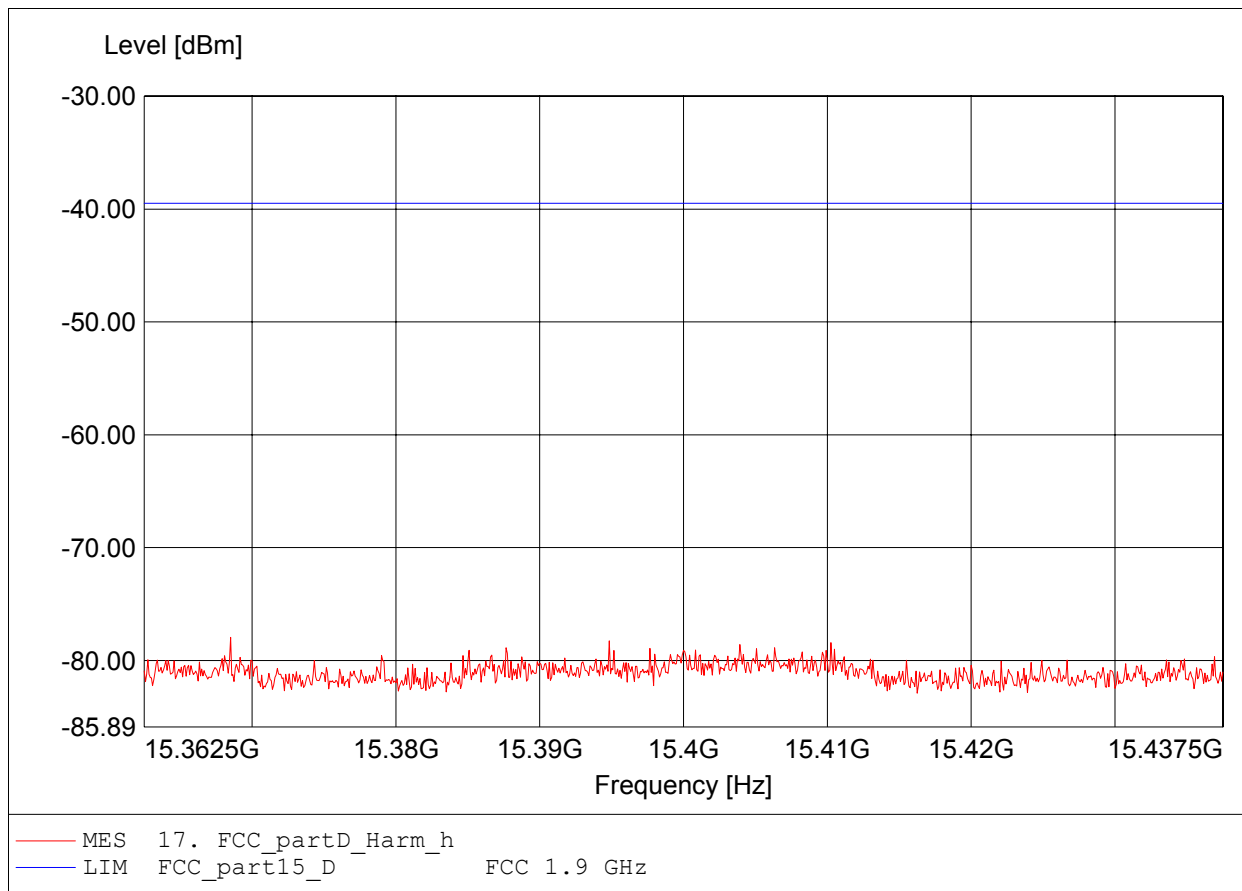

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.289GHz Pmax:-76.98dBm RBW:10 kHz

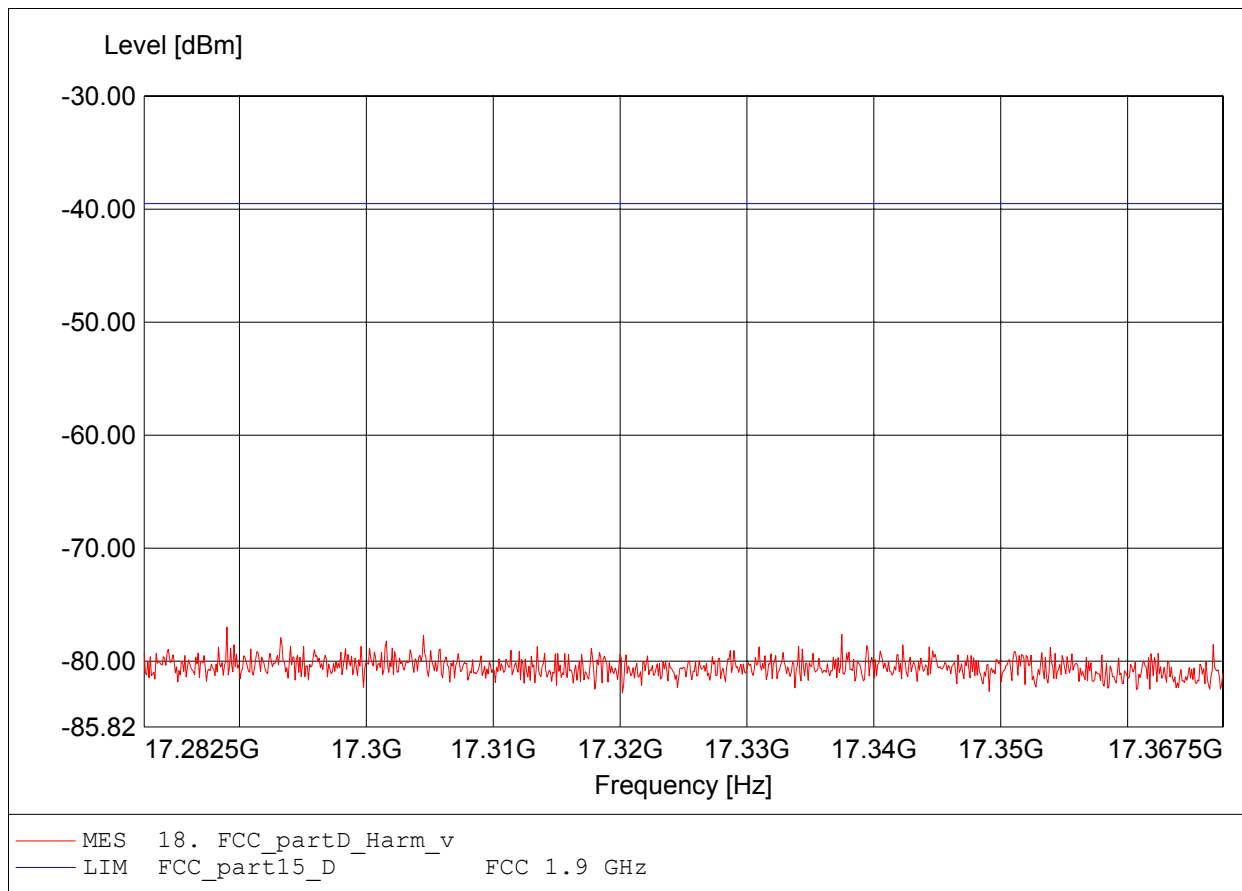

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.285GHz Pmax:-77.21dBm RBW:10 kHz

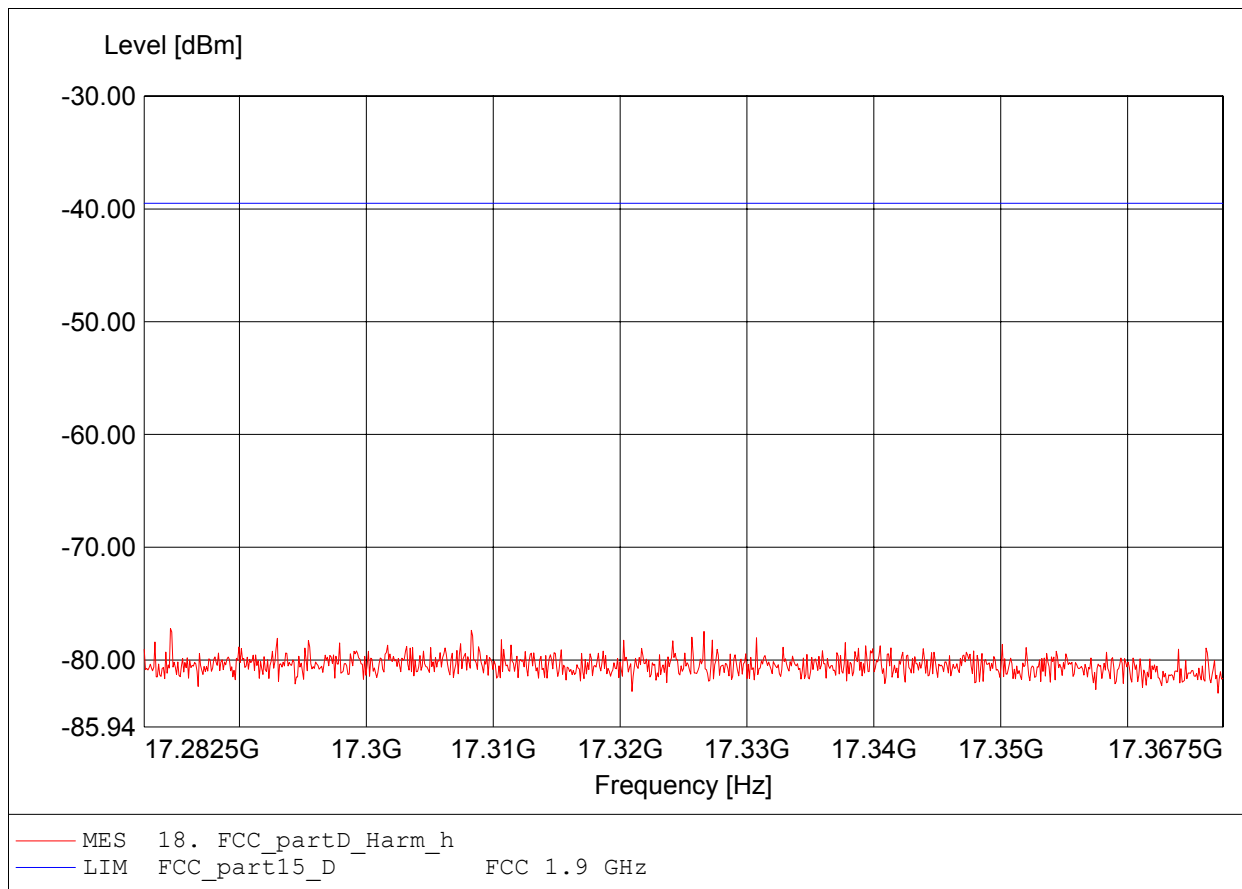

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.272GHz Pmax:-72.58dBm RBW:10 kHz

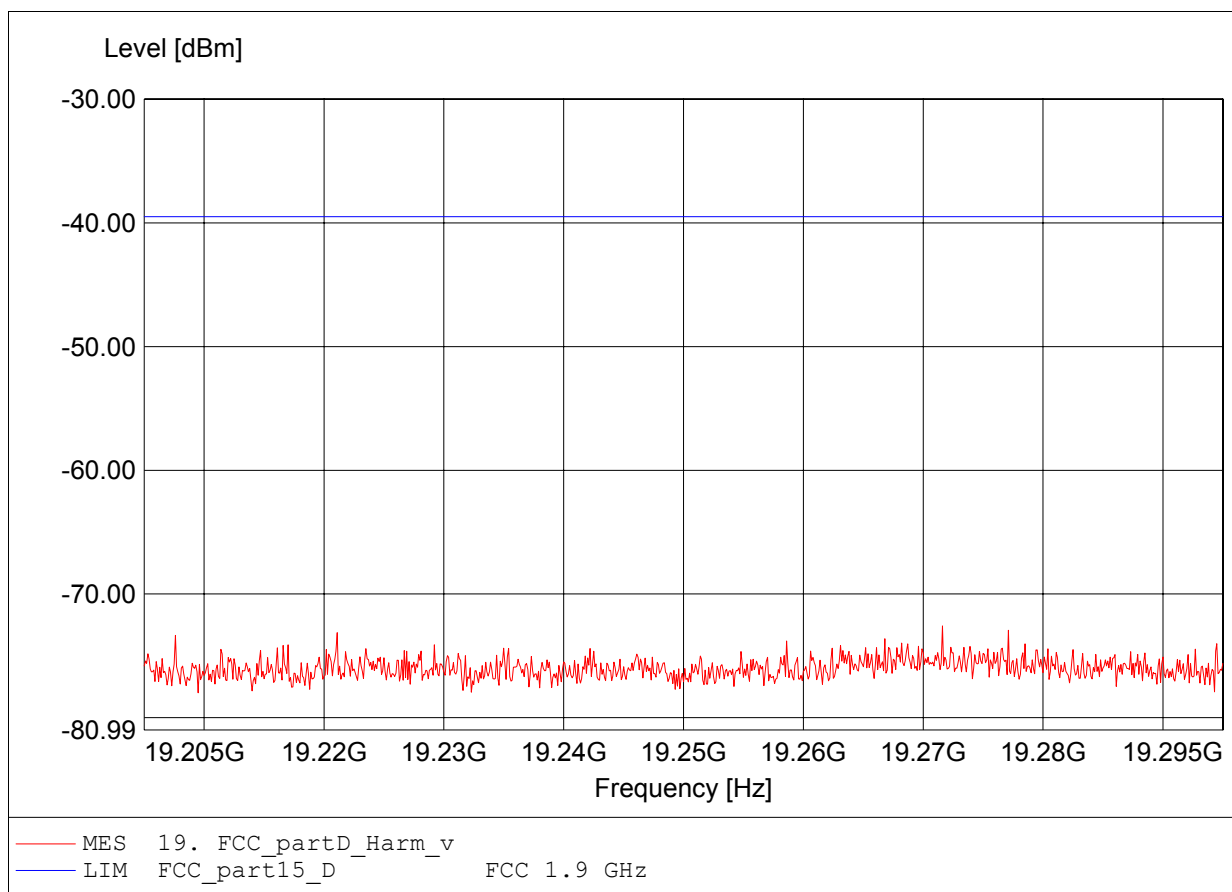

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 0
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.265GHz Pmax:-73.32dBm RBW:10 kHz

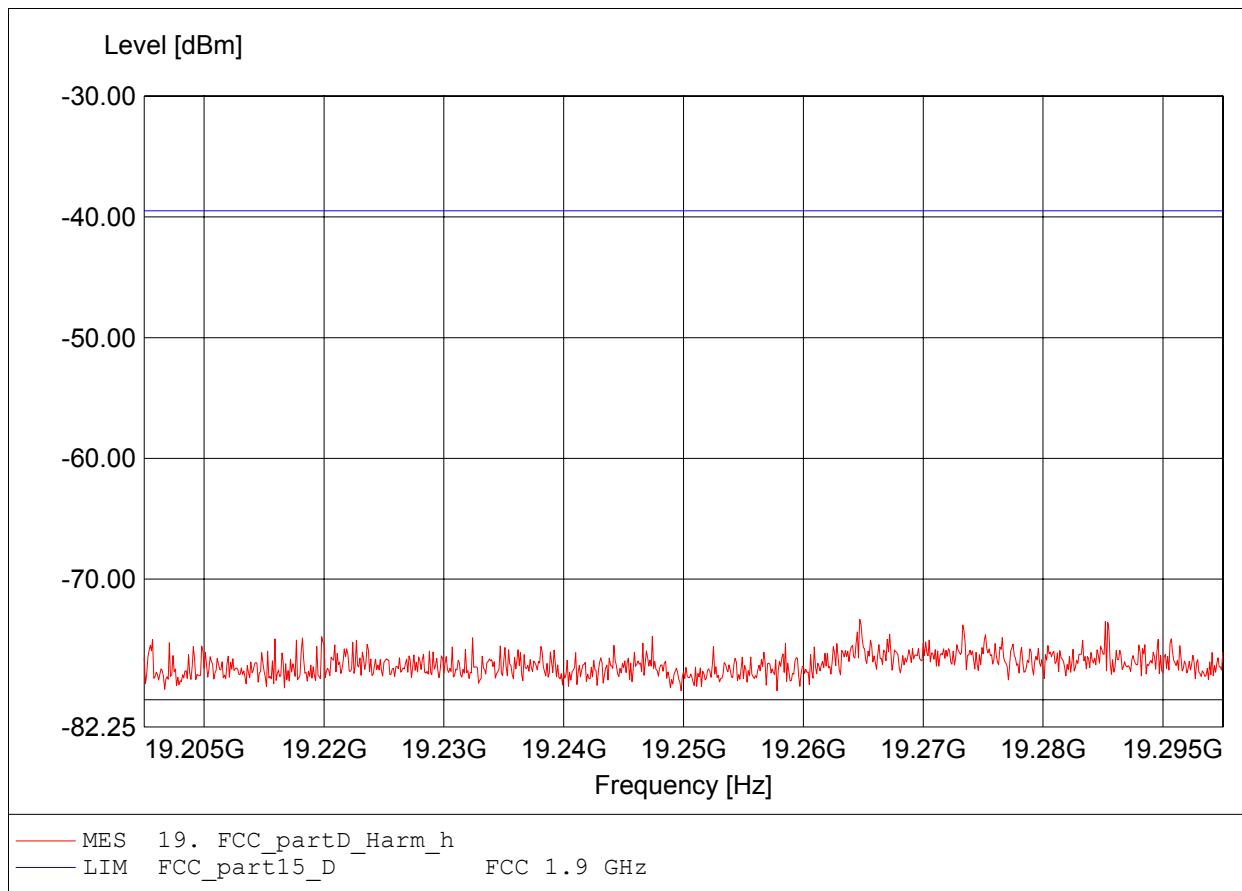

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:176.578MHz Pmax:-56.12dBm RBW: 100 kHz

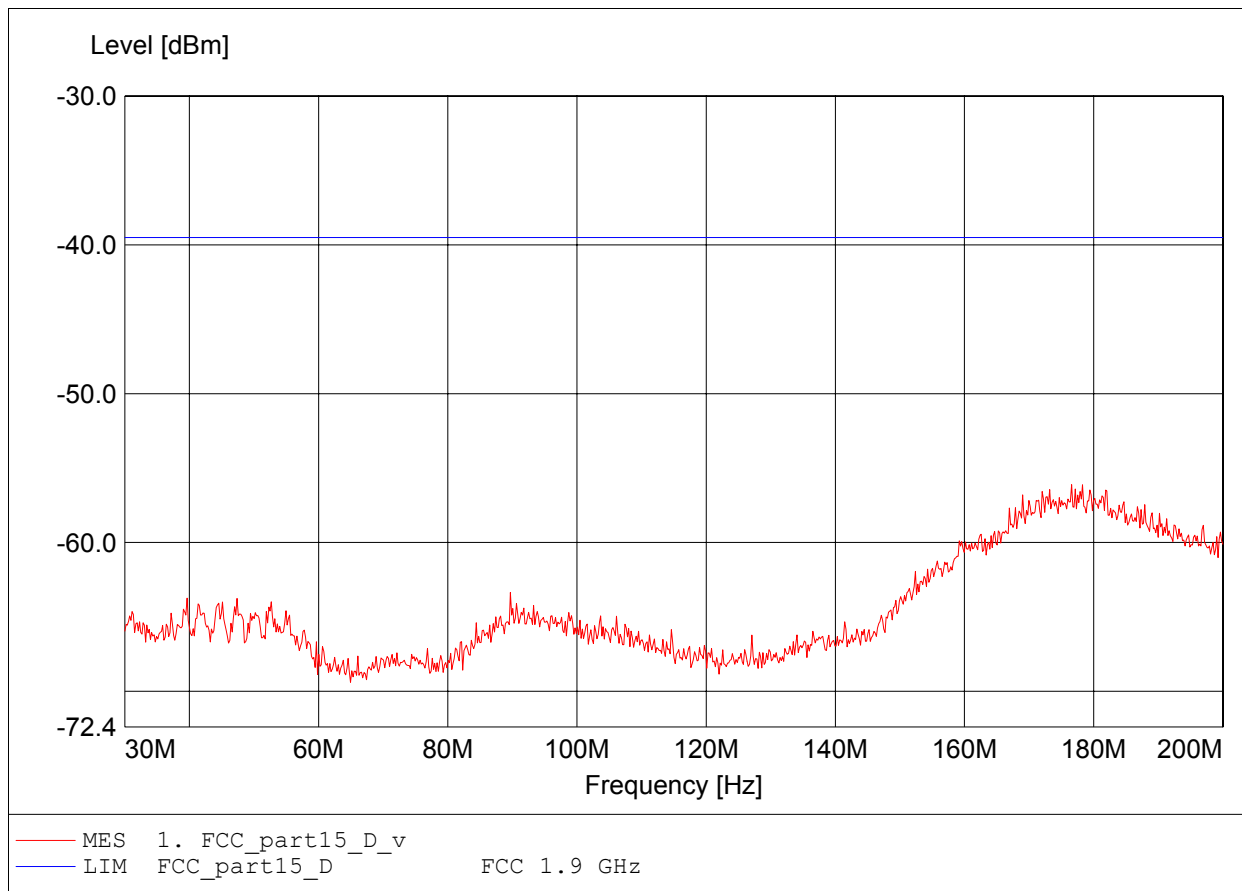

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:189.989MHz Pmax:-62.06dBm RBW: 100 kHz

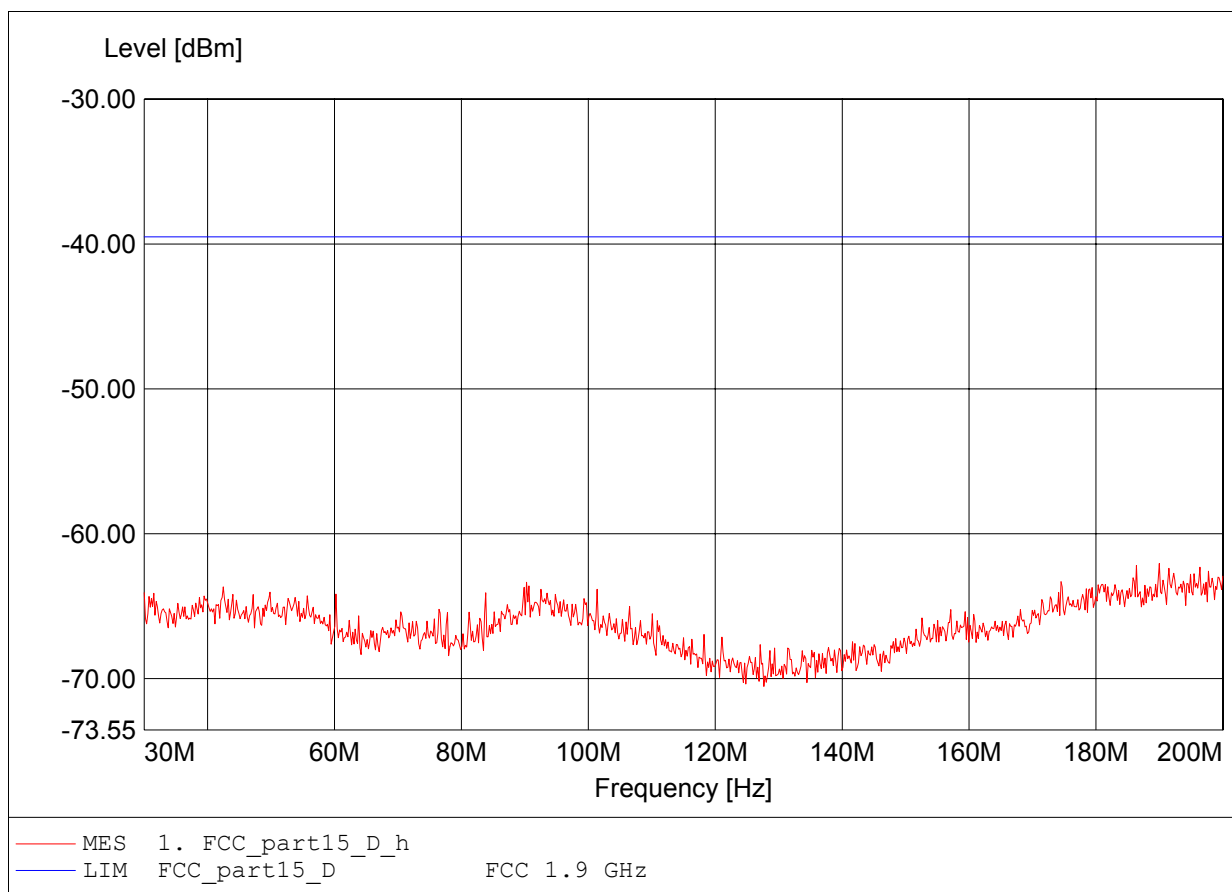

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:350.222MHz Pmax:-57.29dBm RBW: 100 kHz

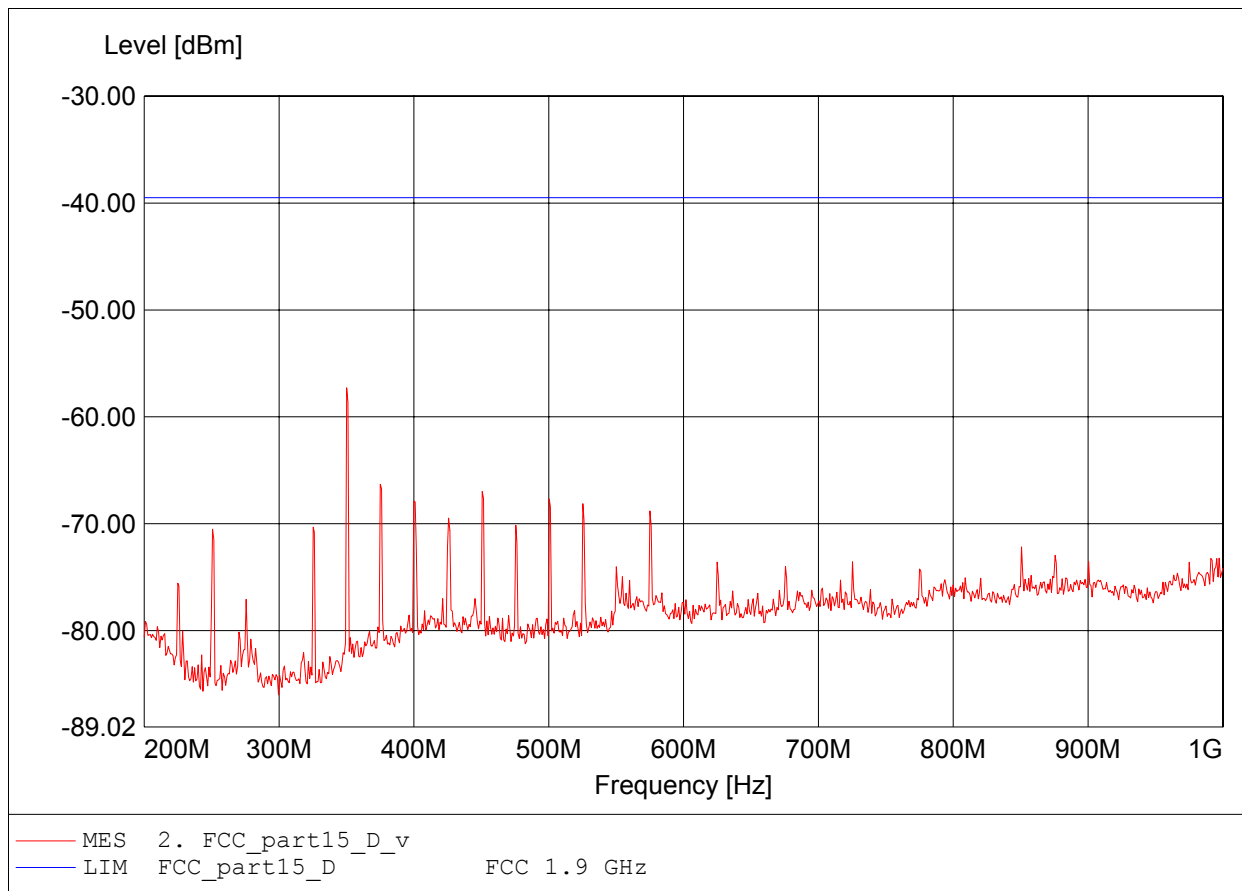

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:350.222MHz Pmax:-62.85dBm RBW: 100 kHz

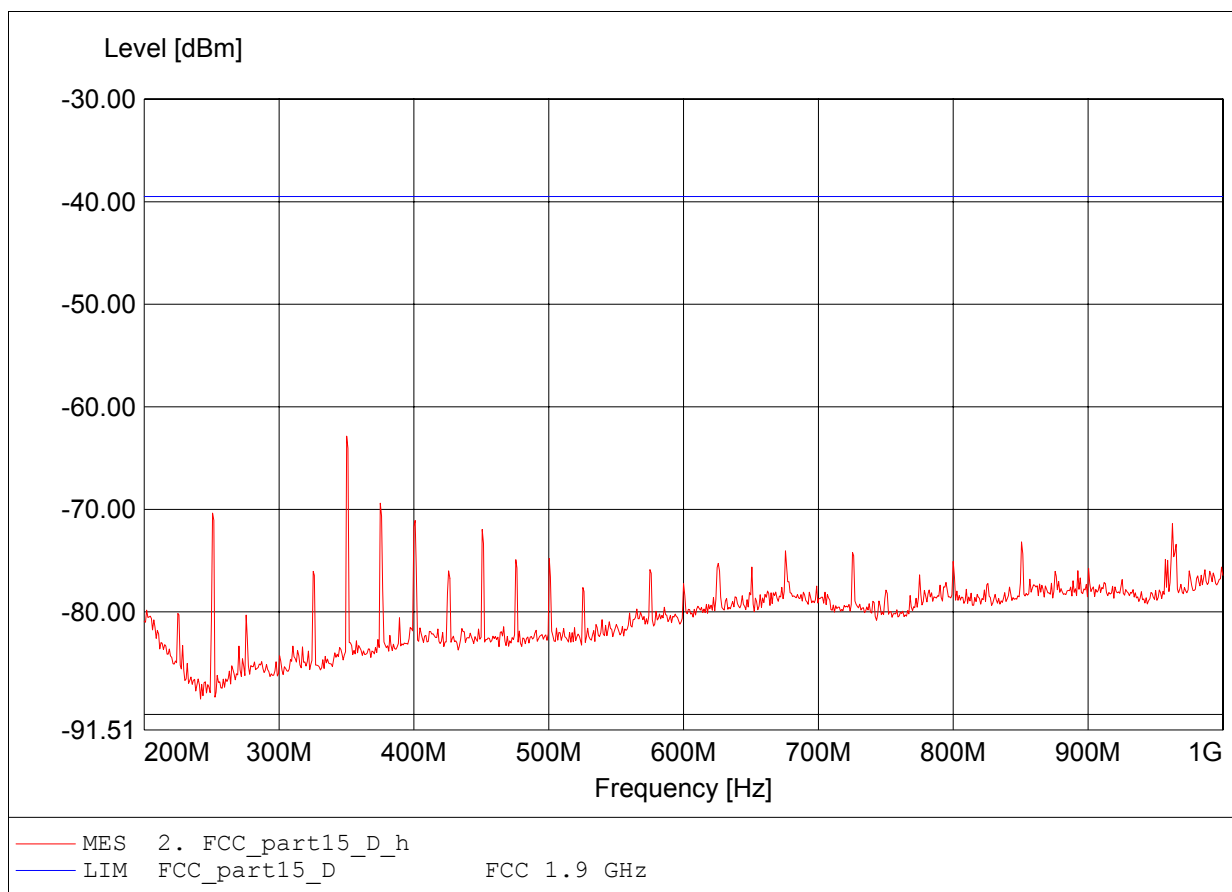

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.912GHz Pmax:-44.03dBm RBW: 100 kHz

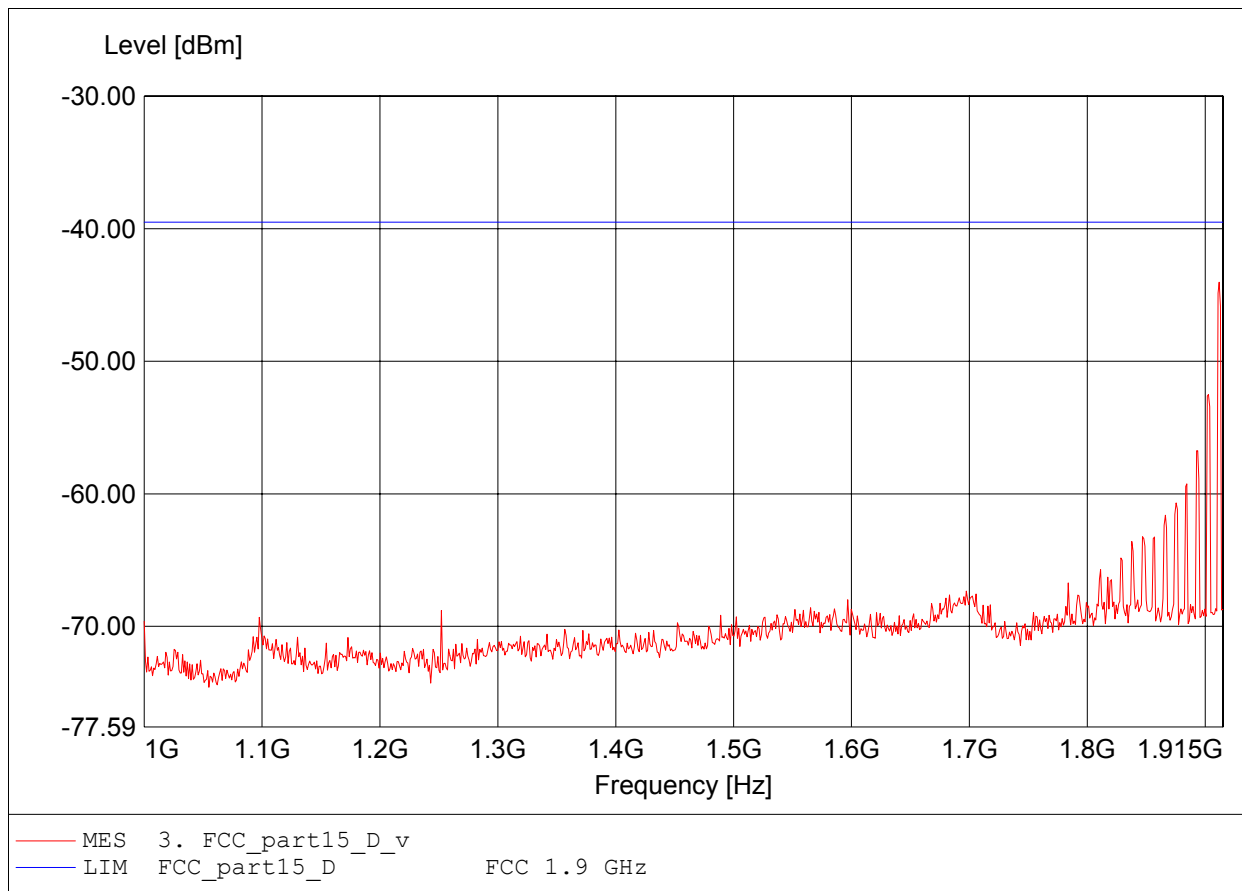

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.915GHz Pmax:-42.67dBm RBW: 100 kHz

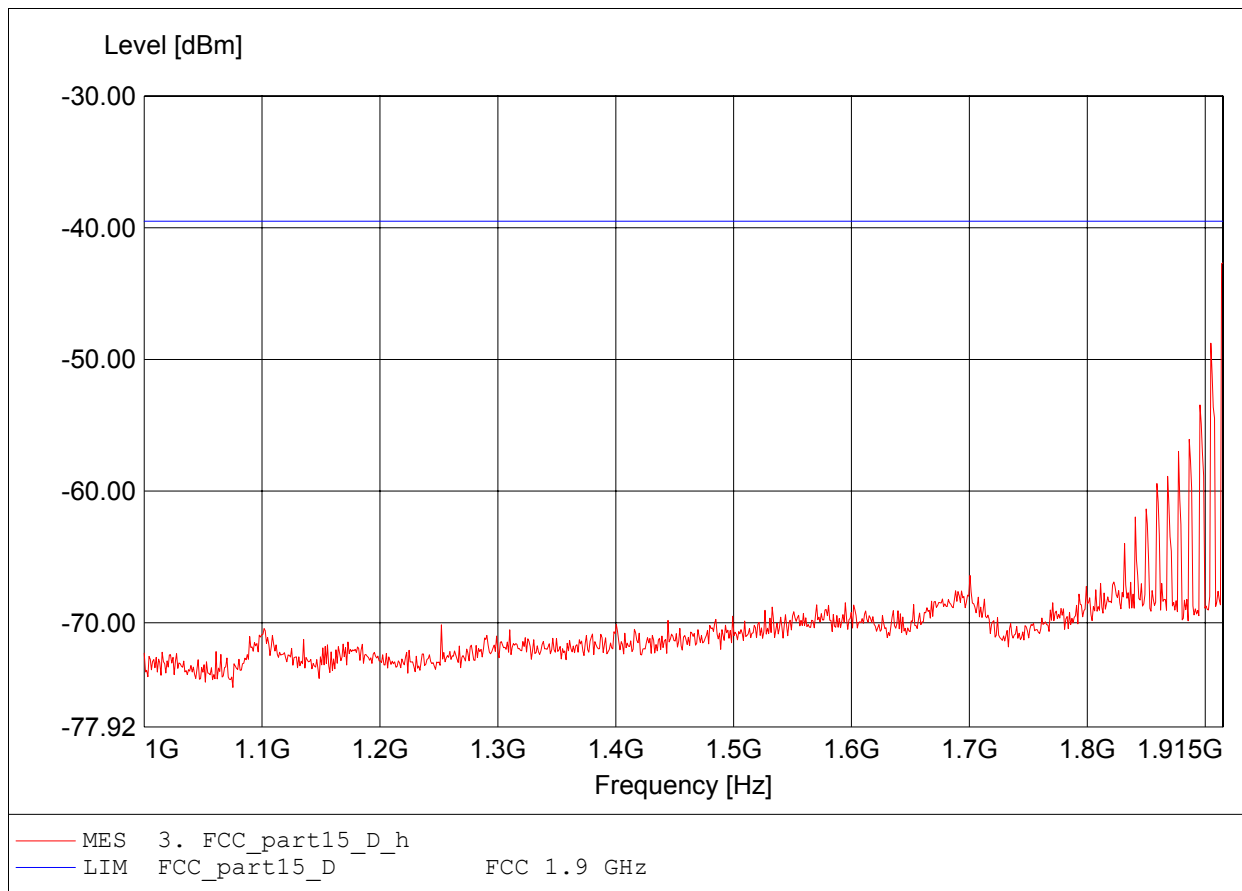

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-52.32dBm RBW: 10 kHz

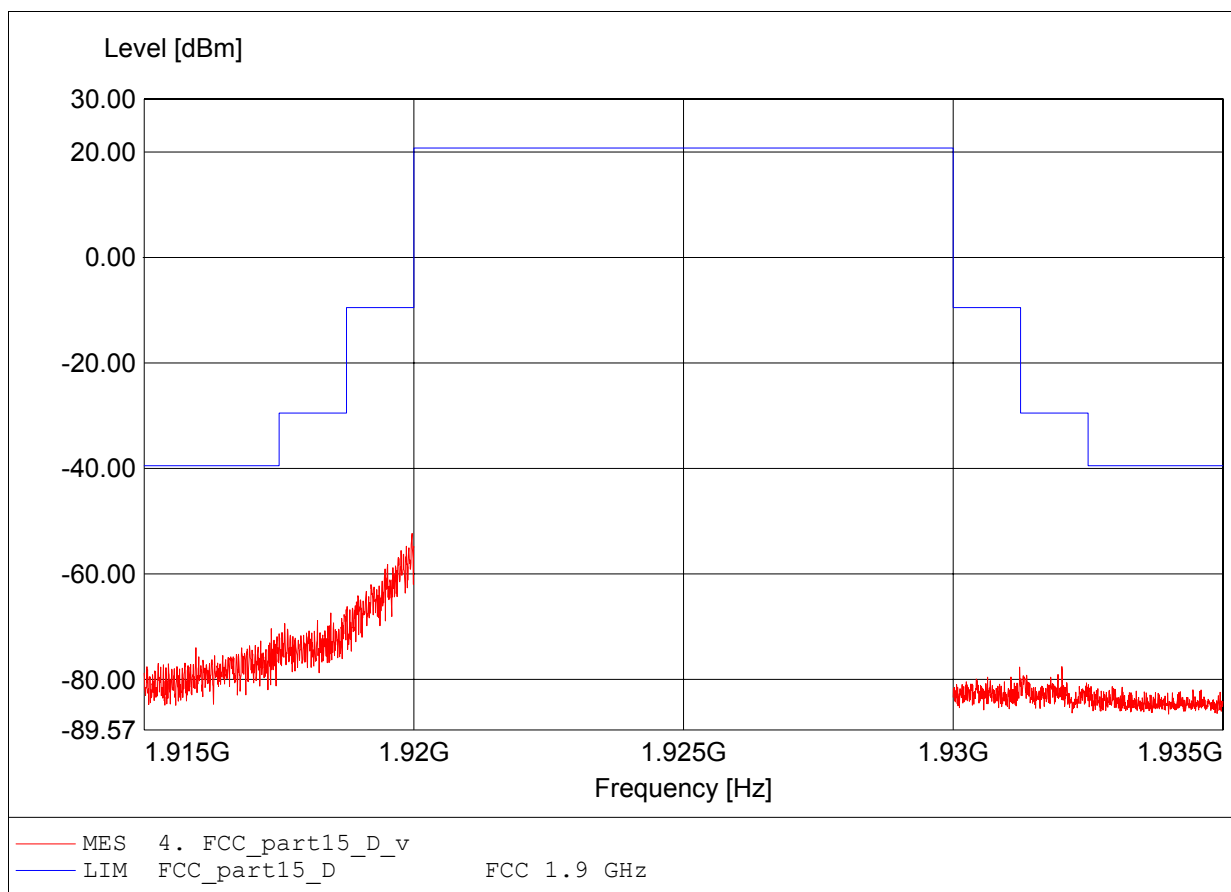

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-51.17dBm RBW: 10 kHz

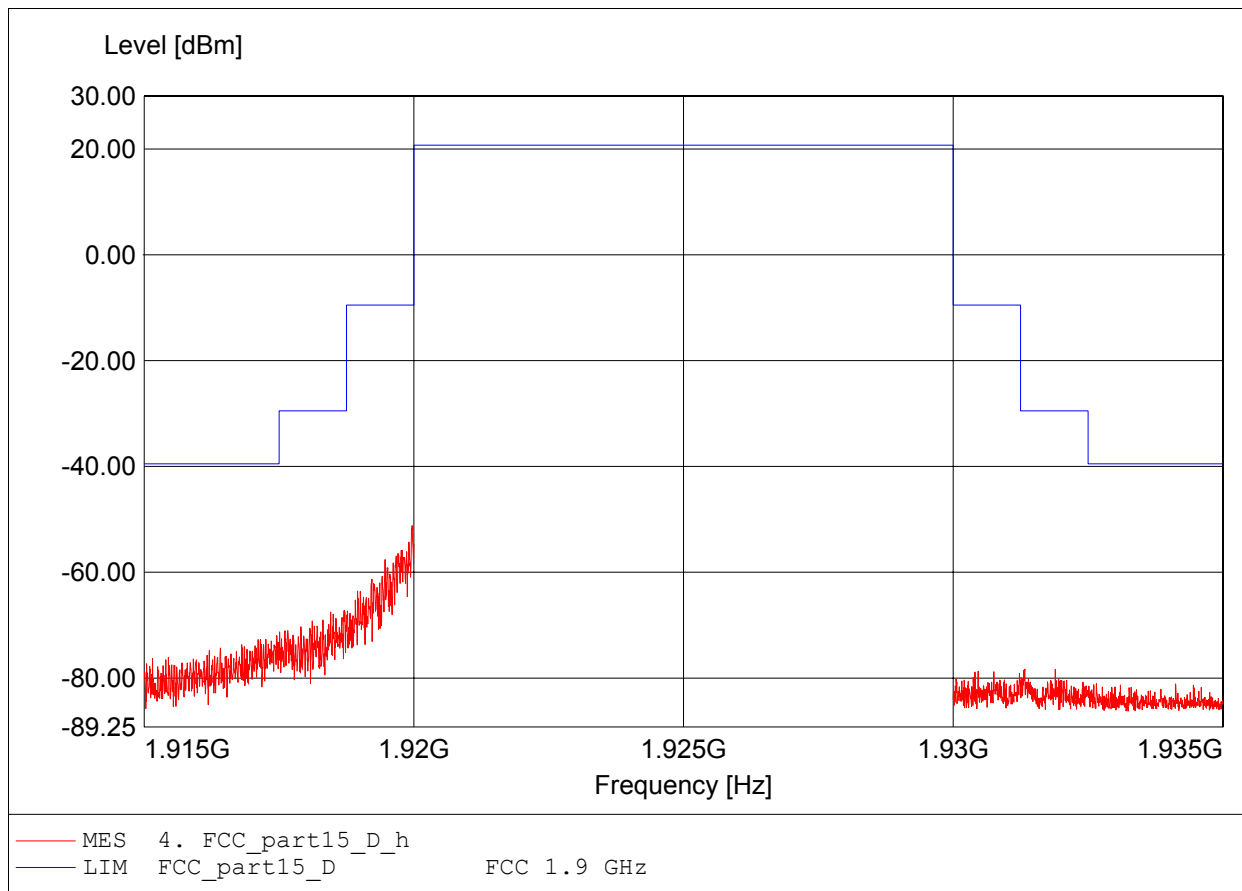

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-50.91dBm RBW: 10 kHz

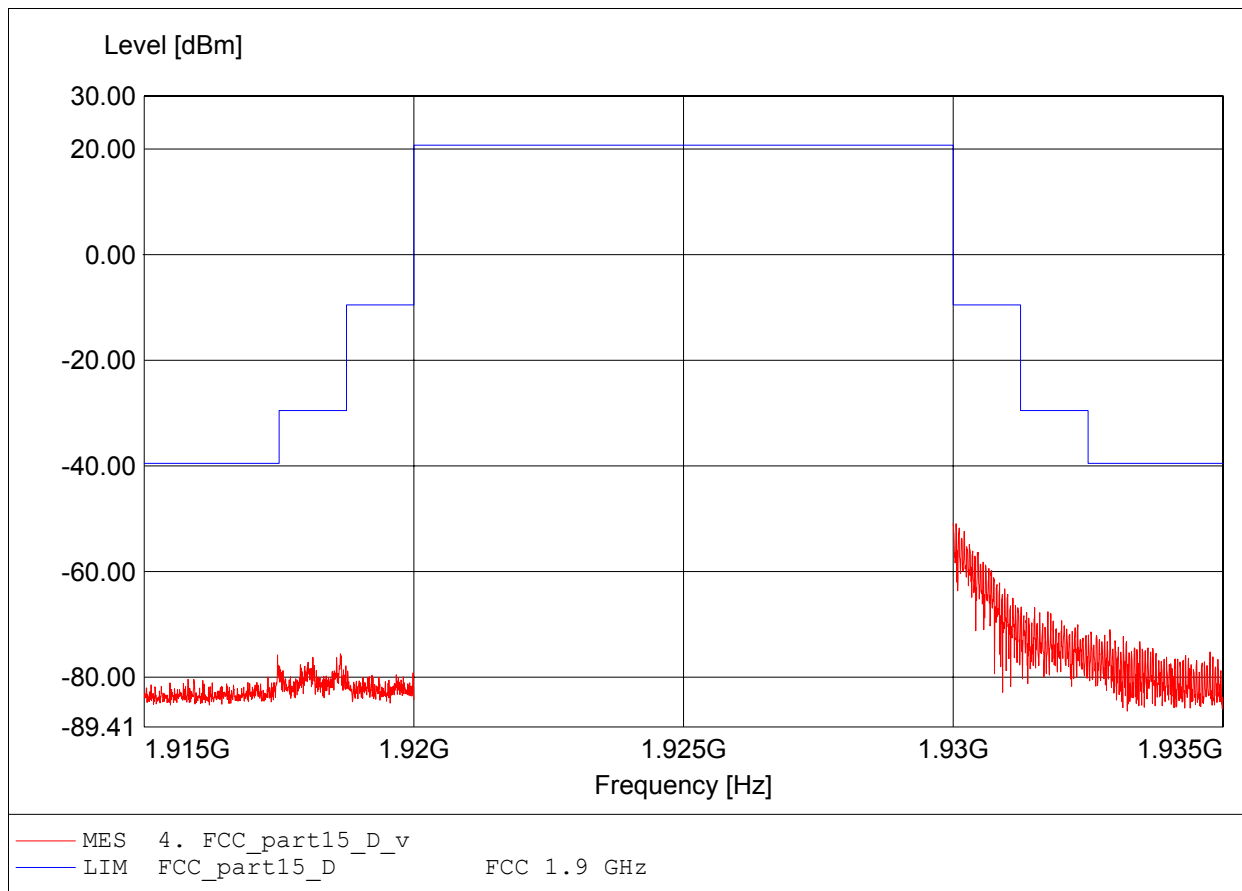

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-48.52dBm RBW: 10 kHz

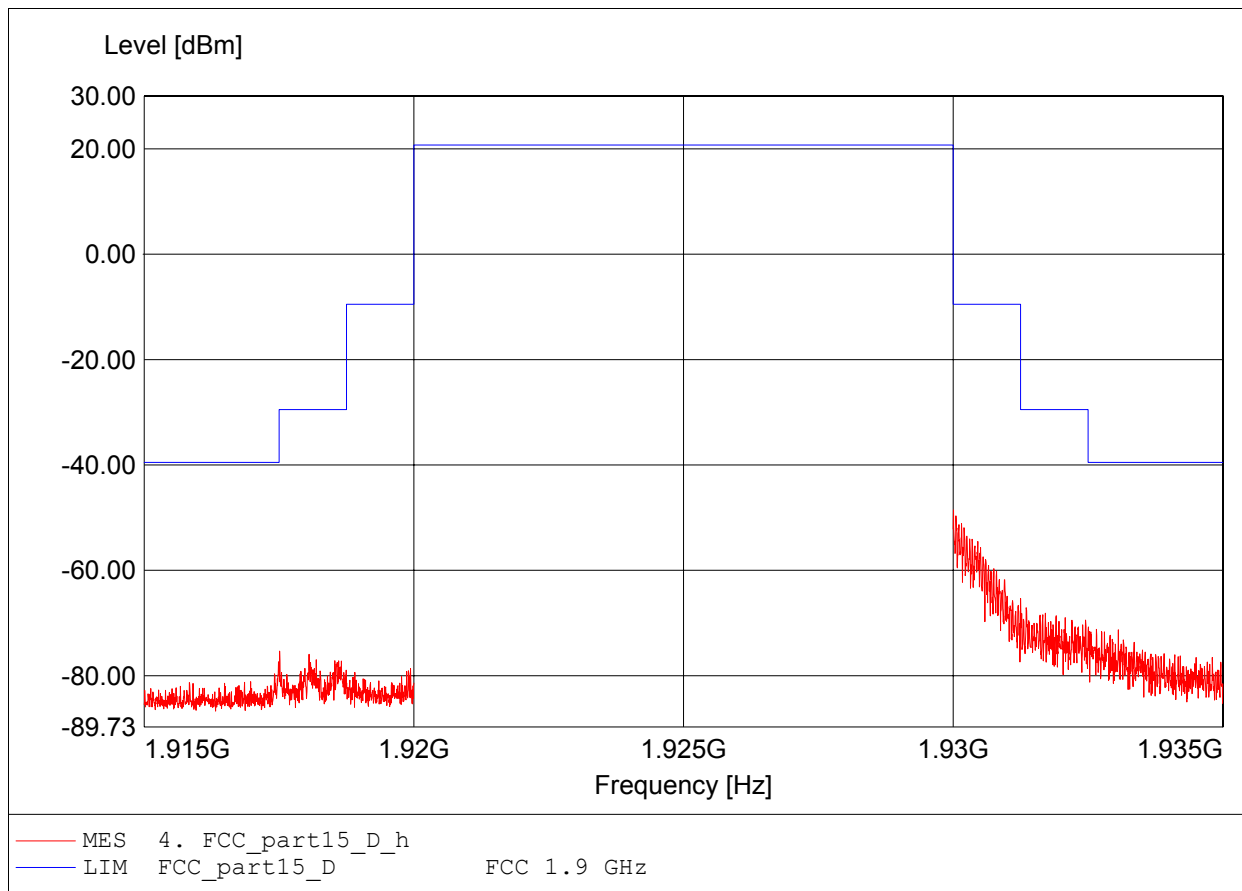

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.842GHz Pmax:-67.18dBm RBW:10 kHz

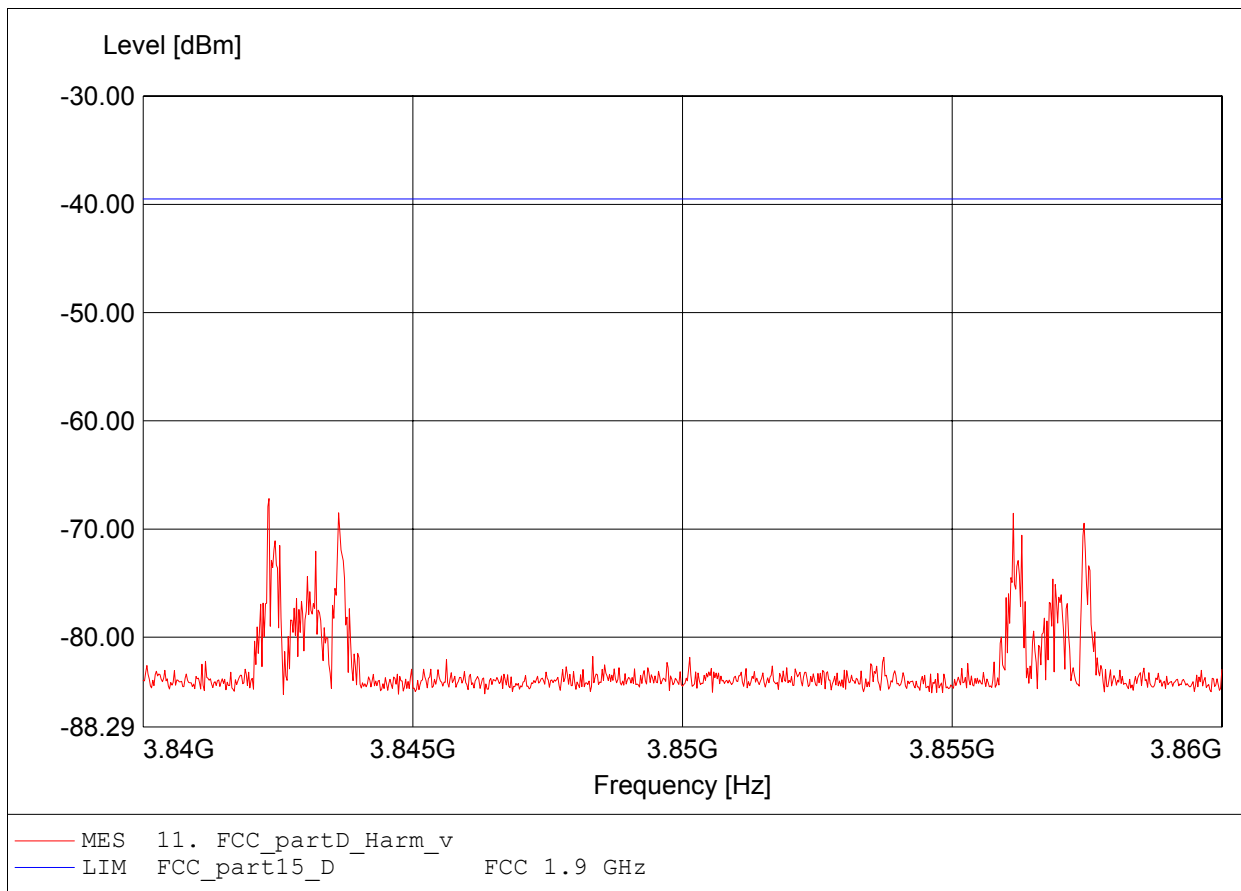

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.856GHz Pmax:-66.86dBm RBW:10 kHz

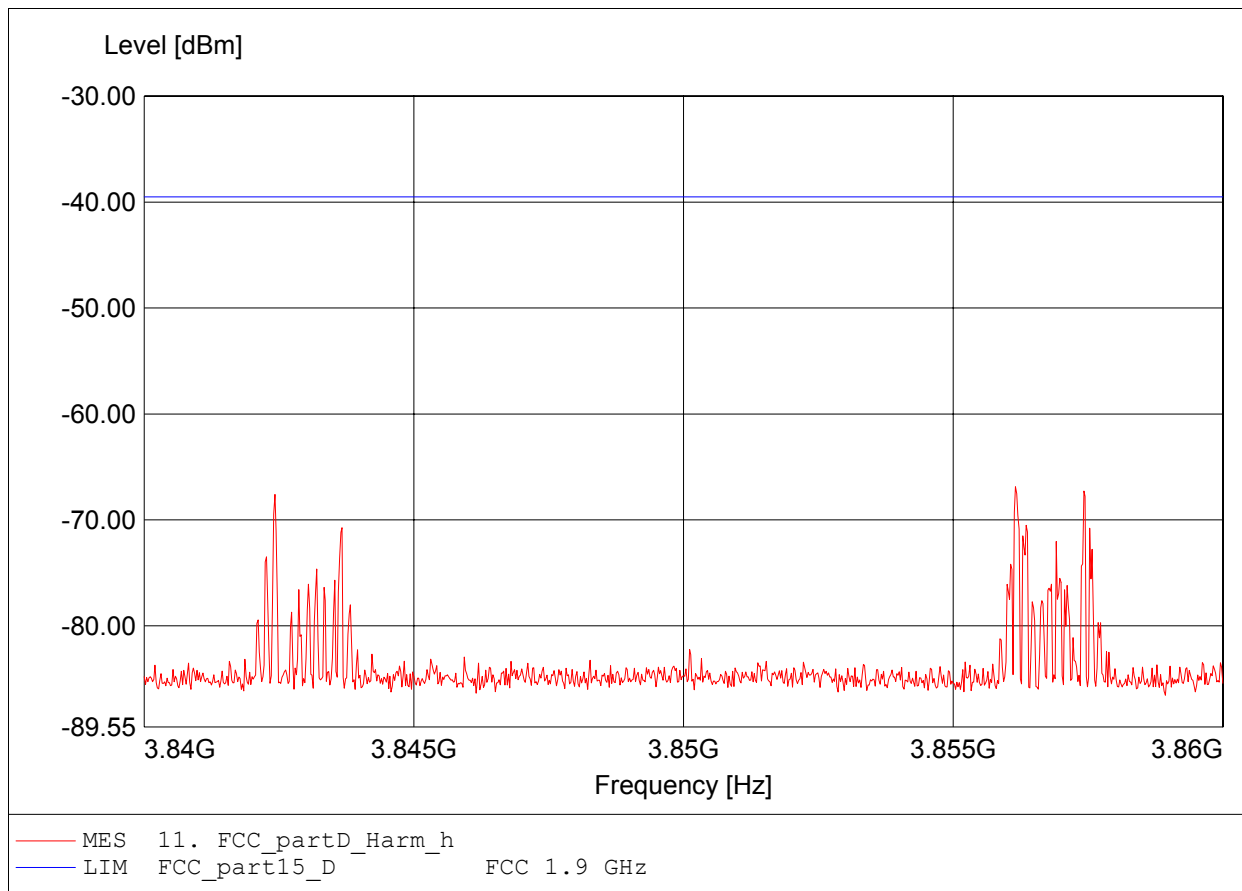

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.764GHz Pmax:-73.64dBm RBW:10 kHz

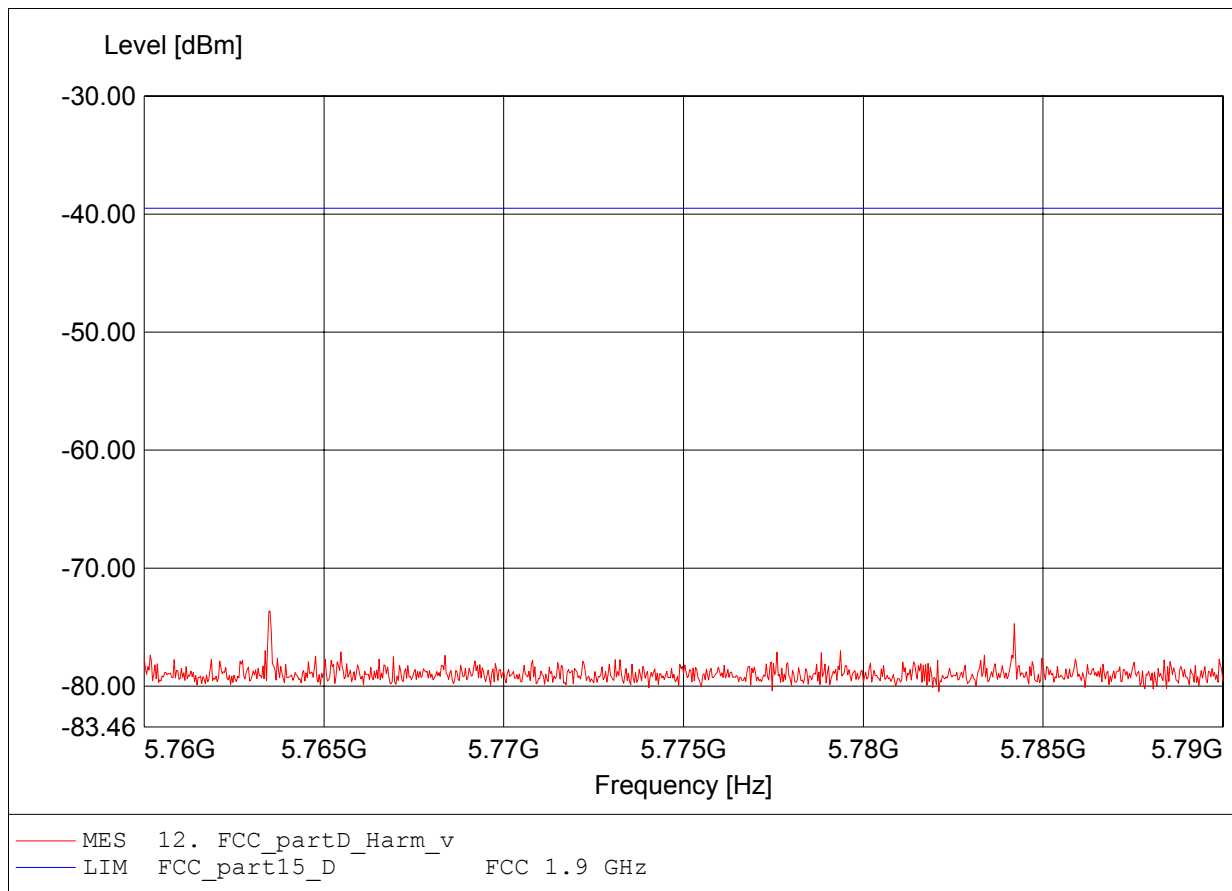

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.784GHz Pmax:-69.34dBm RBW:10 kHz

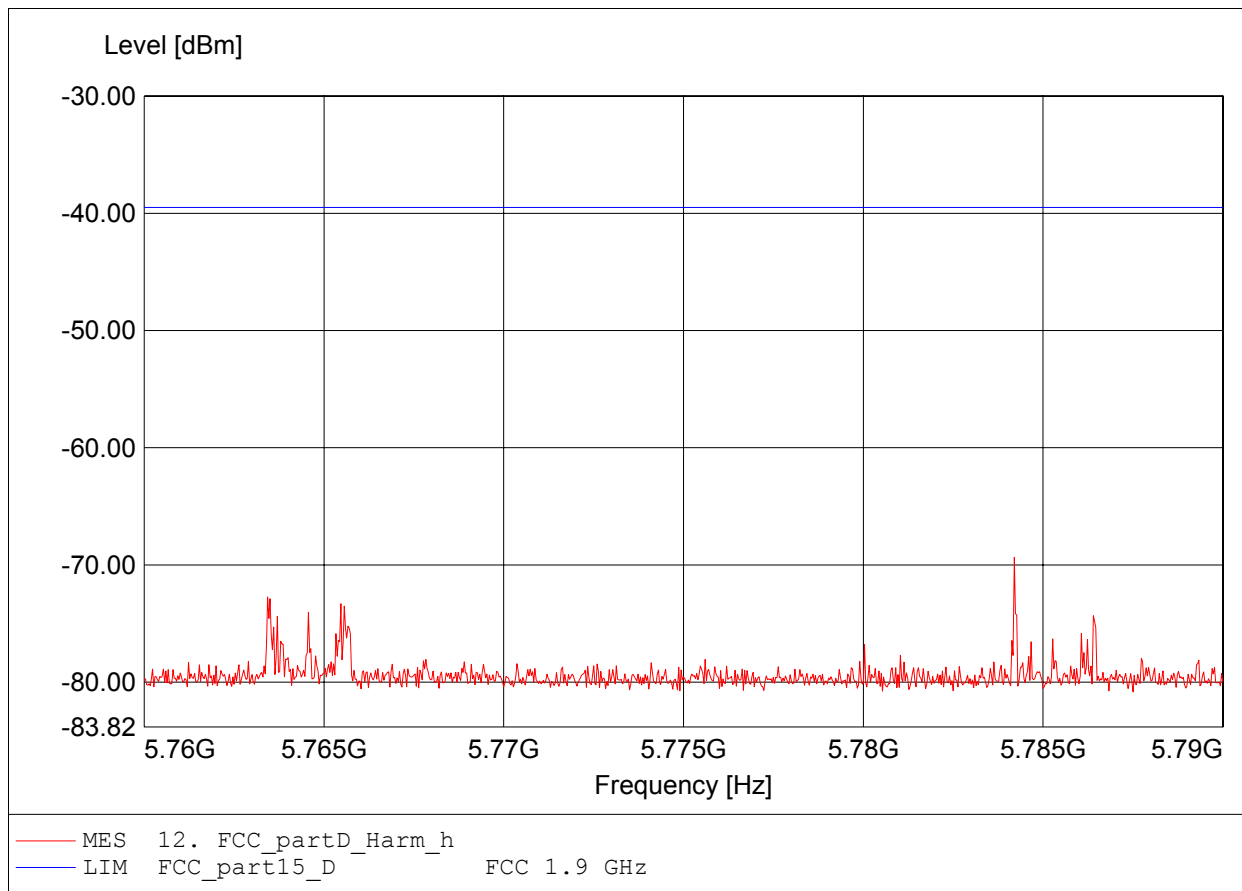

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:7.715GHz Pmax:-65.29dBm RBW:10 kHz

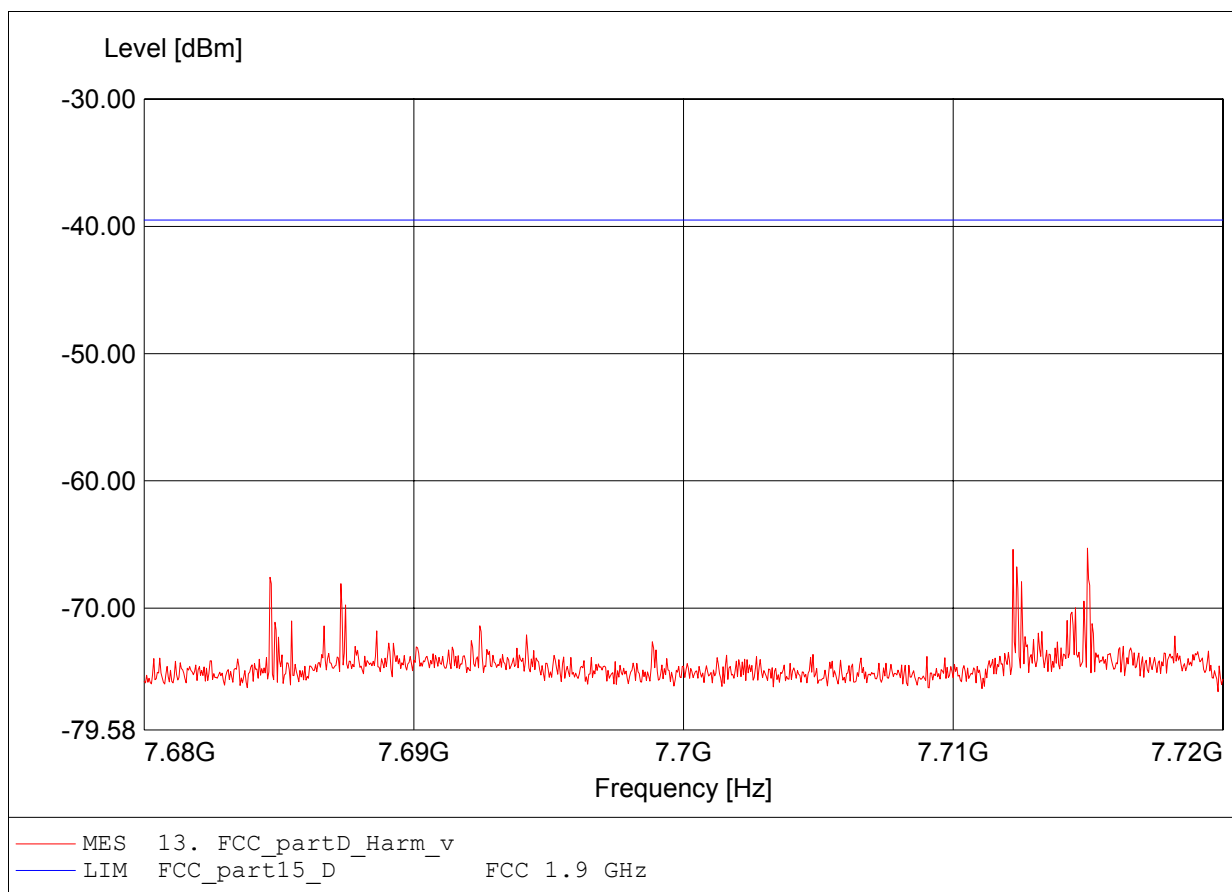

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:7.715GHz Pmax:-65.93dBm RBW:10 kHz

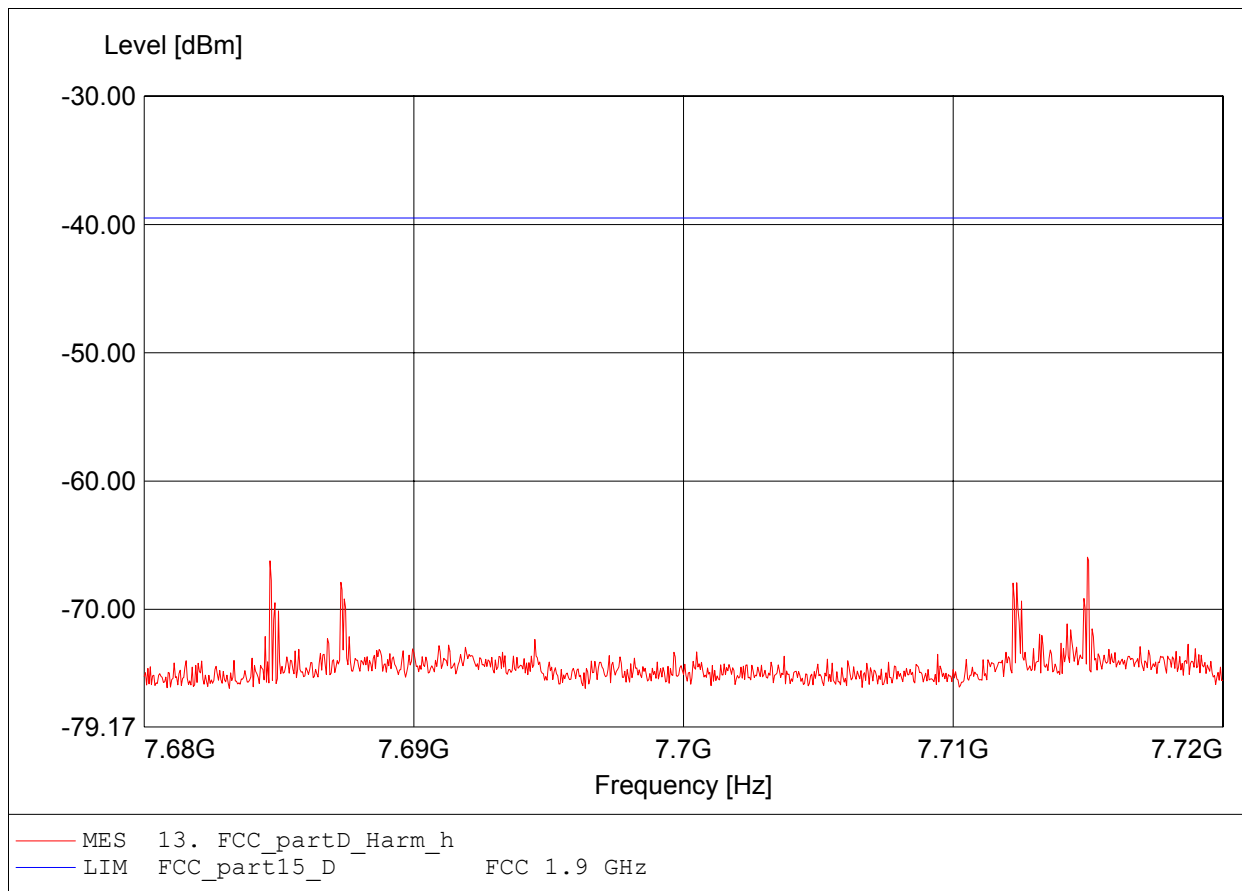

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.640GHz Pmax:-62.42dBm RBW:10 kHz

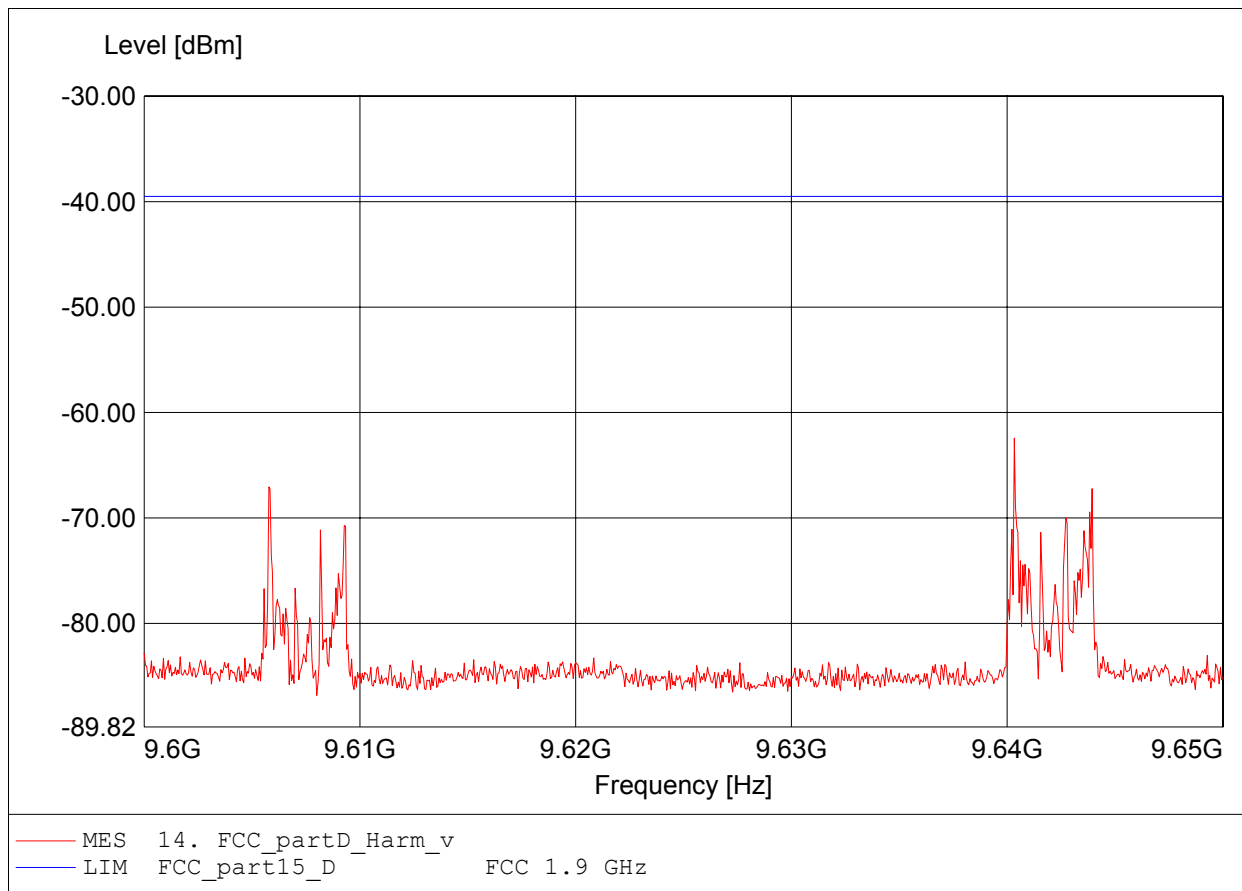

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.640GHz Pmax:-70.37dBm RBW:10 kHz

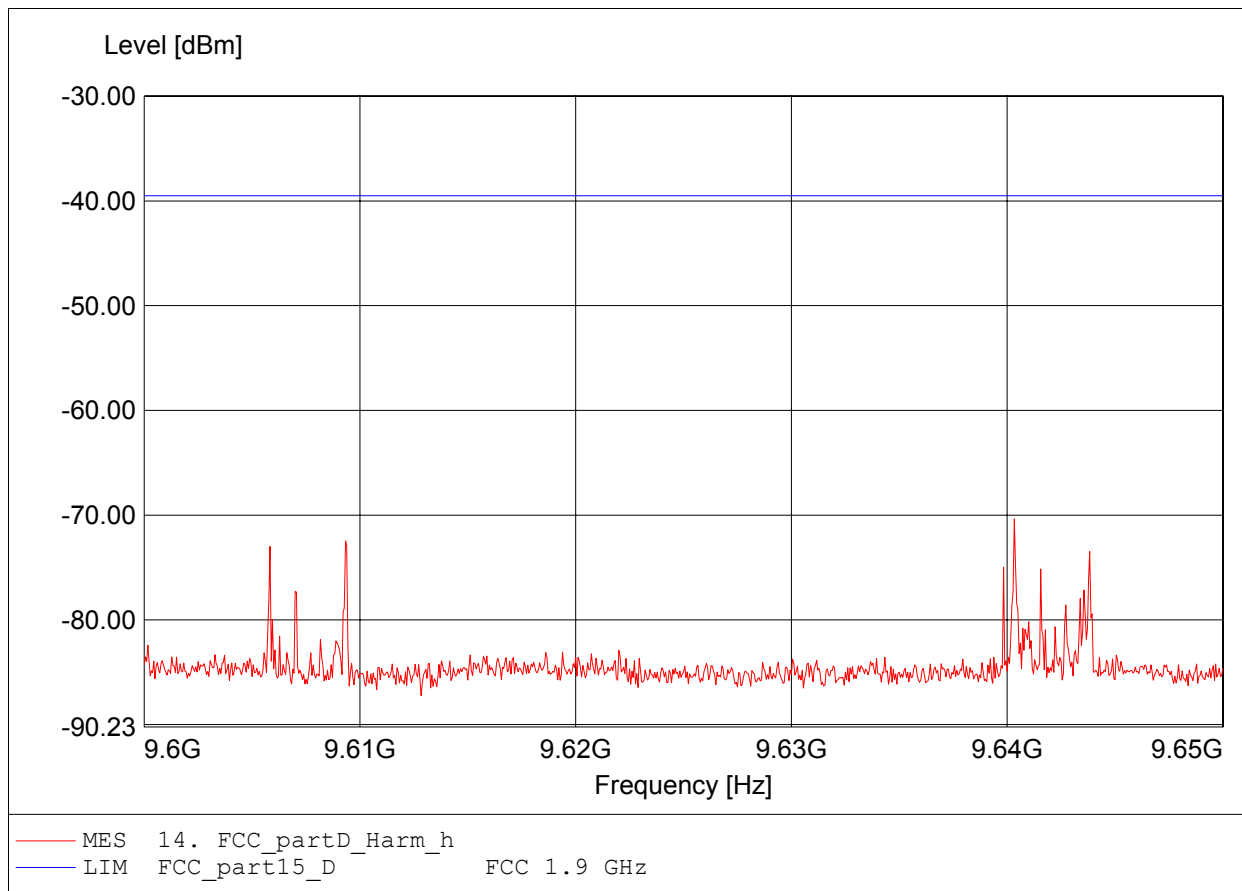

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.527GHz Pmax:-77.43dBm RBW:10 kHz

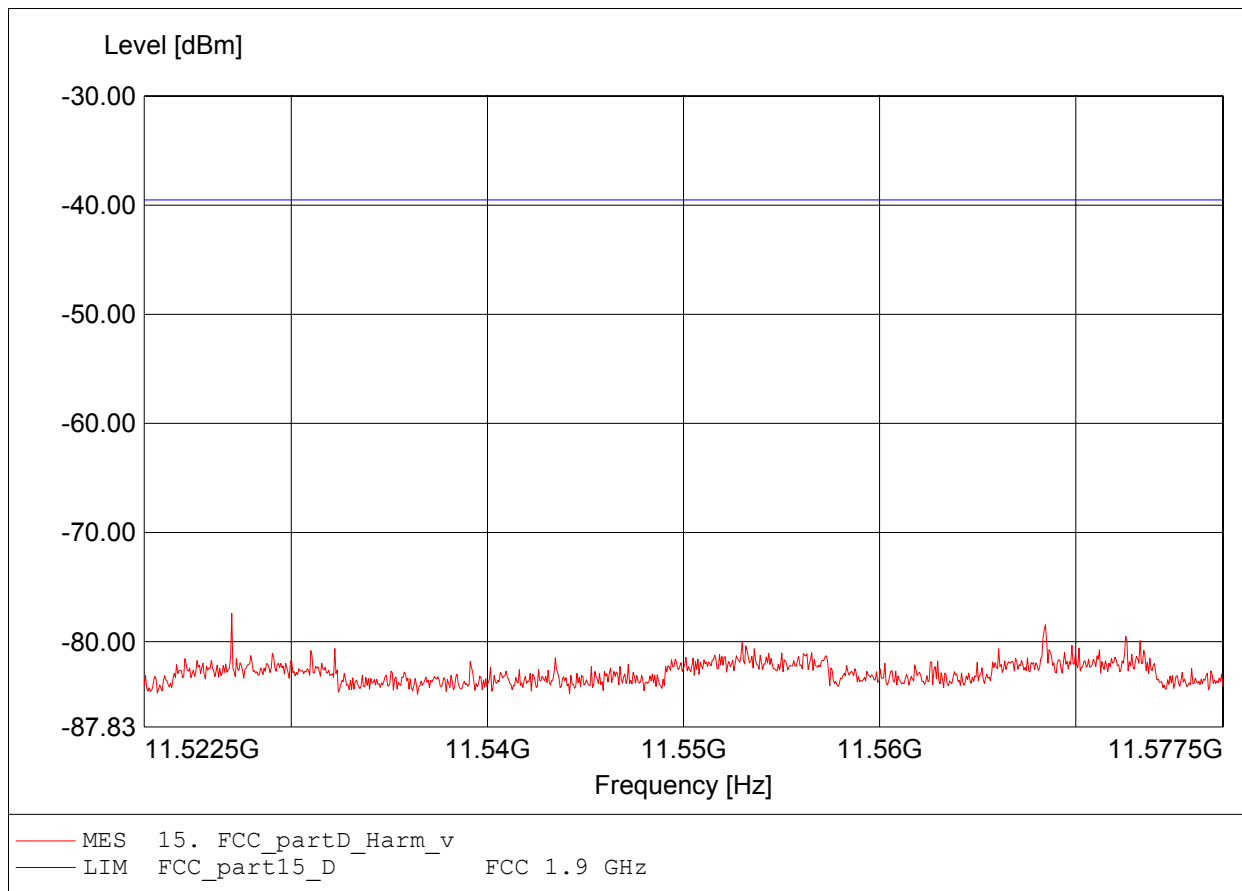

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.568GHz Pmax:-72.23dBm RBW:10 kHz

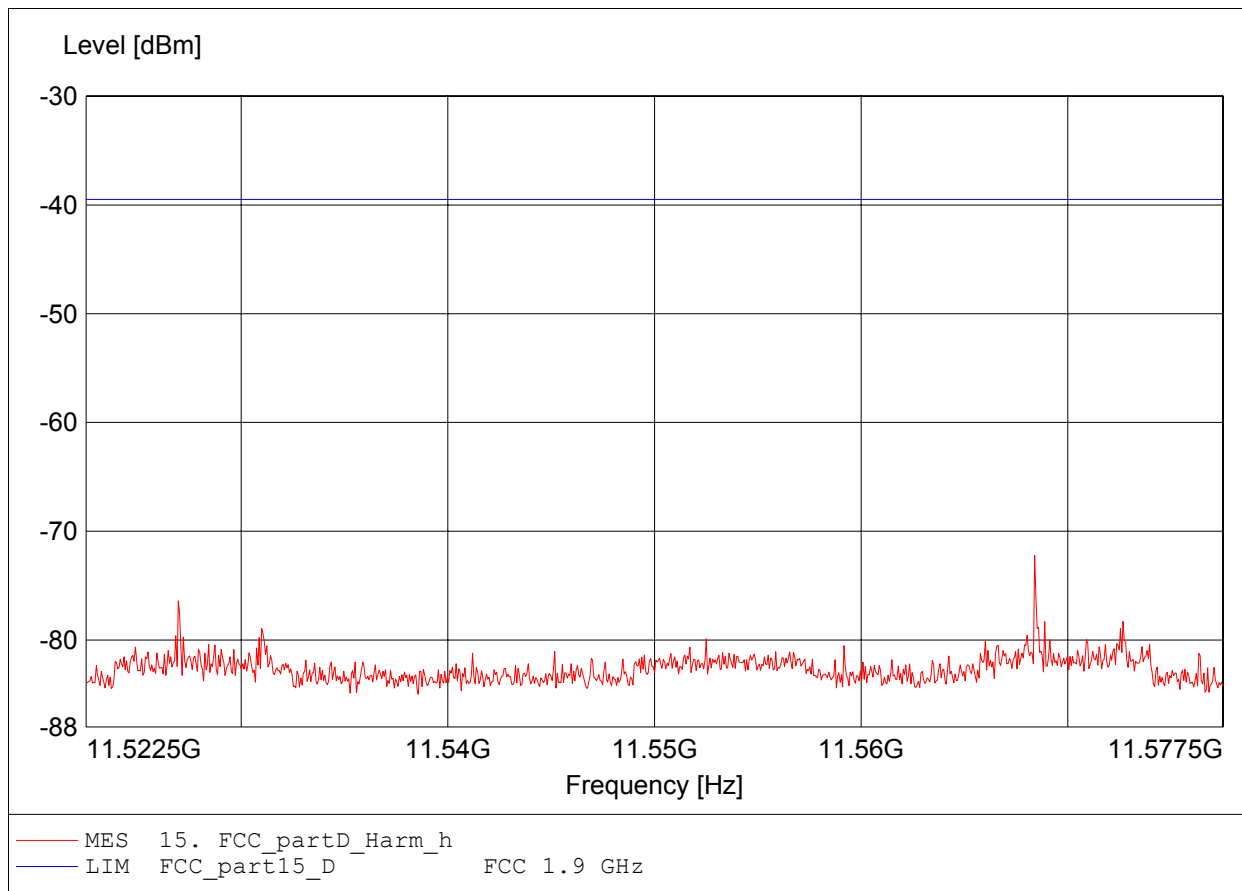

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.496GHz Pmax:-72.90dBm RBW:10 kHz

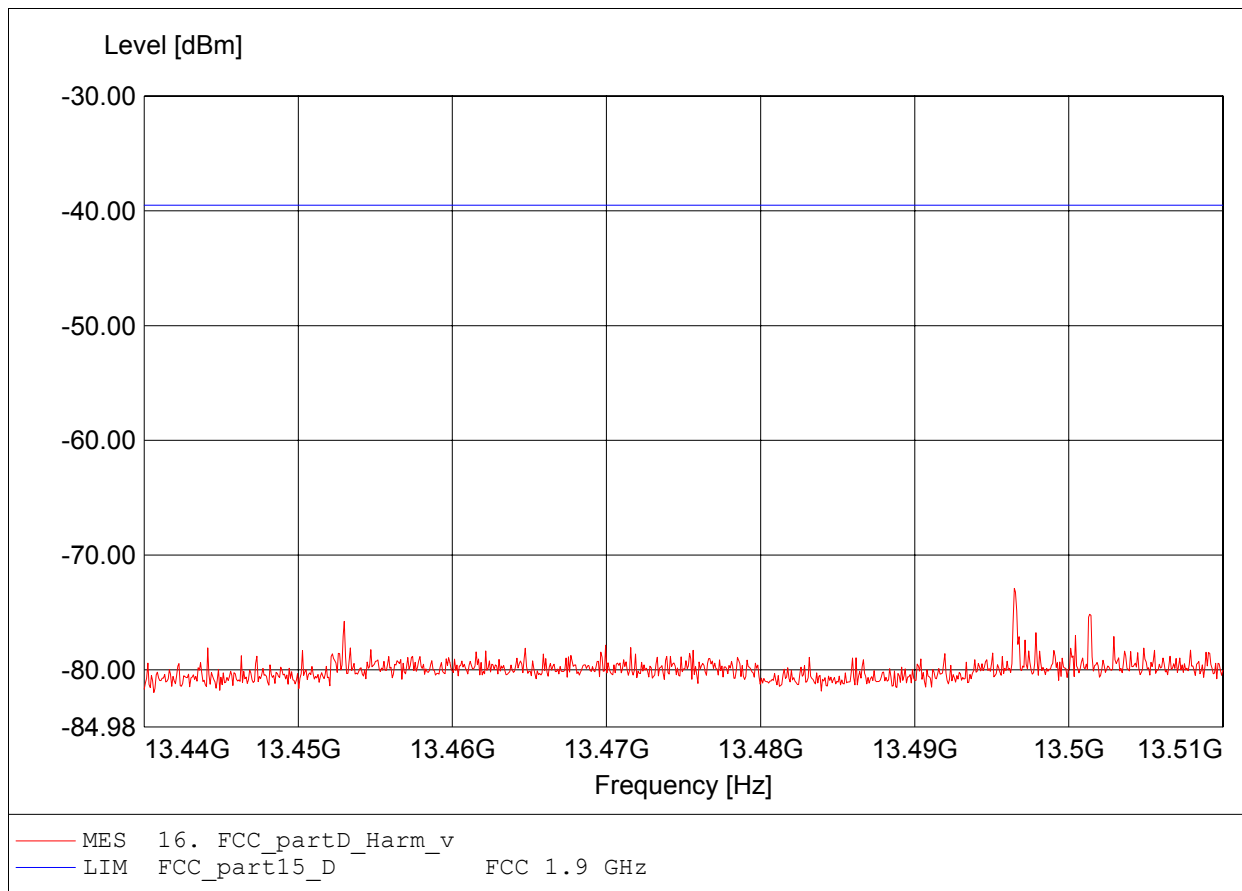

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.453GHz Pmax:-72.33dBm RBW:10 kHz

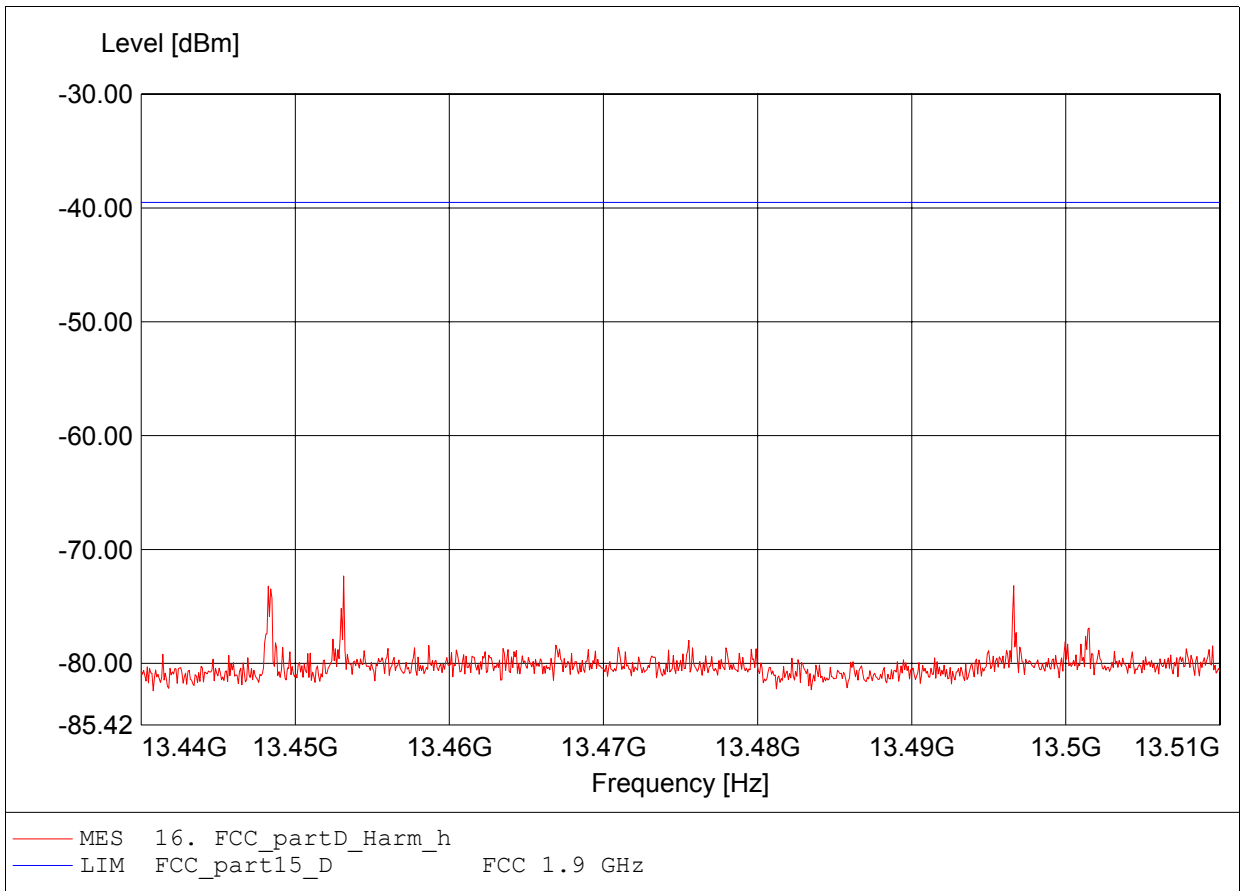

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.399GHz Pmax:-79.07dBm RBW:10 kHz

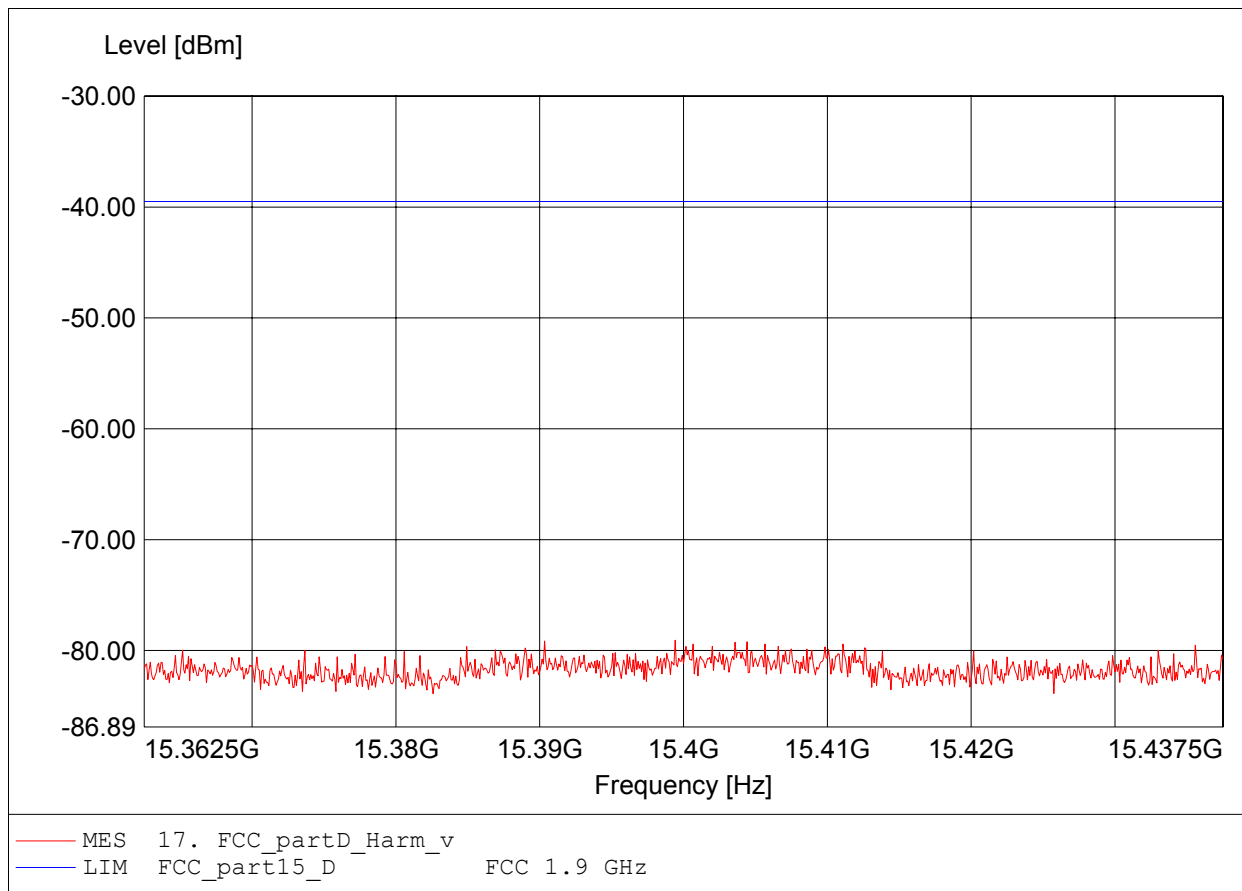

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.408GHz Pmax:-76.84dBm RBW:10 kHz

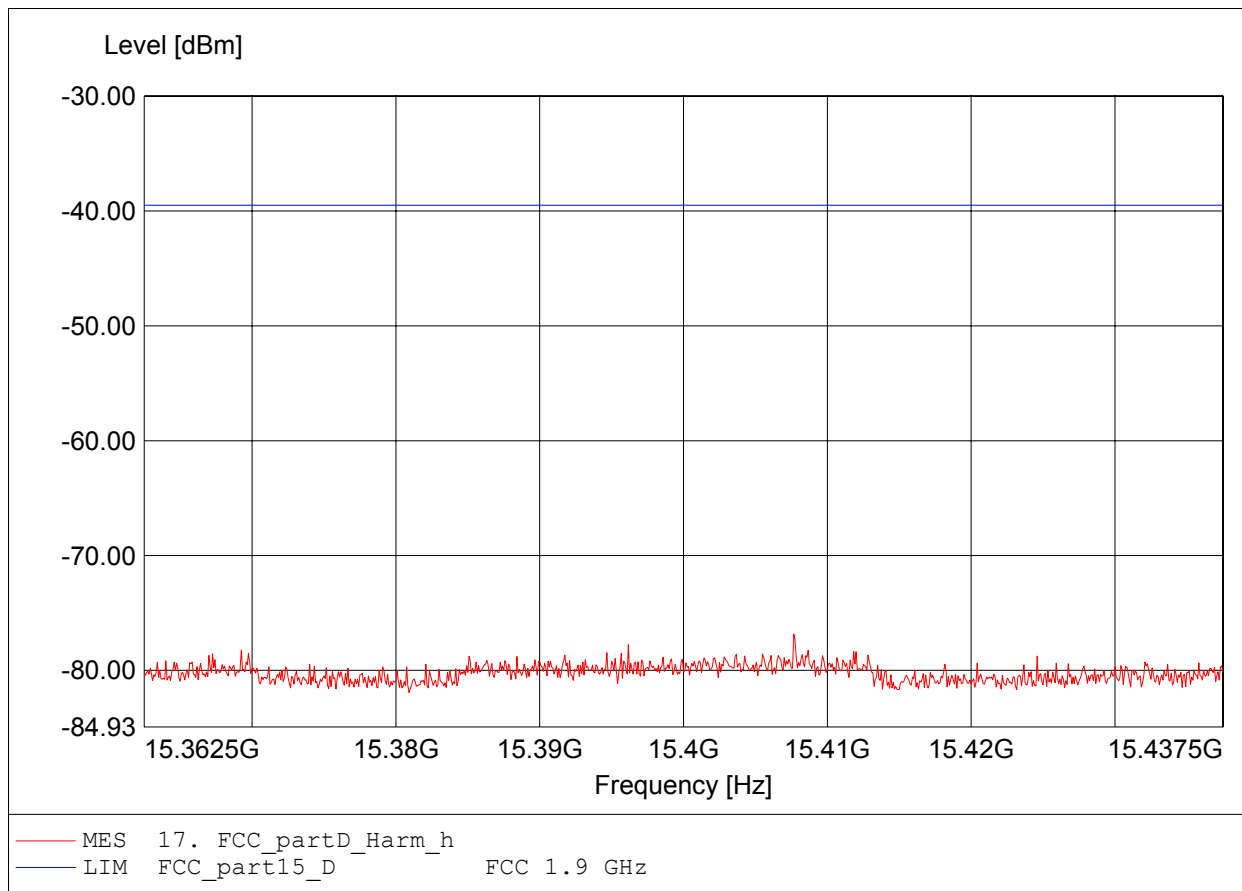

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.308GHz Pmax:-77.51dBm RBW:10 kHz

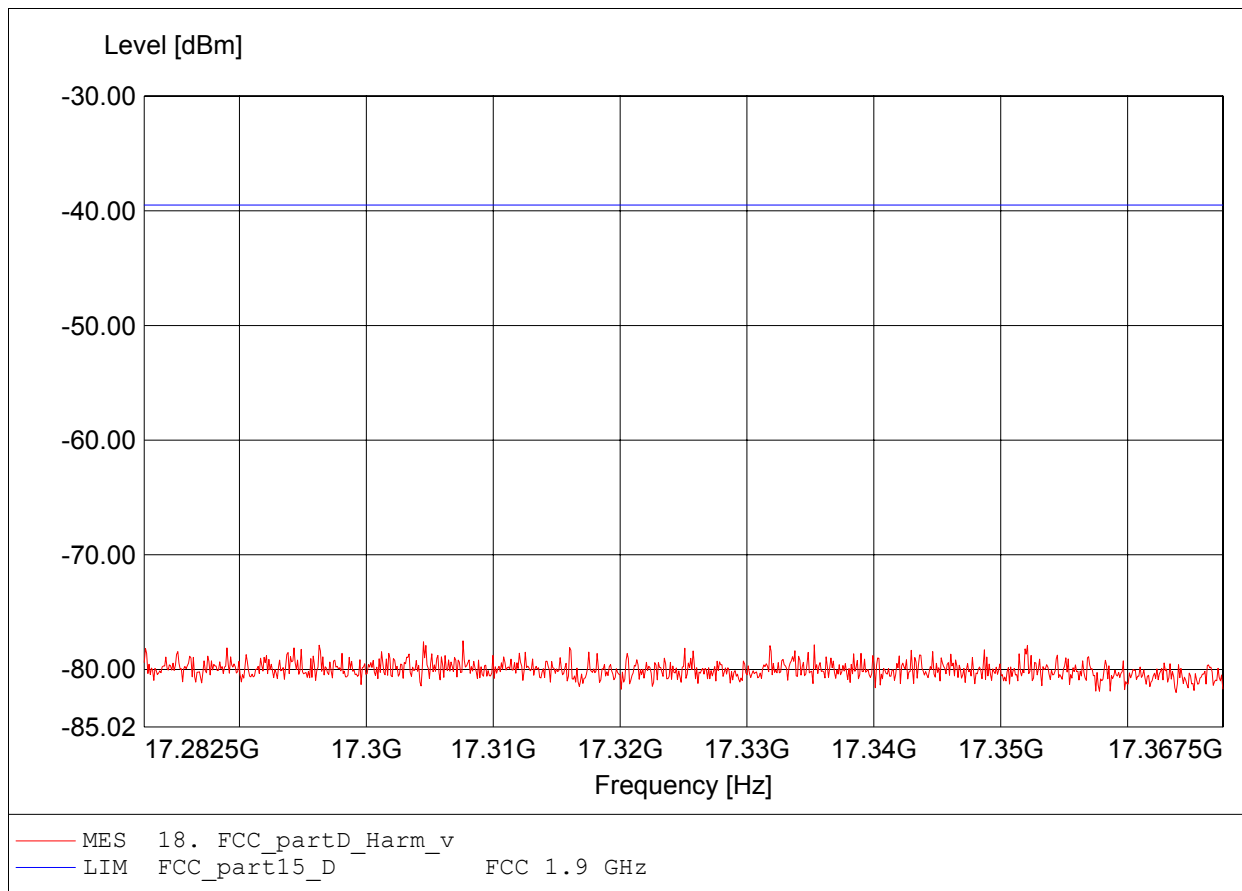

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.340GHz Pmax:-77.84dBm RBW:10 kHz

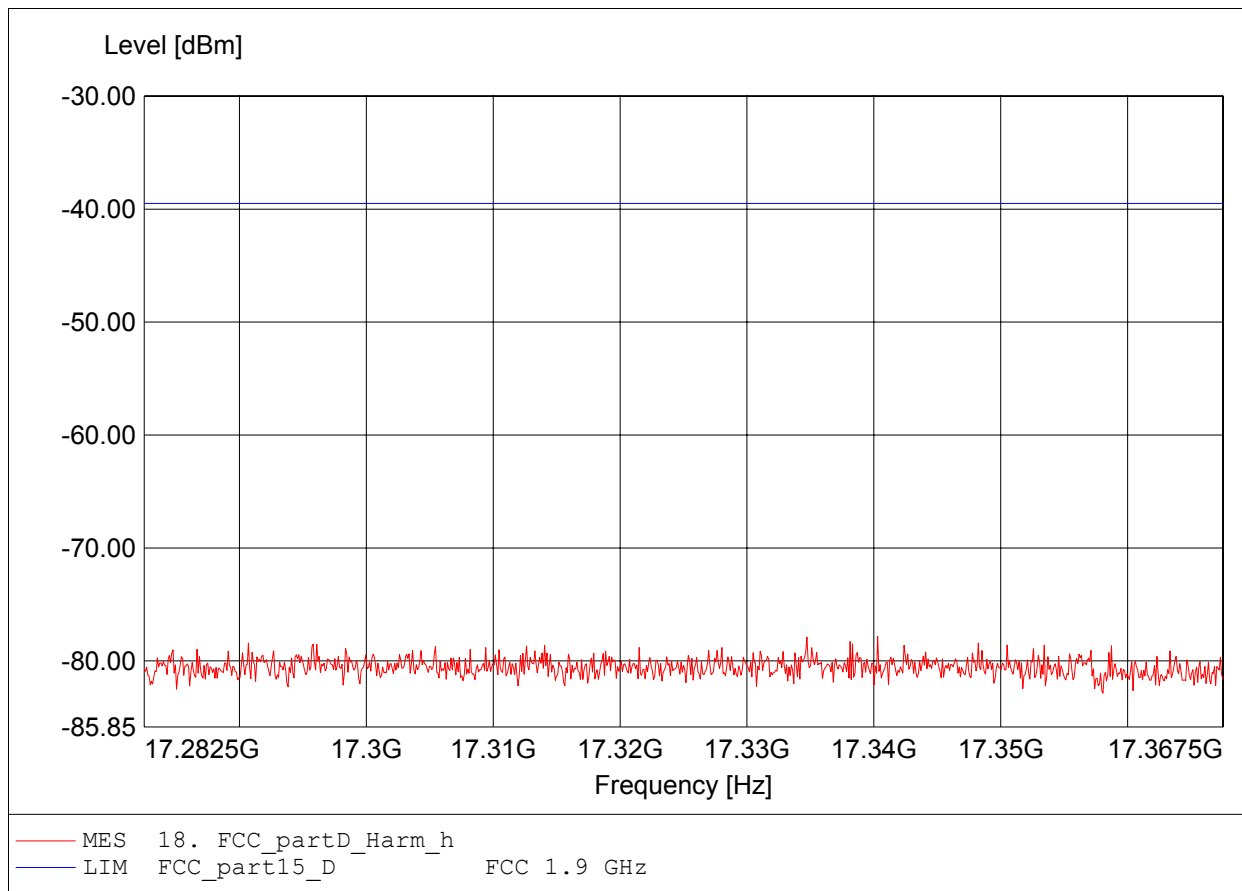

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.264GHz Pmax:-71.51dBm RBW:10 kHz

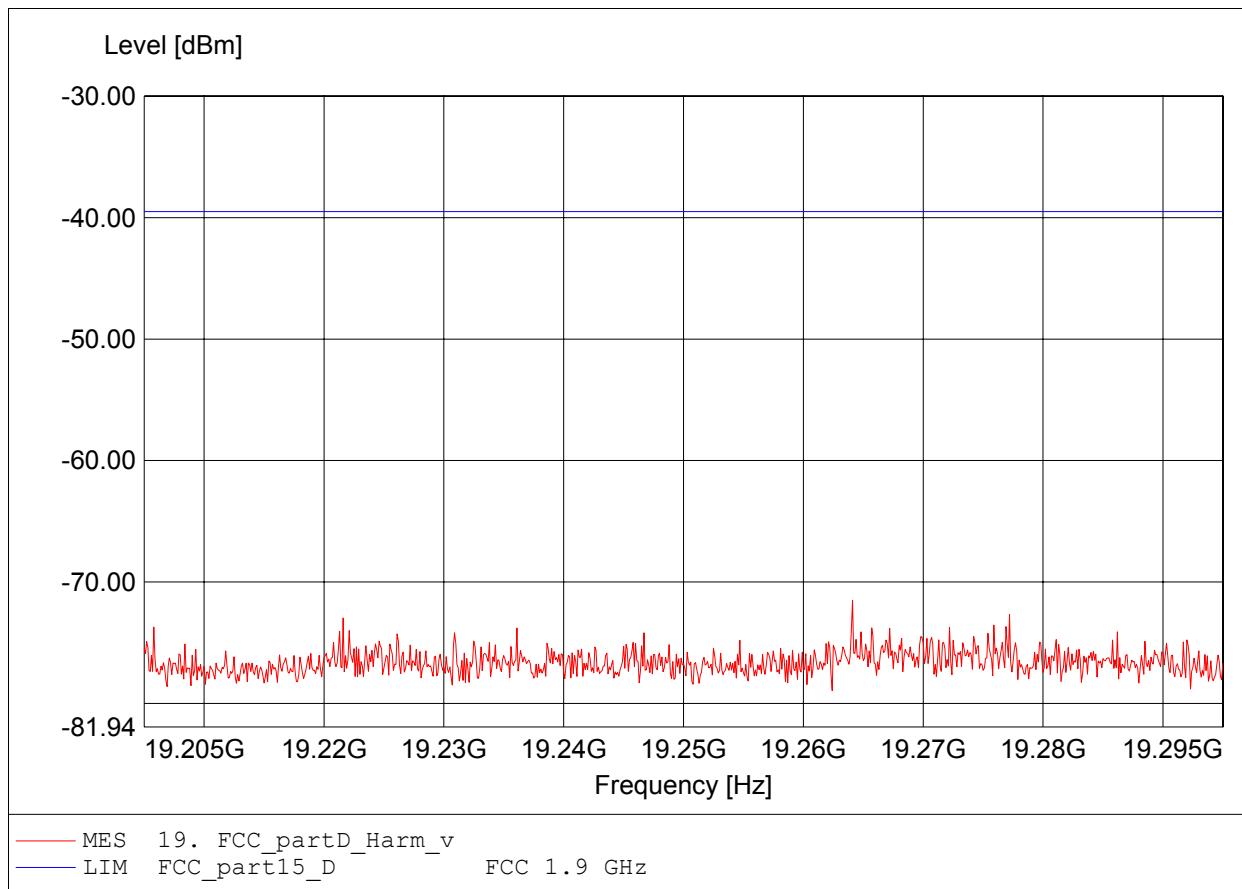

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Approval Holder: POLYCOM KIRK telecom ApS
EUT: 1.9 GHz US DECT FP
Model: RFP12IP (UPCS) / ch.: 0; 4 / antenna 1
Operator: Eurofins ETS Product Service GmbH / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 40 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.271GHz Pmax:-72.19dBm RBW:10 kHz

