




Appendix B

Peak Output Power

Carrier power conducted (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ch.: 0
Manufacturer: Kirk Telecom A/S


Operating Condition: Unom: 30 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to FCC Part 15
Comment 1: Conducted, 50 Ohm Load
Comment 2: Freq:2.401GHz Pmax:25.20 RBW: 3 MHz

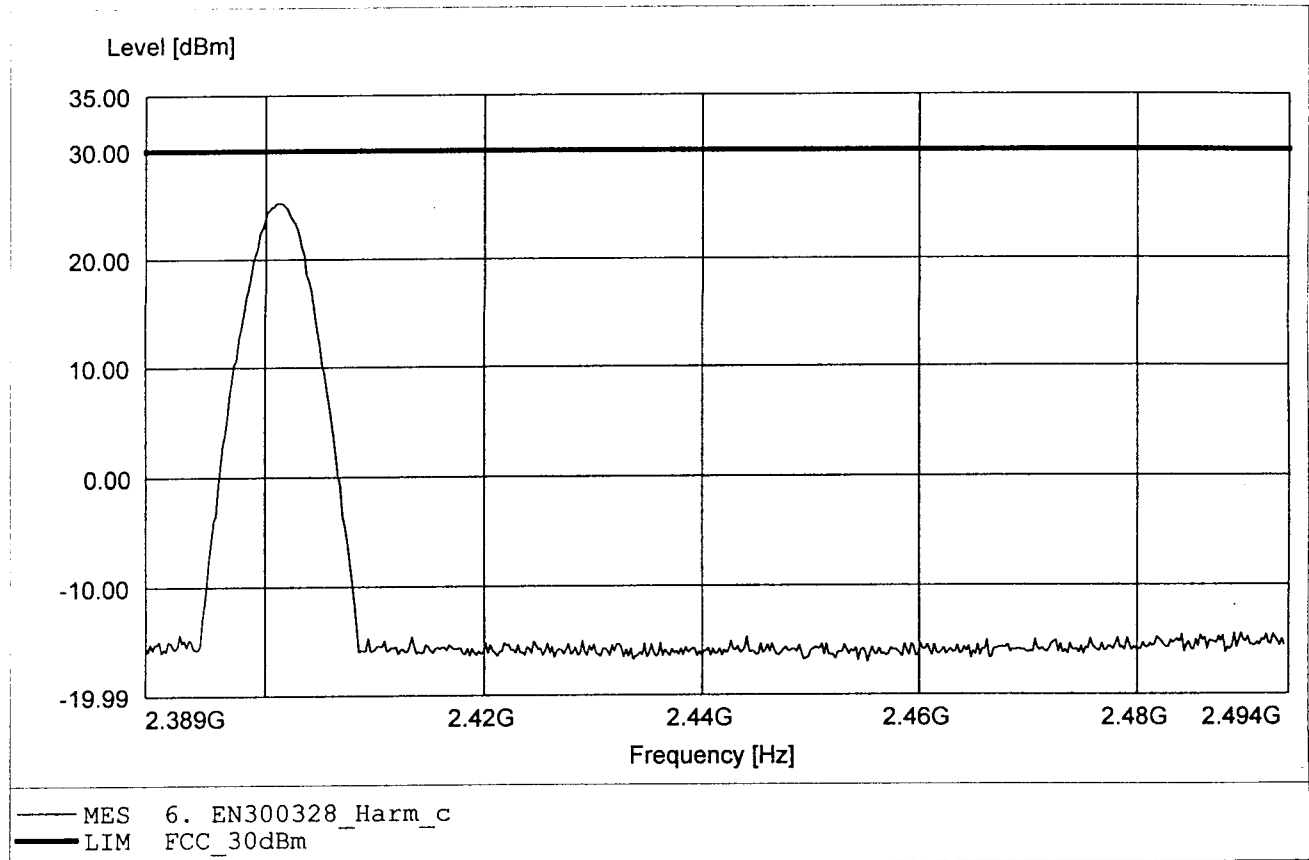

**Carrier power conducted (dBm)
FCC RULES PART 15, SUBPART C**

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ch.: 40
Manufacturer: Kirk Telecom A/S


Operating Condition: Unom: 30 V DC, Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to FCC Part 15
Comment 1: Conducted, 50 Ohm Load
Comment 2: Freq:2.442GHz Pmax:25.28 RBW: 3 MHz

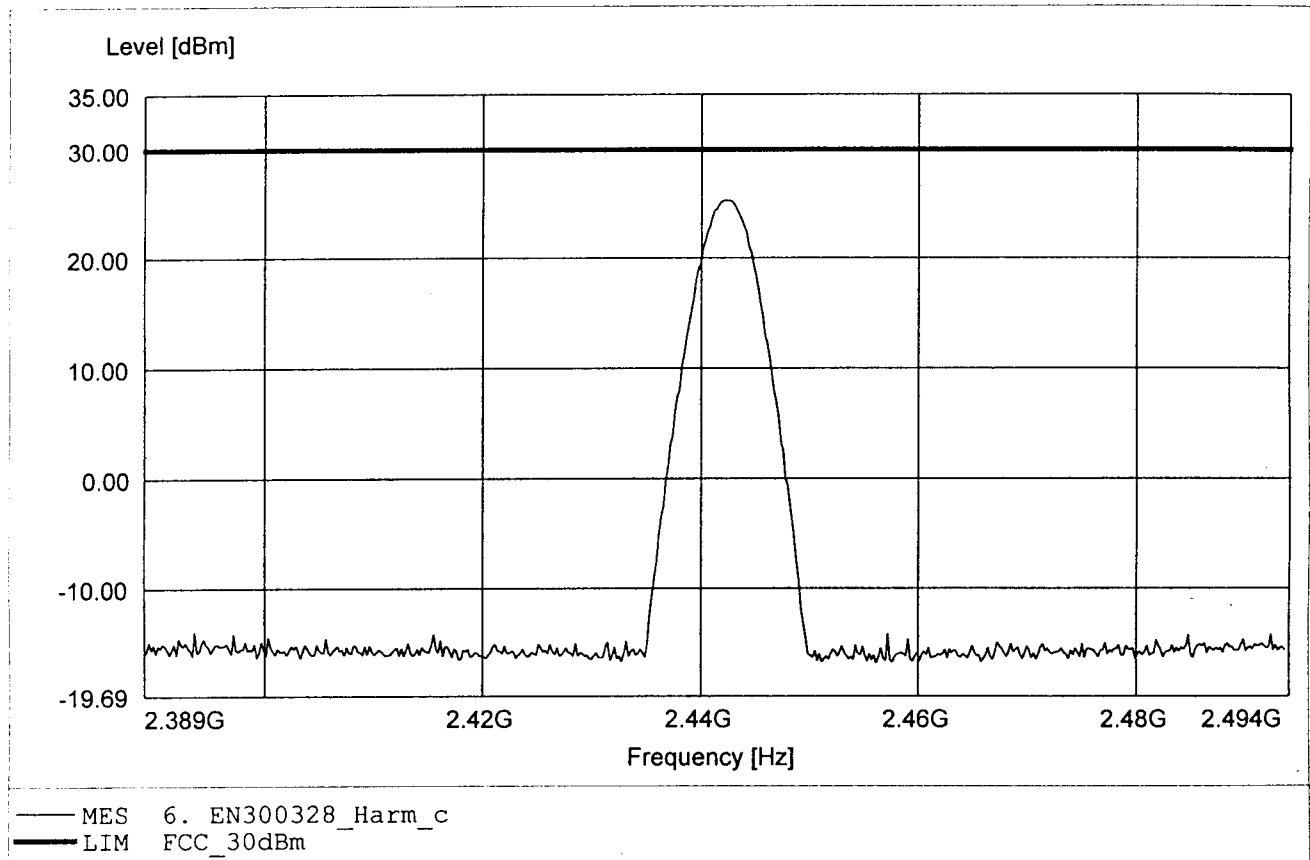

**Carrier power conducted (dBm)
FCC RULES PART 15, SUBPART C**

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ch.: 78
Manufacturer: Kirk Telecom A/S


Operating Condition: Unom: 30 V DC, Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to FCC Part 15
Comment 1: Conducted, 50 Ohm Load
Comment 2: Freq:2.481GHz Pmax:24.89 RBW: 3 MHz

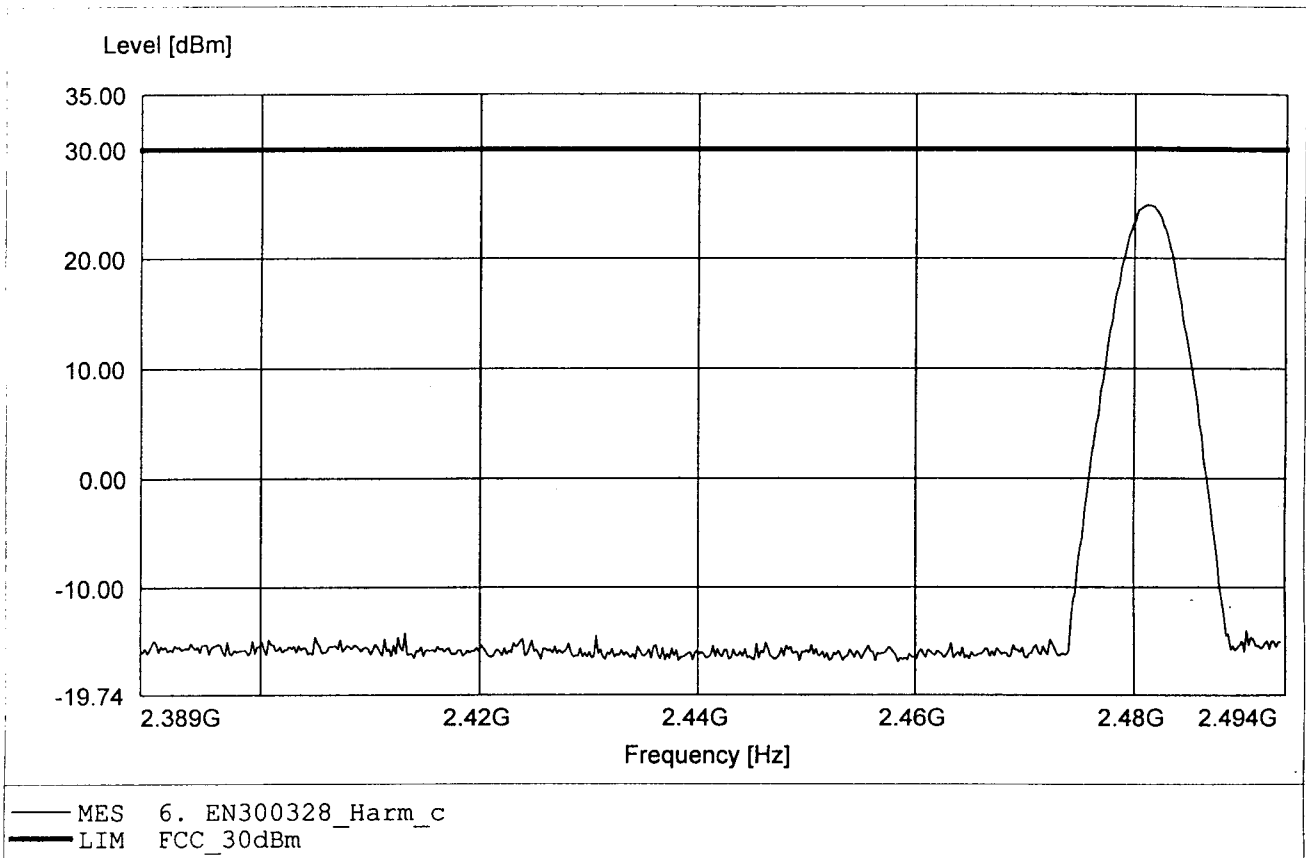

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2401,66MHz Pmax:21,06dBm RBW:4MHz

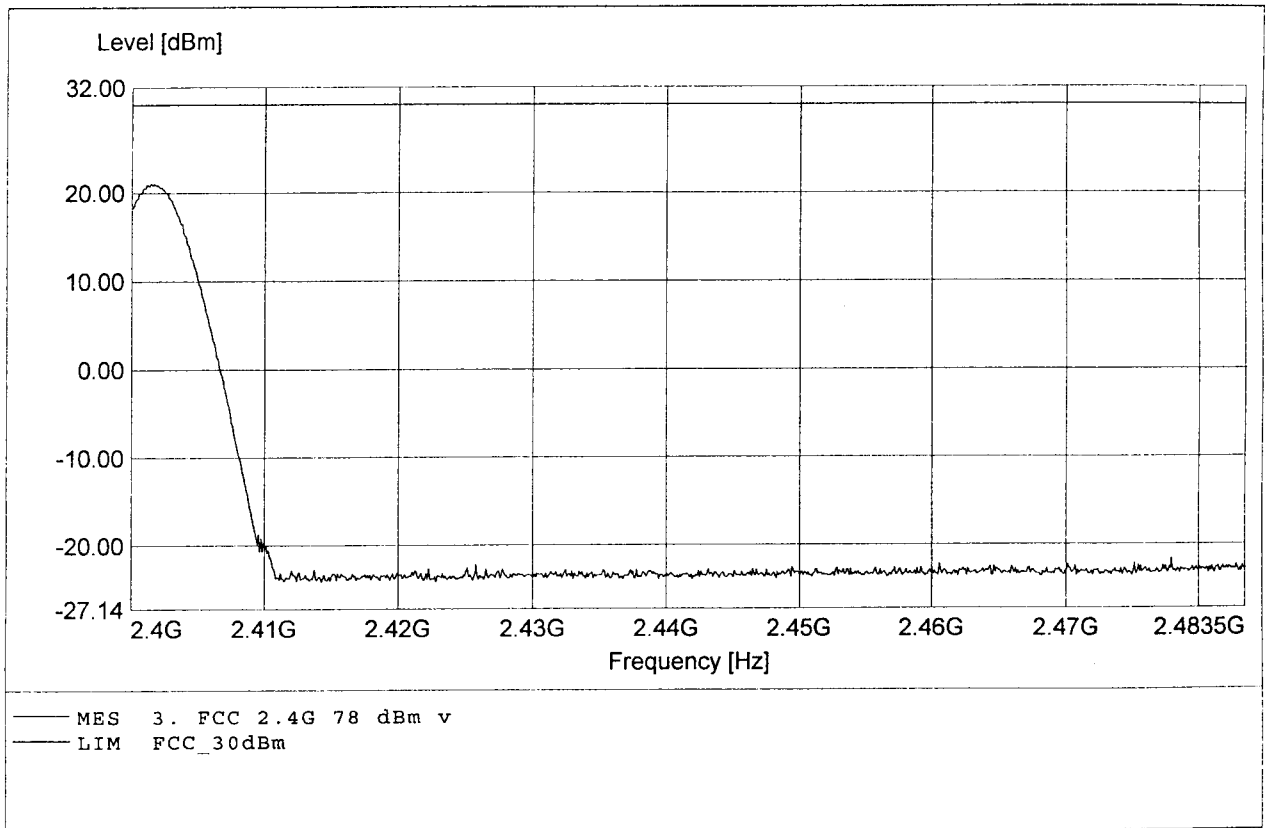

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2401,66MHz Pmax:25,39dBm RBW:4MHz

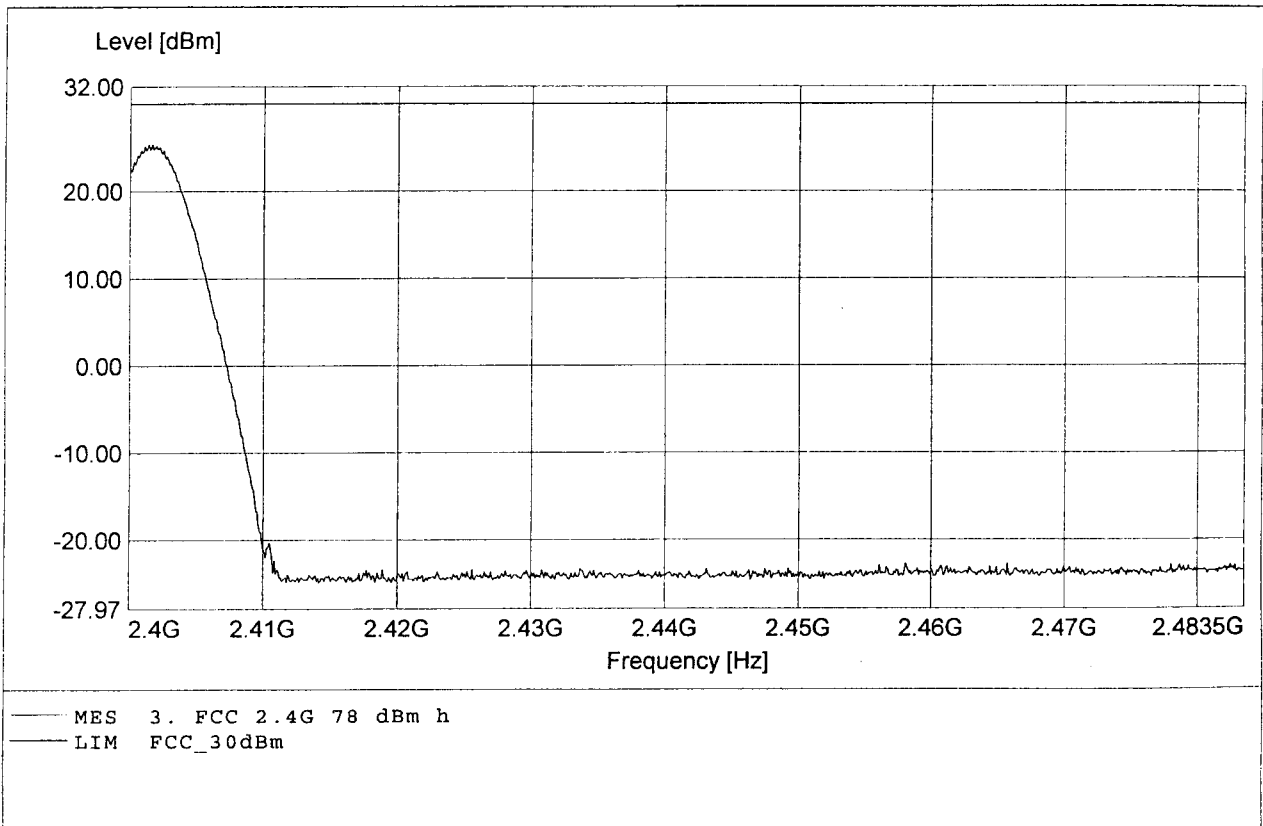

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2401,11MHz Pmax:23,73dBm RBW:4MHz

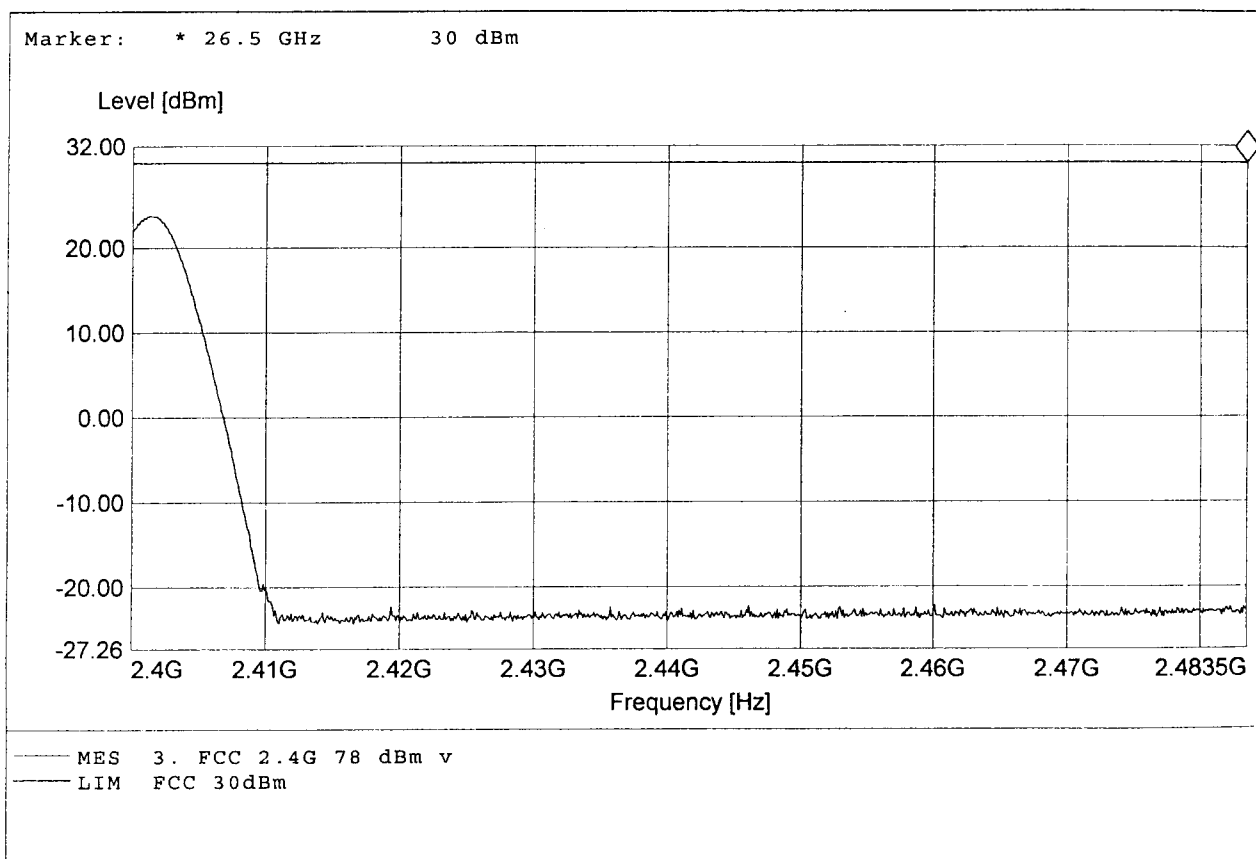

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2401,29MHz Pmax:27,06dBm RBW:4MHz

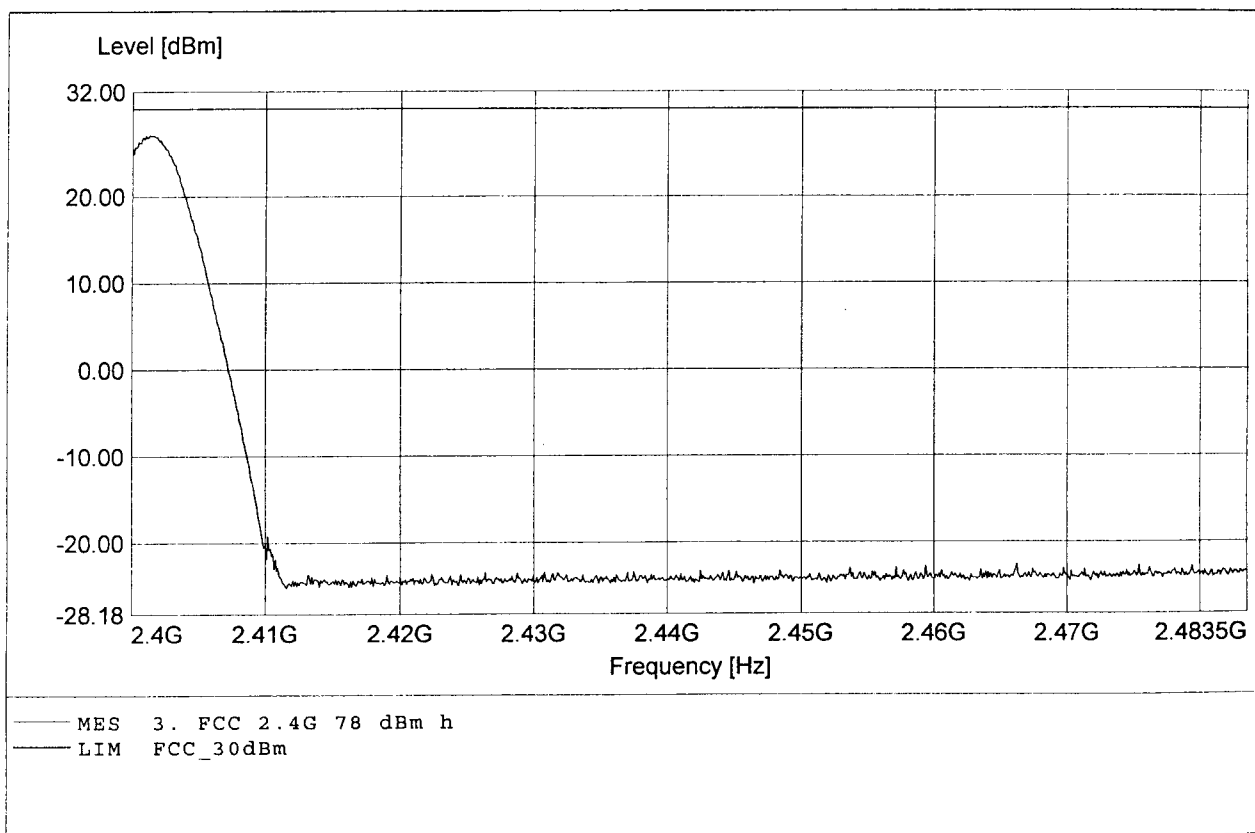

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,86MHz Pmax:21,94dBm RBW:4MHz

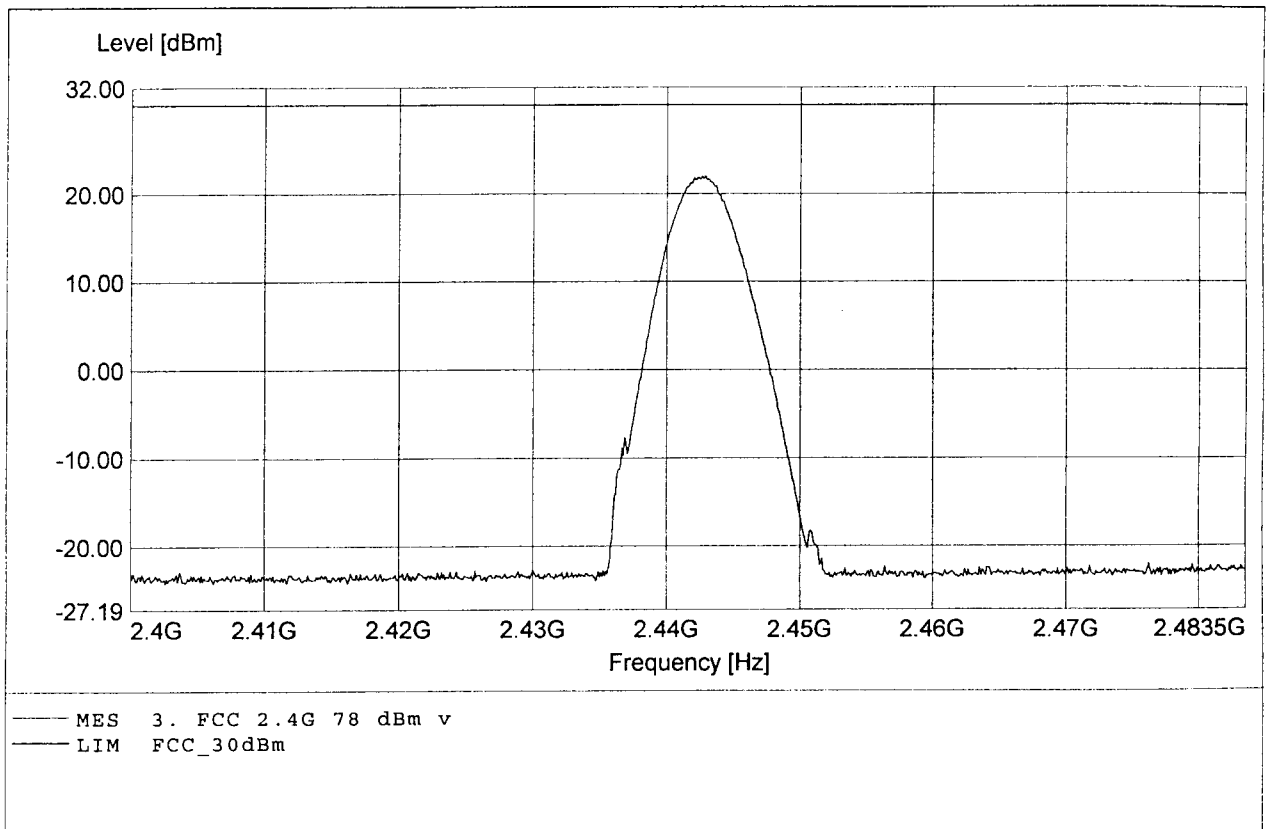

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,77MHz Pmax:24,31dBm RBW:4MHz

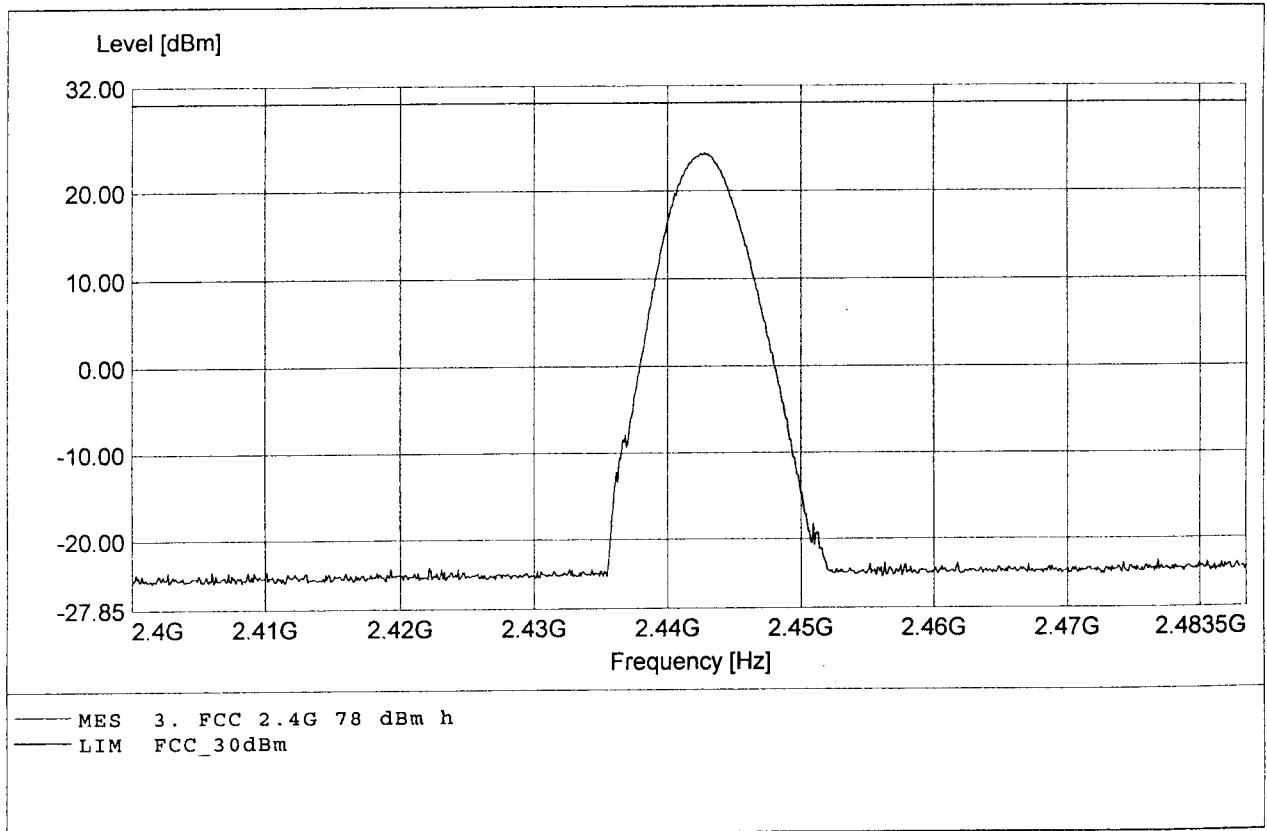

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,77MHz Pmax:23,06dBm RBW:4MHz

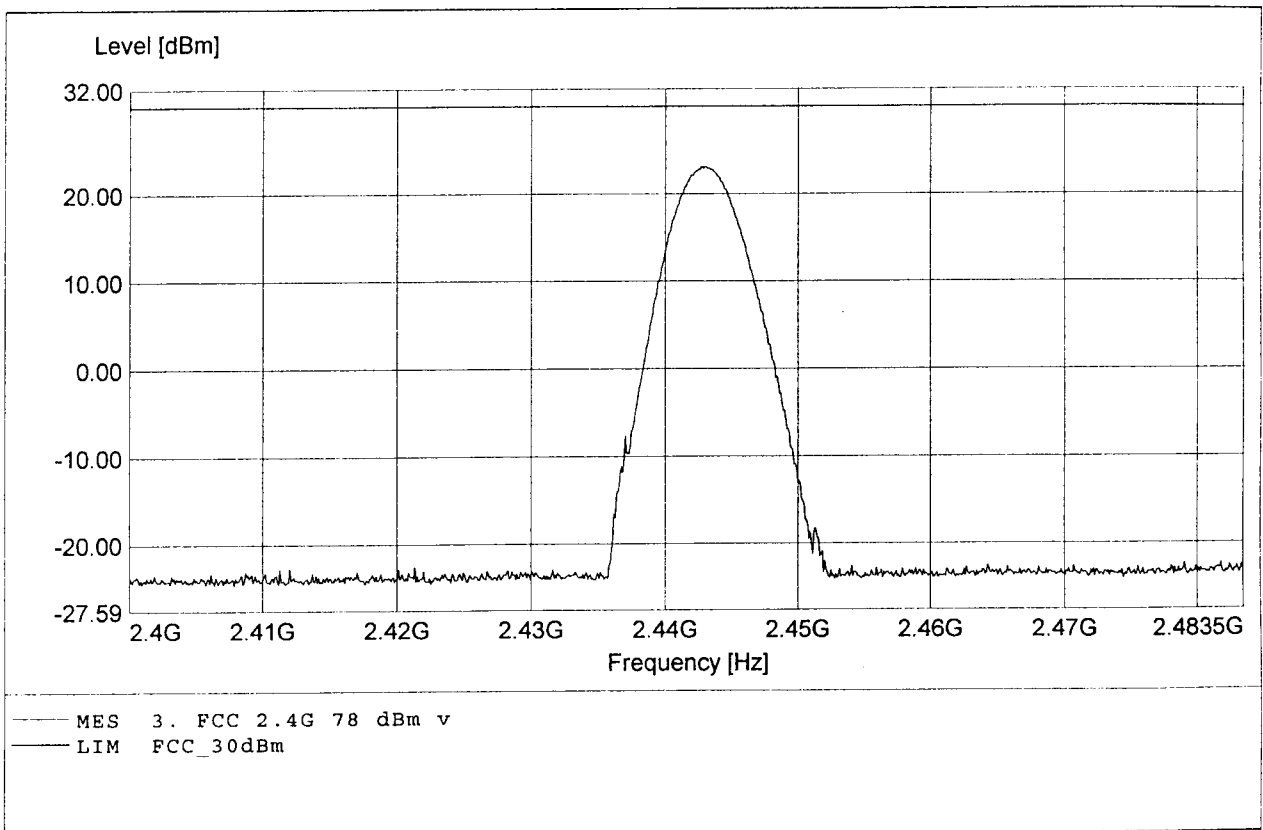

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2442,86MHz Pmax:26,87dBm RBW:4MHz

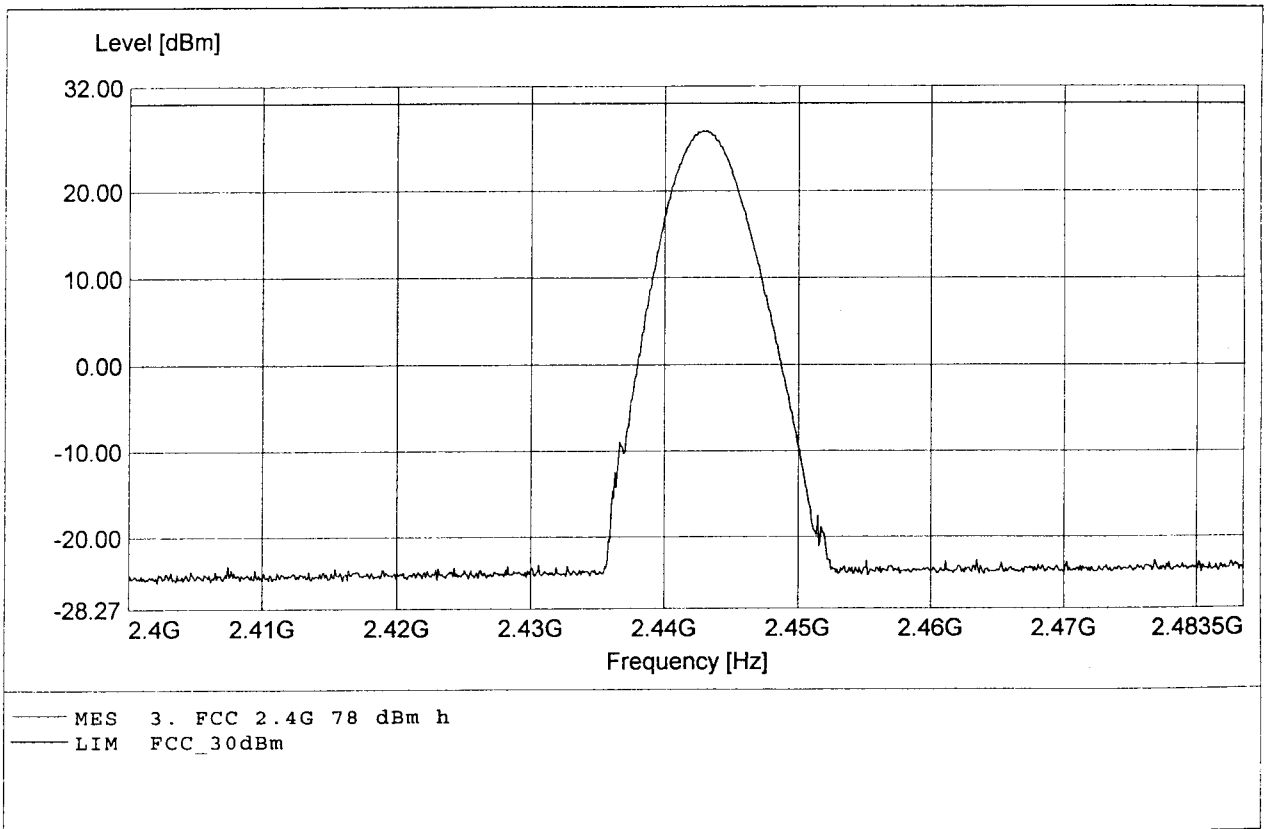

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,73MHz Pmax:23,67dBm RBW:4MHz

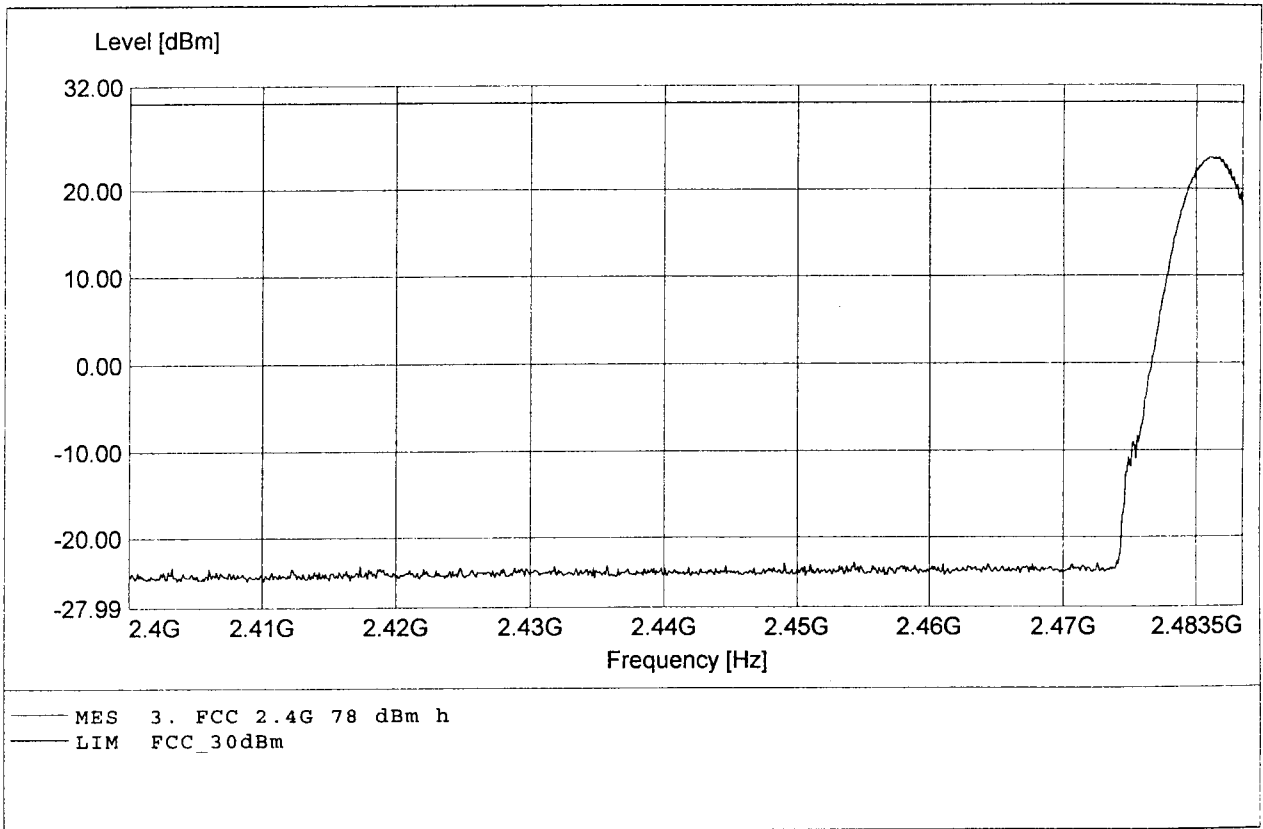

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,36MHz Pmax:22,35dBm RBW:4MHz

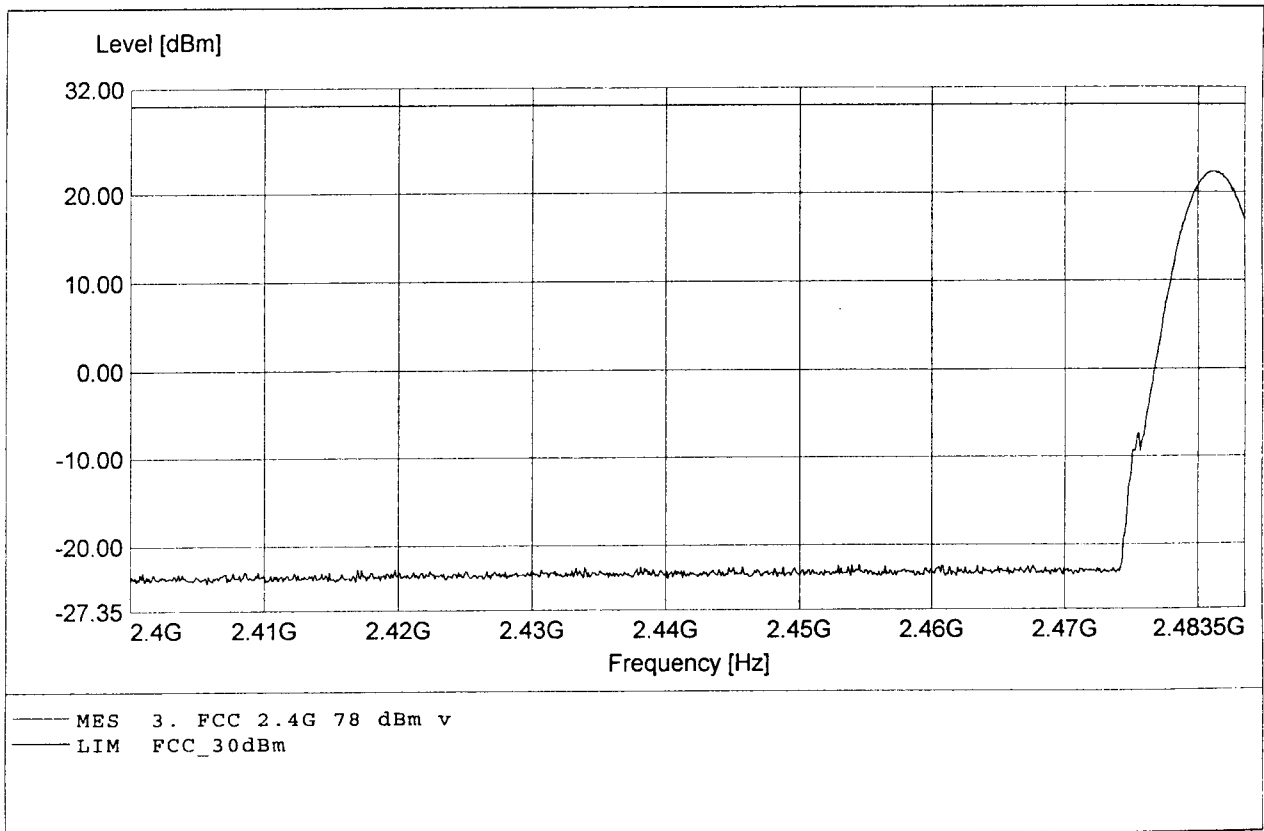

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,36MHz Pmax:24,13dBm RBW:4MHz

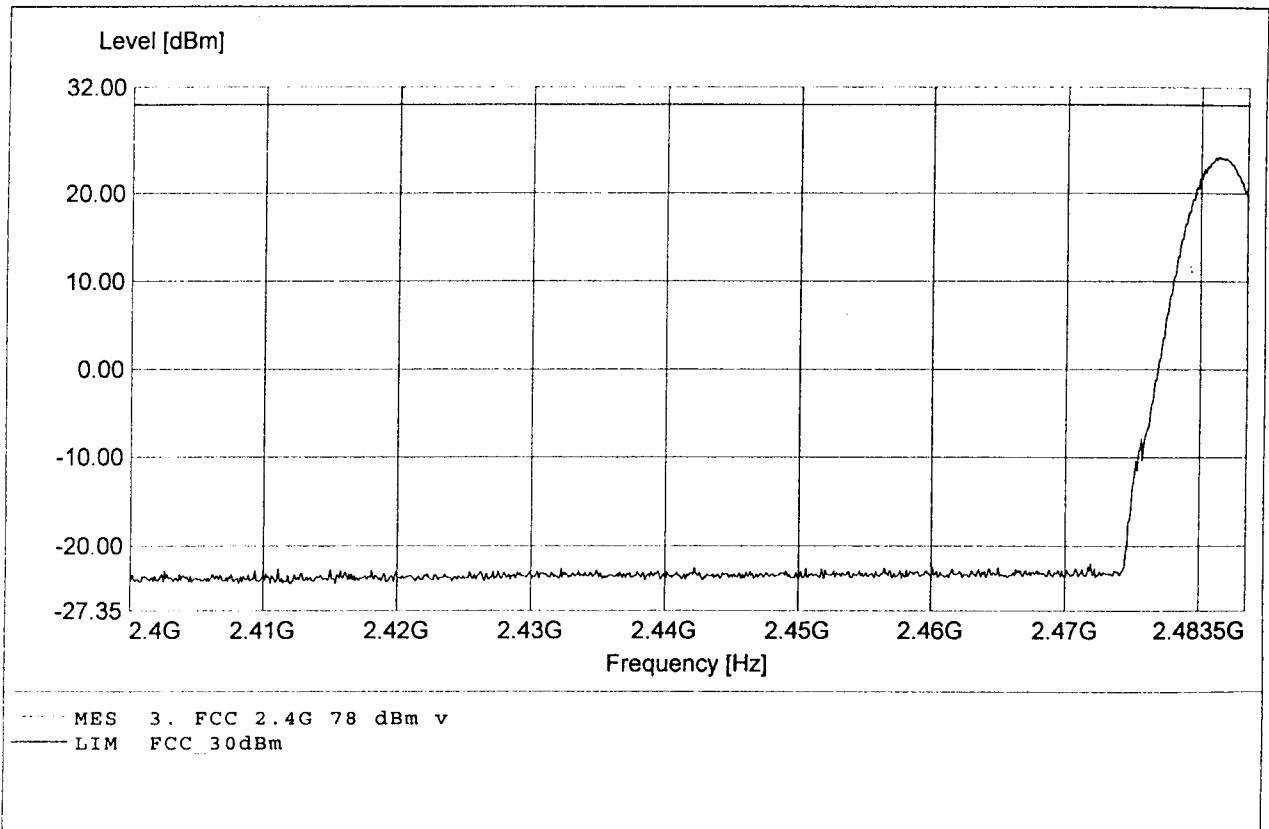

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,55MHz Pmax:26,64dBm RBW:4MHz

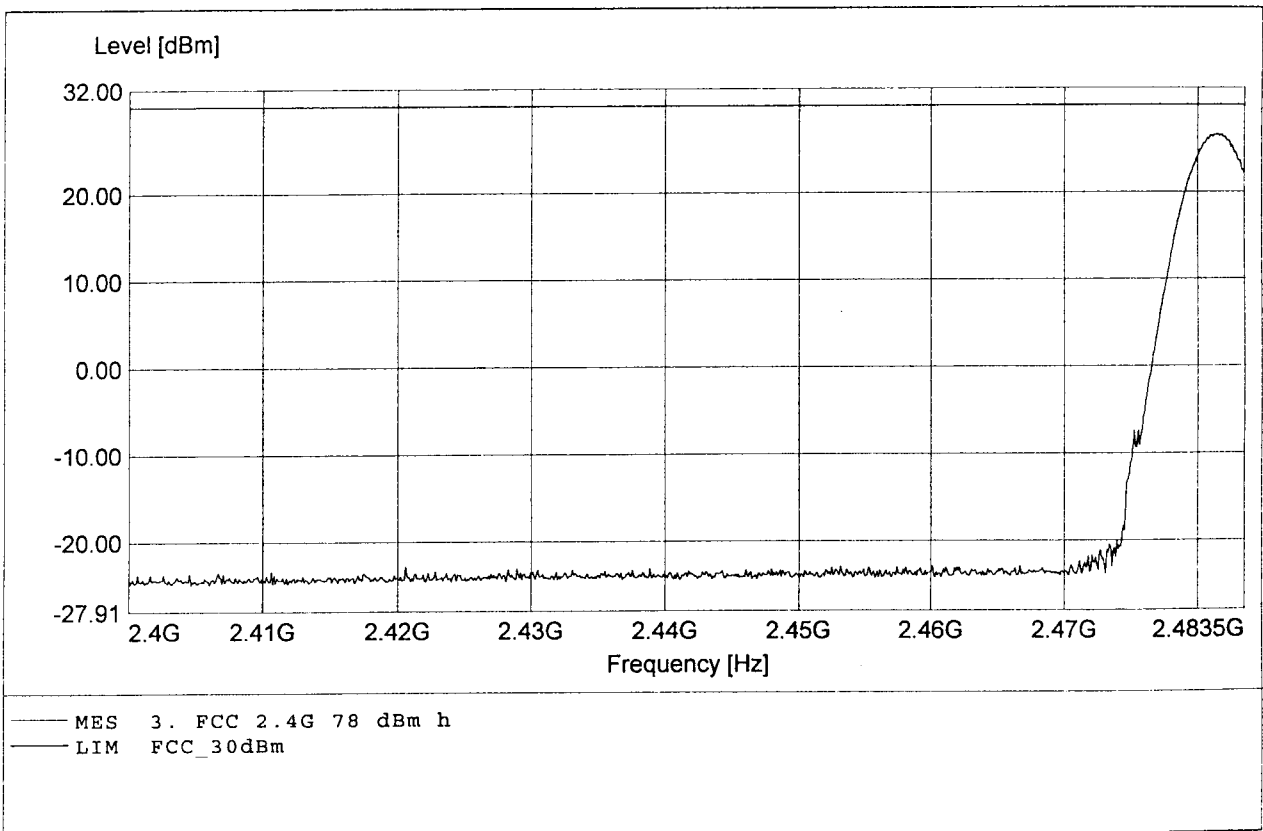

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.0
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:20.60dBm RBW: 5 MHz

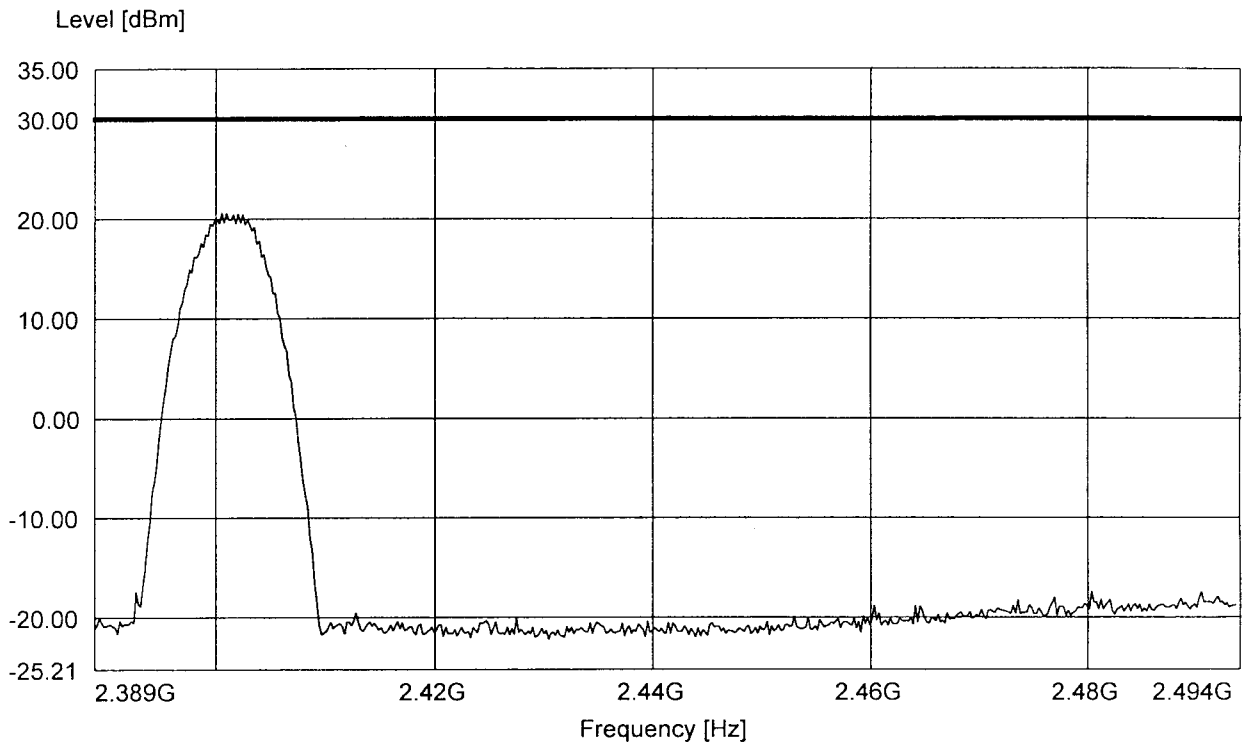


— MES 10. FCC_2.4G_dBm_v
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.0
Manufacturer: Kirk Telecom A/S


Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:26.69dBm RBW: 5 MHz

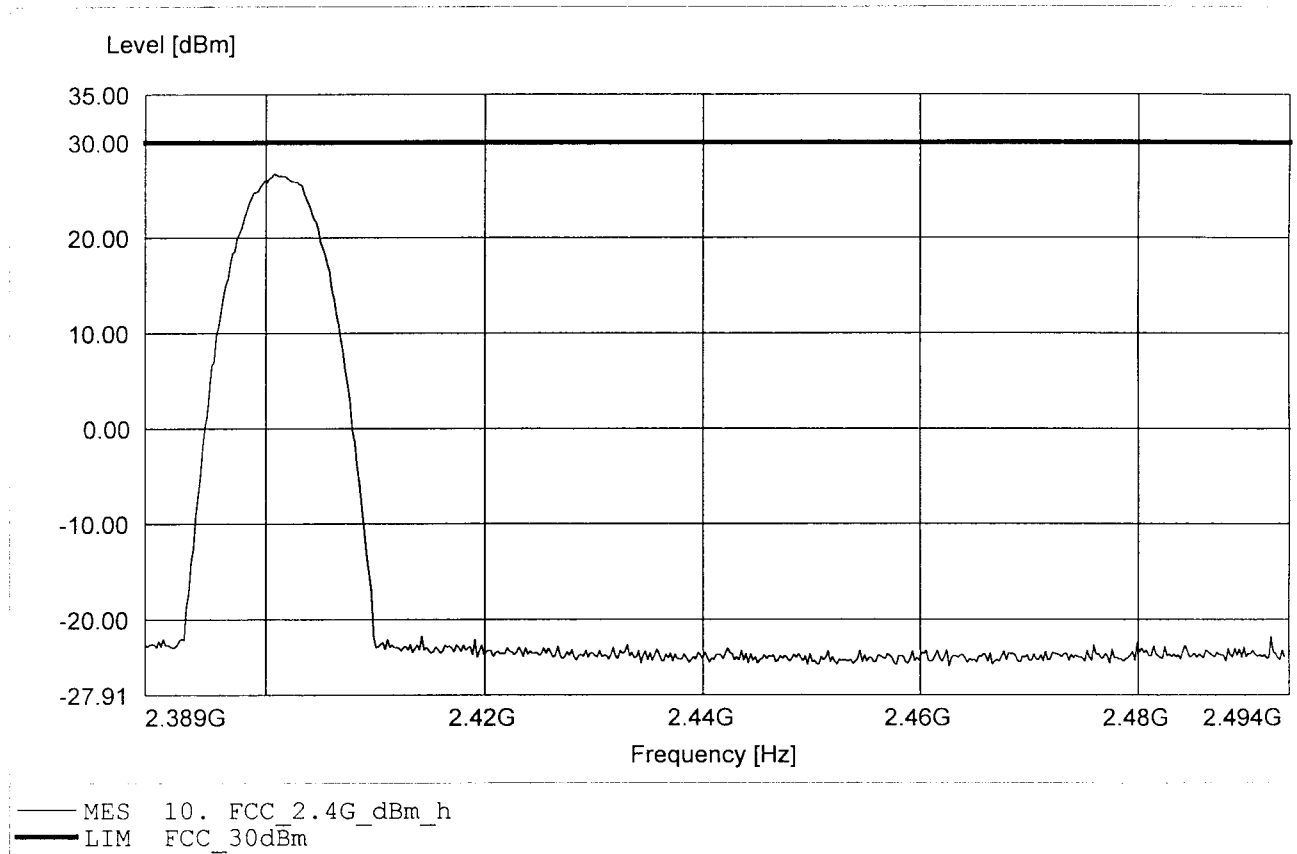

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.0
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:+15% 34.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:20.99dBm RBW: 5 MHz

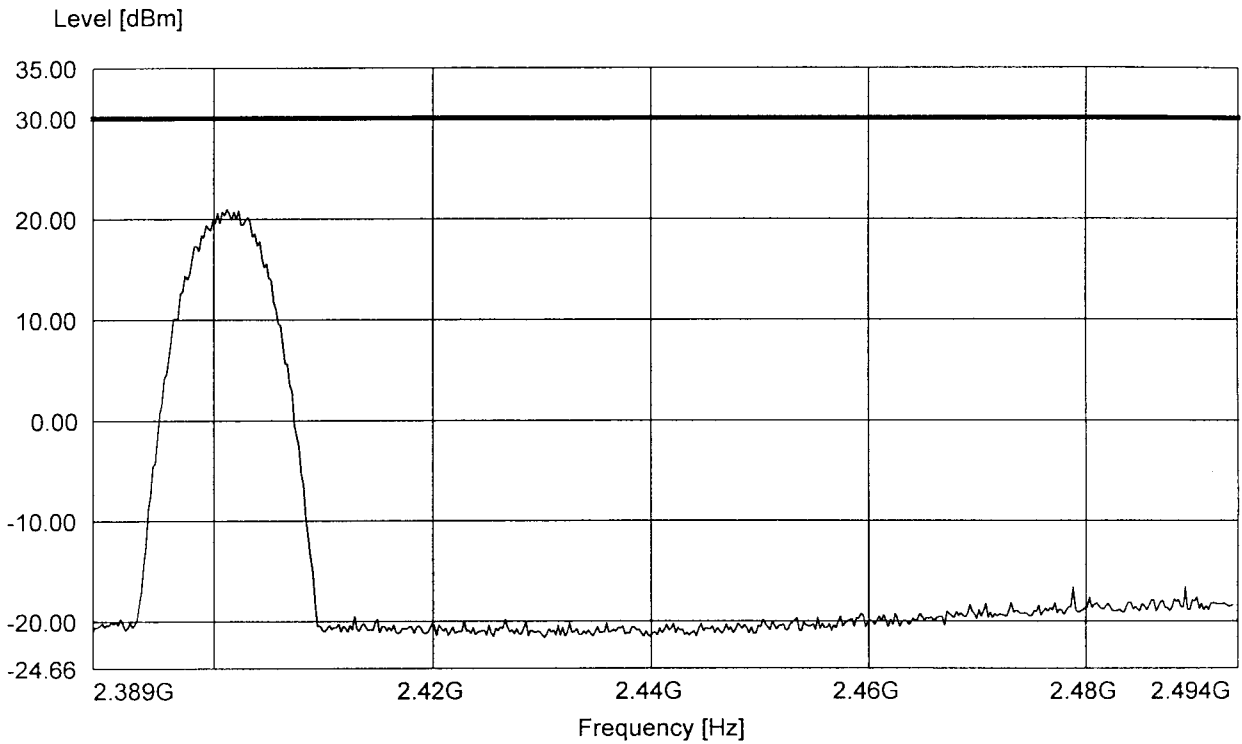


— MES 10. FCC 2.4G_dBm_v
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.0
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:+15% 34.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:26.75dBm RBW: 5 MHz

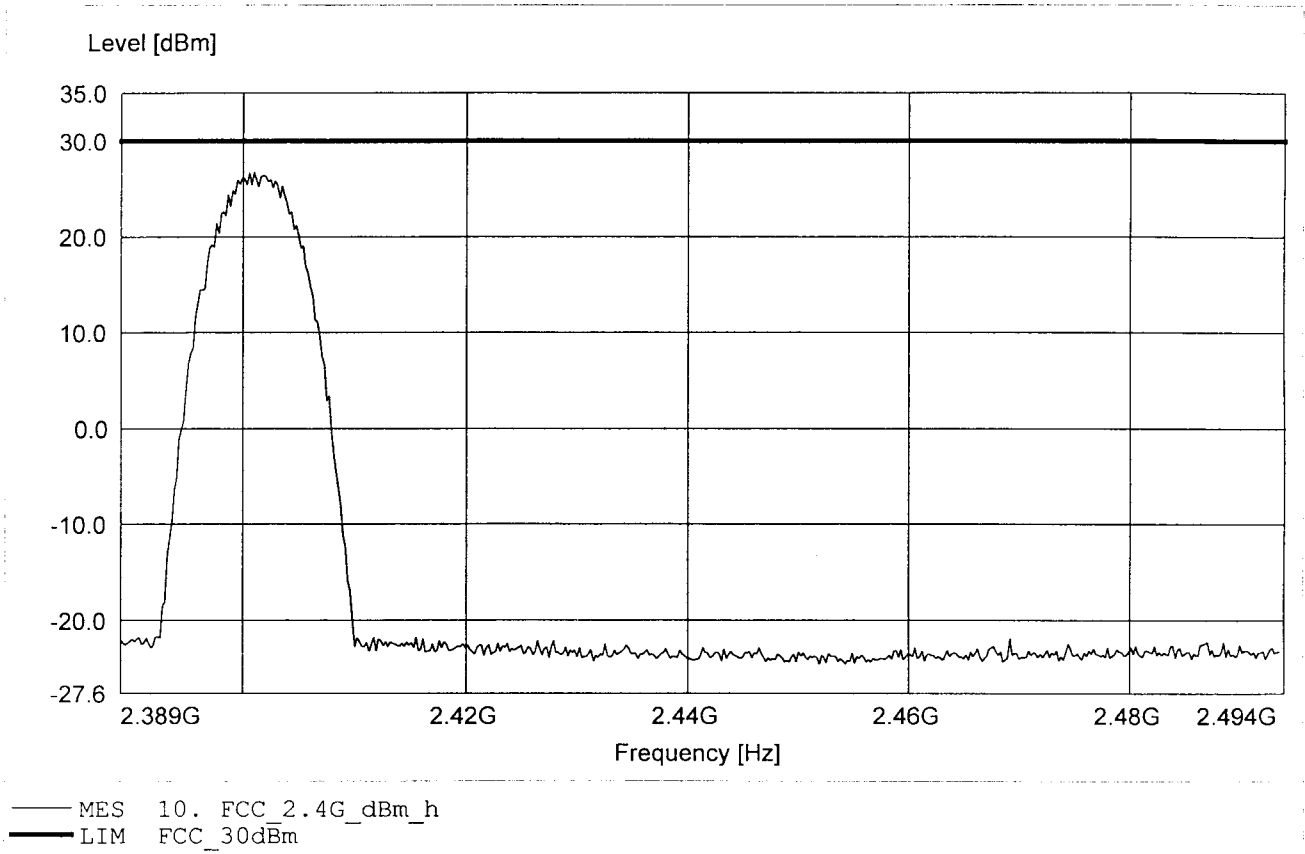

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.0
Manufacturer: Kirk Telecom A/S


Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C

Test Site / Operator: ETS / Mr. Treffke

Test Specification: according to S15247 / mode: Tx

Comment 1: Dist.: 3m, Ant.: BBHA9120D


Comment 2: Freq:2.401GHz Pmax:23.41dBm RBW: 5 MHz

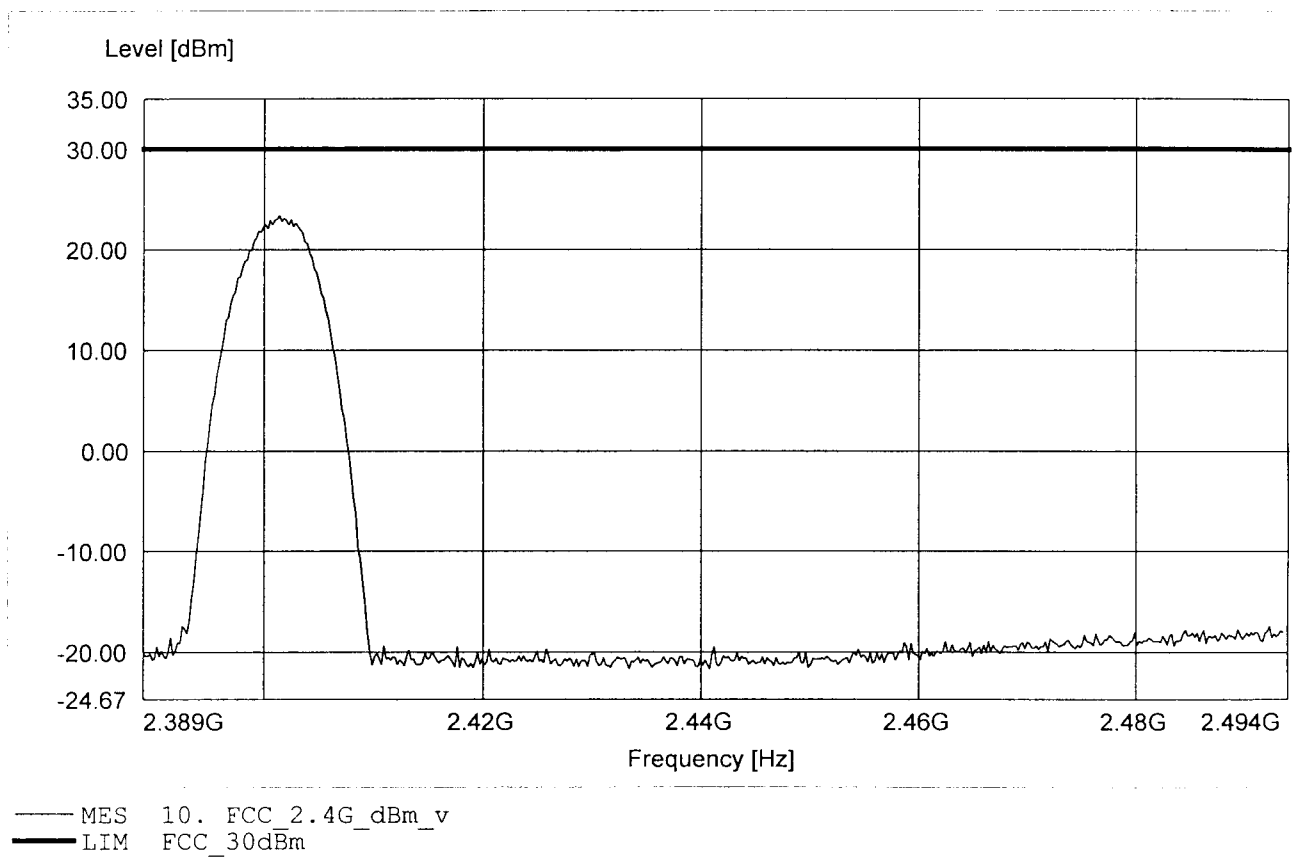

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.0
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:27.15dBm RBW: 5 MHz

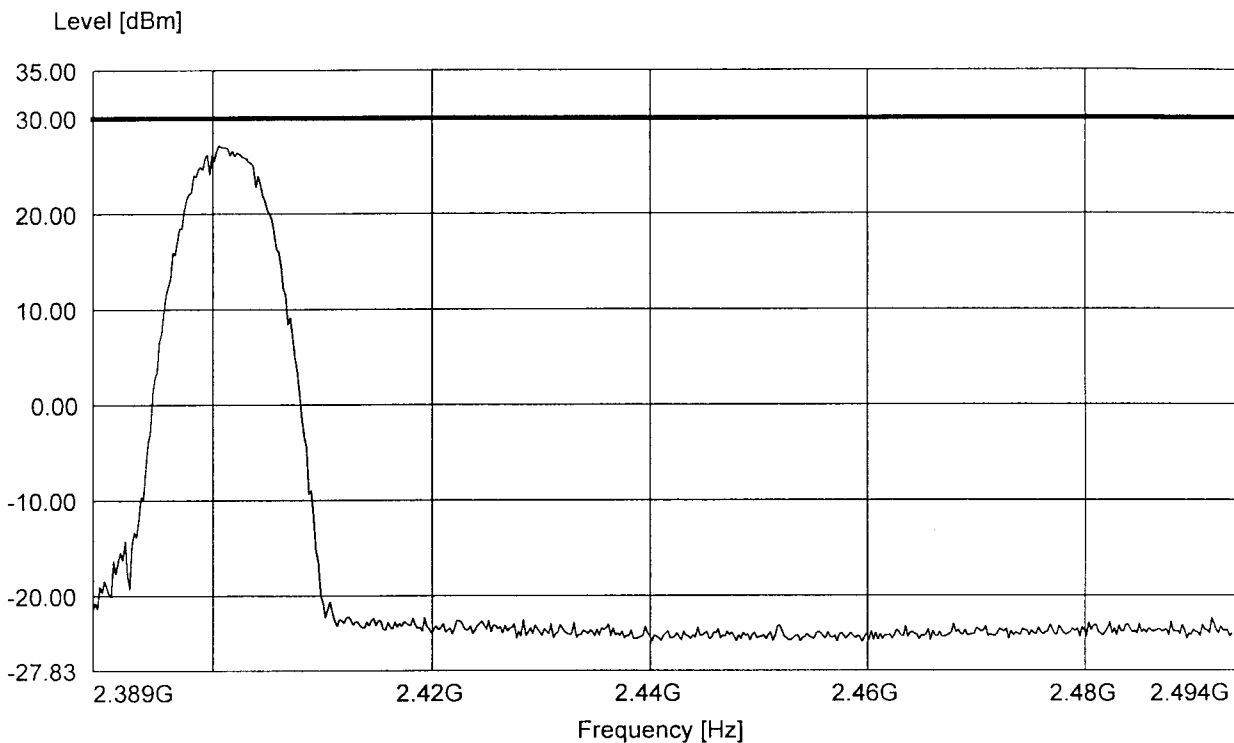


— MES 10. FCC_2.4G_dBm_h
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.0
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:+15% 34.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.401GHz Pmax:22.93dBm RBW: 5 MHz

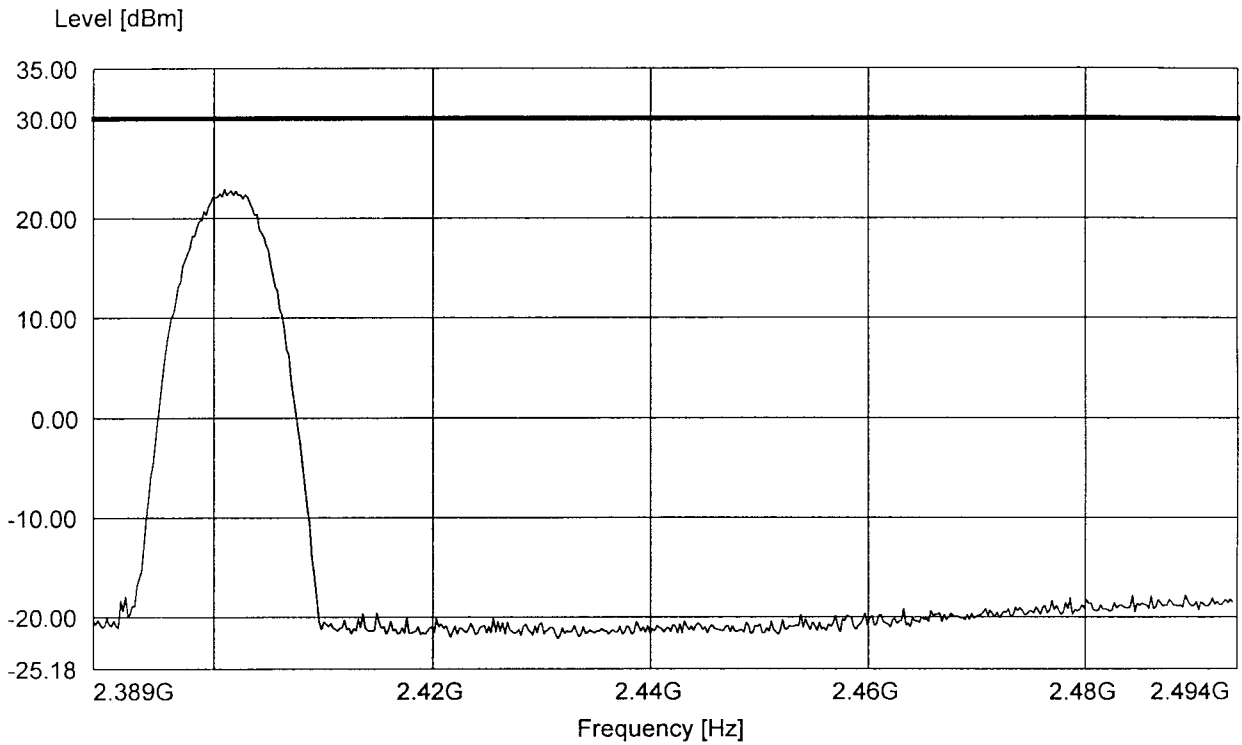


— MES 10. FCC 2.4G_dBm_v
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.0
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:+15% 34.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.400GHz Pmax:27.22dBm RBW: 5 MHz

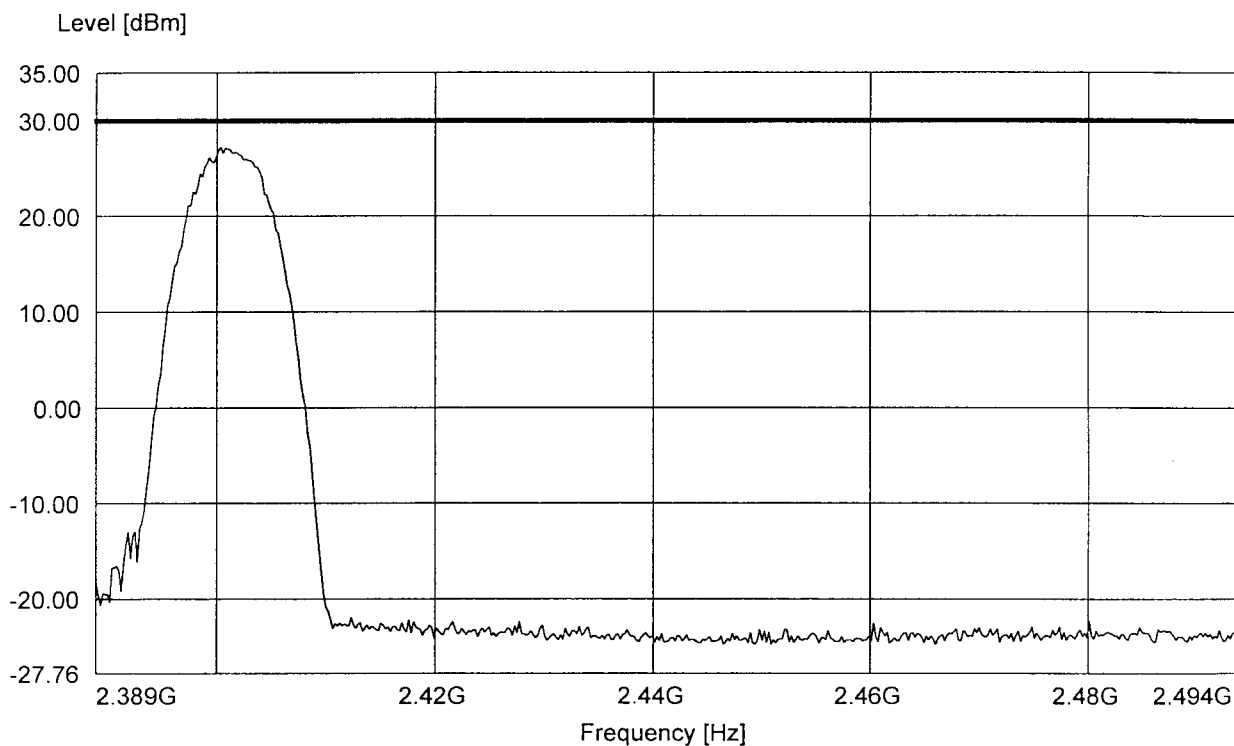


— MES 10. FCC_2.4G_dBm_h
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.40
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:+15% 34.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.443GHz Pmax:21.35dBm RBW: 5 MHz

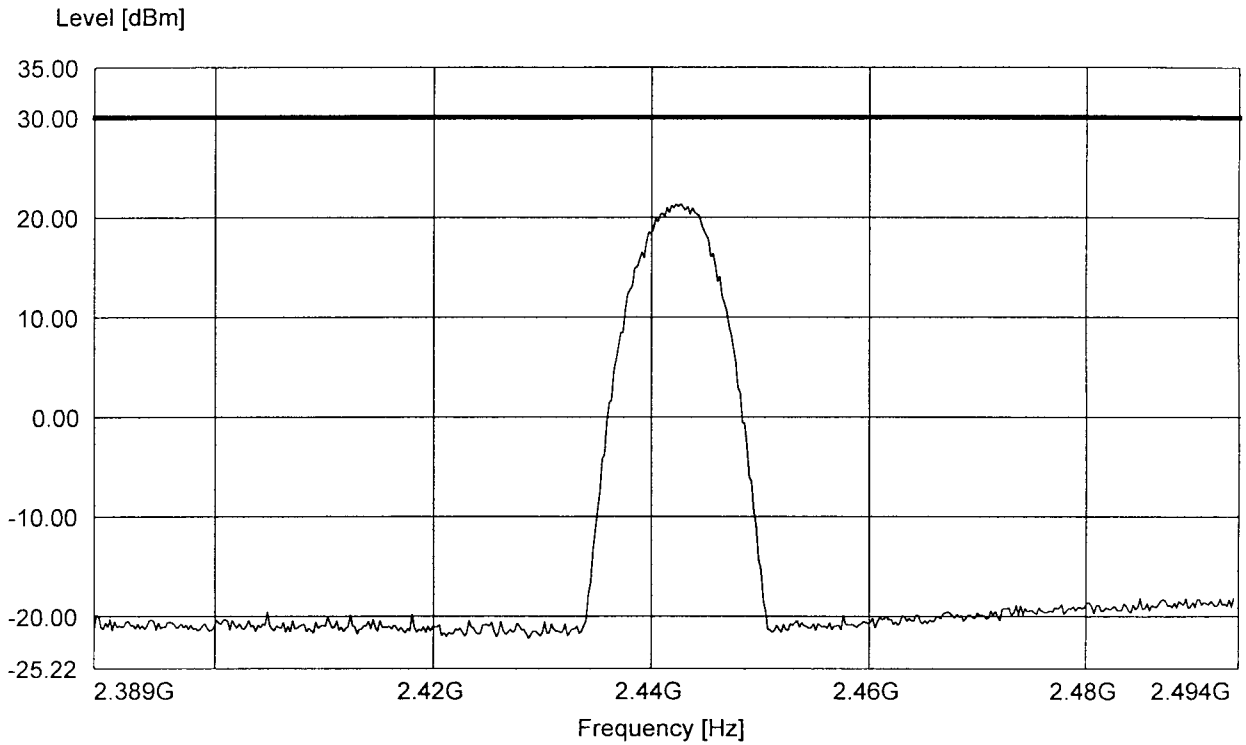


— MES 10. FCC 2.4G_dBm_v
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.40
Manufacturer: Kirk Telecom A/S


Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:23.37dBm RBW: 5 MHz

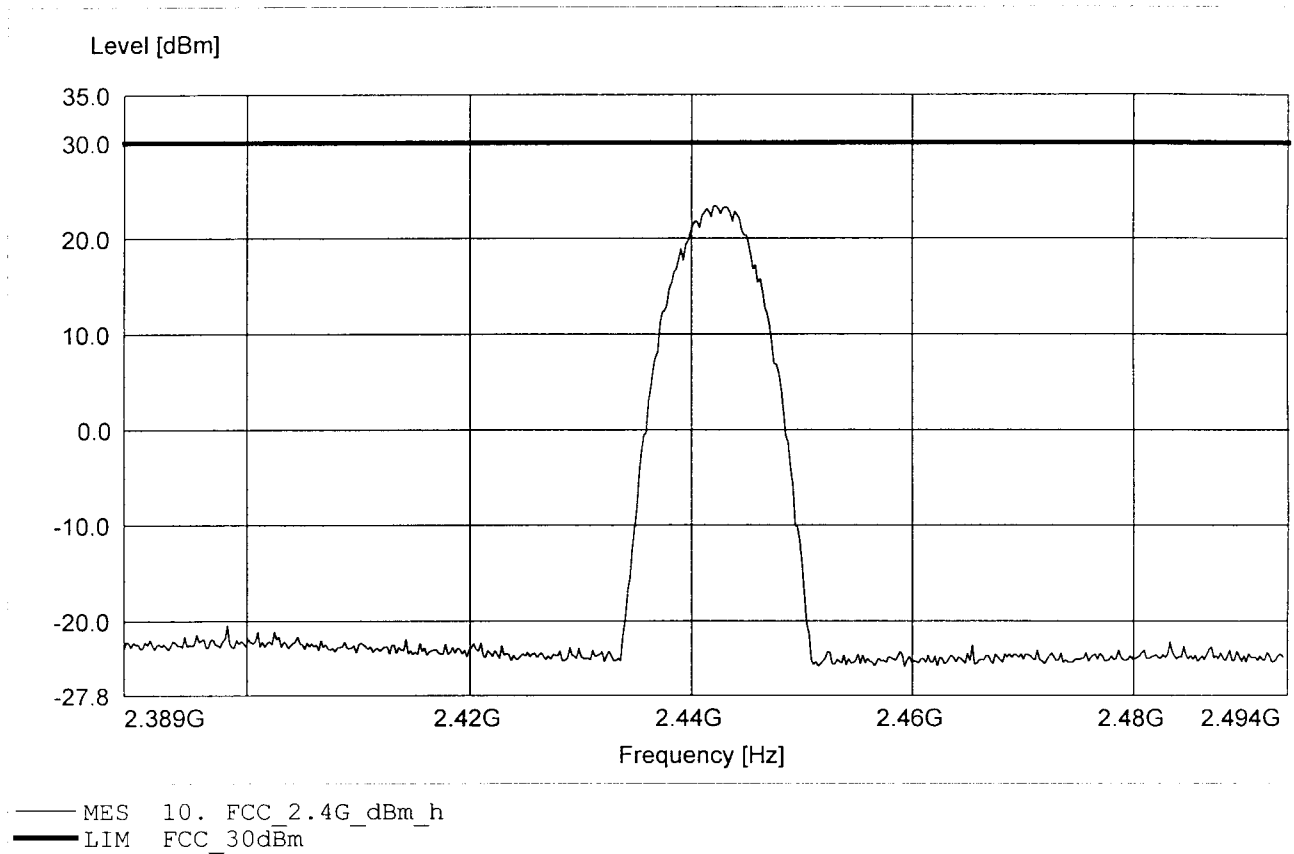

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.40
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.443GHz Pmax:21.35dBm RBW: 5 MHz

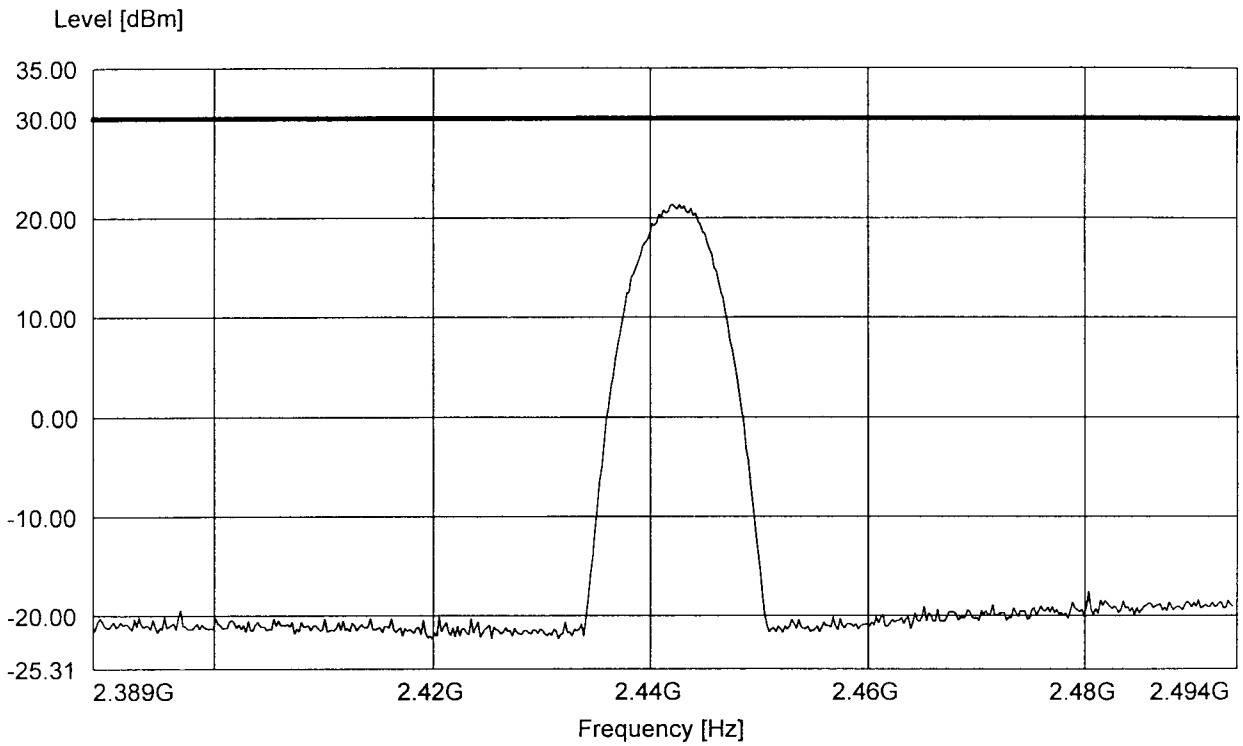


— MES 10. FCC 2.4G_dBm_v
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.0
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:23.51dBm RBW: 5 MHz

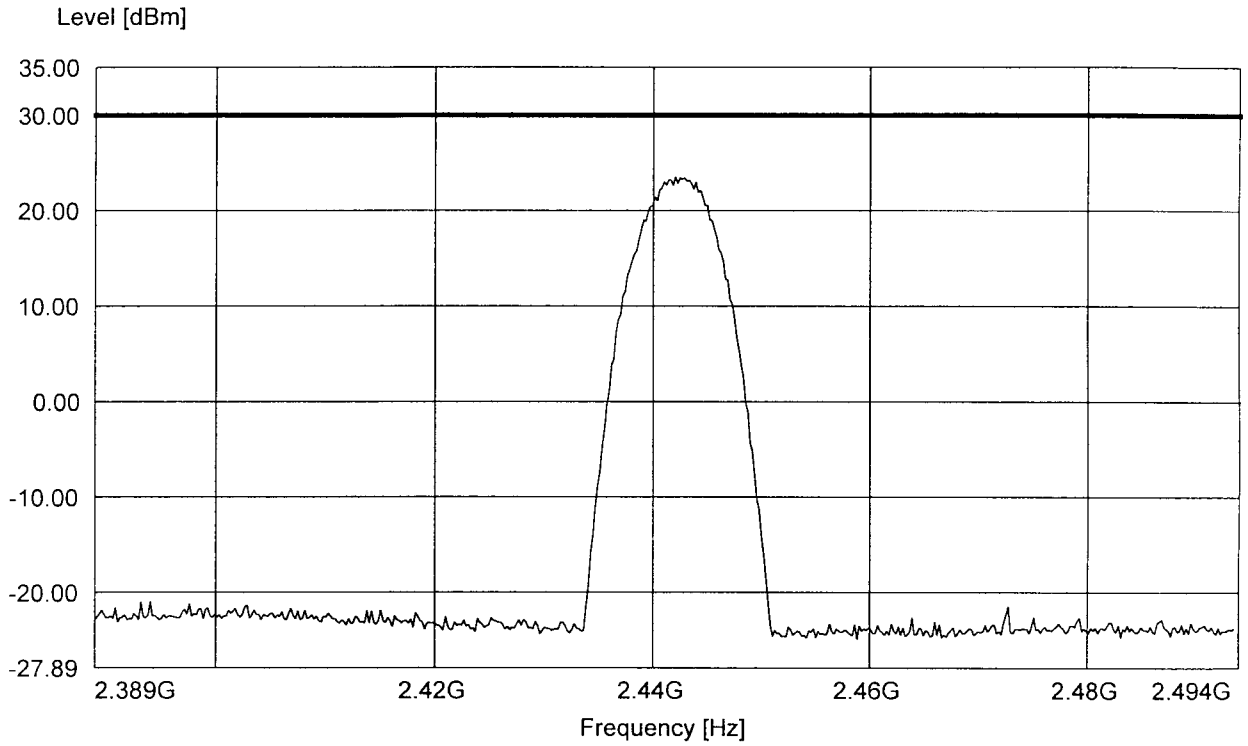


— MES 10. FCC 2.4G_dBm_h
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.40
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.443GHz Pmax:22.53dBm RBW: 5 MHz

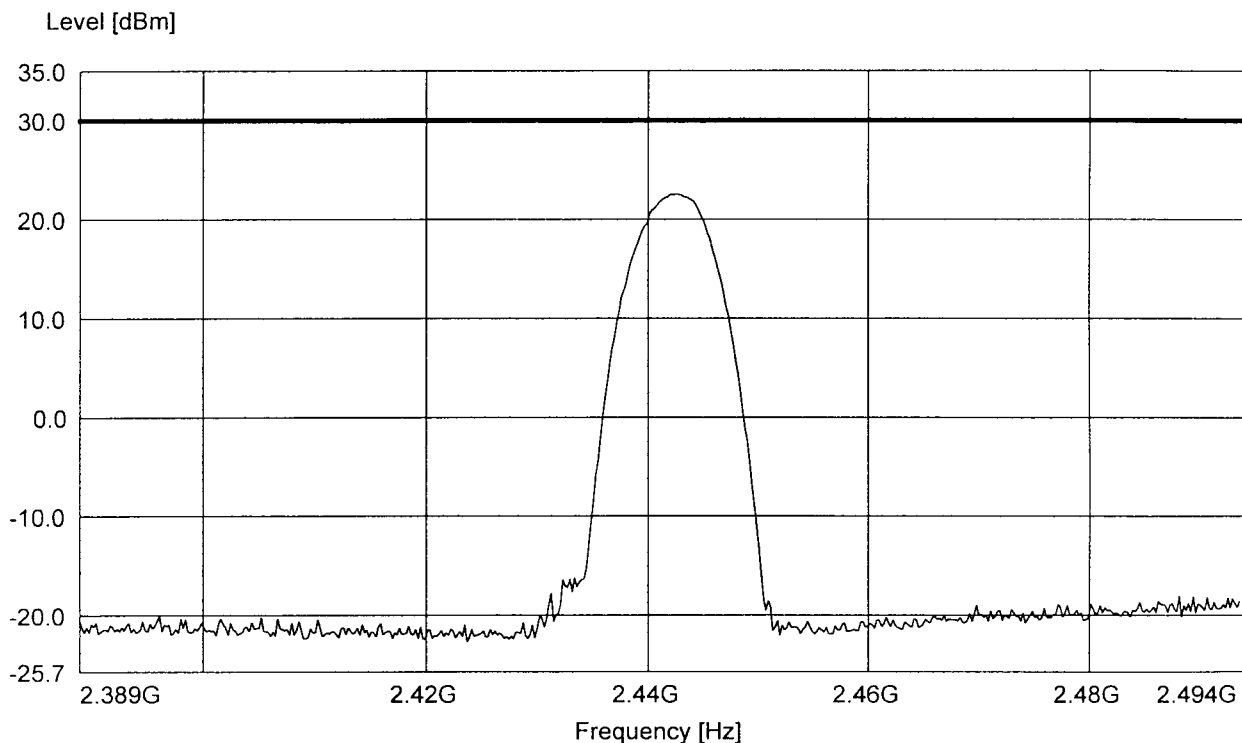


— MES 10. FCC_2.4G_dBm_v
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.40
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:24.15dBm RBW: 5 MHz

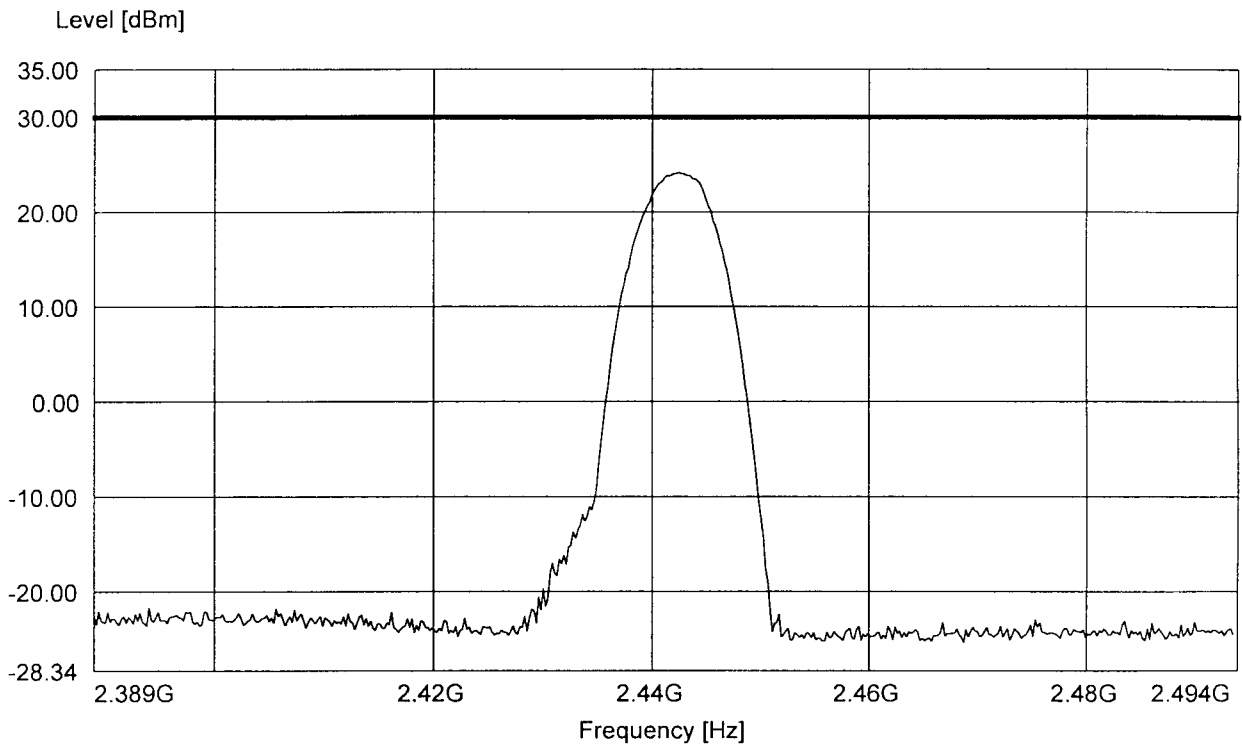


— MES 10. FCC 2.4G_dBm_h
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.40
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:+15% 34.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.443GHz Pmax:22.54dBm RBW: 5 MHz

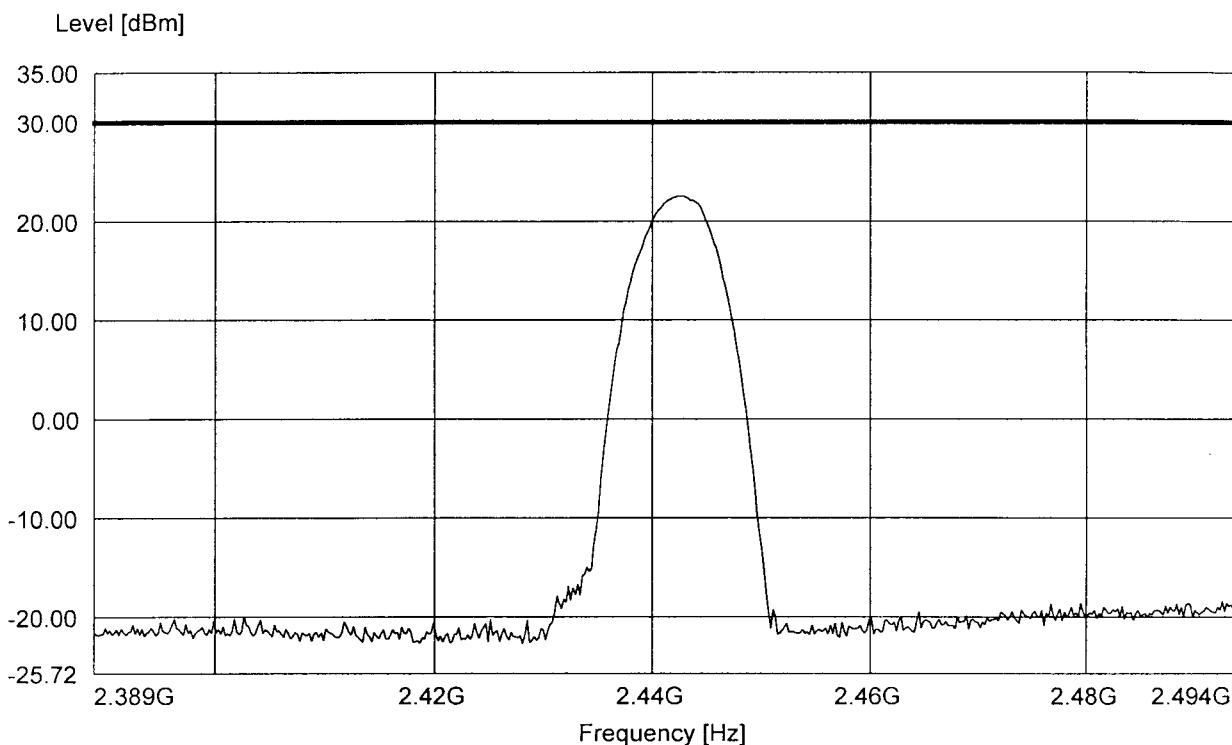


— MES 10. FCC 2.4G_dBm_v
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.40
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:+15% 34.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.442GHz Pmax:24.16dBm RBW: 5 MHz

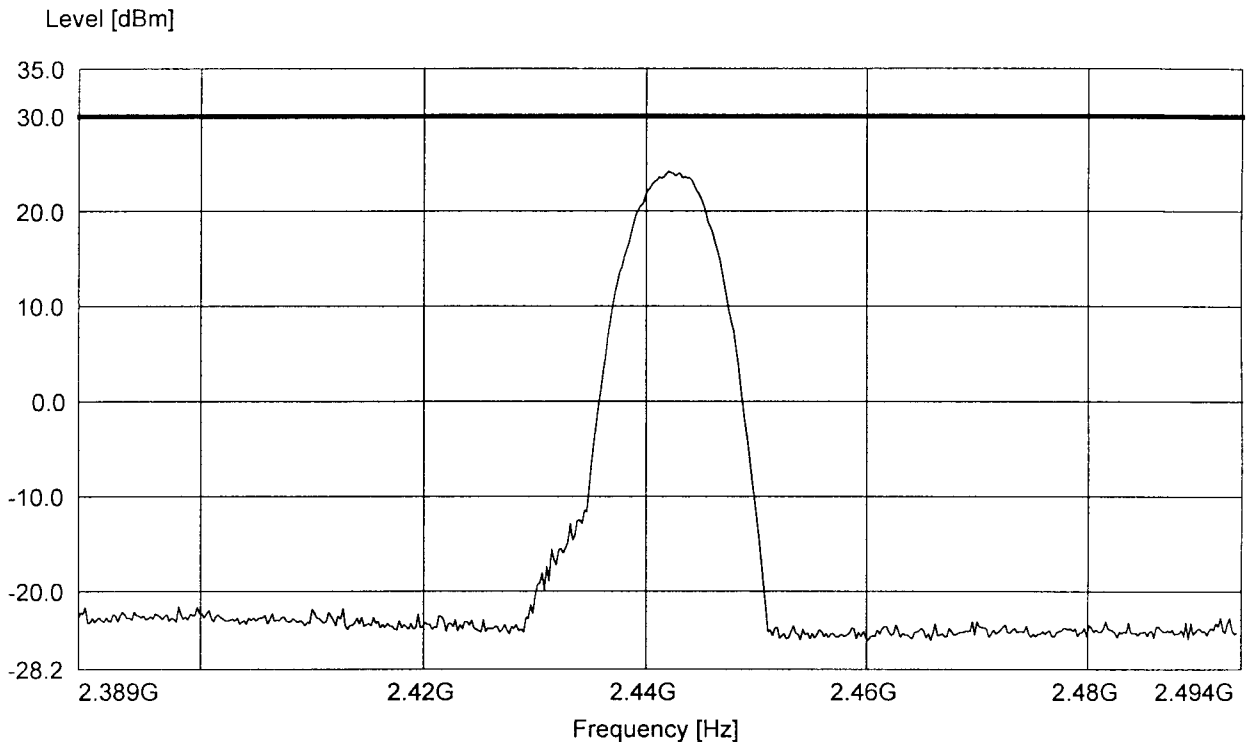


— MES 10. FCC 2.4G_dBm_h
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.78
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.481GHz Pmax:20.93dBm RBW: 5 MHz

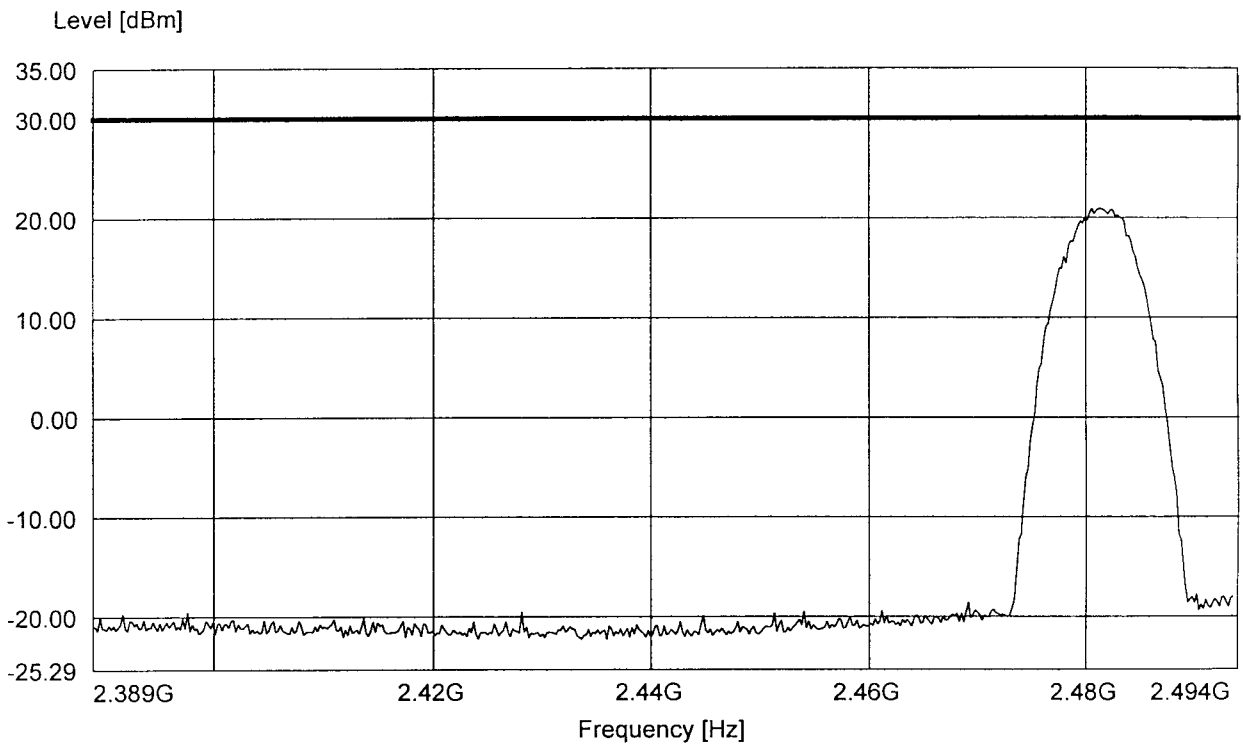


— MES 10. FCC_2.4G_dBm_v
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.78
Manufacturer: Kirk Telecom A/S


Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.481GHz Pmax:20.11dBm RBW: 5 MHz

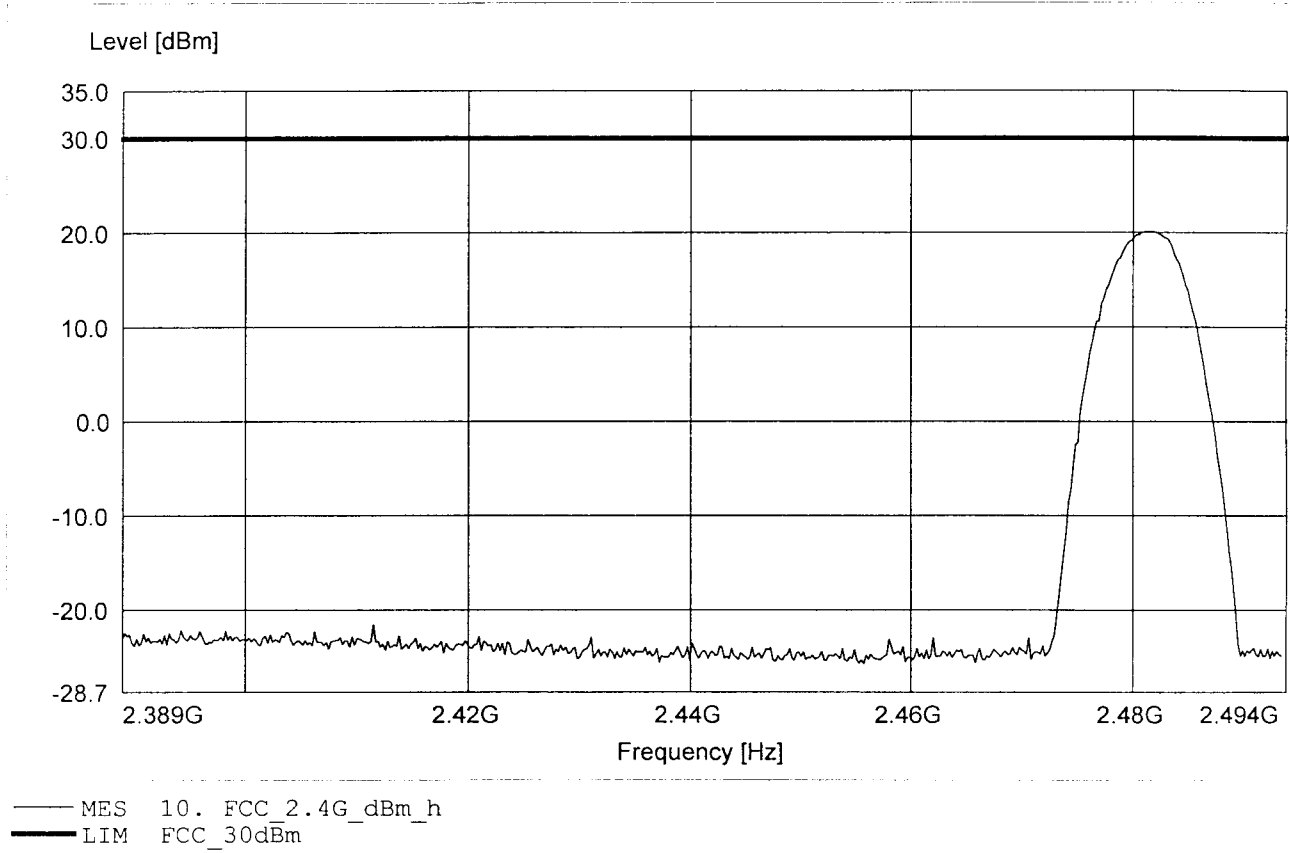

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.78
Manufacturer: Kirk Telecom A/S


Operating Condition: Unom:+15% 34.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:20.94dBm RBW: 5 MHz

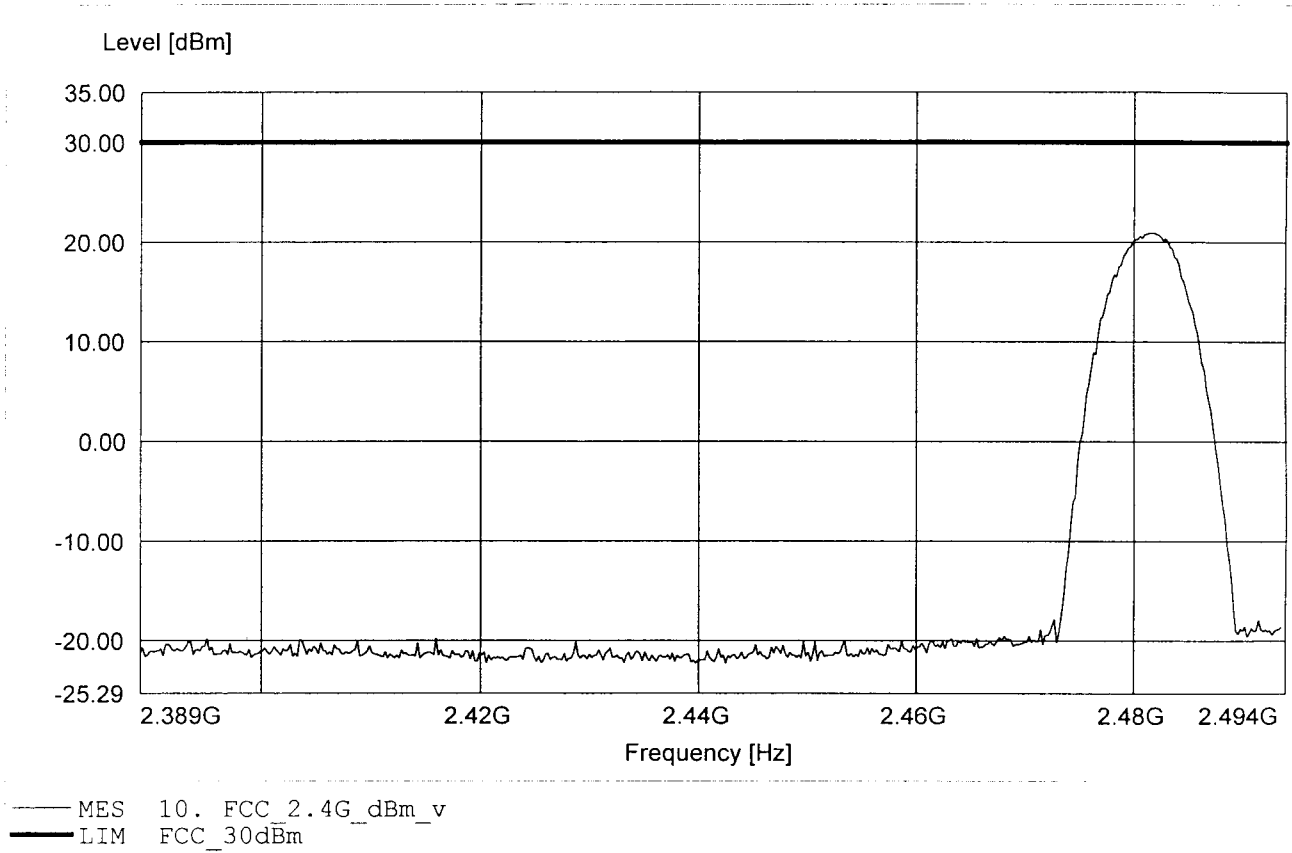

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:1 Ch.78
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:+15% 34.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.481GHz Pmax:20.11dBm RBW: 5 MHz

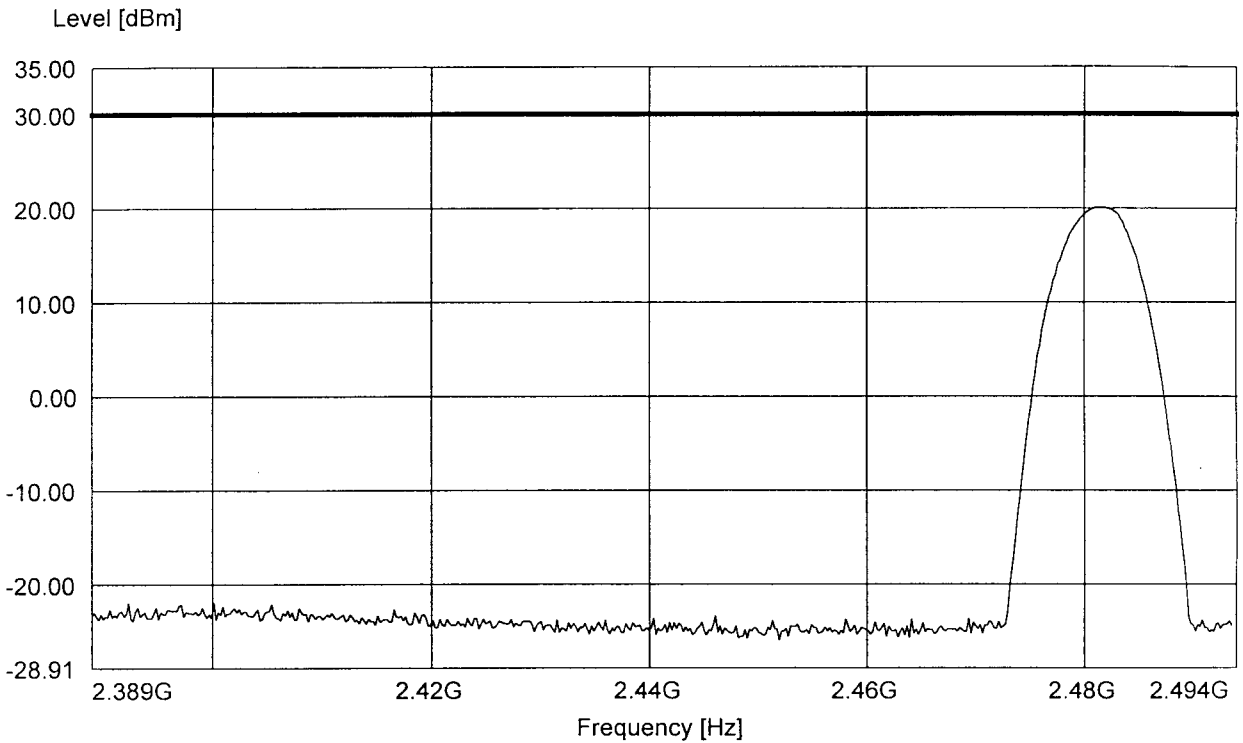


— MES 10. FCC 2.4G_dBm_h
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.78
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.482GHz Pmax:21.53dBm RBW: 5 MHz

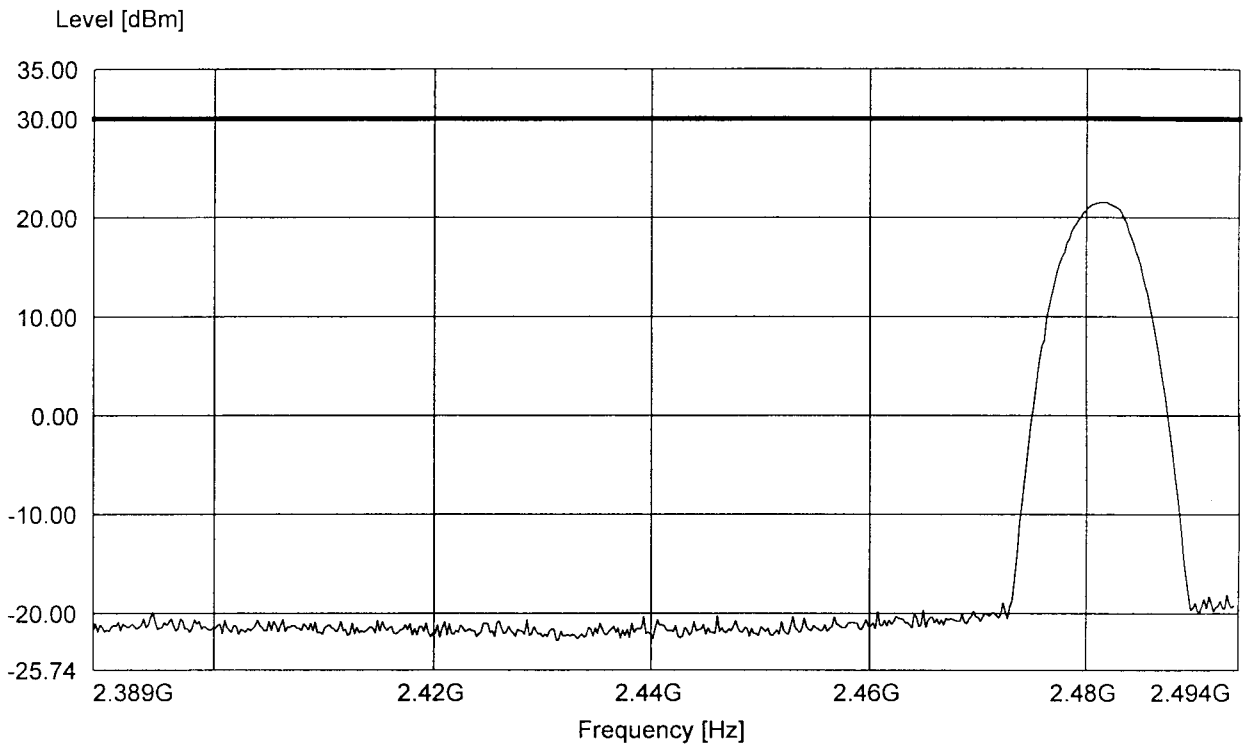


— MES 10. FCC_2.4G_dBm_v
— LIM FCC_30dBm

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.78
Manufacturer: Kirk Telecom A/S


Operating Condition: Unom:-15% 25.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15.247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.481GHz Pmax:22.36dBm RBW: 5 MHz

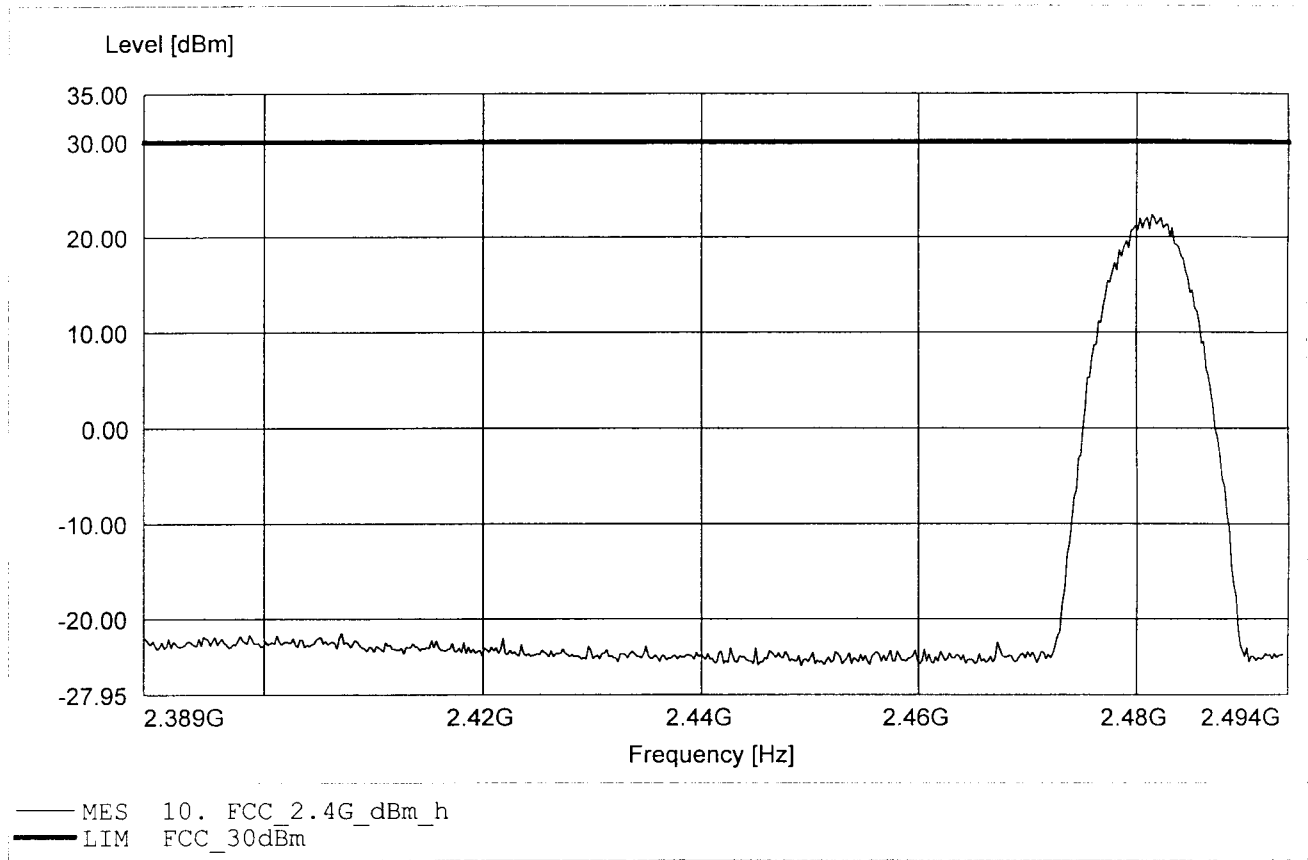

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.78
Manufacturer: Kirk Telecom A/S


Operating Condition: Unom:+15% 34.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.481GHz Pmax:22.44dBm RBW: 5 MHz

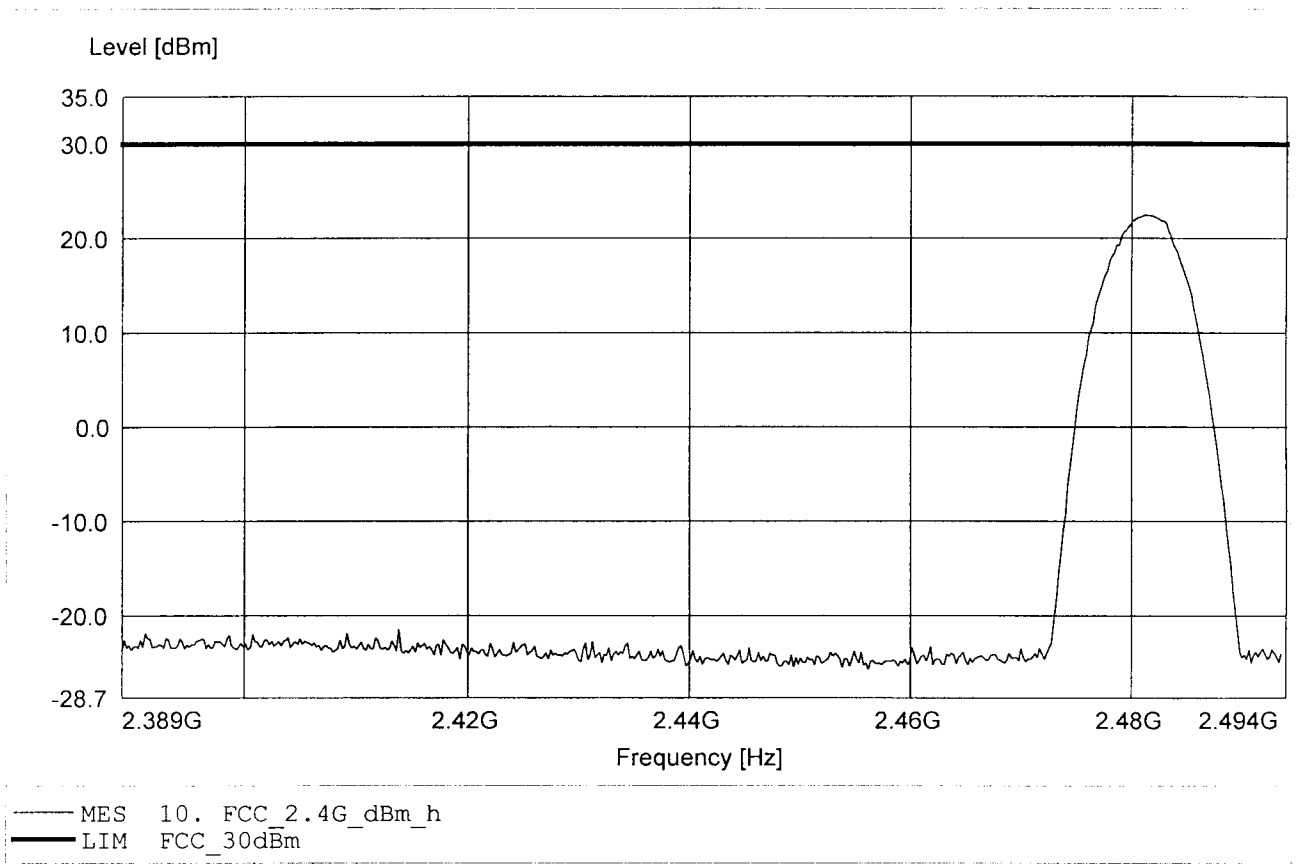

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT / Model: 2.4 GHz DECT / RFP4 2G4 / Ant.:2 Ch.78
Manufacturer: Kirk Telecom A/S

Operating Condition: Unom:+15% 34.5 V DC , Tnom:23°C
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15247 / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq:2.481GHz Pmax:22.87dBm RBW: 5 MHz

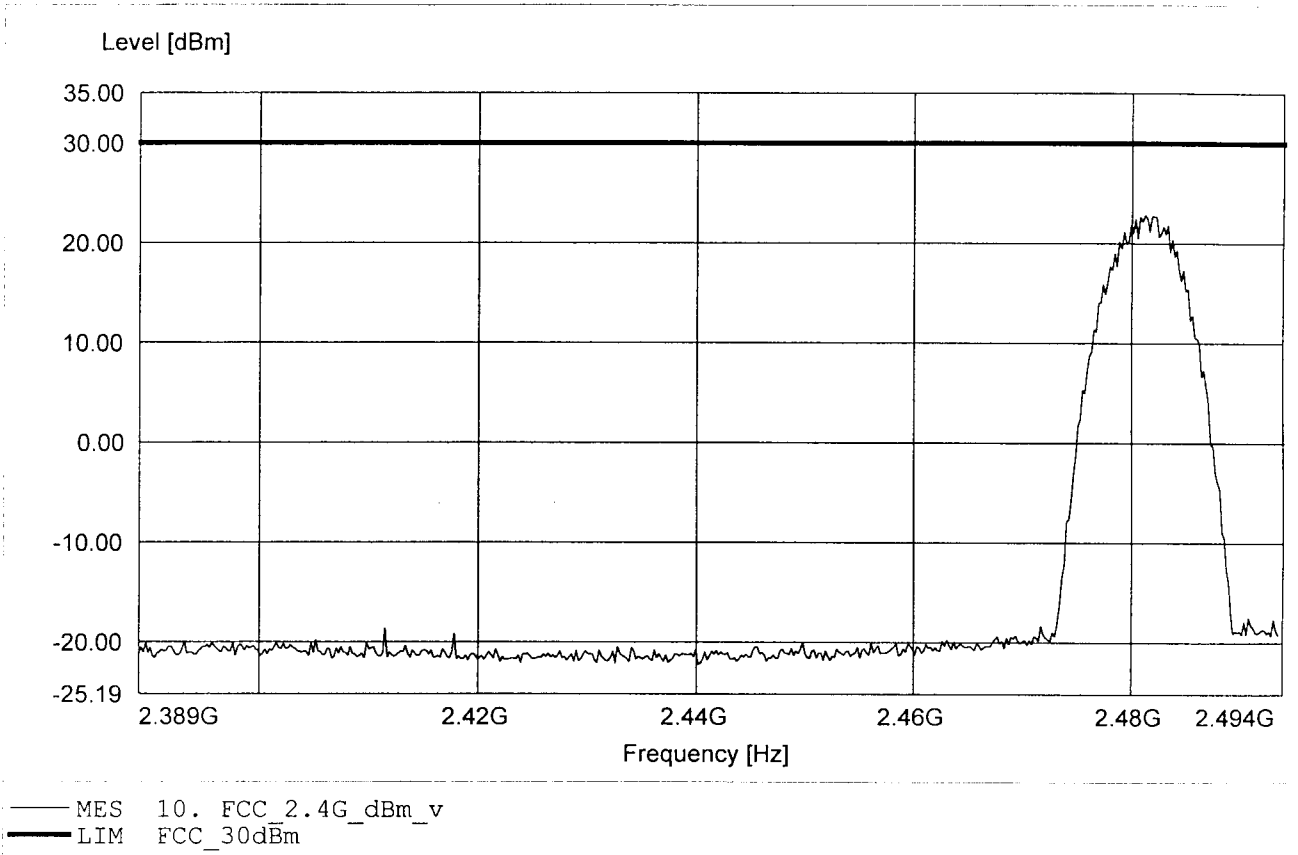




Appendix C

Spurious Emissions radiated - Transmitter operating

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:197,47MHz Pmax:28,44dBμV/m RBW=100KHz

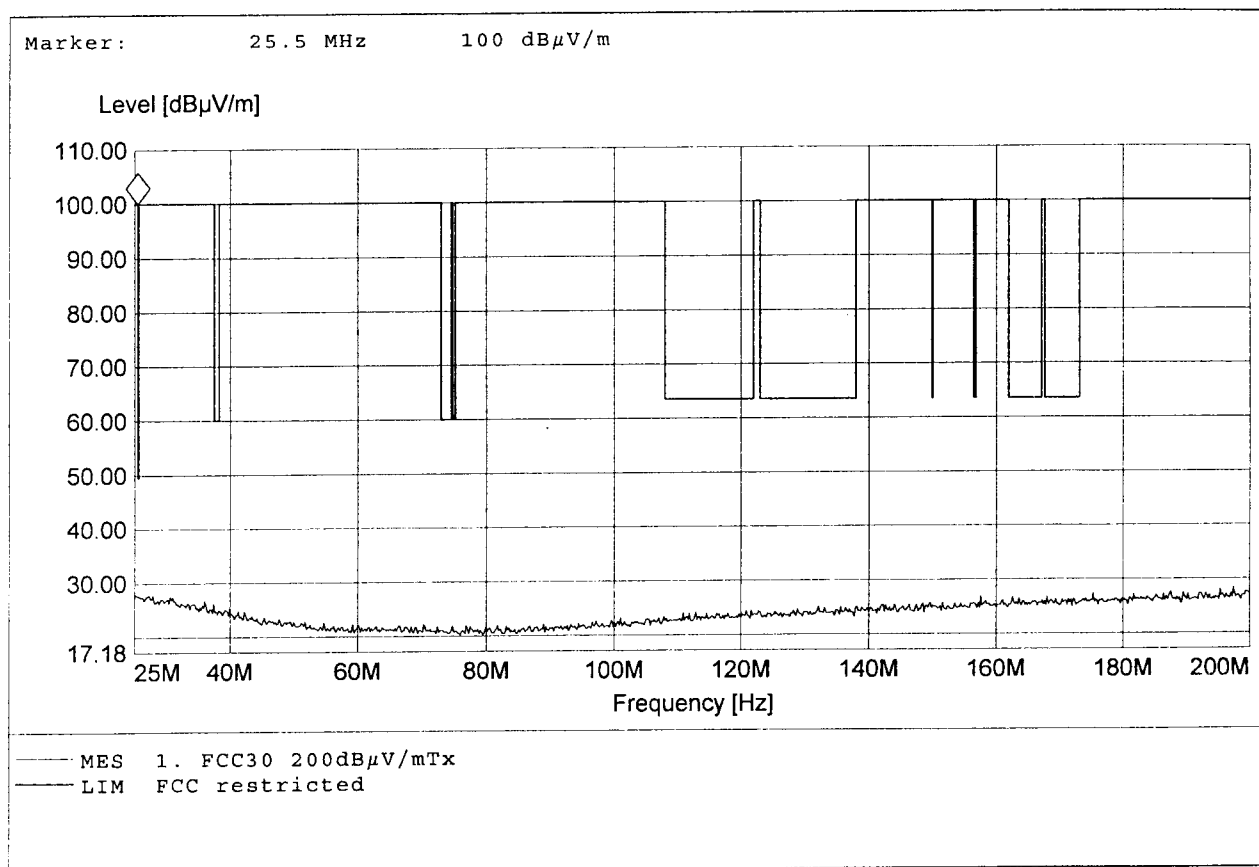

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:25,58MHz Pmax:28,39dBμV/m RBW=100KHz

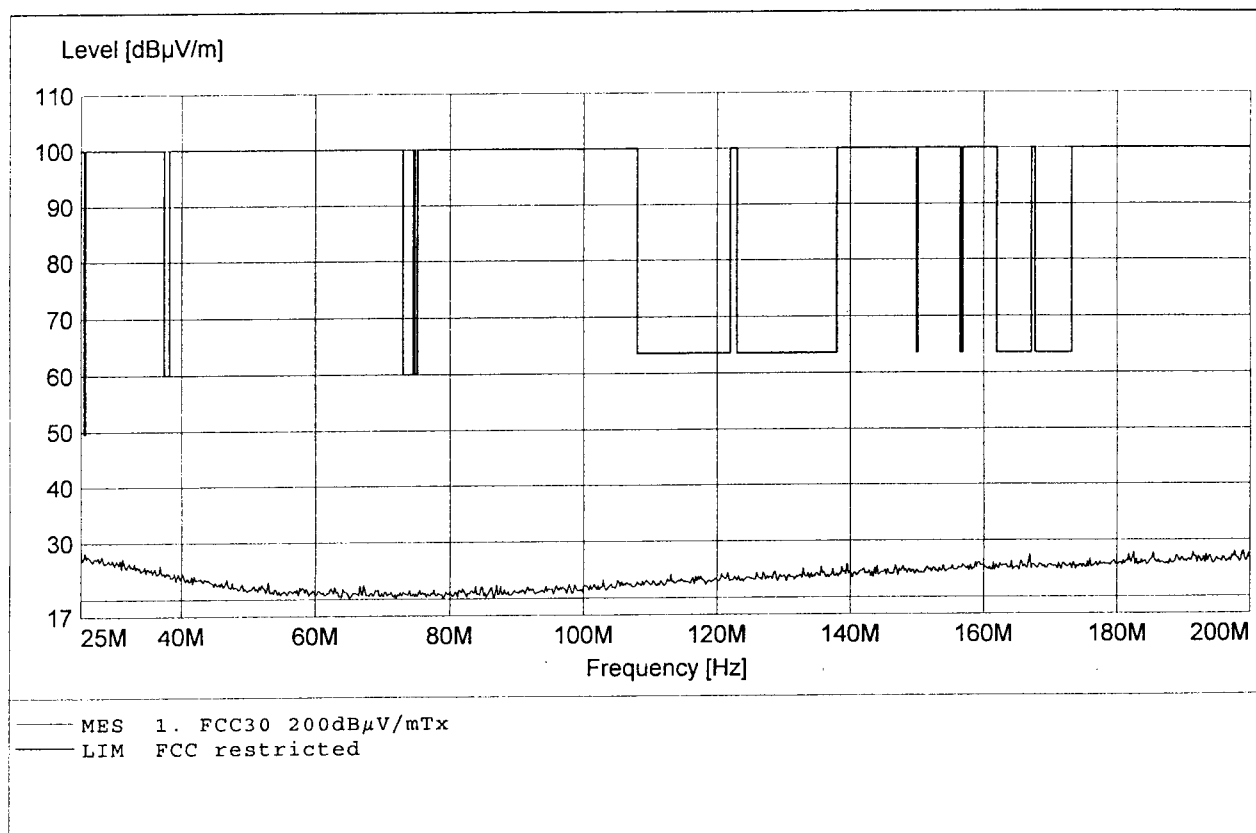

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:999,99MHz Pmax:37,13dBμV/m RBW=100KHz

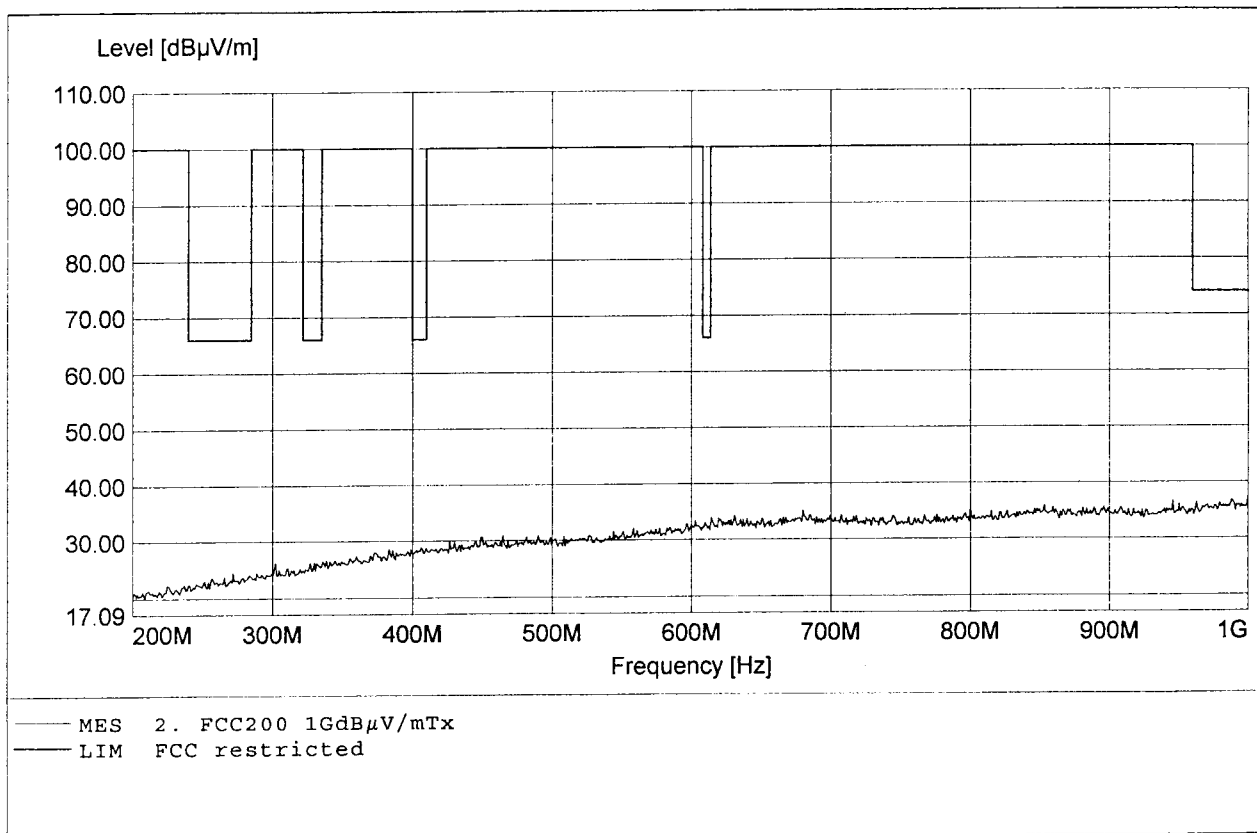

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:969,77MHz Pmax:37,22dBμV/m RBW=100KHz

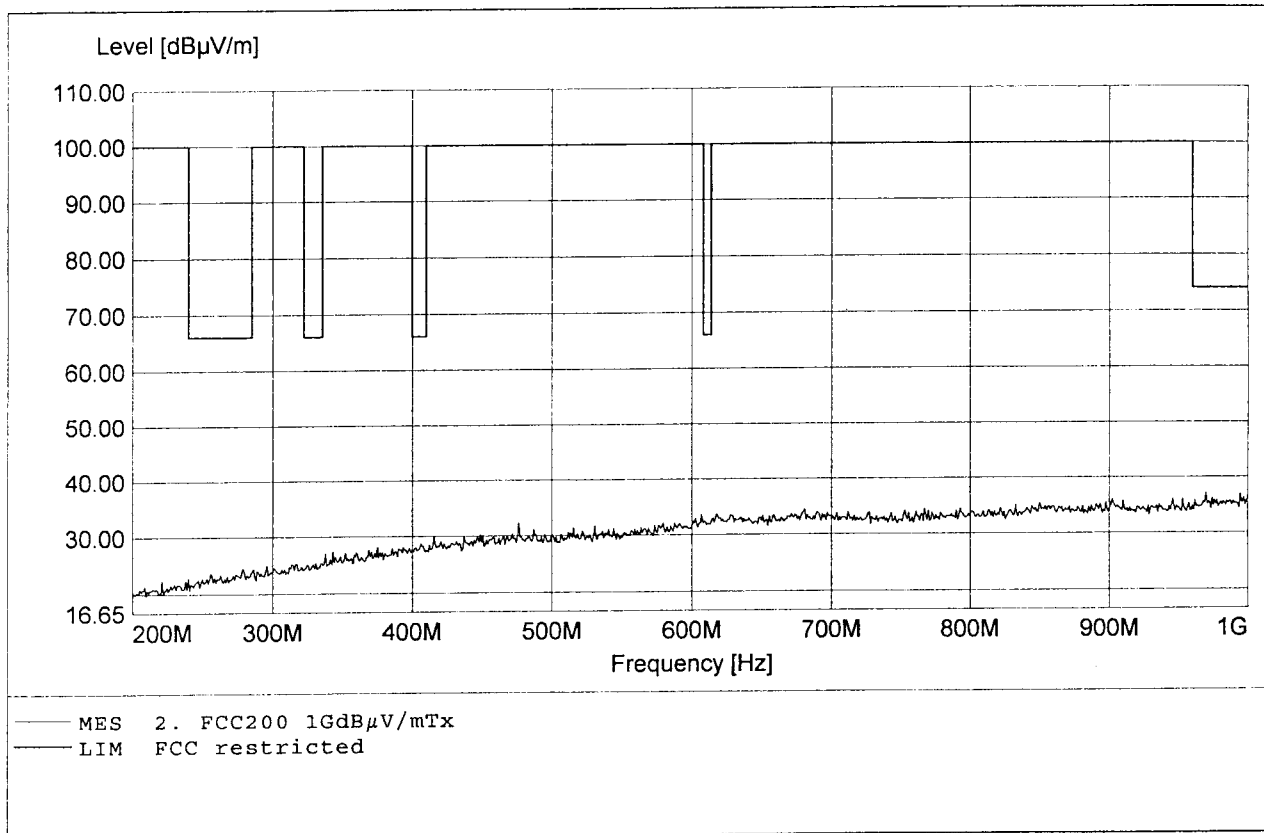

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2406,66MHz Pmax:108,79dBμV/m RBW=1MHz

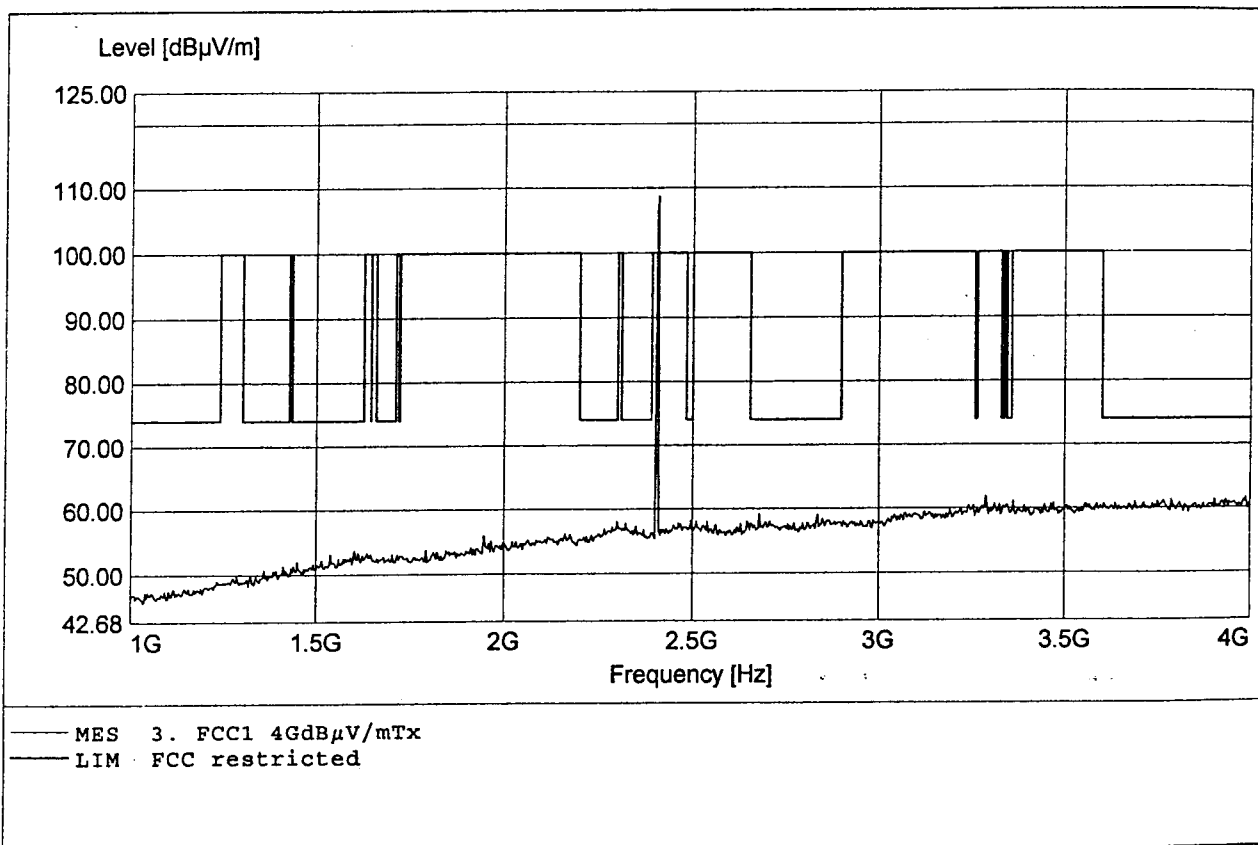

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2406,66MHz Pmax:116,39dBμV/m RBW=1MHz

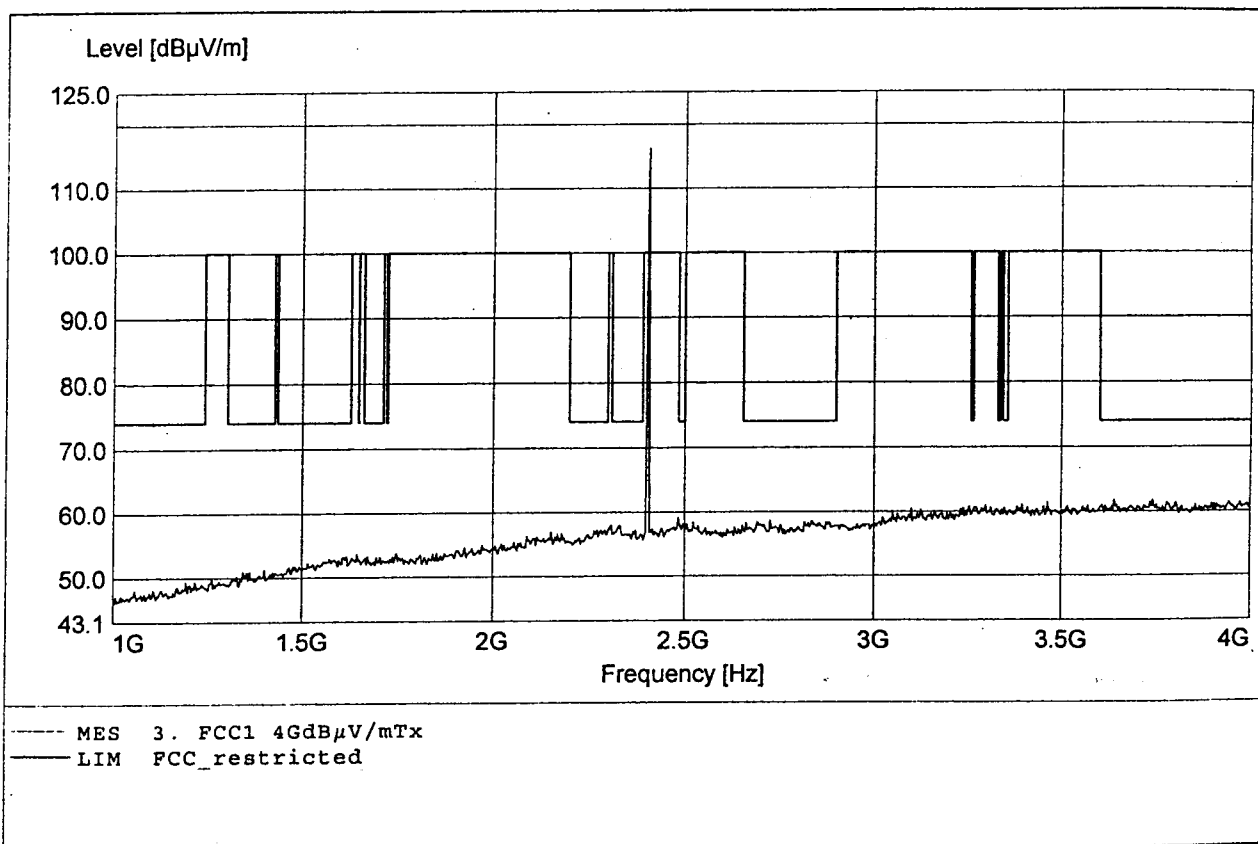

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7951,11MHz Pmax:61,21dBµV/m RBW=1MHz

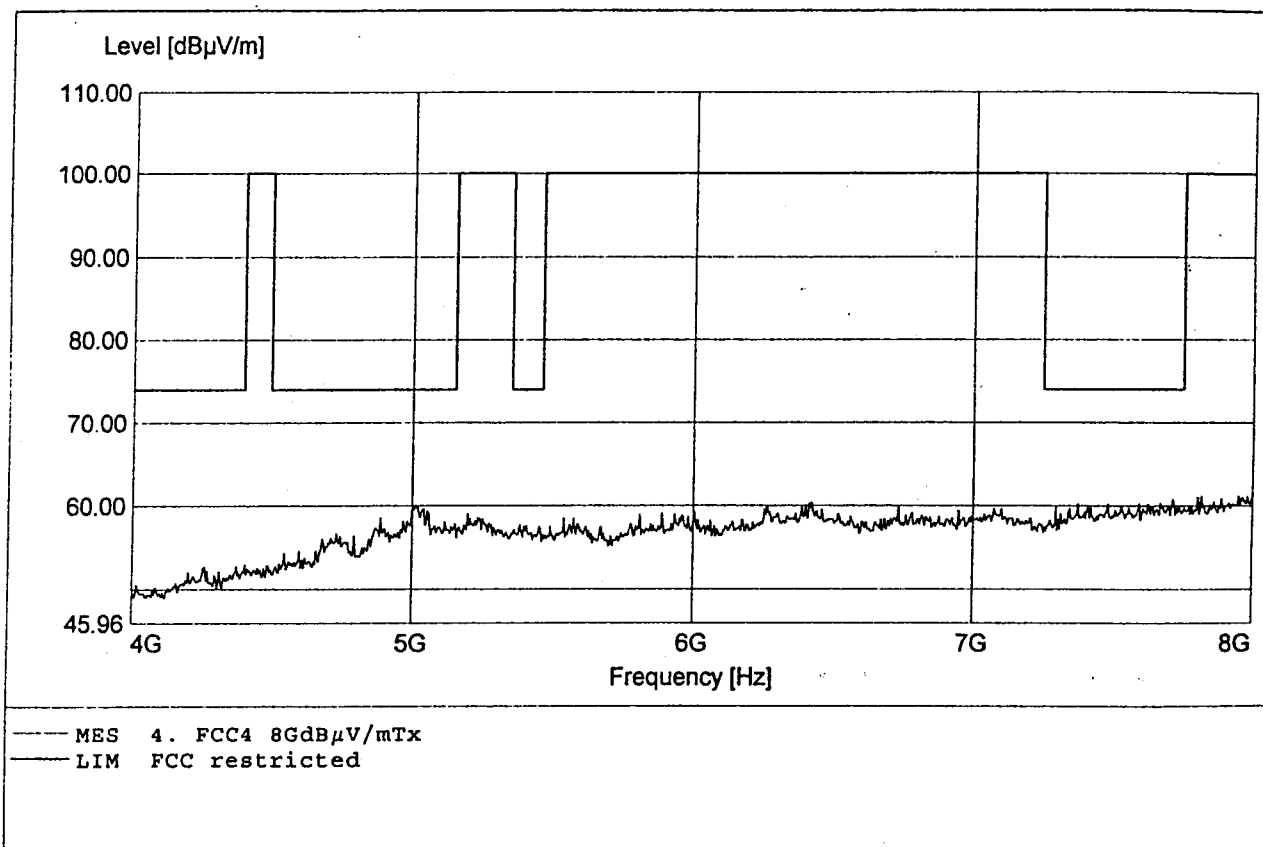

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7982,22MHz Pmax:61,72dBμV/m RBW=1MHz

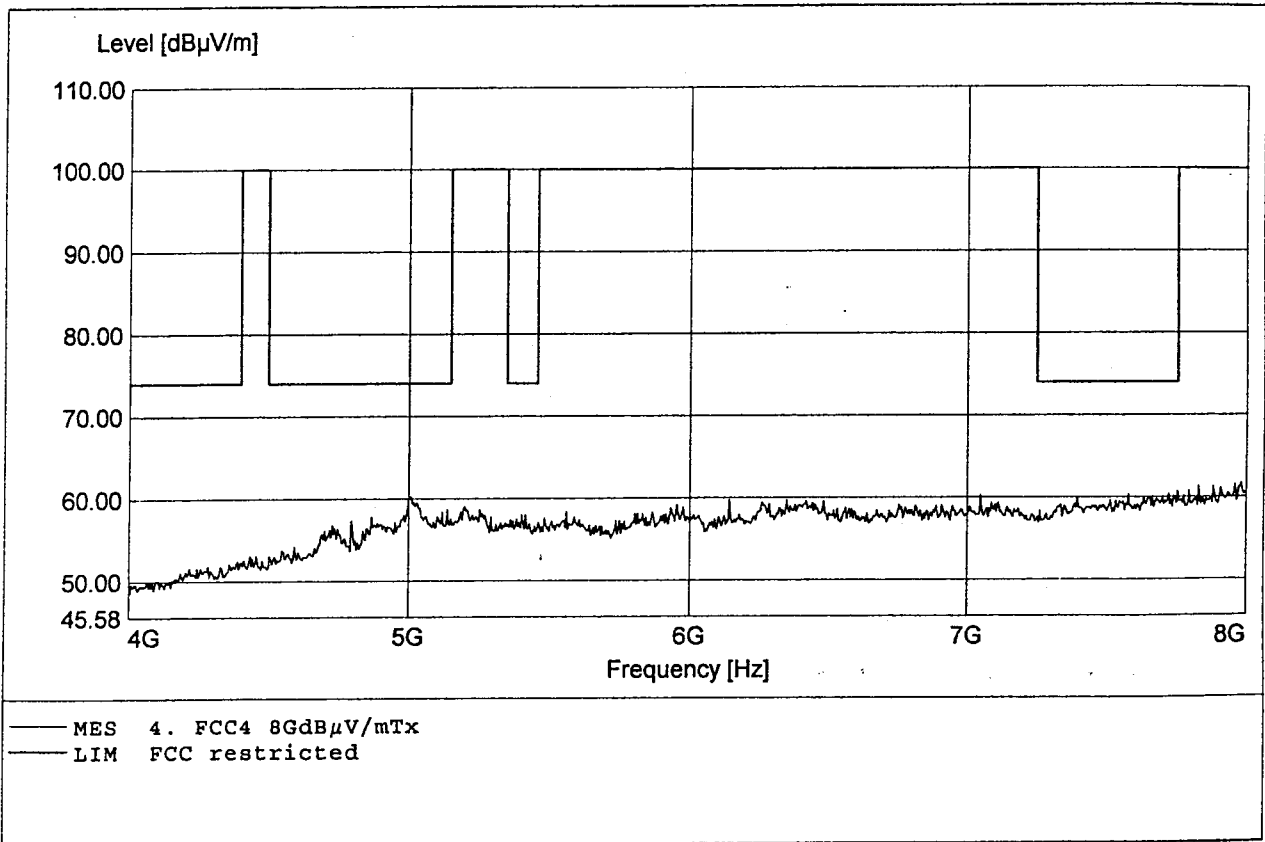

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:17299,99MHz Pmax:46,14dBμV/m RBW=1MHz

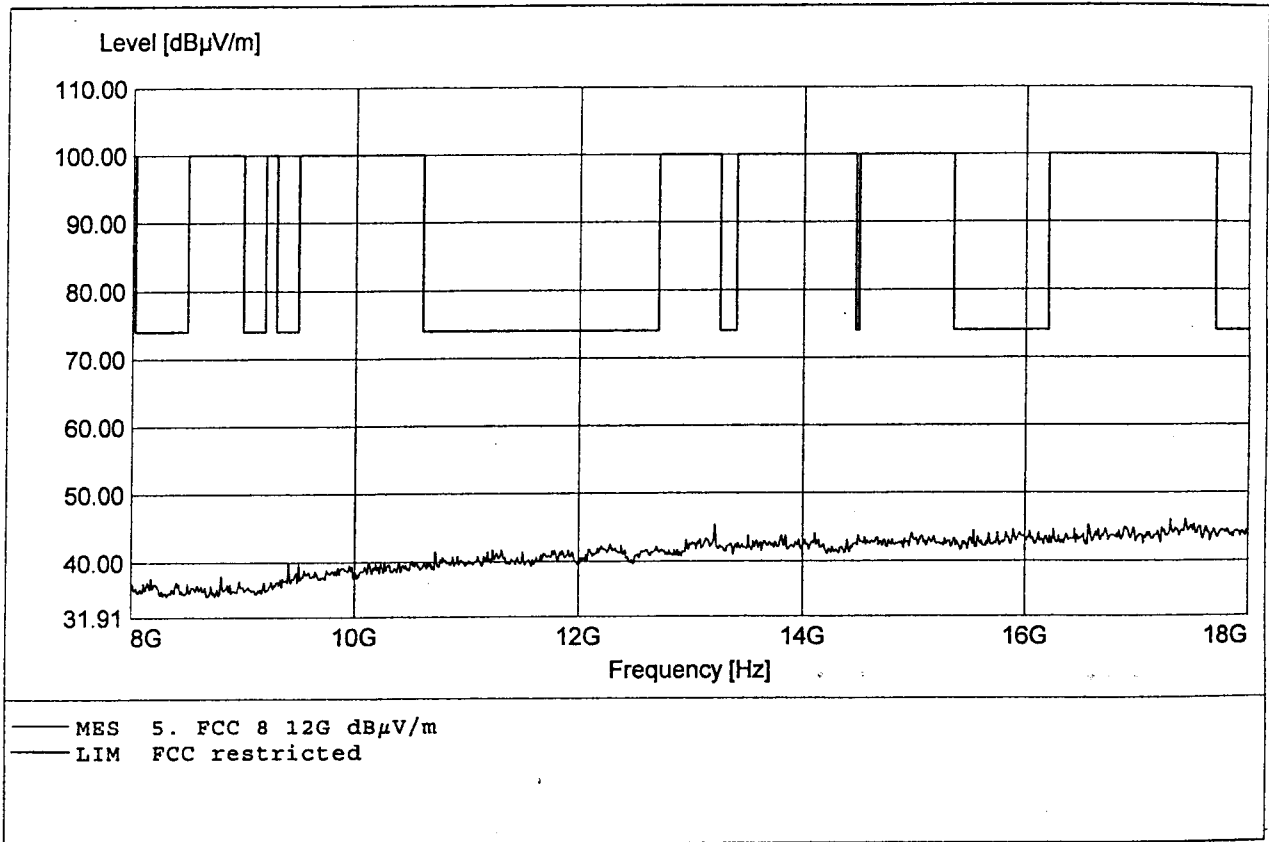

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:9599,99MHz Pmax:46,79dB μ V/m RBW=1MHz

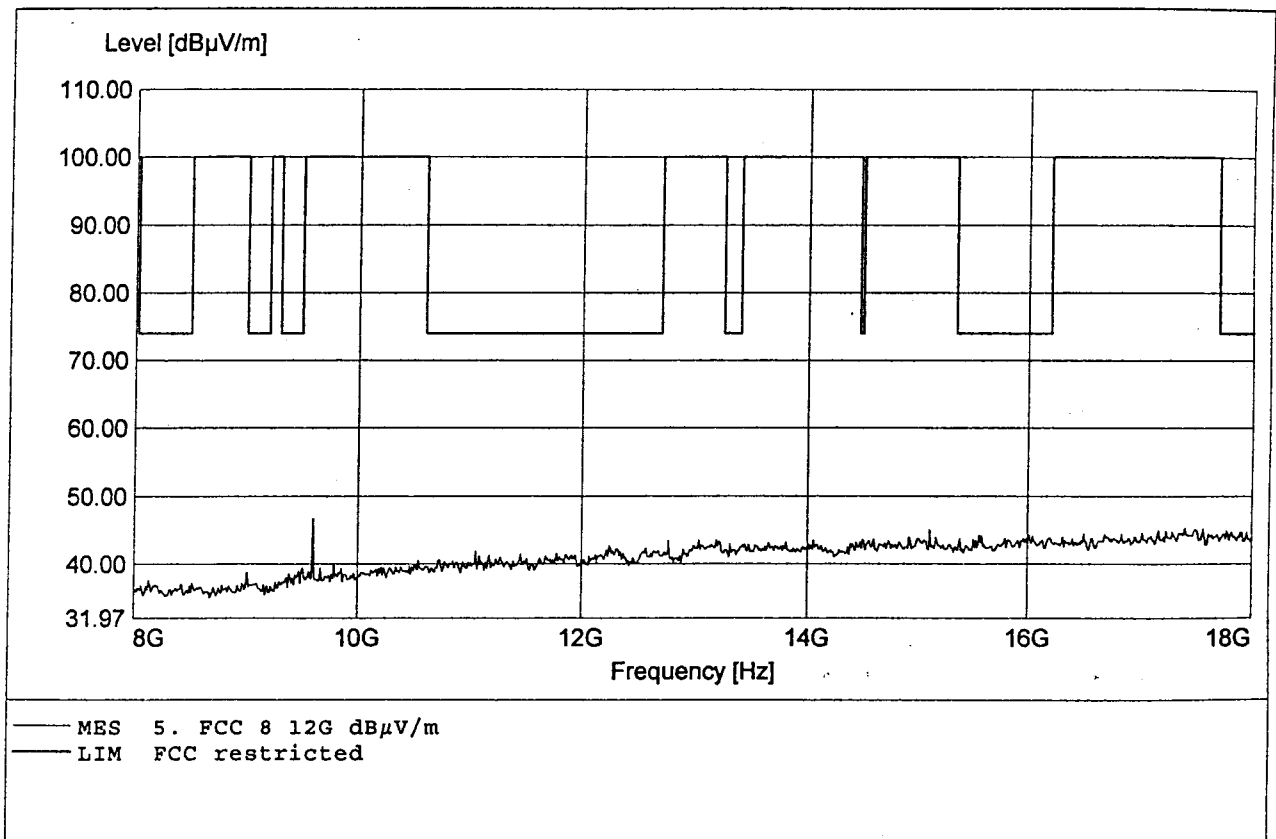

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Applicant: Kirk Telecom A/S

Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25838,88MHz Pmax:56,20dBµV/m RBW=1MHz

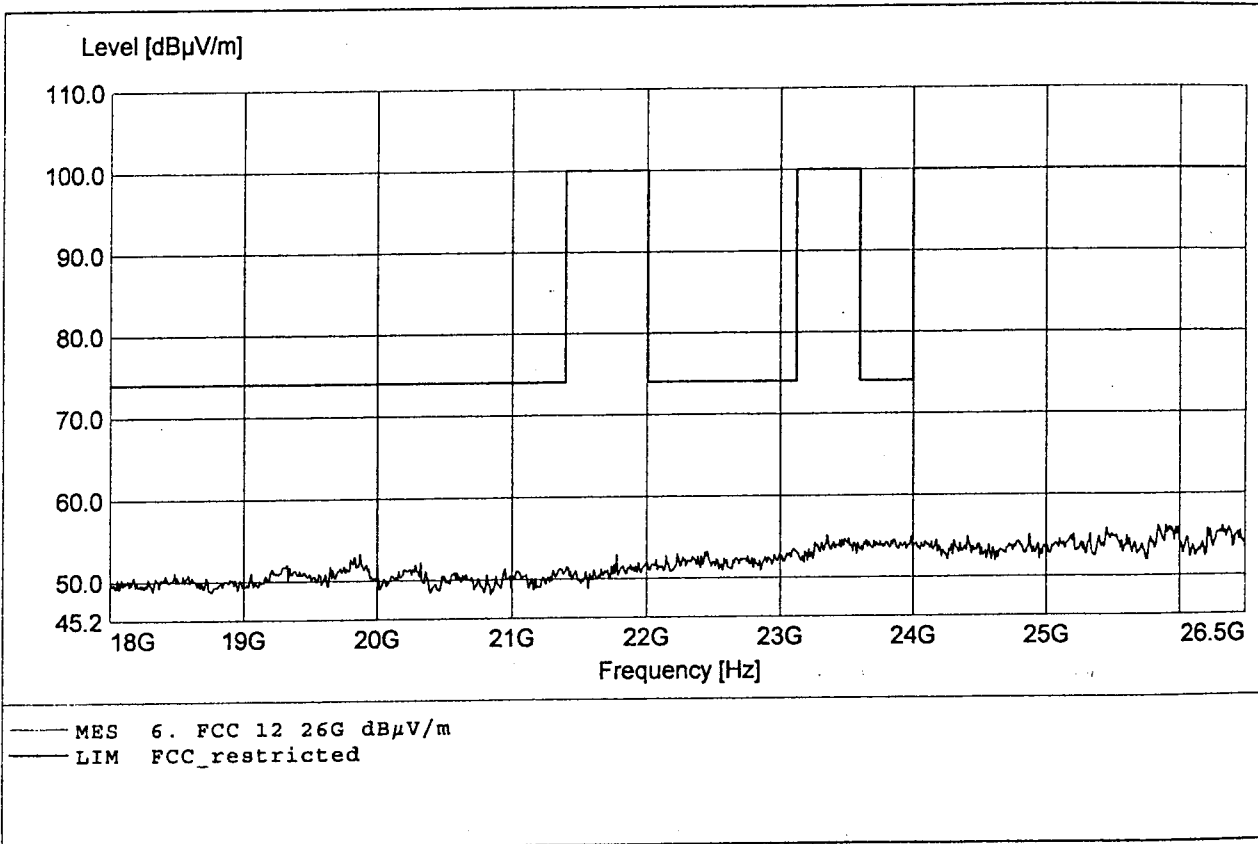


Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4
Applicant: Kirk Telecom A/S

Ant:1 FP (Ch:0 Data:PSRBS)


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26301,66MHz Pmax:56,61dBµV/m RBW=1MHz

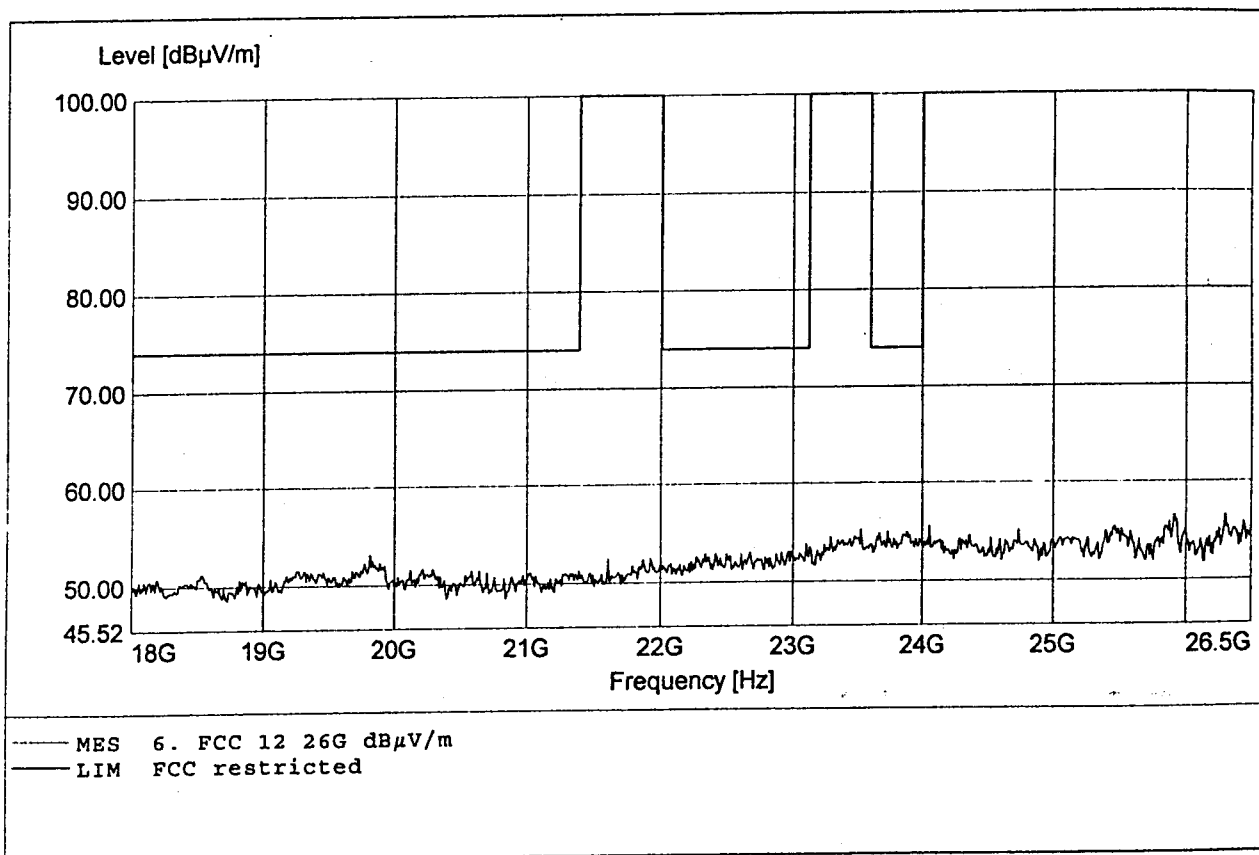

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant.:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:198,25MHz Pmax:28,84dBµV/m RBW=100KHz

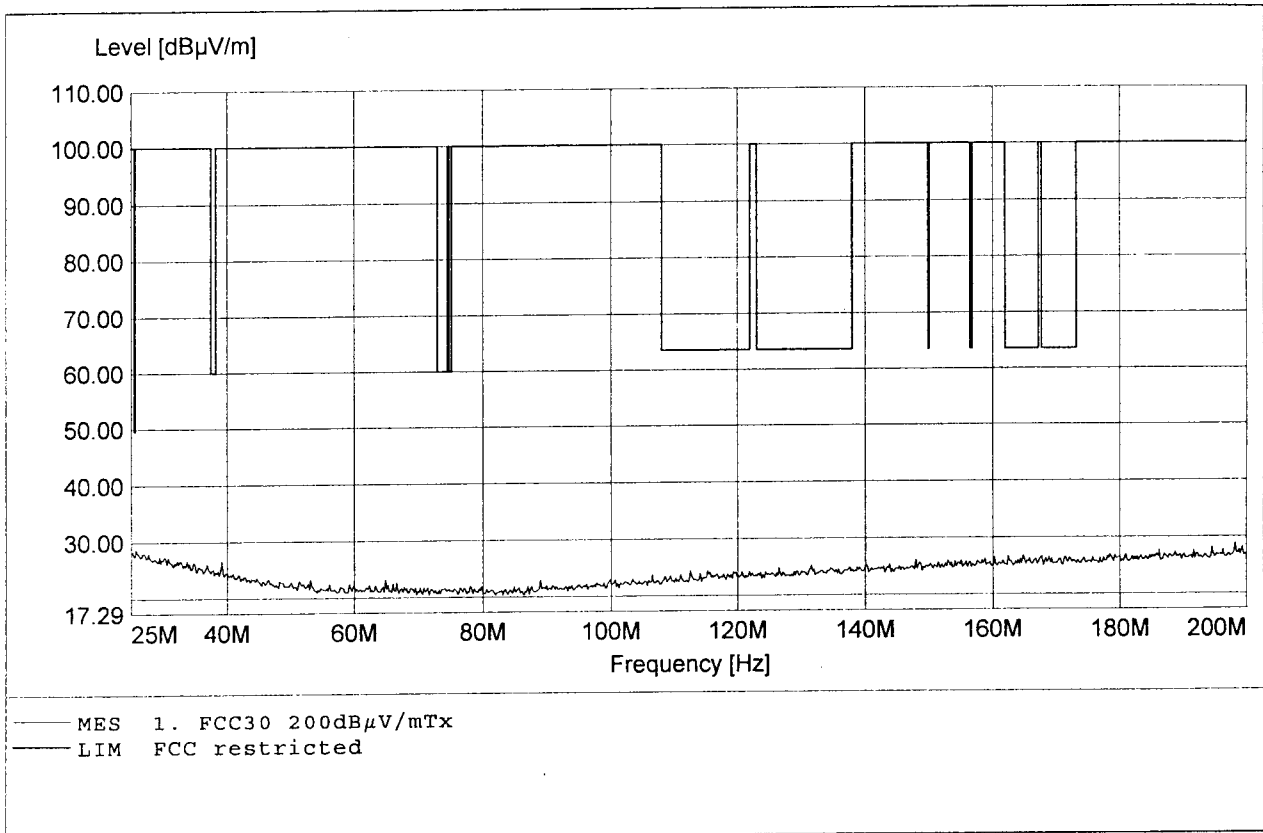

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:184,63MHz Pmax:26,52dB μ V/m RBW=100KHz

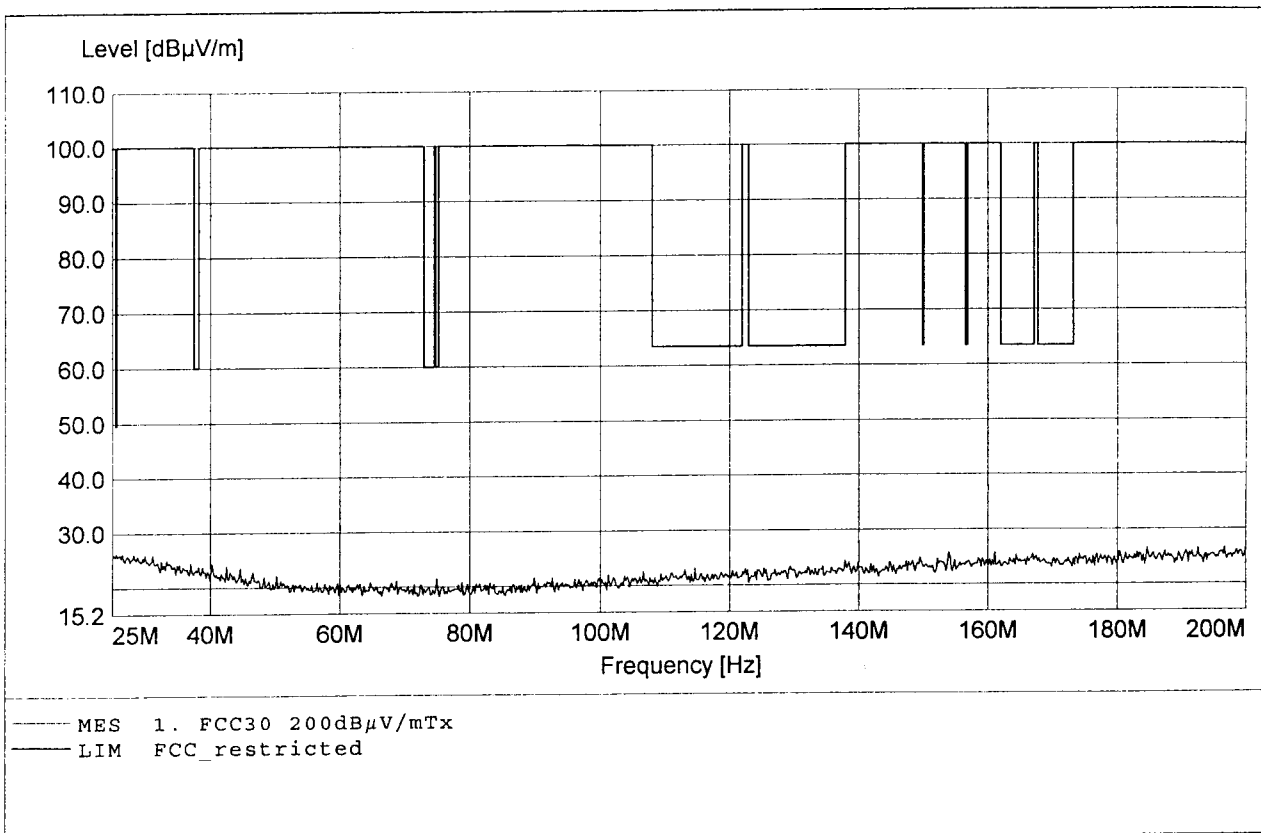

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:881,77MHz Pmax:42,11dBμV/m RBW=100KHz

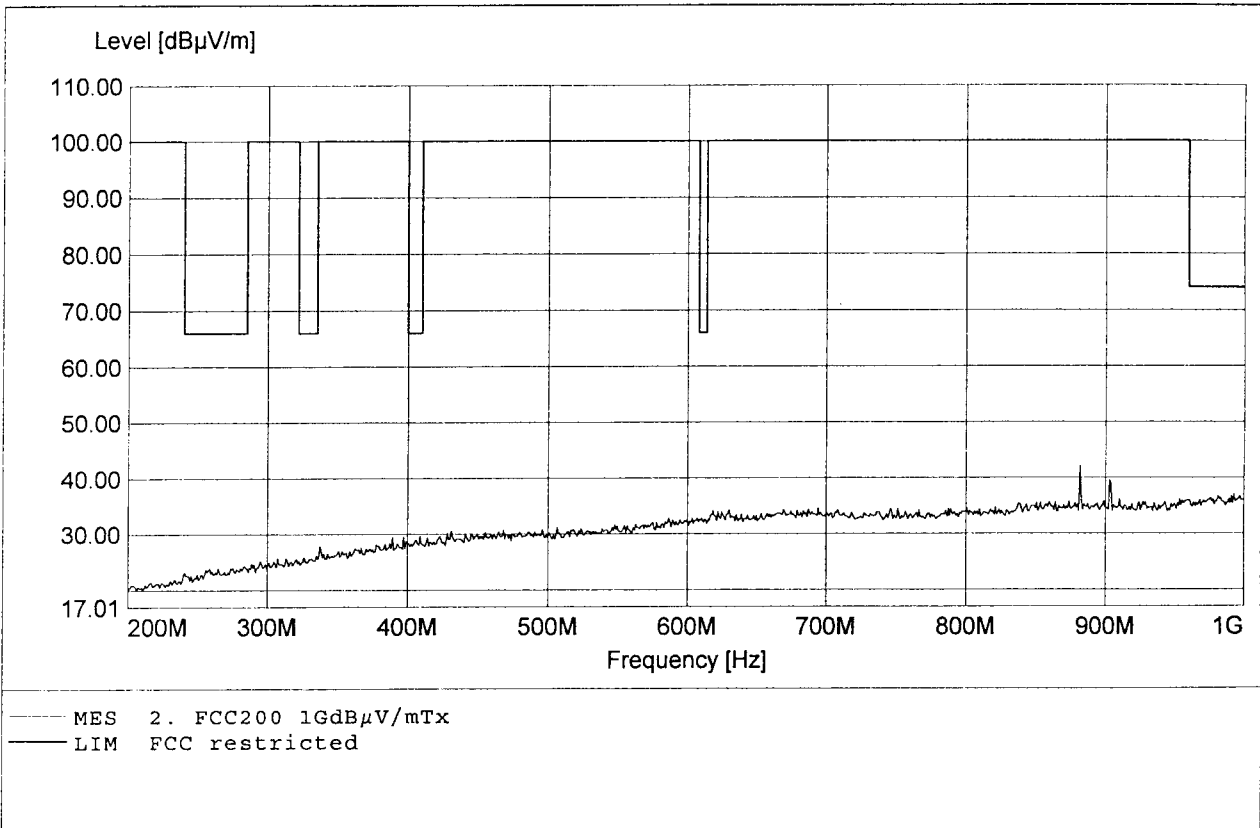

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S

Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:914,66MHz Pmax:41,45dBμV/m RBW=100KHz

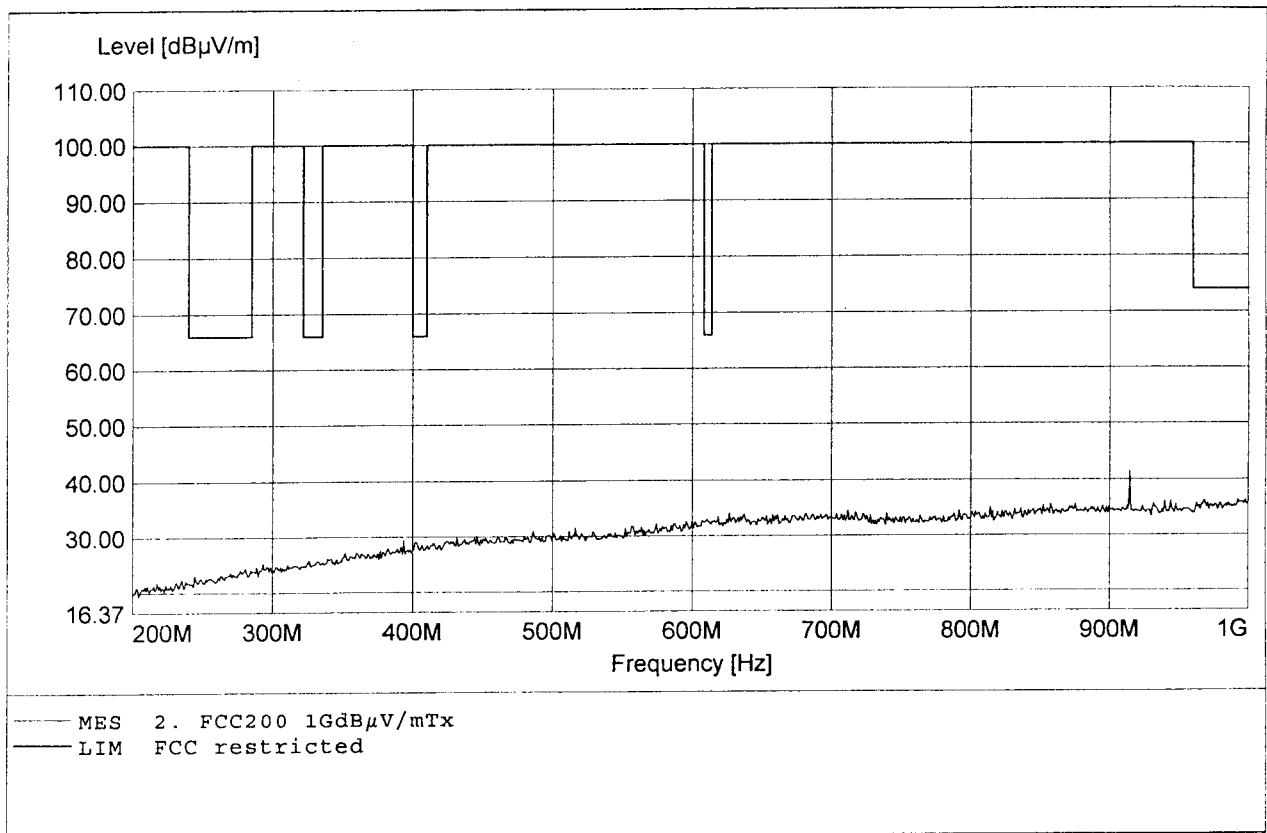

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)

Test Site / Operator: ETS / Mr. Matz

Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%

Comment 1: Dist.: 3m, Ant.: HL025


Comment 2: Freq:2446,66MHz Pmax:113,59dBμV/m RBW=1MHz

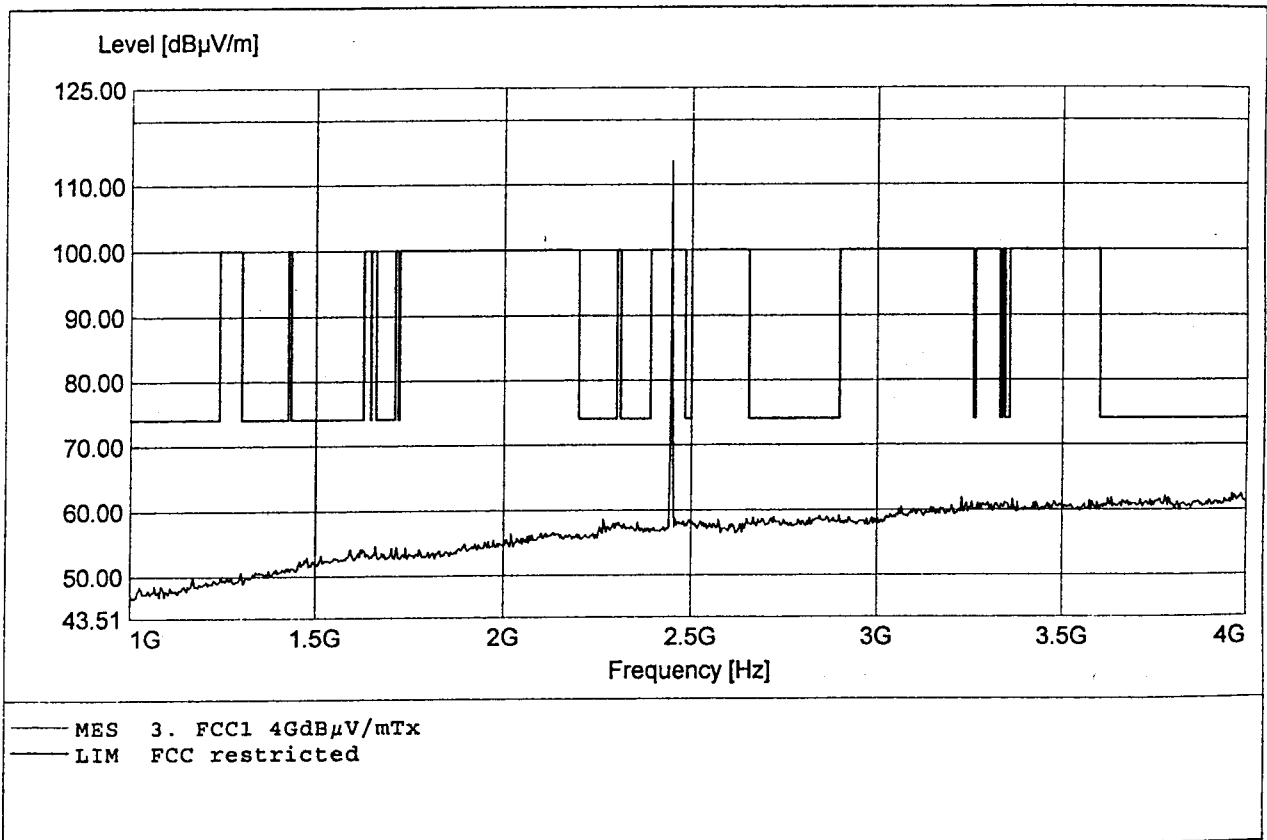

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2446,66MHz Pmax:116,81dBμV/m RBW=1MHz

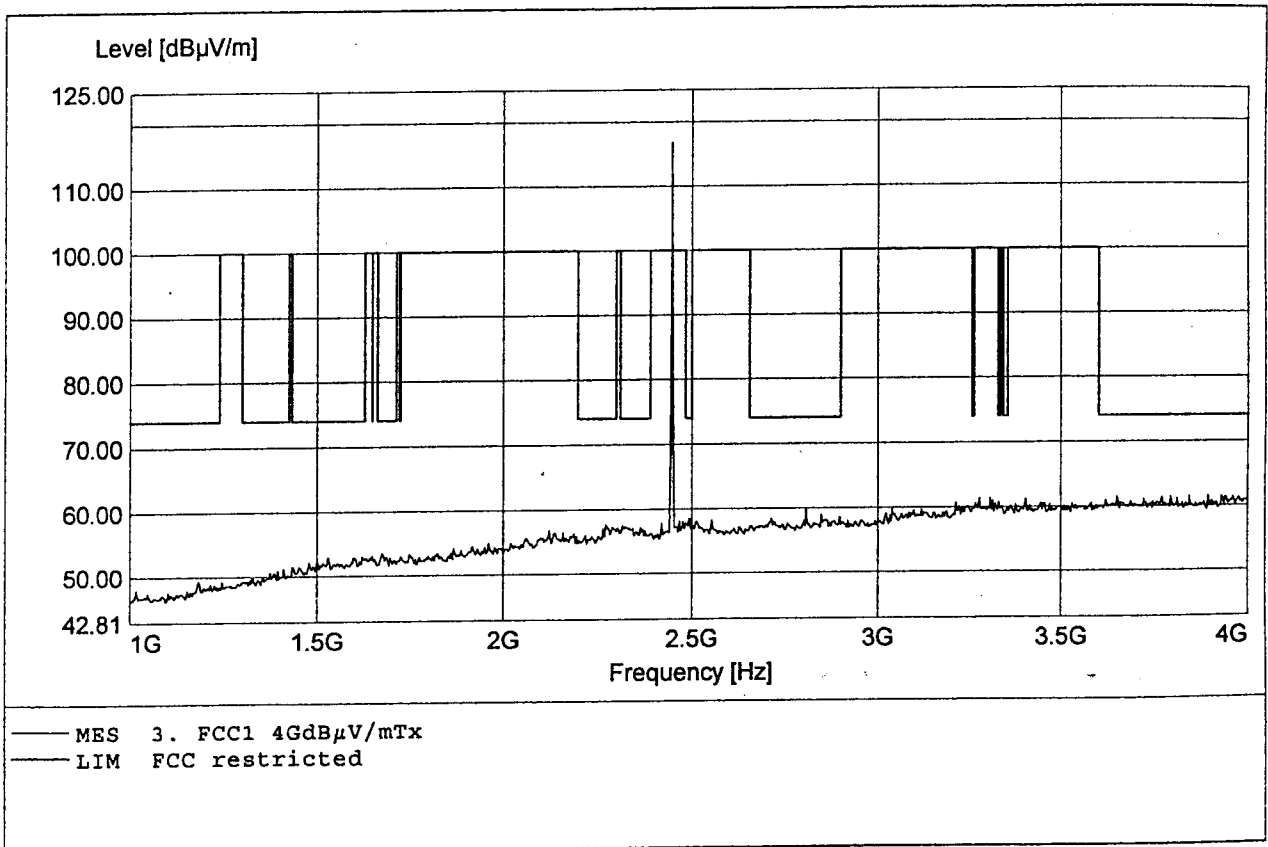

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7982,22MHz Pmax:61,99dBμV/m RBW=1MHz

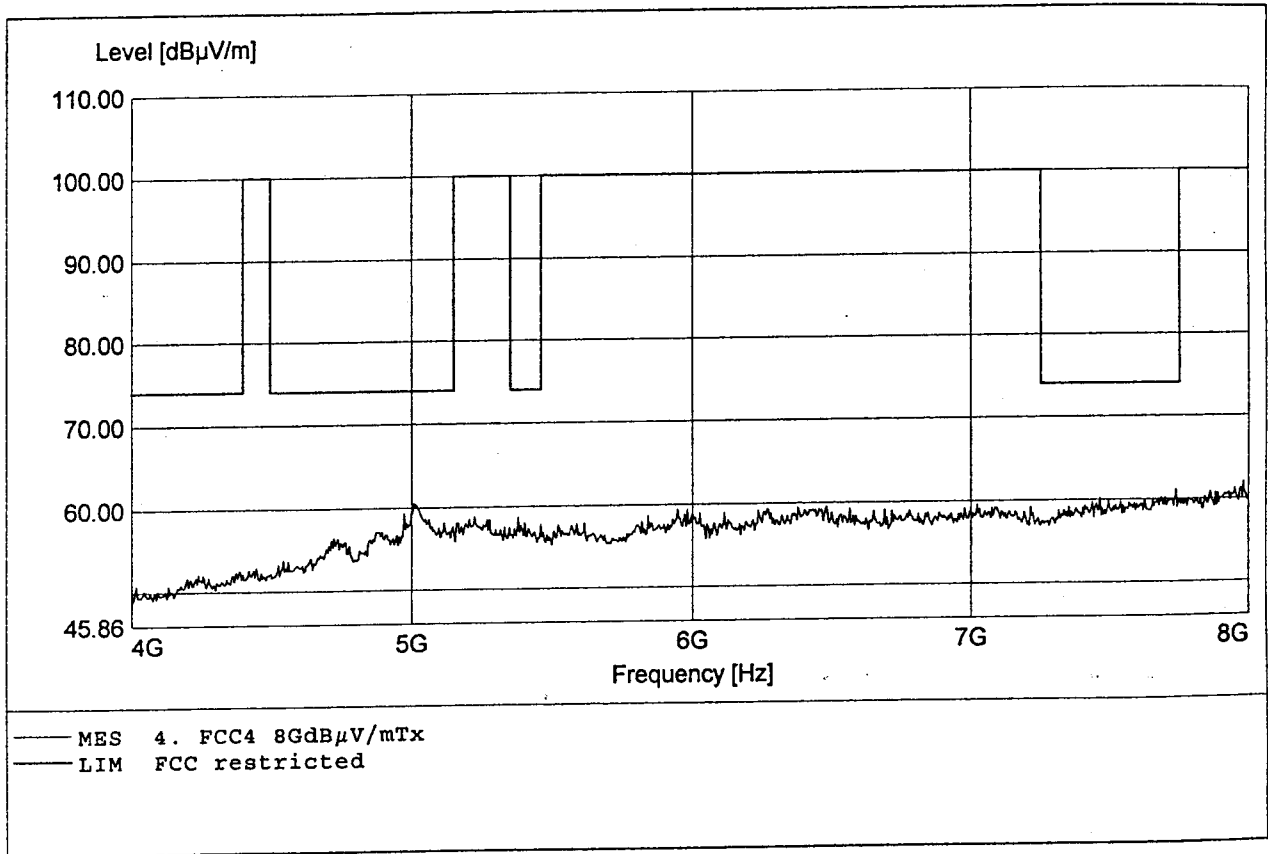

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7951,11MHz Pmax:62,23dBµV/m RBW=1MHz

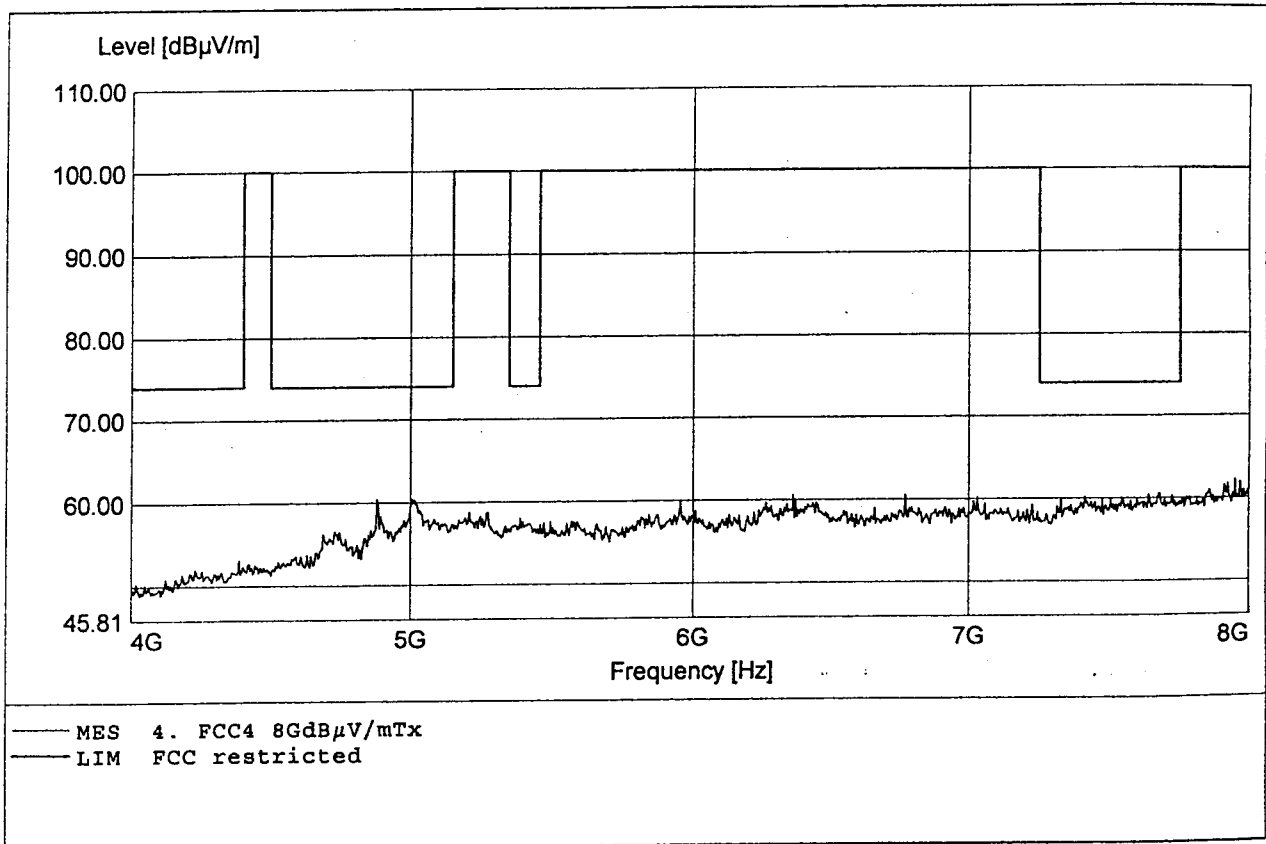

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:14655,55MHz Pmax:47,42dBµV/m RBW=1MHz

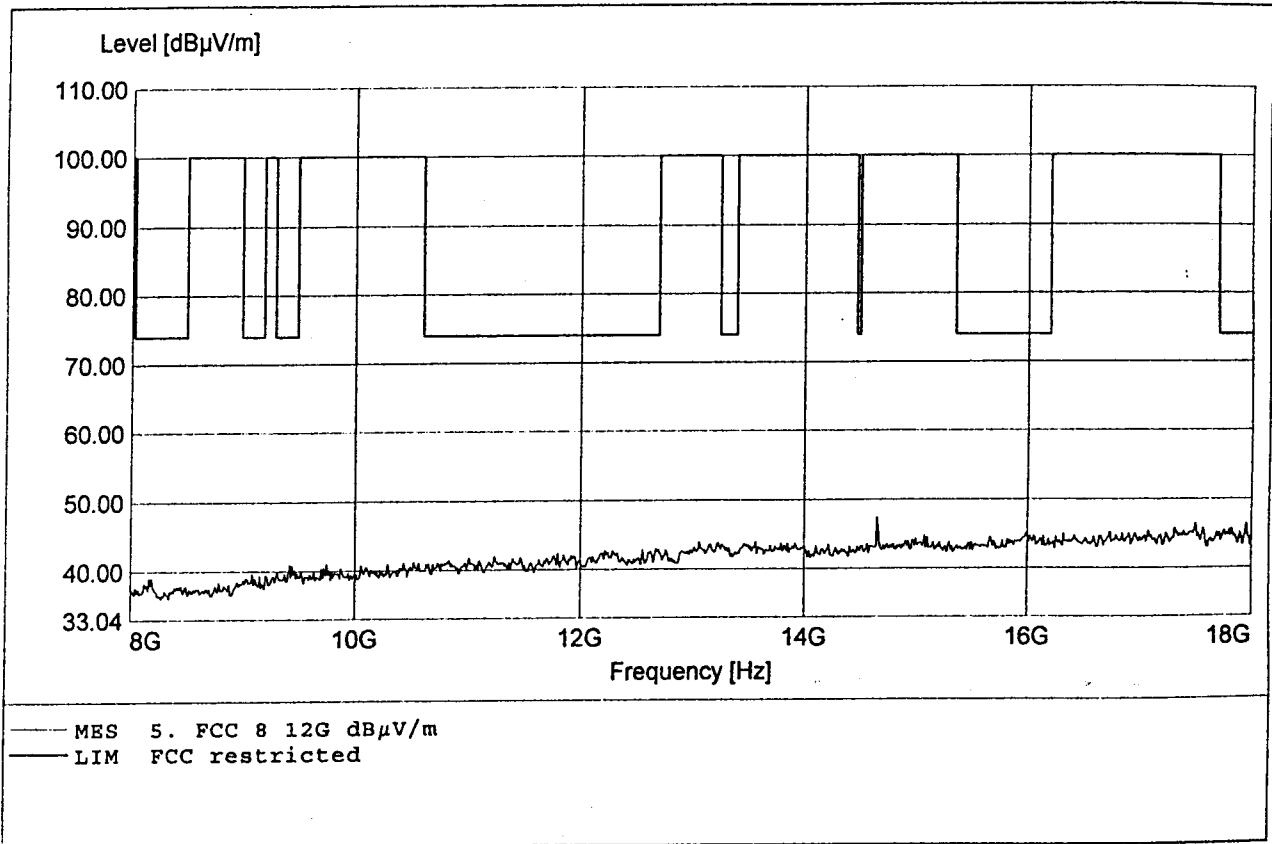

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S


Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:17444,44MHz Pmax:46,54dBµV/m RBW=1MHz

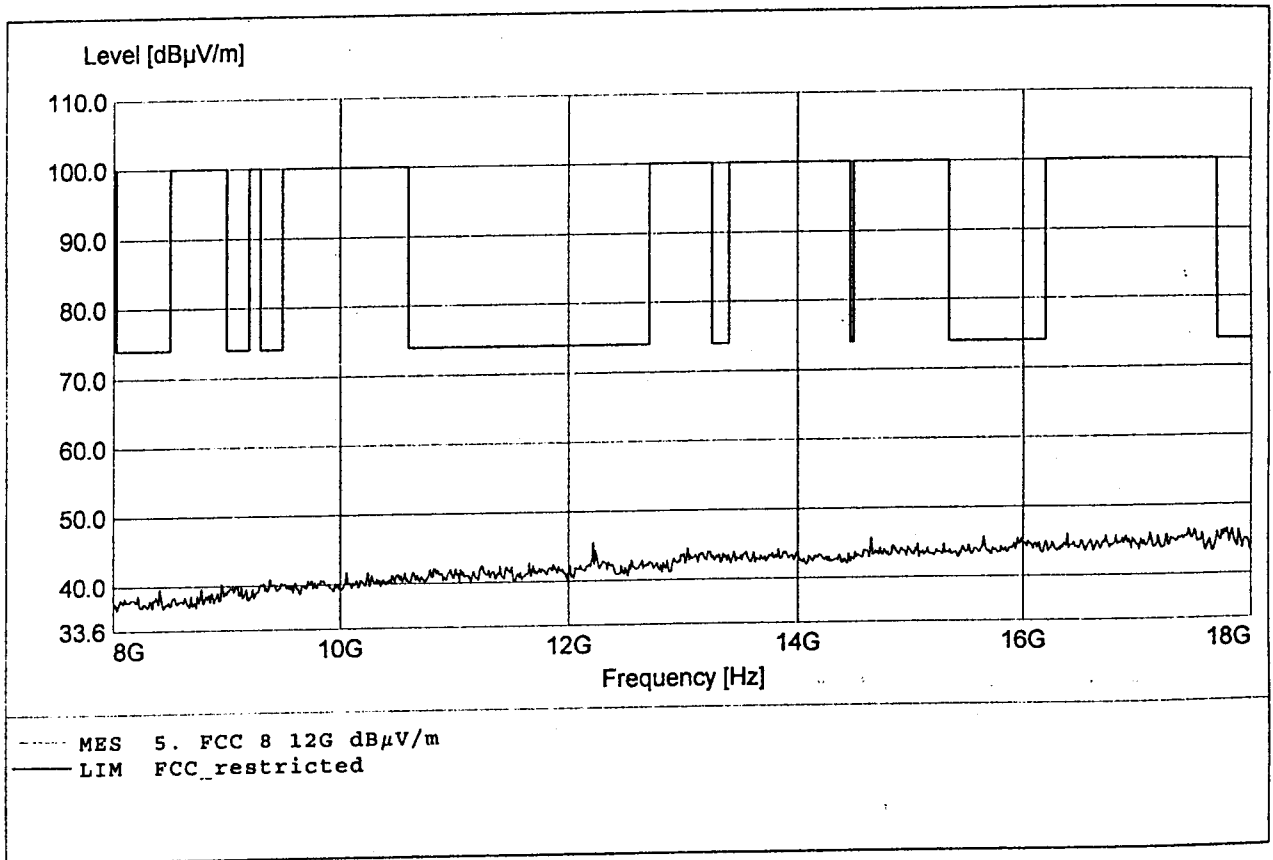

**Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C**

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S

Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:25848,33MHz Pmax:56,61dBµV/m RBW=1MHz

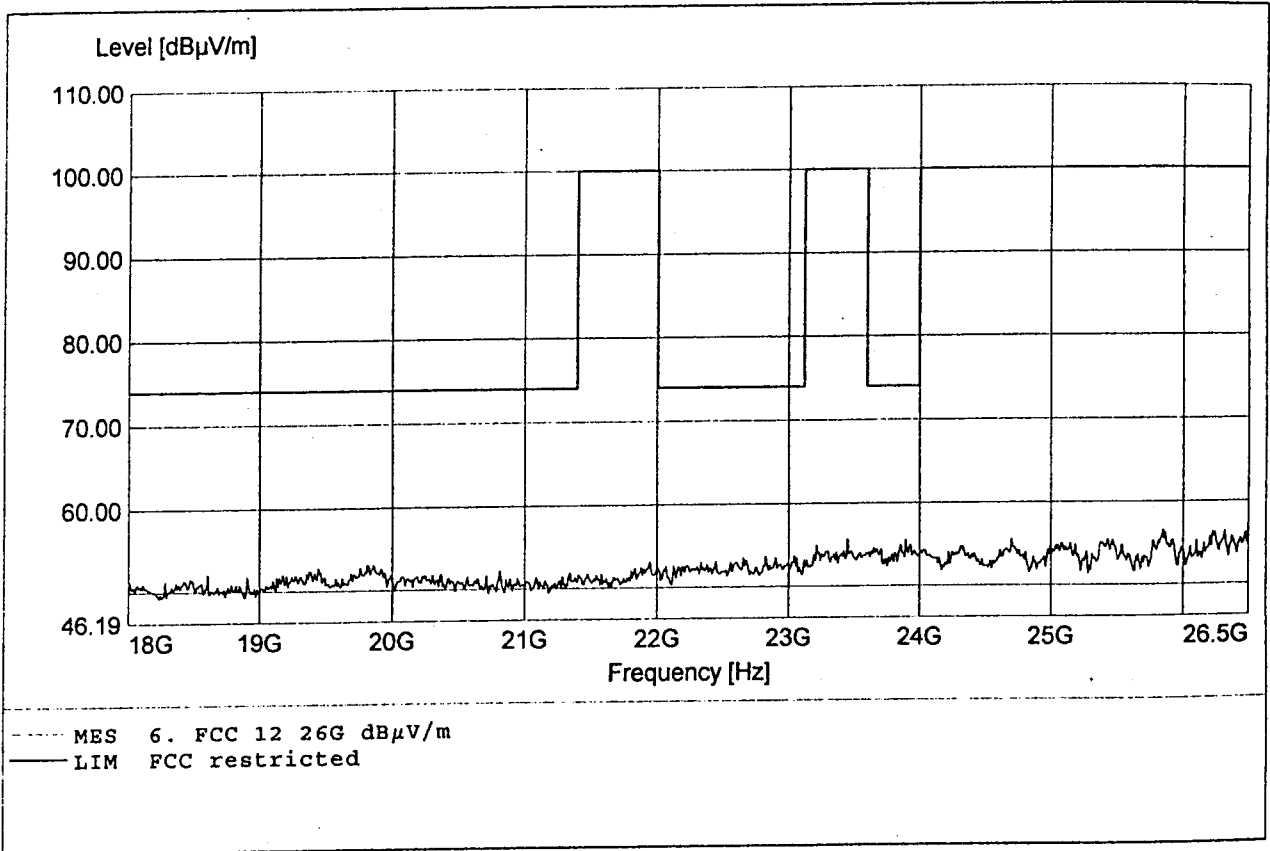

Spurious emissions Field Strength Tx
FCC RULES PART 15, SUBPART C

EUT/Model : 2,4GHz DECT/ RFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Applicant: Kirk Telecom A/S

Temperature/ Voltage: 22°C / 230 V (AC/DC adaptor)
Test Site / Operator: ETS / Mr. Matz
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:21985,55MHz Pmax:56,95dBμV/m RBW=1MHz

