


Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.914GHz Pmax:-46.83dBm RBW: 100 kHz

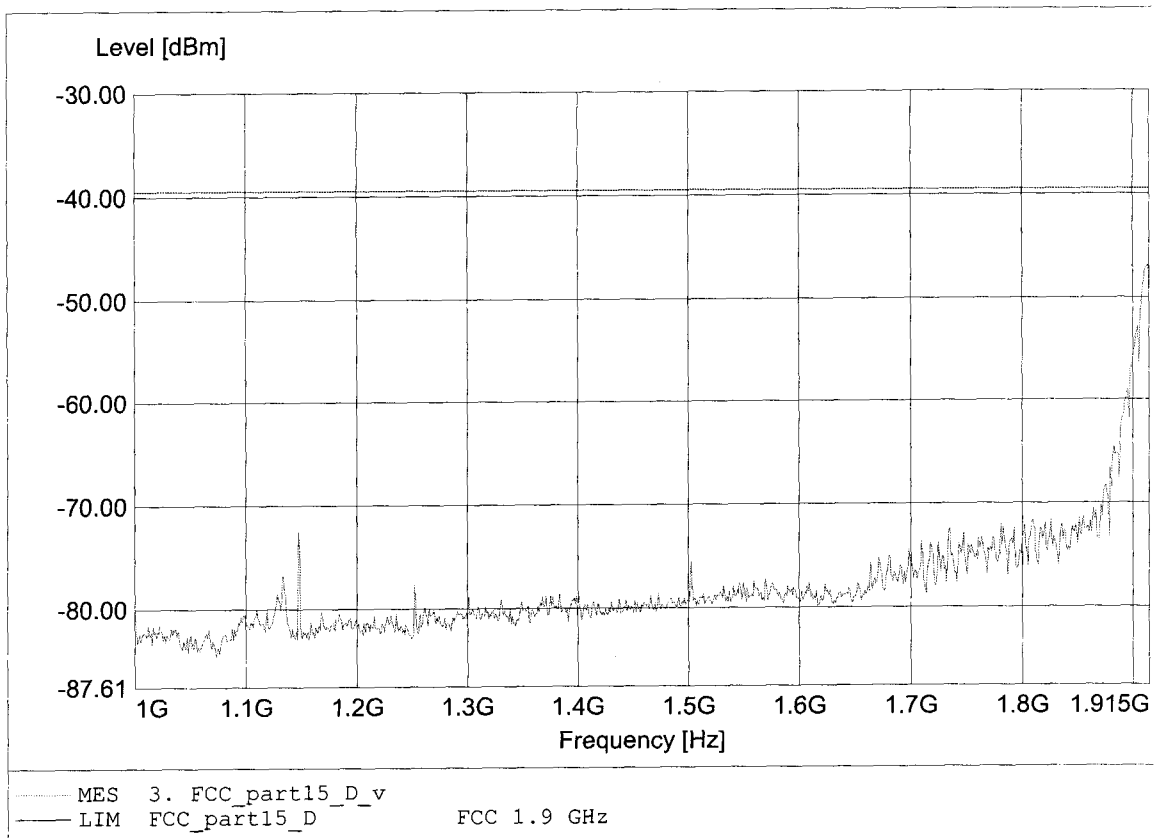

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.914GHz Pmax:-48.46dBm RBW: 100 kHz

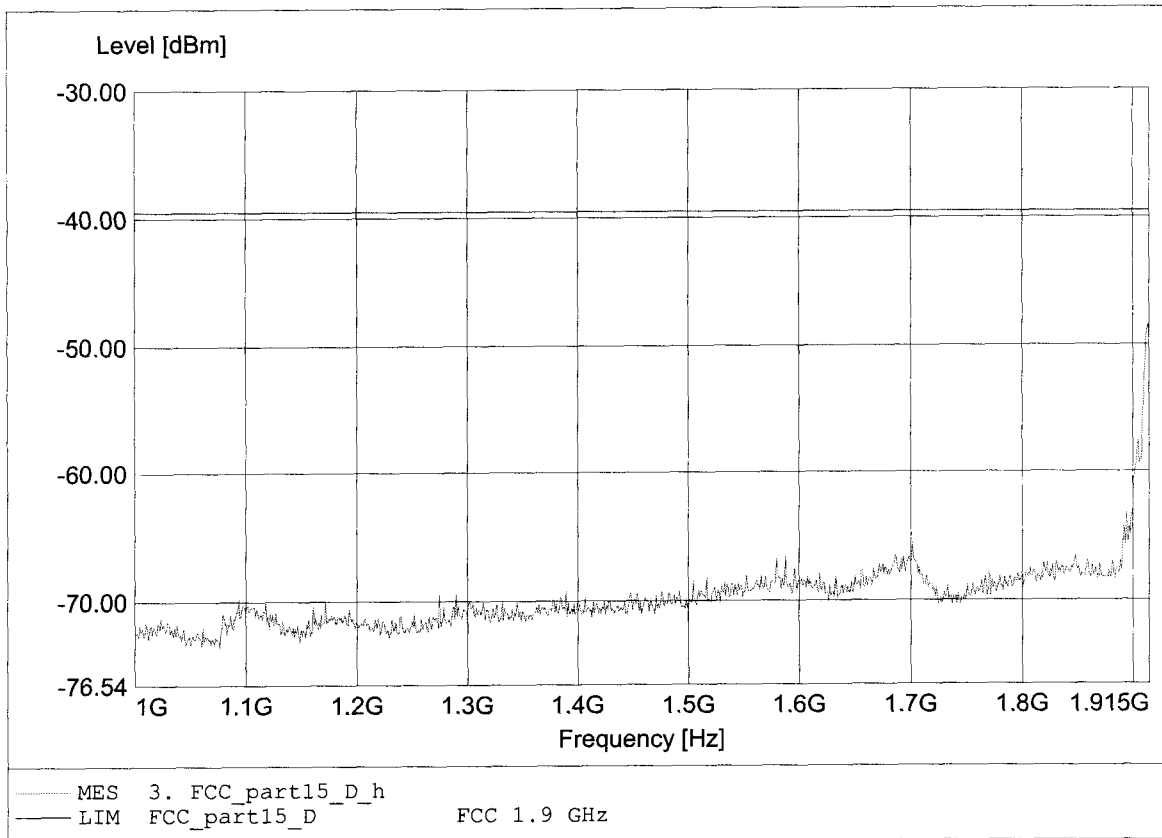

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.982GHz Pmax:-56.66dBm RBW: 100 kHz

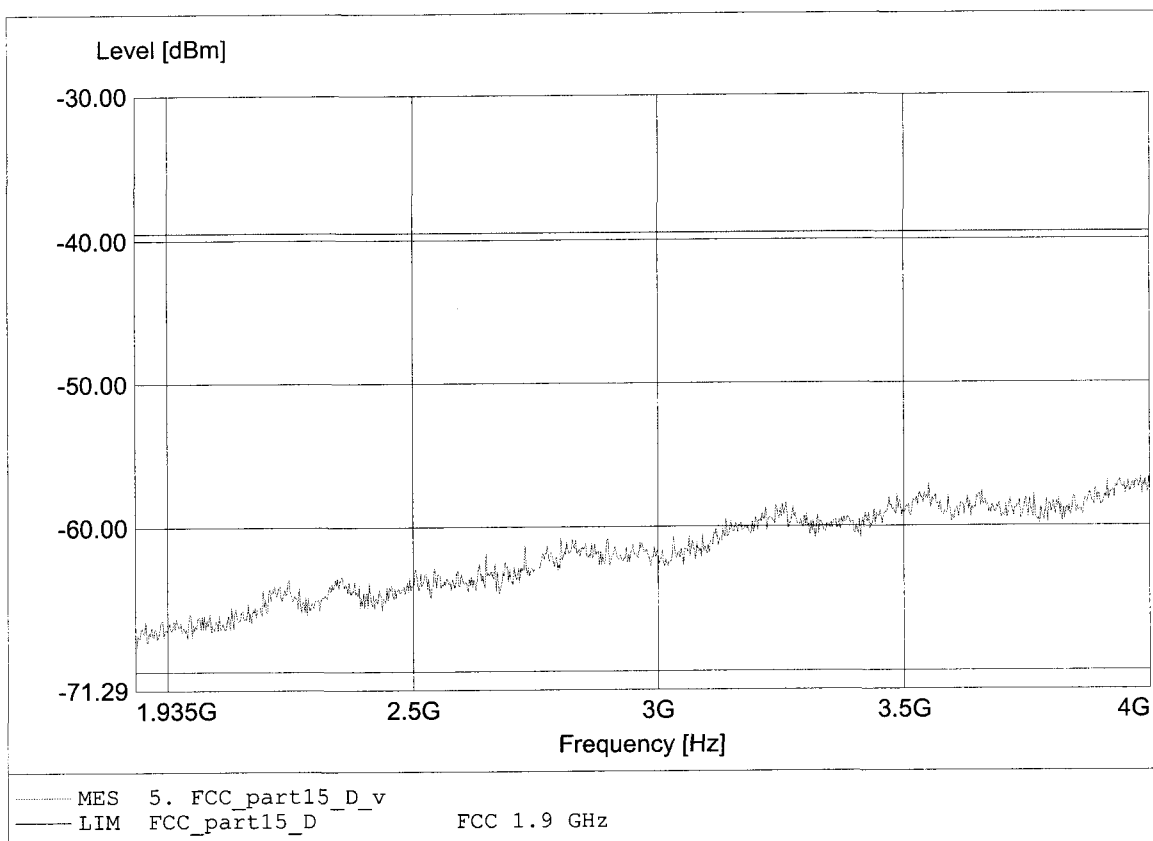

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.961GHz Pmax:-56.44dBm RBW: 100 kHz

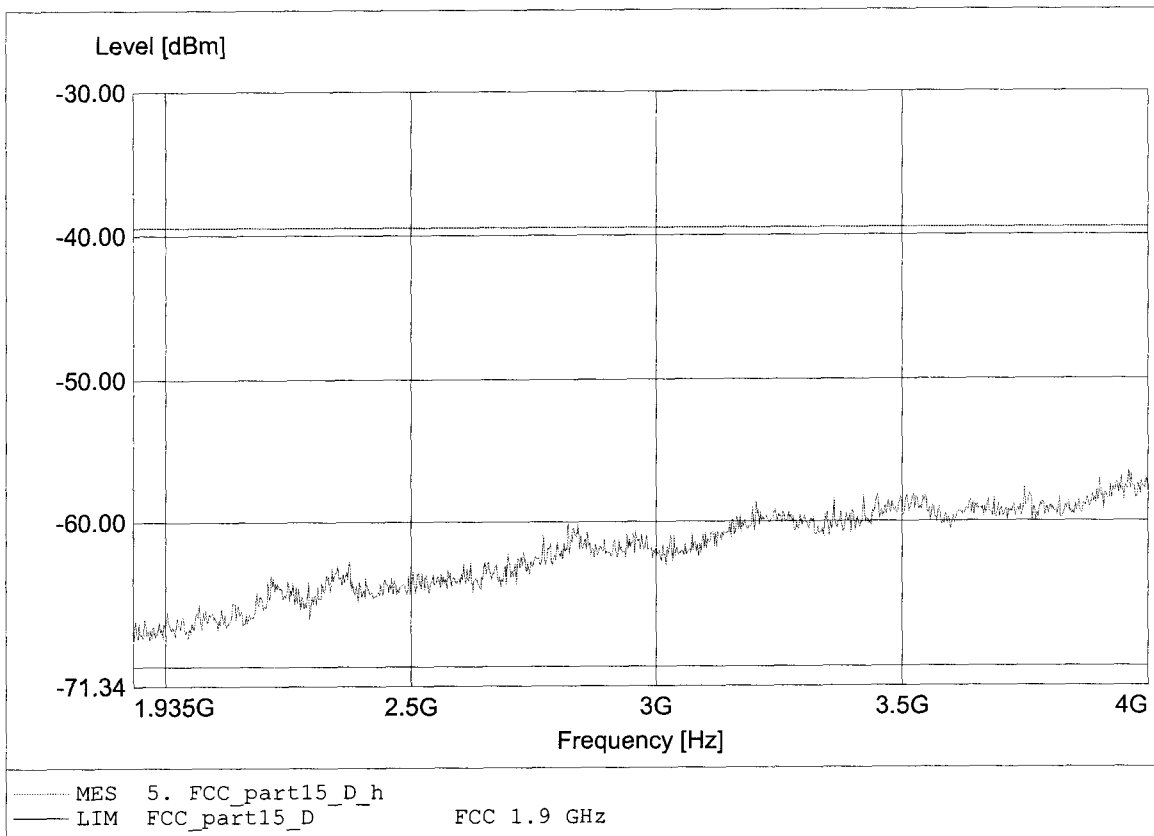

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-53.91dBm RBW: 10 kHz

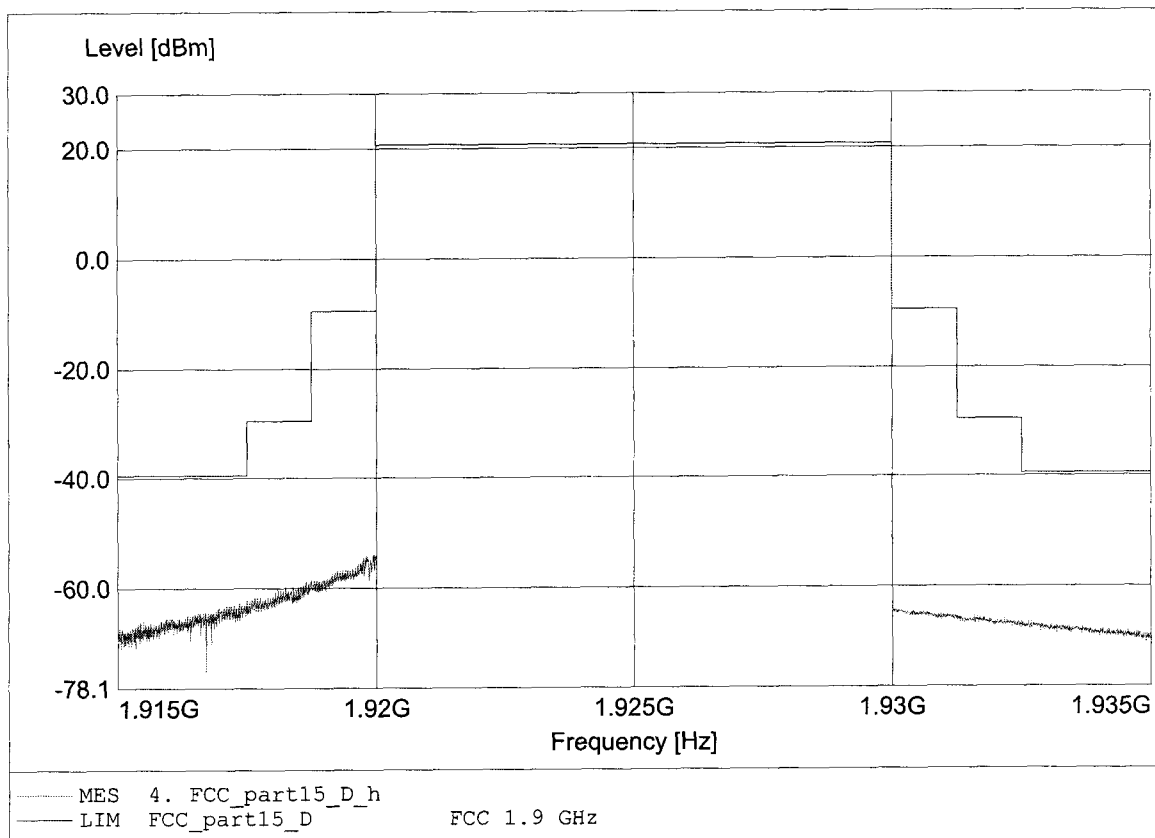

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-48.71dBm RBW: 10 kHz

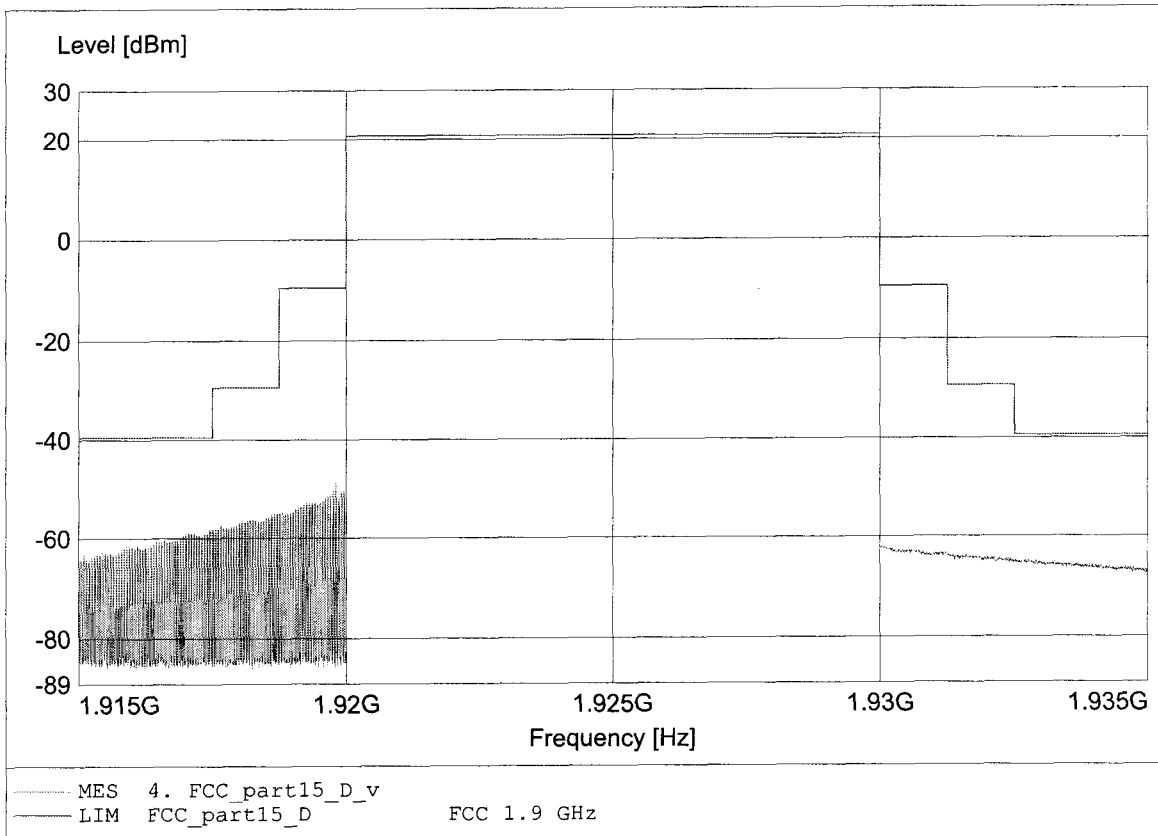

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0 / antenna 1
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-45.17dBm RBW: 10 kHz

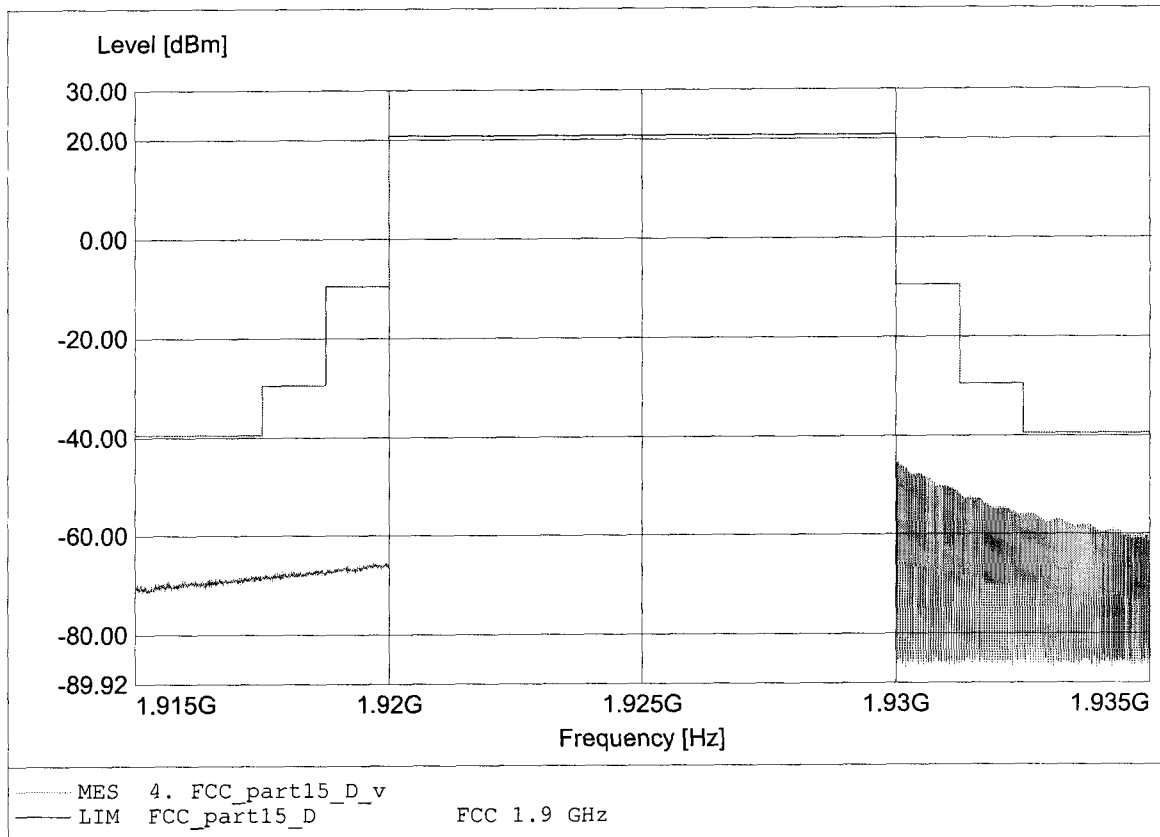

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-47.08dBm RBW: 10 kHz

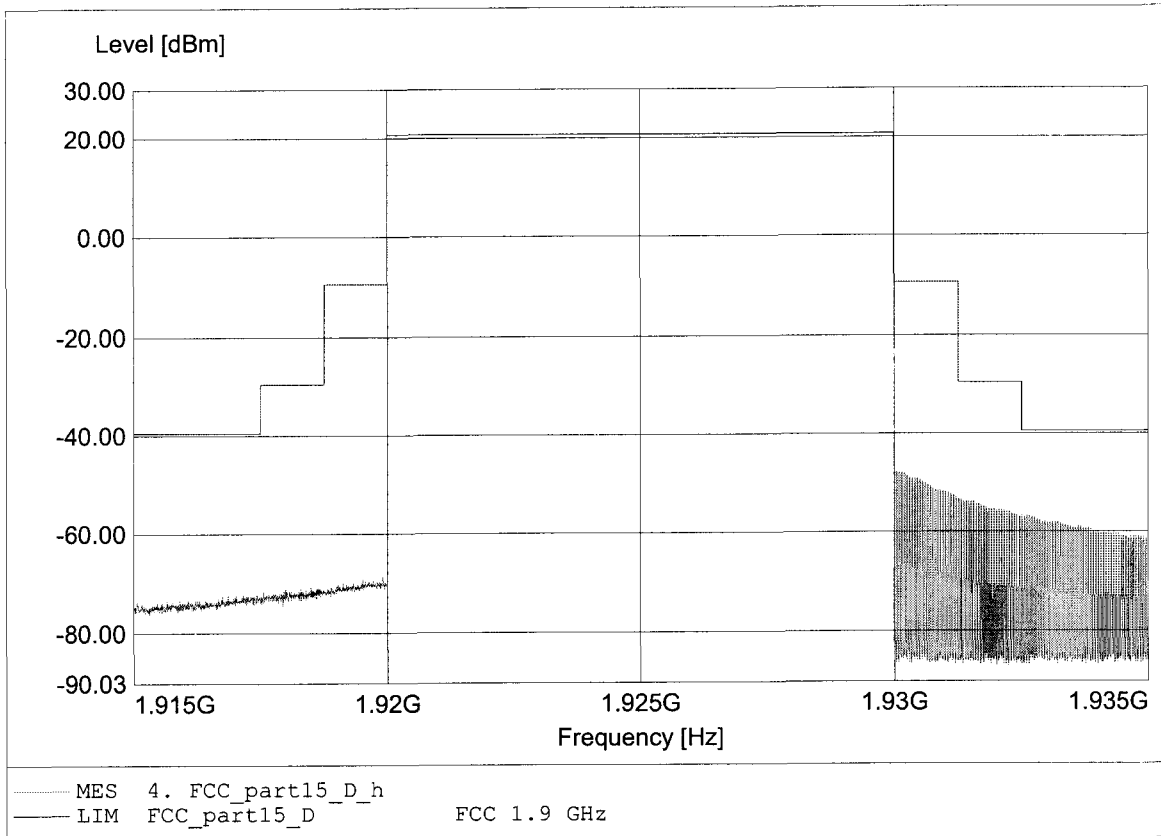

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPSC DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.857GHz Pmax:-78.35dBm RBW:10 kHz

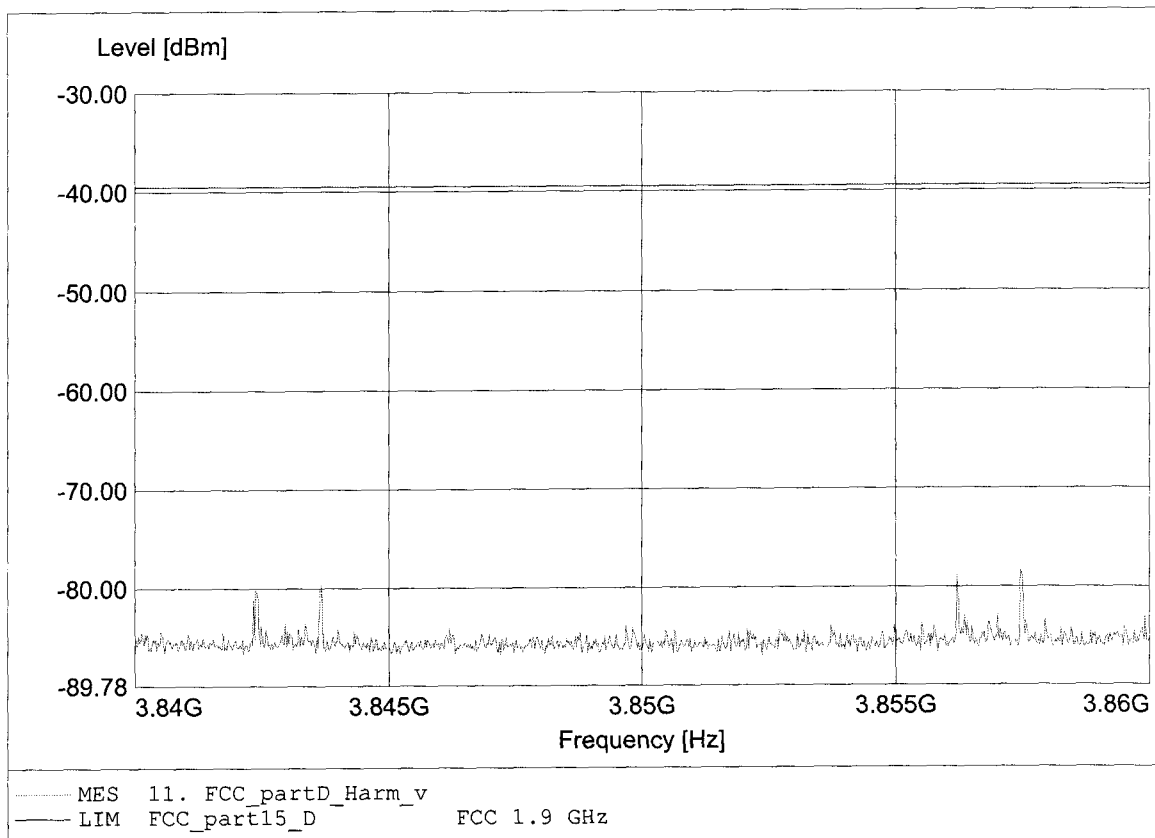

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.856GHz Pmax:-80.37dBm RBW:10 kHz

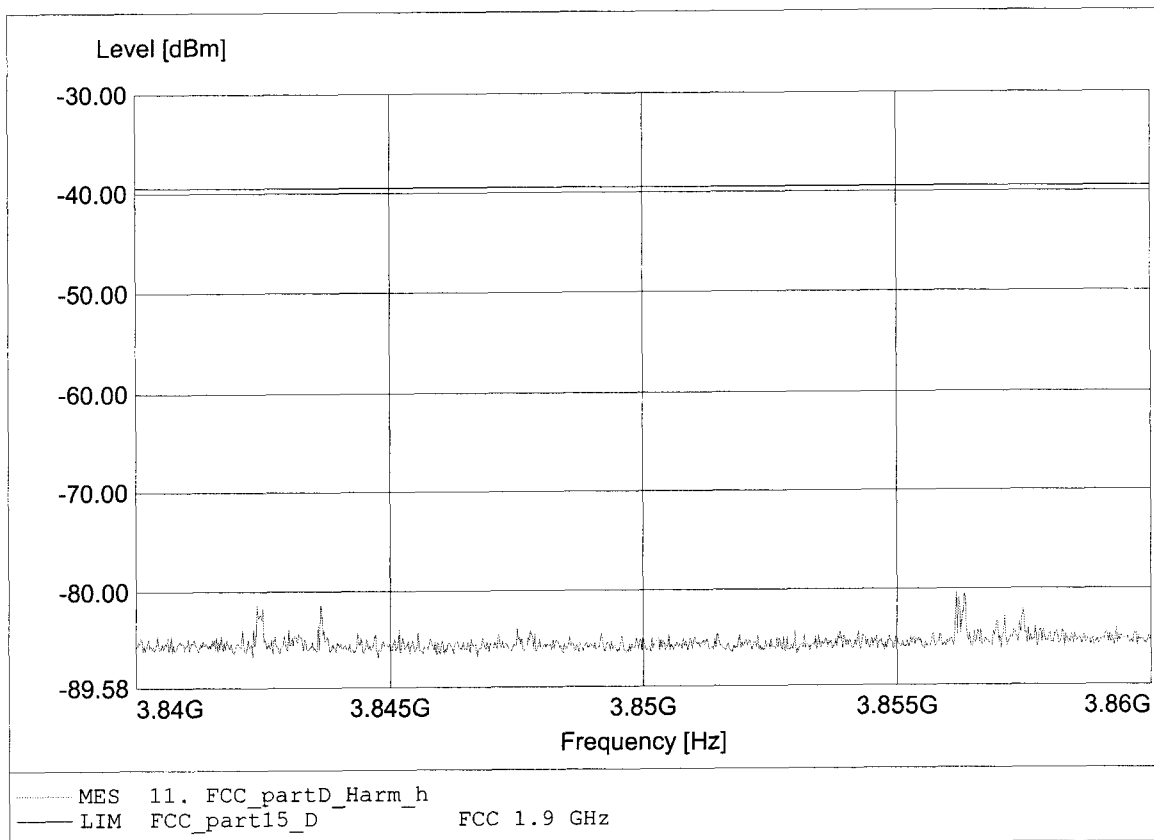

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.785GHz Pmax:-75.70dBm RBW:10 kHz

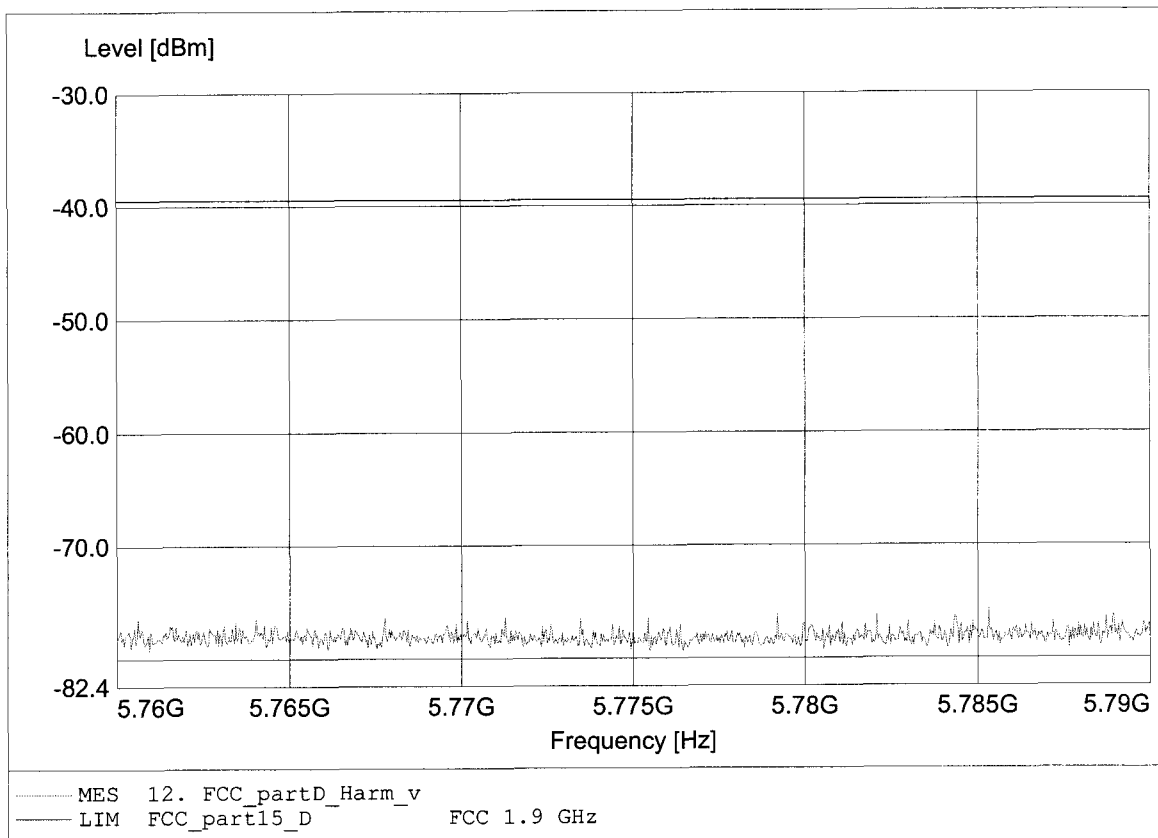

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.764GHz Pmax:-71.82dBm RBW:10 kHz

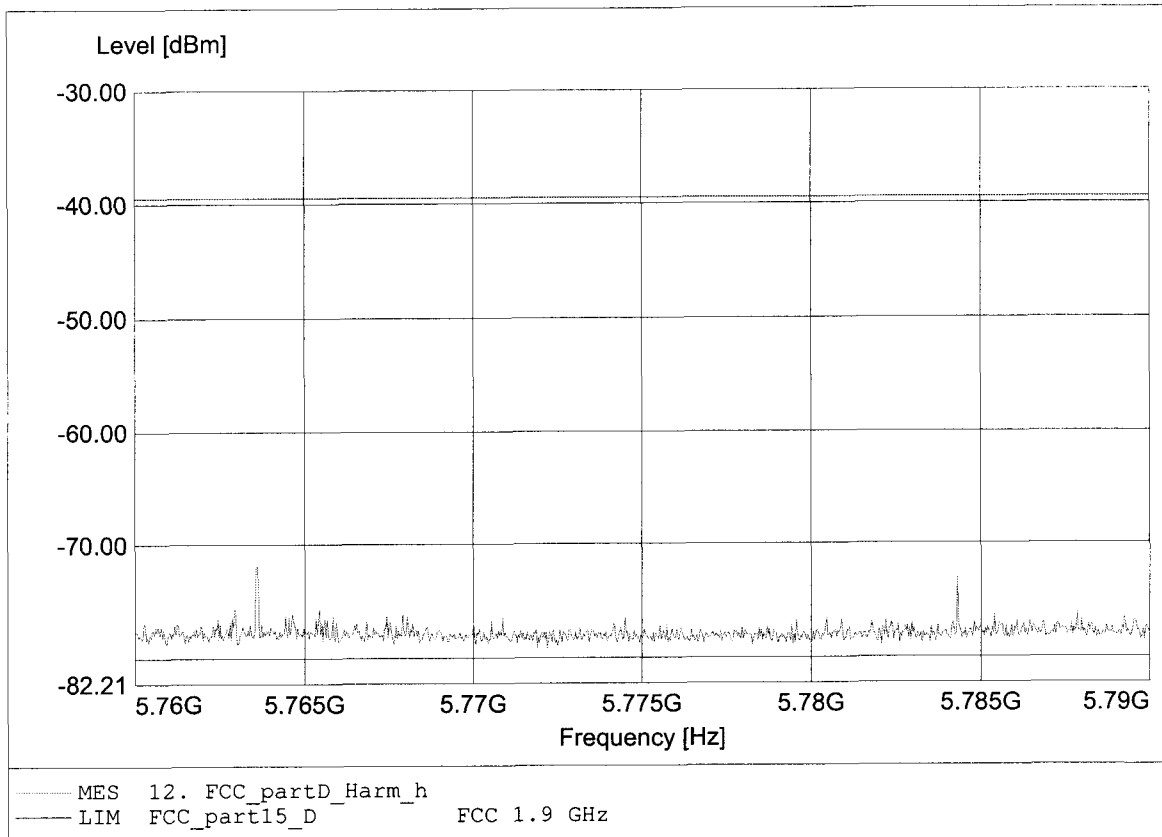

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:7.715GHz Pmax:-68.33dBm RBW:10 kHz

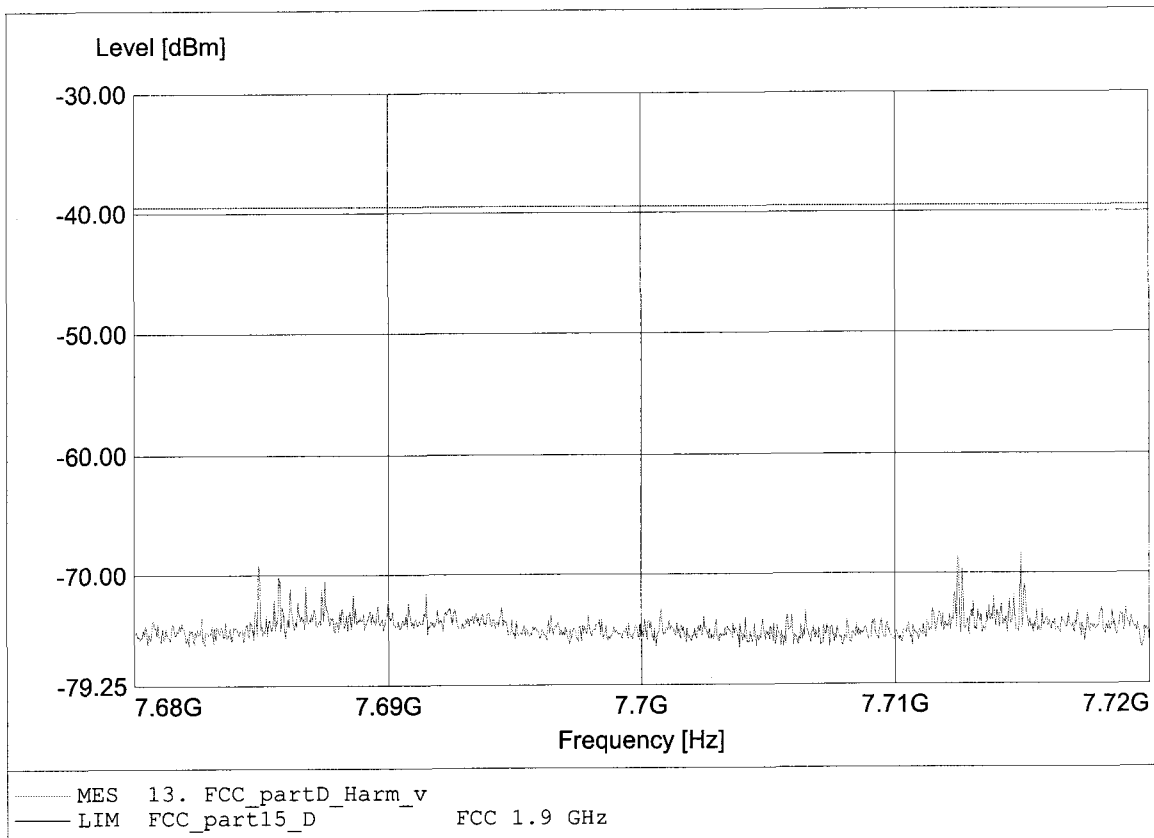

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:7.715GHz Pmax:-68.12dBm RBW:10 kHz

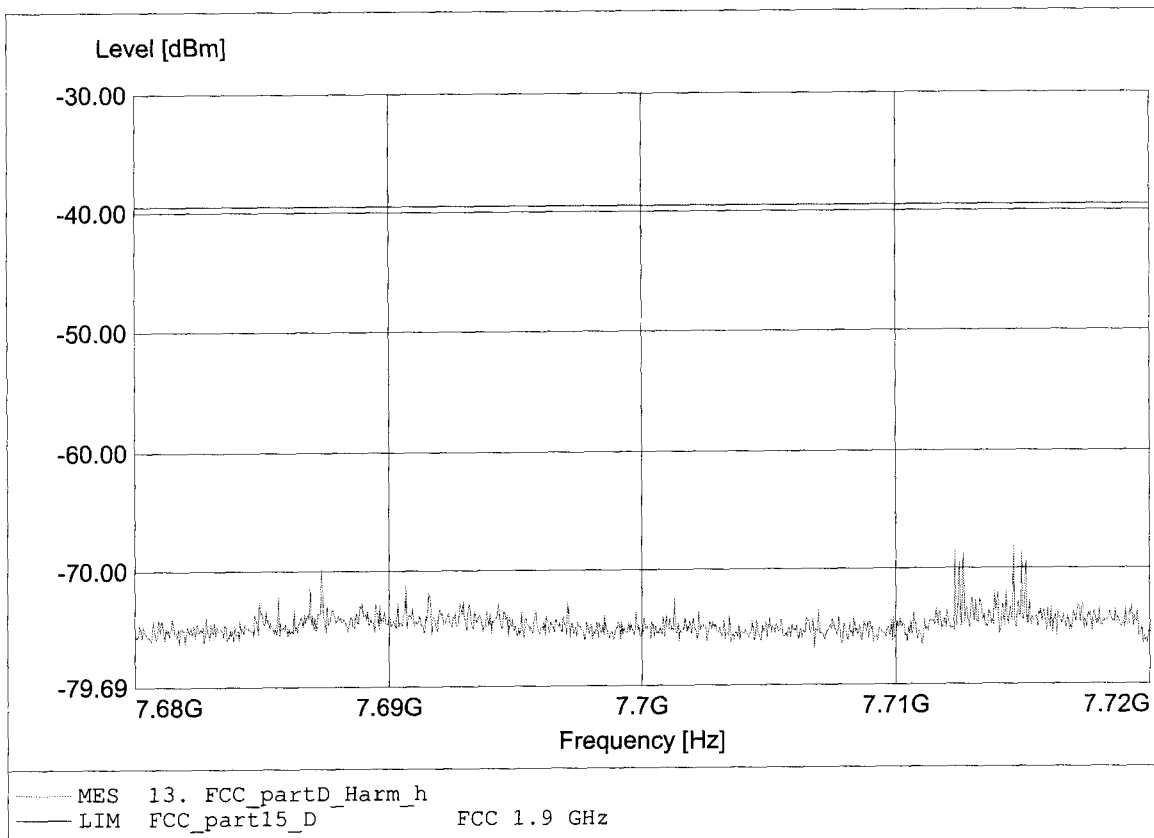

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.606GHz Pmax:-62.34dBm RBW:10 kHz

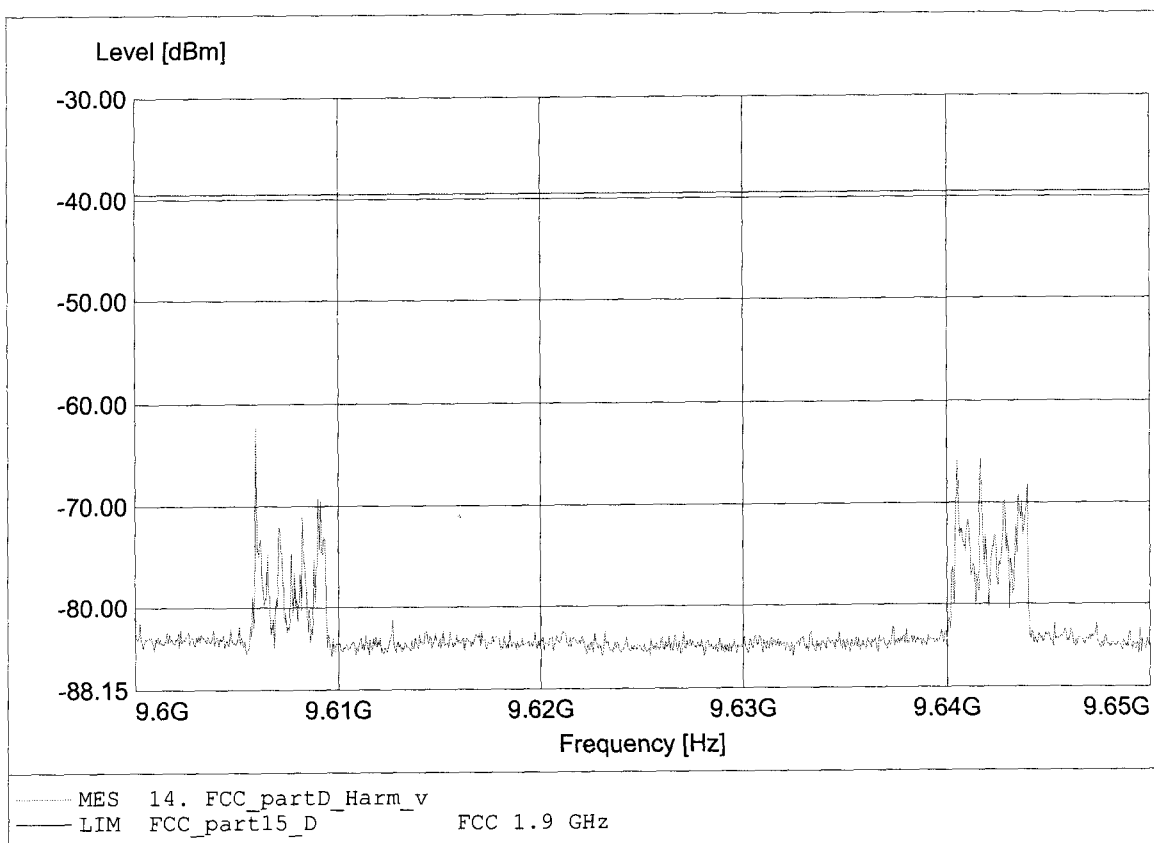

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.641GHz Pmax:-66.89dBm RBW:10 kHz

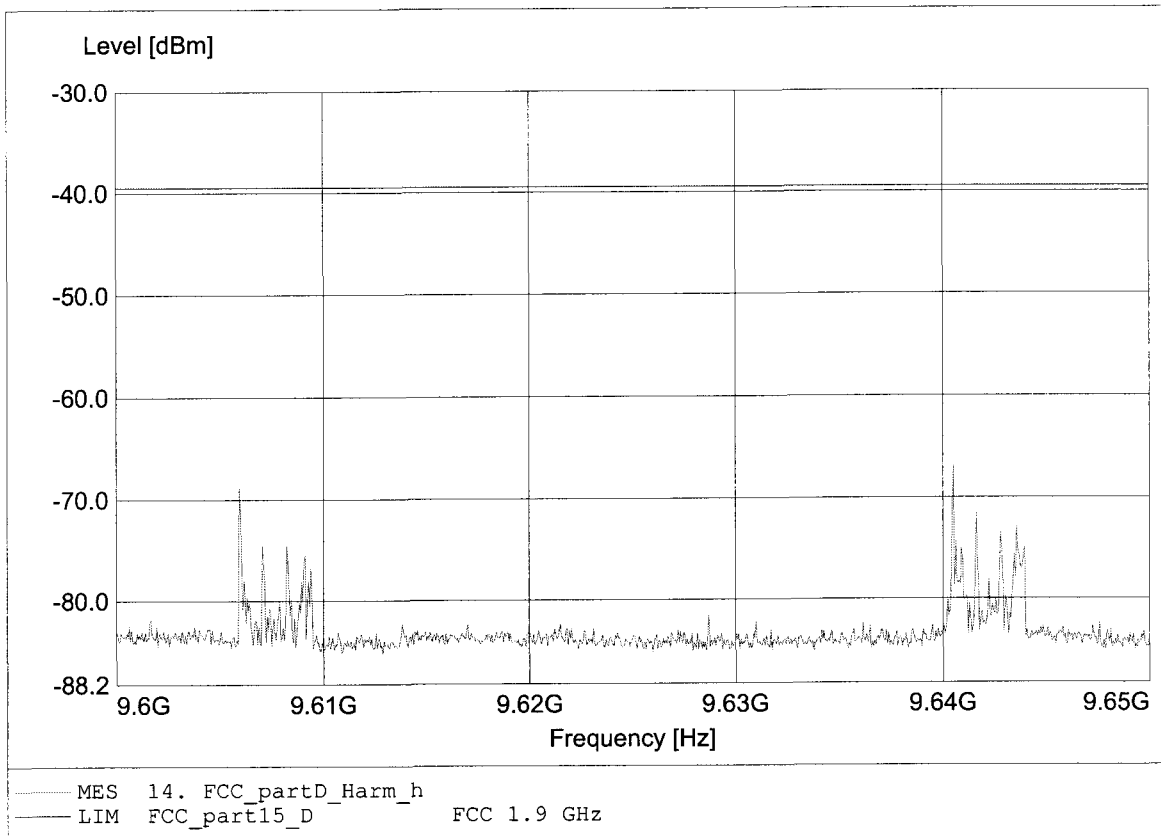

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.527GHz Pmax:-76.44dBm RBW:10 kHz

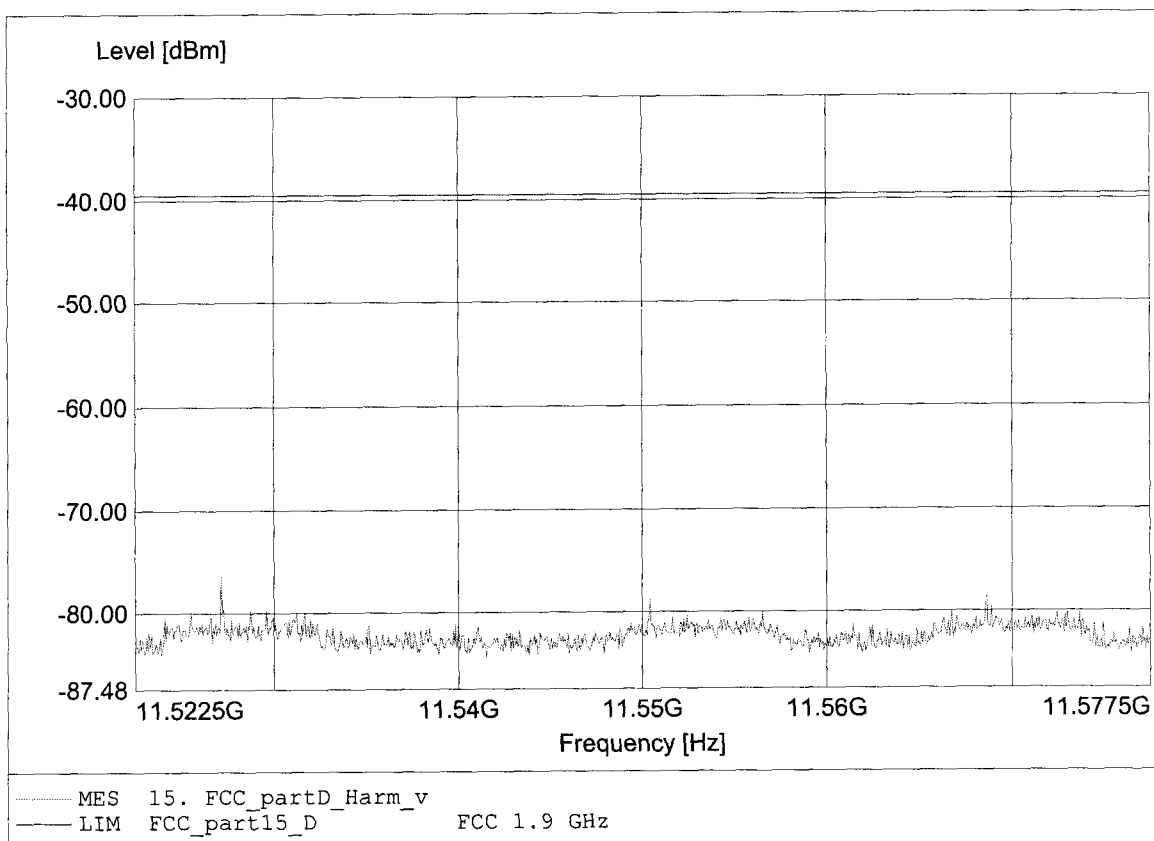

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.569GHz Pmax:-66.03dBm RBW:10 kHz

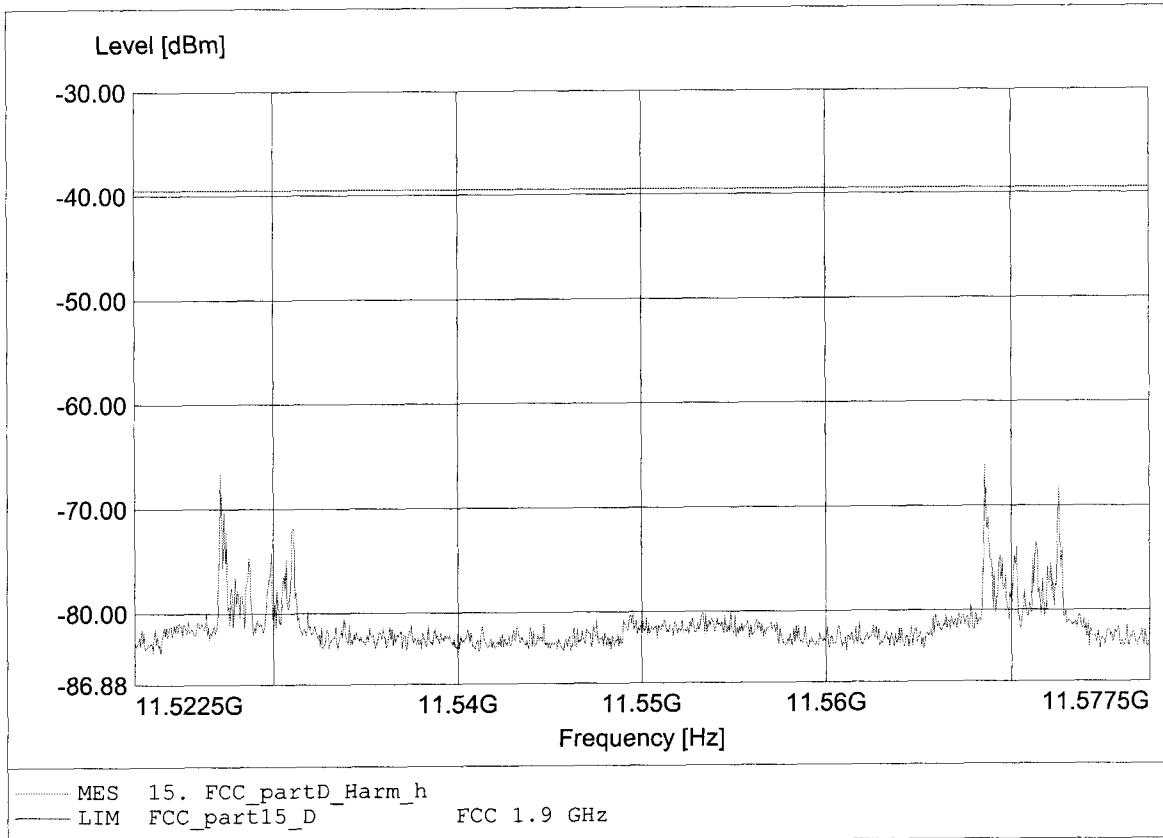

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.505GHz Pmax:-78.60dBm RBW:10 kHz

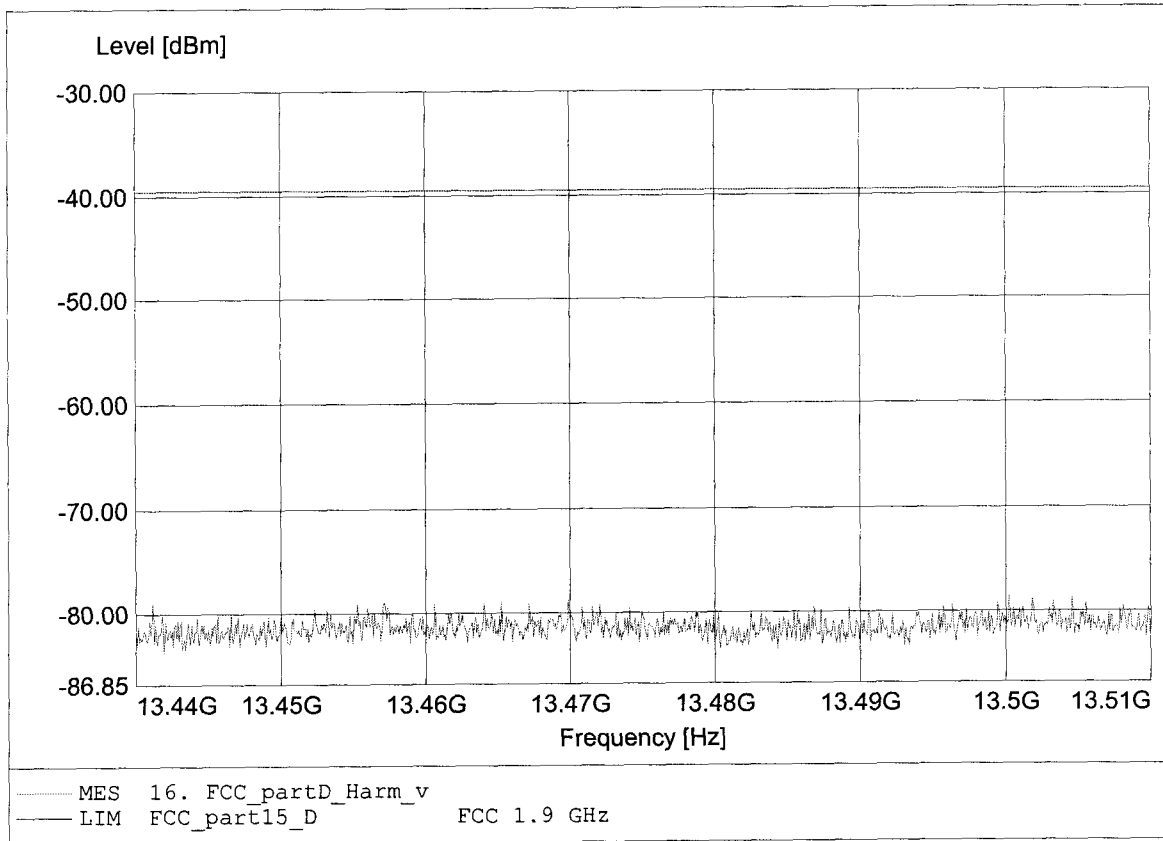

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.497GHz Pmax:-63.95dBm RBW:10 kHz

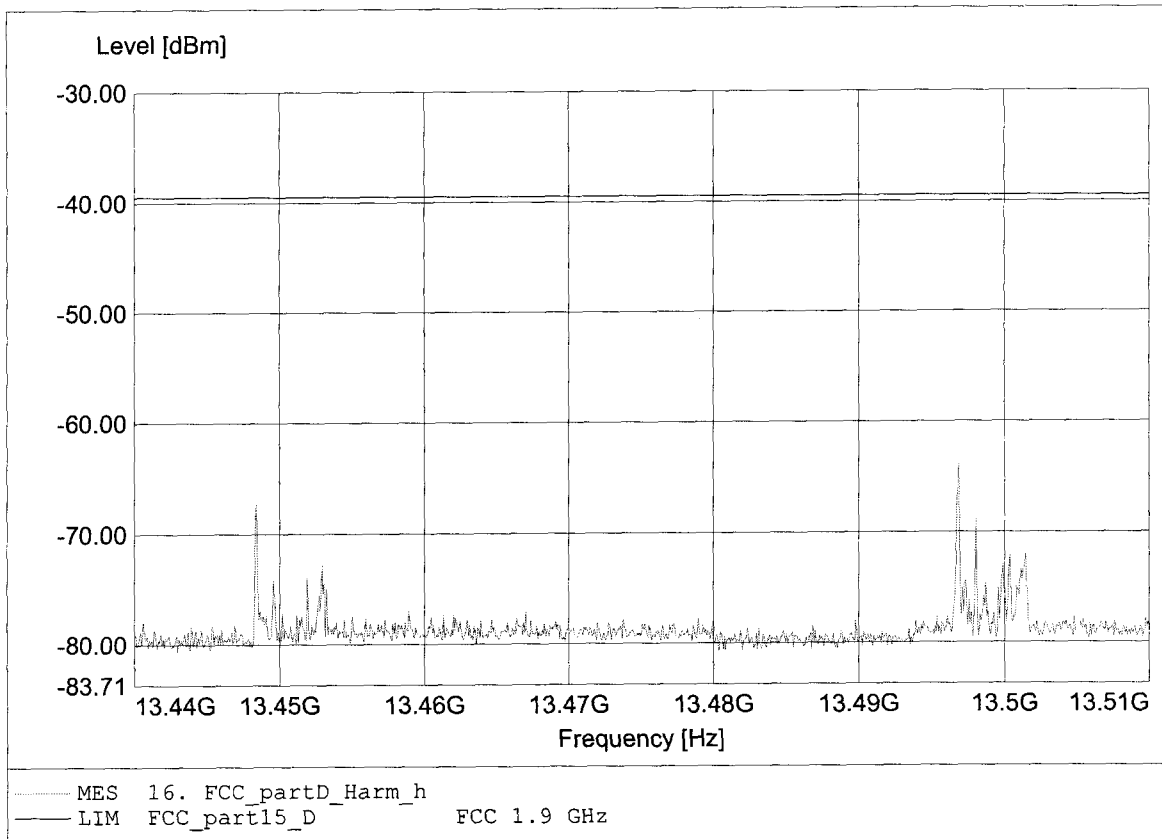

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.392GHz Pmax:-78.28dBm RBW:10 kHz

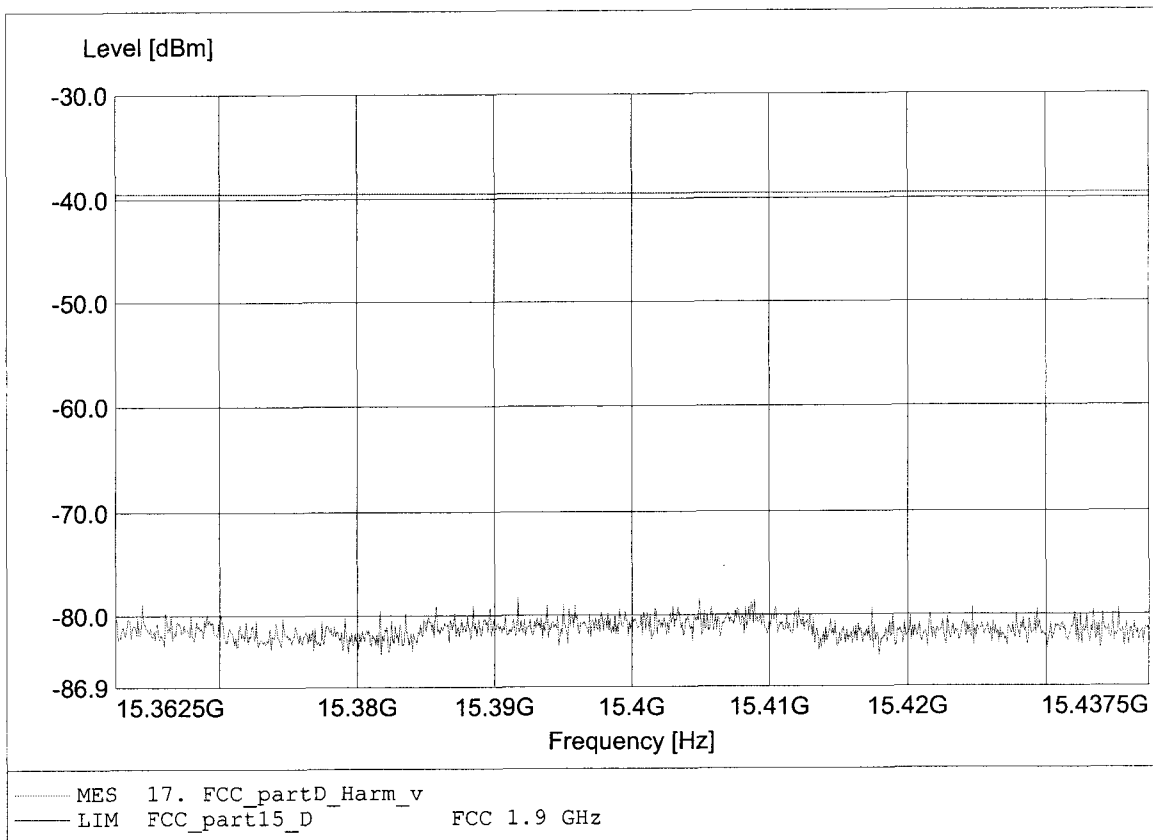

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.402GHz Pmax:-77.53dBm RBW:10 kHz

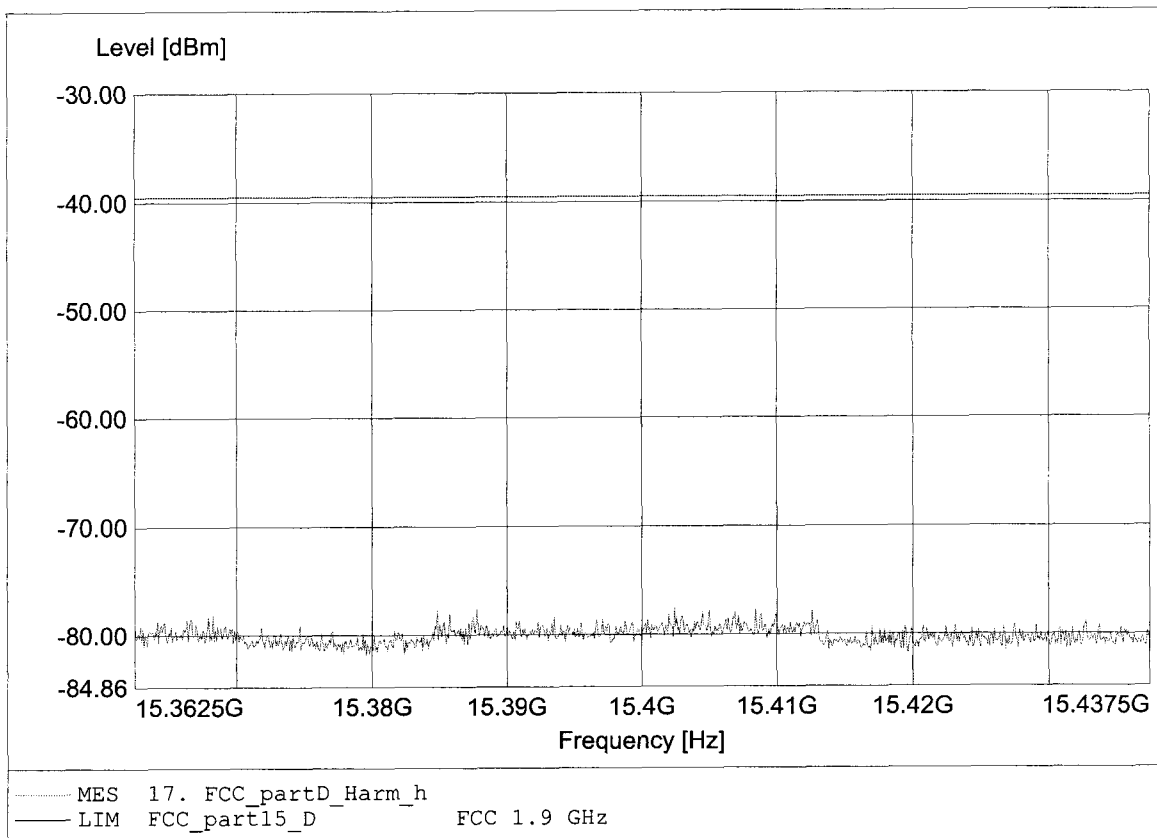

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.348GHz Pmax:-76.83dBm RBW:10 kHz

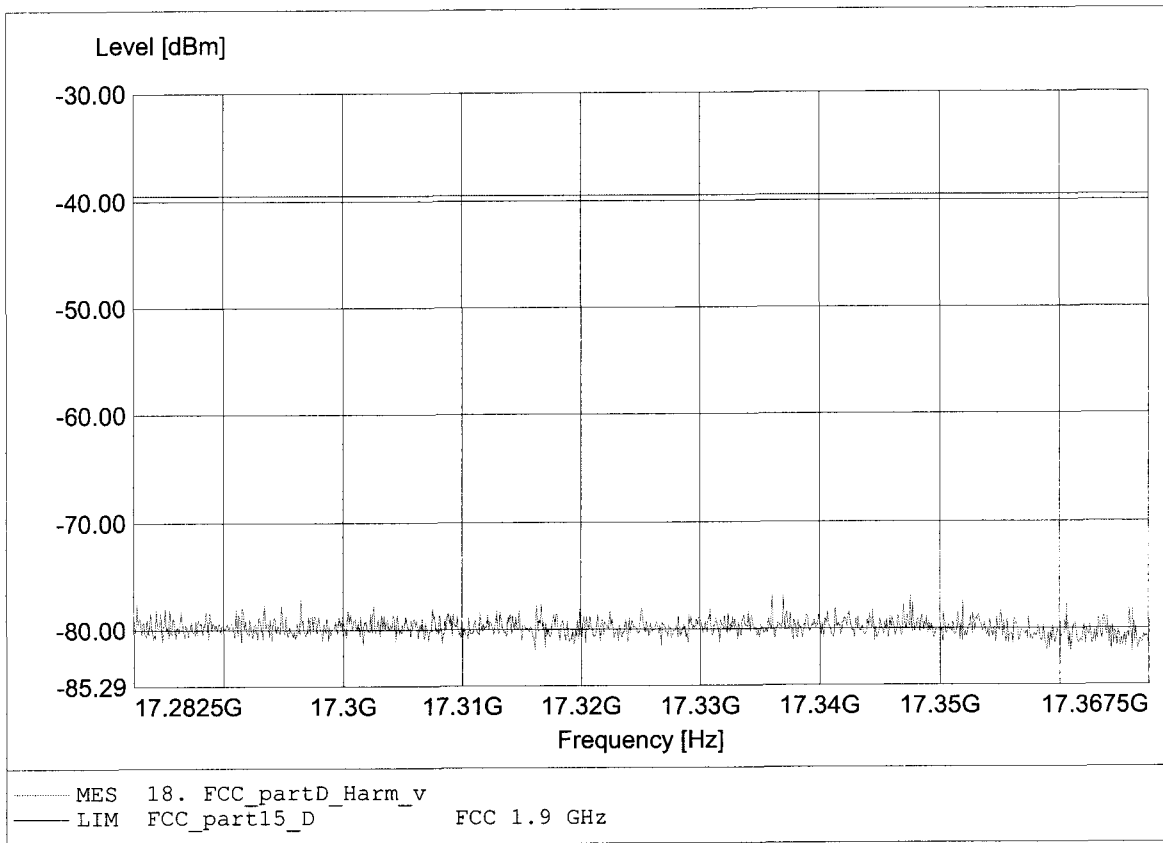

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.352GHz Pmax:-76.33dBm RBW:10 kHz

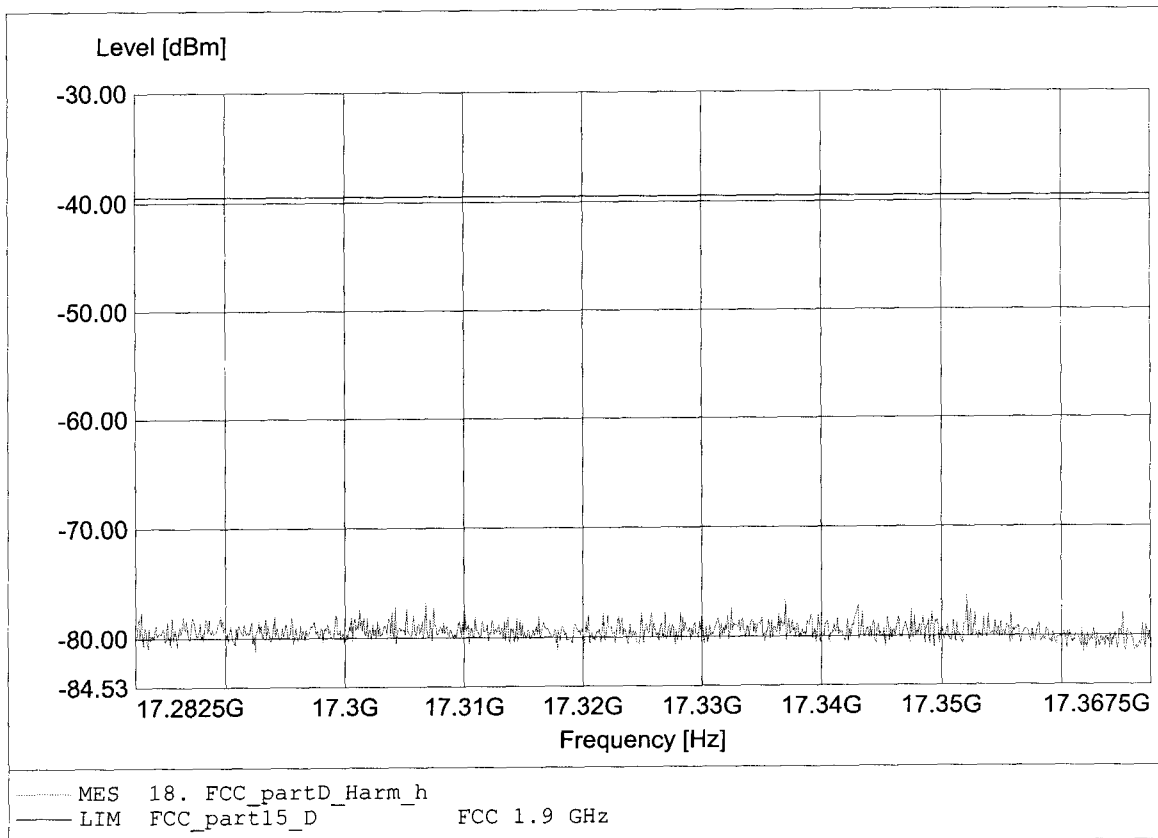

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.263GHz Pmax:-71.85dBm RBW:10 kHz

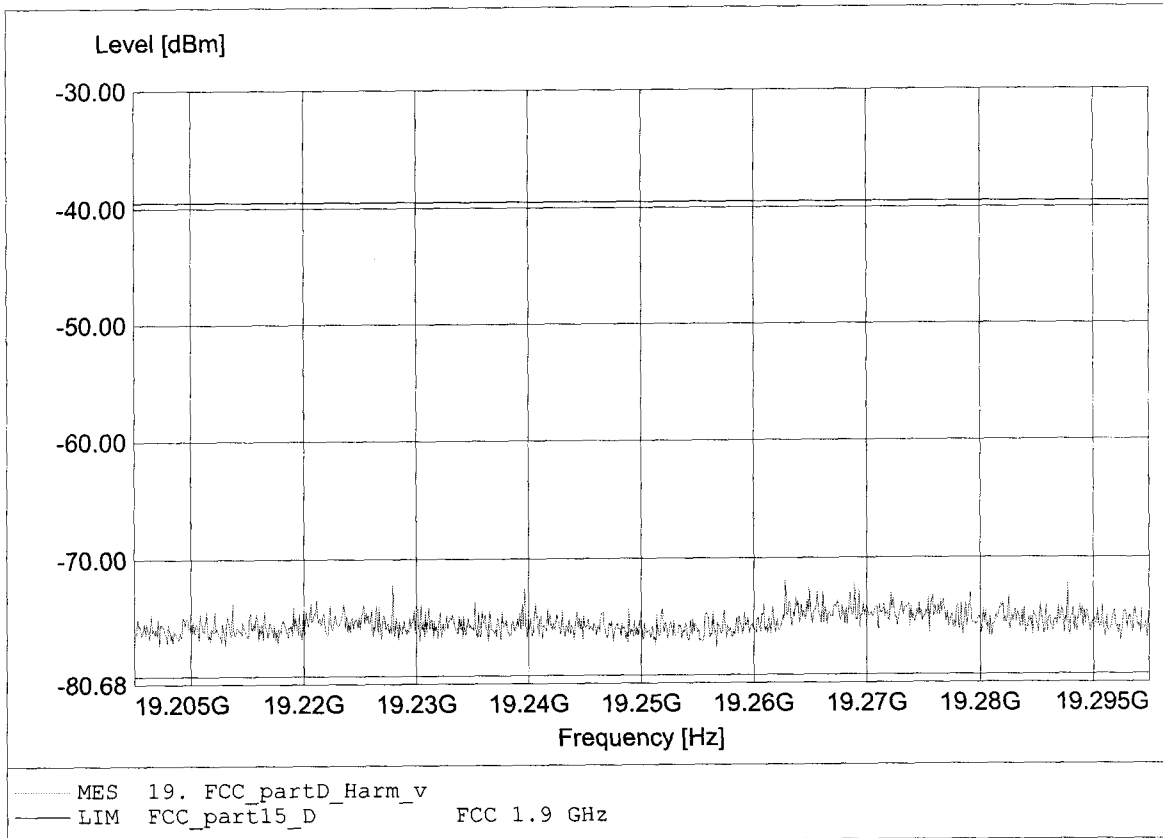

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 1
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.273GHz Pmax:-72.66dBm RBW:10 kHz

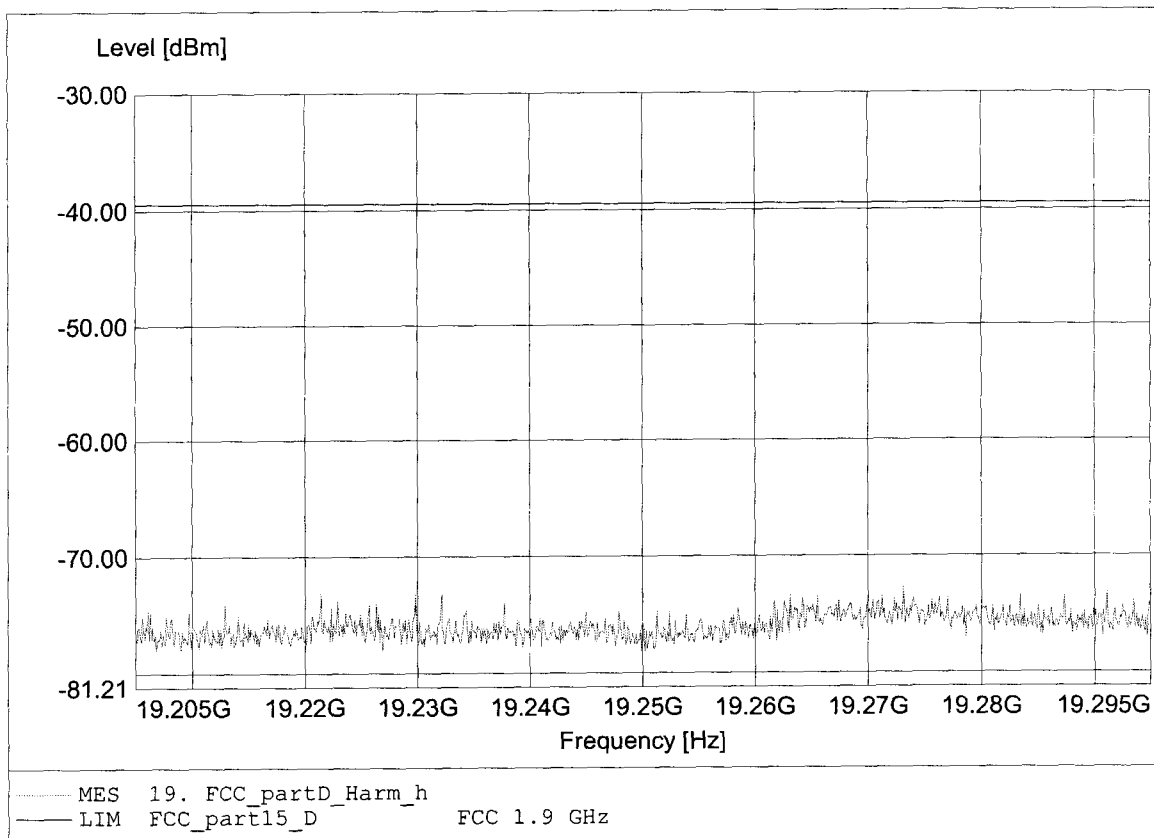

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:169.400MHz Pmax:-56.90dBm RBW: 100 kHz

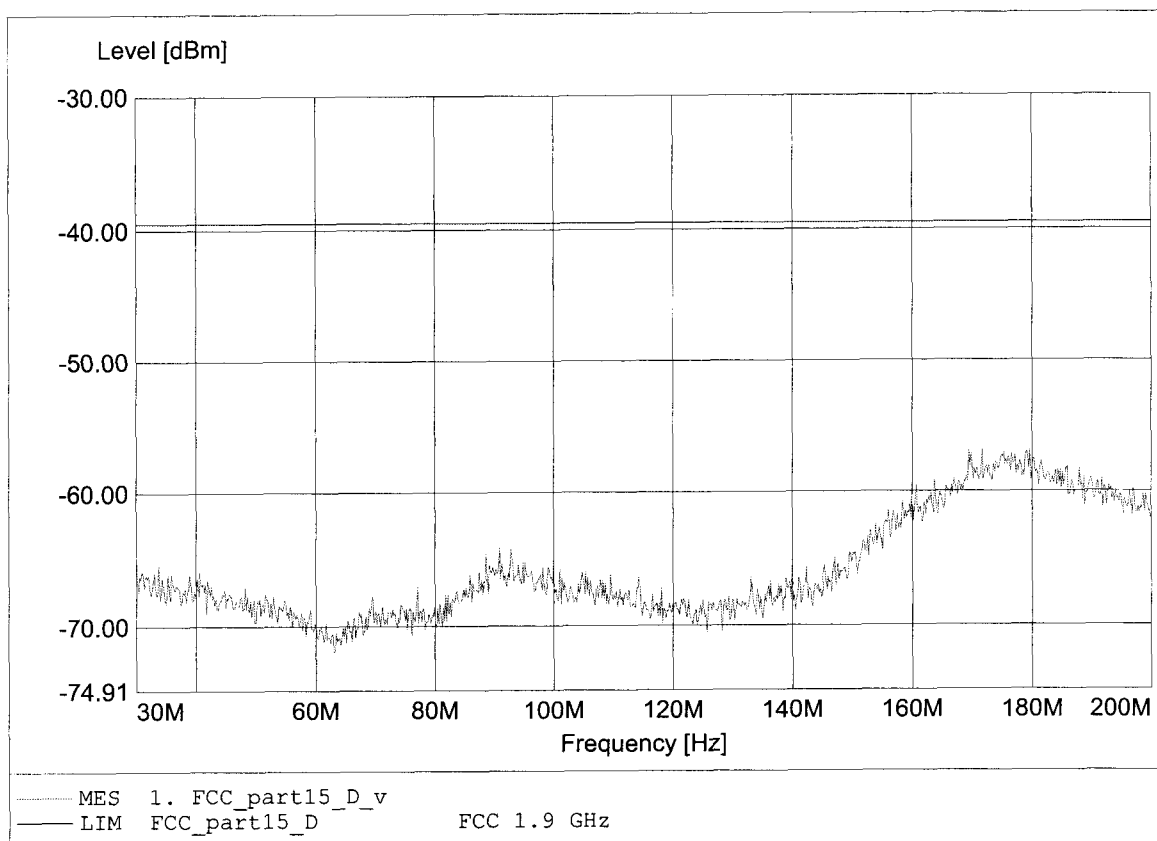

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:199.433MHz Pmax:-61.89dBm RBW: 100 kHz

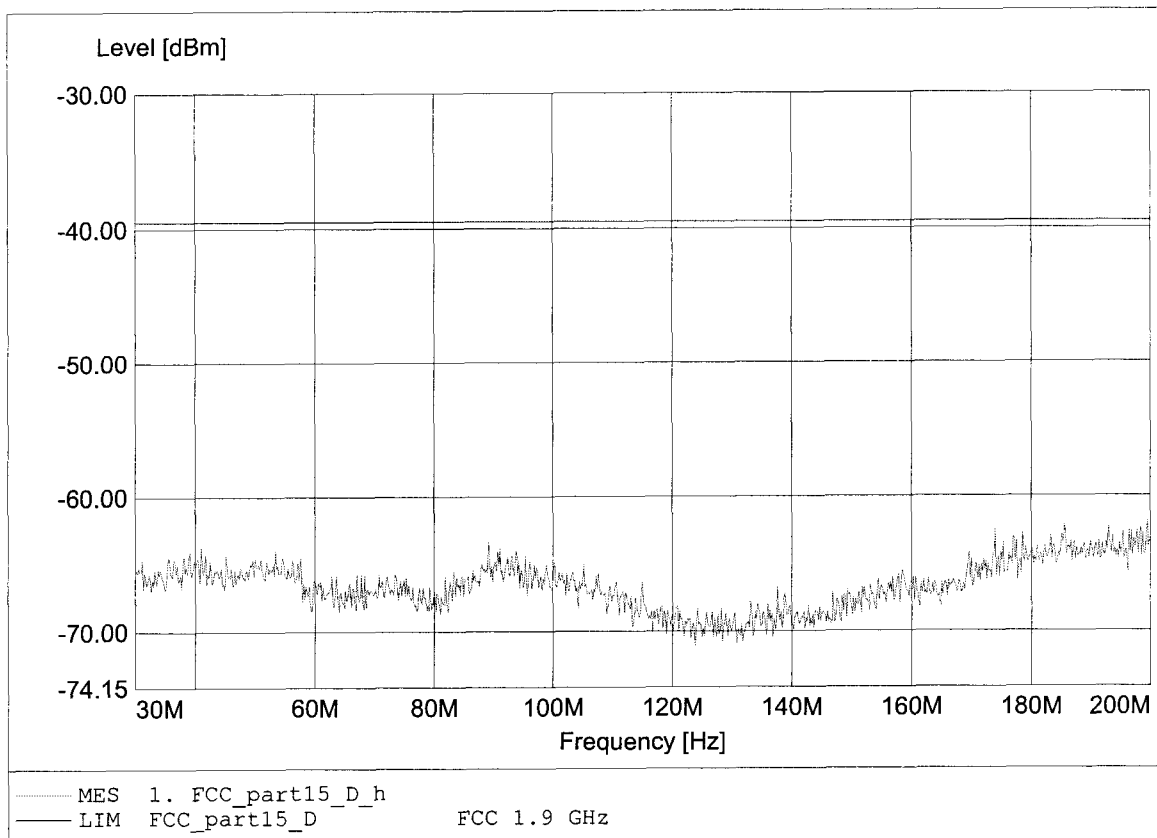

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:995.556MHz Pmax:-73.62dBm RBW: 100 kHz

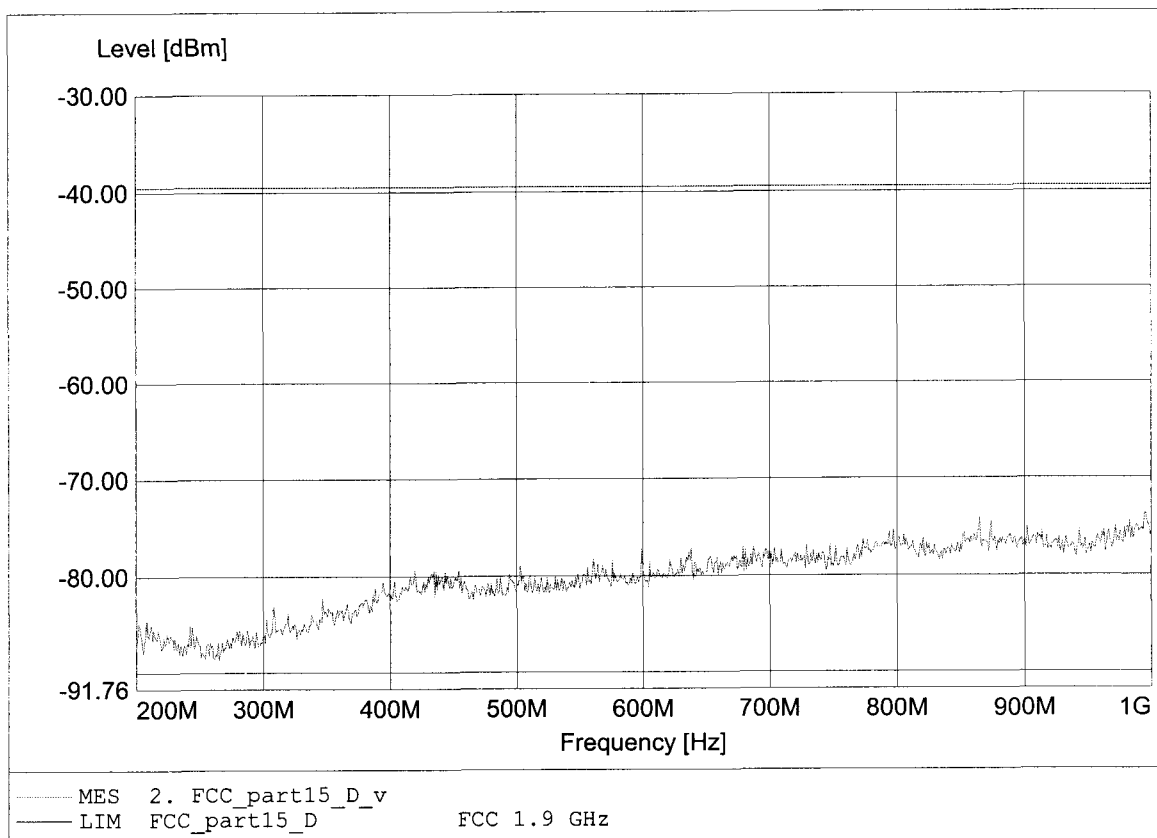

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:993.778MHz Pmax:-76.11dBm RBW: 100 kHz

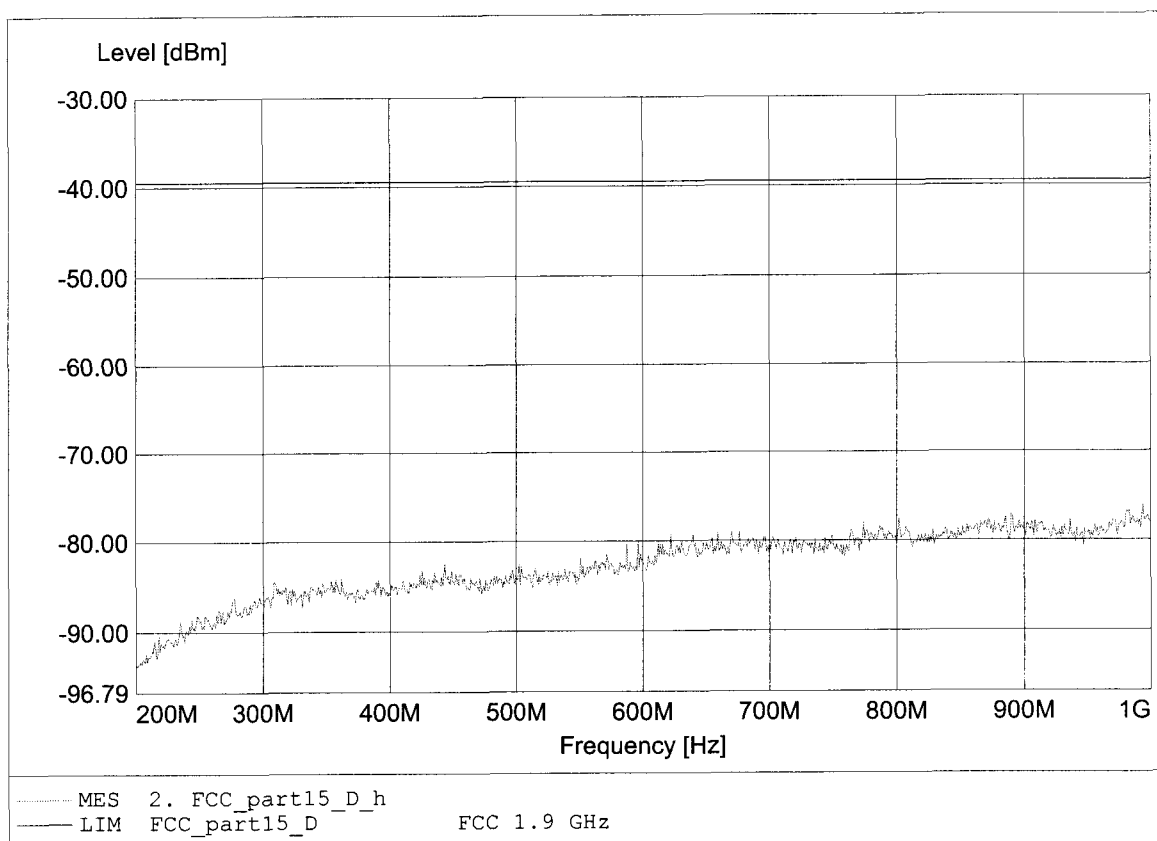

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.915GHz Pmax:-42.59dBm RBW: 100 kHz

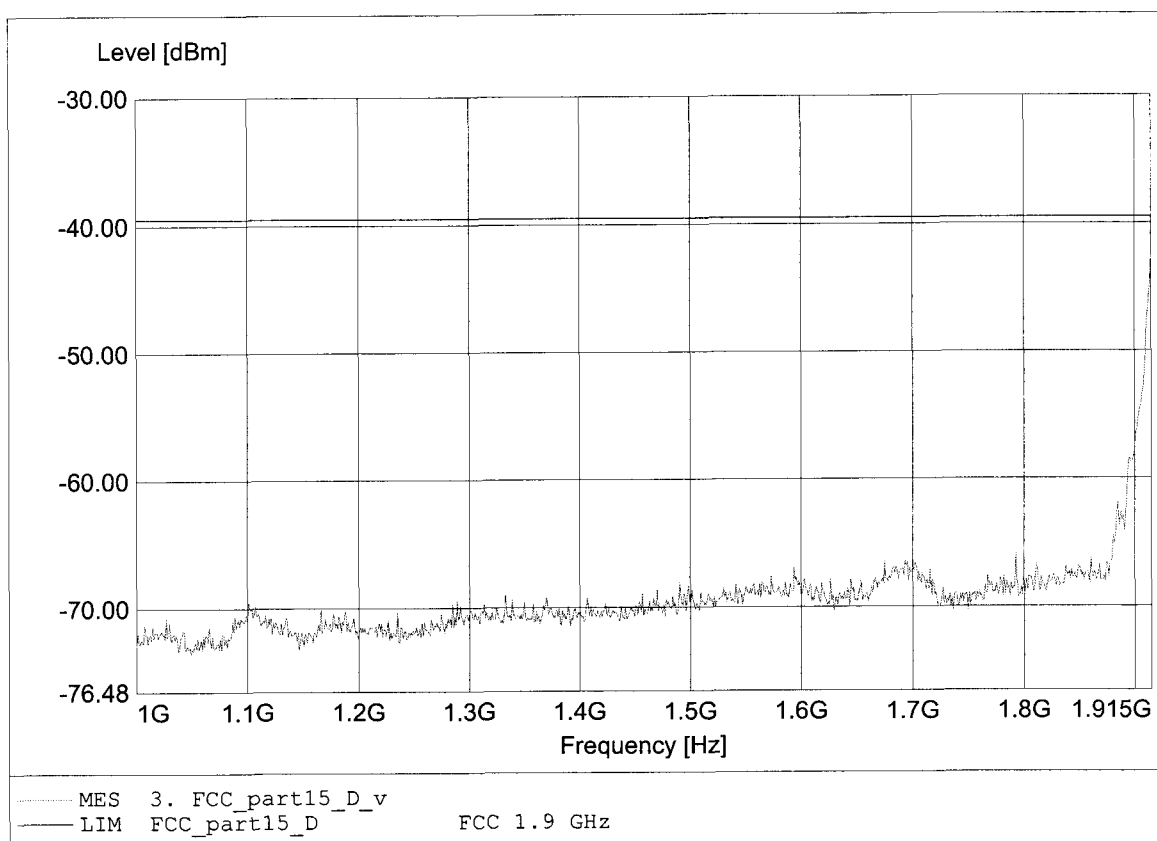

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.915GHz Pmax:-44.22dBm RBW: 100 kHz

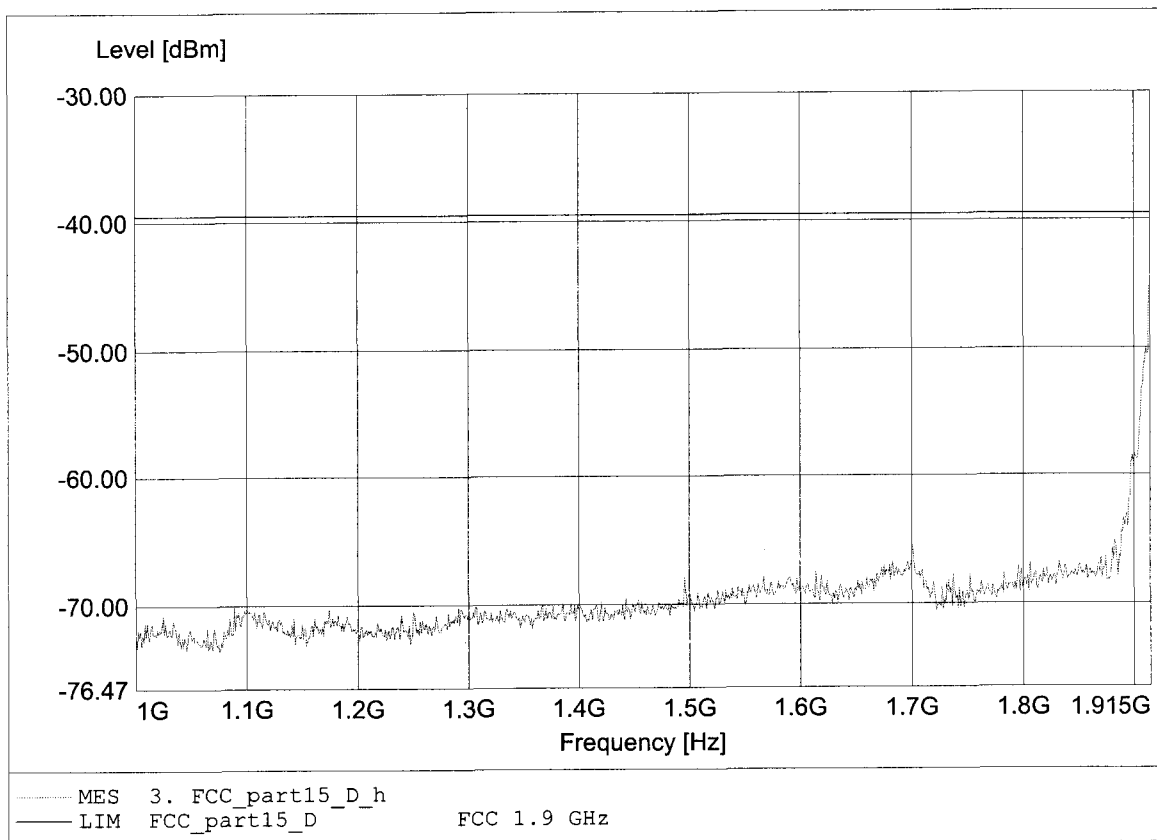

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.936GHz Pmax:-68.24dBm RBW: 100 kHz

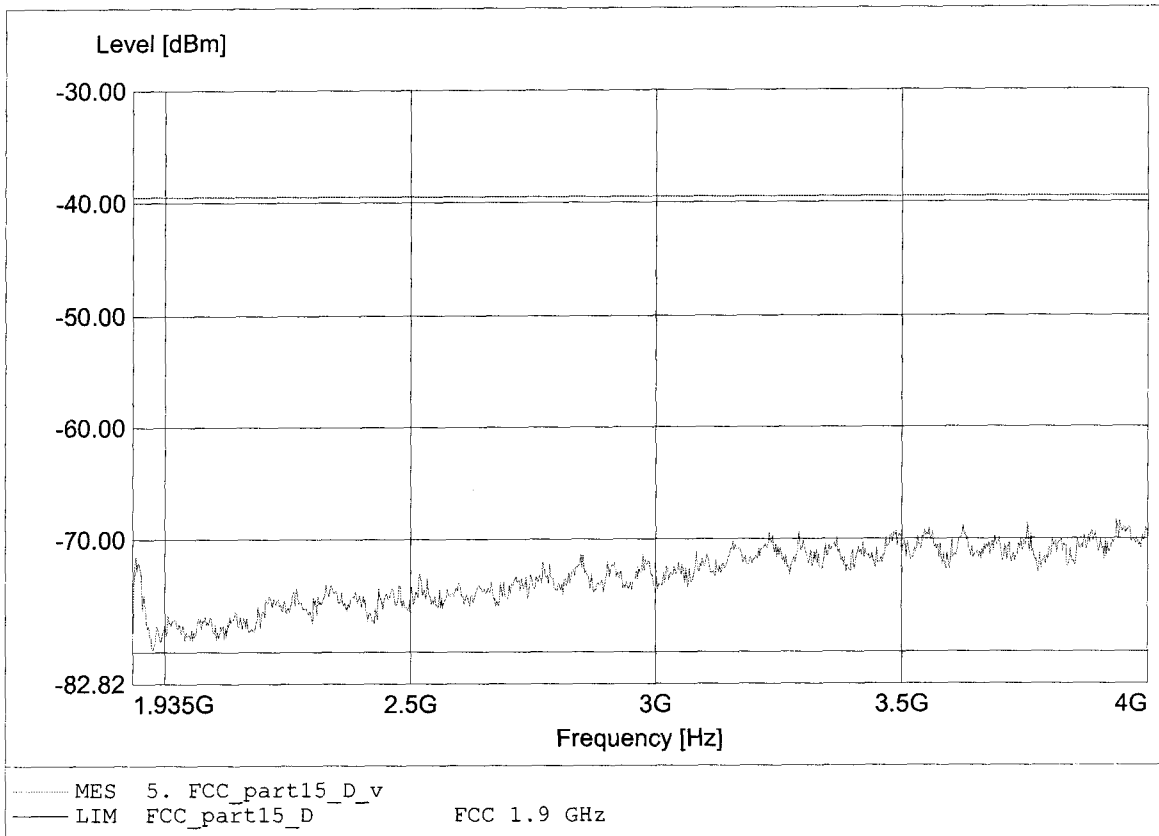

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 3.952GHz Pmax: -56.57dBm RBW: 100 kHz

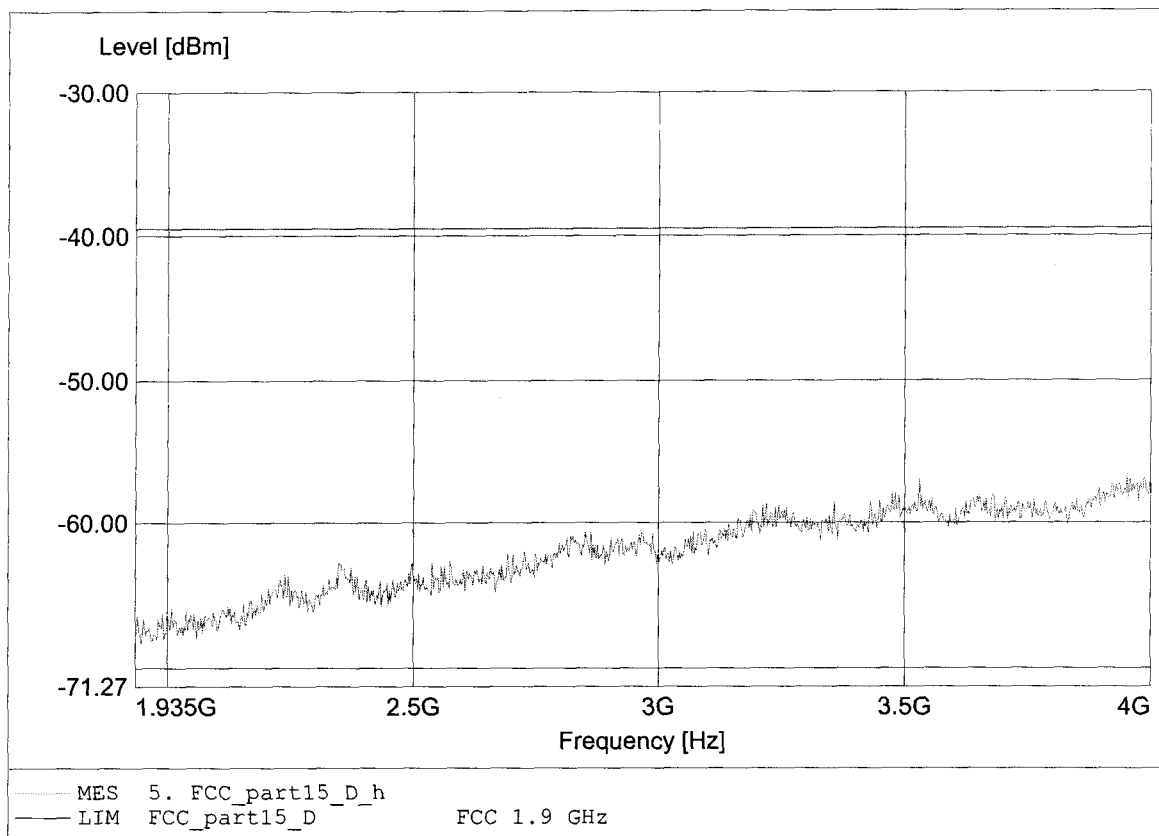

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-48.61dBm RBW: 10 kHz

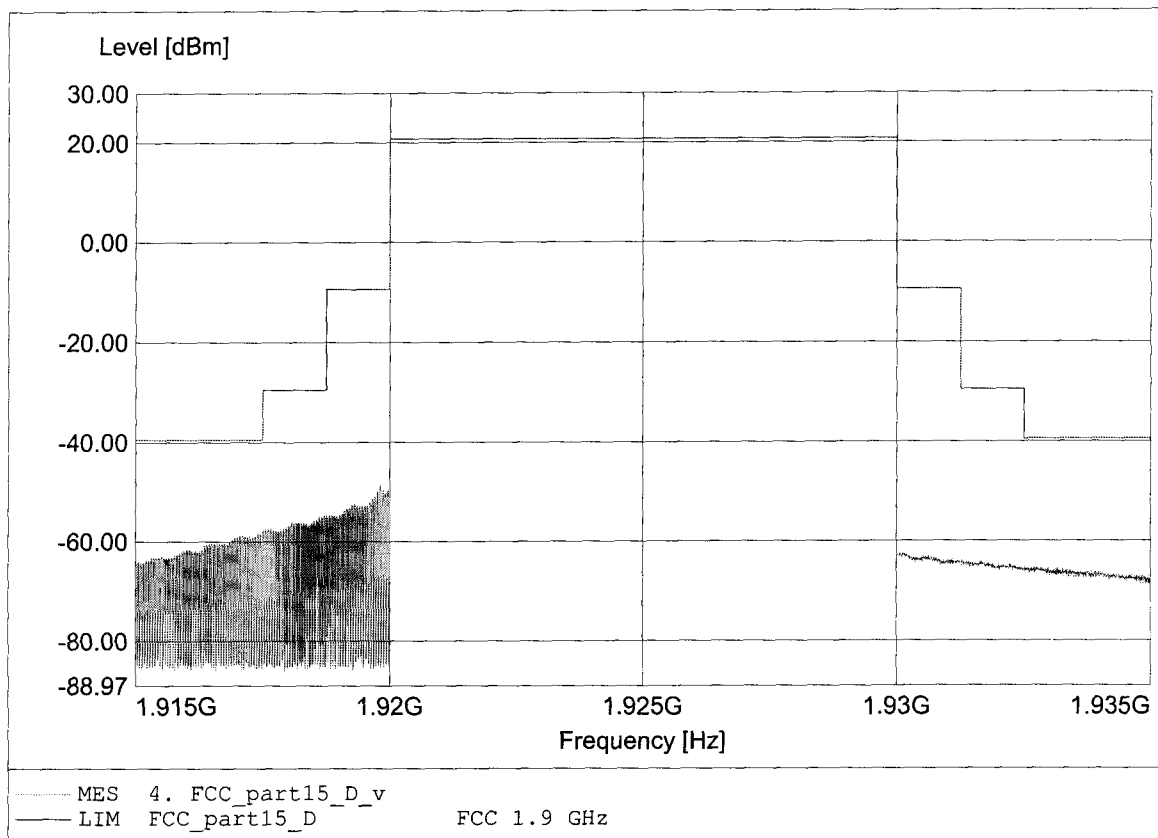

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-49.04dBm RBW: 10 kHz

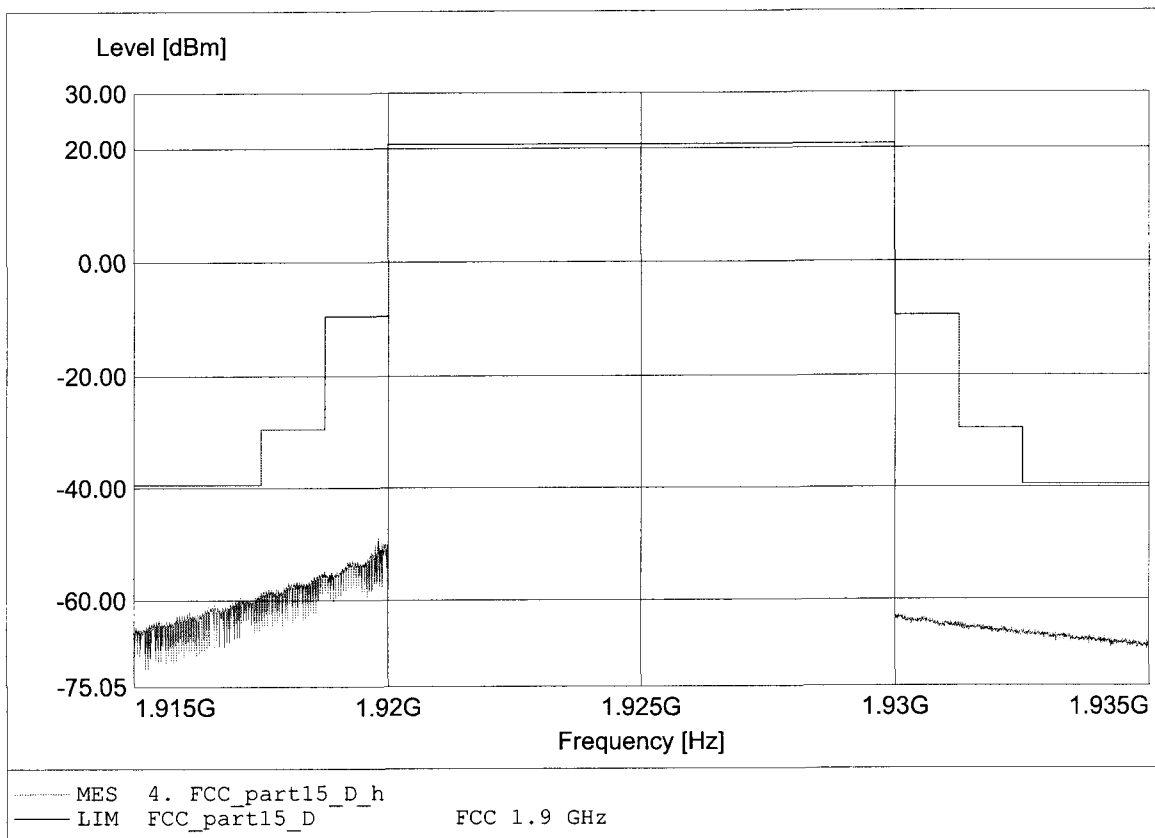

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-45.12dBm RBW: 10 kHz

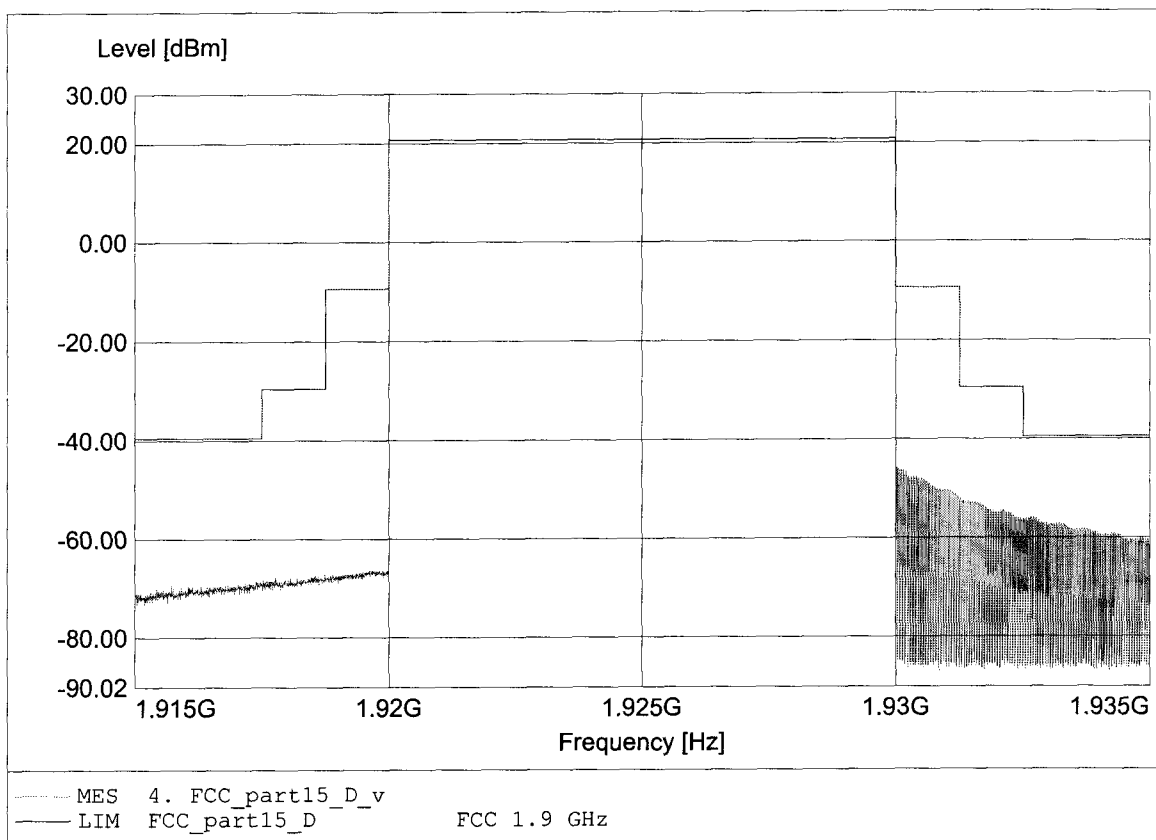

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-46.77dBm RBW: 10 kHz

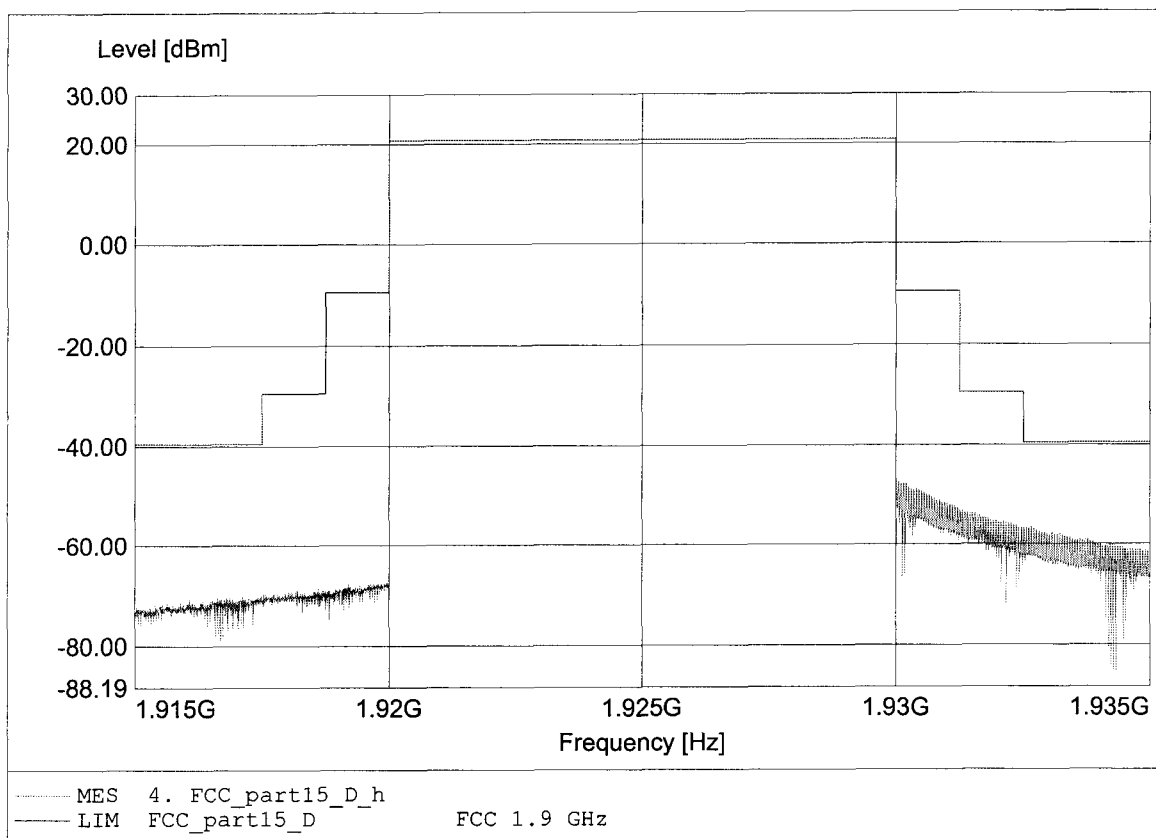

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.842GHz Pmax:-79.04dBm RBW:10 kHz

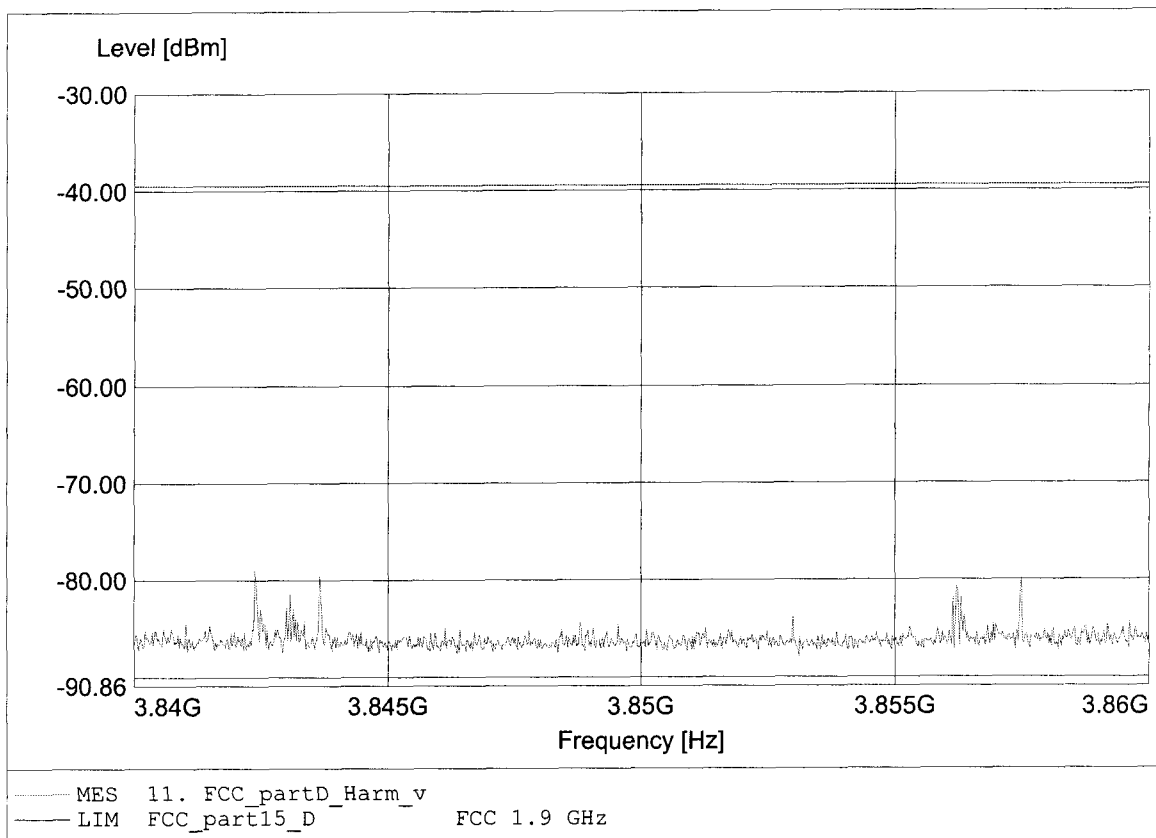

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 3.857GHz Pmax: -80.25dBm RBW: 10 kHz

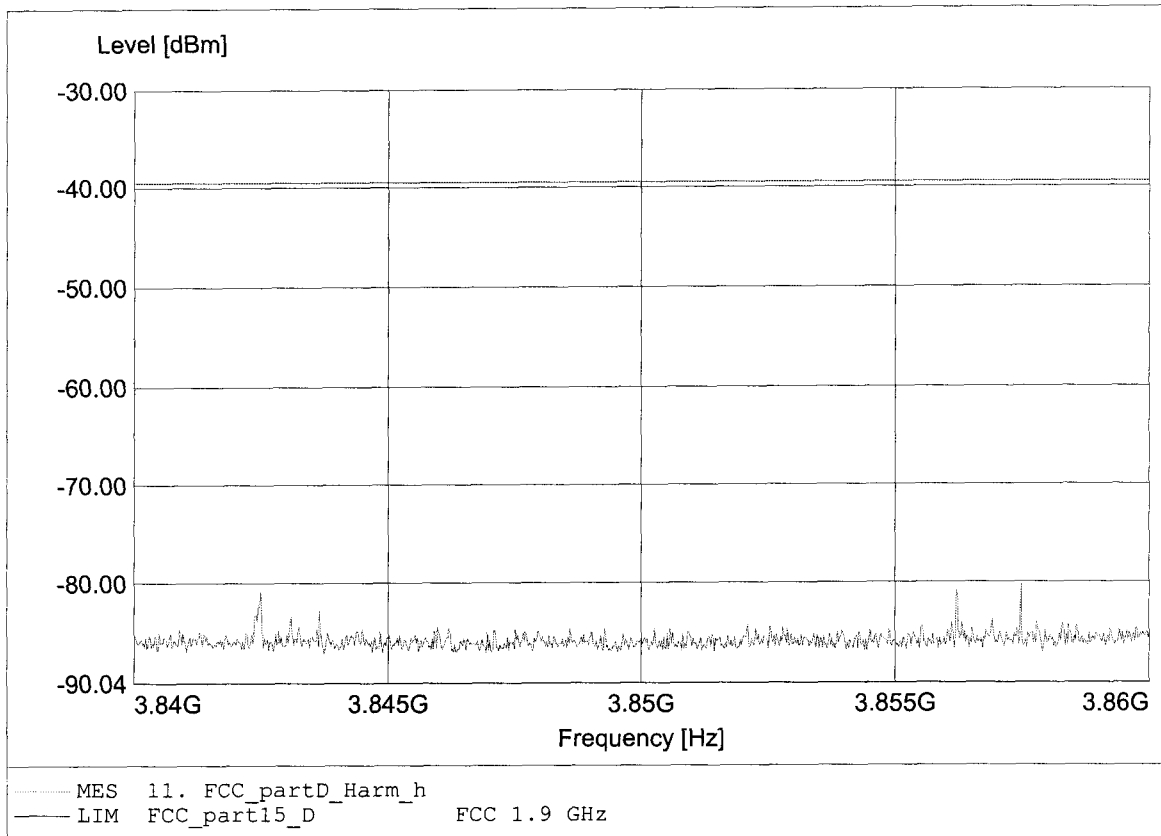

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFPI2E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.784GHz Pmax:-71.78dBm RBW:10 kHz

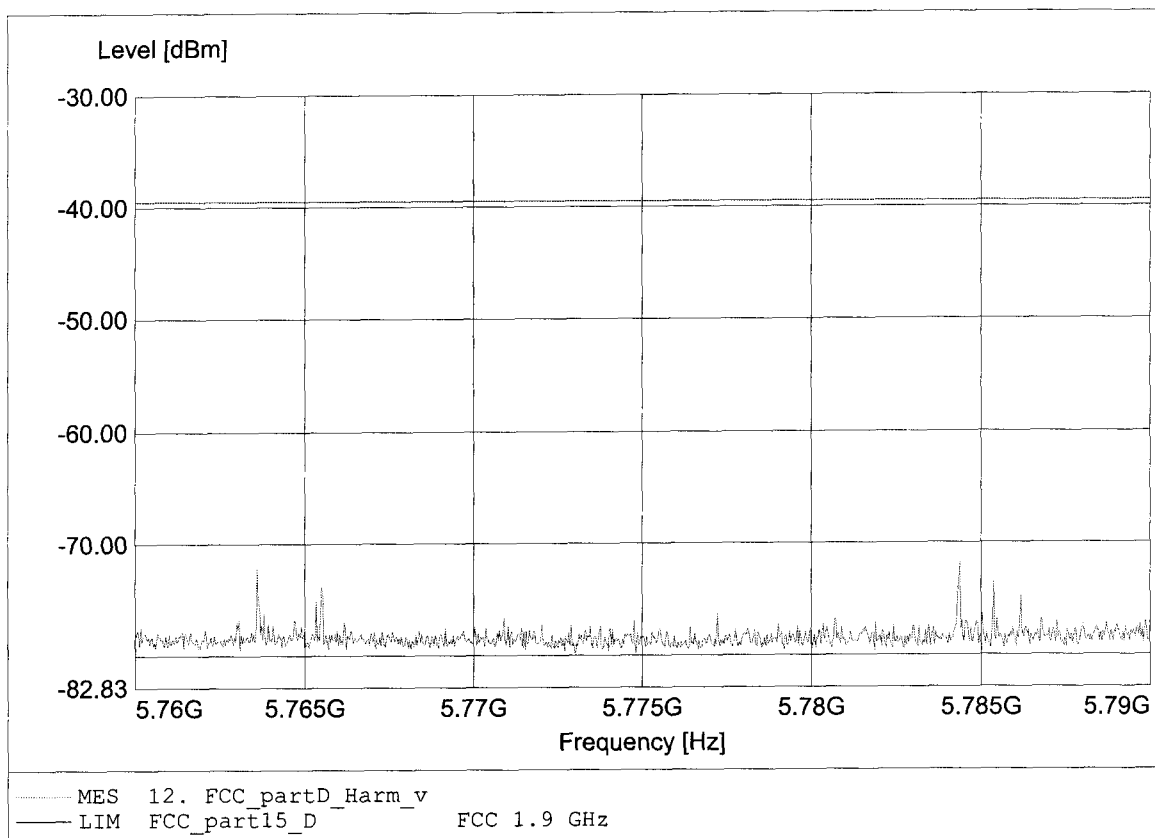

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.764GHz Pmax:-69.25dBm RBW:10 kHz

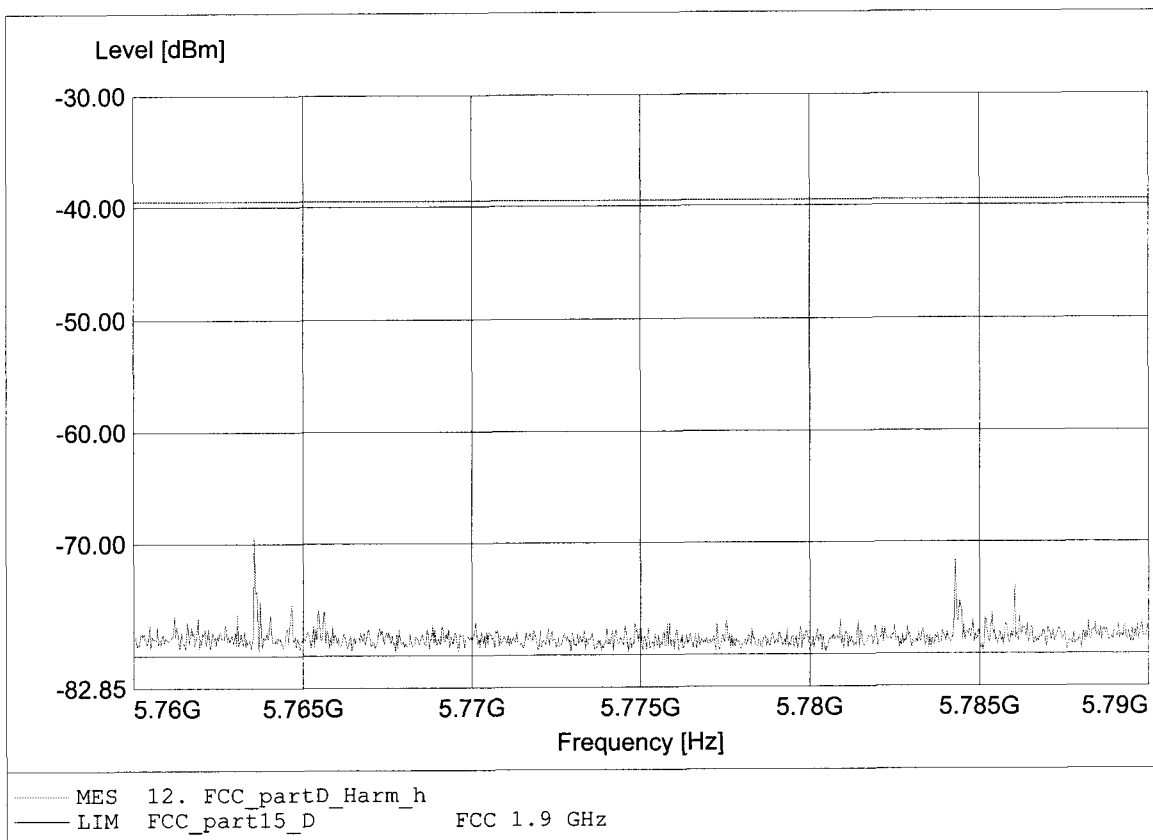

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 7.712GHz Pmax: -63.49dBm RBW: 10 kHz

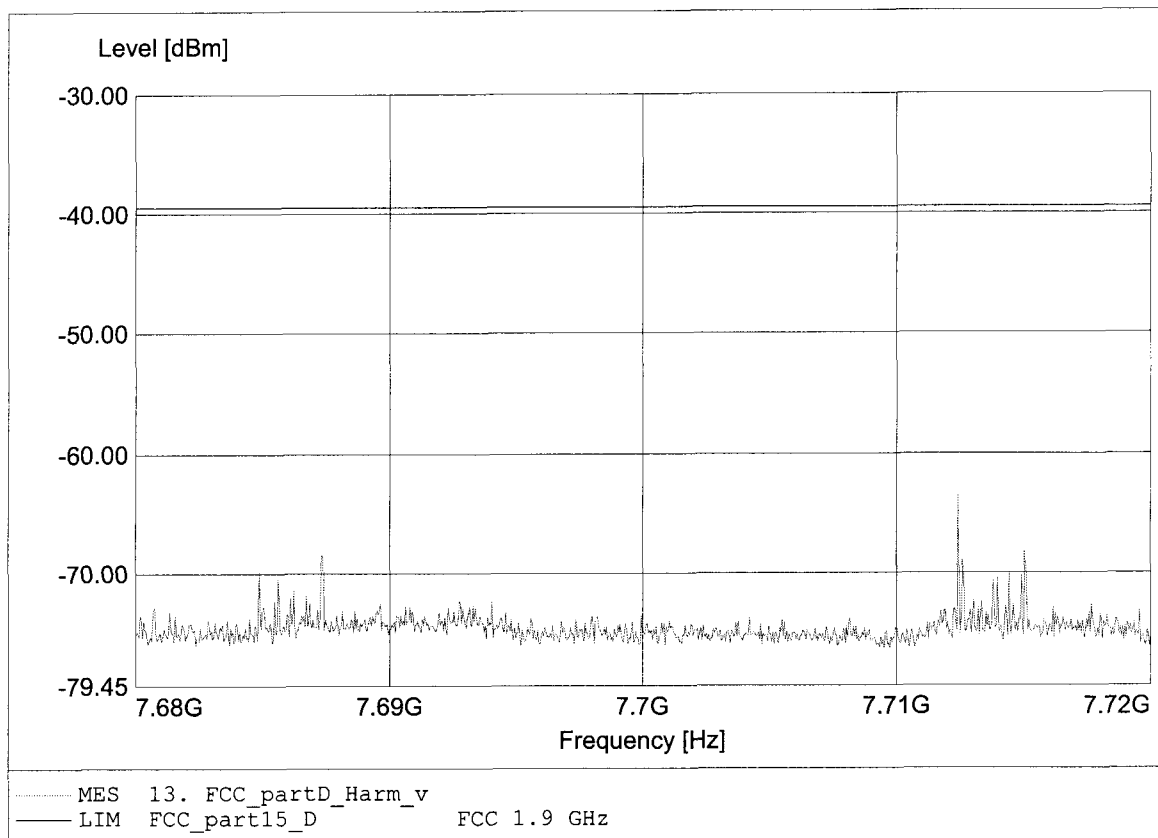

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 7.712GHz Pmax: -67.60dBm RBW: 10 kHz

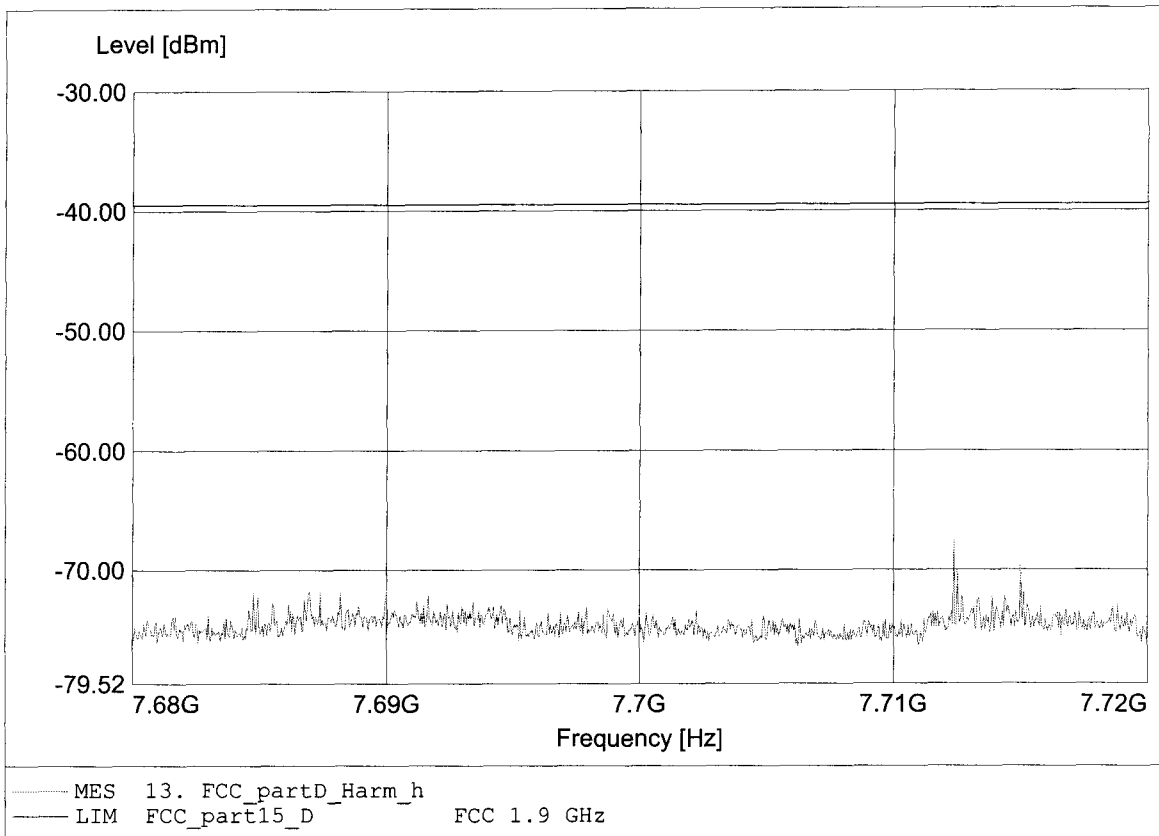

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFPI2E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.606GHz Pmax:-64.62dBm RBW:10 kHz

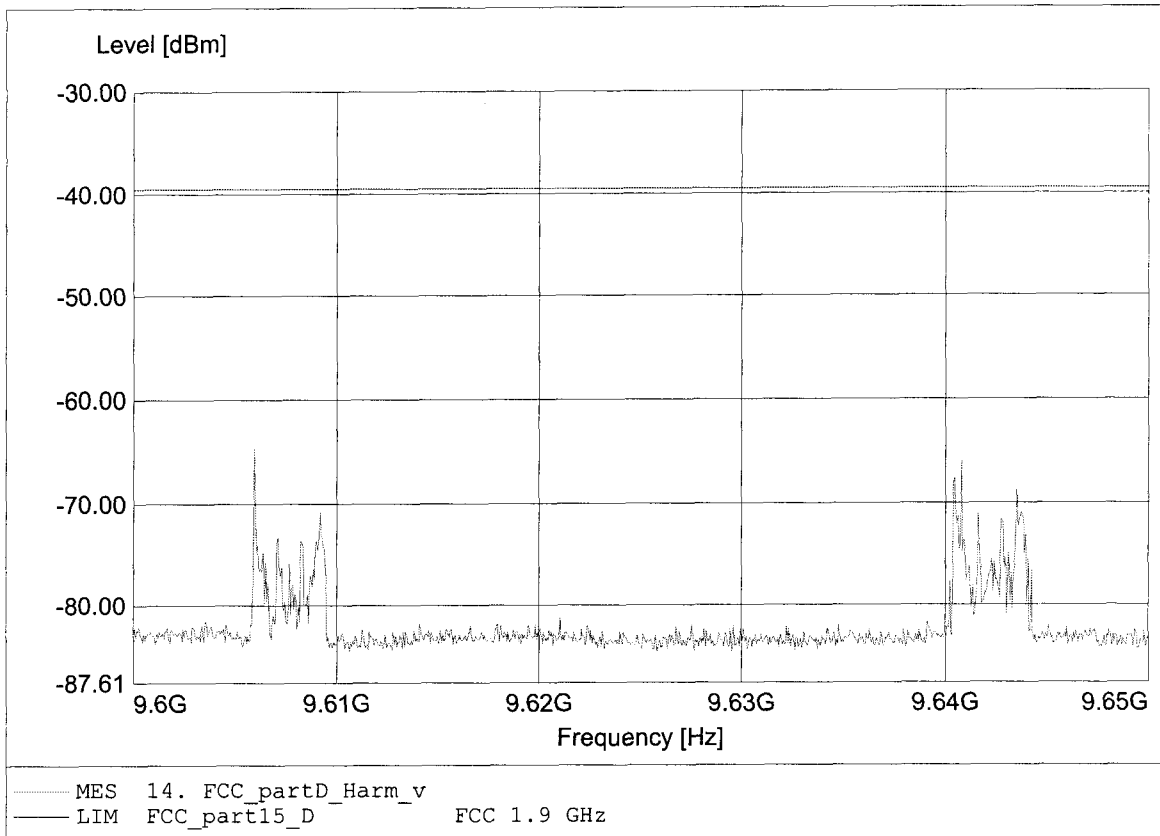

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 9.641GHz Pmax: -67.83dBm RBW: 10 kHz

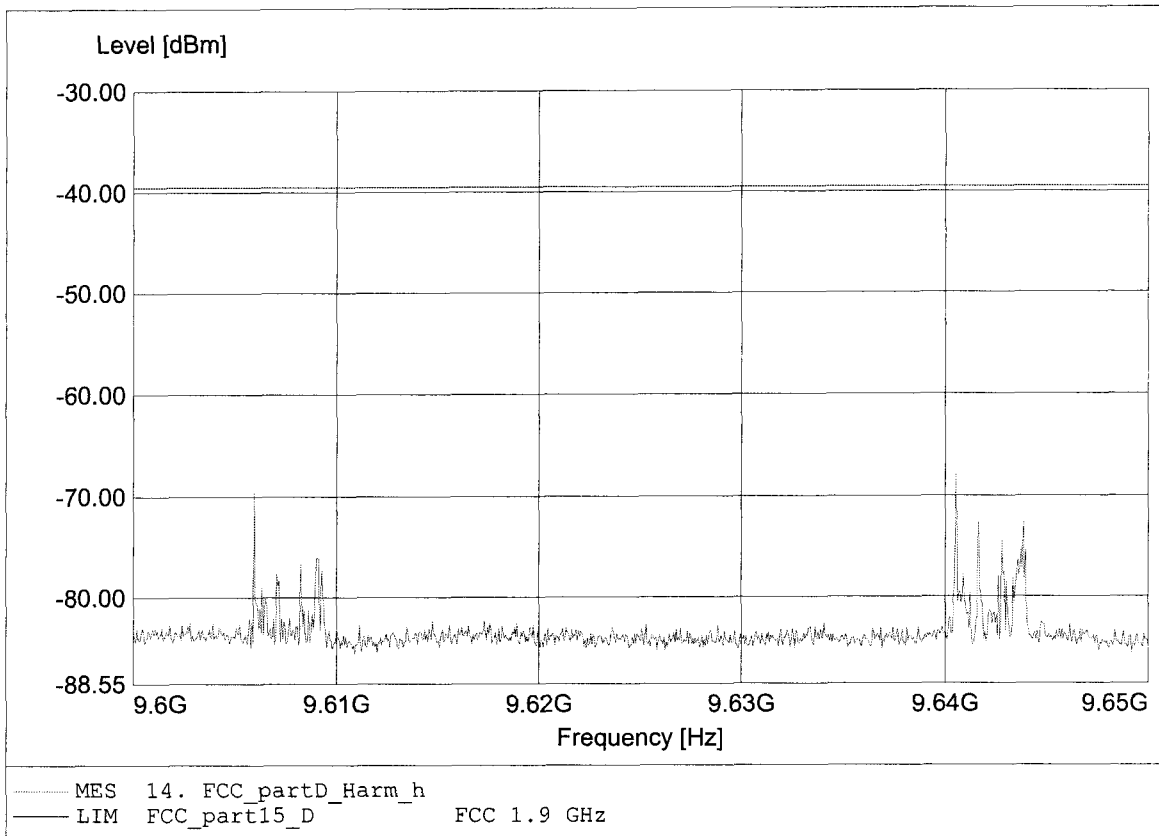

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFPI2E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.569GHz Pmax:-74.03dBm RBW:10 kHz

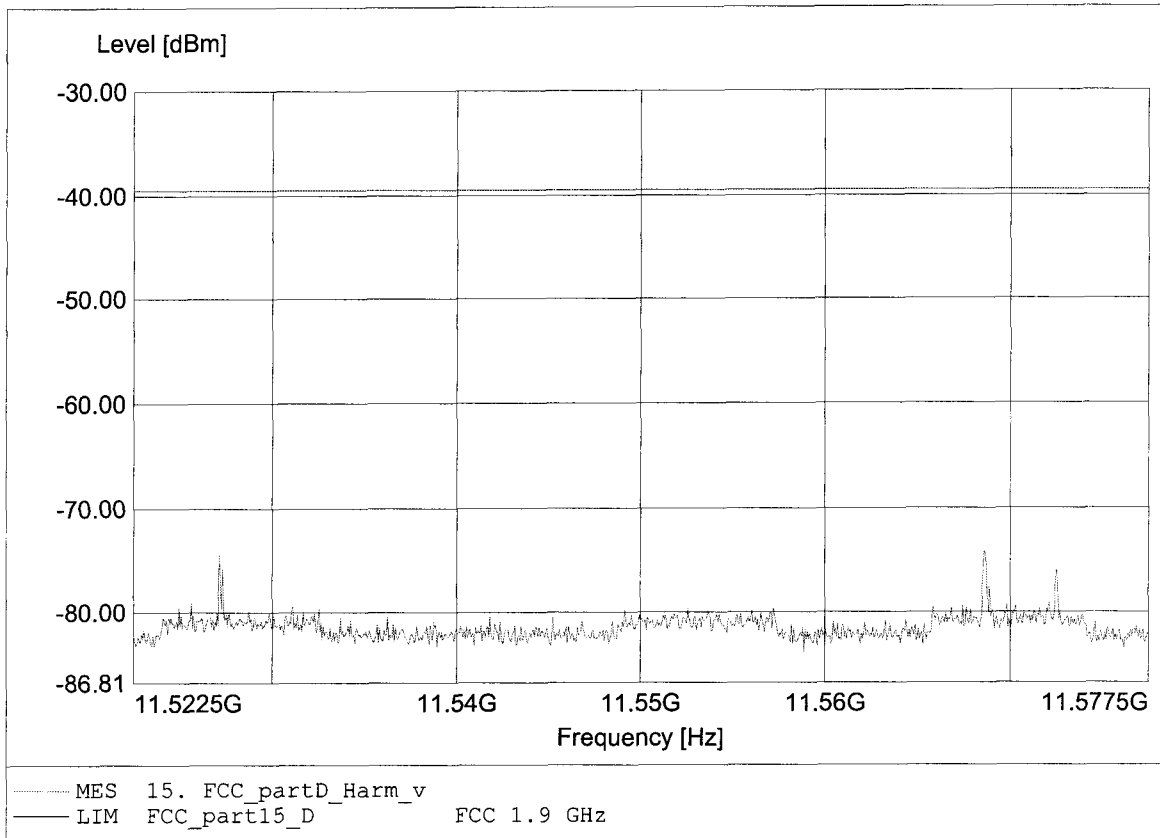

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.569GHz Pmax:-65.80dBm RBW:10 kHz

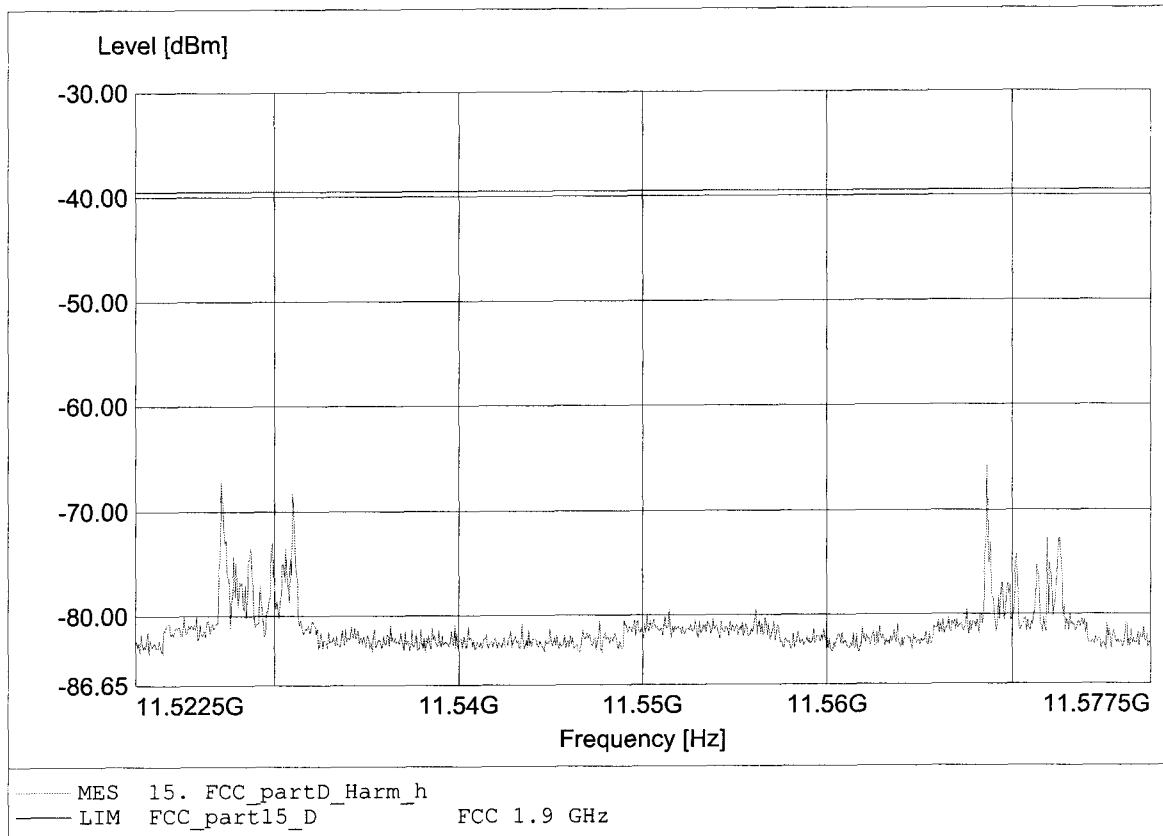

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFPI2E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.497GHz Pmax:-76.53dBm RBW:10 kHz

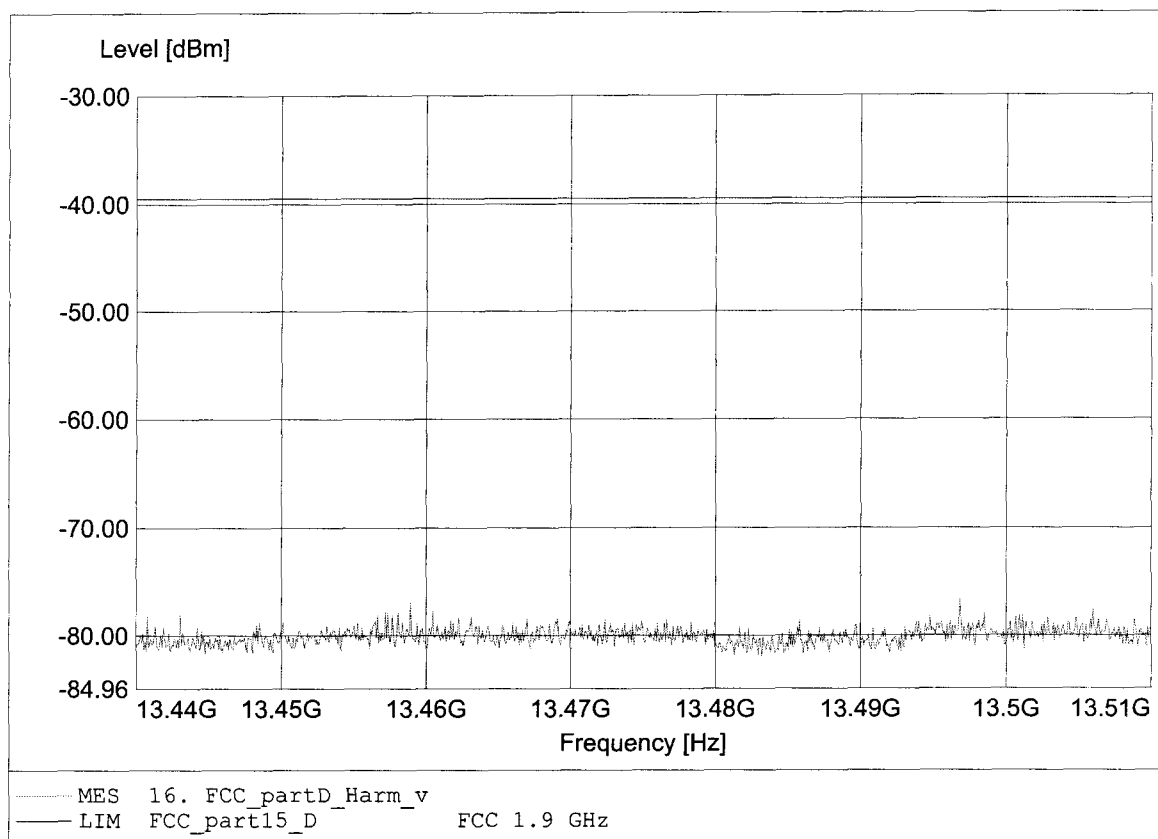

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.448GHz Pmax:-67.19dBm RBW:10 kHz

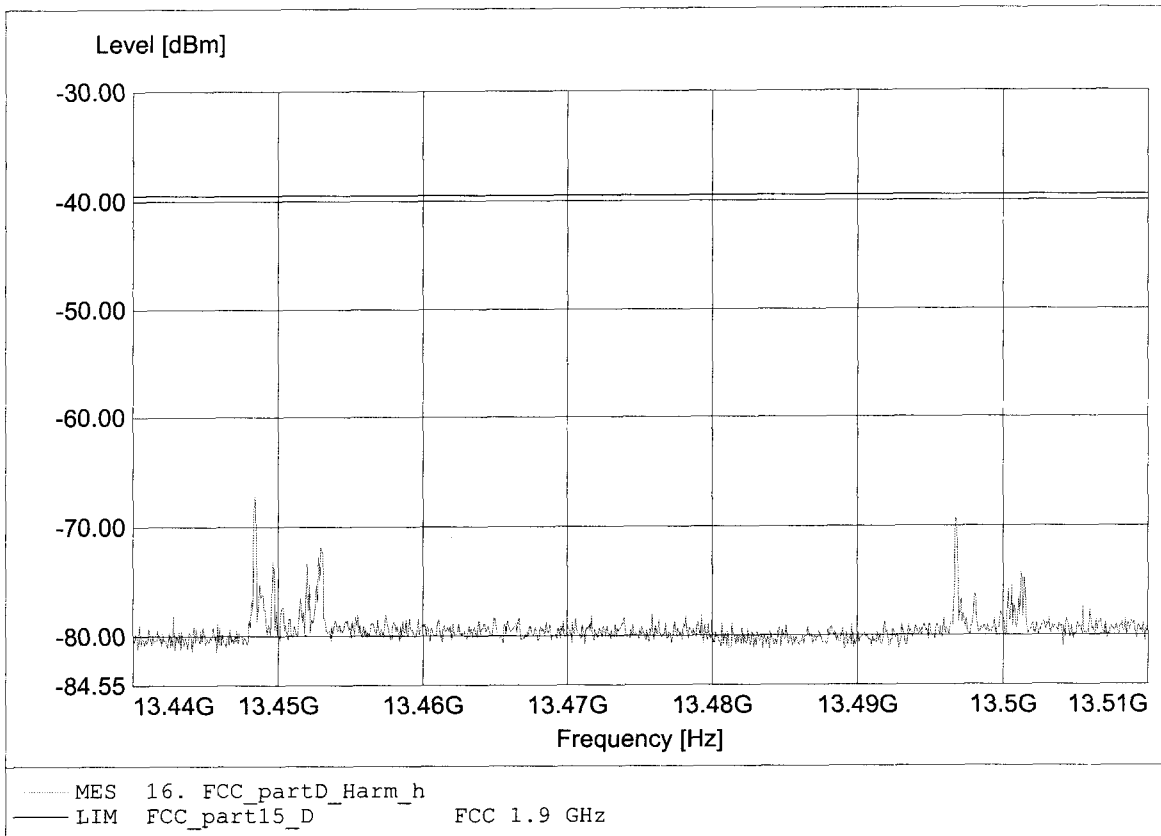

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.411GHz Pmax:-77.95dBm RBW:10 kHz

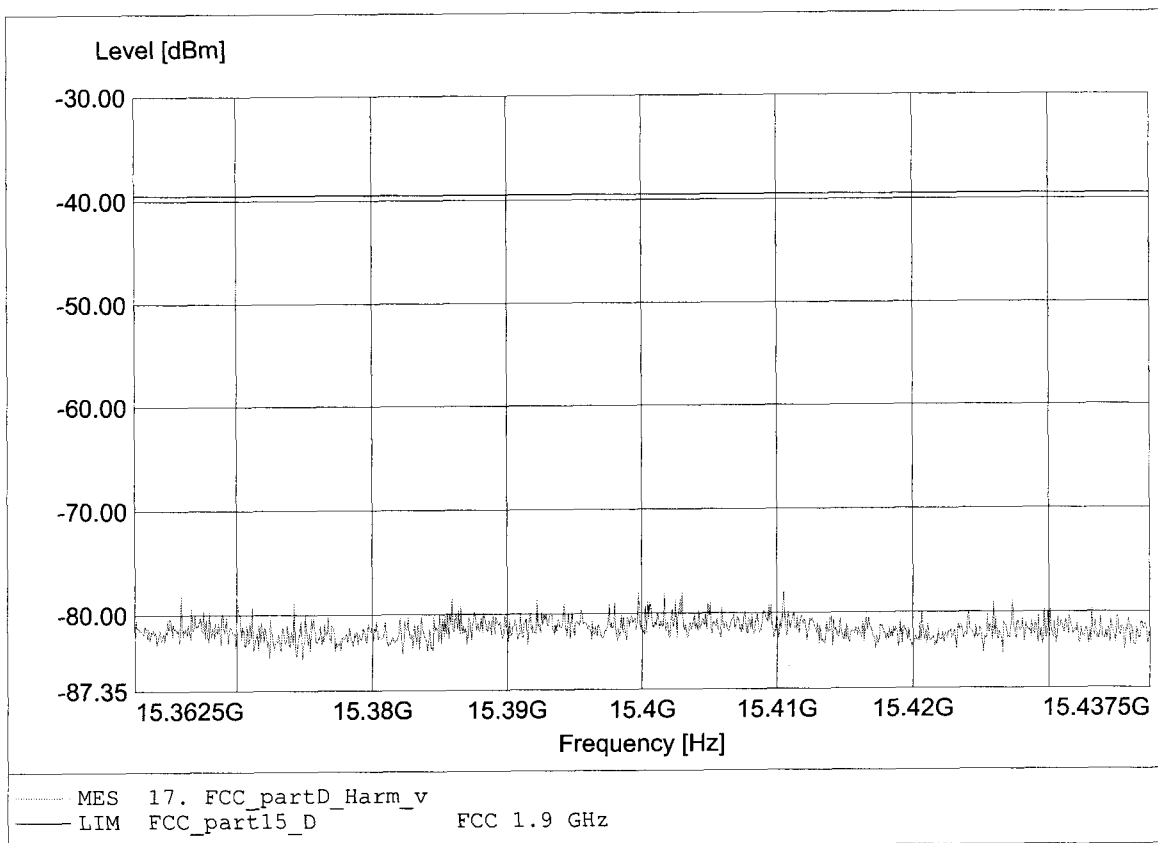

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.404GHz Pmax:-77.34dBm RBW:10 kHz

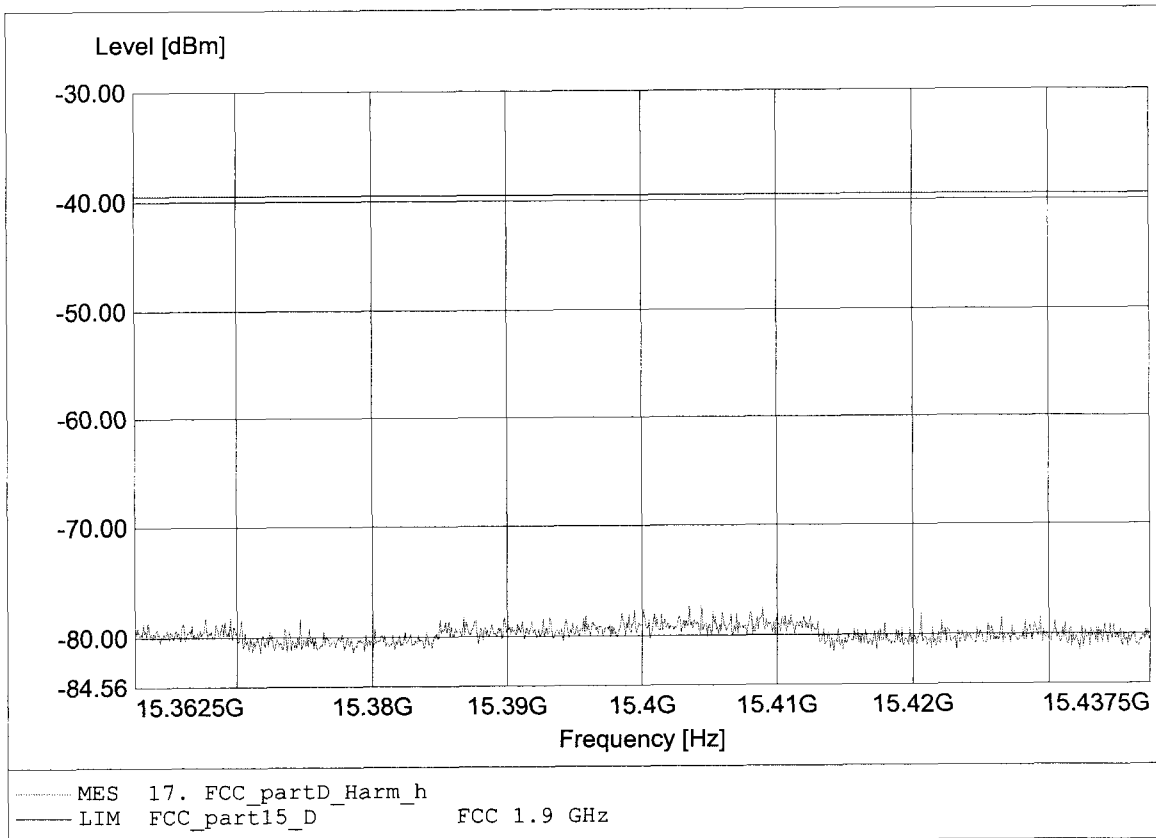

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.296GHz Pmax:-75.86dBm RBW:10 kHz

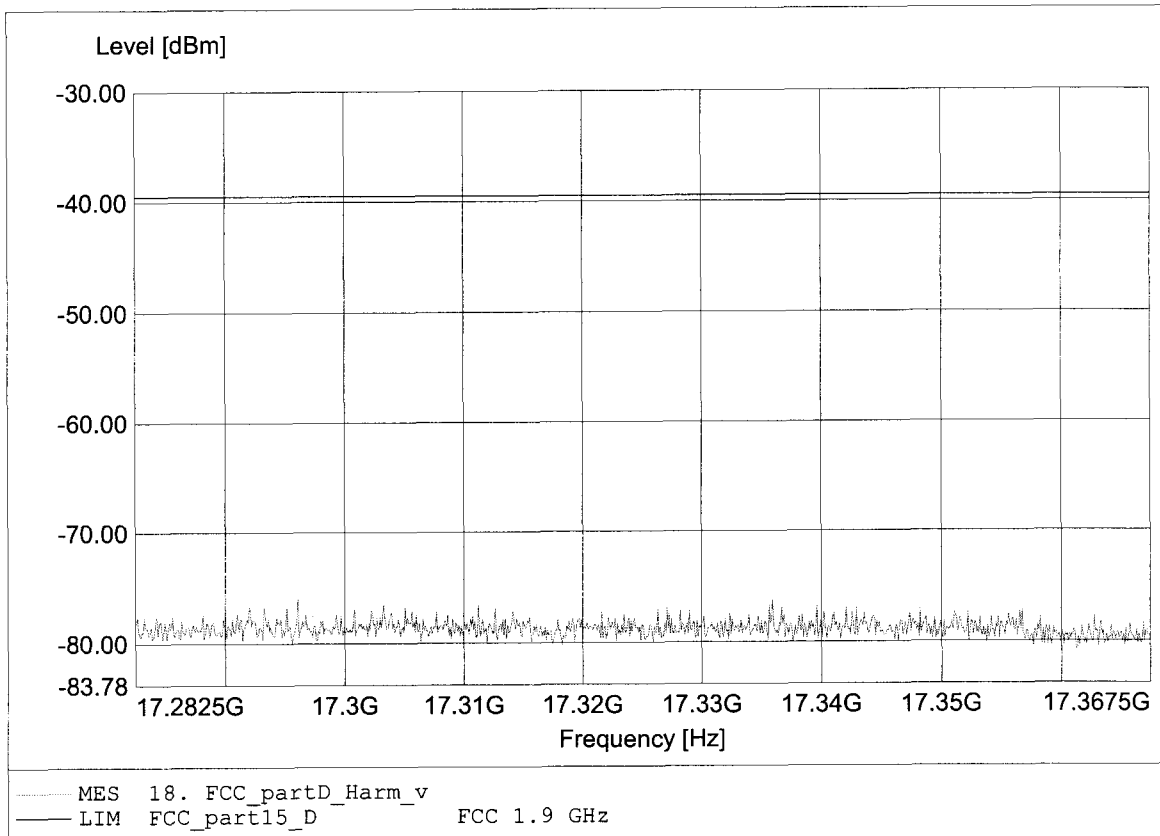

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.312GHz Pmax:-75.68dBm RBW:10 kHz

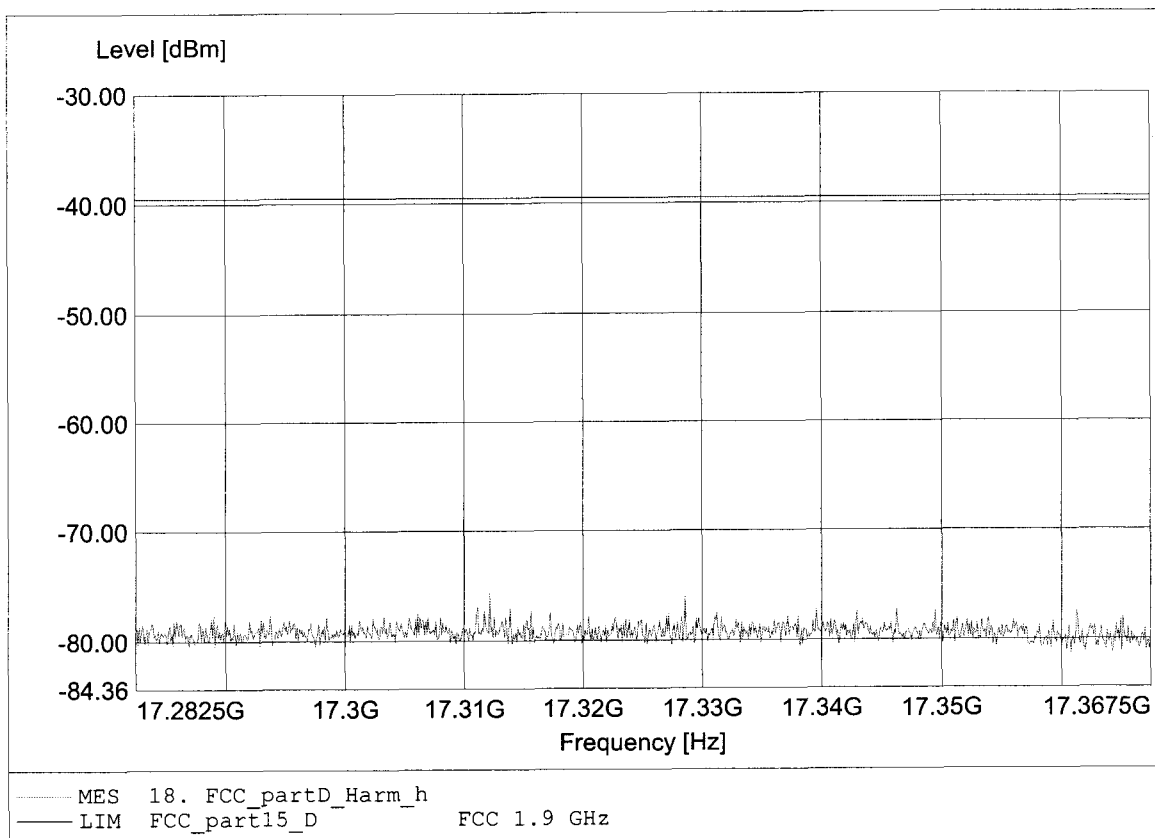

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.230GHz Pmax:-72.53dBm RBW:10 kHz

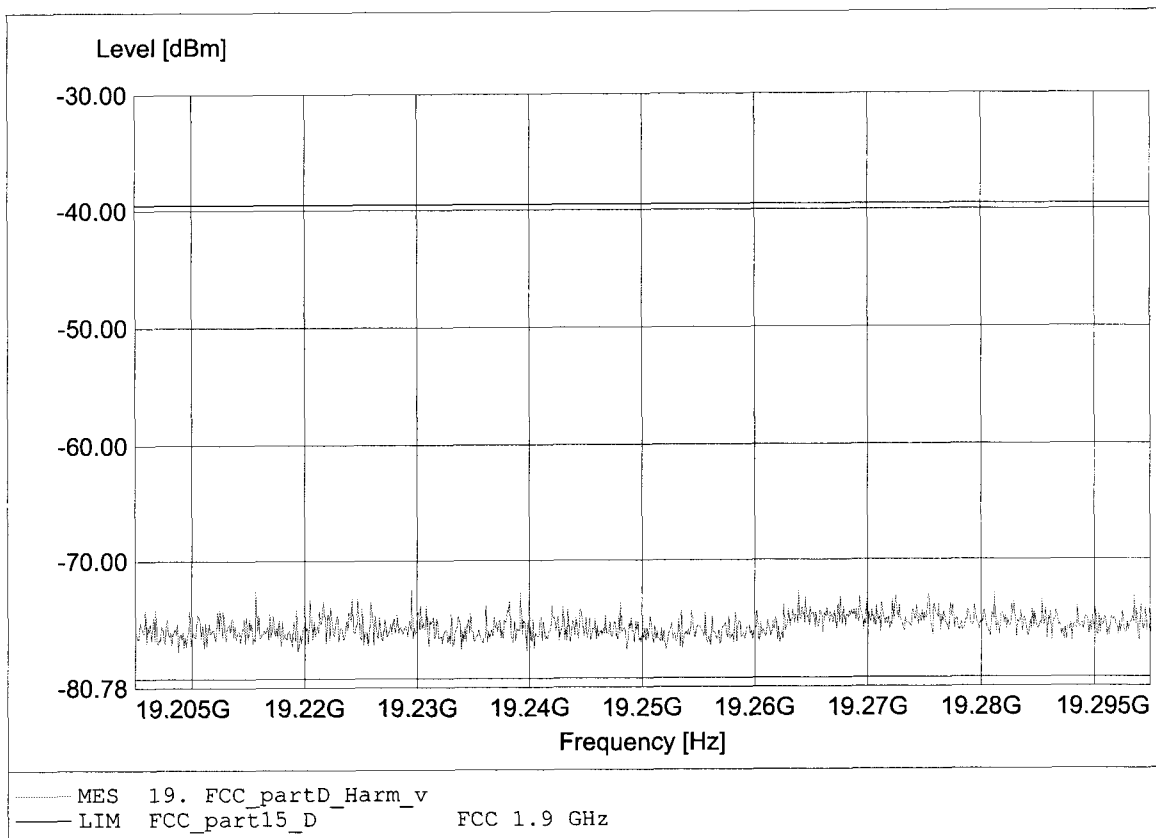

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 2
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.243GHz Pmax:-72.12dBm RBW:10 kHz

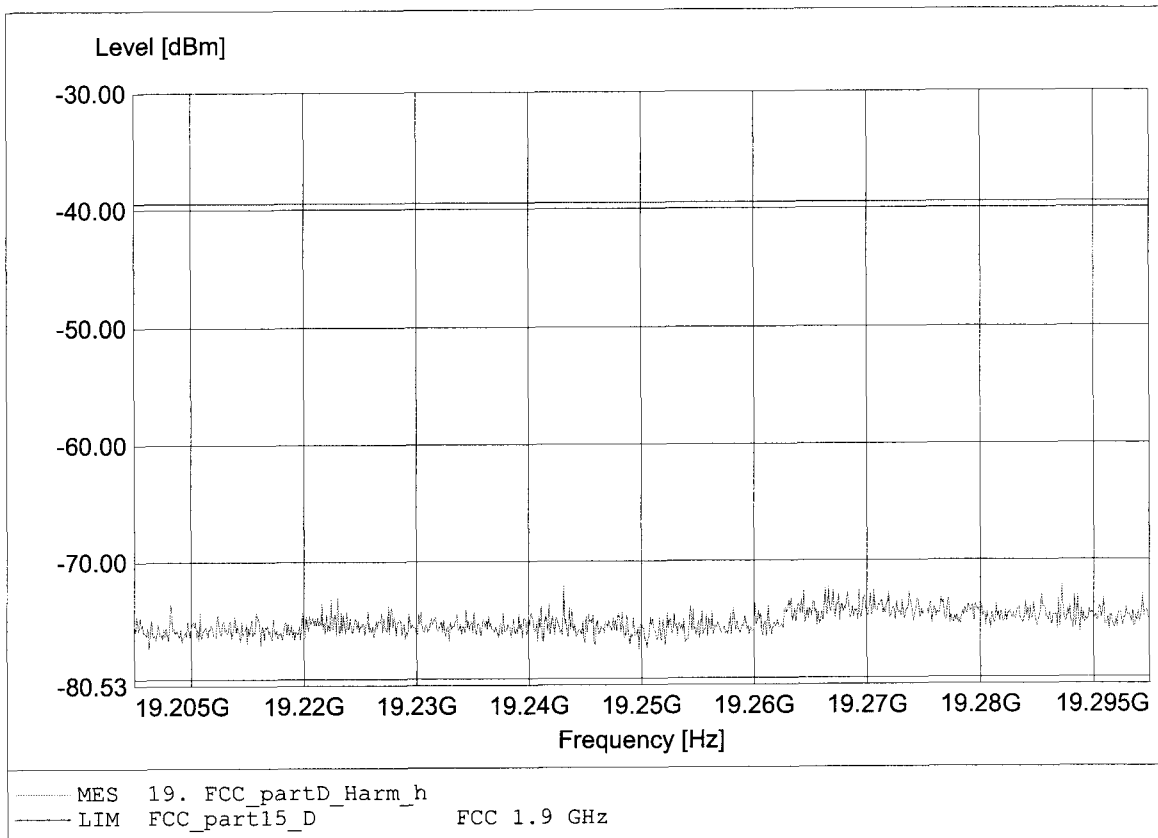

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:176.578MHz Pmax:-55.79dBm RBW: 100 kHz

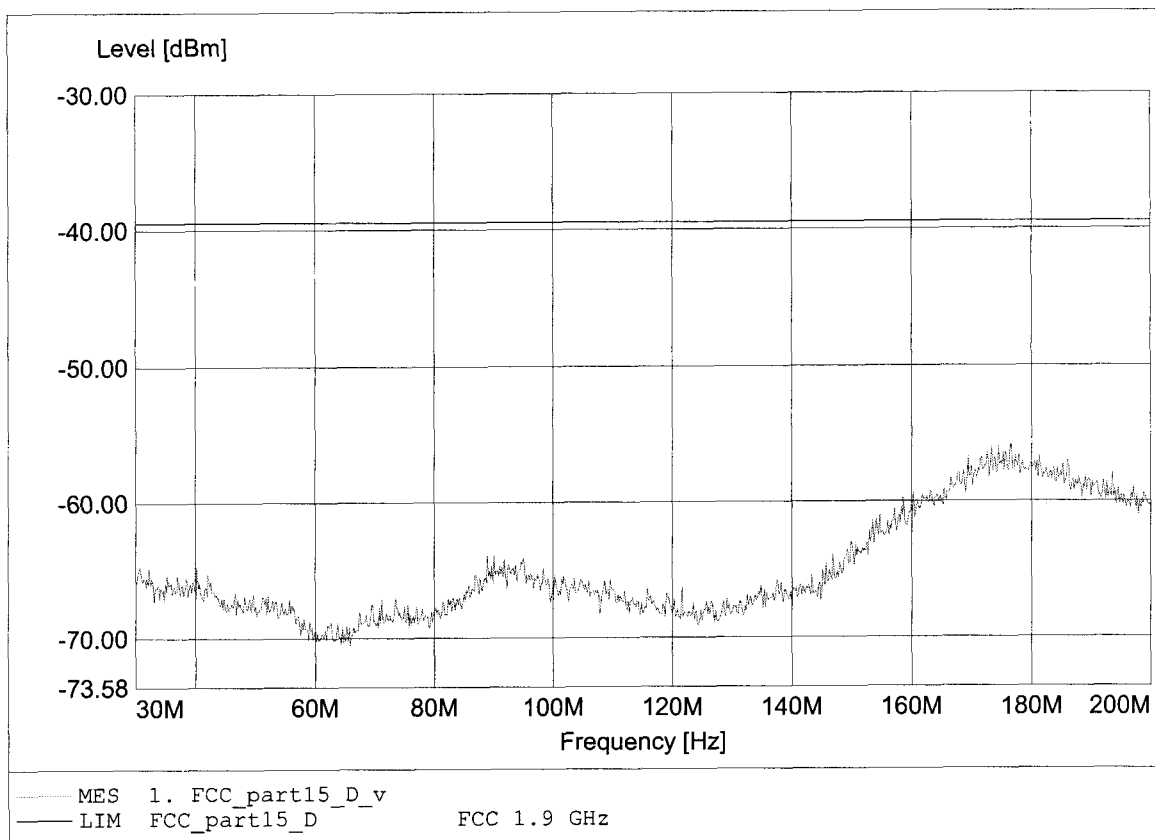

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:188.289MHz Pmax:-61.76dBm RBW: 100 kHz

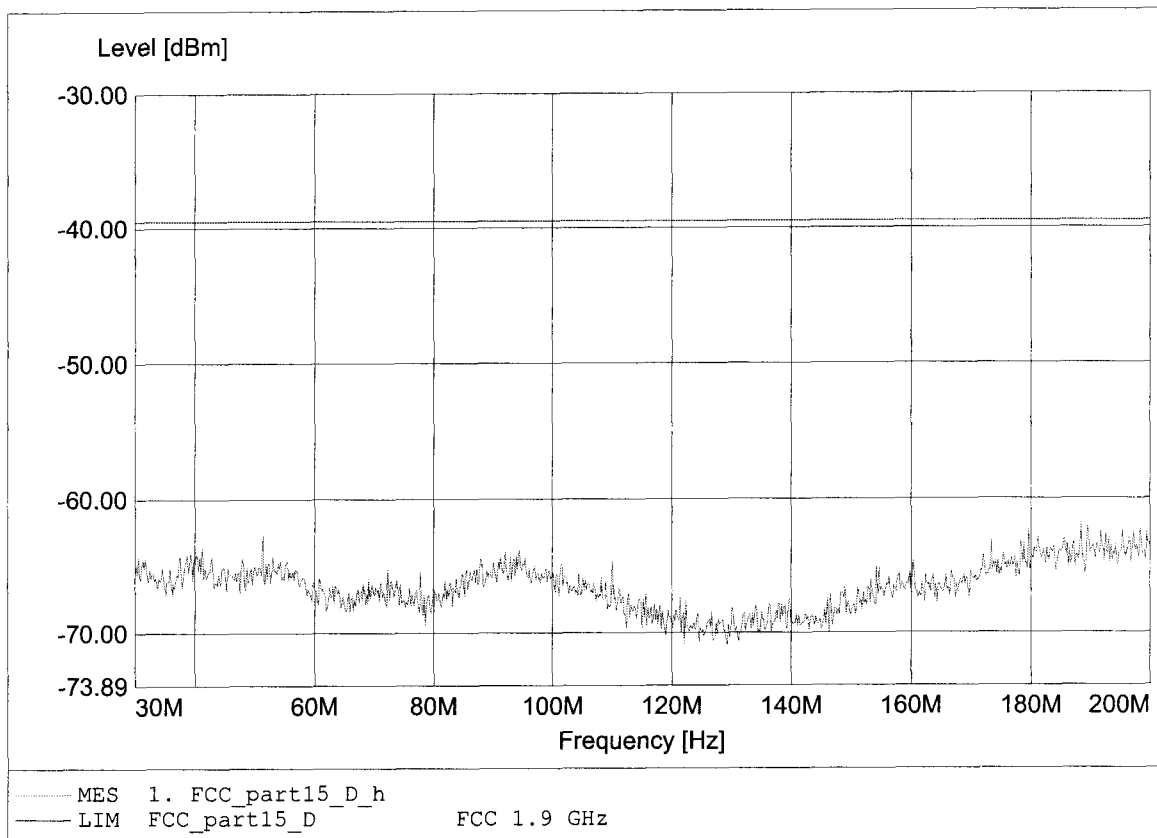

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:983.111MHz Pmax:-73.67dBm RBW: 100 kHz

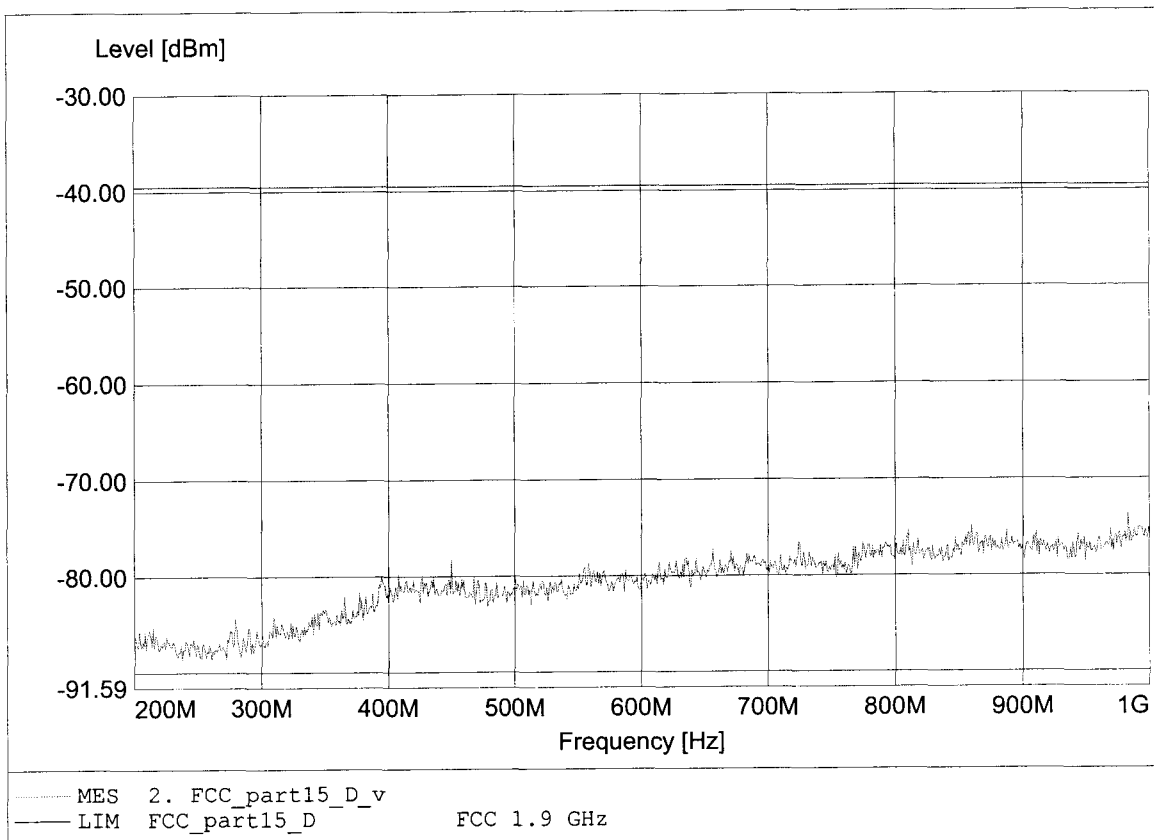

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:991.111MHz Pmax:-74.81dBm RBW: 100 kHz

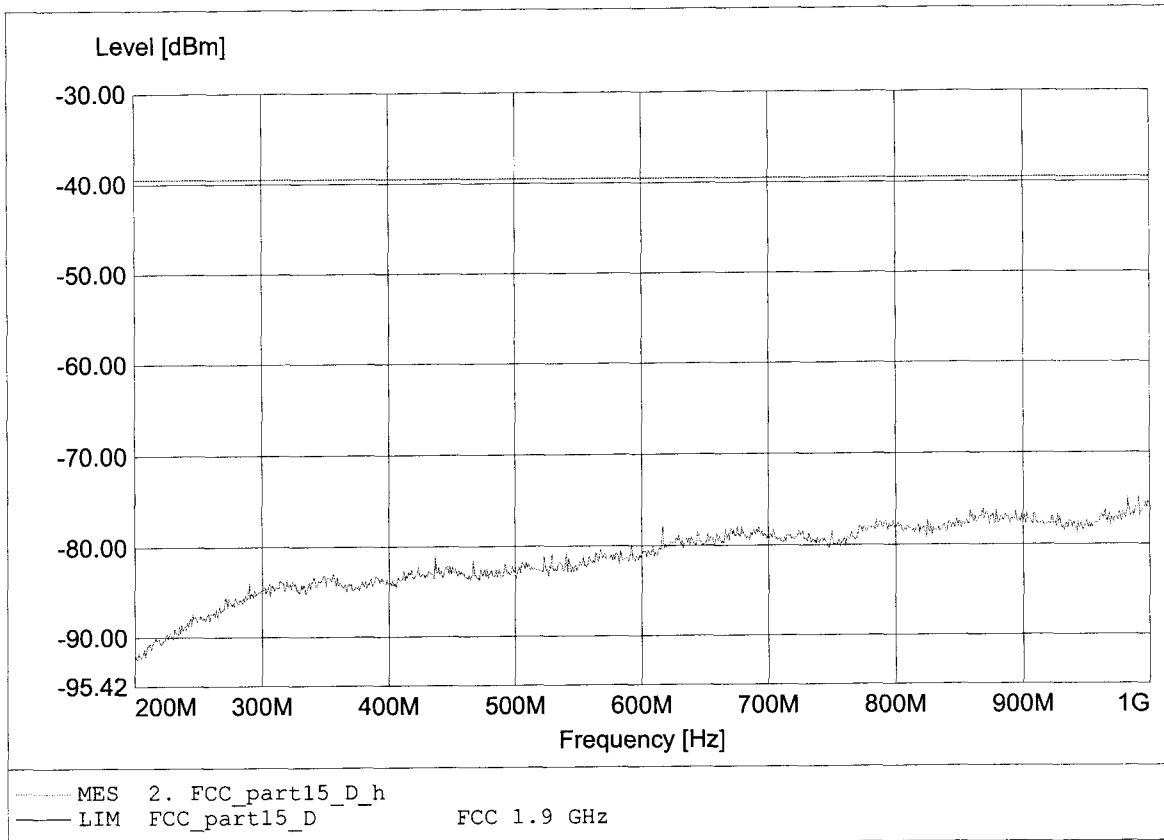

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0, 4 / antenna 3 (extern)
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq.: 1.915GHz Pmax: -40.48dBm RBW: 100 kHz

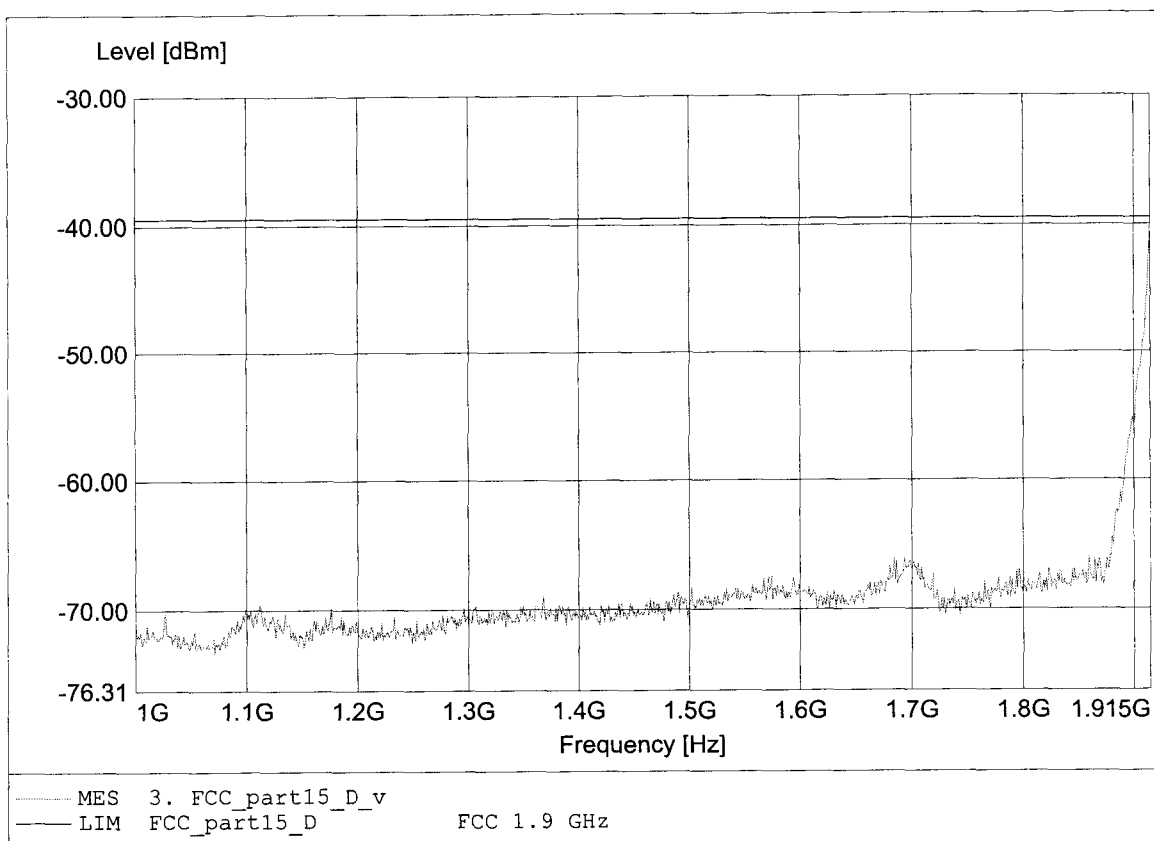

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 1.915GHz Pmax: -43.41dBm RBW: 100 kHz

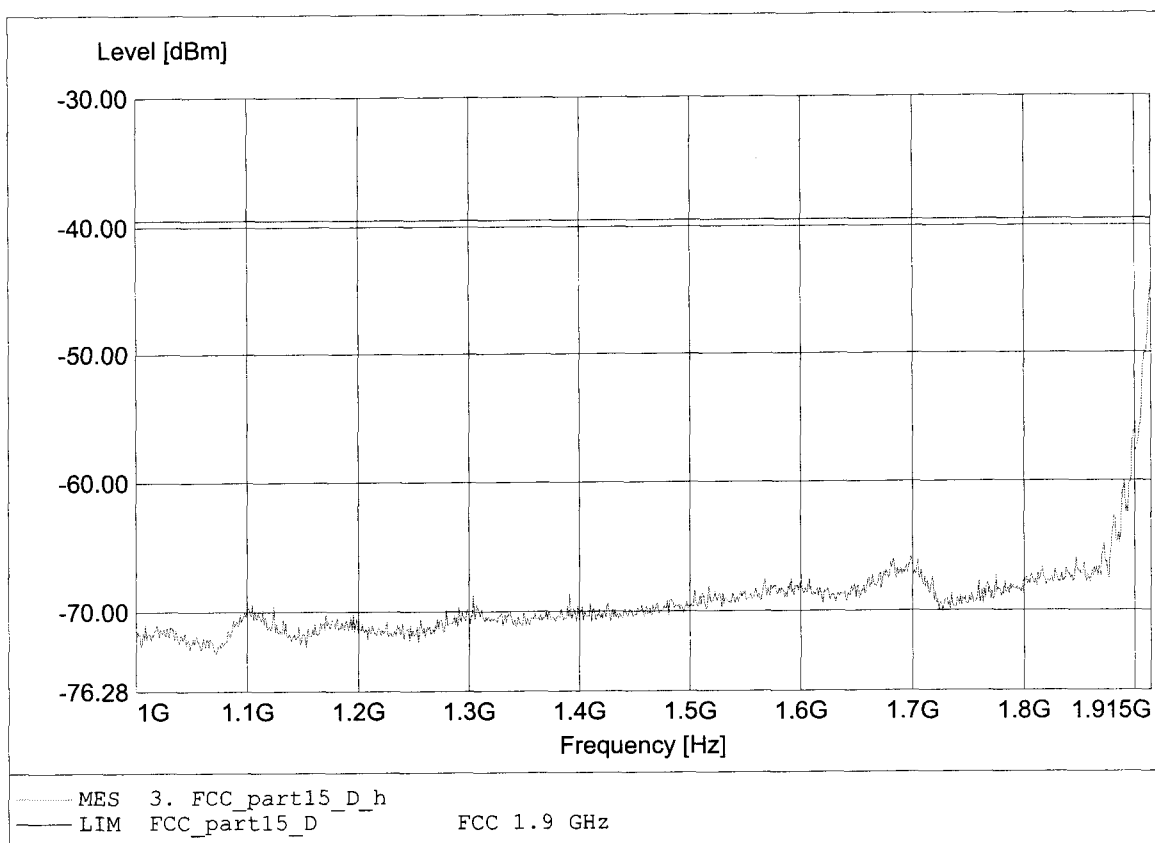

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.940GHz Pmax:-57.03dBm RBW: 100 kHz

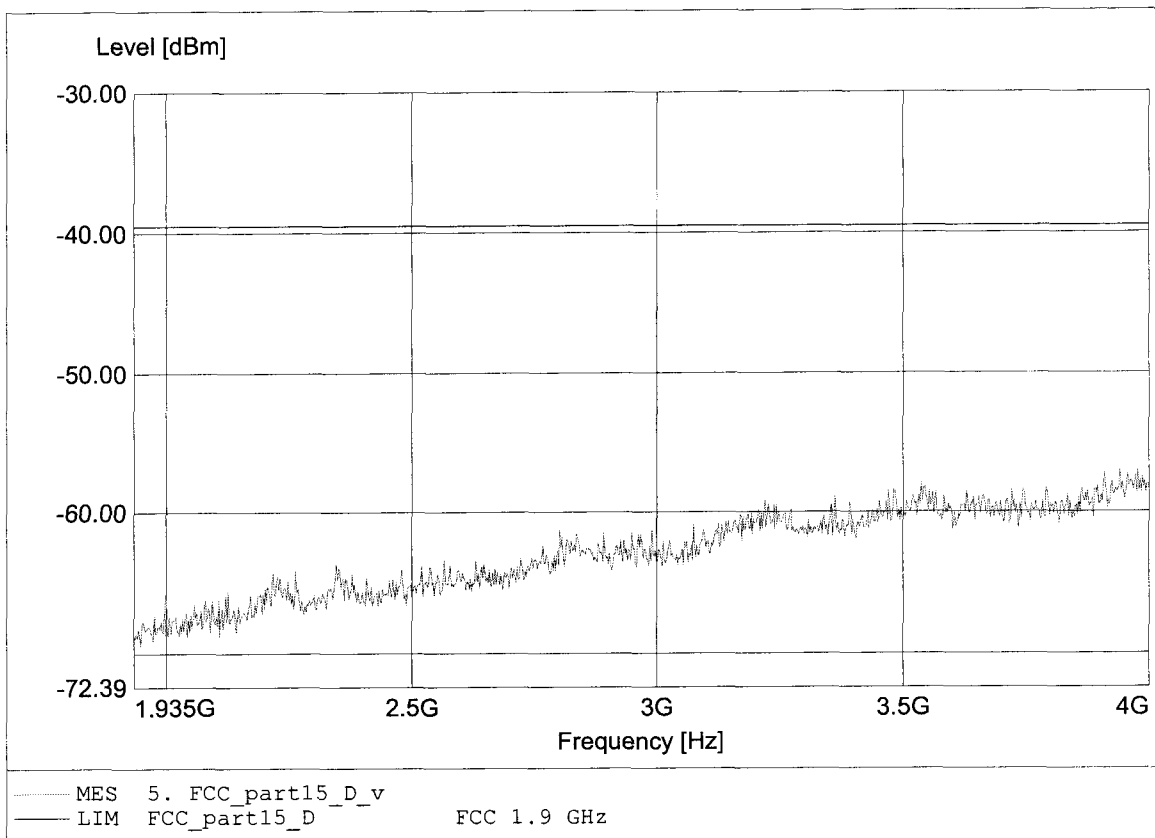

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.986GHz Pmax:-56.65dBm RBW: 100 kHz

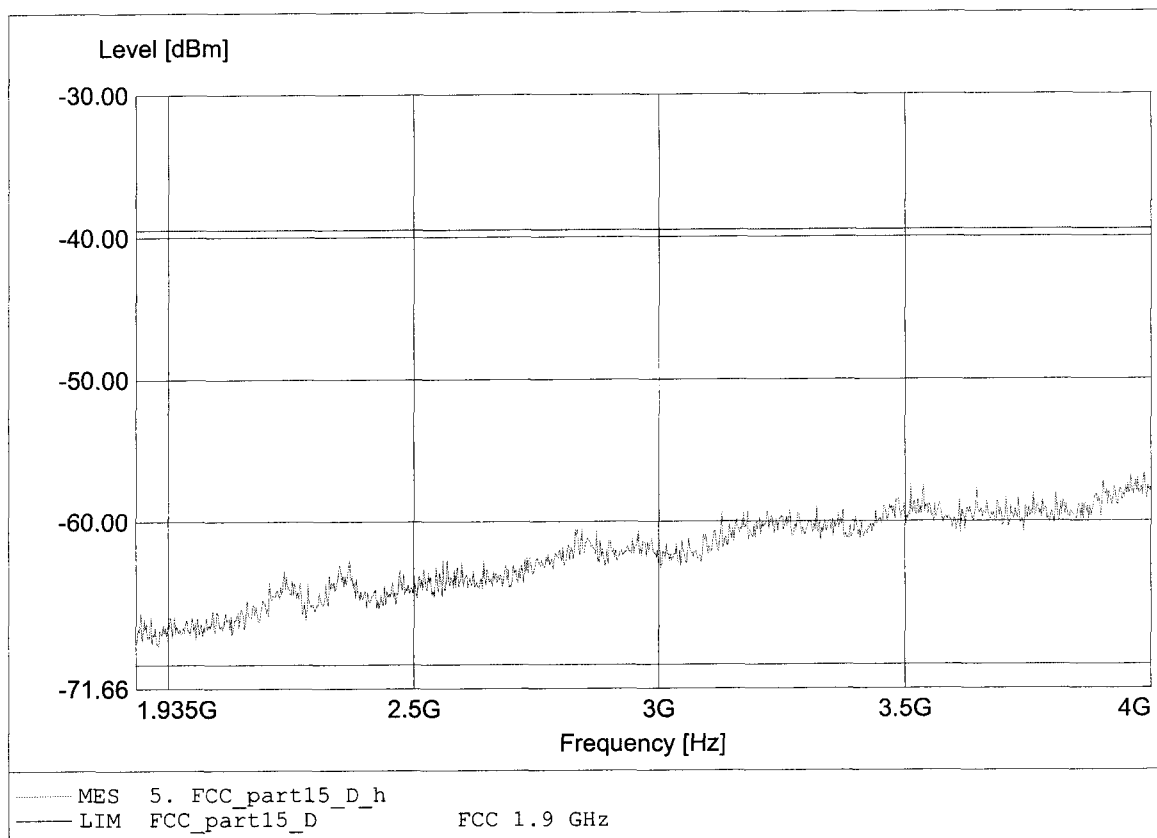

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 4 / antenna 3 (extern)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-48.53dBm RBW: 10 kHz

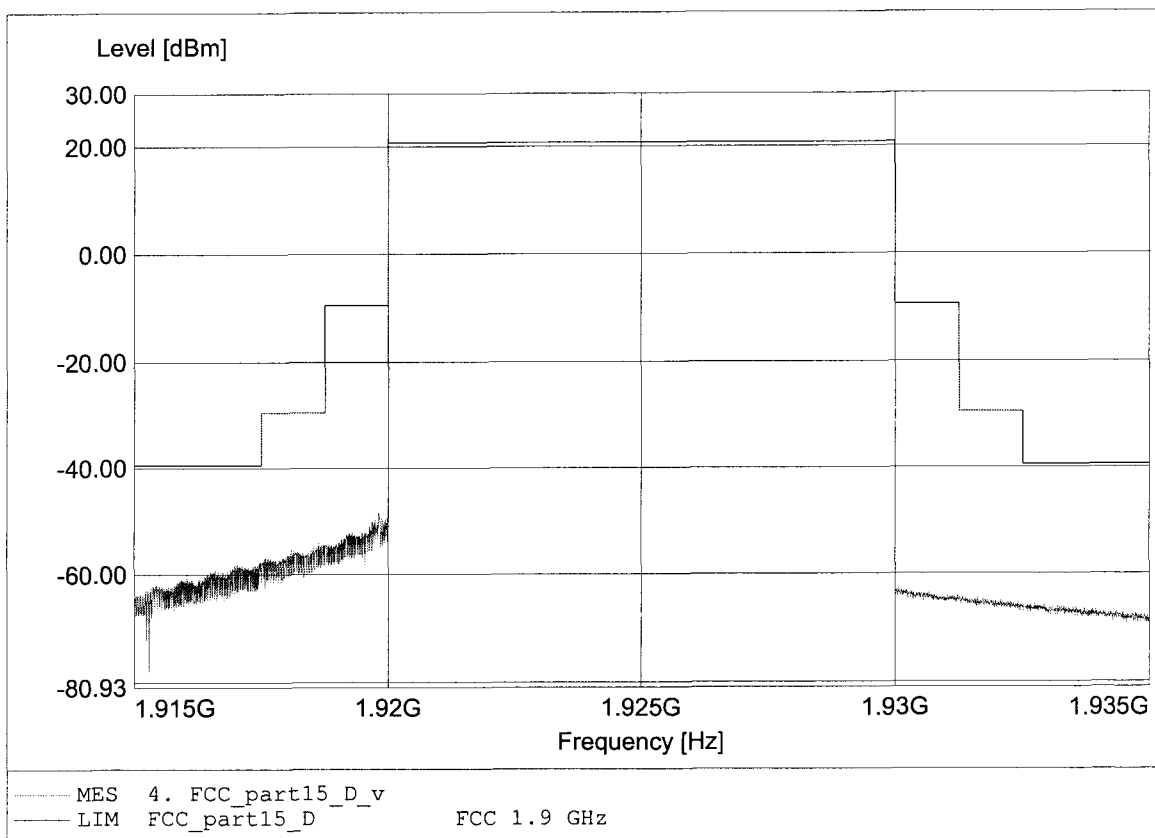

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-48.60dBm RBW: 10 kHz

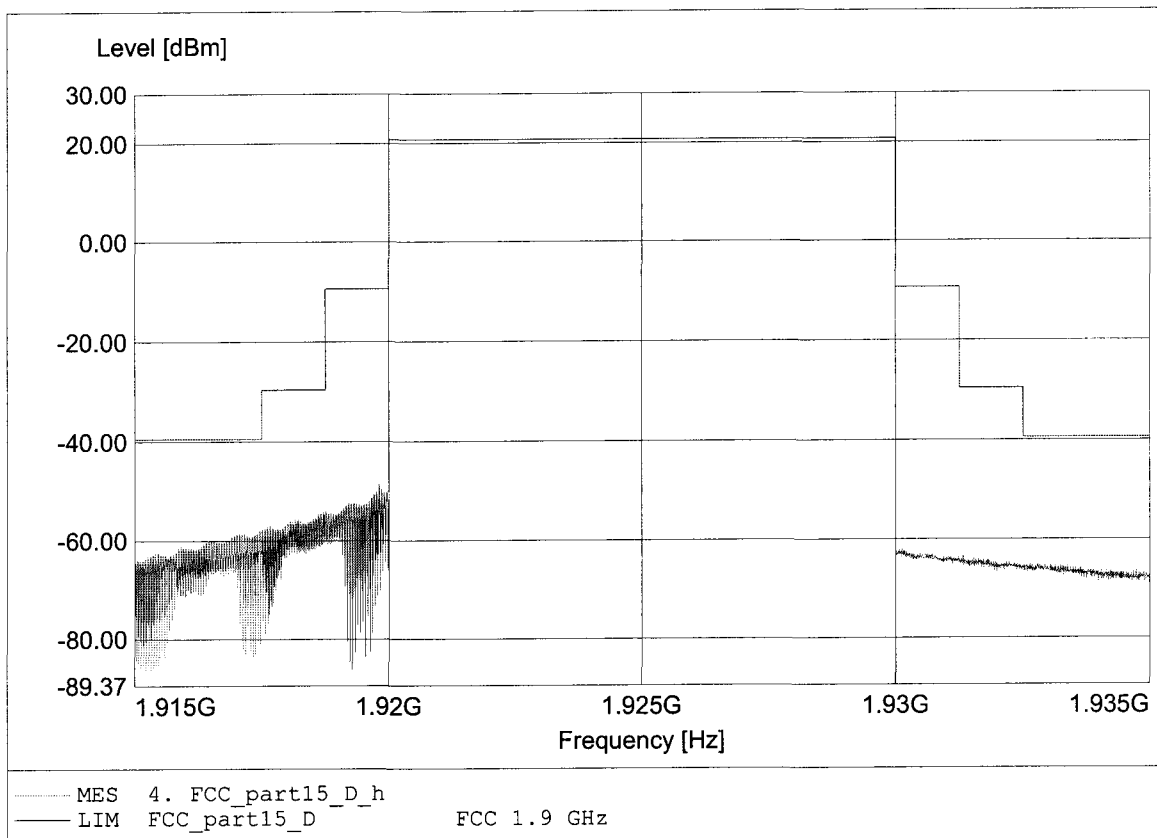

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0 / antenna 3 (extern)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-45.17dBm RBW: 10 kHz

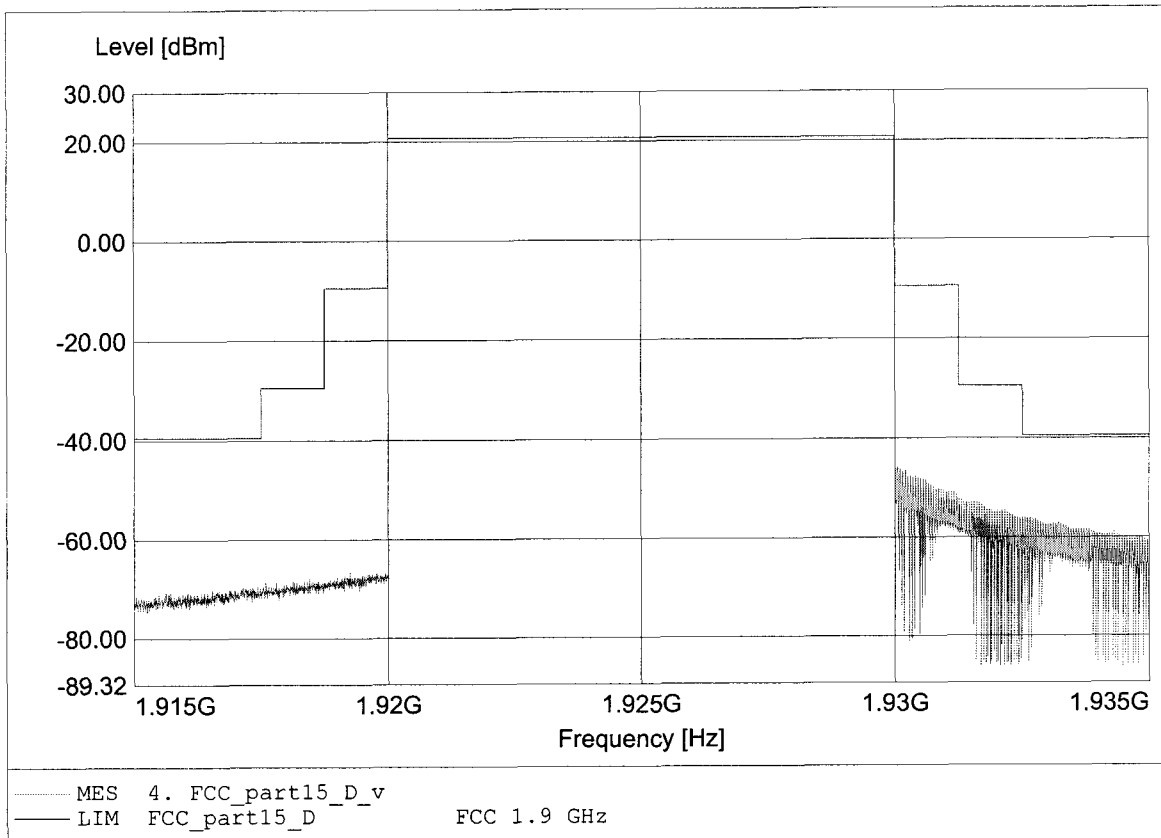

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-45.27dBm RBW: 10 kHz

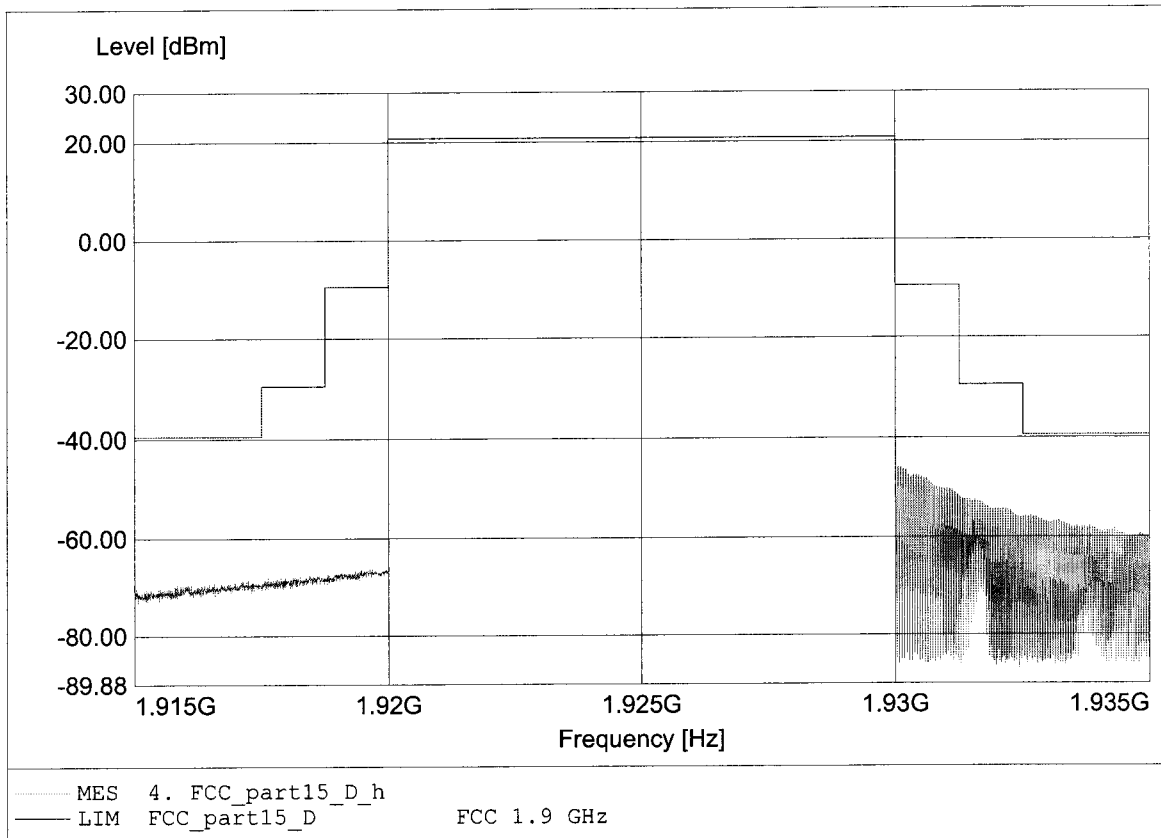

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.842GHz Pmax:-80.95dBm RBW:10 kHz

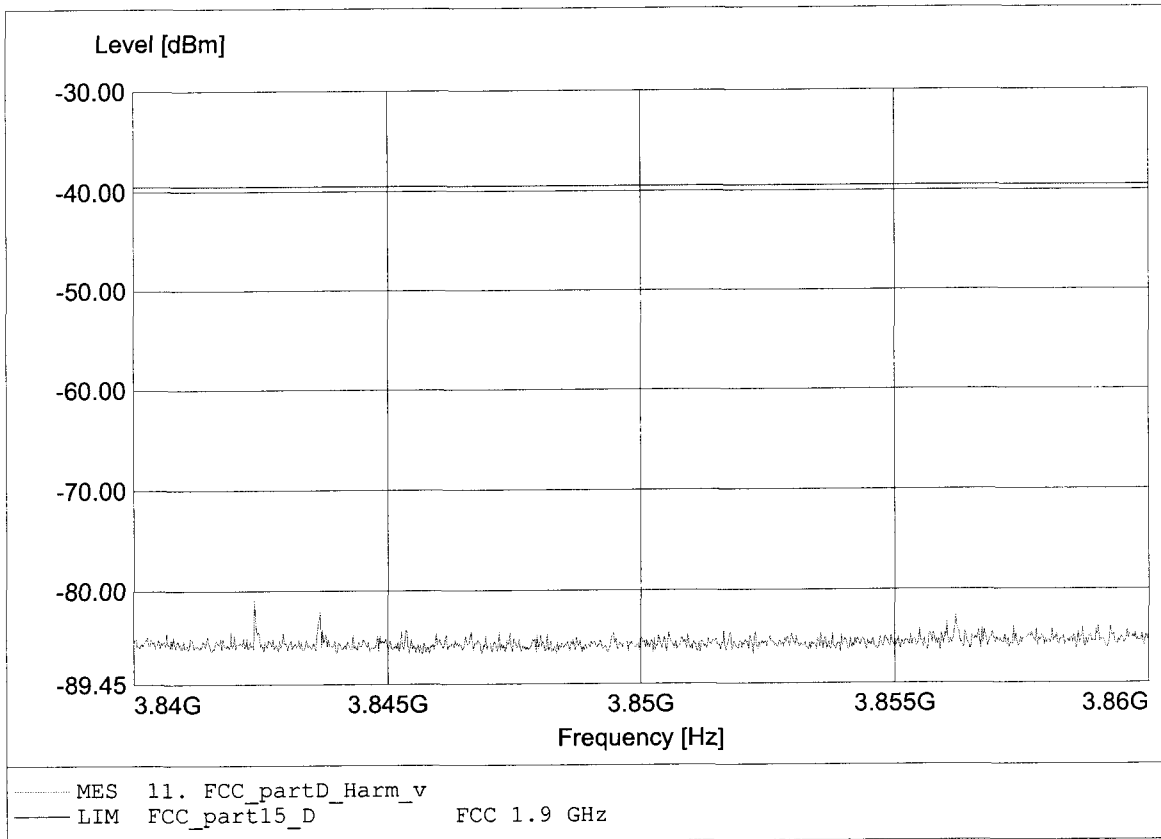

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.860GHz Pmax:-83.01dBm RBW:10 kHz

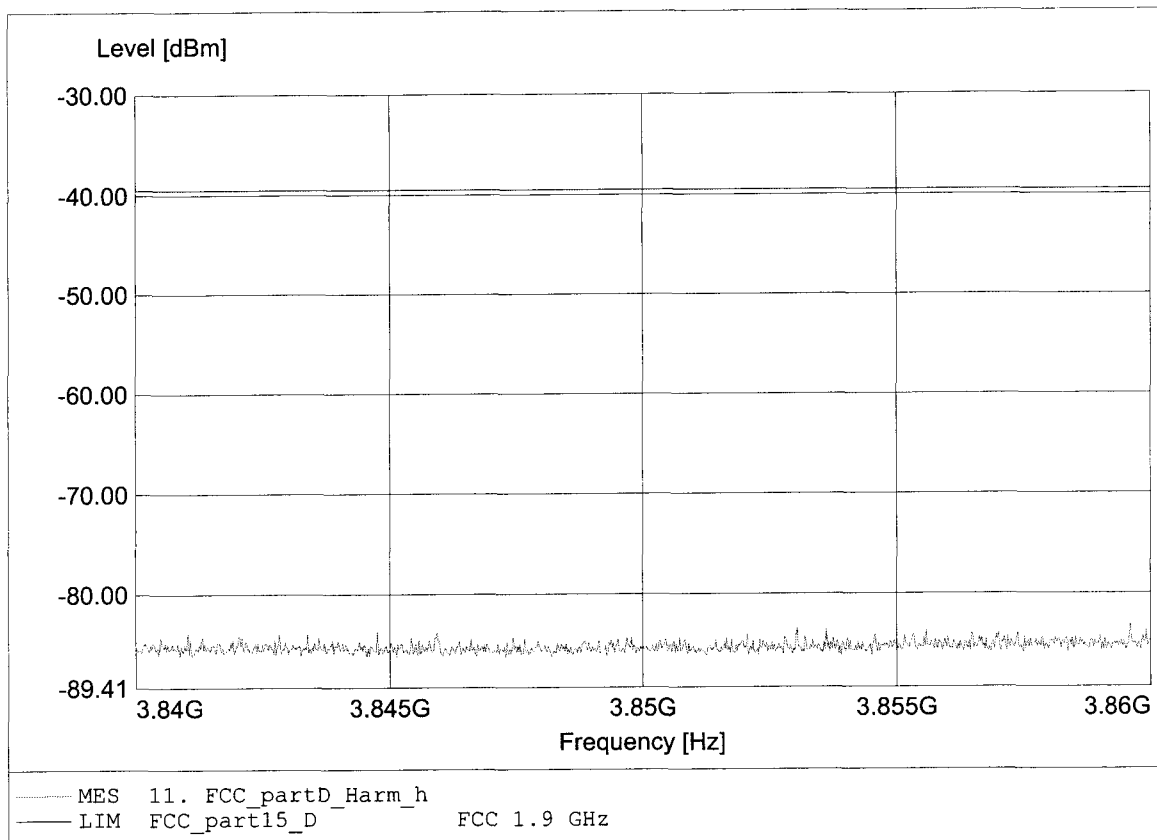

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.784GHz Pmax:-62.79dBm RBW:10 kHz

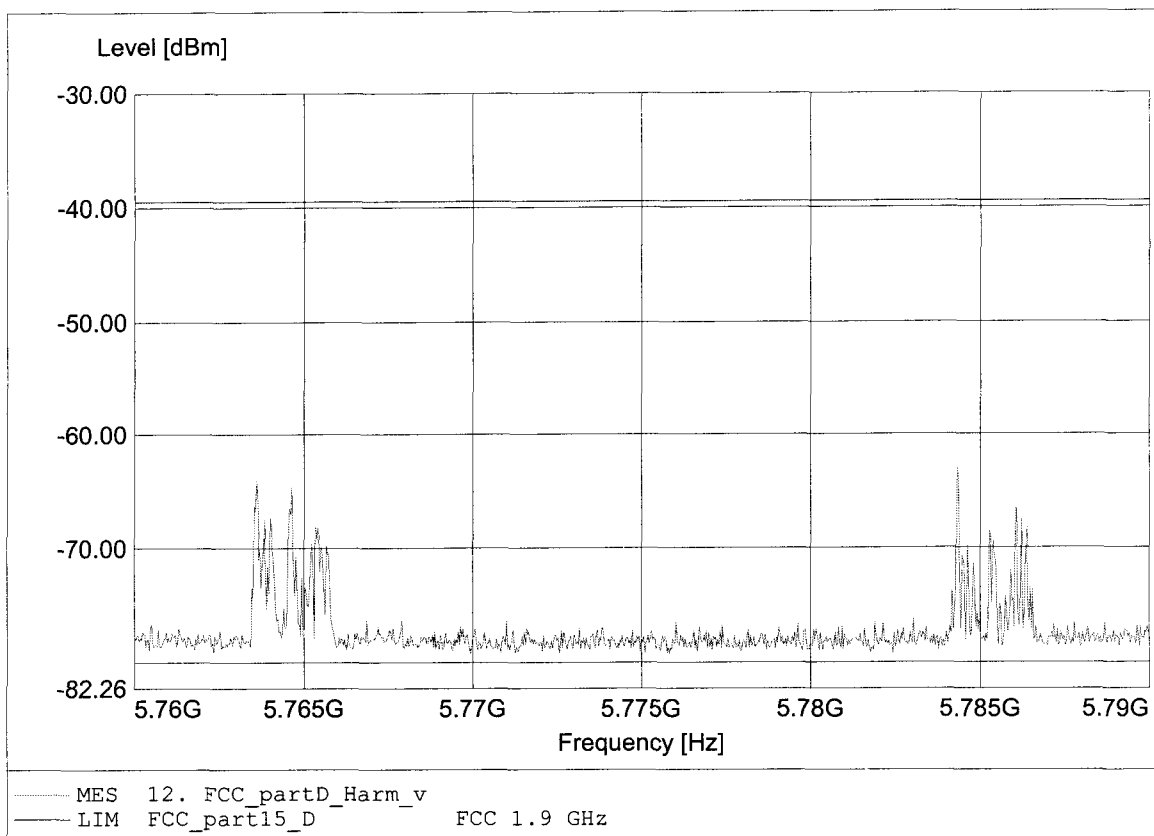

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.764GHz Pmax:-68.62dBm RBW:10 kHz

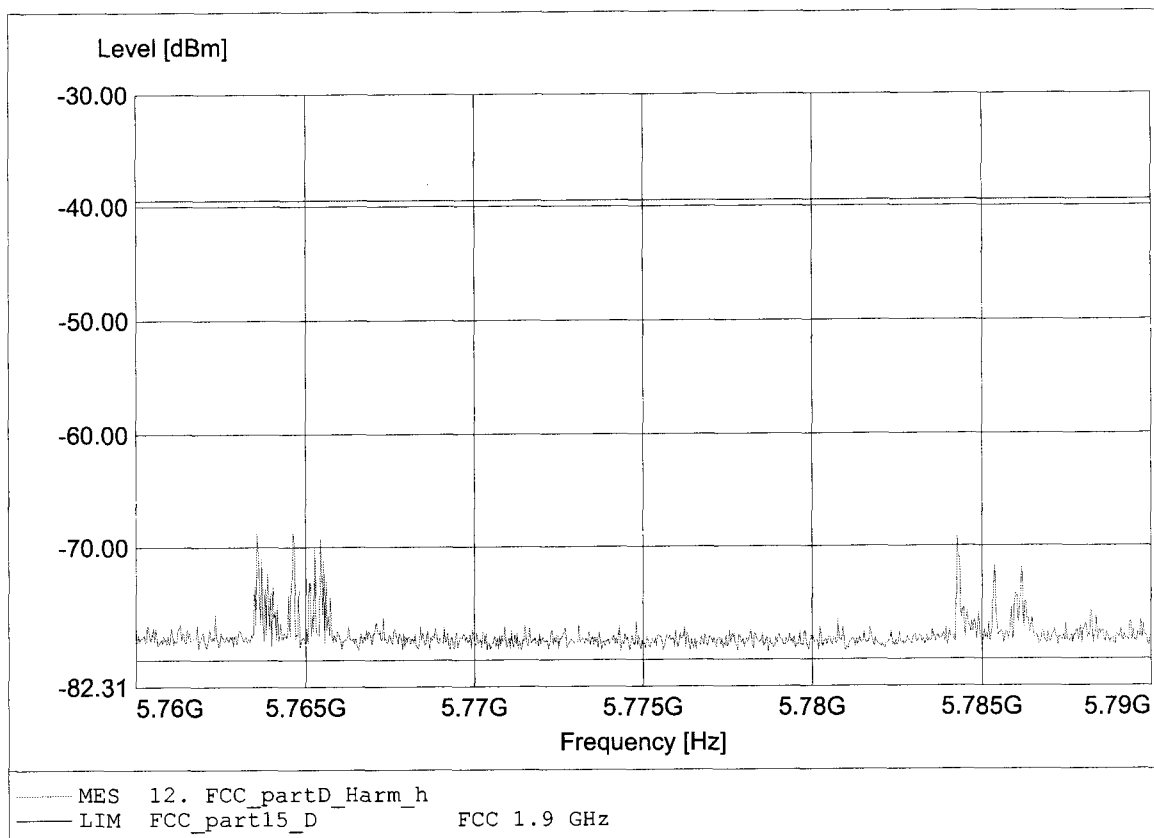

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:7.685GHz Pmax:-60.37dBm RBW:10 kHz

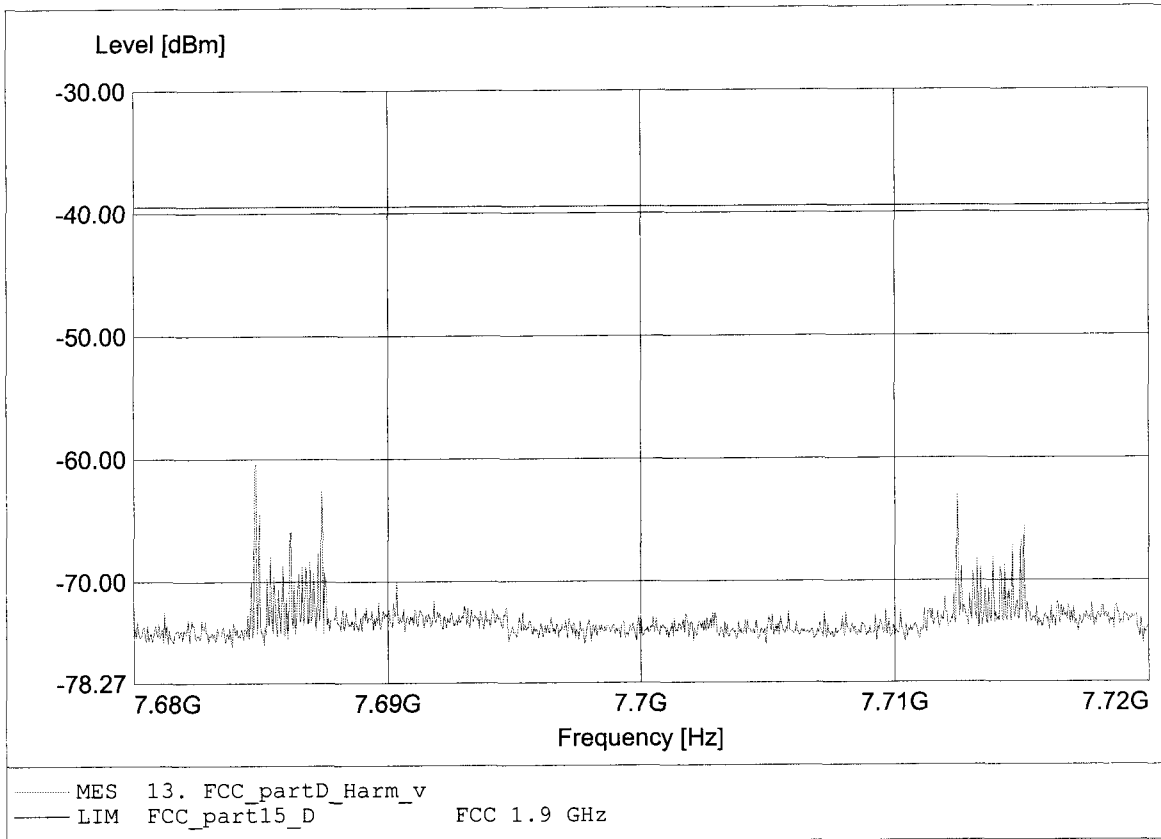

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPSC DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:7.712GHz Pmax:-61.45dBm RBW:10 kHz

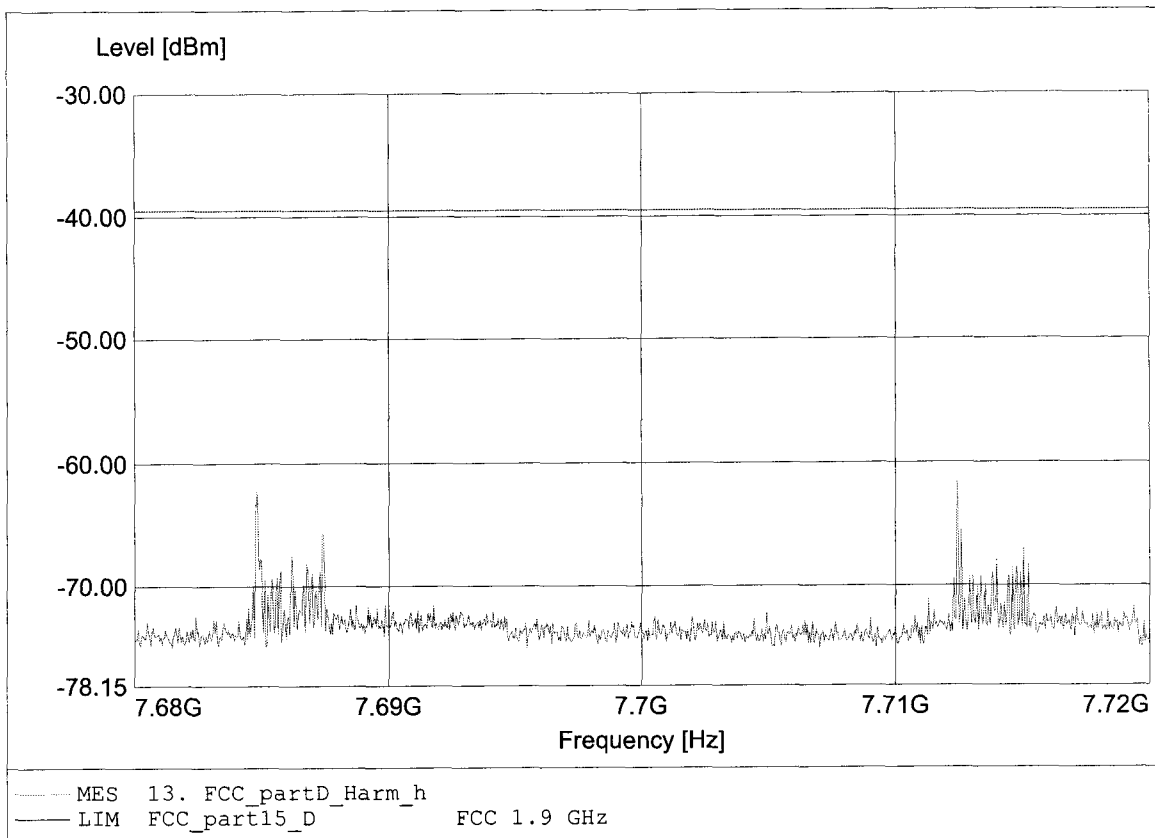

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.606GHz Pmax:-65.66dBm RBW:10 kHz

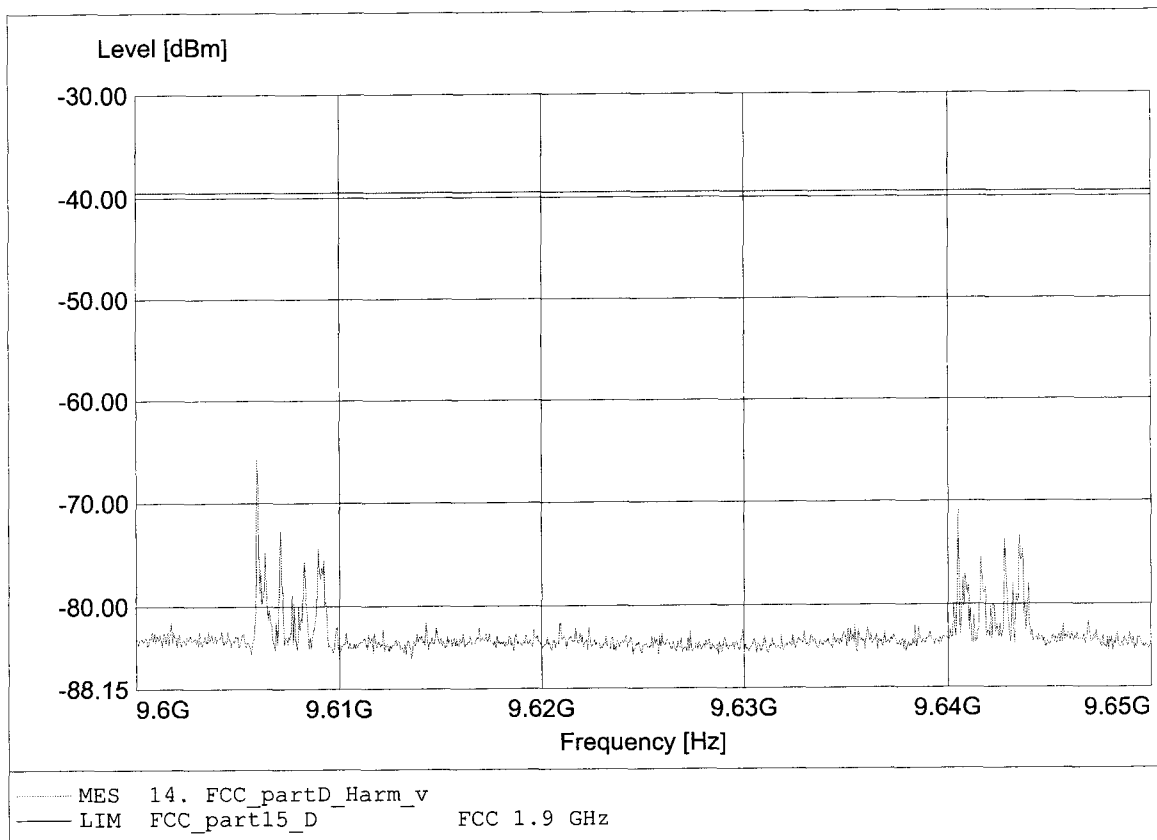

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPSC DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.641GHz Pmax:-64.02dBm RBW:10 kHz

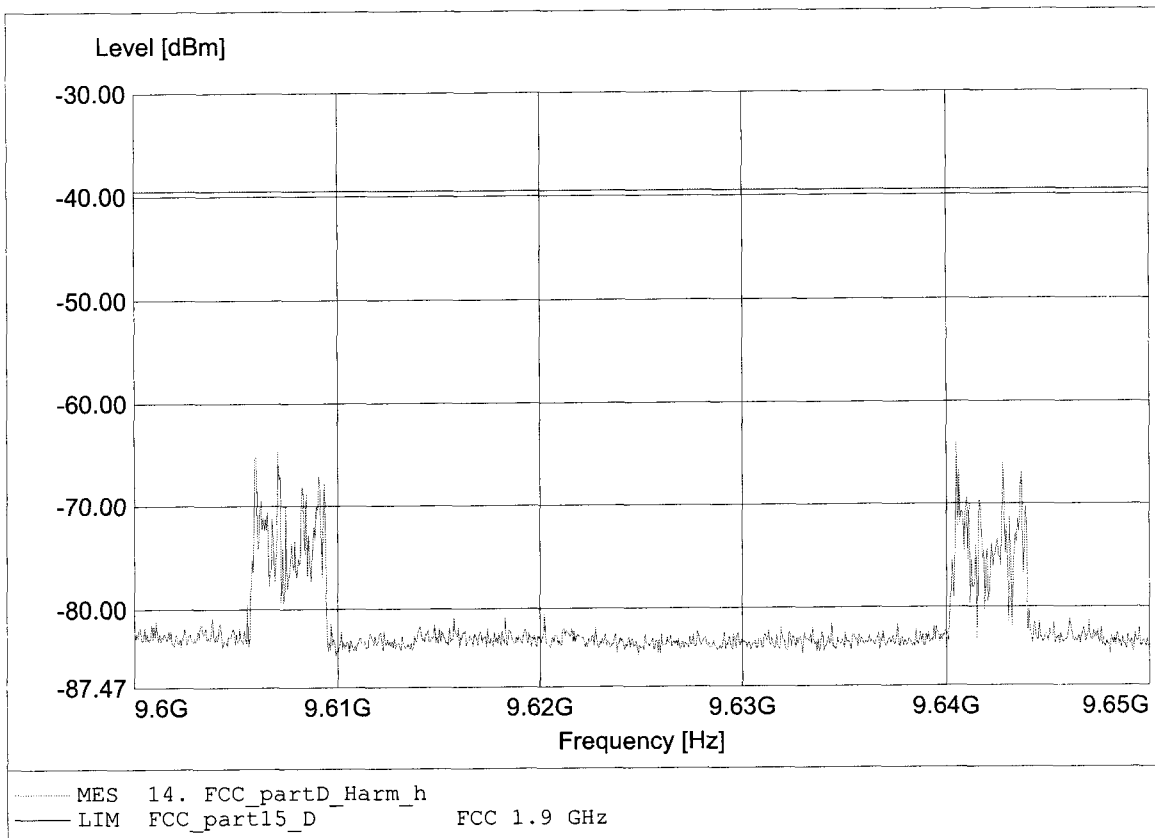

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.569GHz Pmax:-72.43dBm RBW:10 kHz

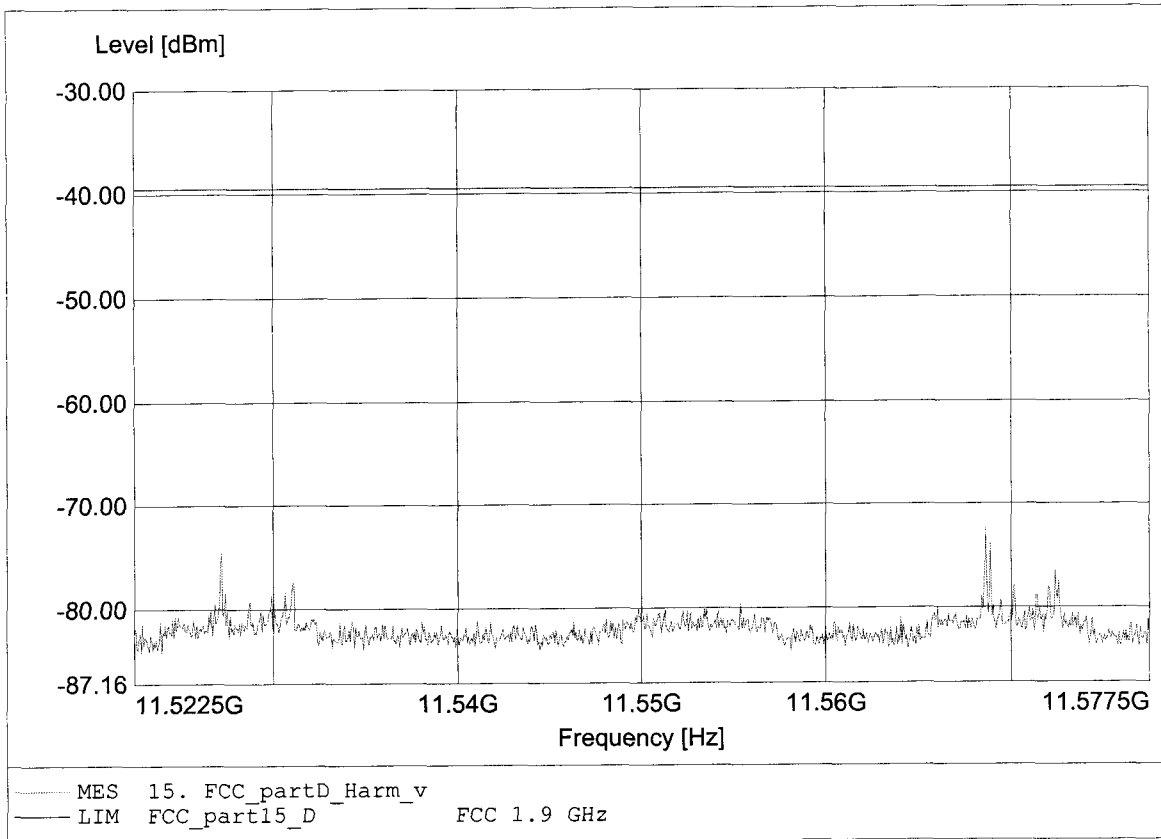

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.569GHz Pmax:-70.73dBm RBW:10 kHz

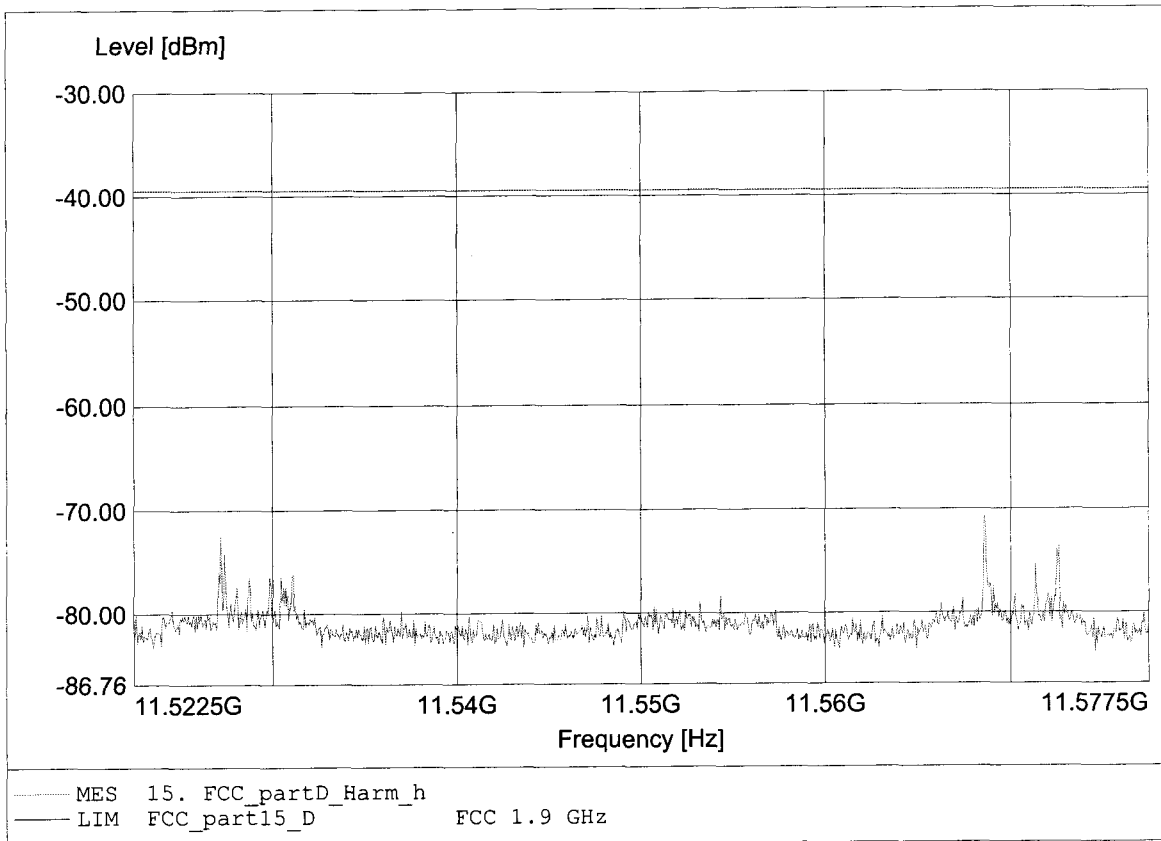

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.497GHz Pmax:-71.12dBm RBW:10 kHz

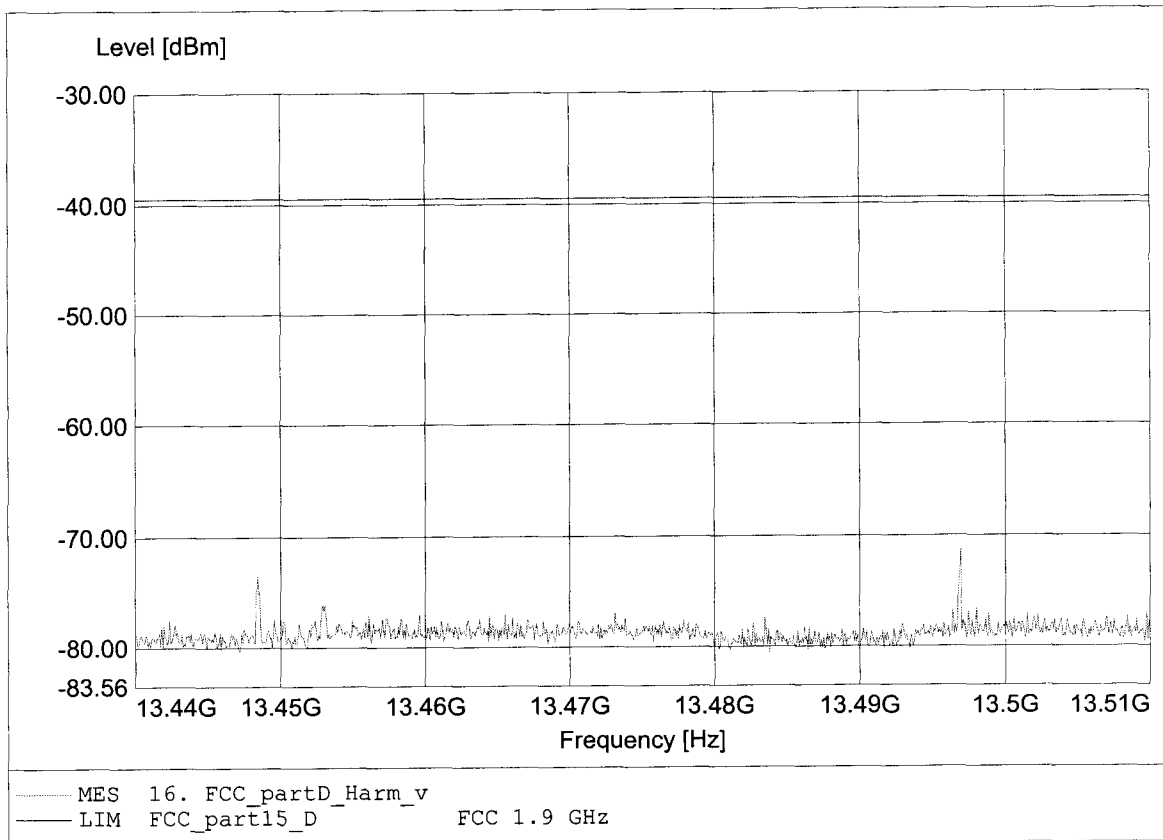

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.448GHz Pmax:-62.95dBm RBW:10 kHz

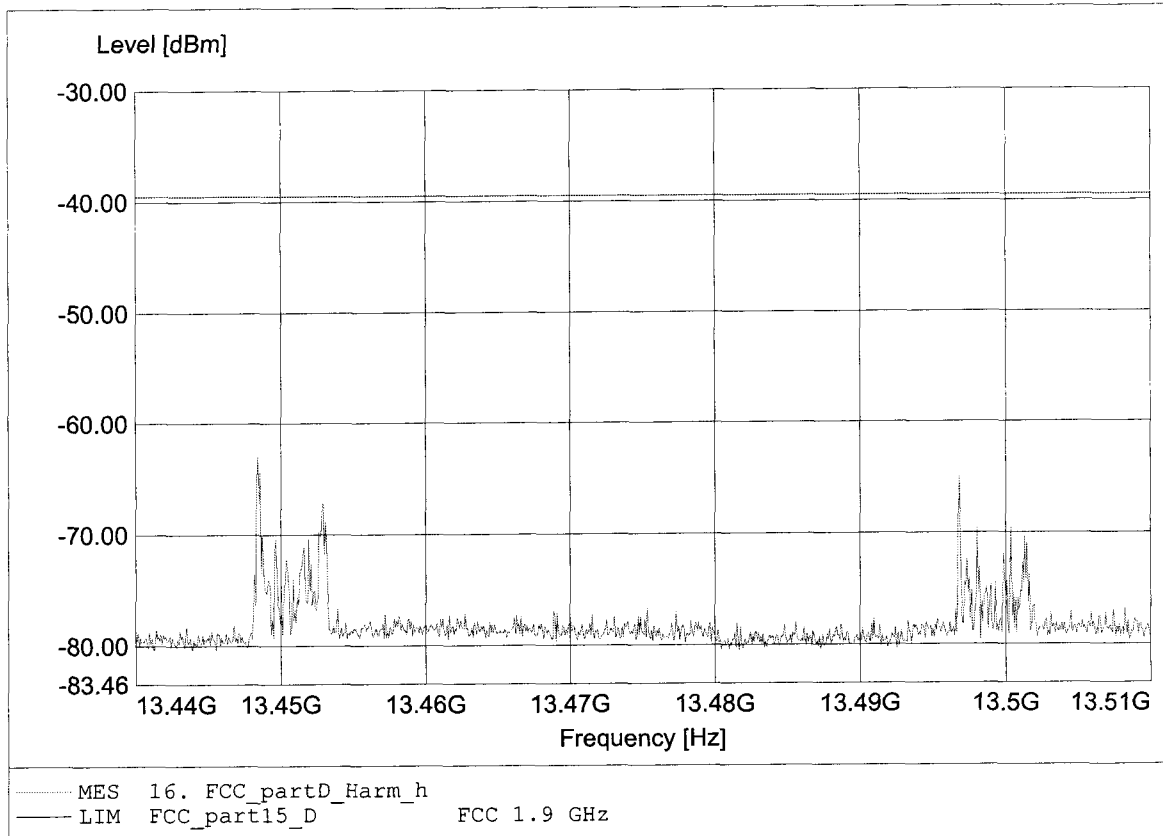

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.400GHz Pmax:-76.37dBm RBW:10 kHz

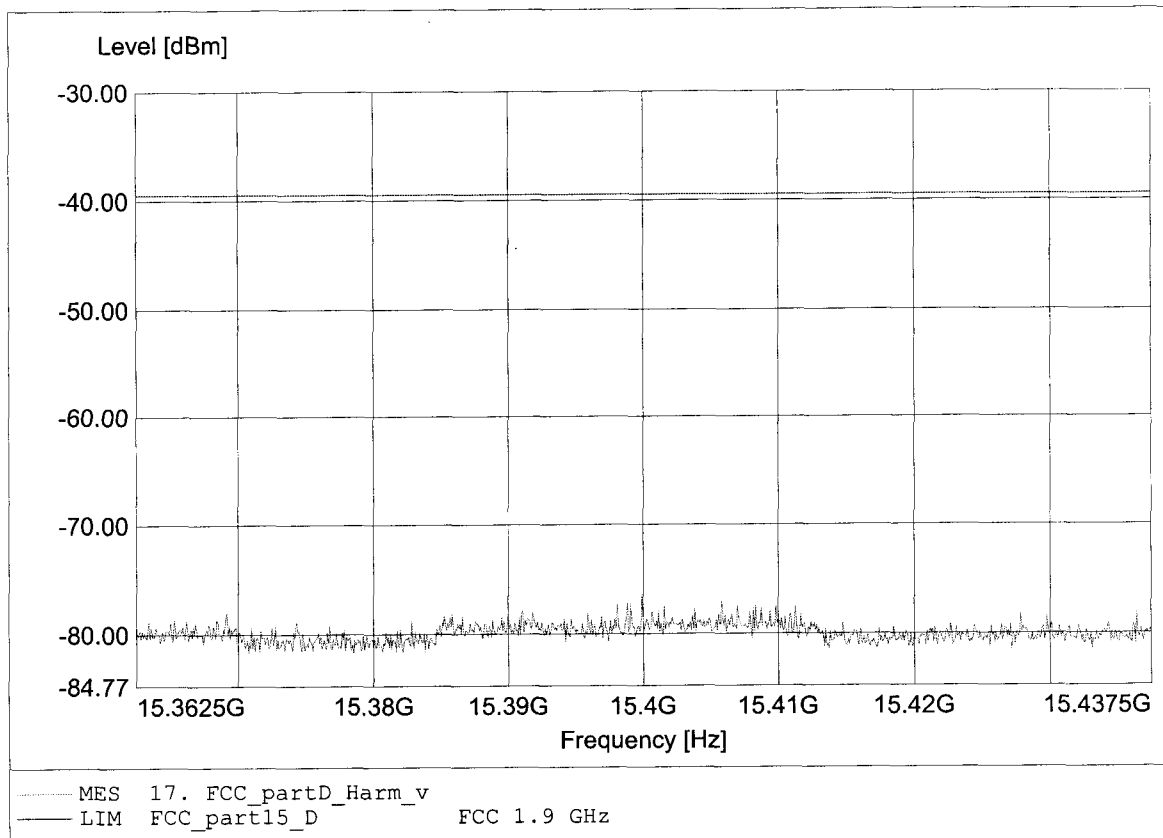

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPDS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.403GHz Pmax:-76.39dBm RBW:10 kHz

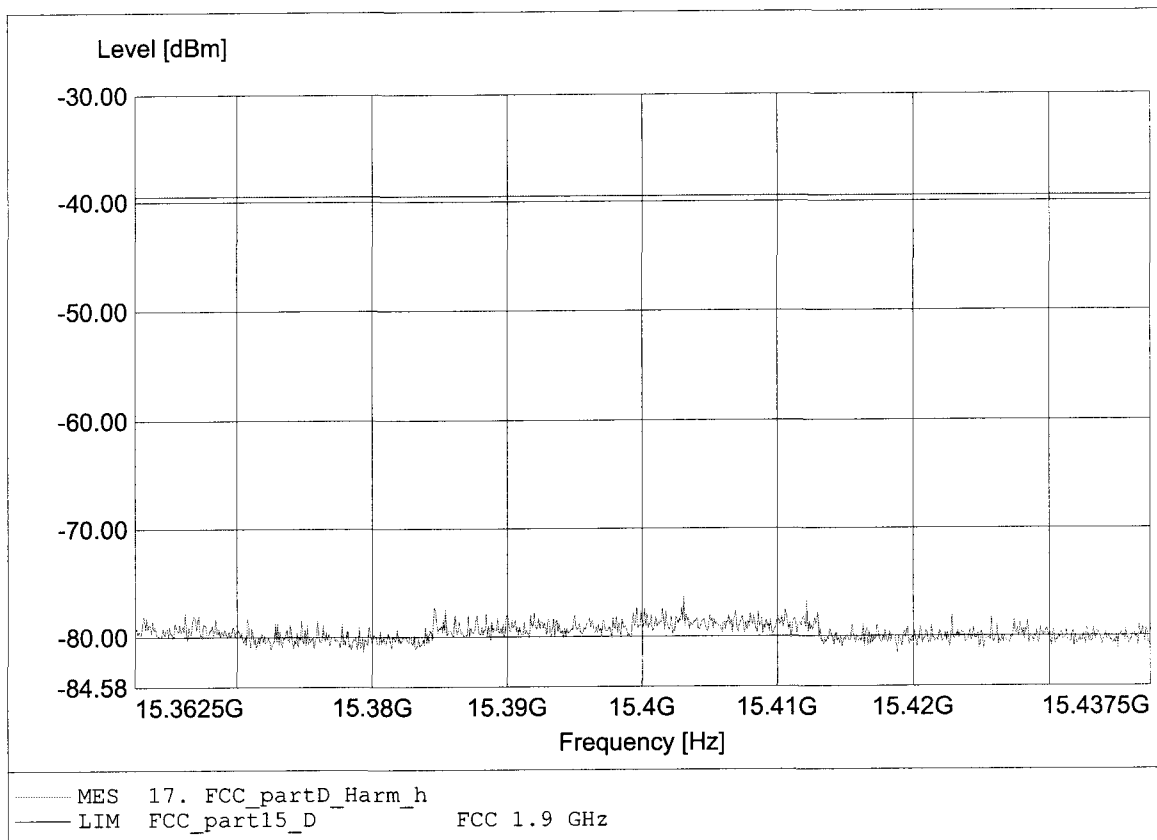

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.304GHz Pmax:-76.53dBm RBW:10 kHz

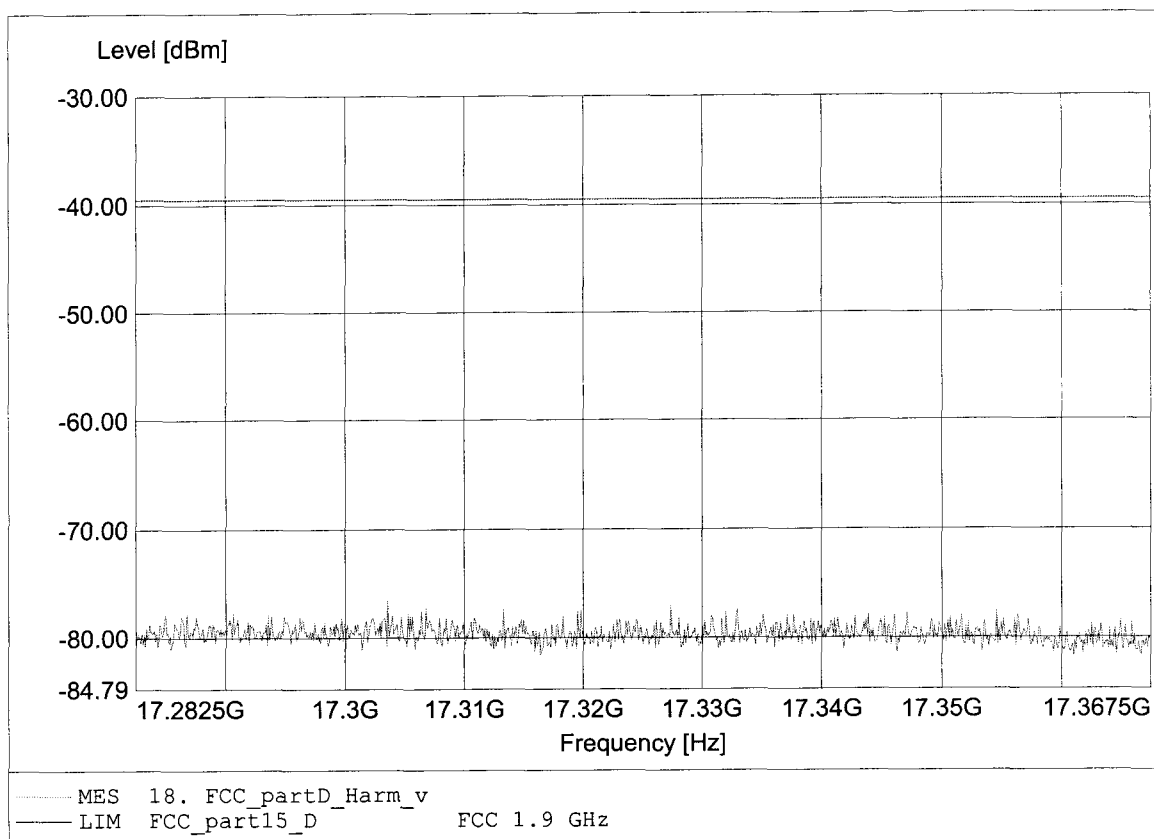

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.355GHz Pmax:-76.56dBm RBW:10 kHz

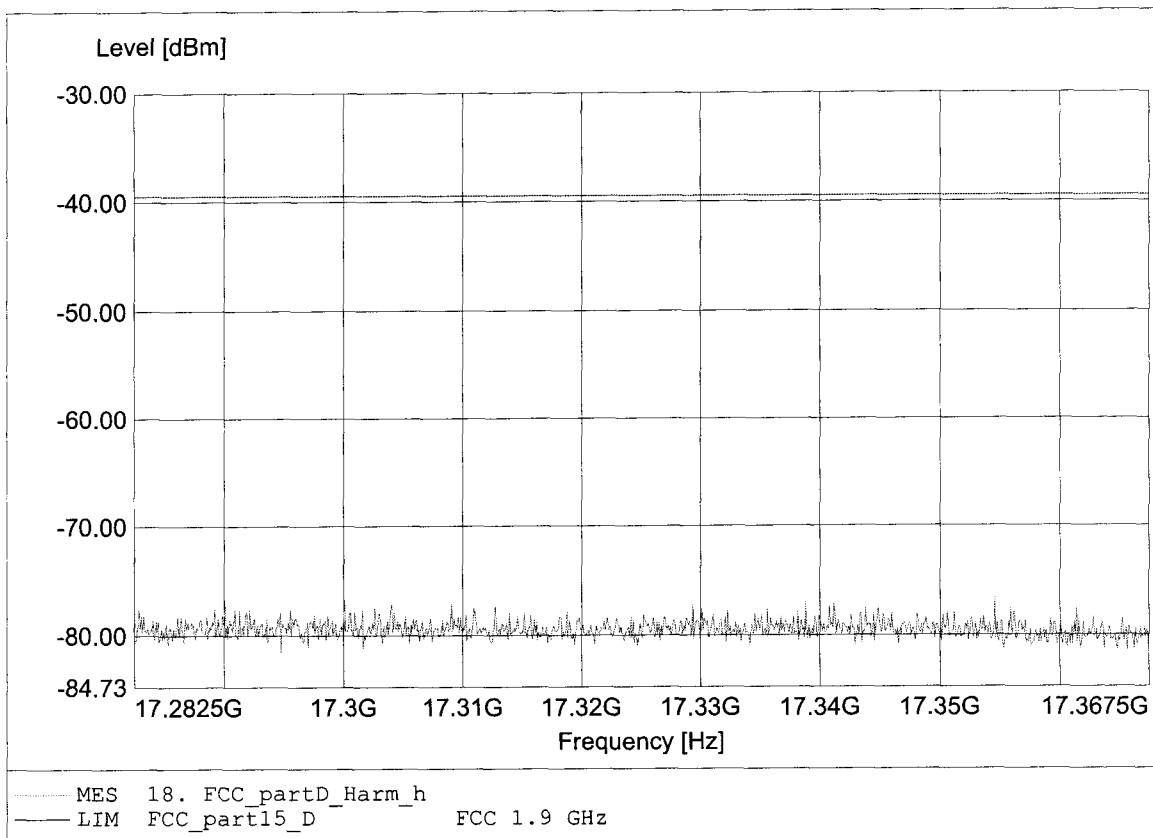

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.270GHz Pmax:-71.48dBm RBW:10 kHz

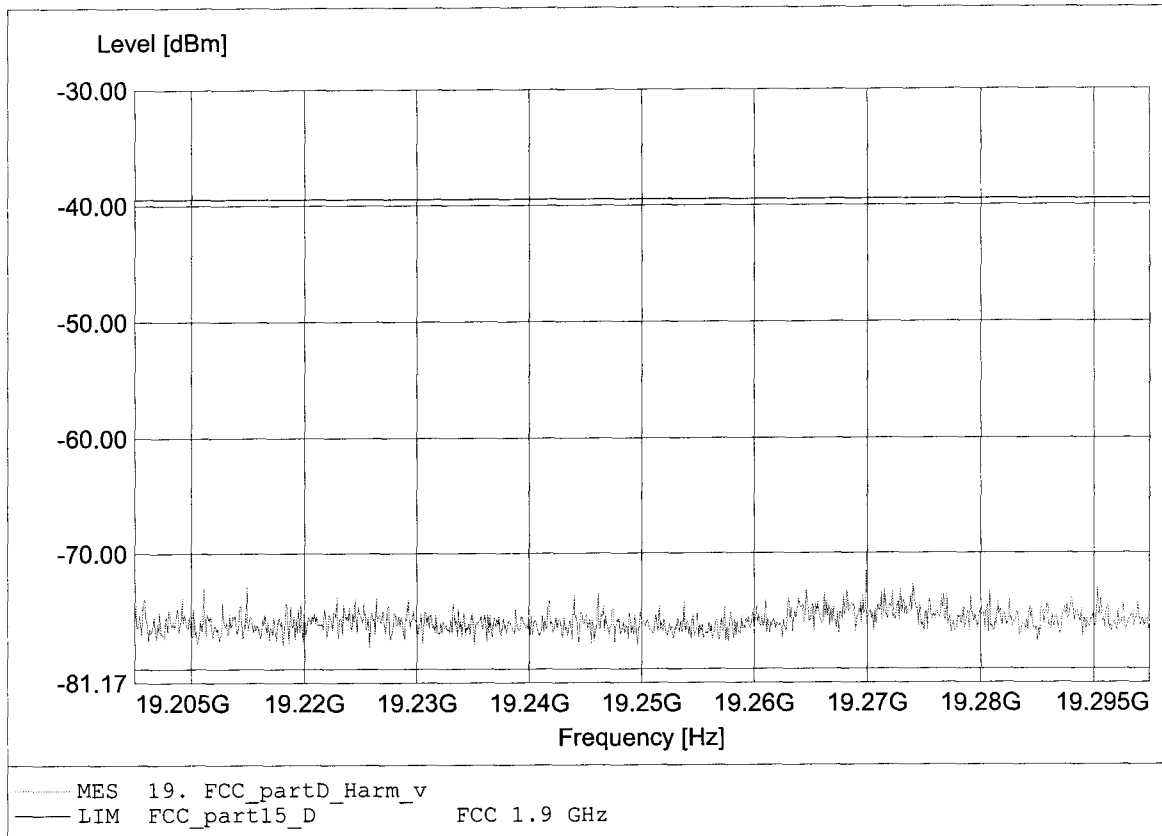

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9 / ch.: 0,4 / a 3 (Huber + Suhner 226504)
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.273GHz Pmax:-71.89dBm RBW:10 kHz

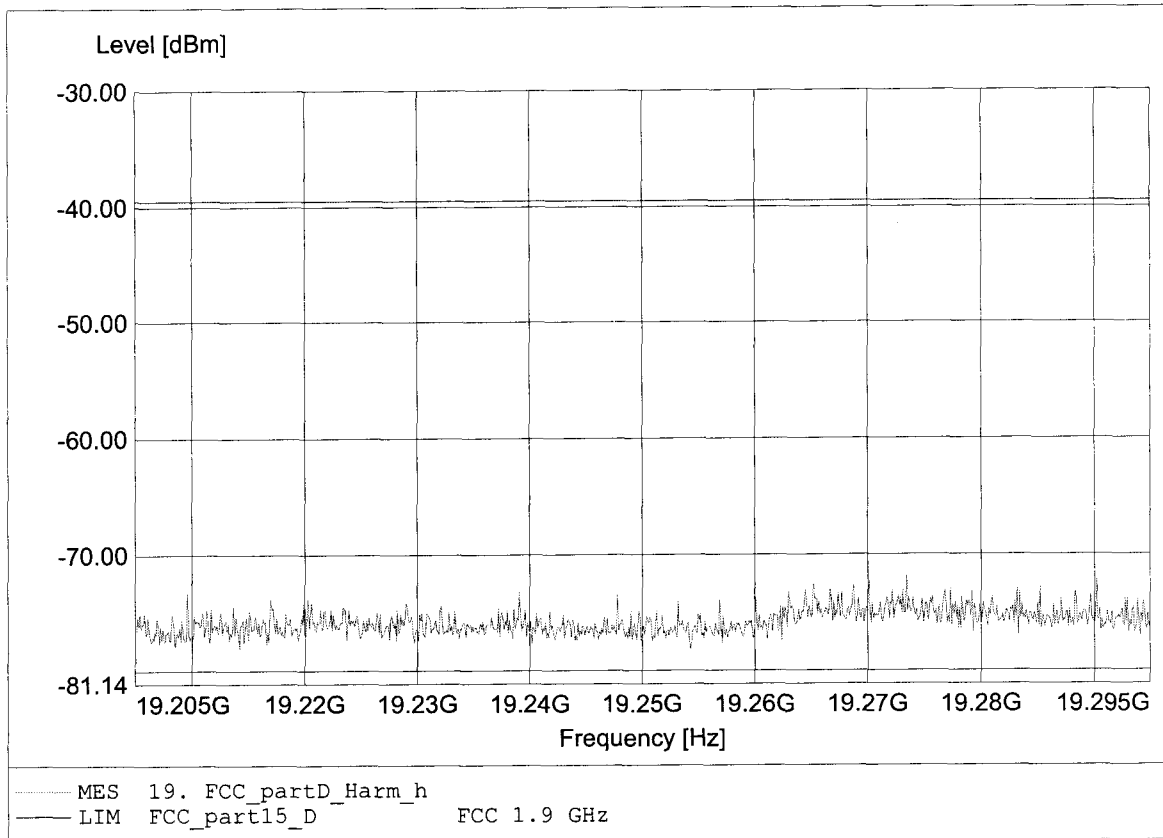

Appendix S

Frame period

Appendix T

Frequency stability


Appendix U

Receiver spurious emissions

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: according to S15109, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:194.333MHz Emax:27.38dBμV/m RBW: 1 MHz

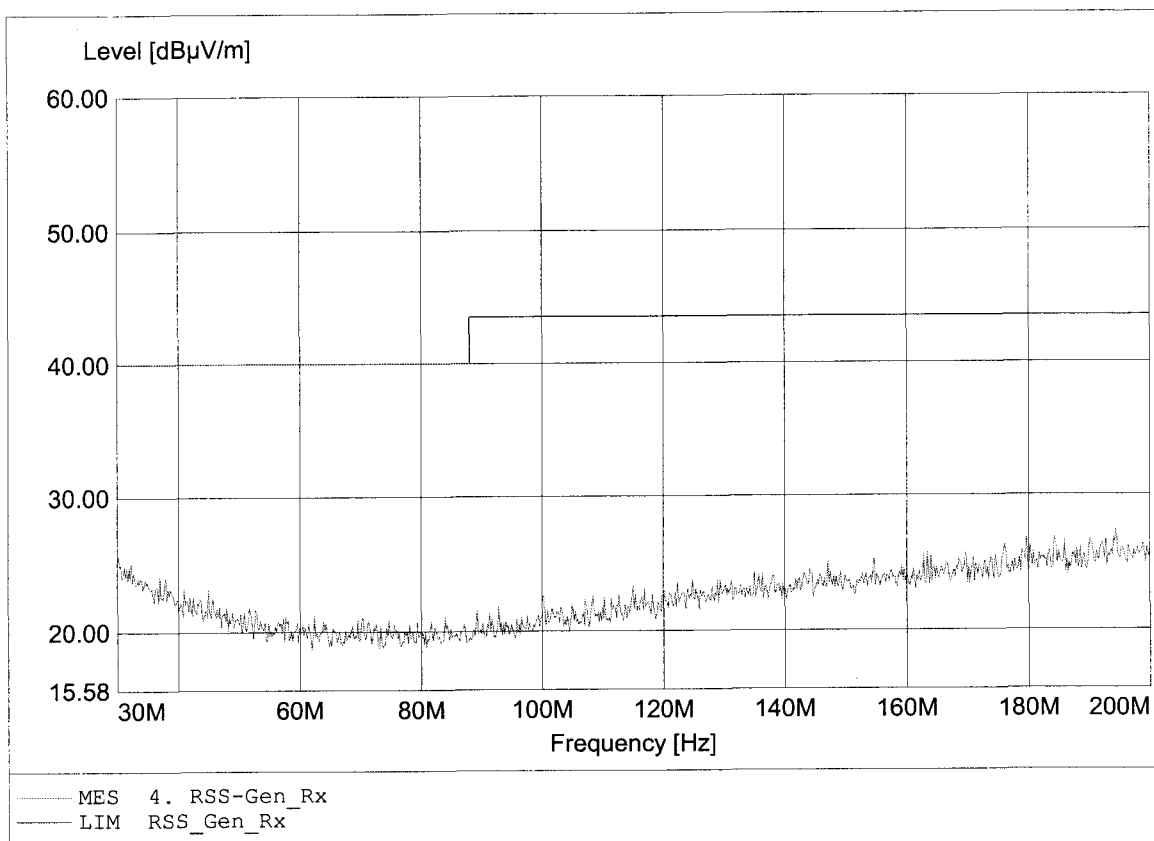

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: according to S15109, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:199.811MHz Emax:27.07dBμV/m RBW: 1 MHz

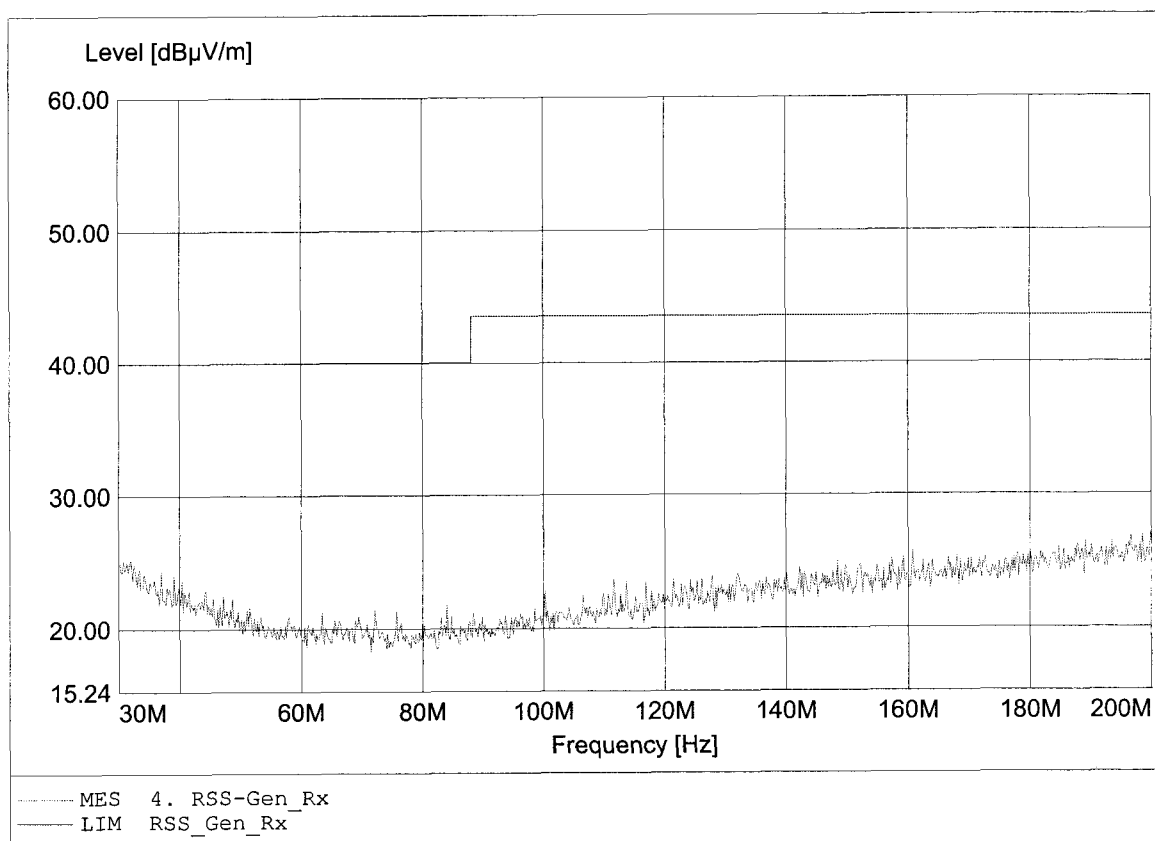

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: according to S15109, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:878.222MHz Emax:20.49dBμV/m RBW: 1 MHz

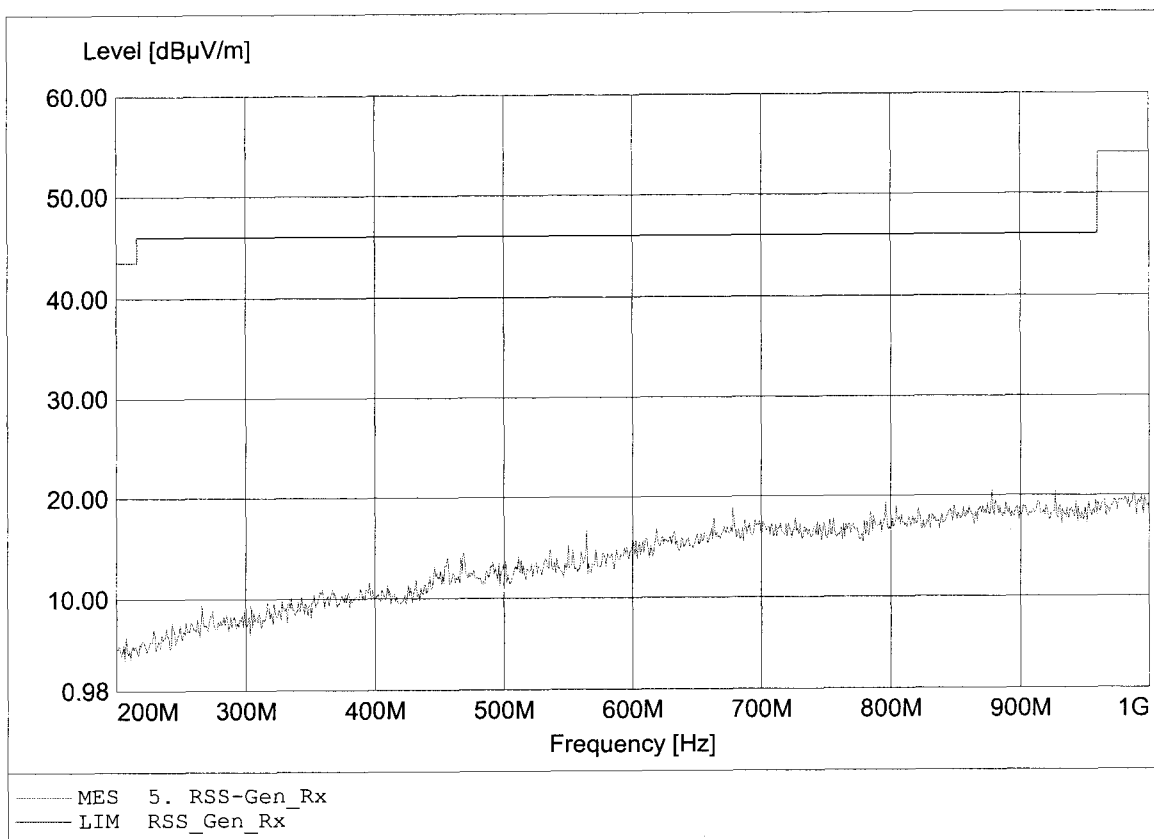

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C / Unom.: 120 V~ (AC/DC adapter)
Test Specification: according to S15109, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:958.222MHz Emax:21.48dBμV/m RBW: 1 MHz

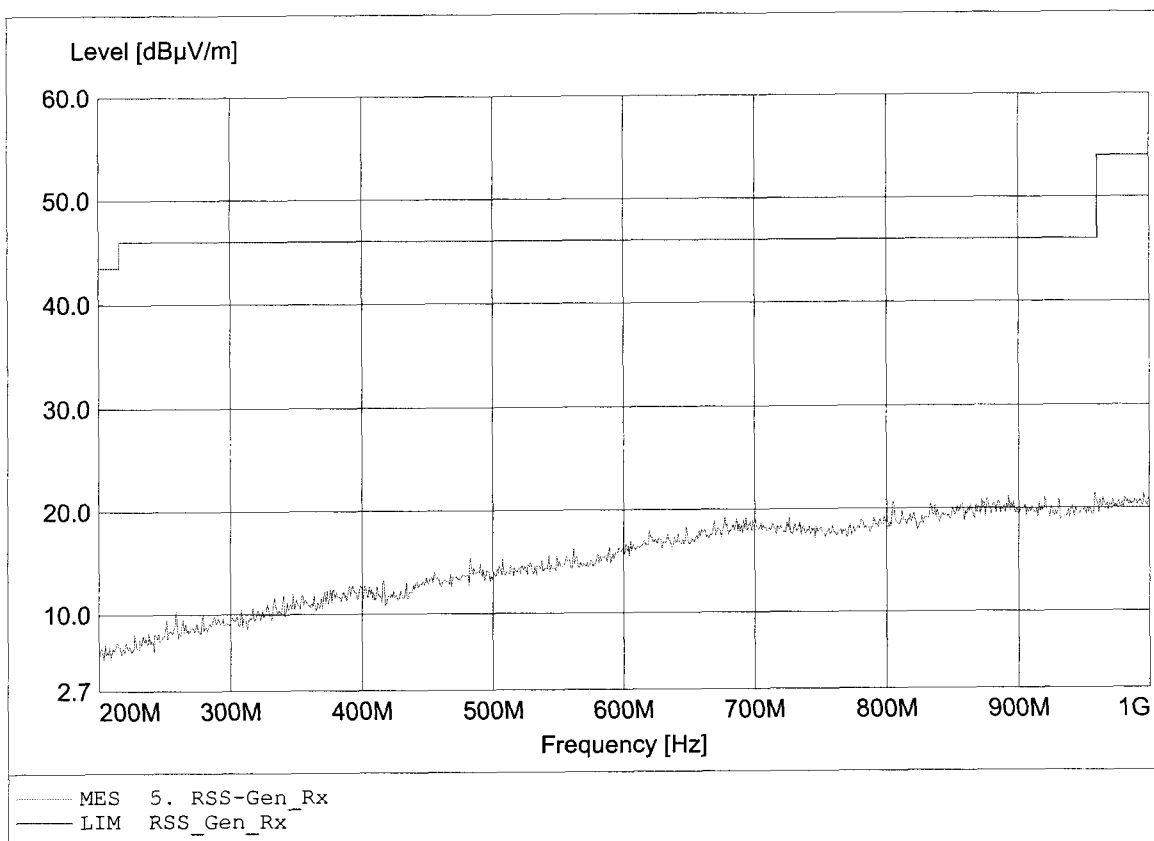

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: according to S15109, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.940GHz Emax:42.73dBμV/m RBW: 1 MHz

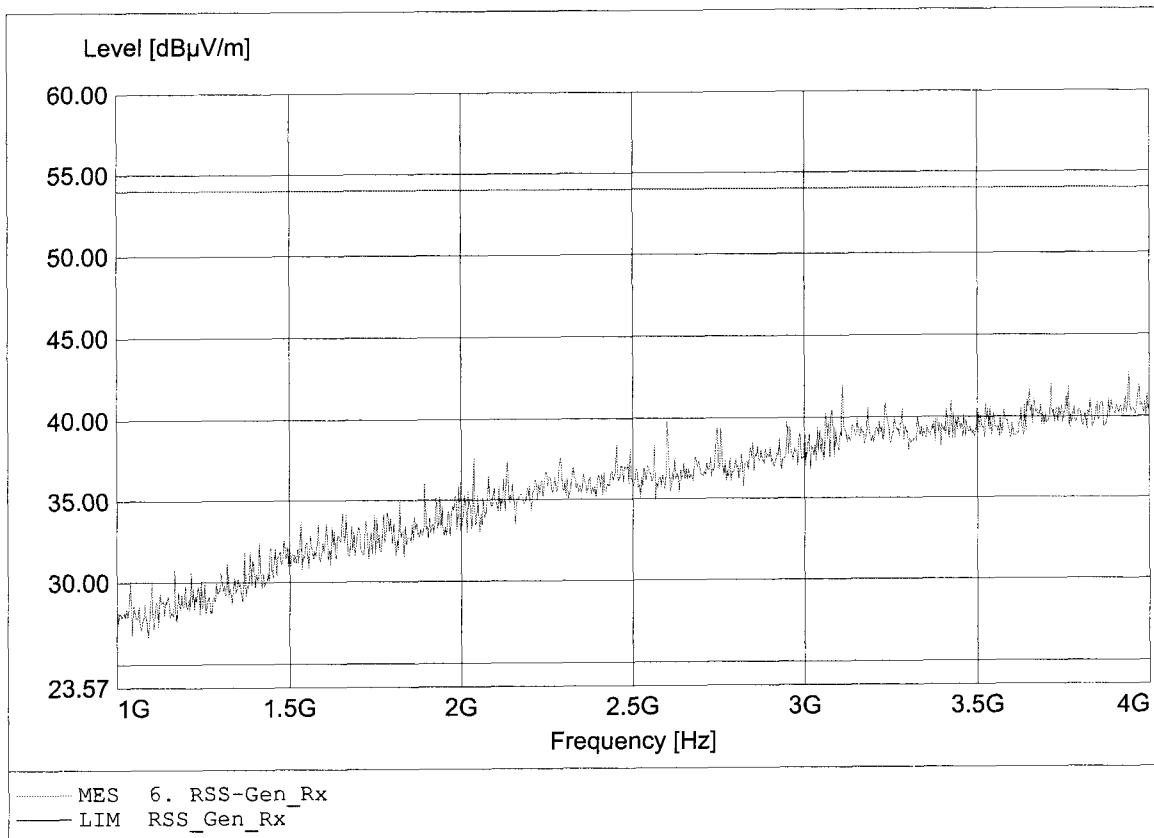

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9
Operator: ETS / Mr. Cerovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: according to S15109, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.990GHz Emax:42.38dBuV/m RBW: 1 MHz

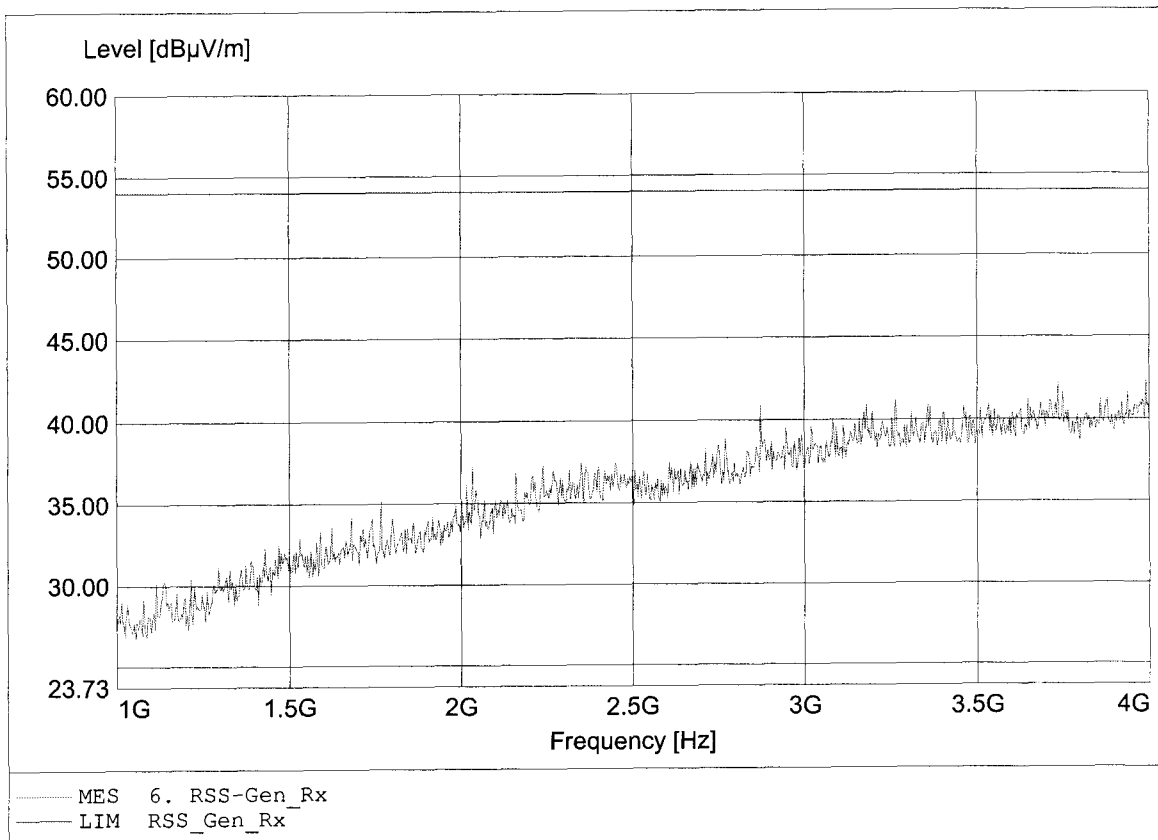

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN

Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRF12E 1G9
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: according to S15109, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:7.756GHz Emax:42.83dBuV/m RBW: 1 MHz

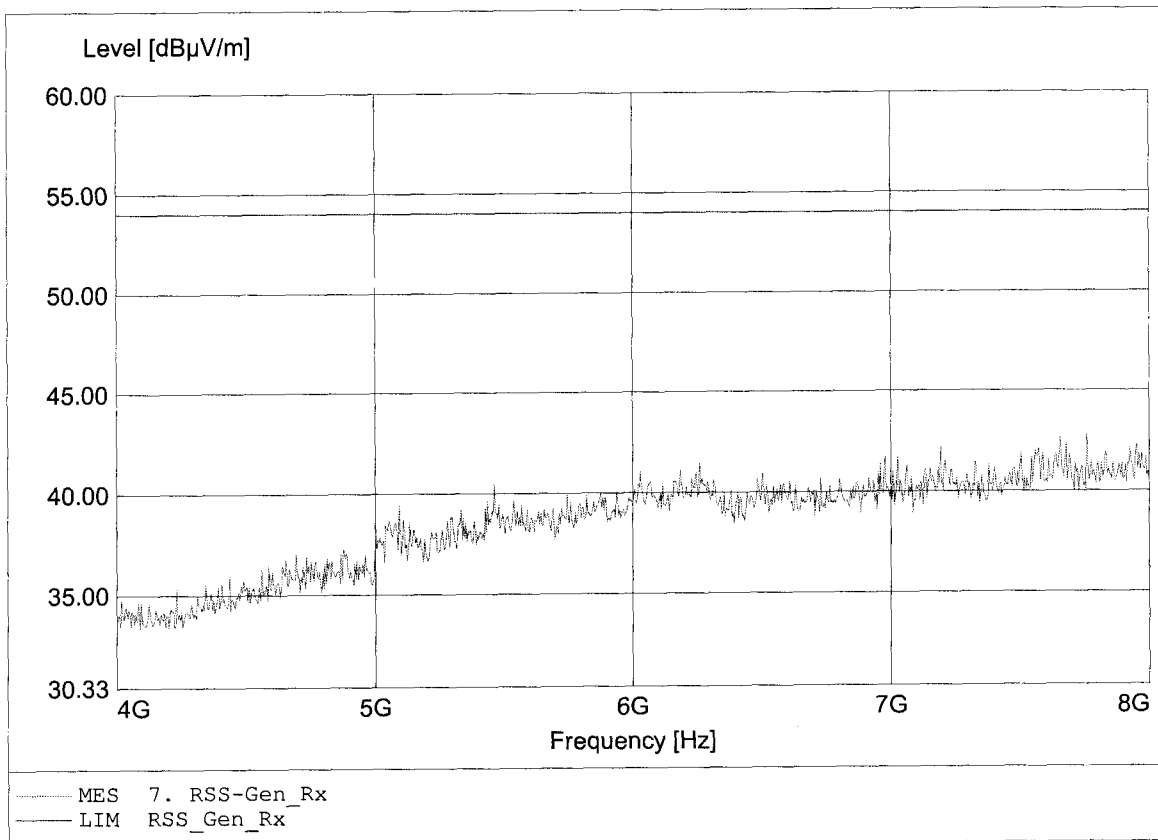

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN

Approval Holder: POLYCOM (Kirk telecom)
EUT: UPCS DECT voice communication solution / Repeater
Model / Ch. : WRFP12E 1G9
Operator: ETS / Mr. Cersovsky
Test Conditions: 25°C /Unom.: 120 V~ (AC/DC adapter)
Test Specification: according to S15109, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:7.480GHz Emax:42.12dBμV/m RBW: 1 MHz

