


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / WRFP-2G4
Manufacturer: KIRK telecom A/S (external antenna)


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 9V (230V AC/DC adaptor), (mode Tx, Ch 0)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2485,12MHz Pmax:55,91dBμV/m RBW=100KHz

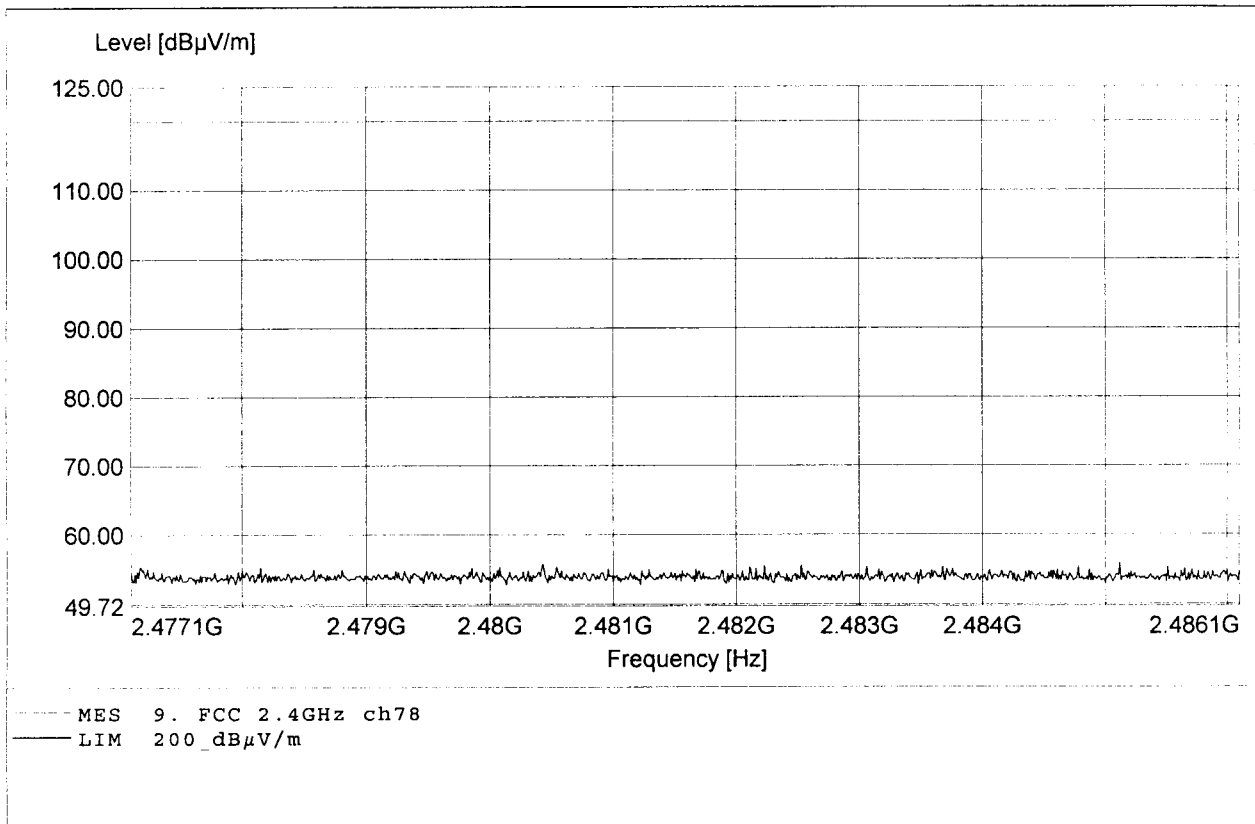

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / WRFP-2G4
Manufacturer: KIRK telecom A/S (external antenna)


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 9V (230V AC/DC adaptor), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2482,30MHz Pmax:56,32dBμV/m RBW=100KHz

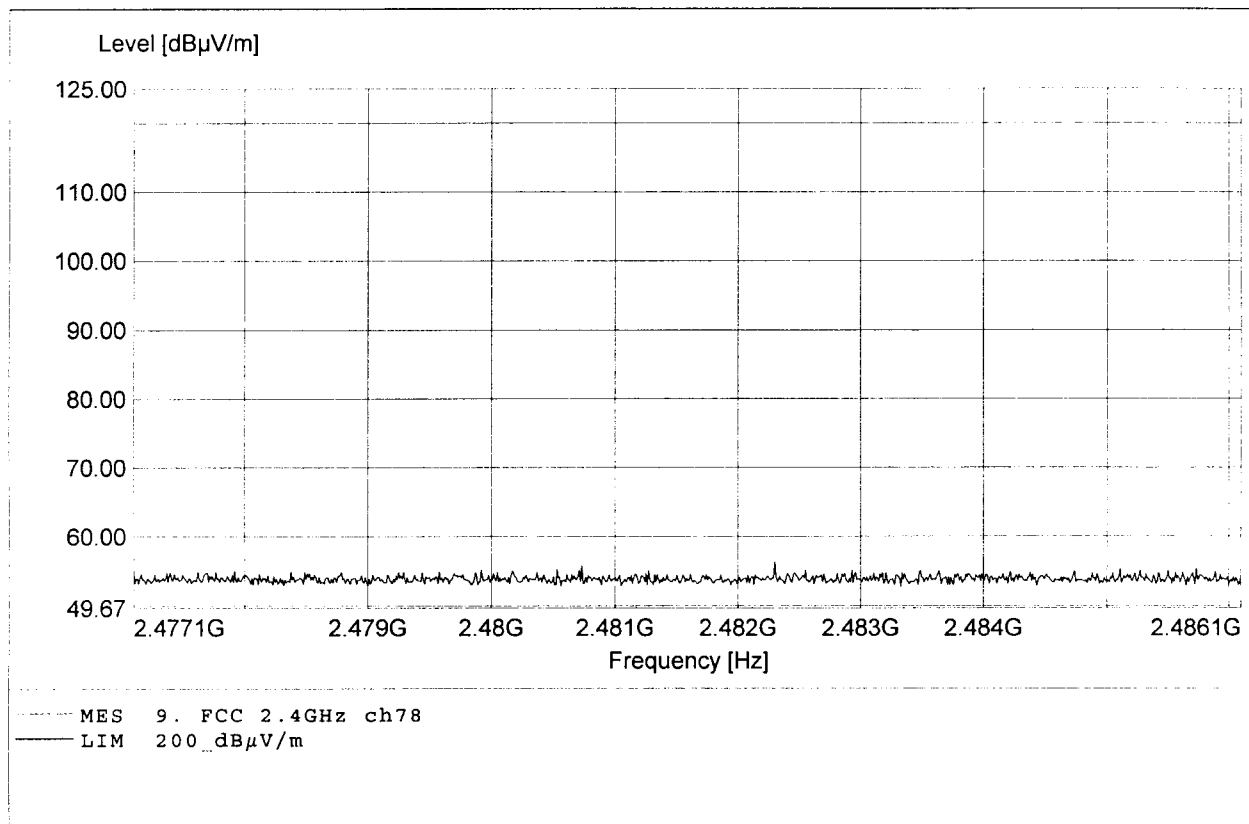

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / WRFP-2G4
Manufacturer: KIRK telecom A/S (external antenna)


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 9V (230V AC/DC adaptor), (mode Tx, Ch 40)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2478,59MHz Pmax:56,21dBμV/m RBW=100KHz

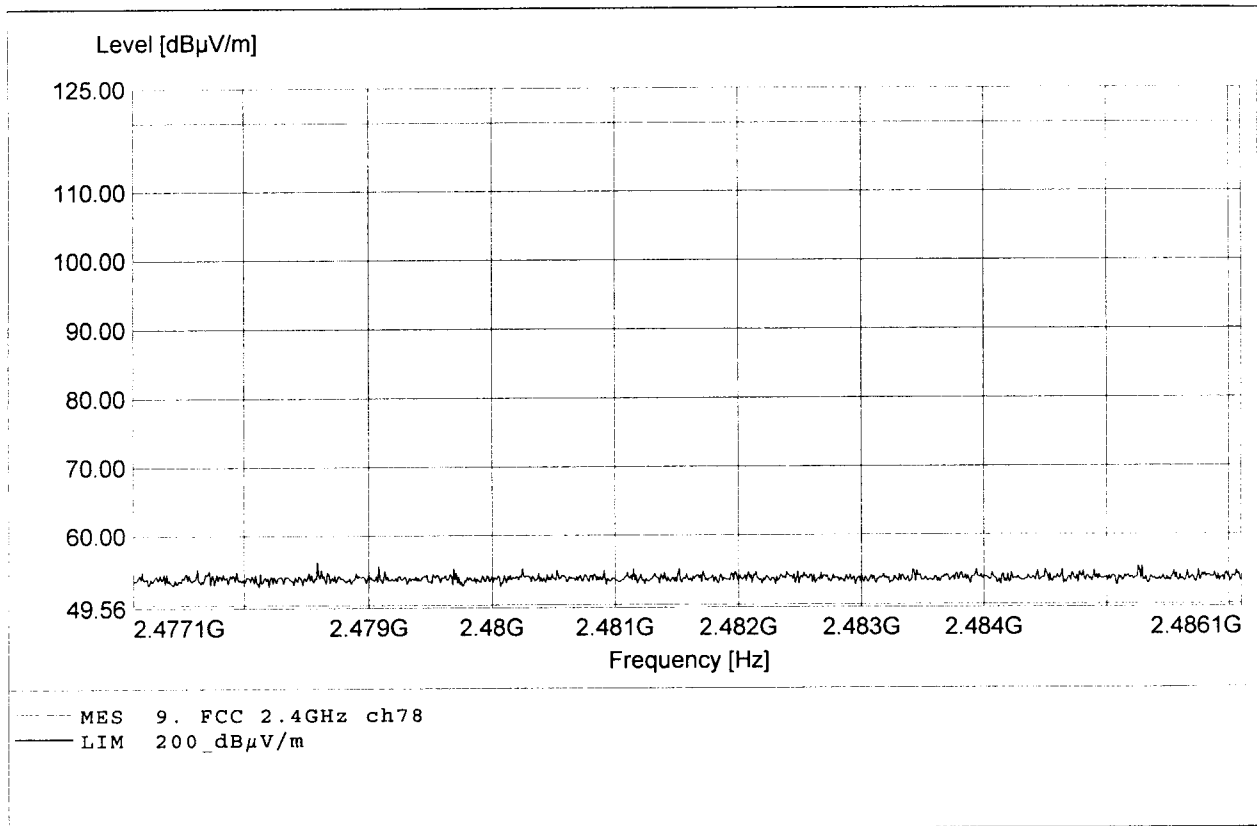

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / WRF-2G4
Manufacturer: KIRK telecom A/S (external antenna)


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 9V (230V AC/DC adaptor), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,30MHz Pmax:120,72dBμV/m RBW=100KHz

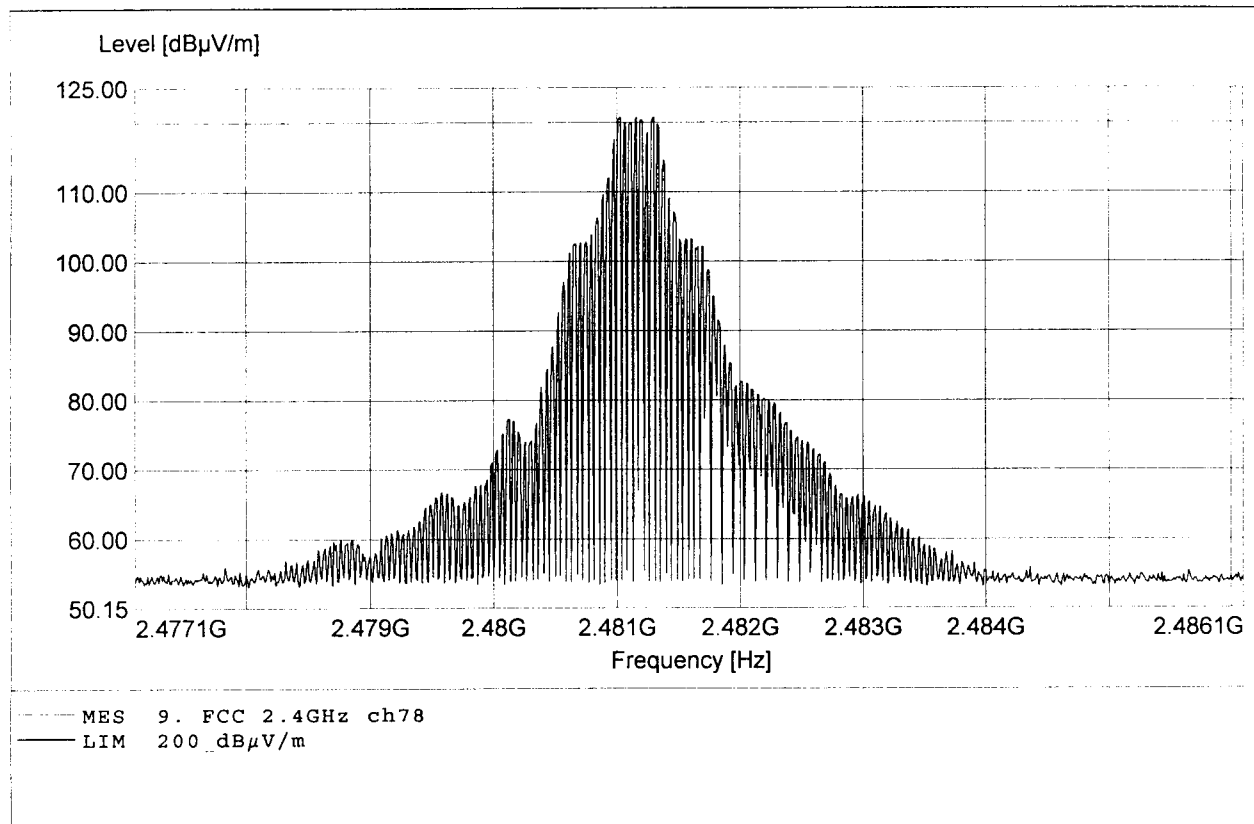

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2.4 GHz Communication System / WRFP-2G4
Manufacturer: KIRK telecom A/S (external antenna)


Test Site / Operator: ETS / Mr.Matz
Temperature/ Voltage: 23°C / 9V (230V AC/DC adaptor), (mode Tx, Ch 78)
Test Specification: according to § 15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2481,31MHz Pmax:122,59dBμV/m RBW=100KHz

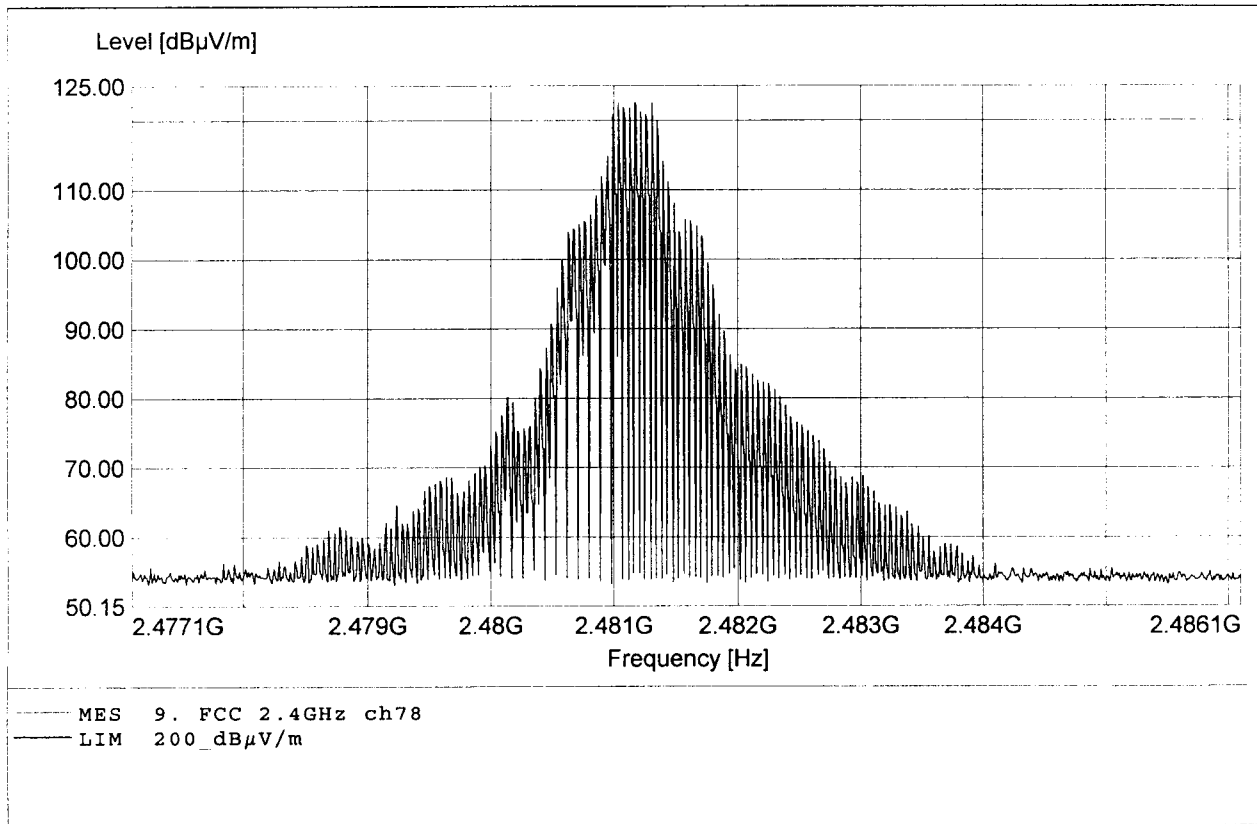

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:193,97MHz Pmax:27,34dBμV/m

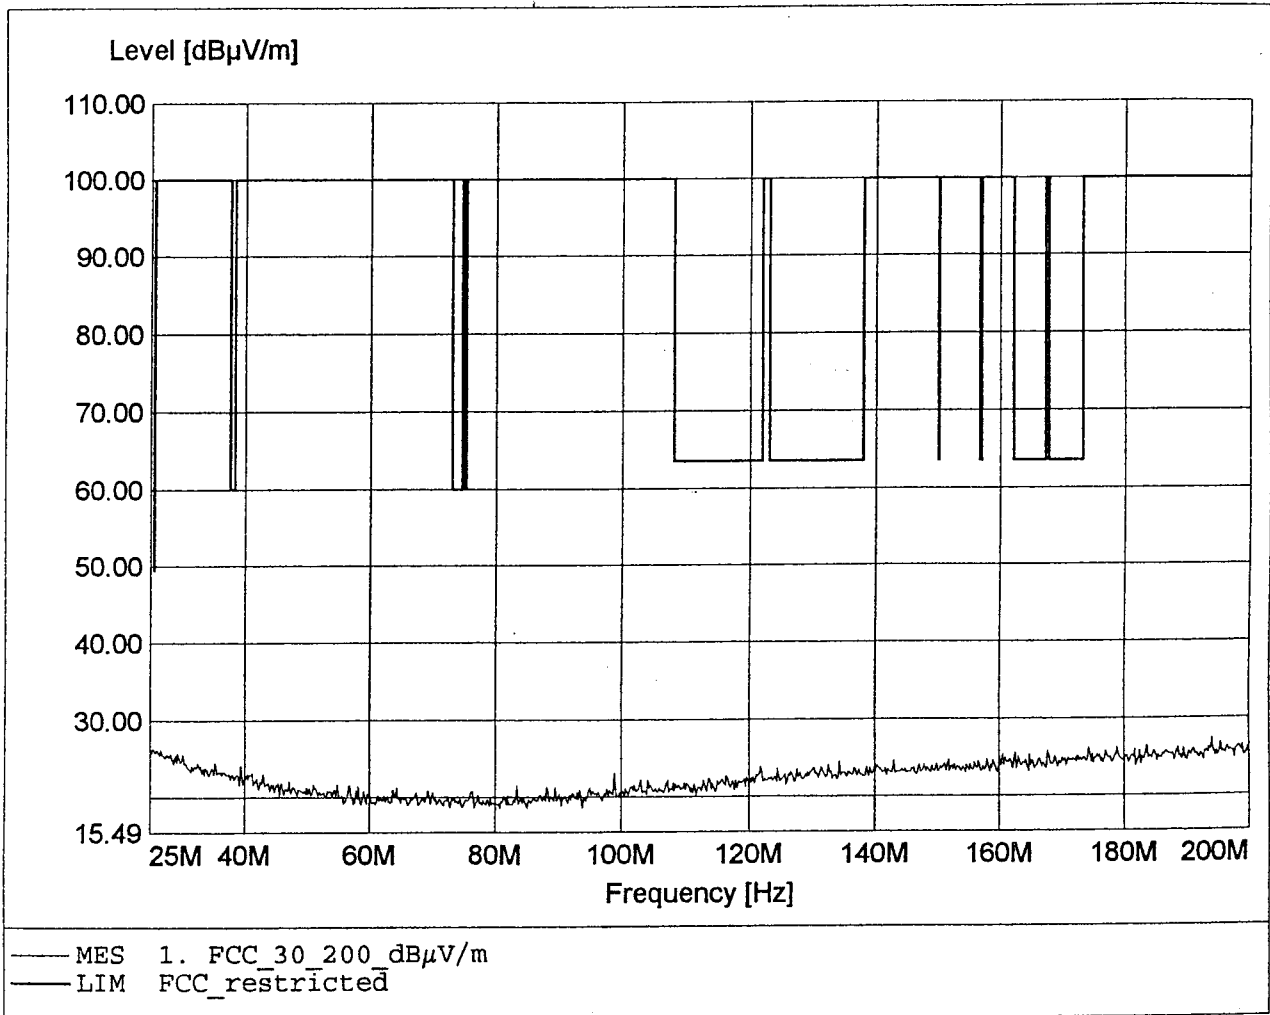

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:81,00MHz Pmax:27,76dBμV/m

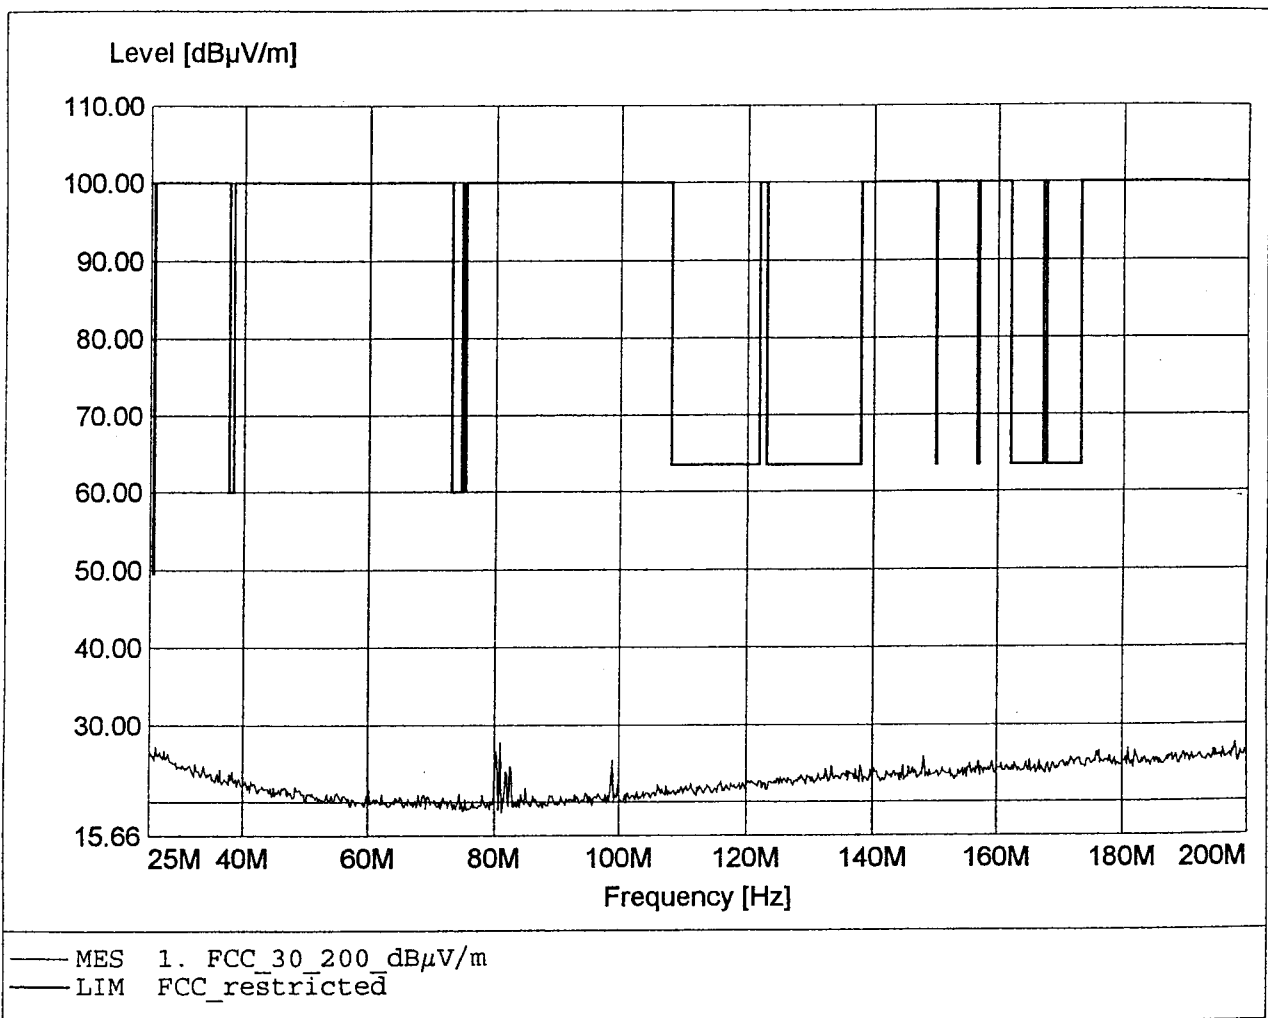

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:983,99MHz Pmax:35,54dBμV/m

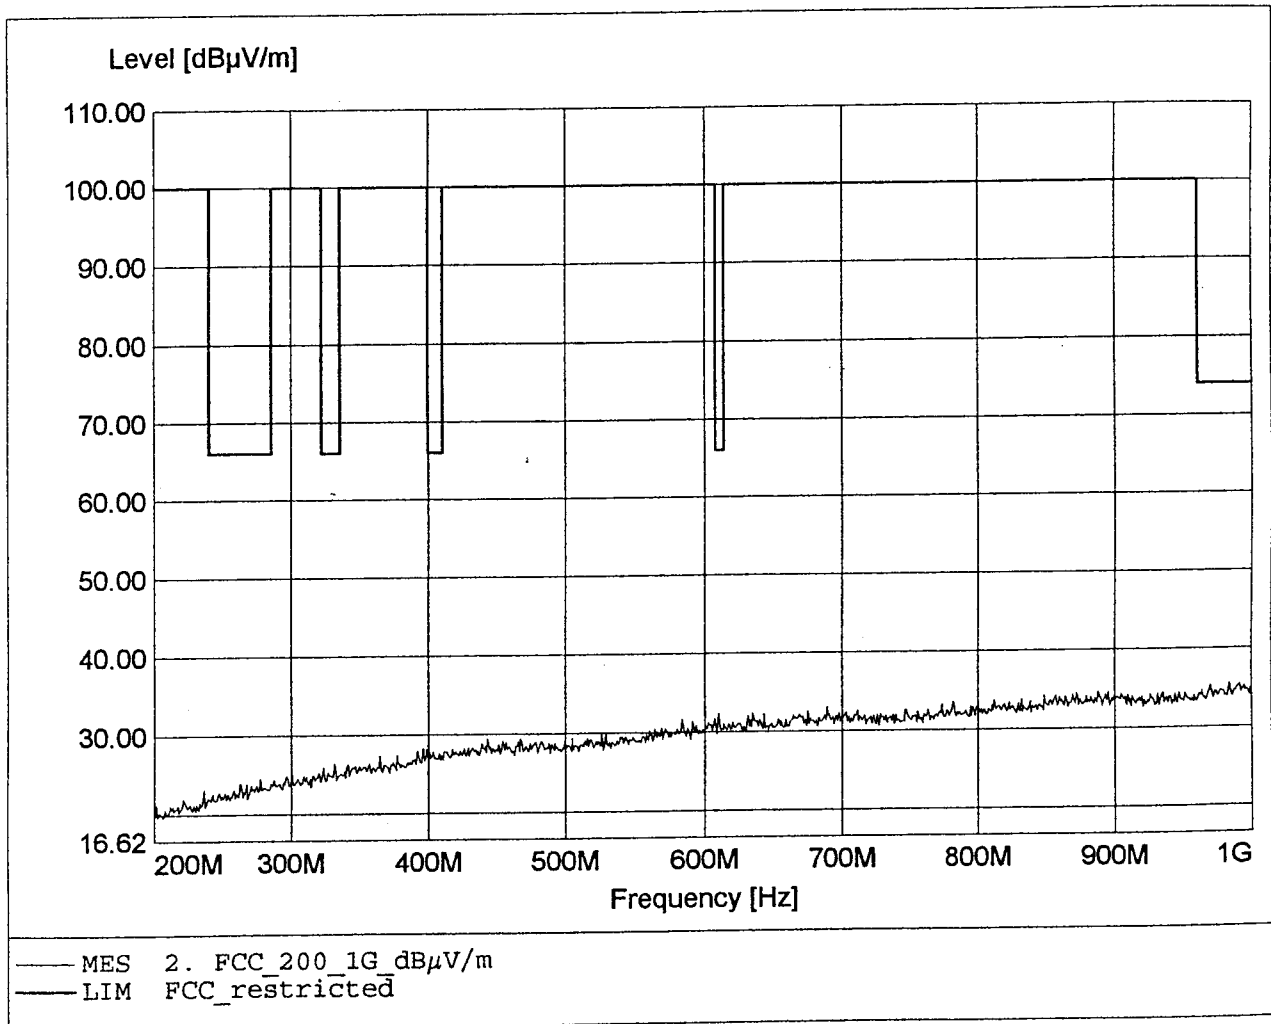

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:978,66MHz Pmax:35,70dBμV/m

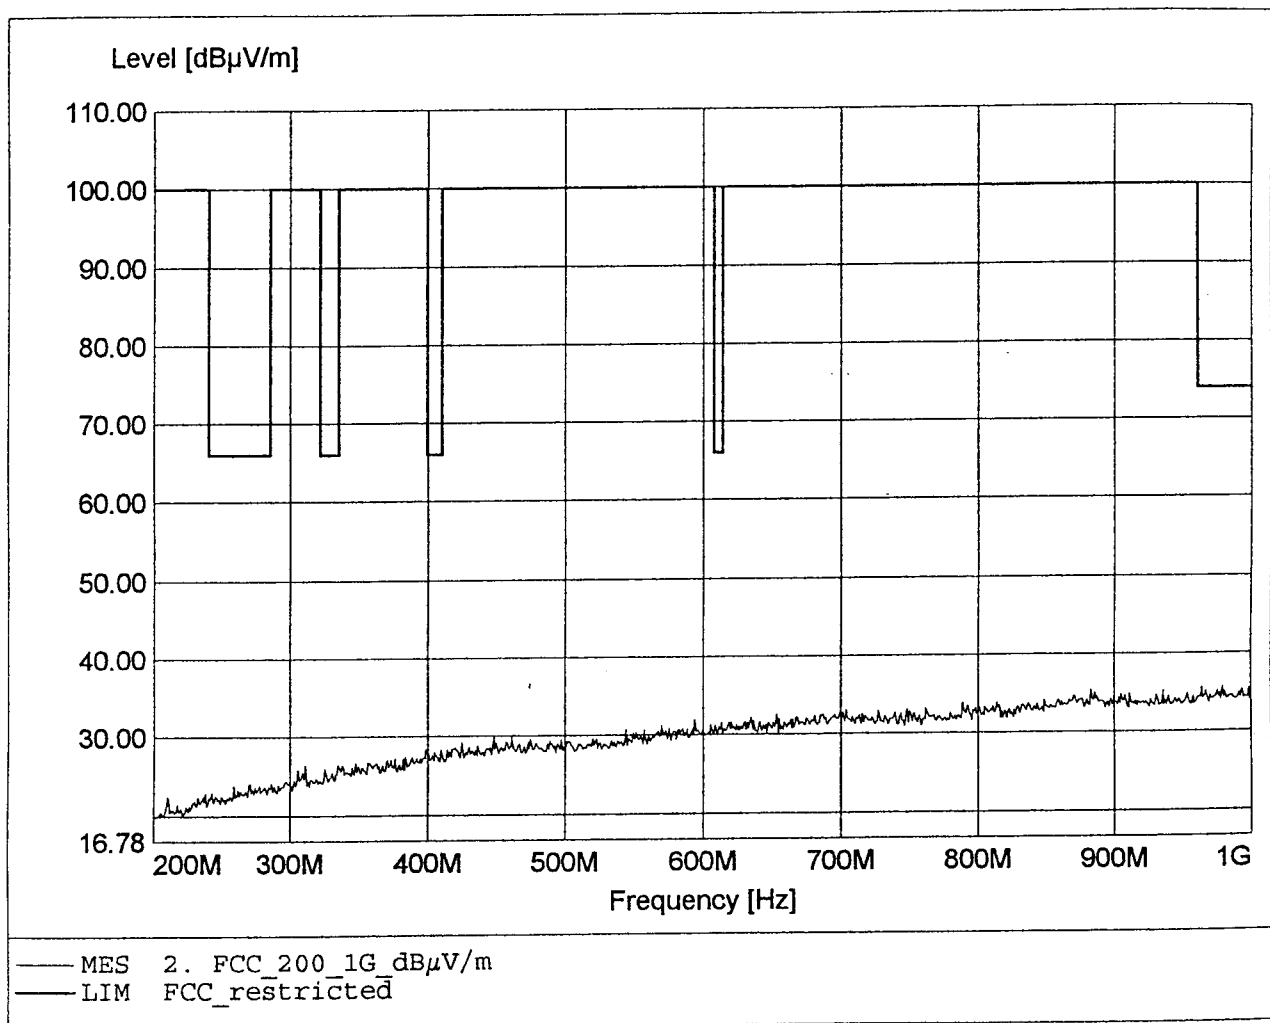

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2403,33MHz Pmax:110,81dBμV/m

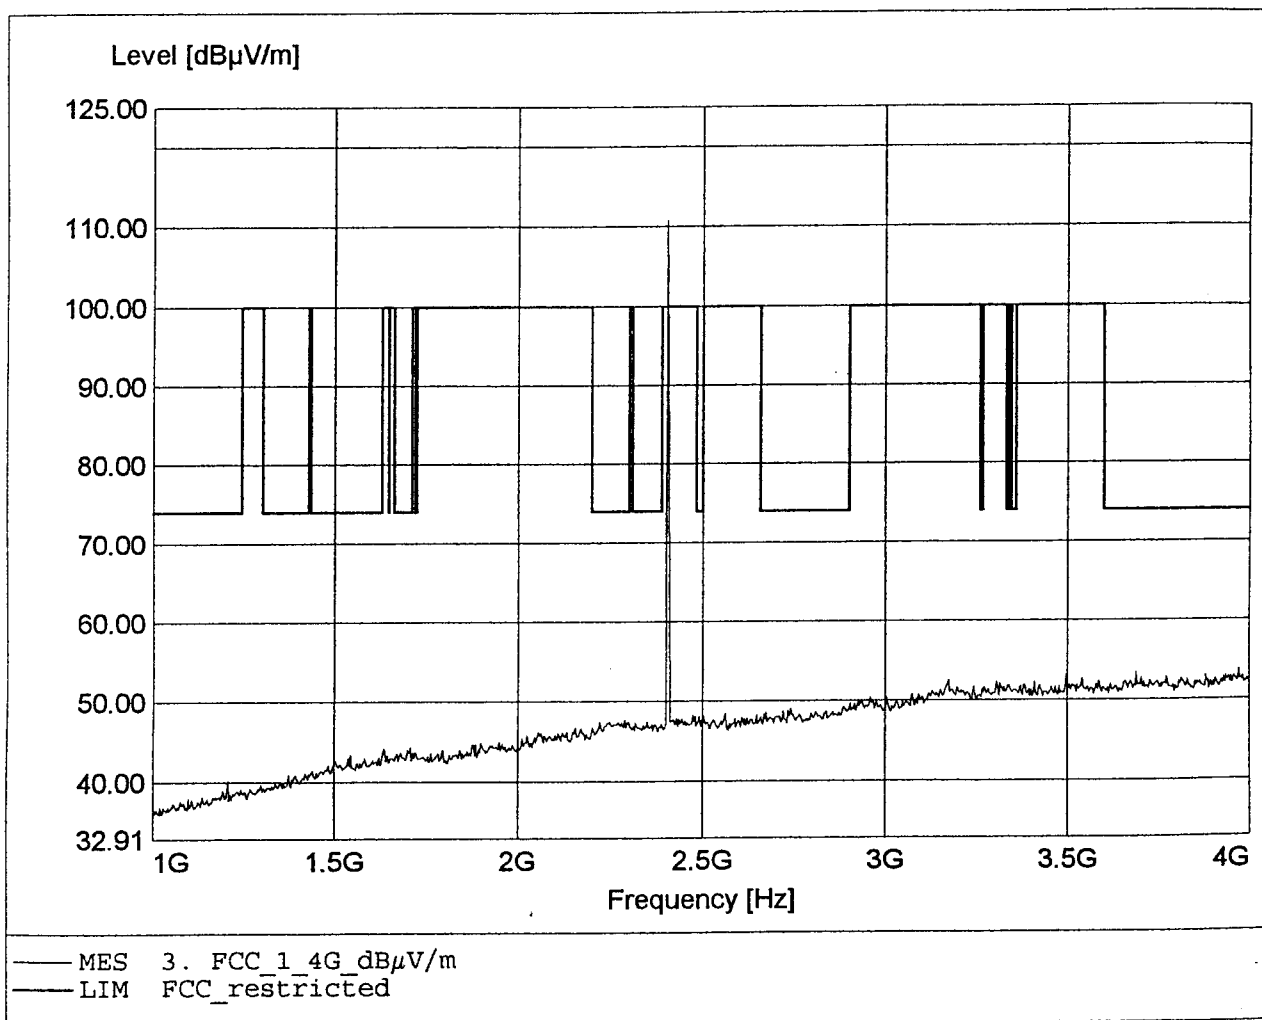

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2403,33MHz Pmax:112,24dBμV/m

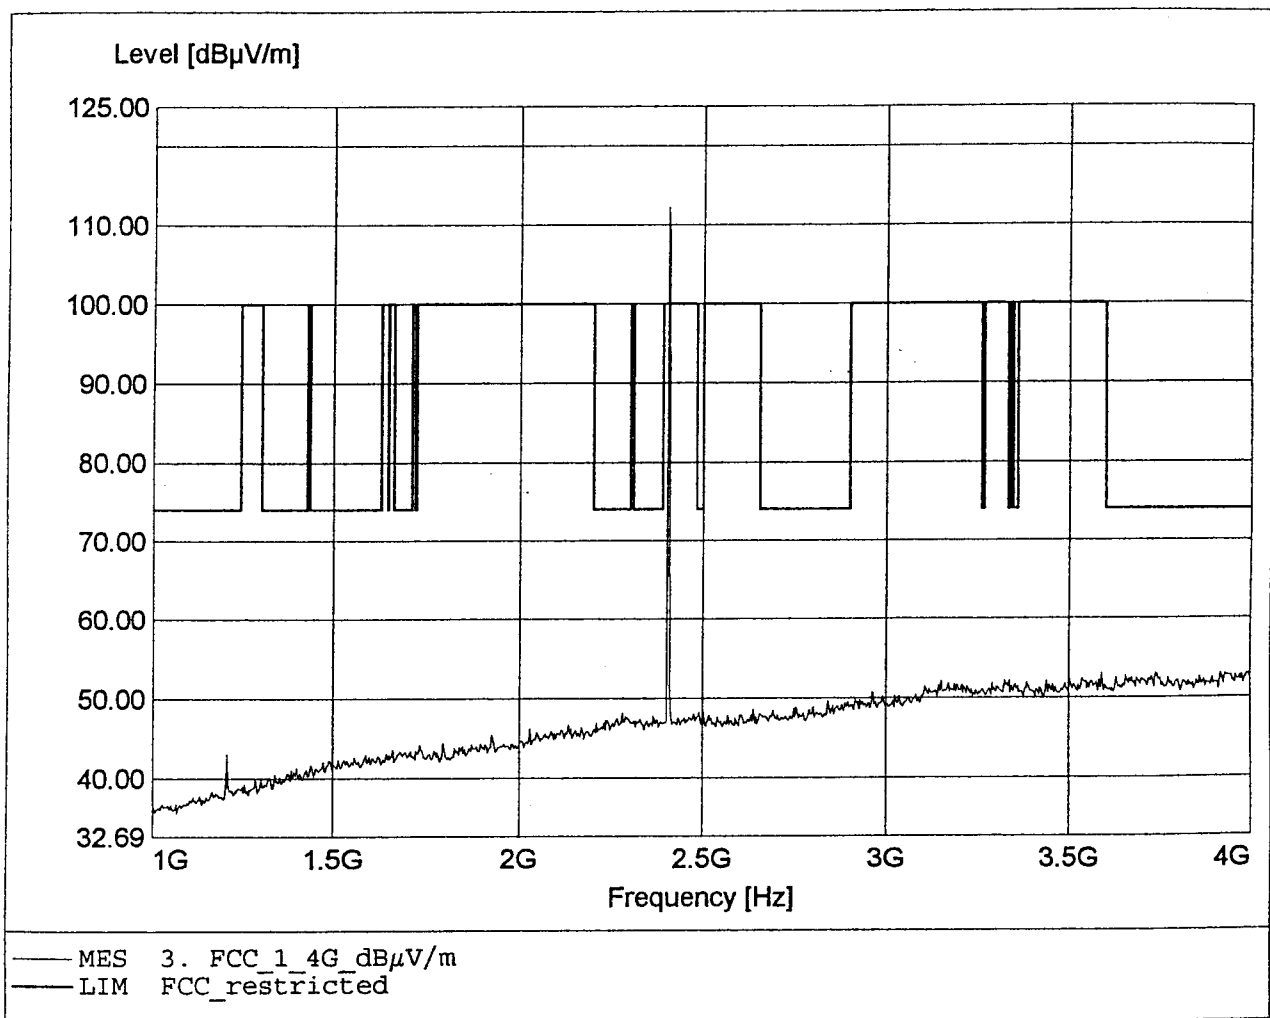

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7951,11MHz Pmax:63,75dBµV/m

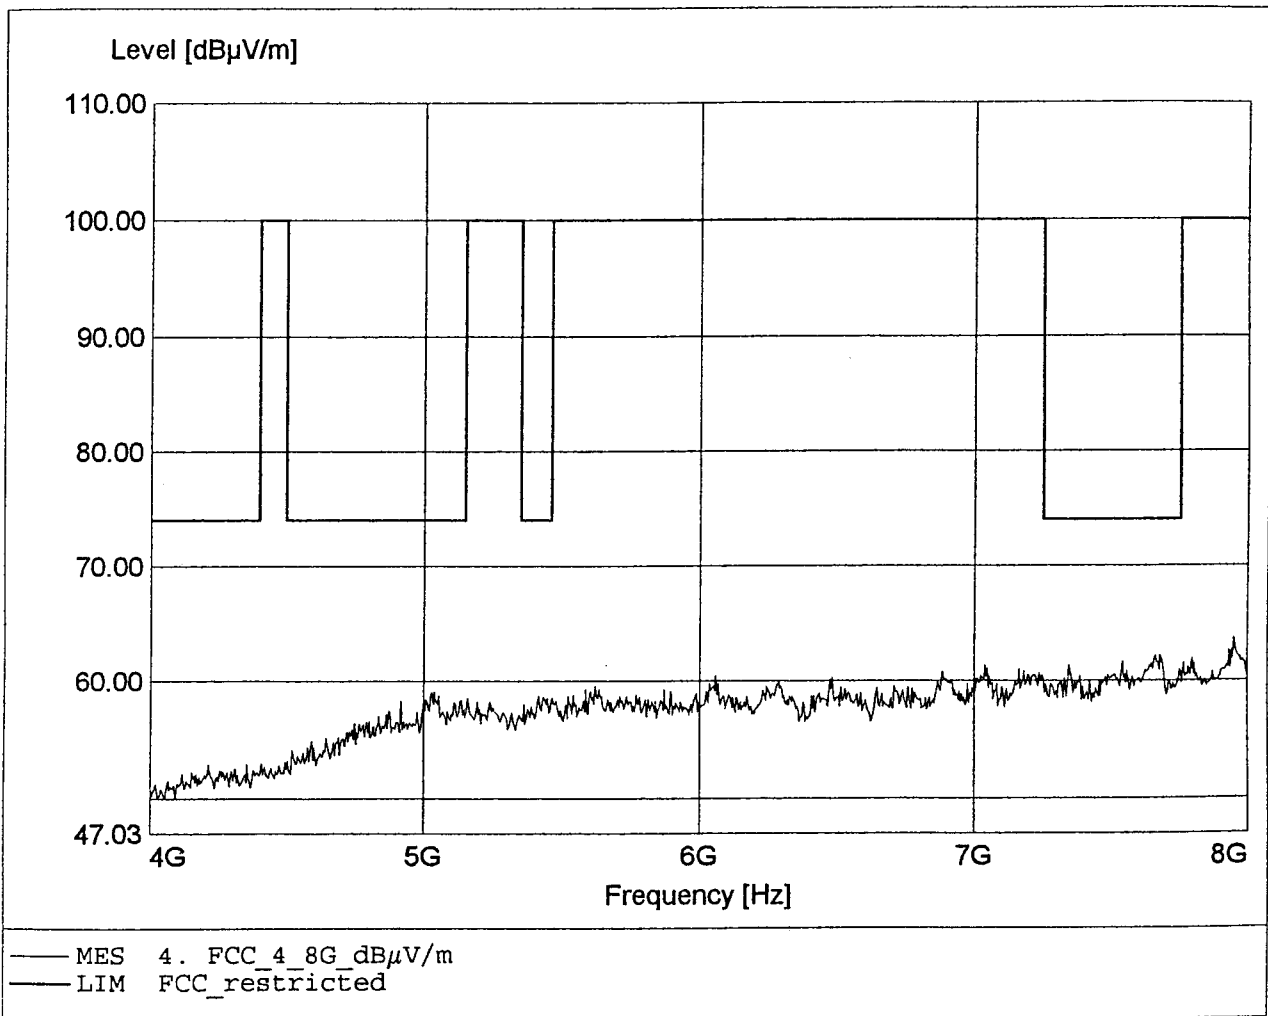

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:6644,44MHz Pmax:64,92dBμV/m

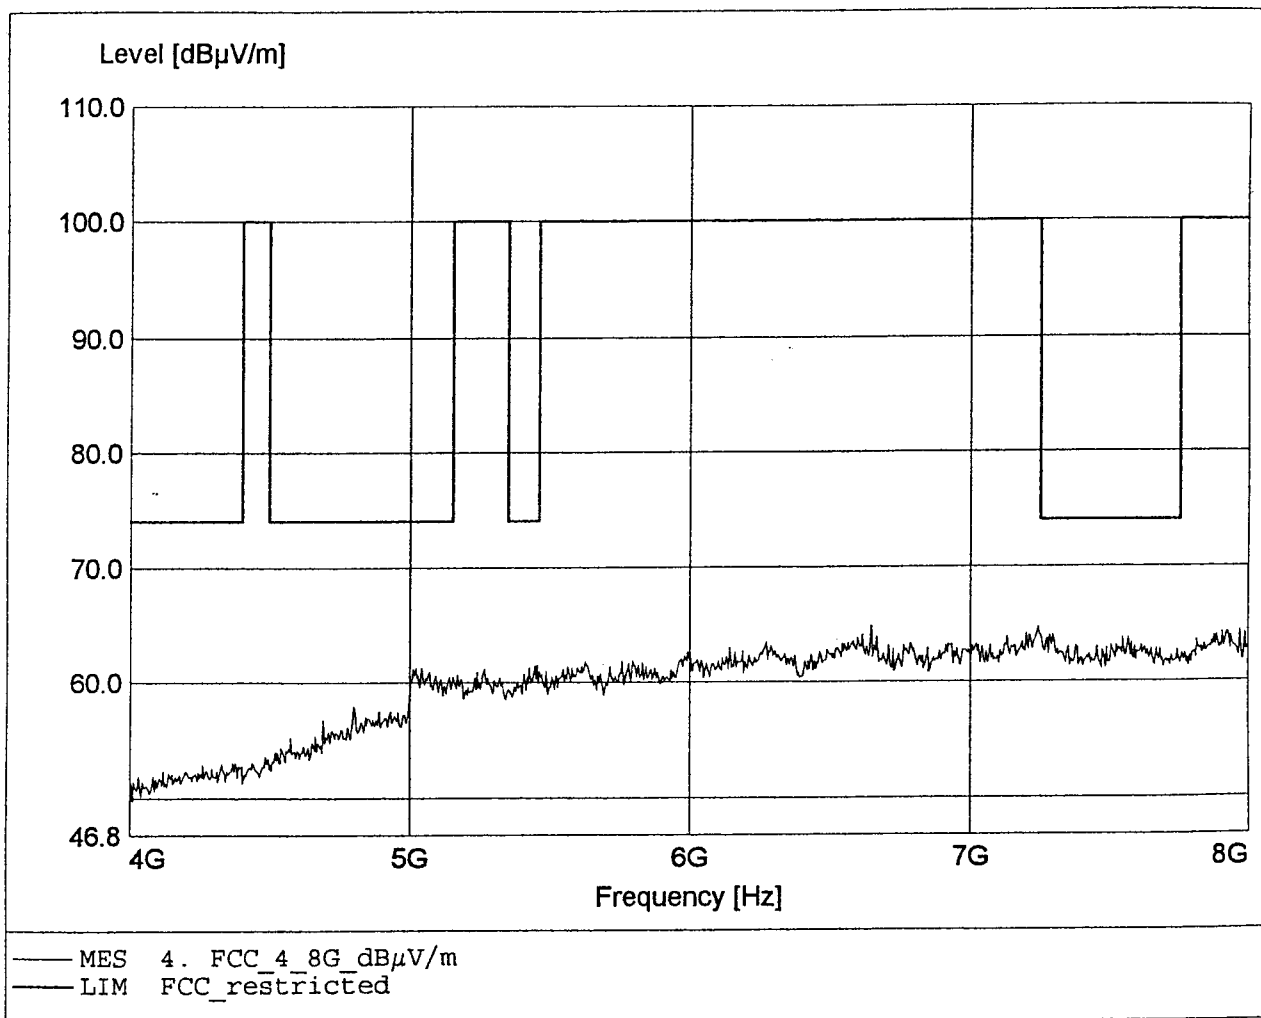

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:15511,11MHz Pmax:44,14dBμV/m

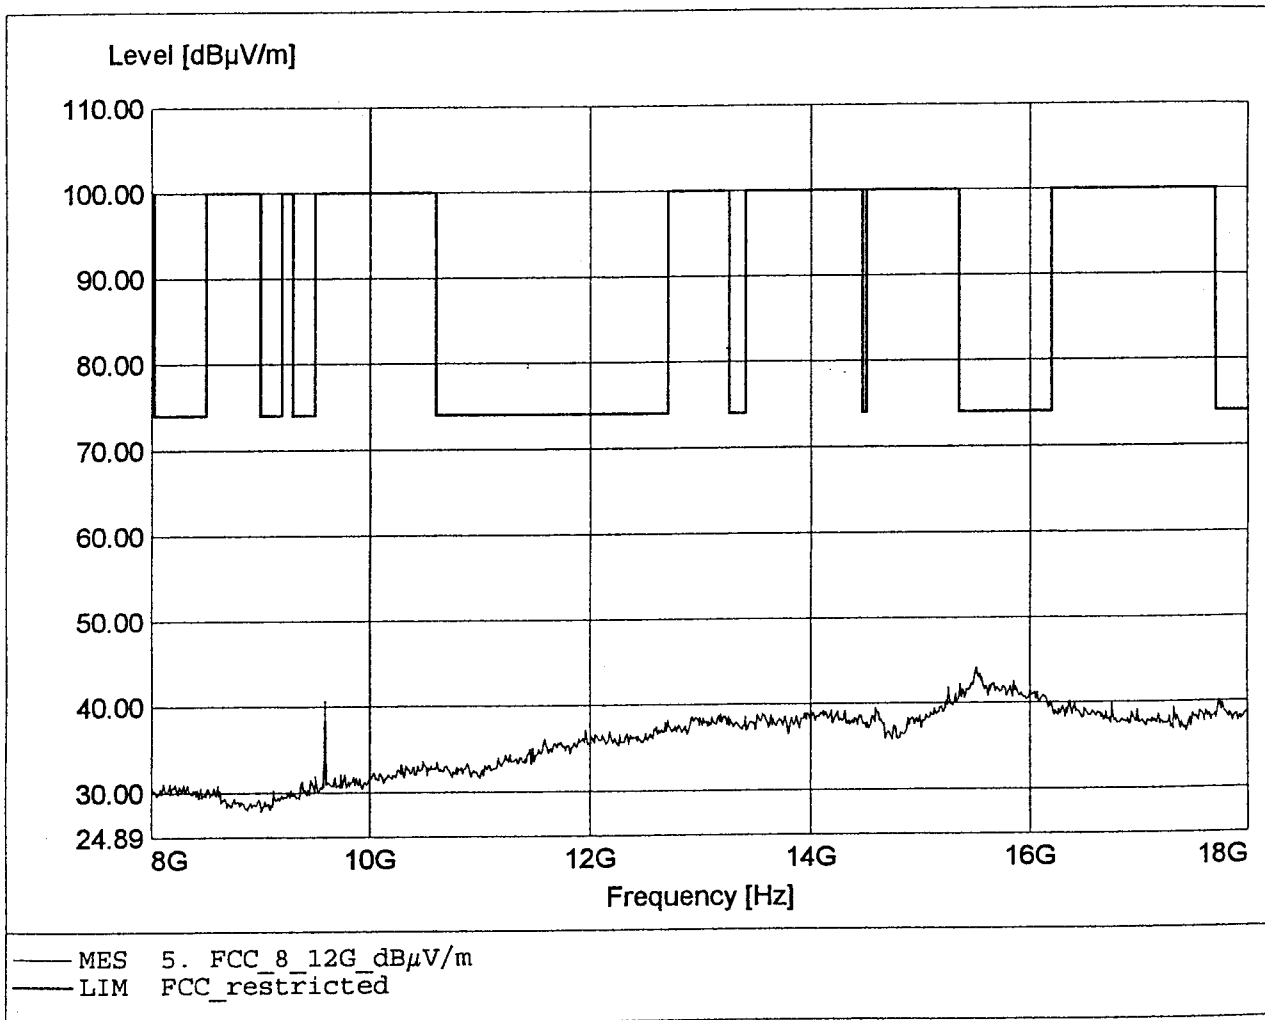

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:11999,04MHz Pmax:45,4dBµV/m

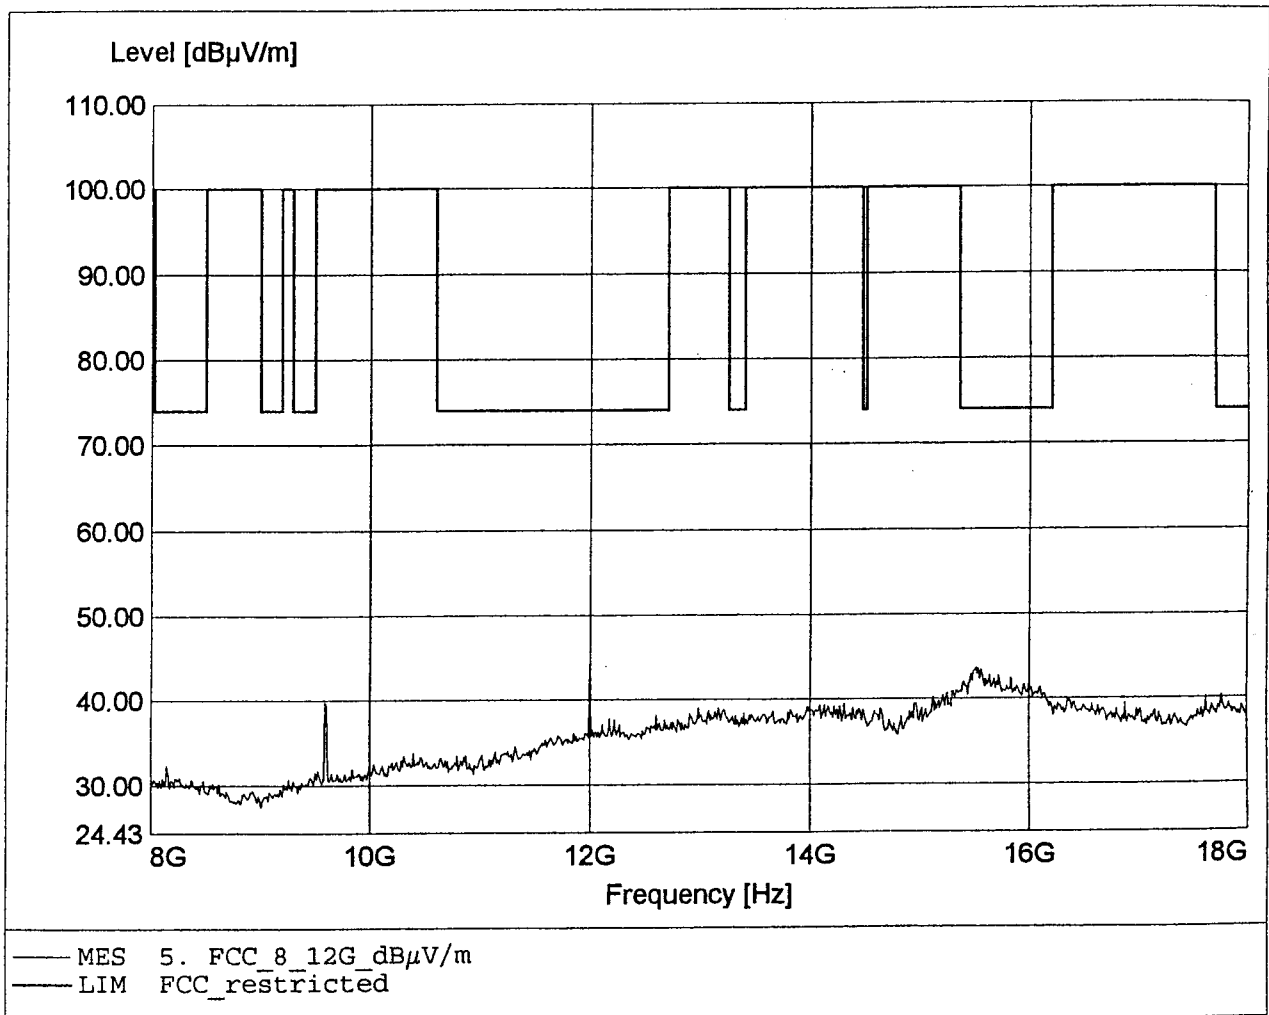

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26244,99MHz Pmax:59,50dBμV/m

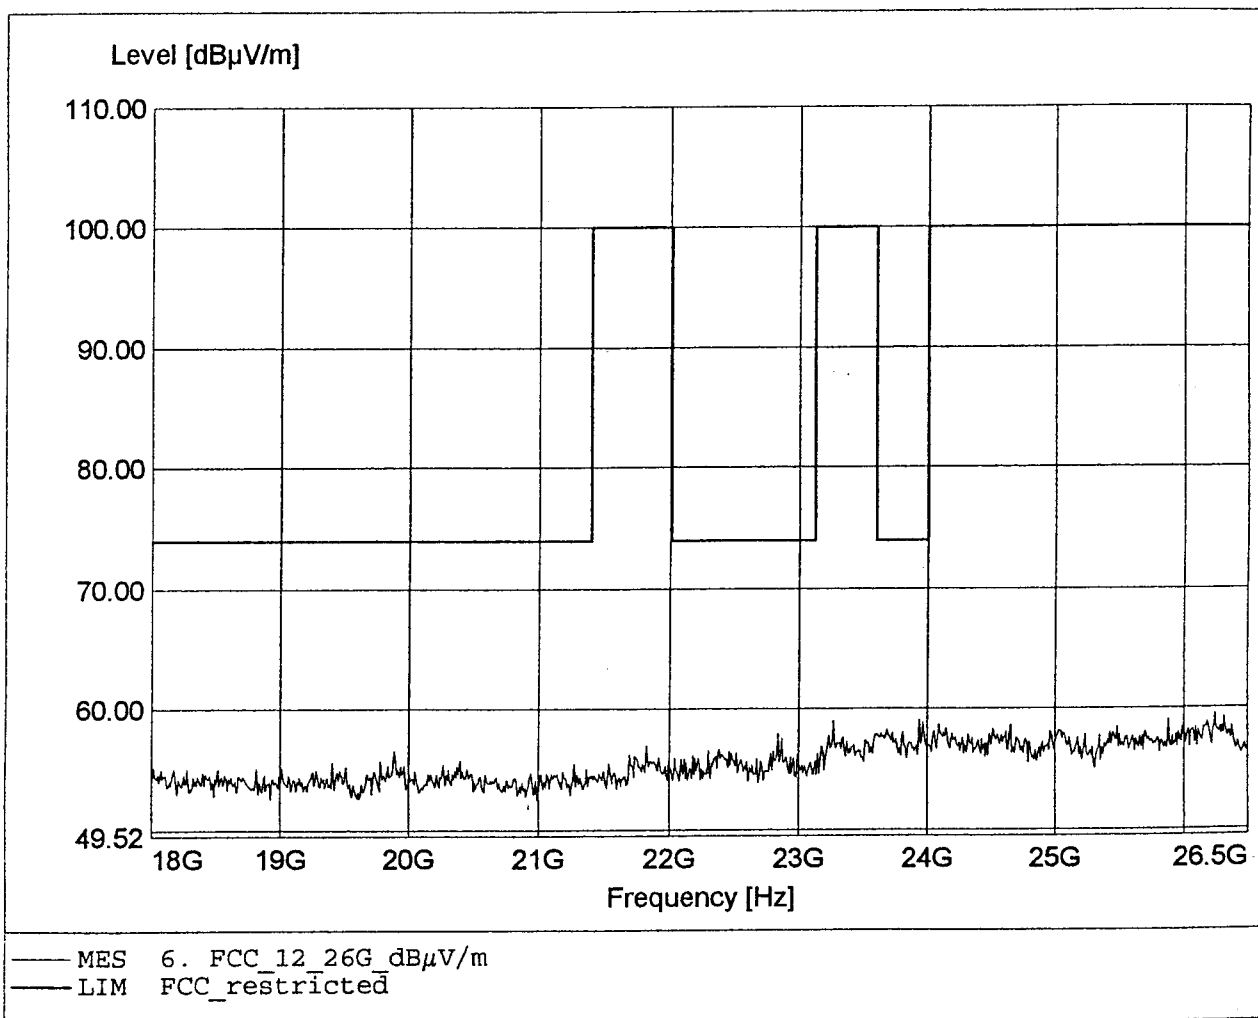

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26320,55MHz Pmax:59,96dBμV/m

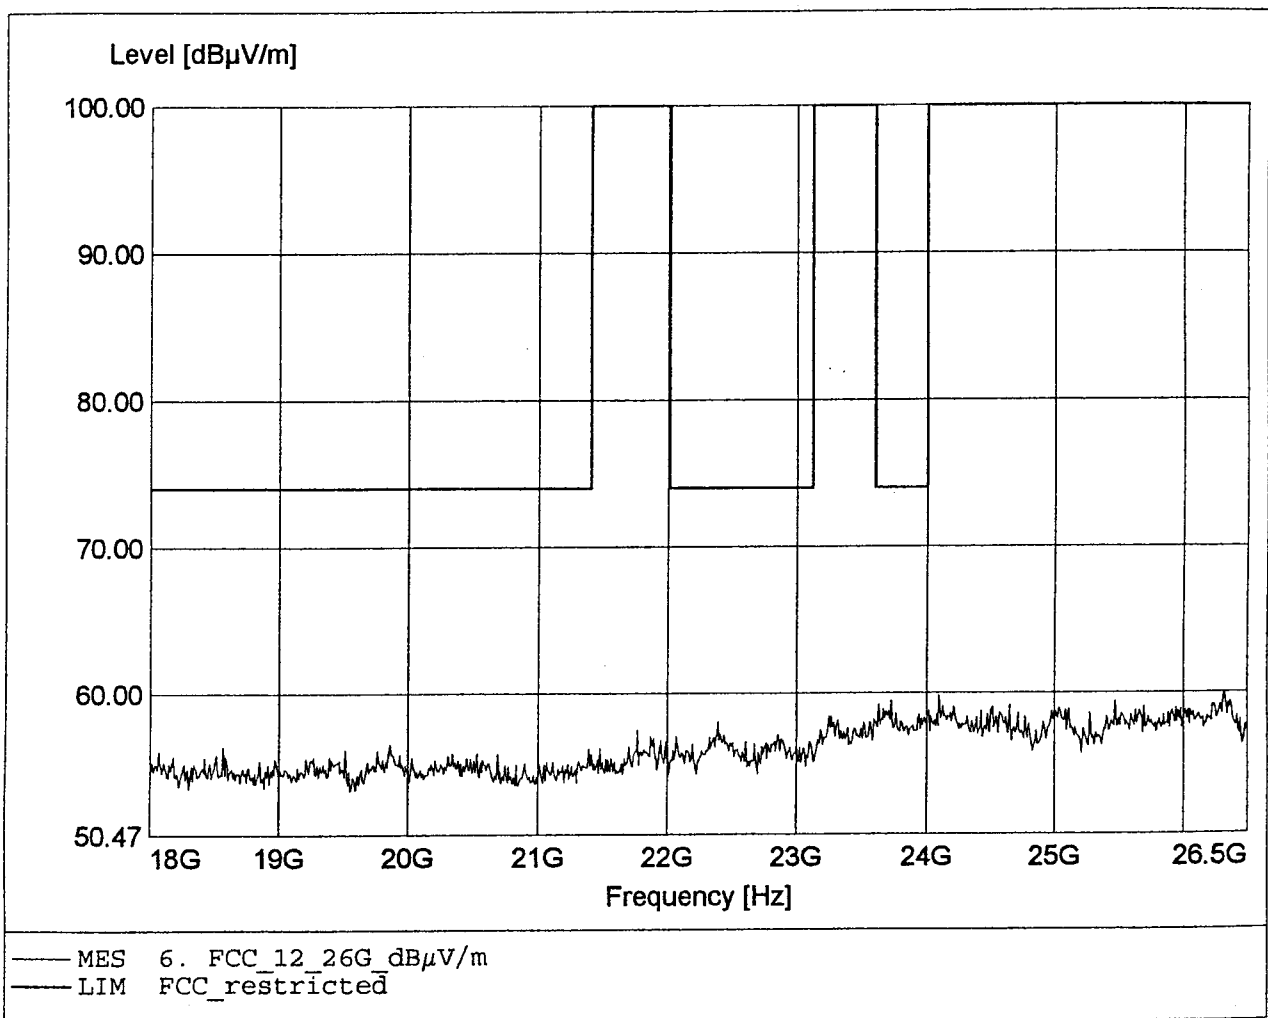

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:179,38MHz Pmax:28,24dBμV/m

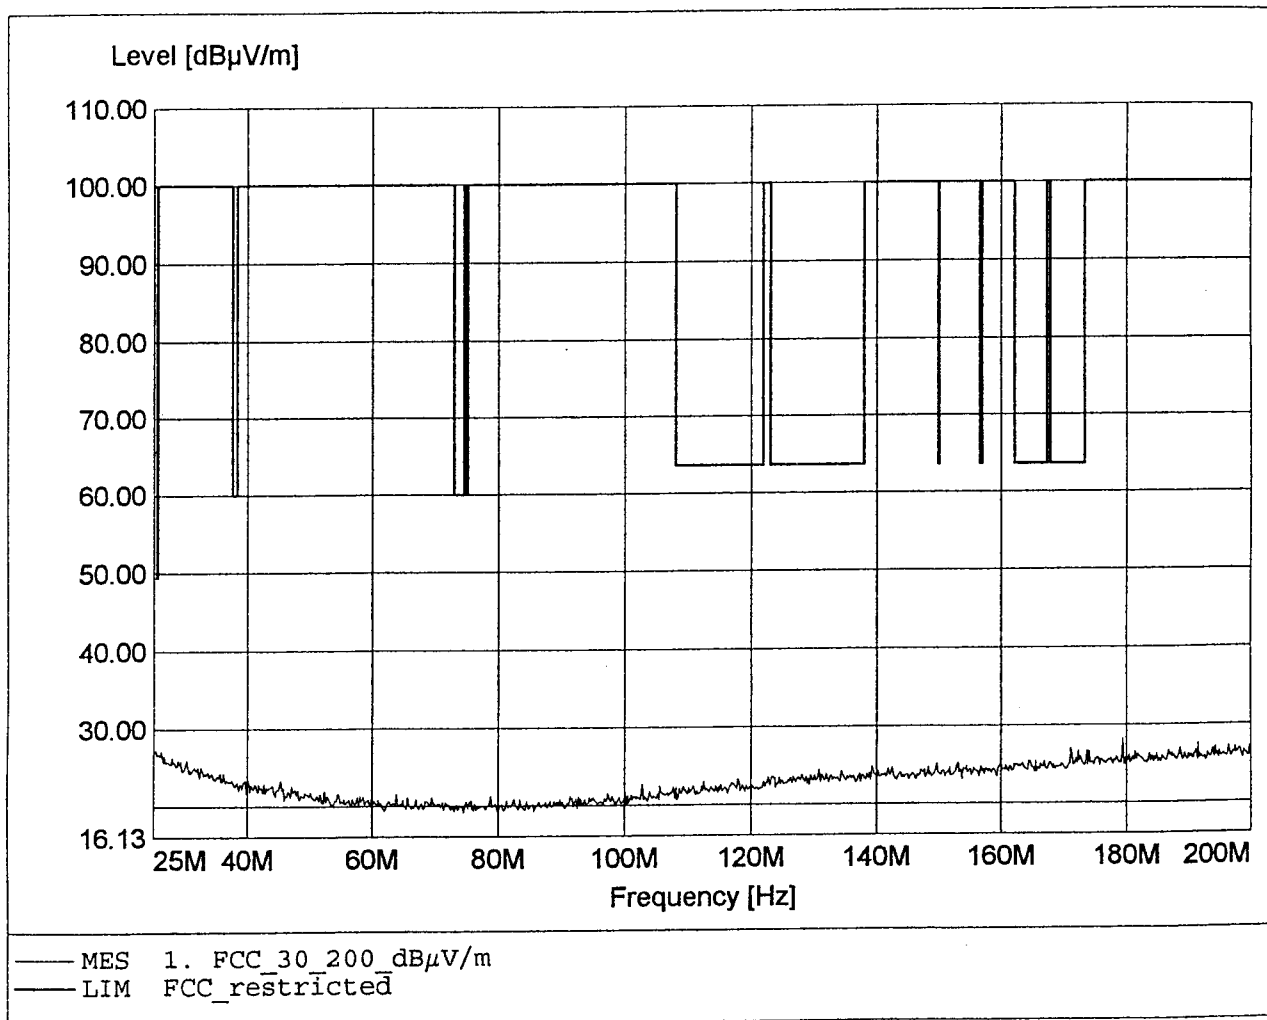

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:183,07MHz Pmax:28,7dBμV/m

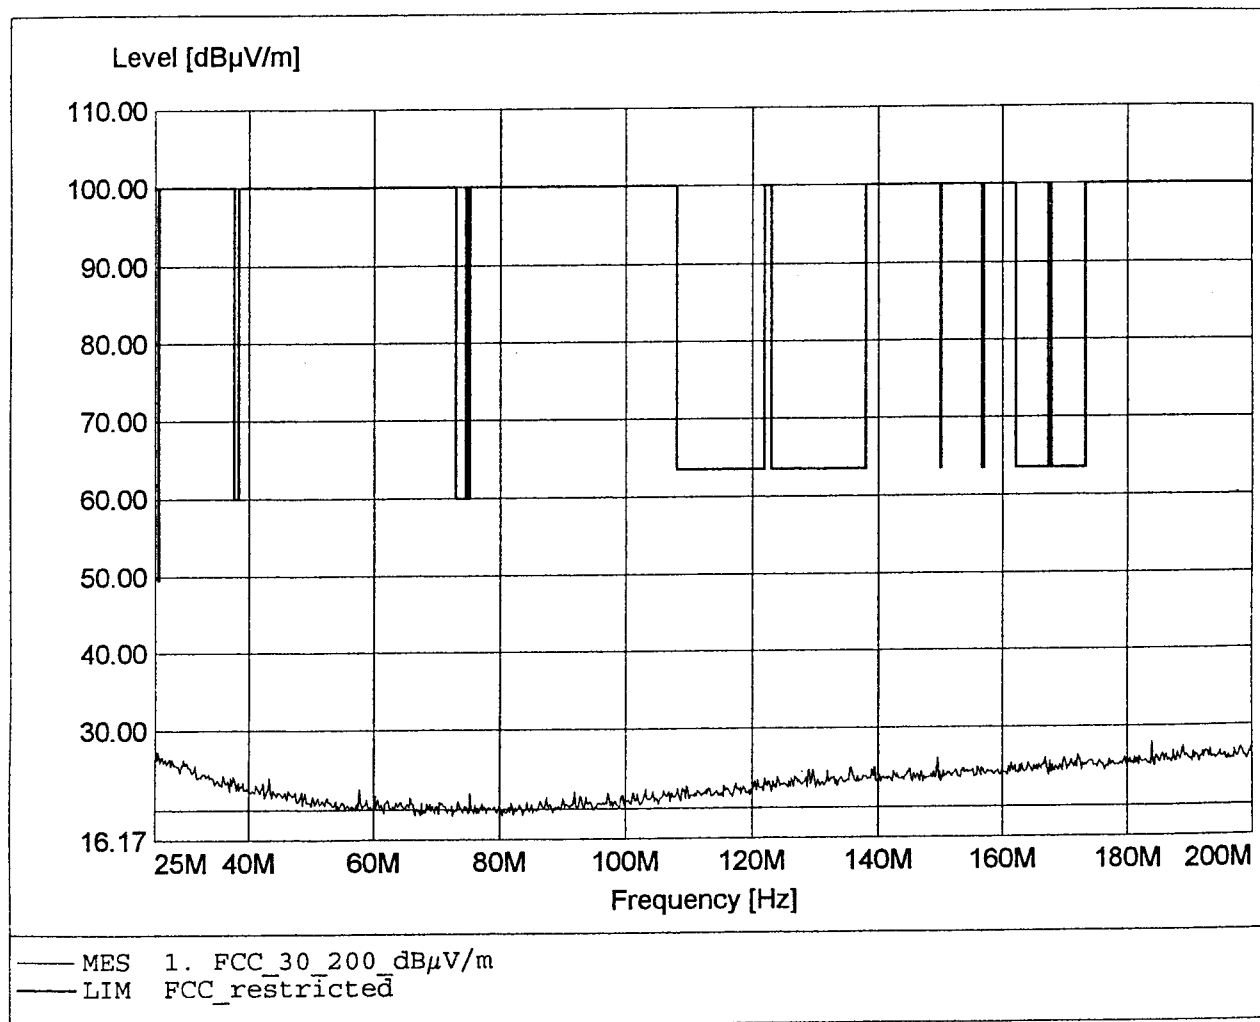

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:999,11MHz Pmax:35,53dBμV/m

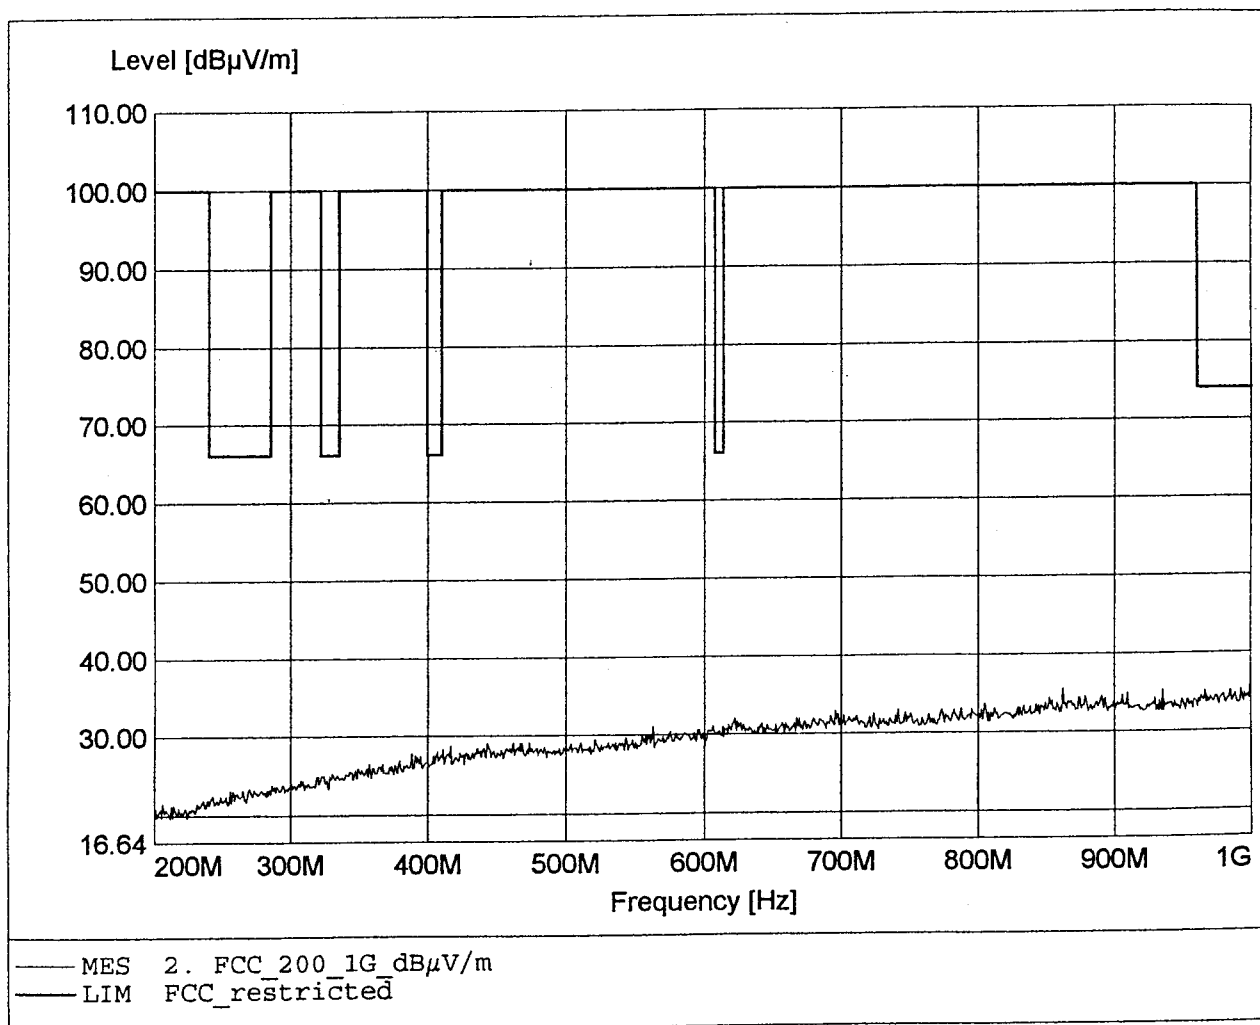

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:999,11MHz Pmax:35,43dBμV/m

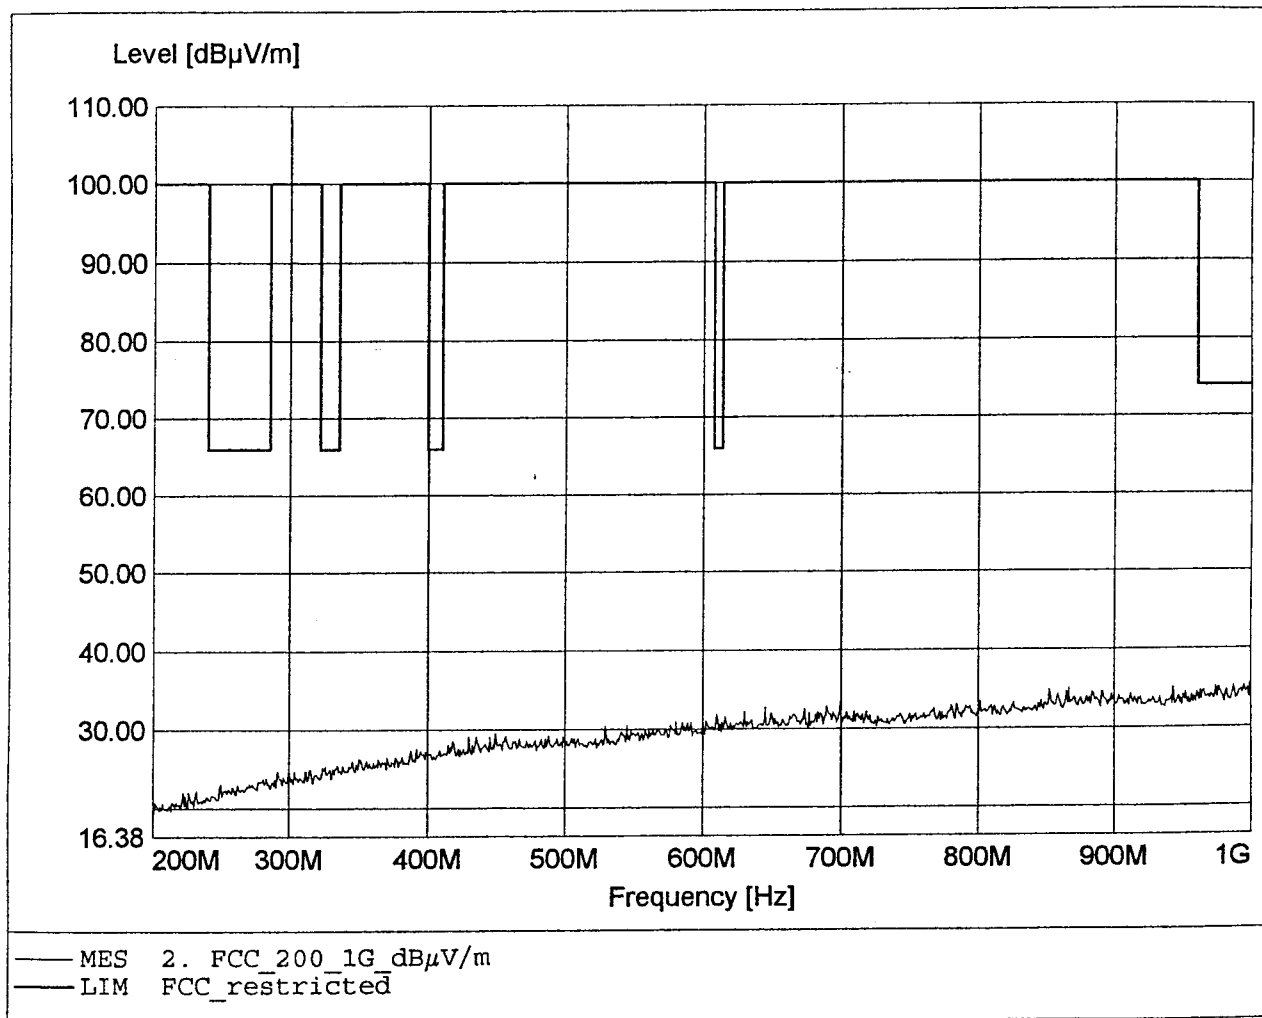

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2406,66MHz Pmax:111,45dBμV/m

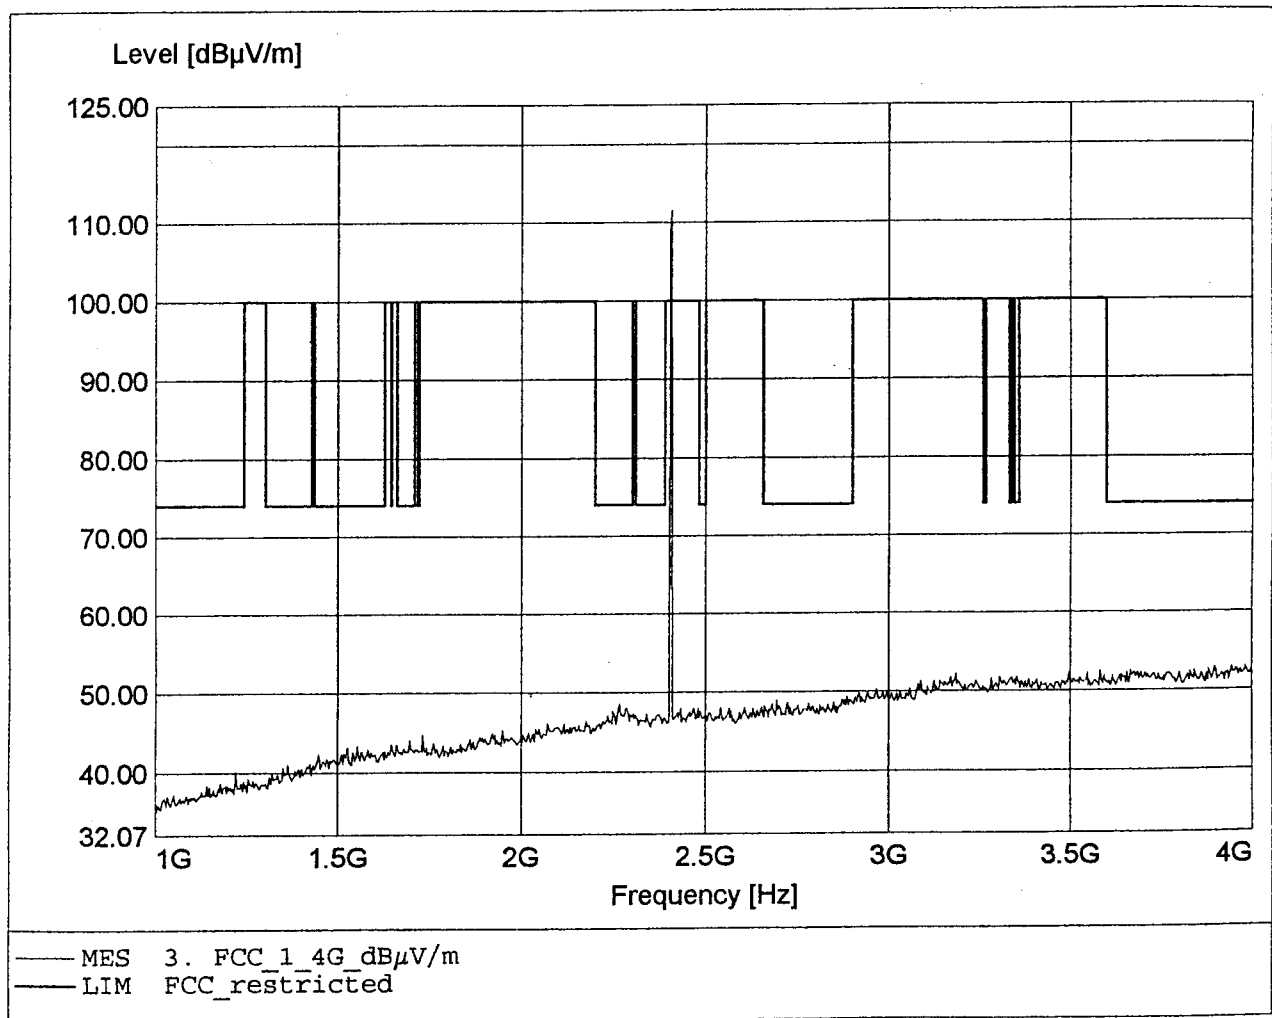

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2403,33MHz Pmax:113,17dBμV/m

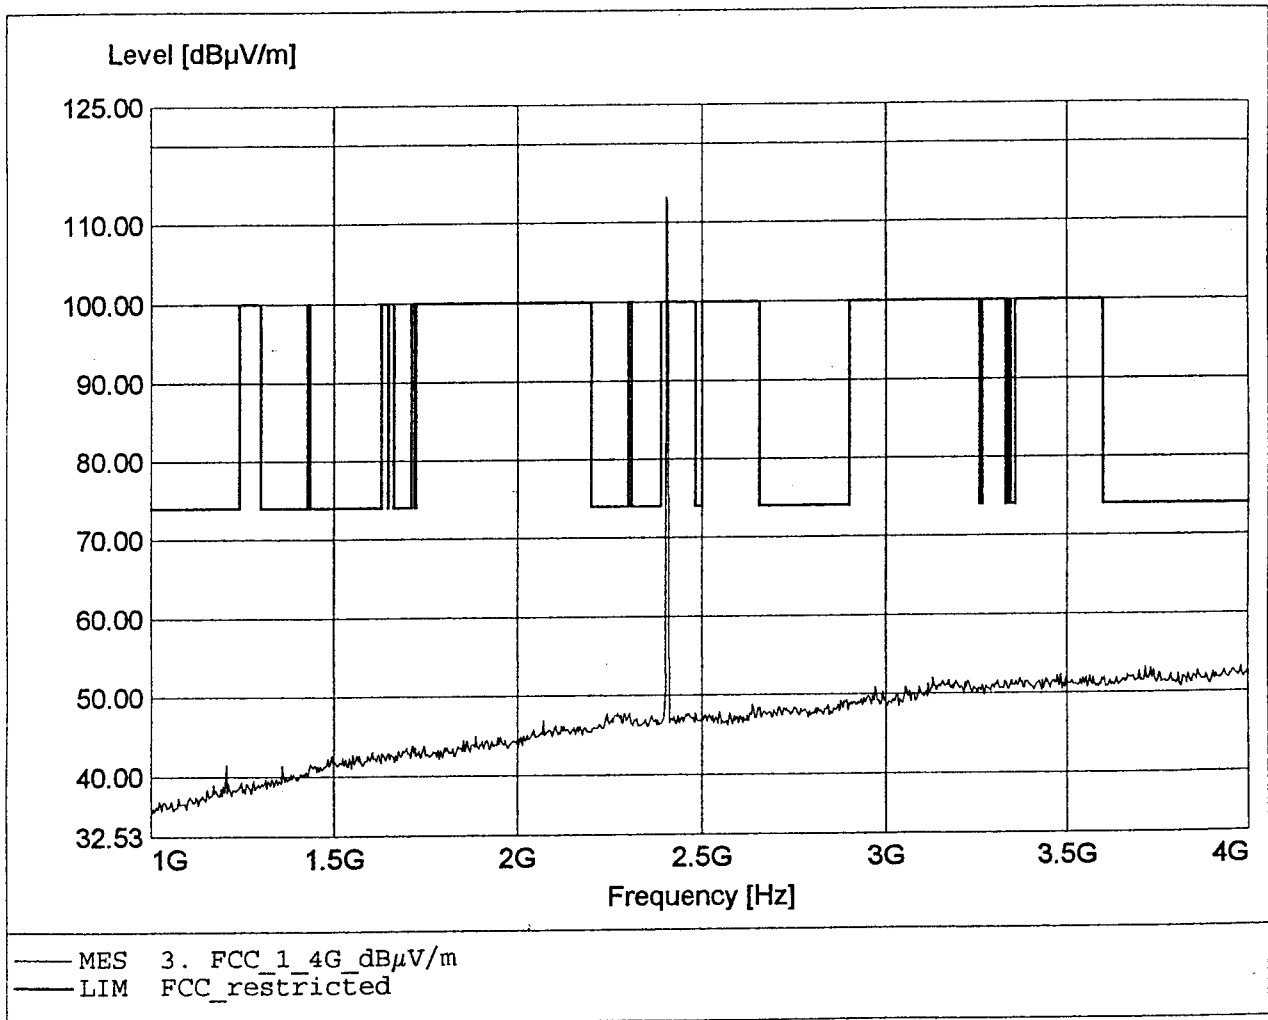

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7977,77MHz Pmax:63,63dBμV/m

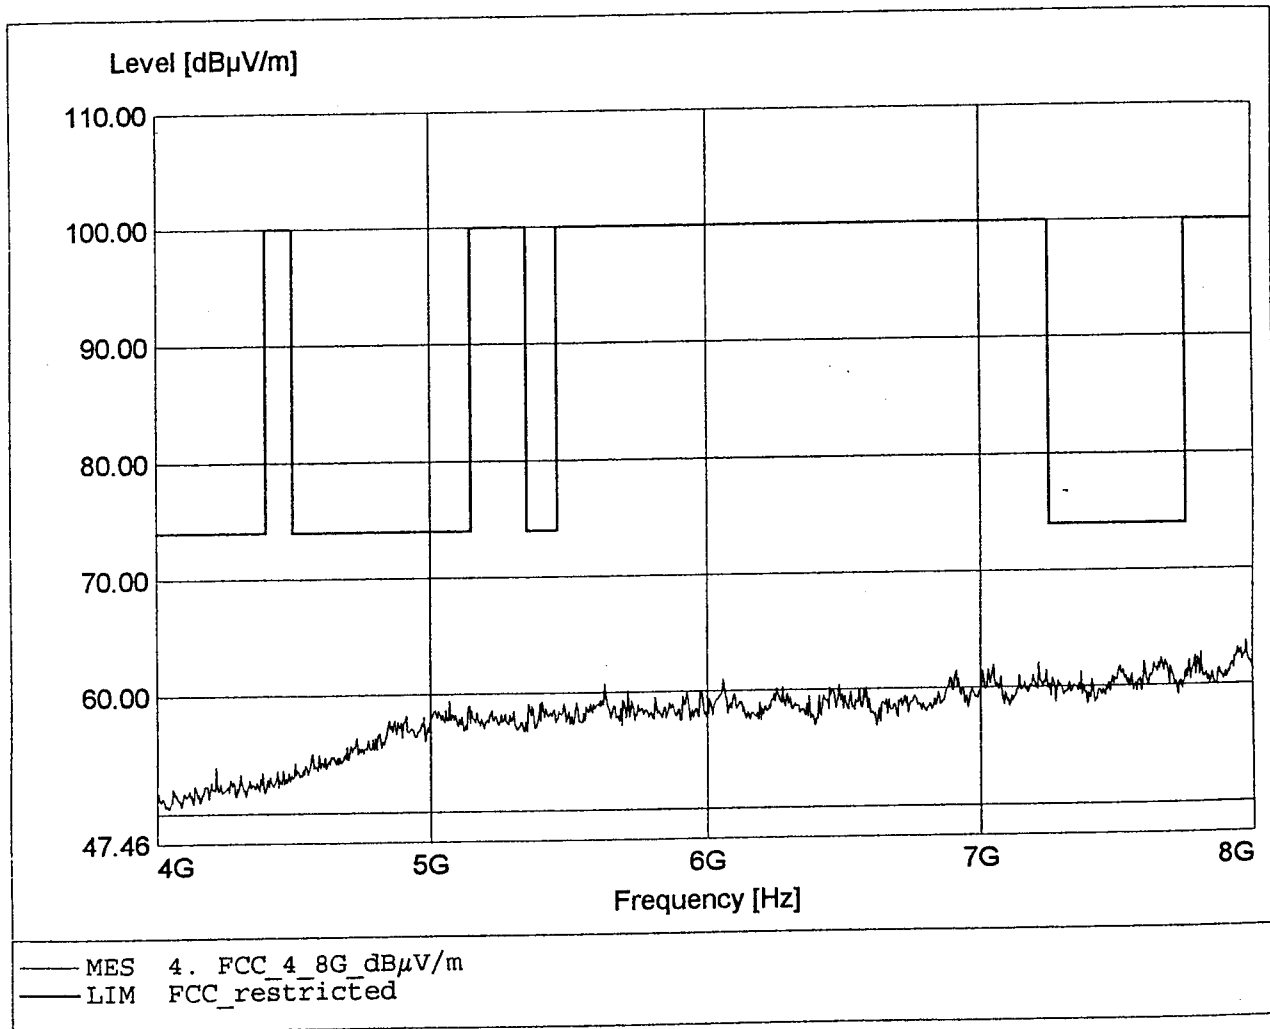

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7533,04MHz Pmax:65,4dBμV/m

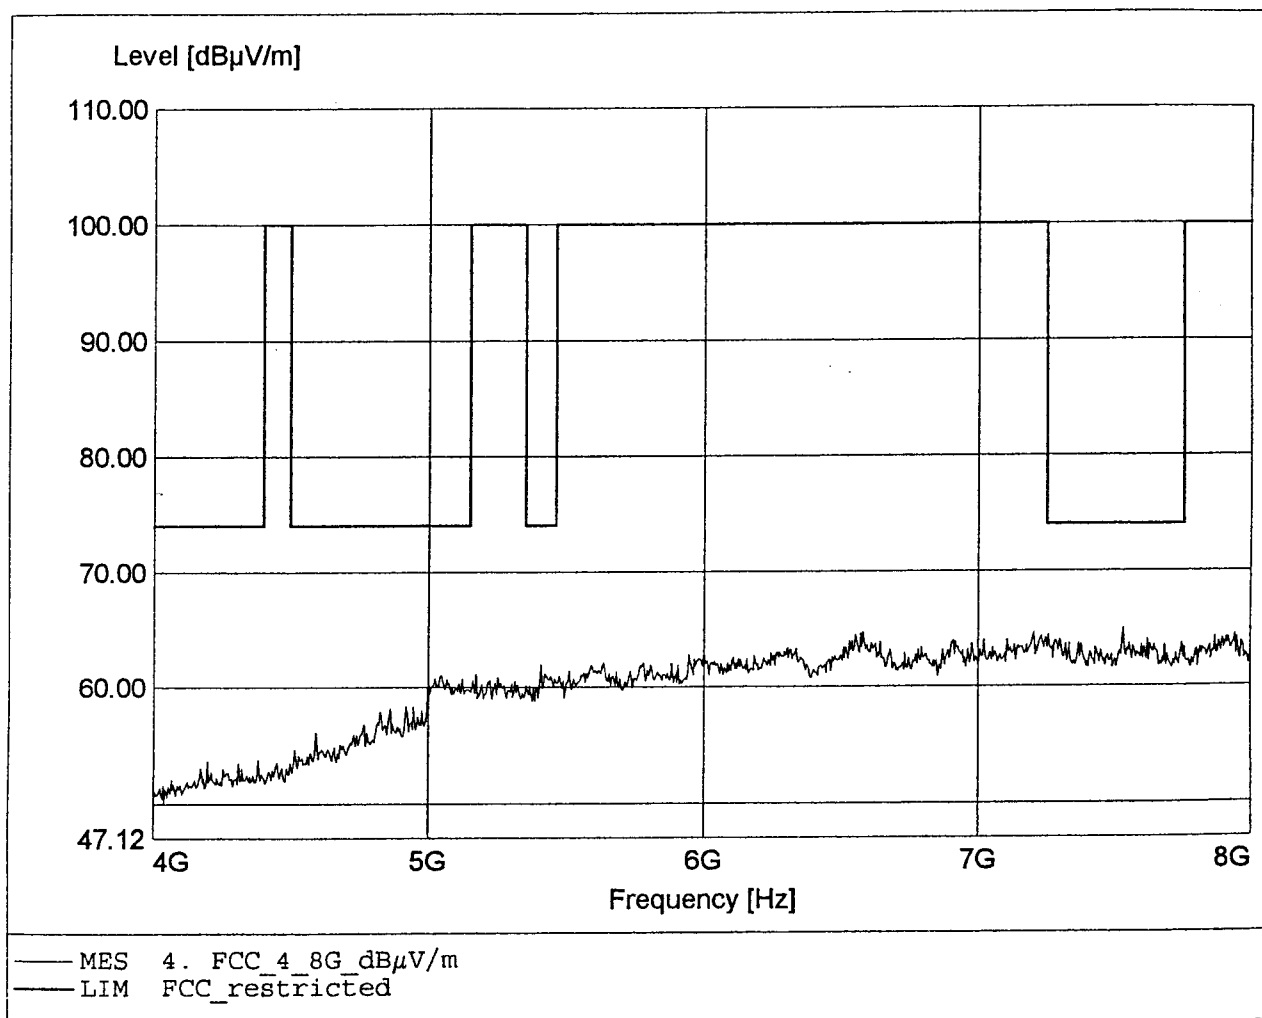

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:15533,33MHz Pmax:43,84dBμV/m

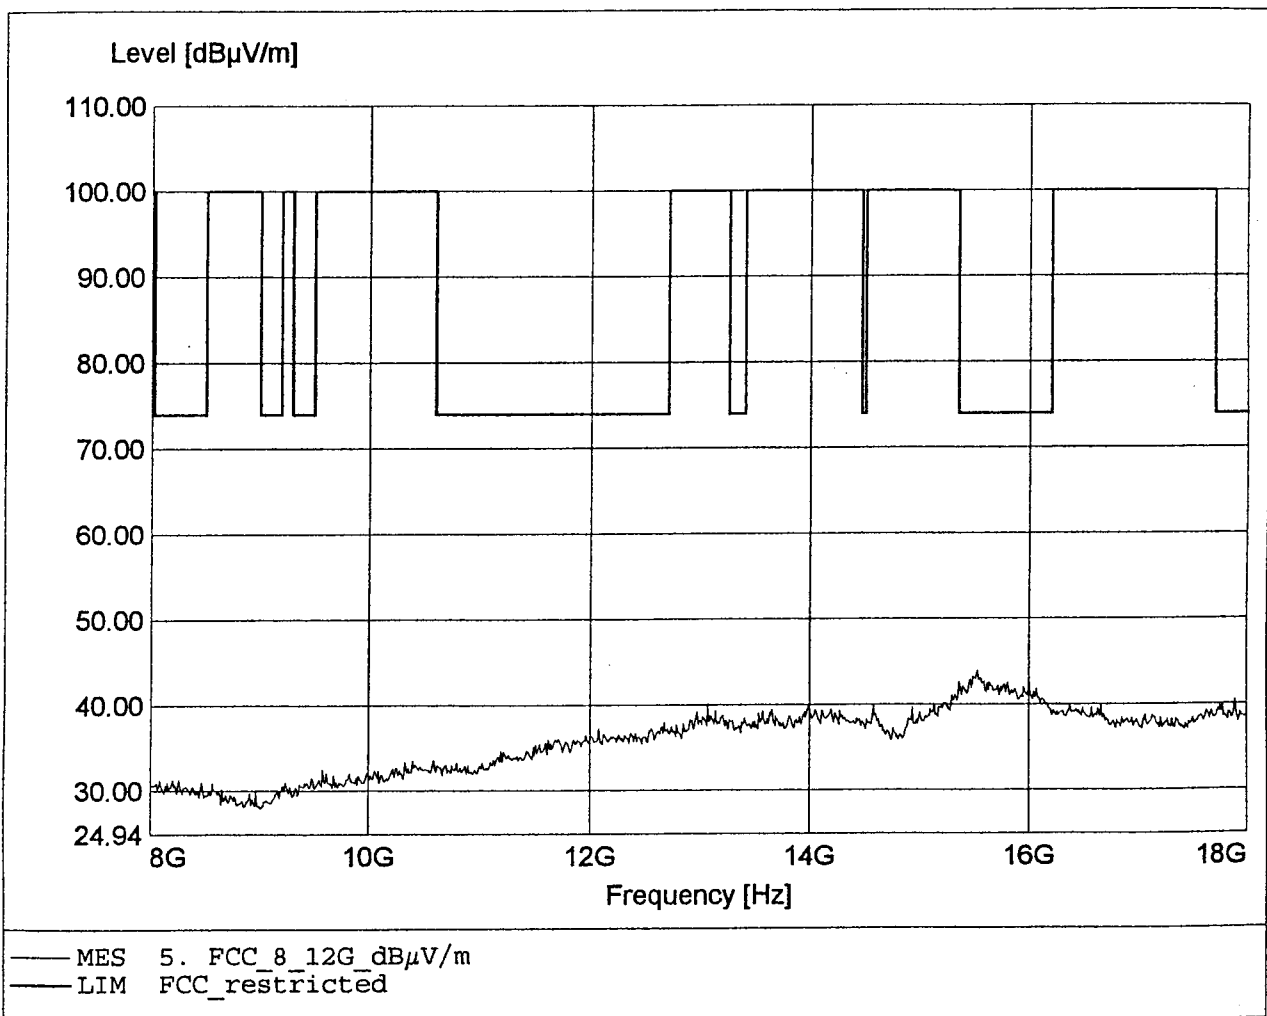

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:11999,99MHz Pmax:54,64dBμV/m

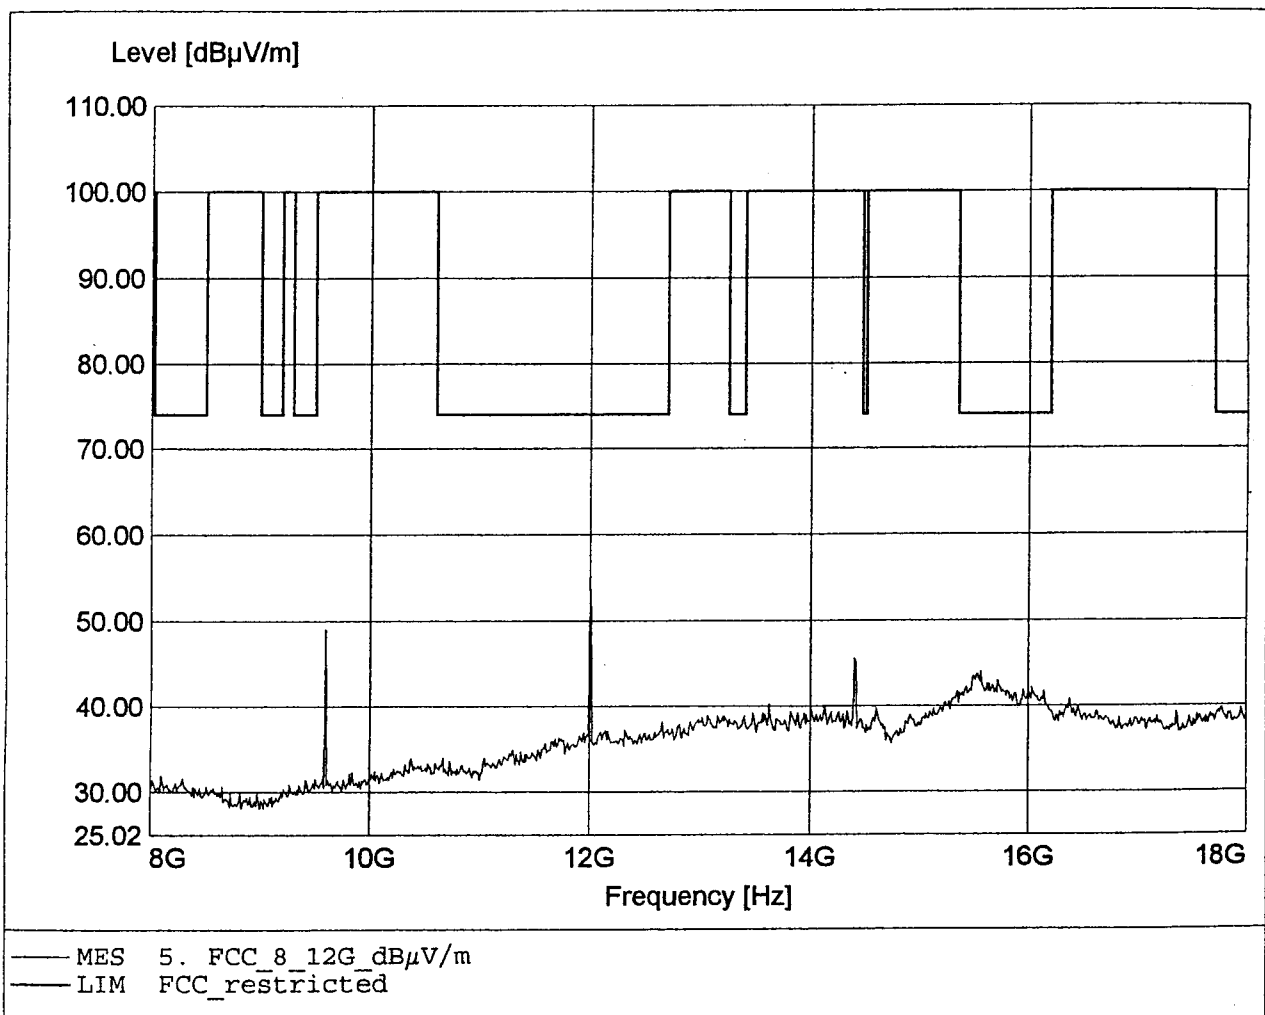

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26367,77MHz Pmax:59,50dBµV/m

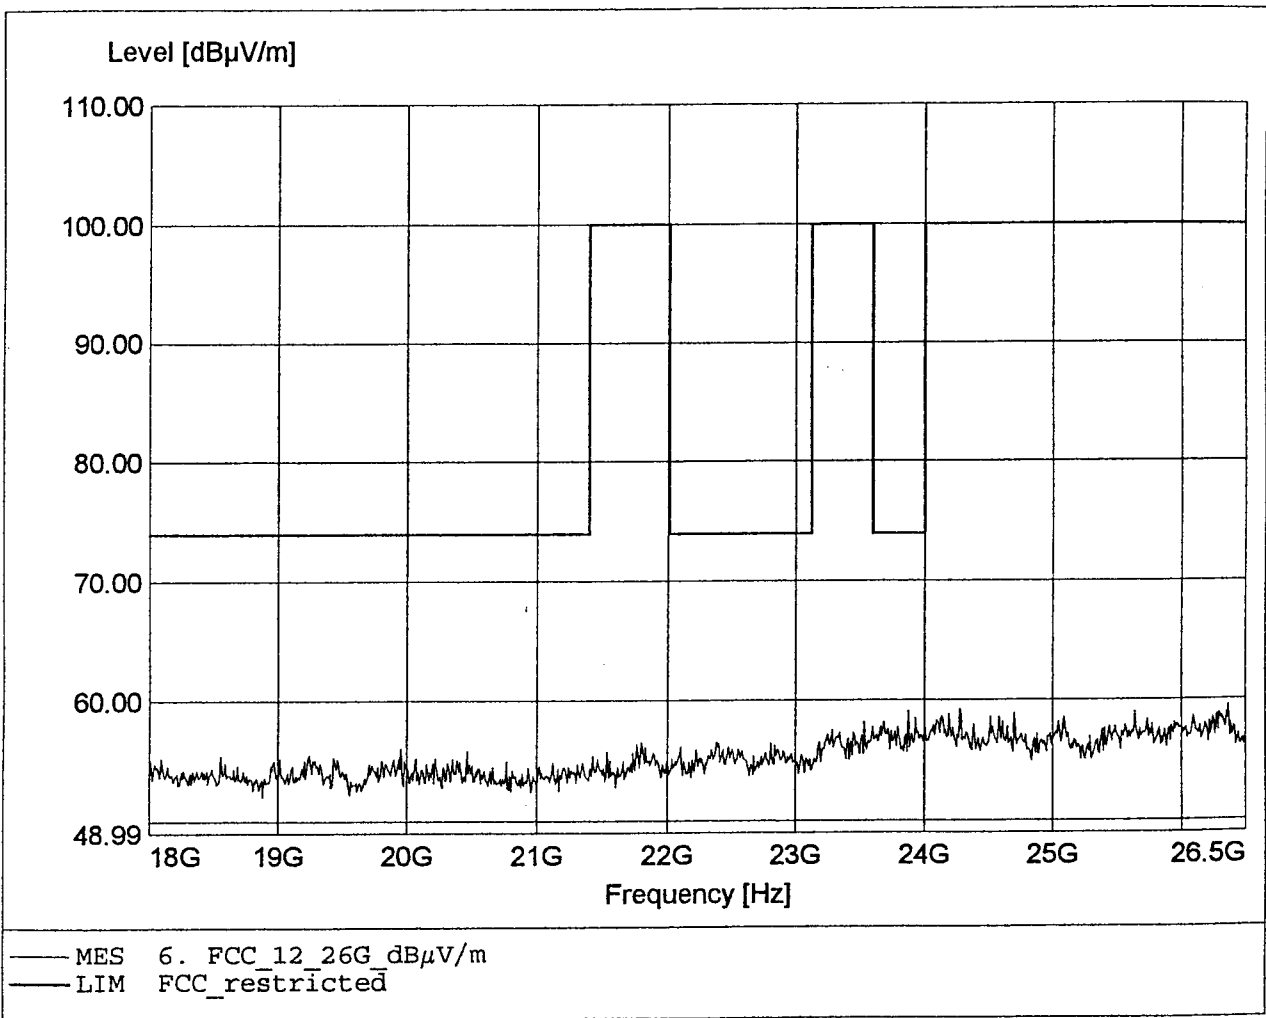

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:0 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature / Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26235,55MHz Pmax:59,66dBμV/m

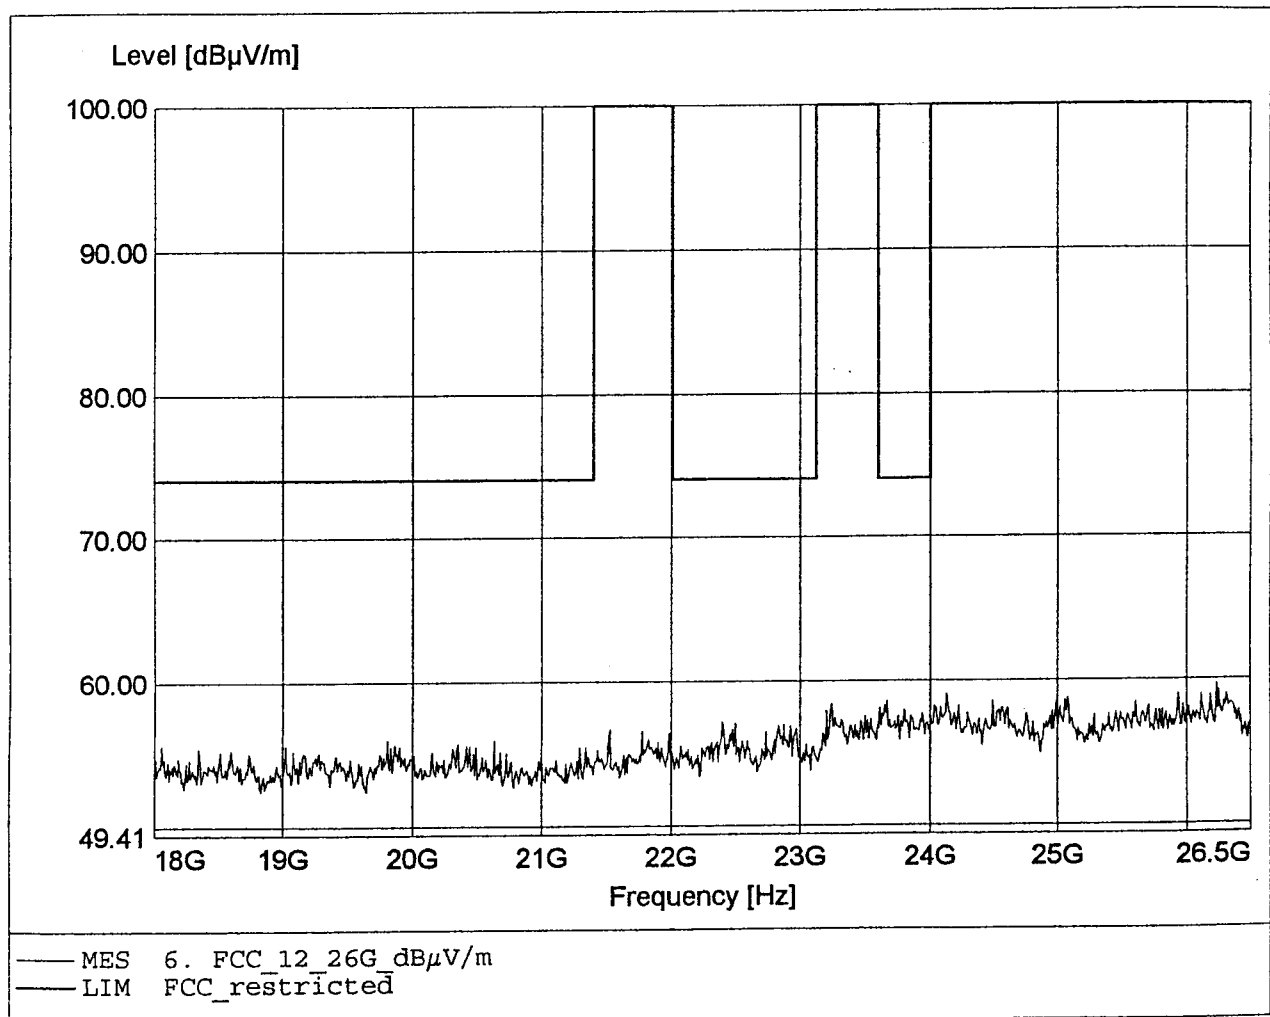

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:200,00MHz Pmax:27,83dBμV/m

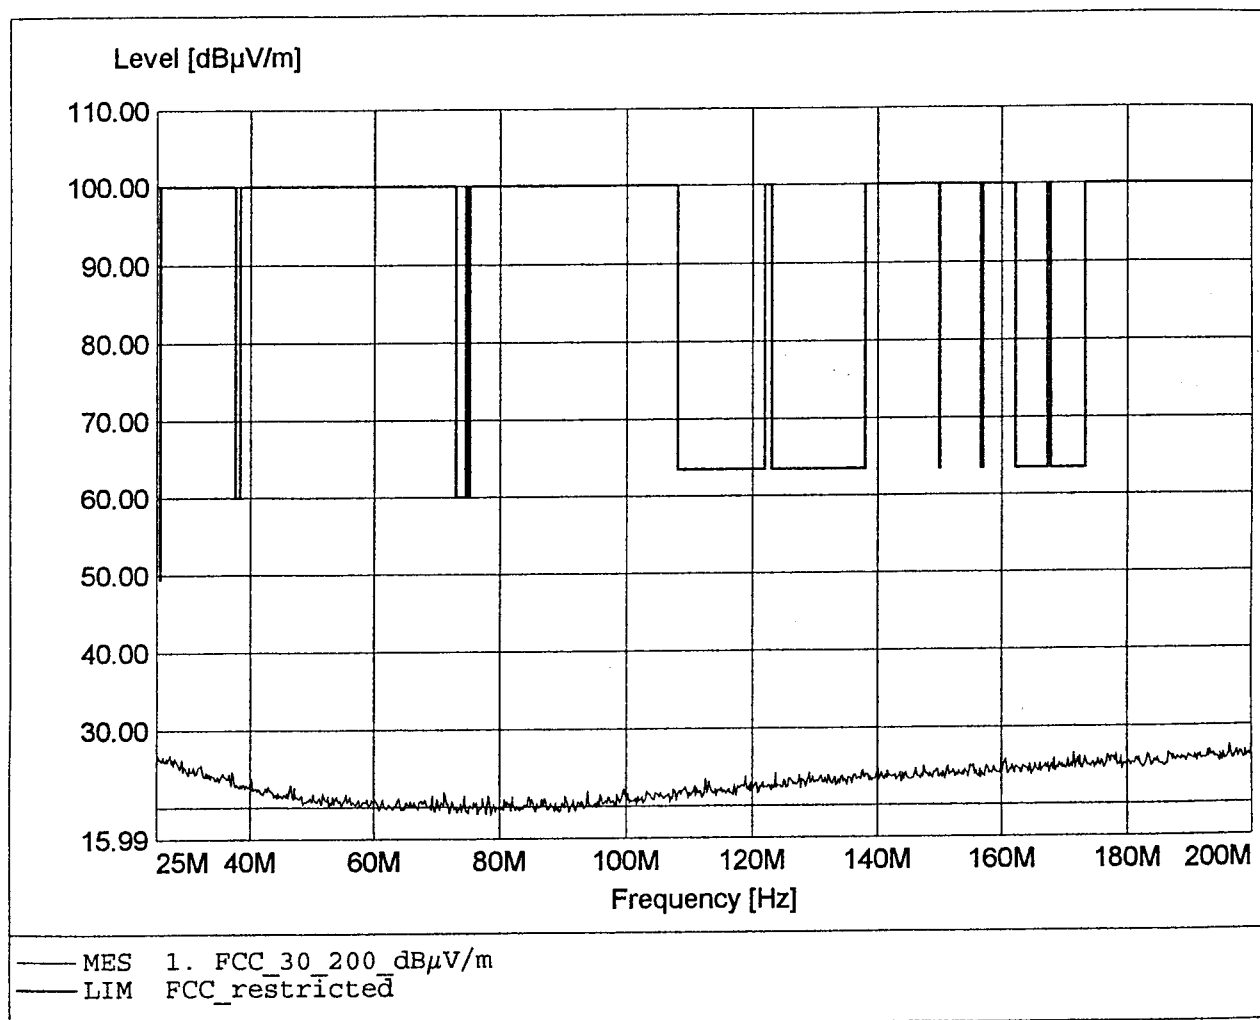

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:189,50MHz Pmax:27,60dBμV/m

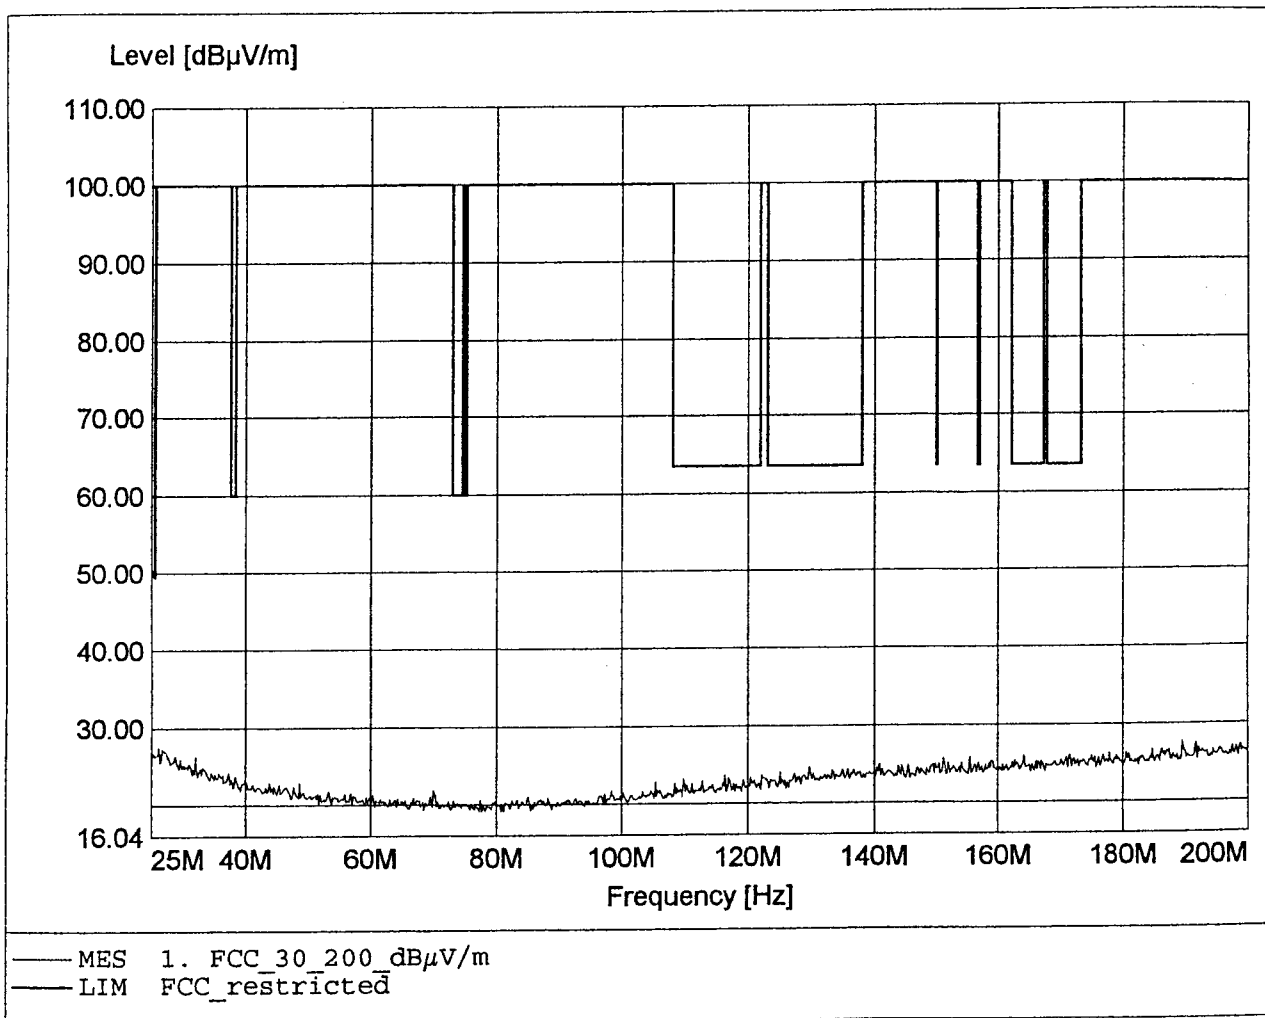

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:996,44MHz Pmax:35,89dBμV/m

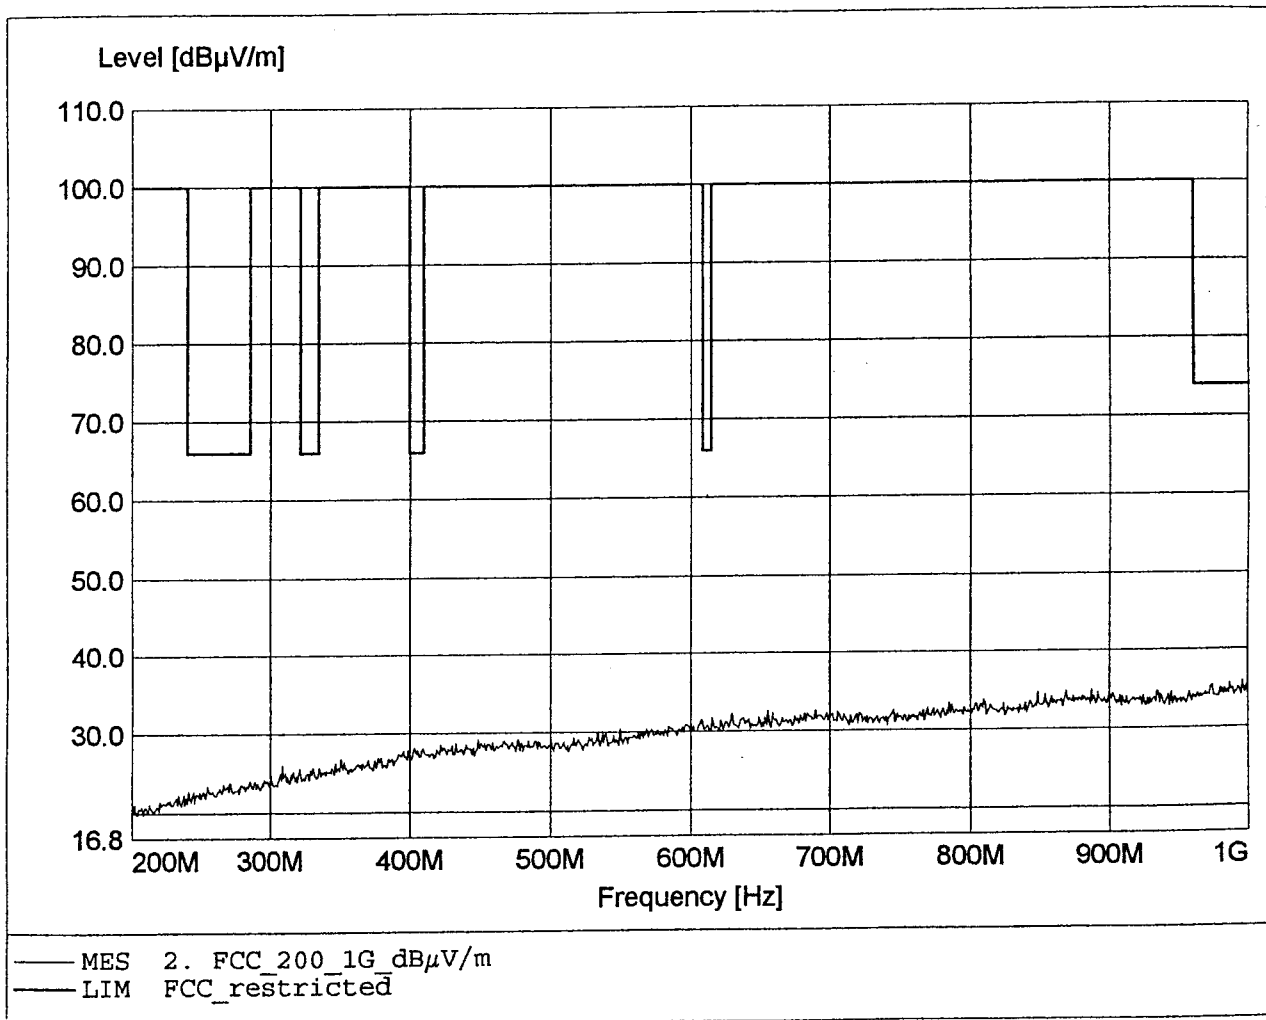

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)


EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S

Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:999,07MHz Pmax:36,7dBμV/m

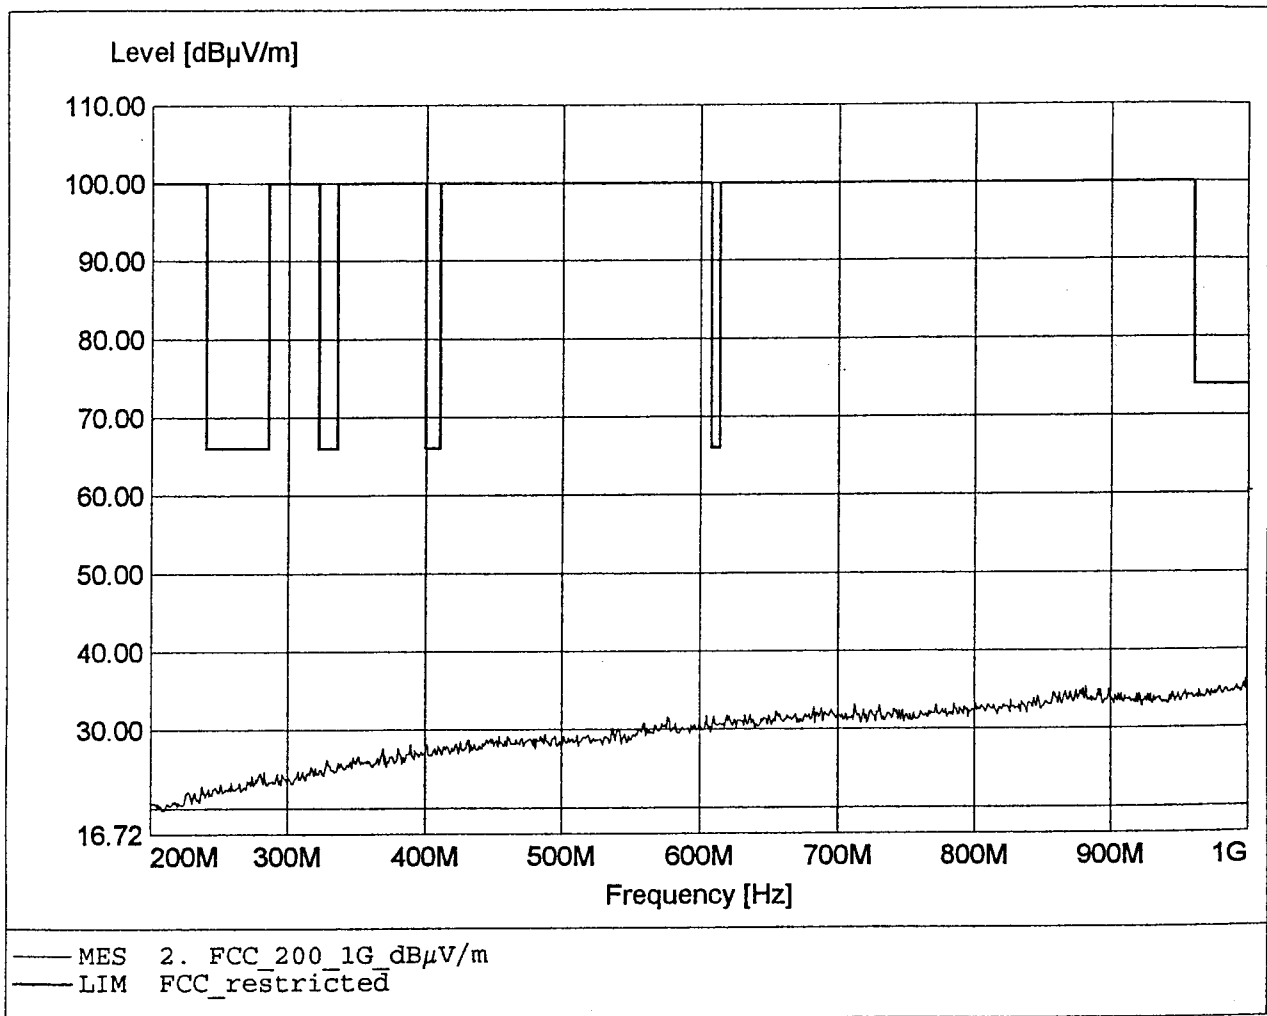


Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S
Mod: scan
Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2446,66MHz Pmax:111,69dBμV/m

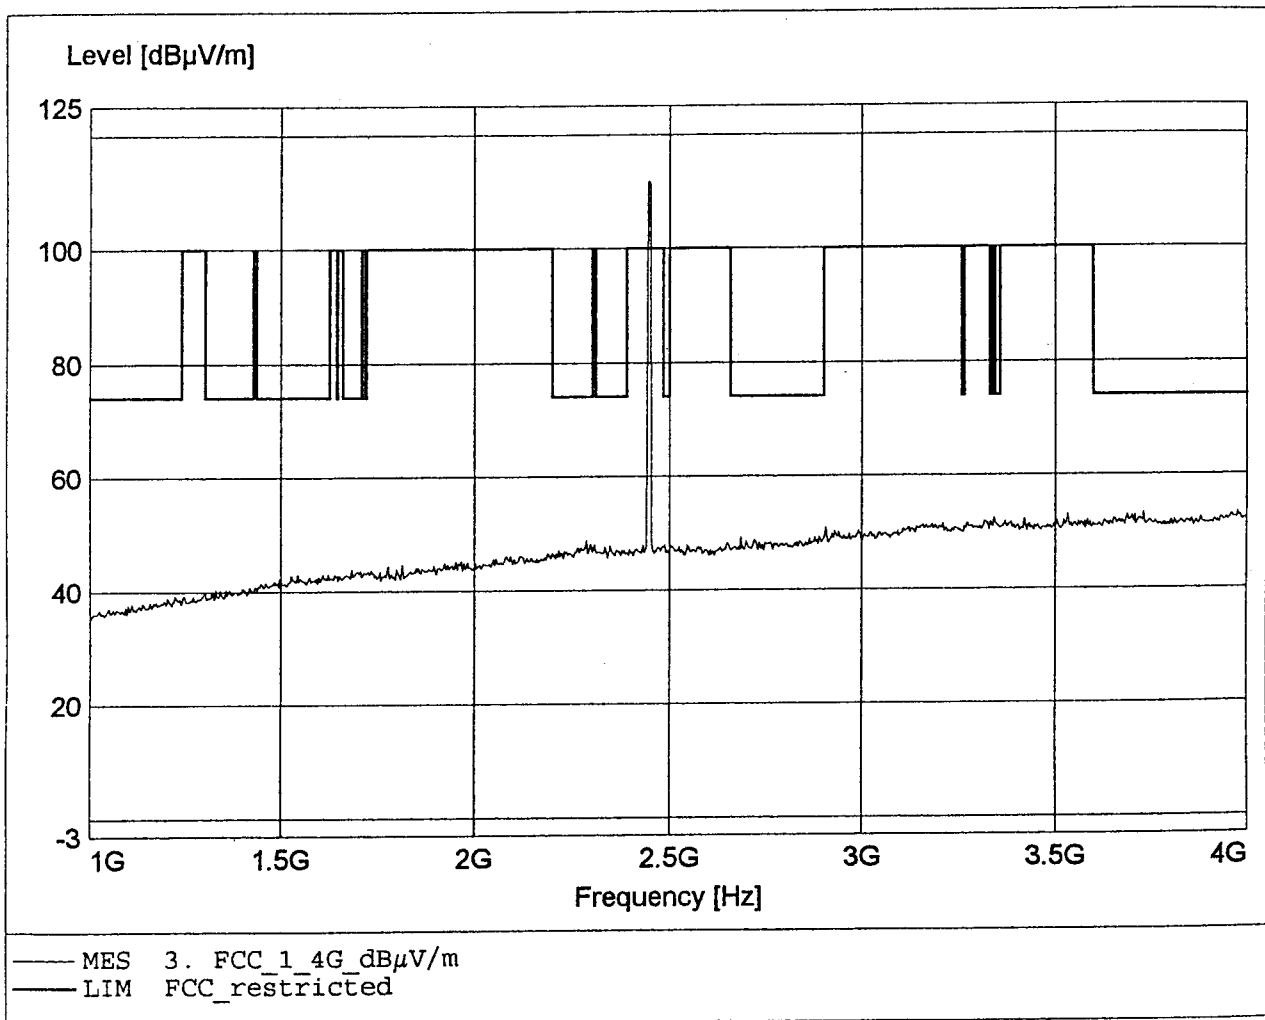

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)


EUT / Model: 2,4GHz DECT / WRF4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S
Mod: scan
Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2443,33MHz Pmax:108,99dBµV/m

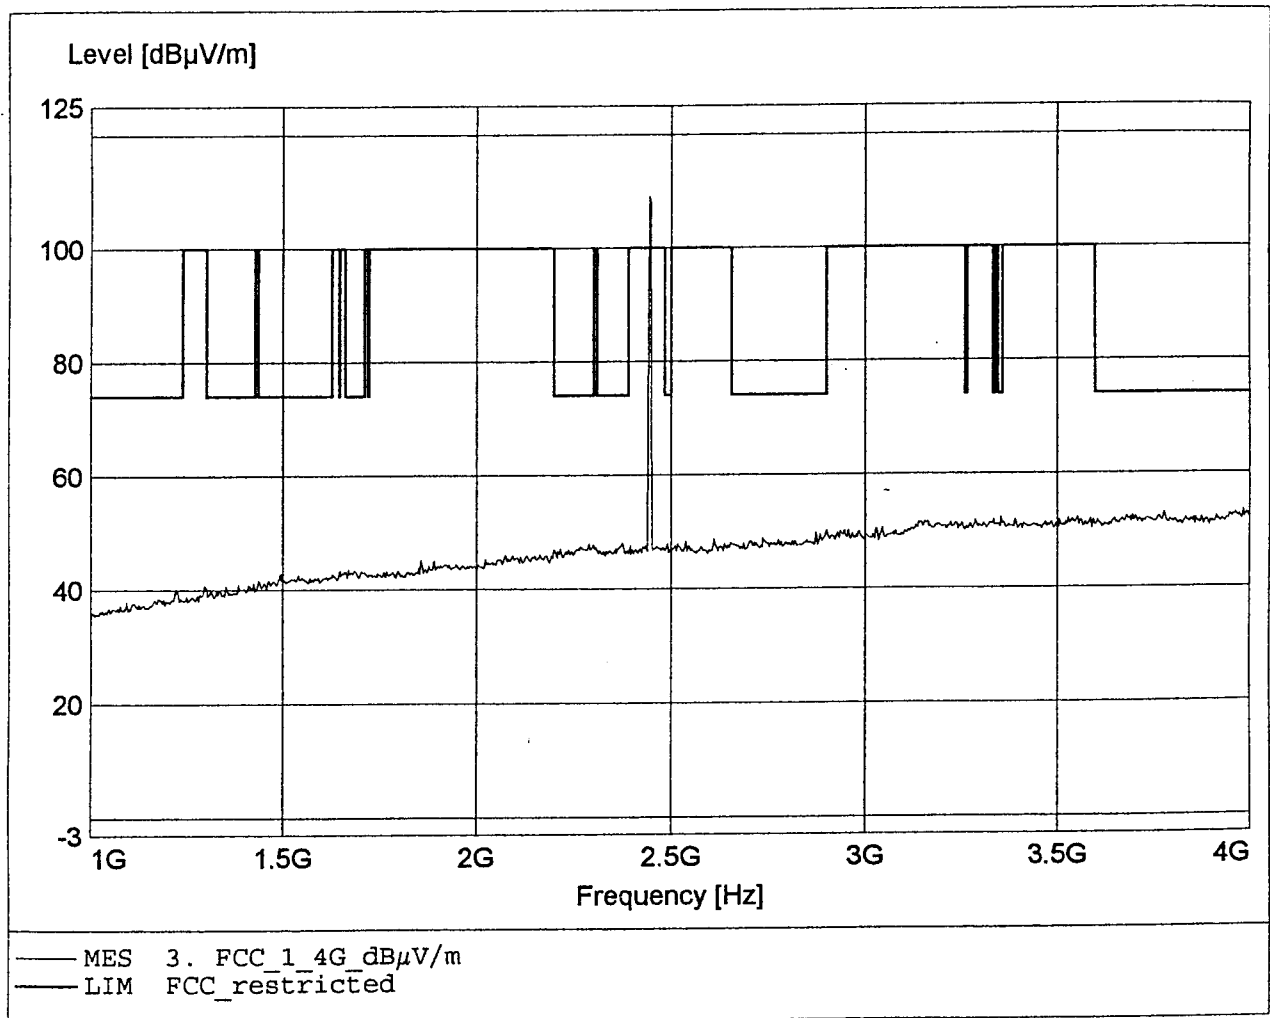

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7653,33MHz Pmax:63,53dBμV/m

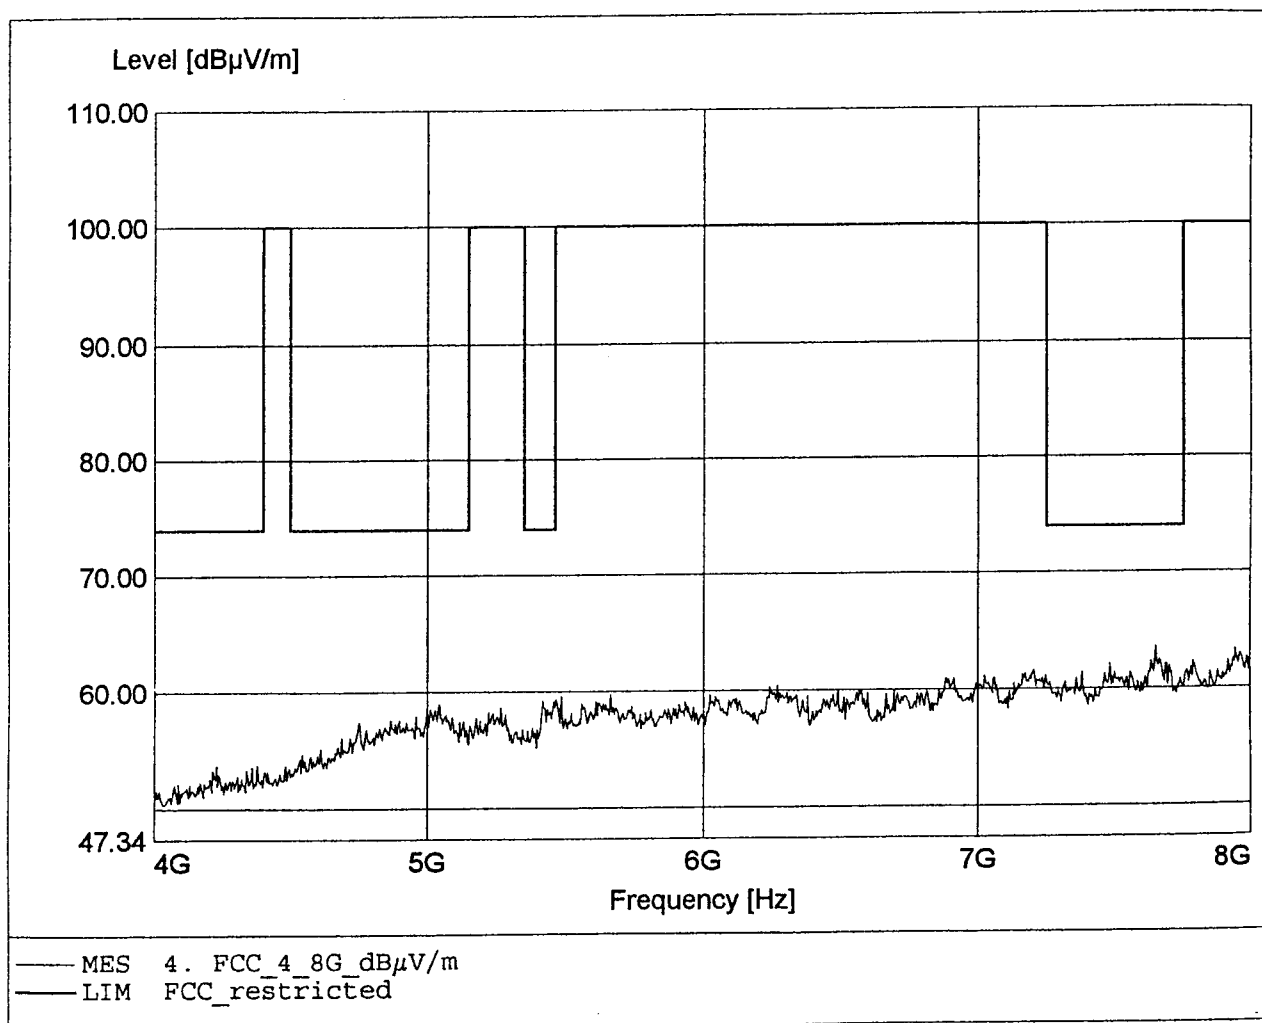

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7960,00MHz Pmax:63,43dBμV/m

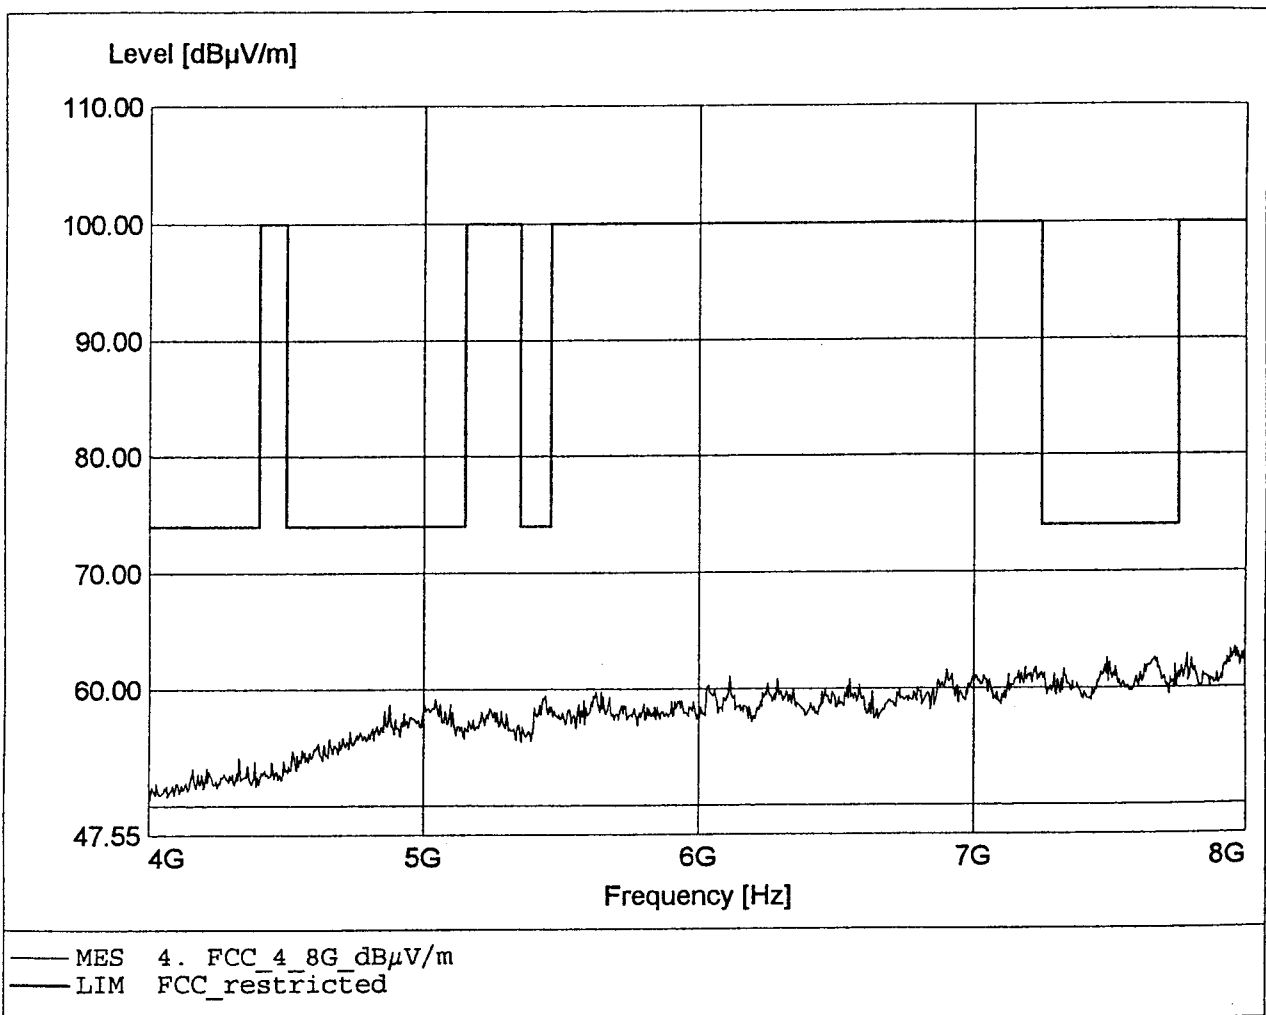

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:12211,11MHz Pmax:48,77dBµV/m

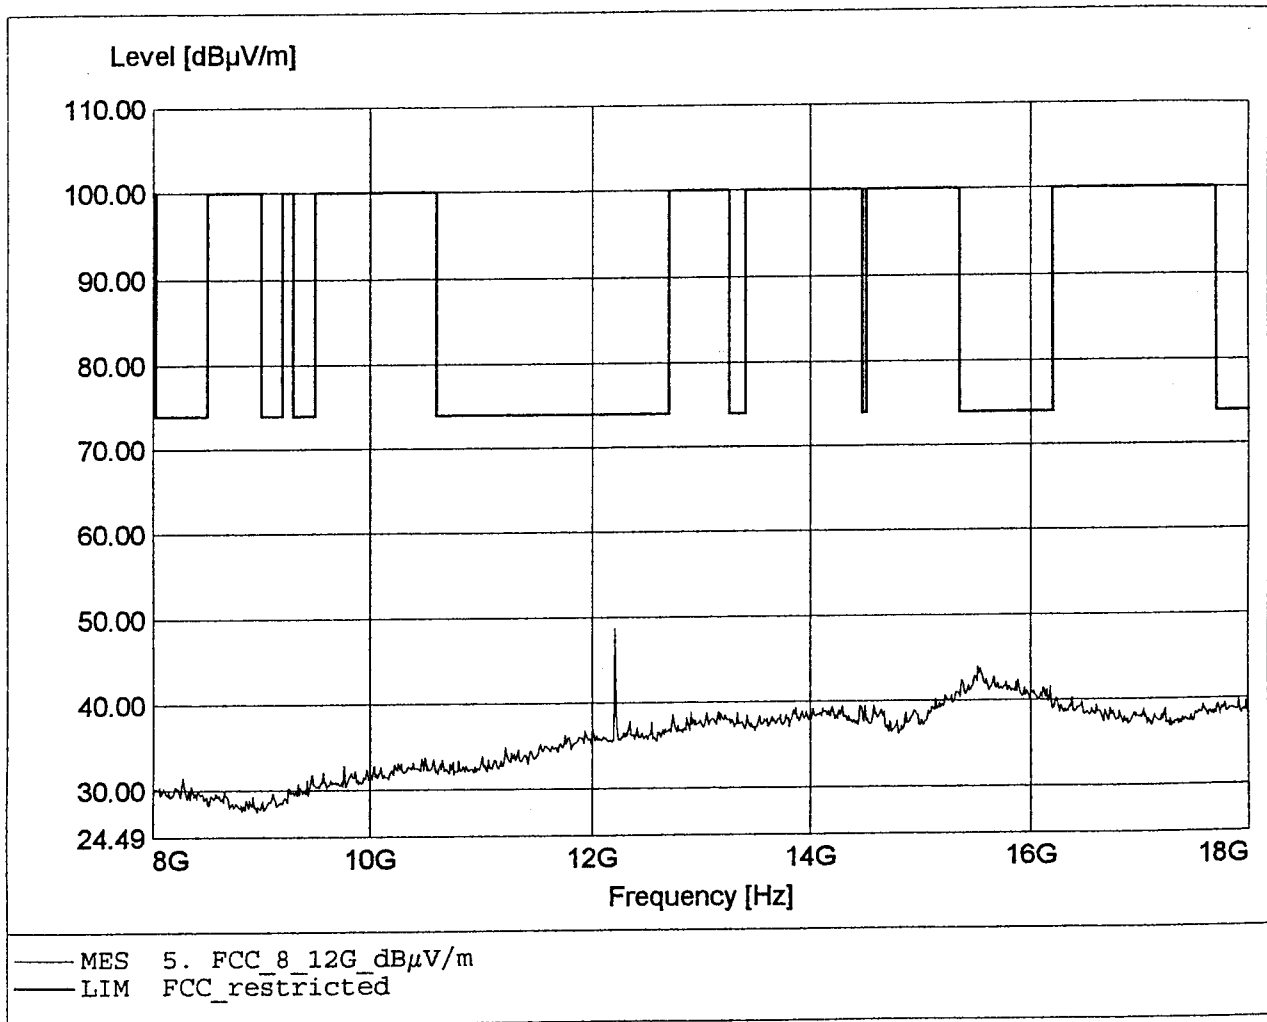

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:9766,66MHz Pmax:44,64dBμV/m

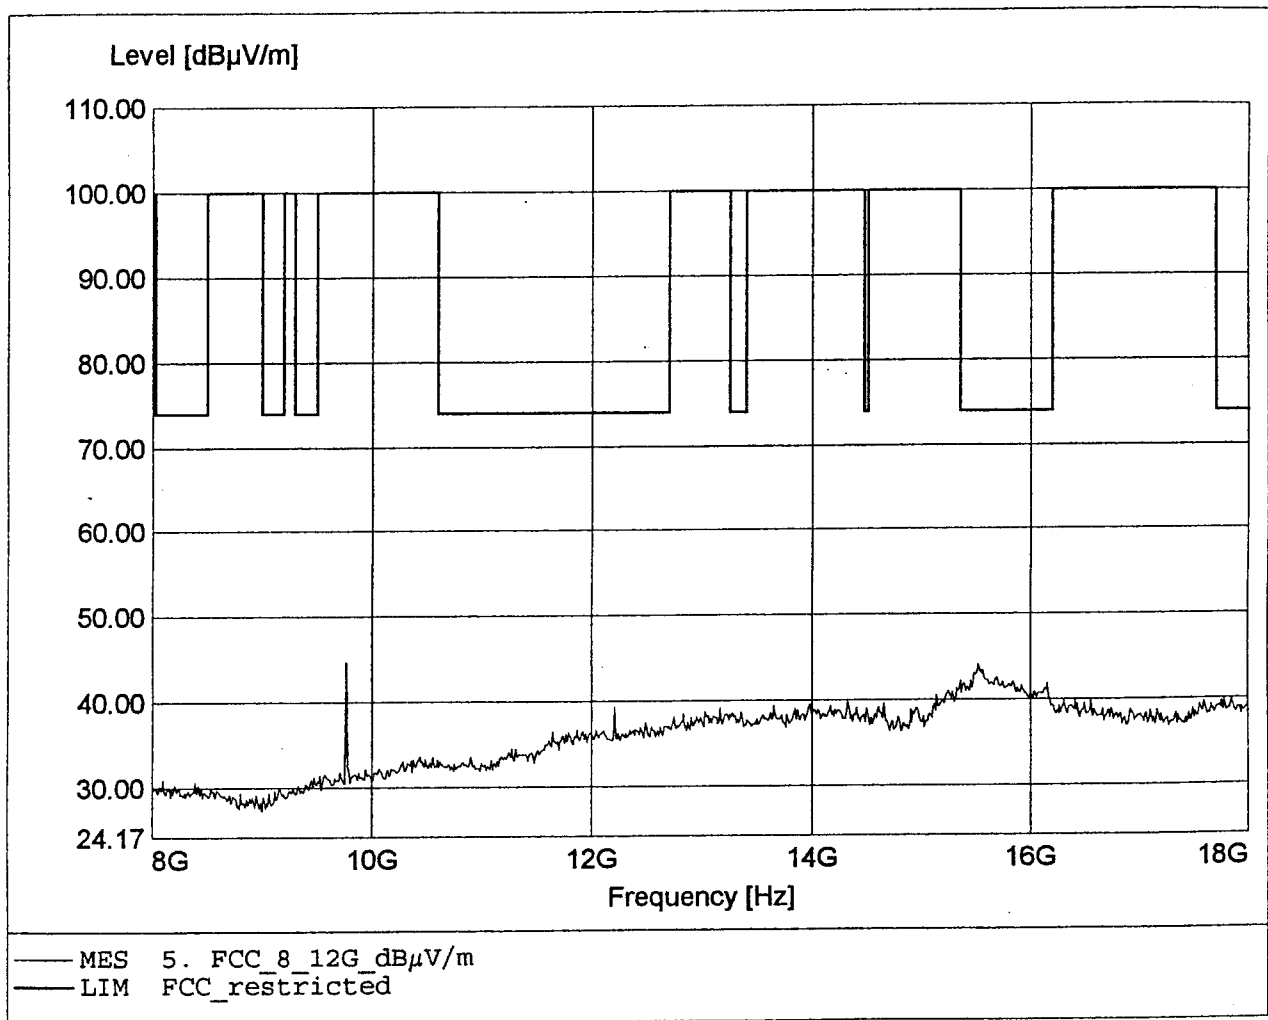

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFPA 2G4 Ant:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26263,88MHz Pmax:59,95dBµV/m

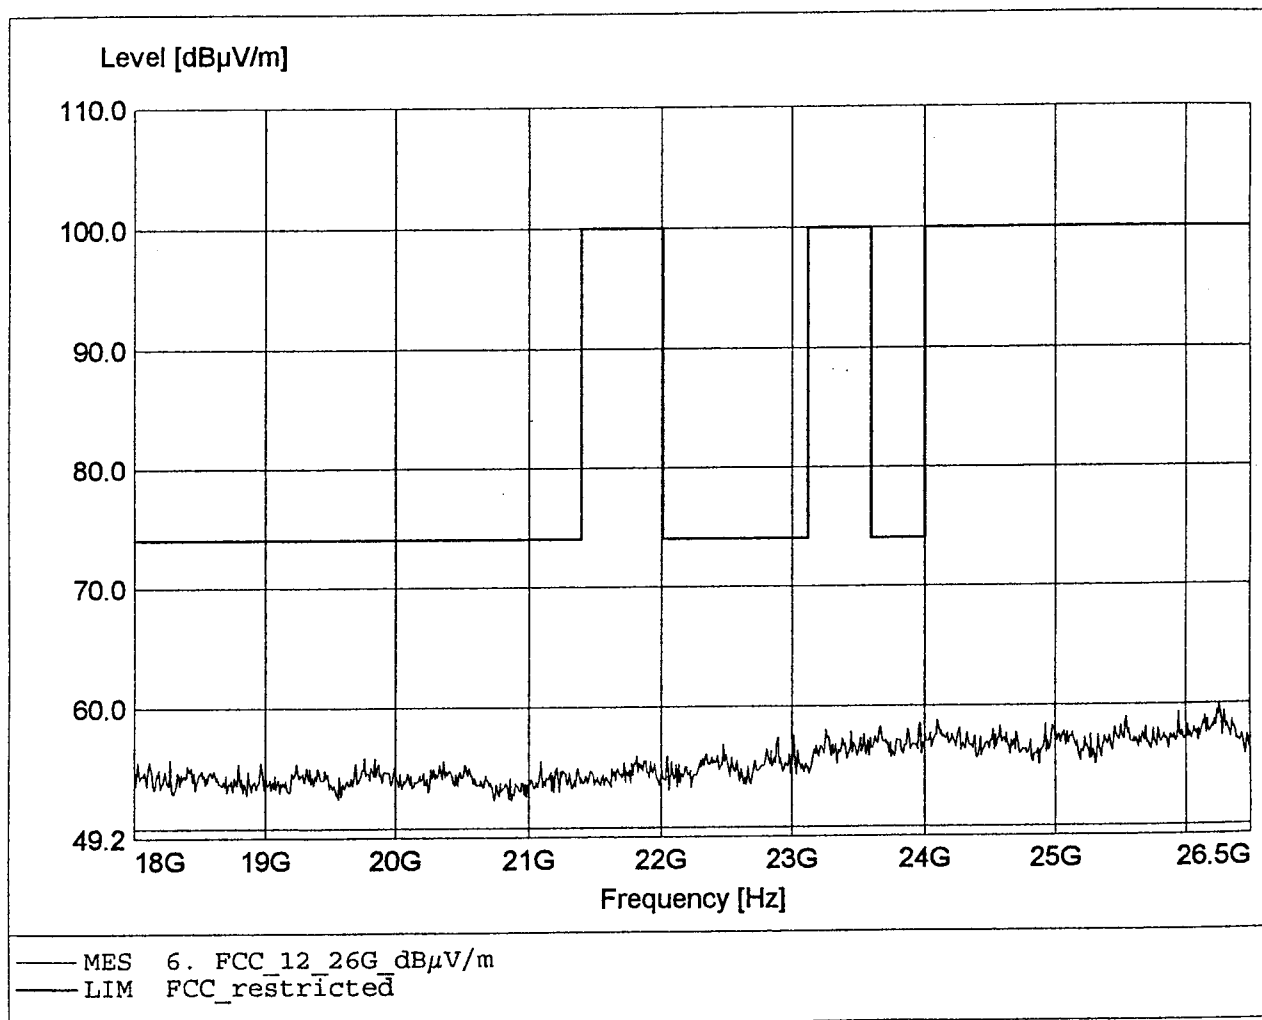

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant.:1 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26273,33MHz Pmax:59,45dBμV/m

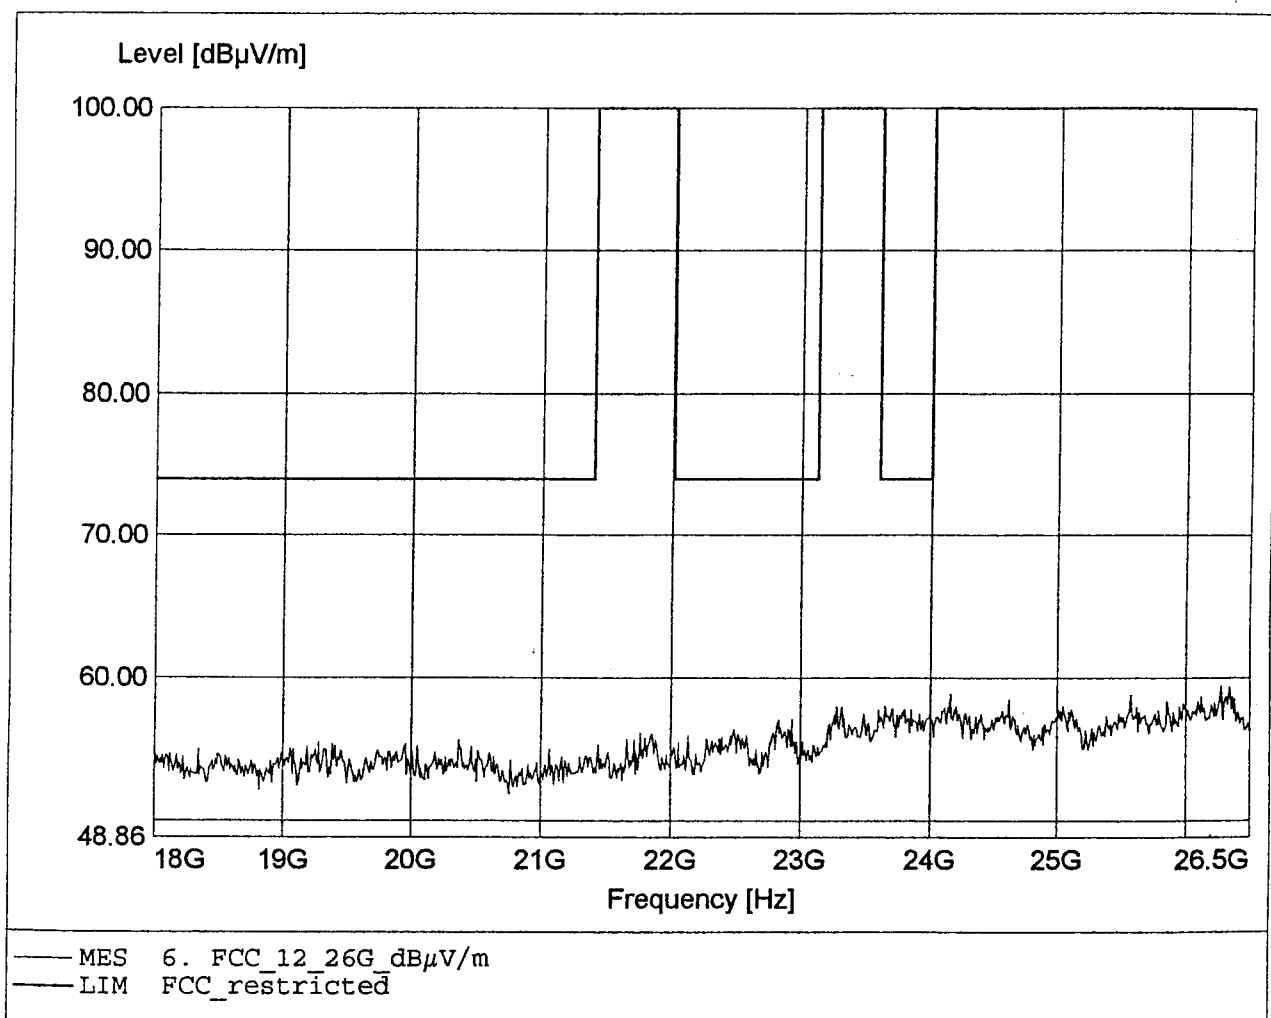

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:25,77MHz Pmax:28,15dBμV/m

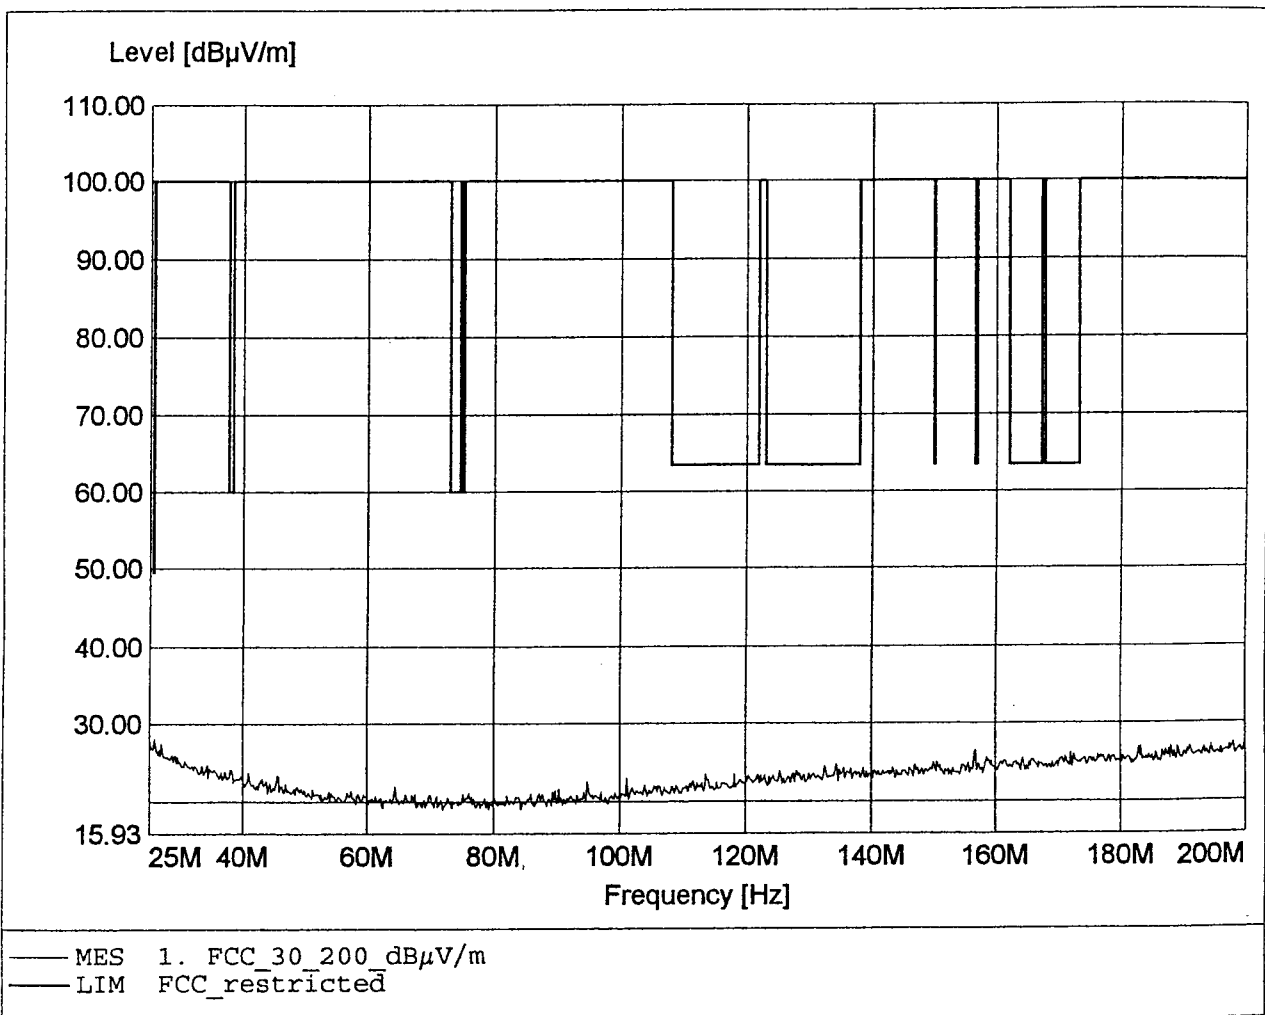

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:25,77MHz Pmax:27,56dBμV/m

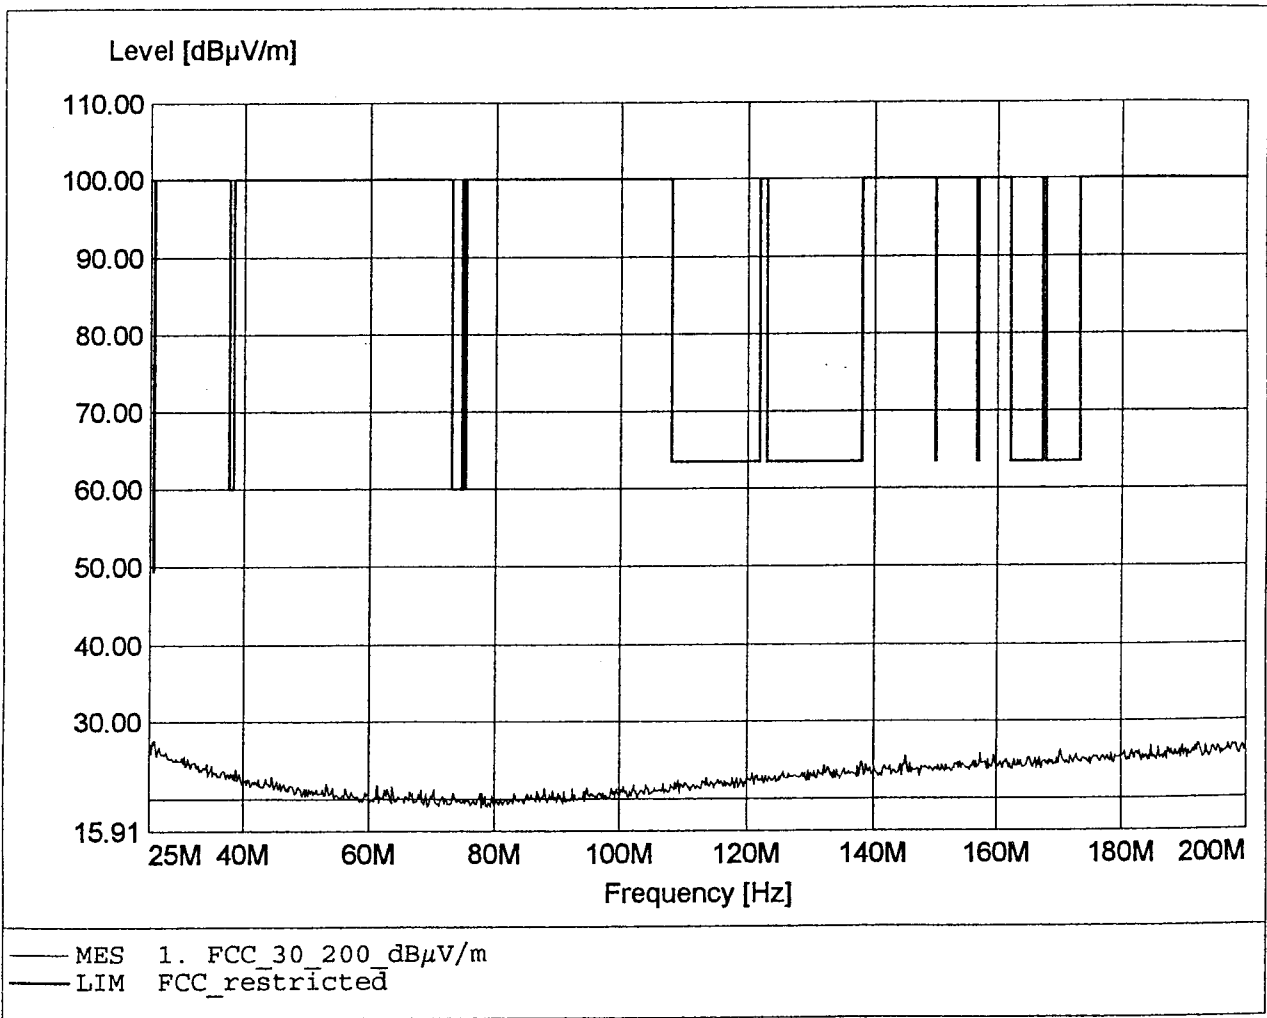

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:993,77MHz Pmax:35,54dBμV/m

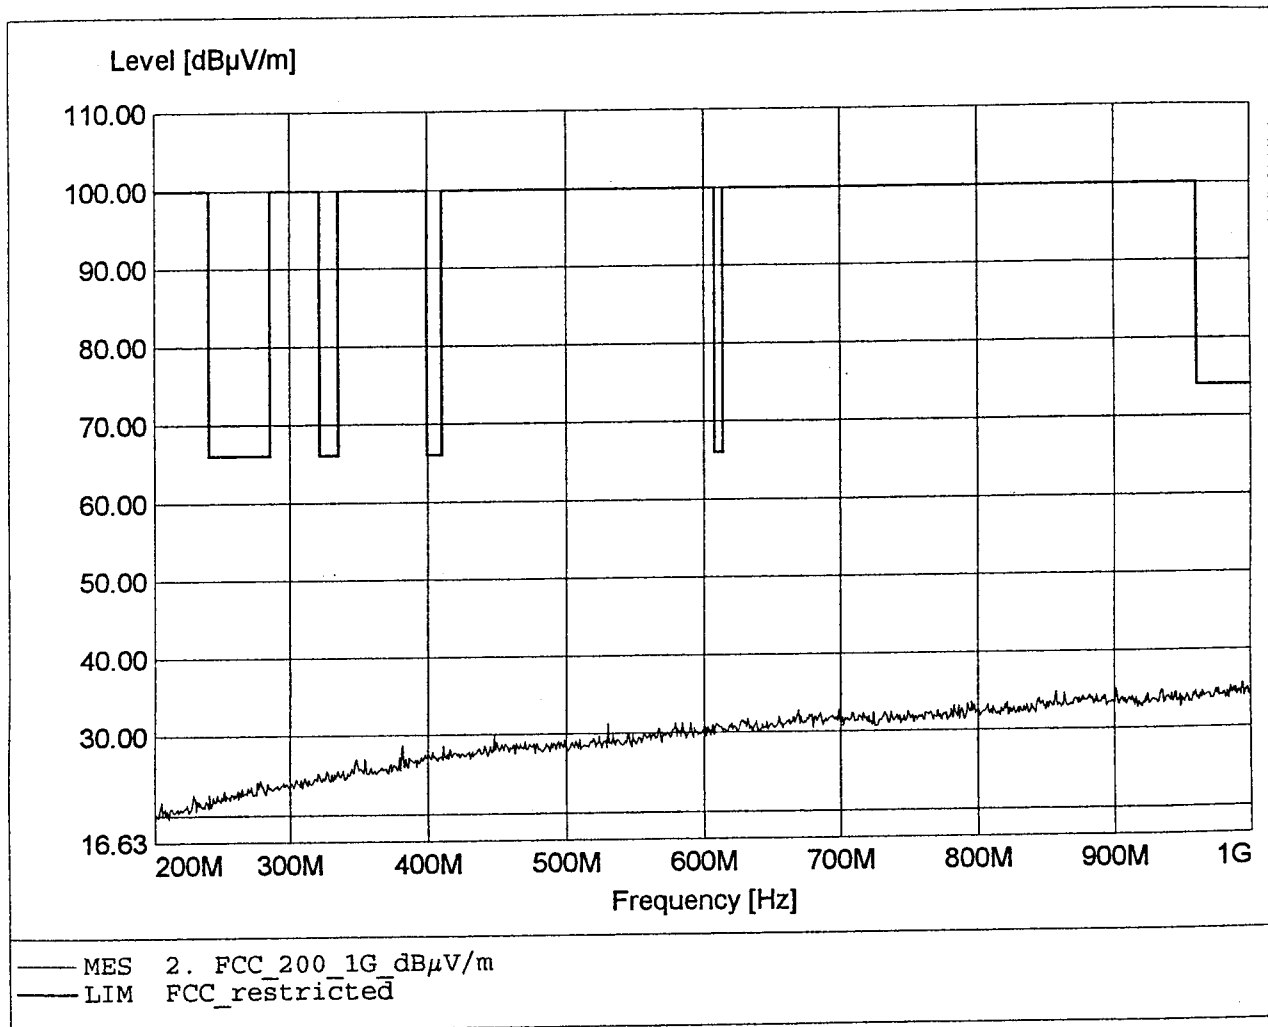

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:984,88MHz Pmax:37,22dBμV/m

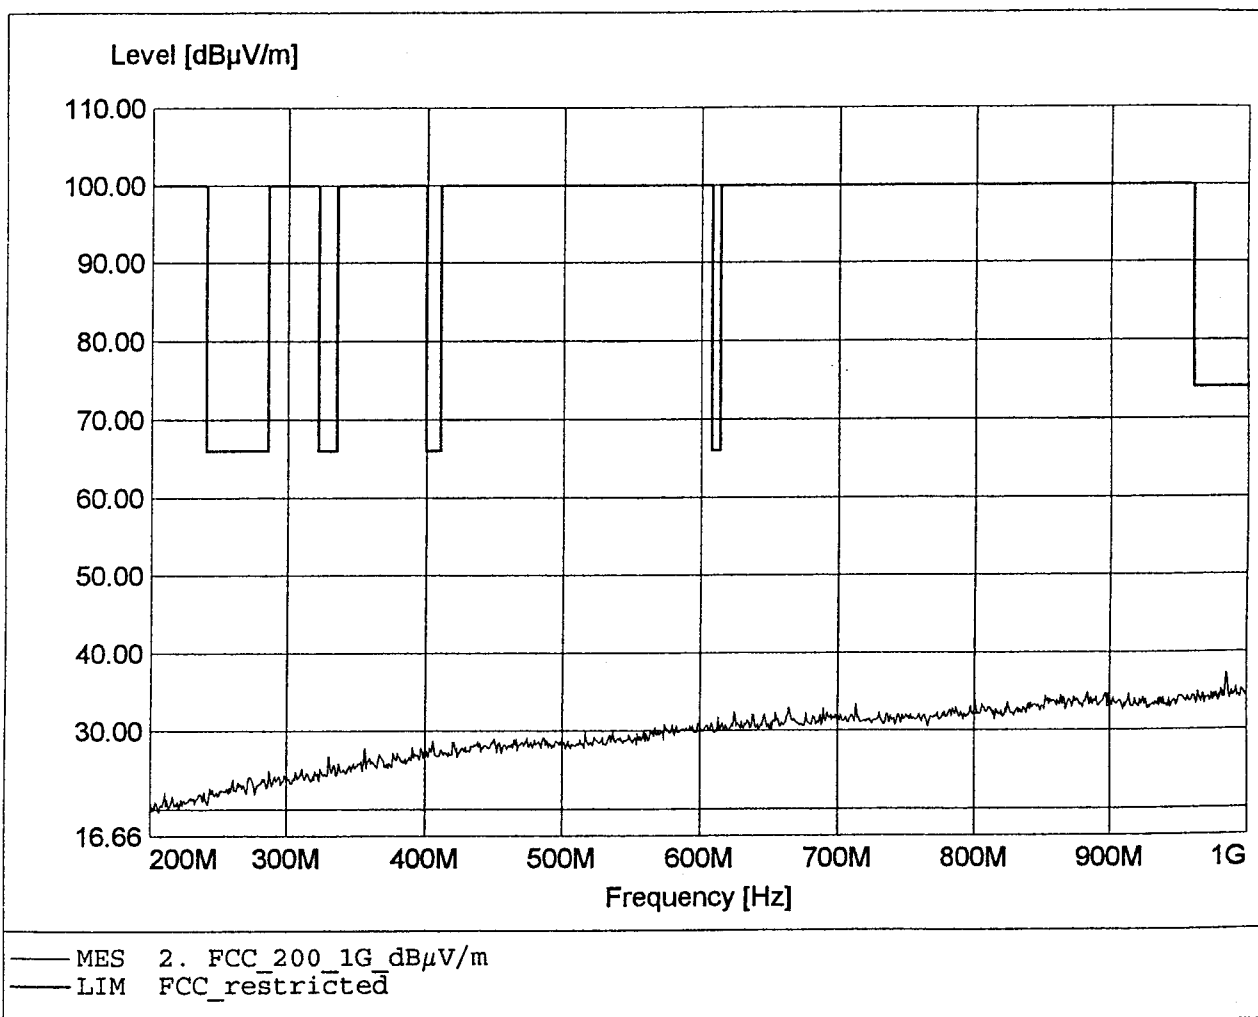

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2443,33MHz Pmax:113,39dBµV/m

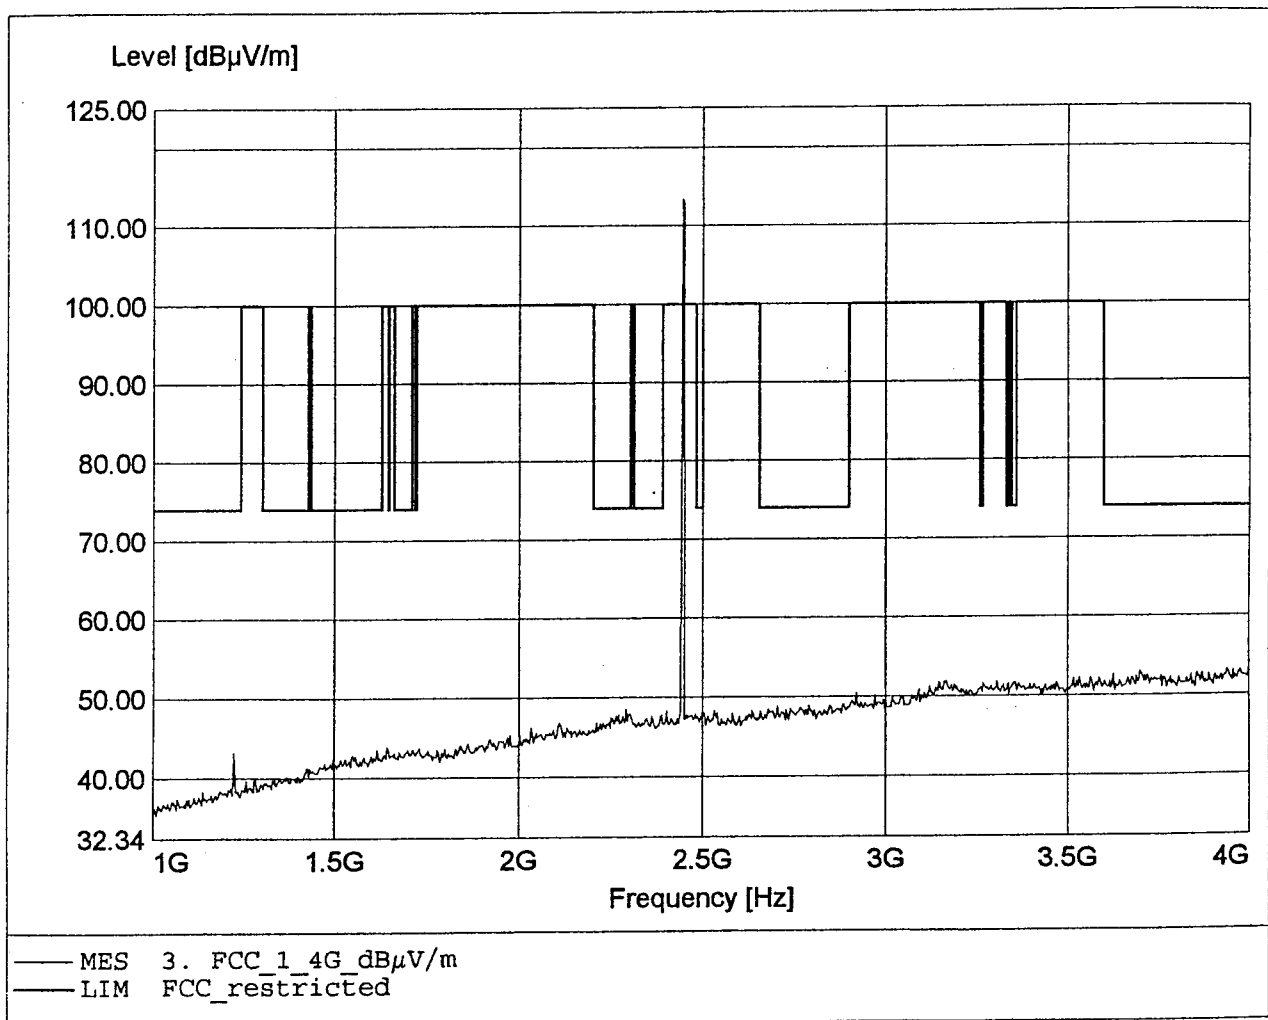

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2446,66MHz Pmax:113,42dBμV/m

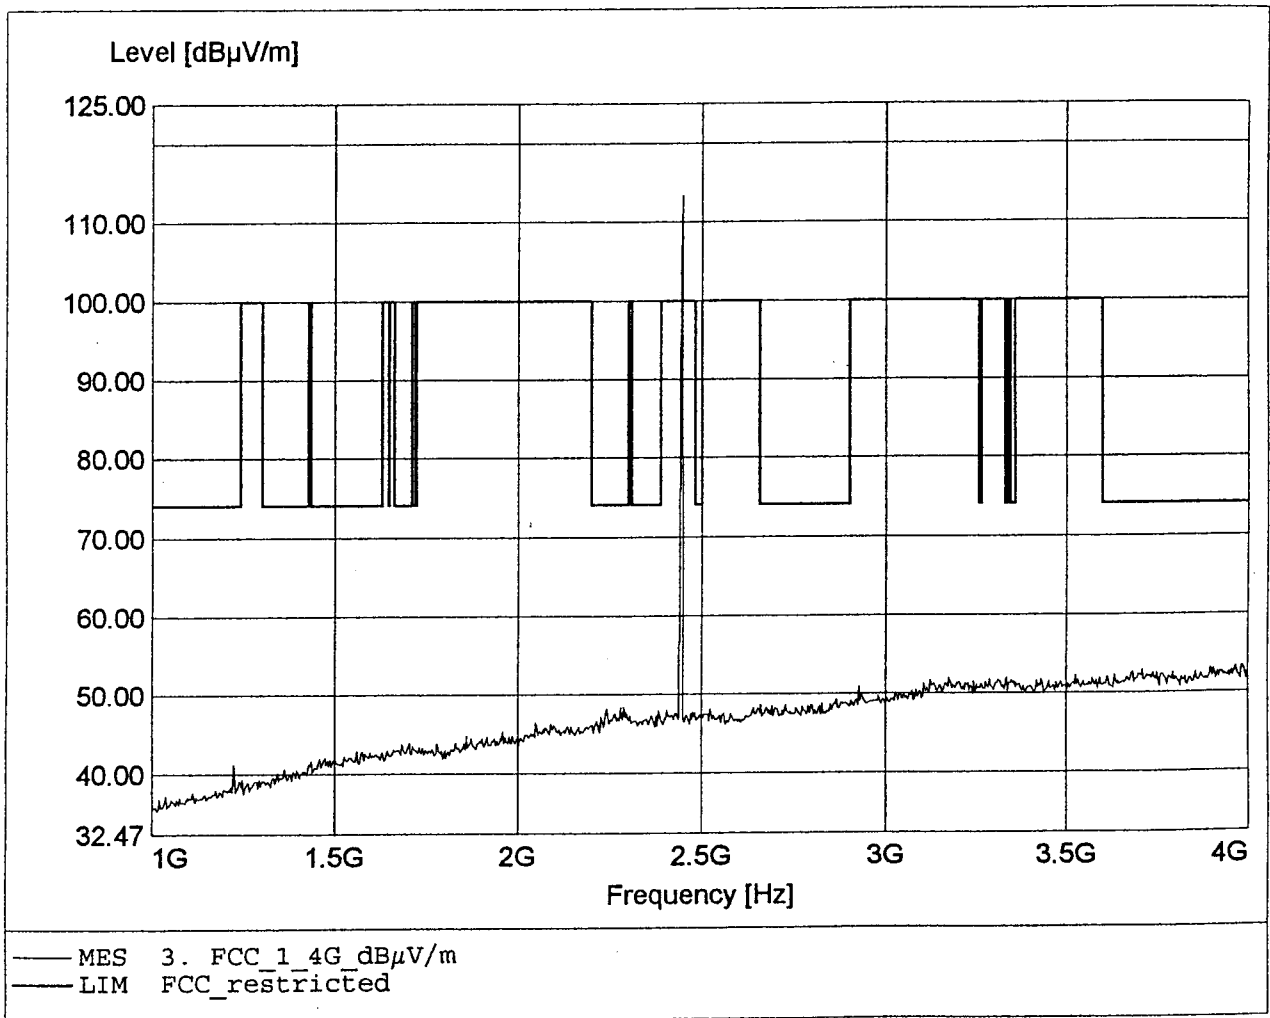

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7946,66MHz Pmax:64,30dBμV/m

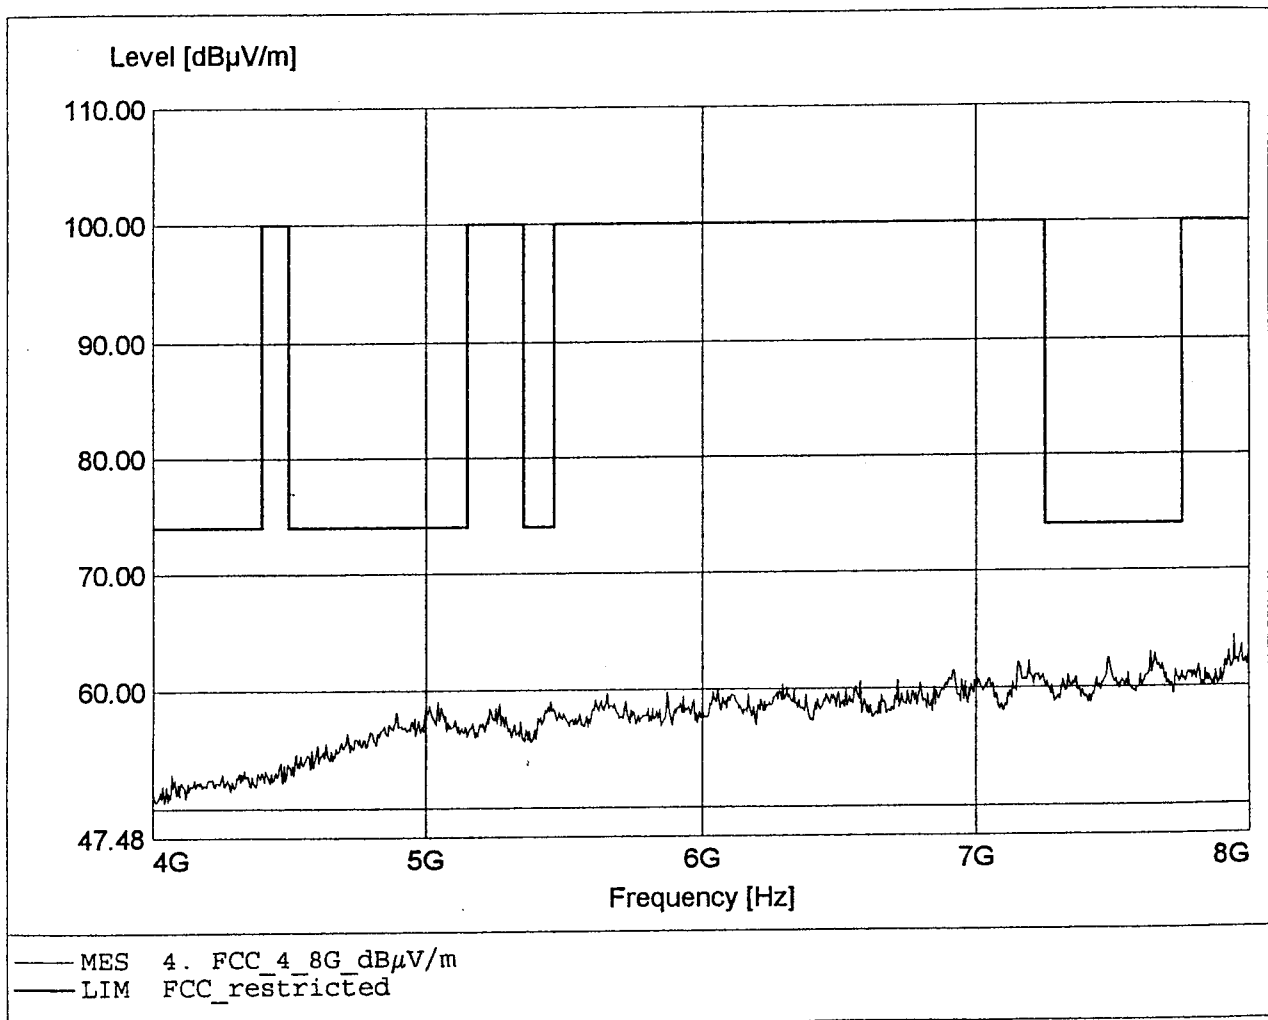

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7653,33MHz Pmax:64,50dBµV/m

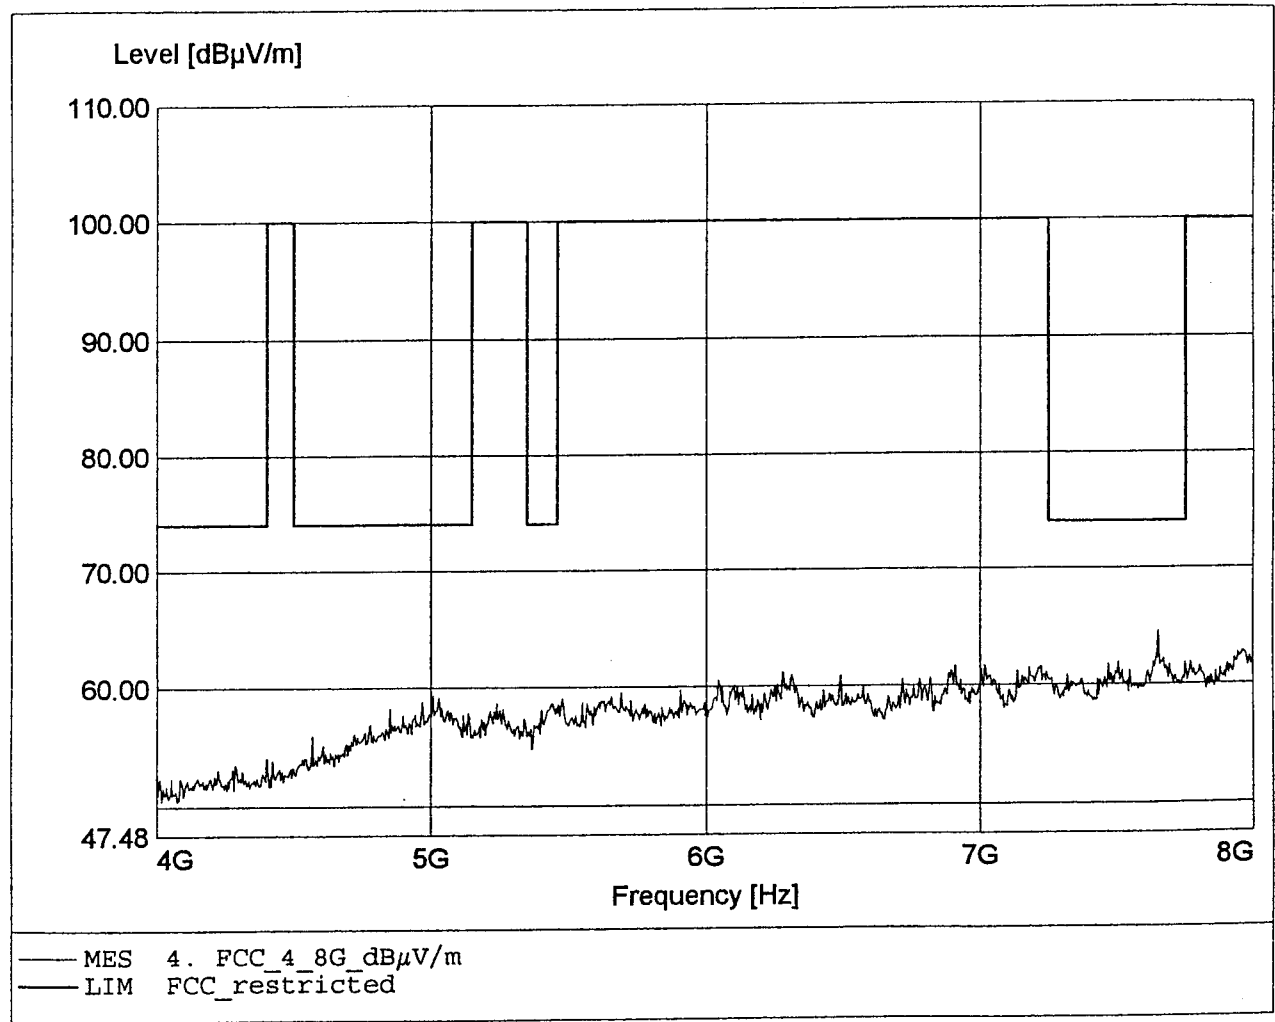

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:17555,55MHz Pmax:49,17dBμV/m

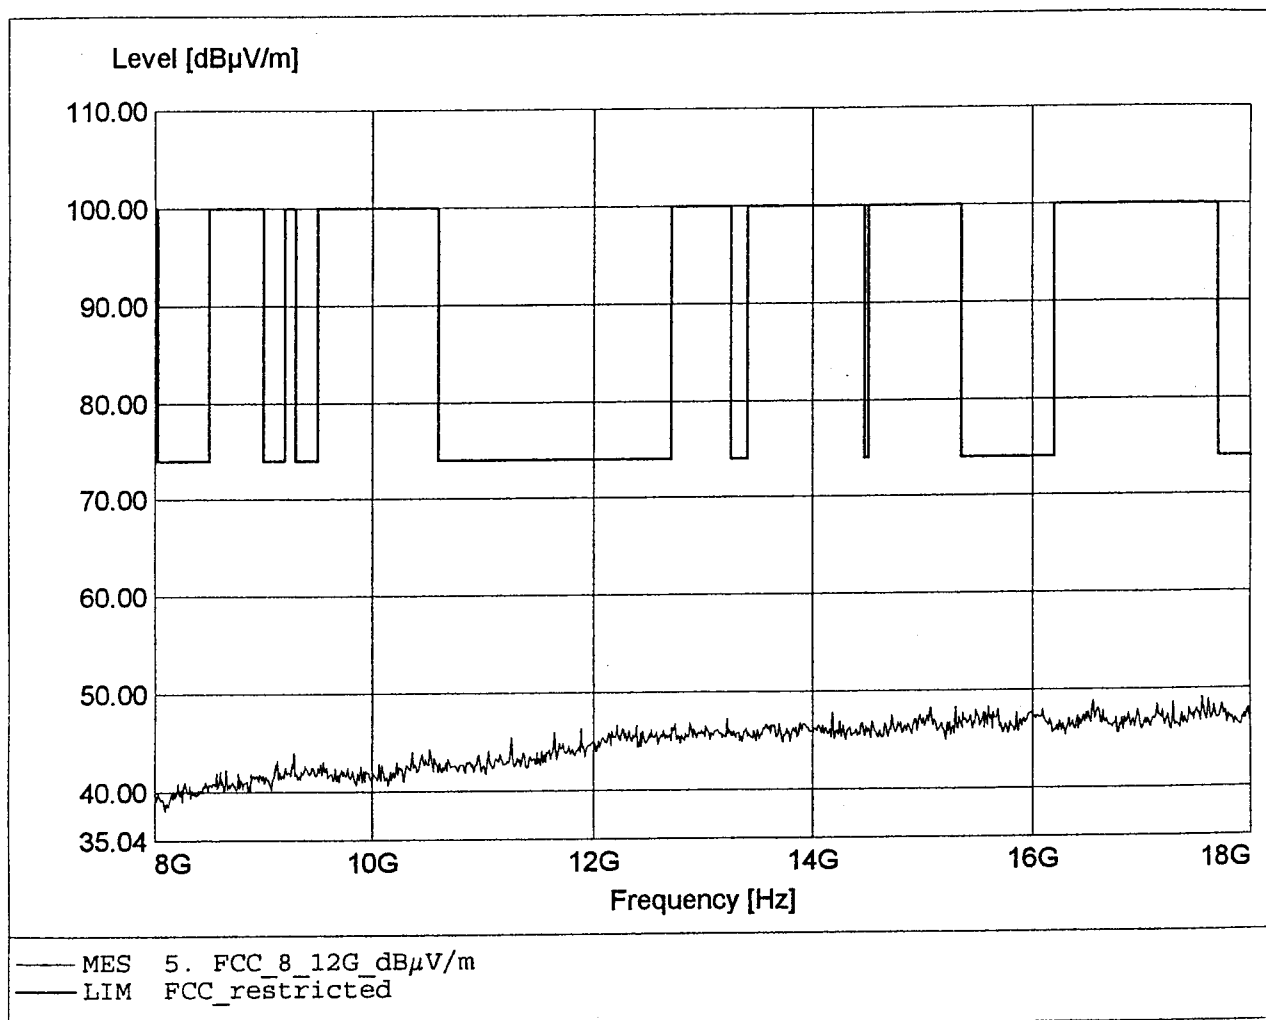

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:16033,33MHz Pmax:48,67dBμV/m

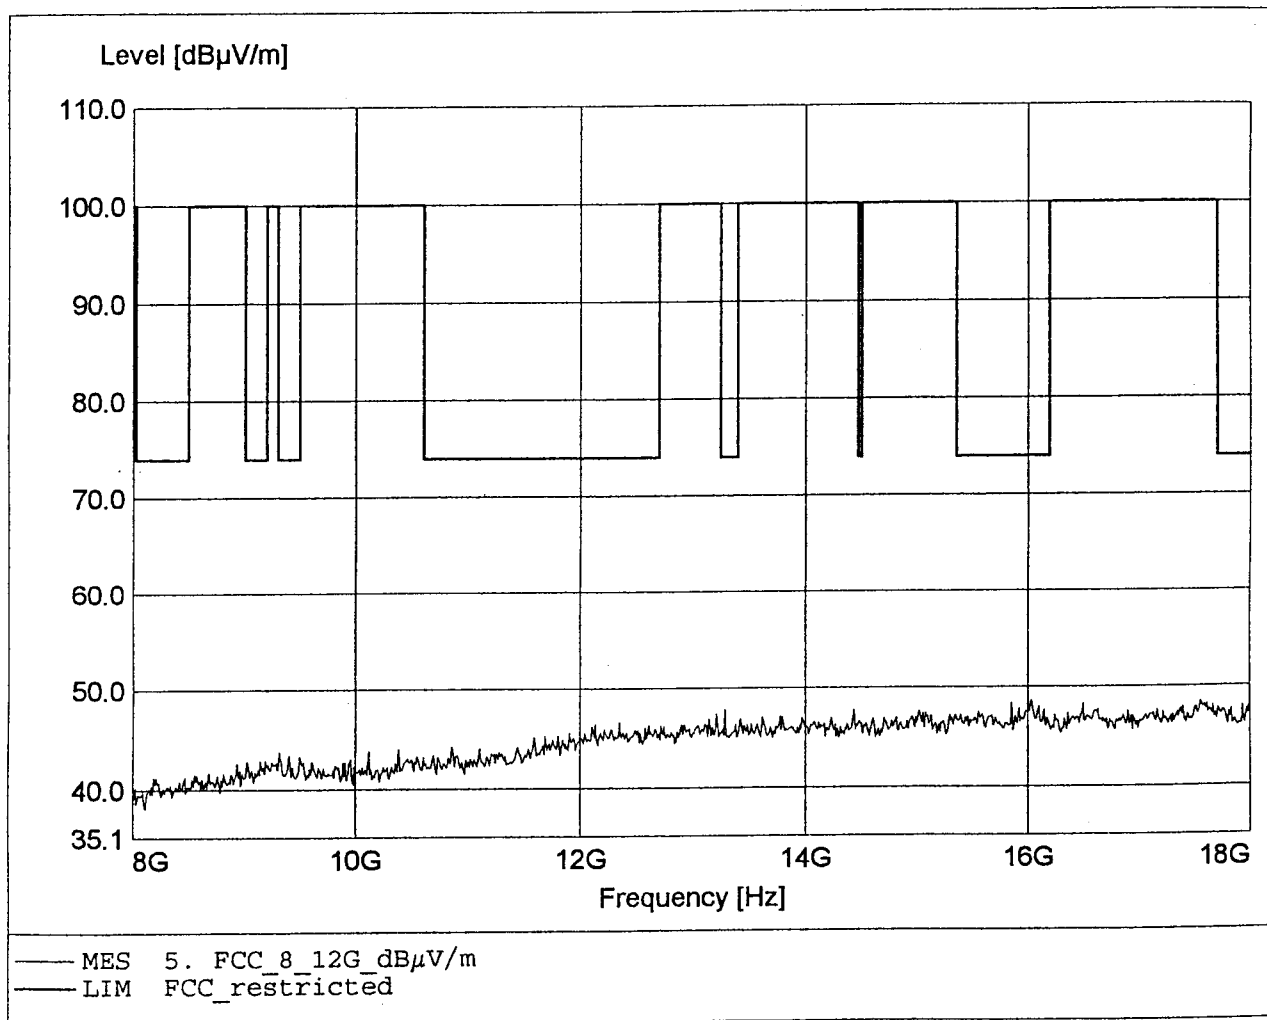

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26226,06MHz Pmax:60,6dBμV/m

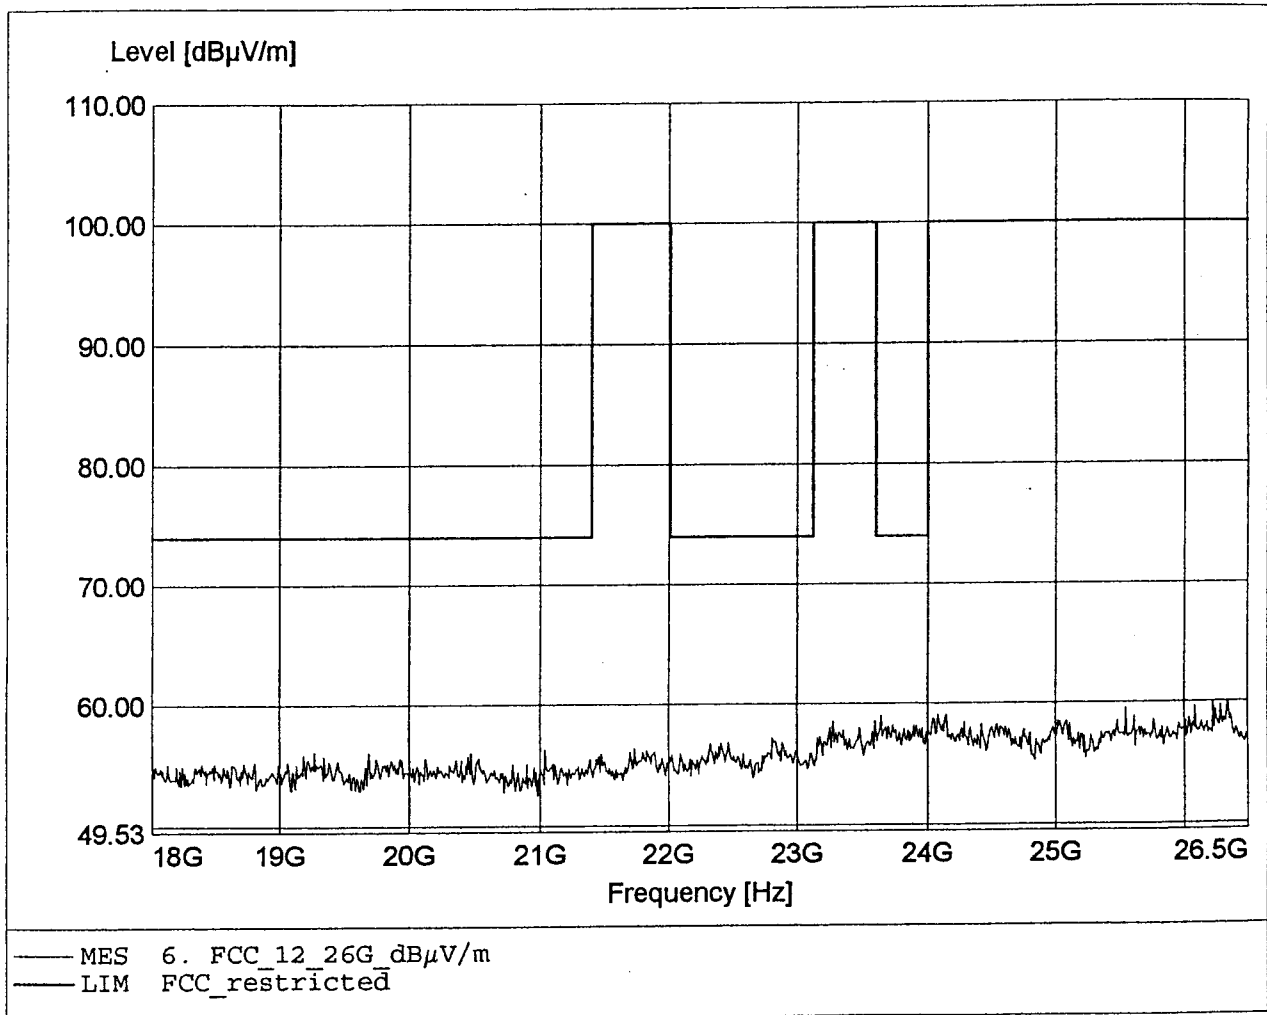

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:40 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26273,06MHz Pmax:60,6dBμV/m

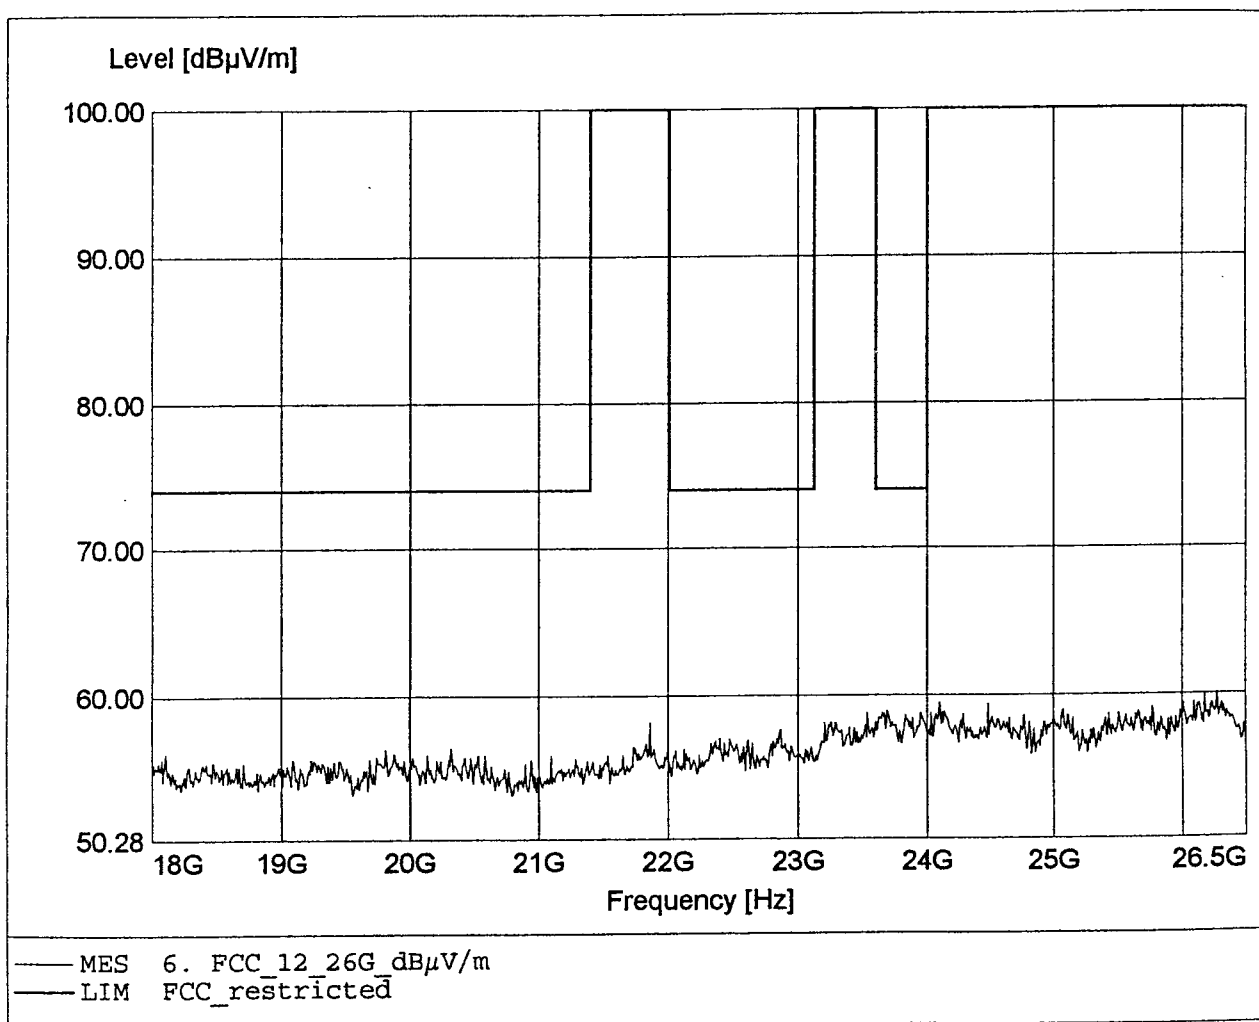

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:25,38MHz Pmax:28,54dBμV/m

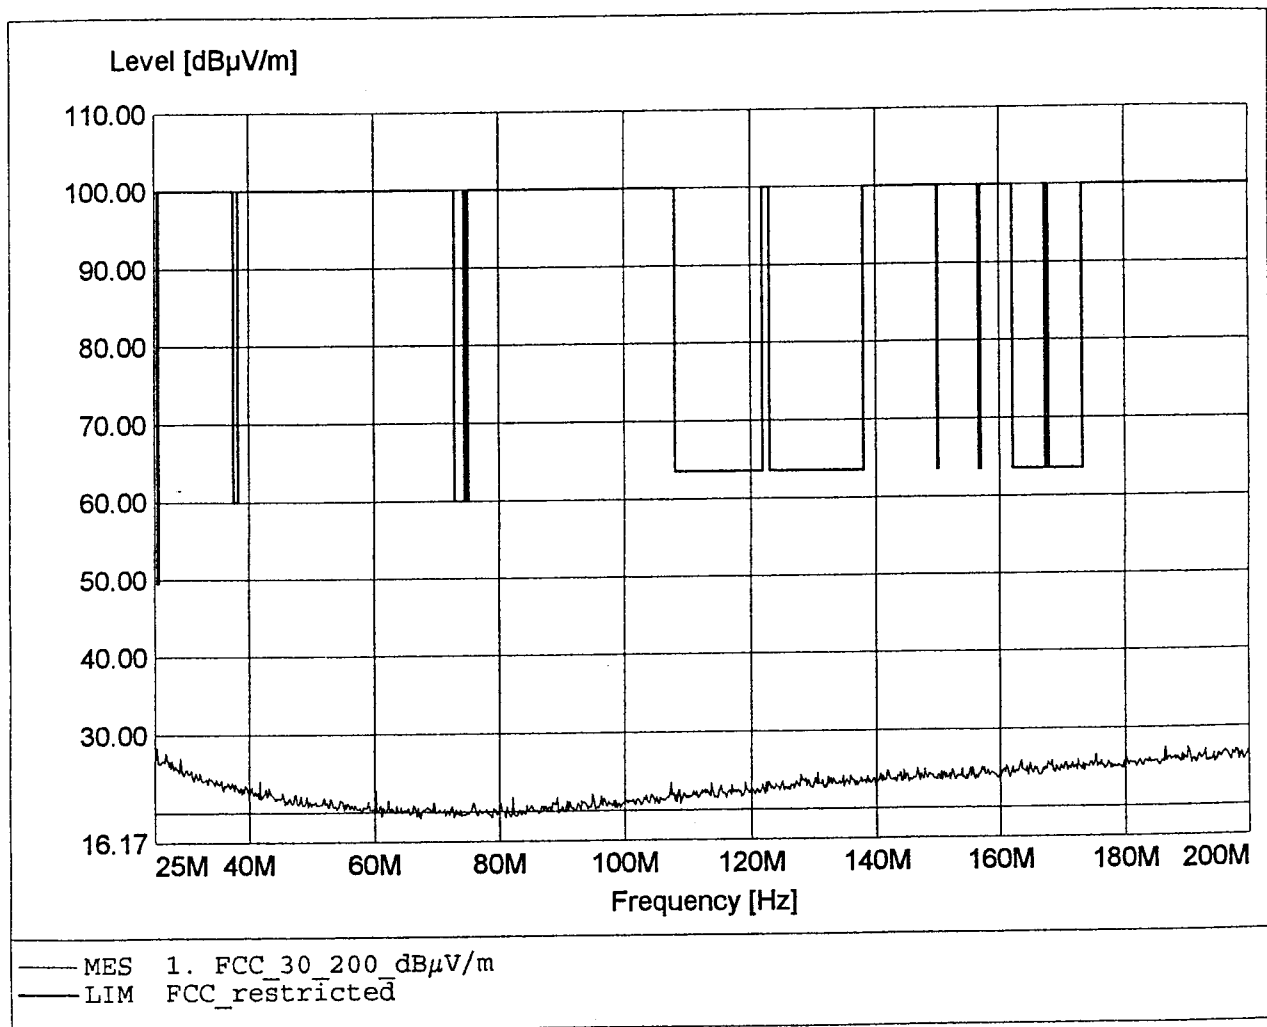

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:187,16MHz Pmax:27,13dBμV/m

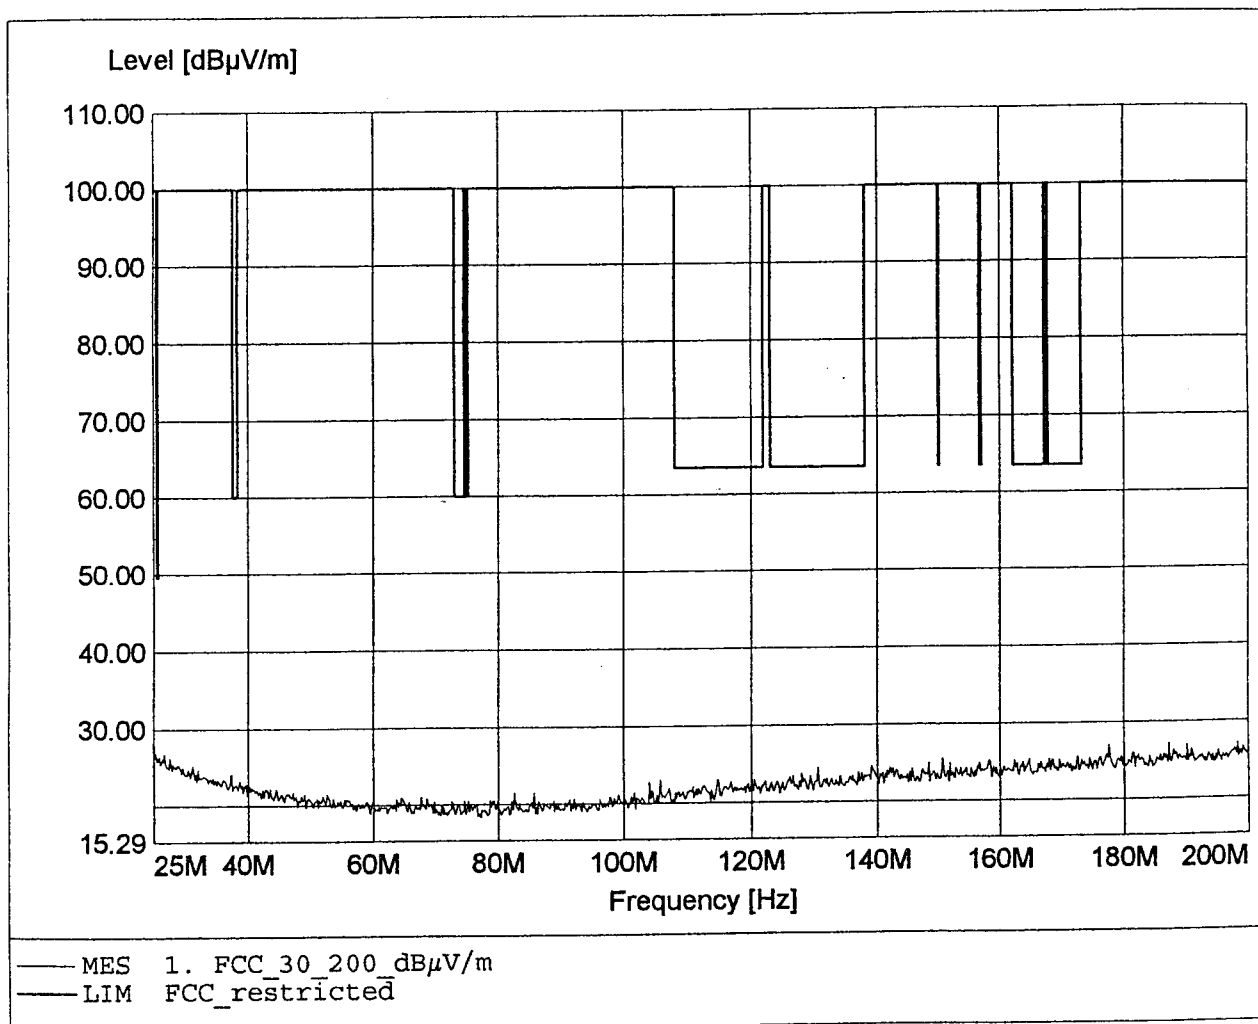

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:979,55MHz Pmax:35,58dBμV/m

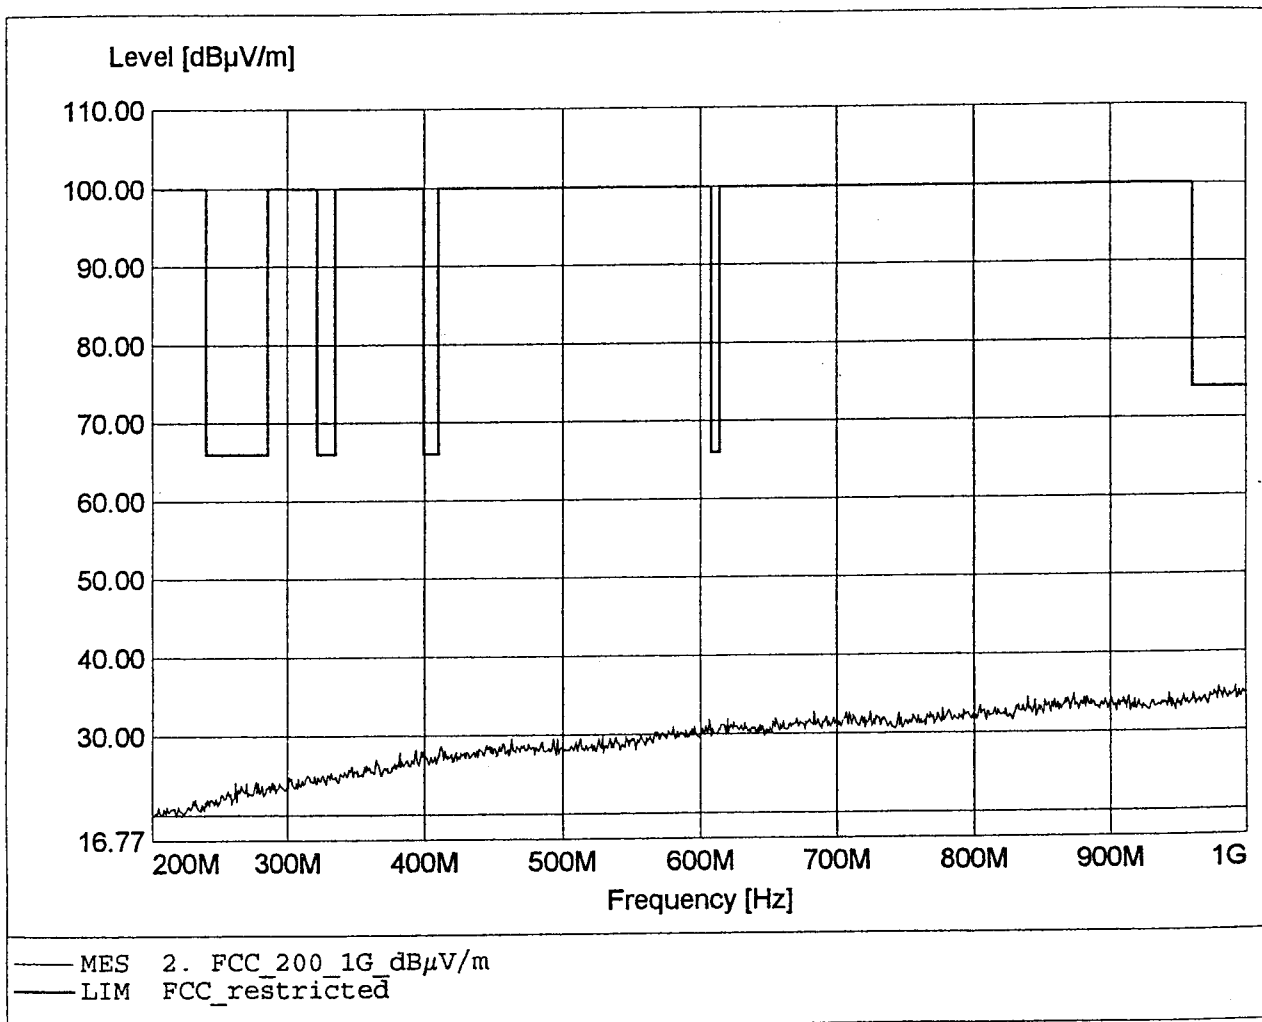

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:855,99MHz Pmax:35,50dBμV/m

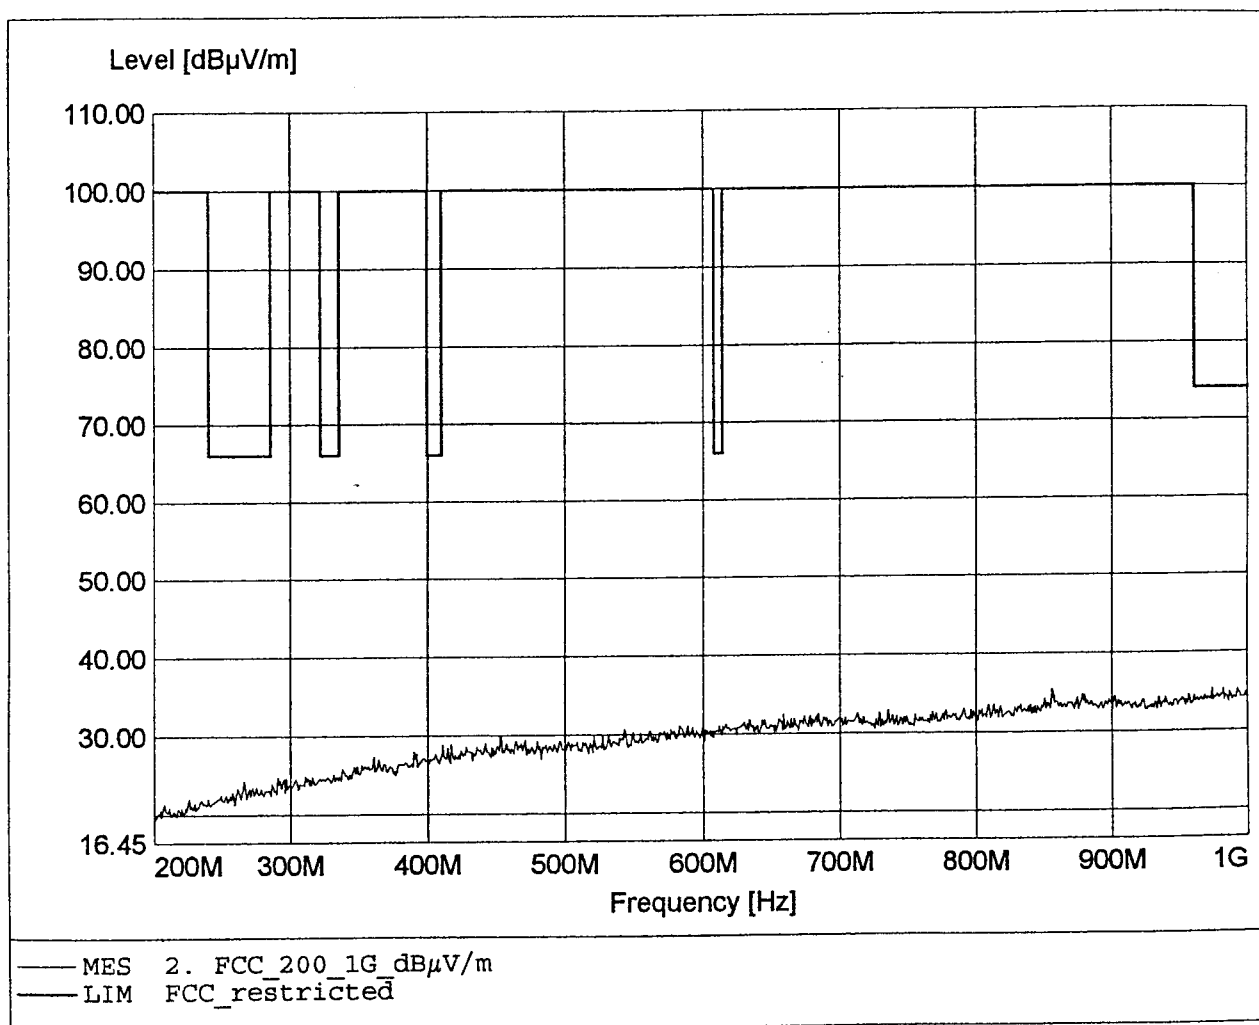

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2483,33MHz Pmax:111,64dBμV/m

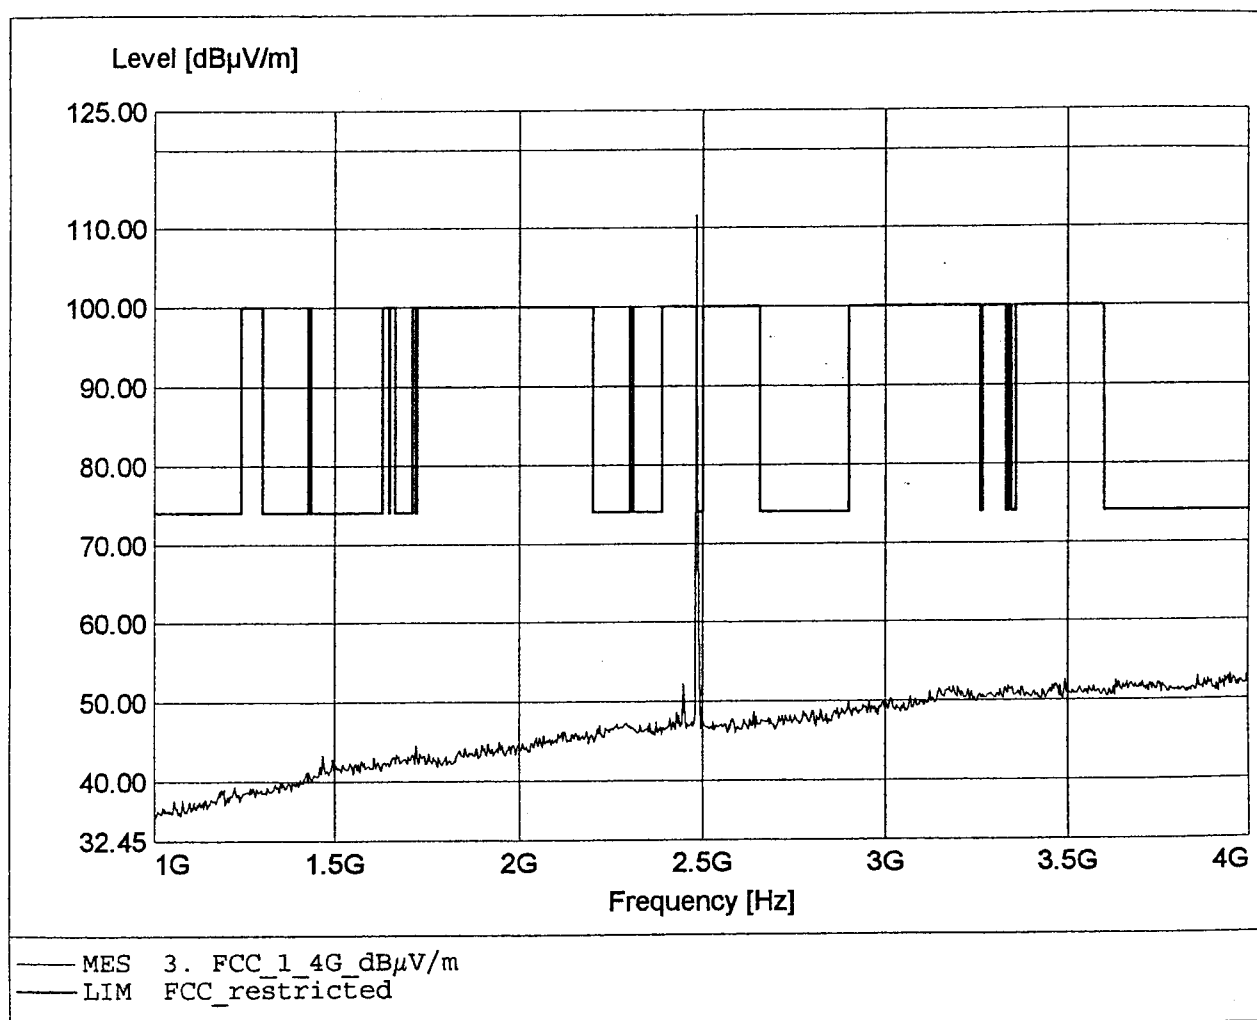

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2483,33MHz Pmax:107,96dBμV/m

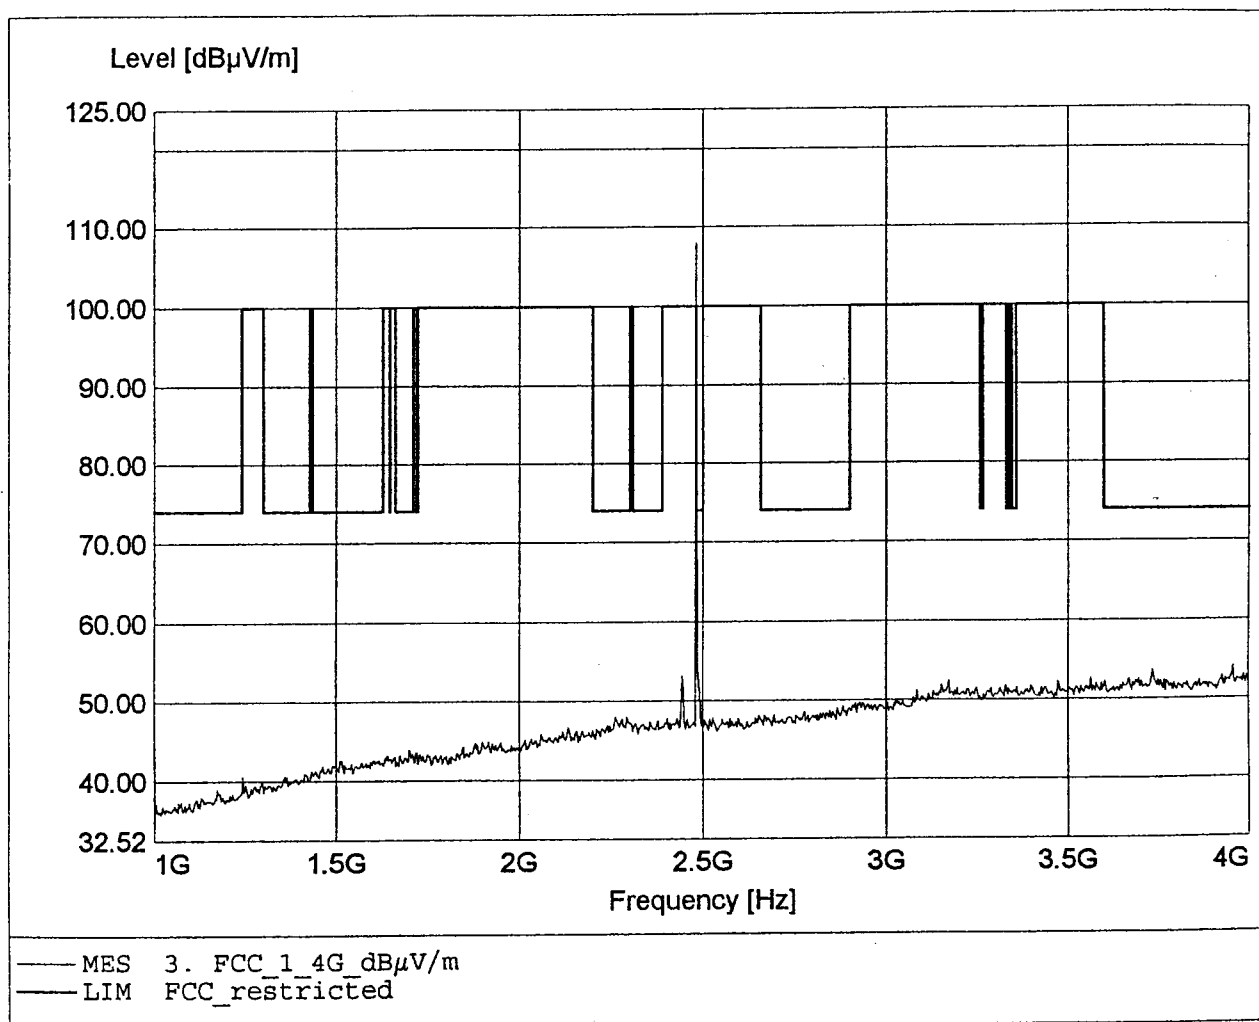

**Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRF 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7293,33MHz Pmax:65,63dBμV/m

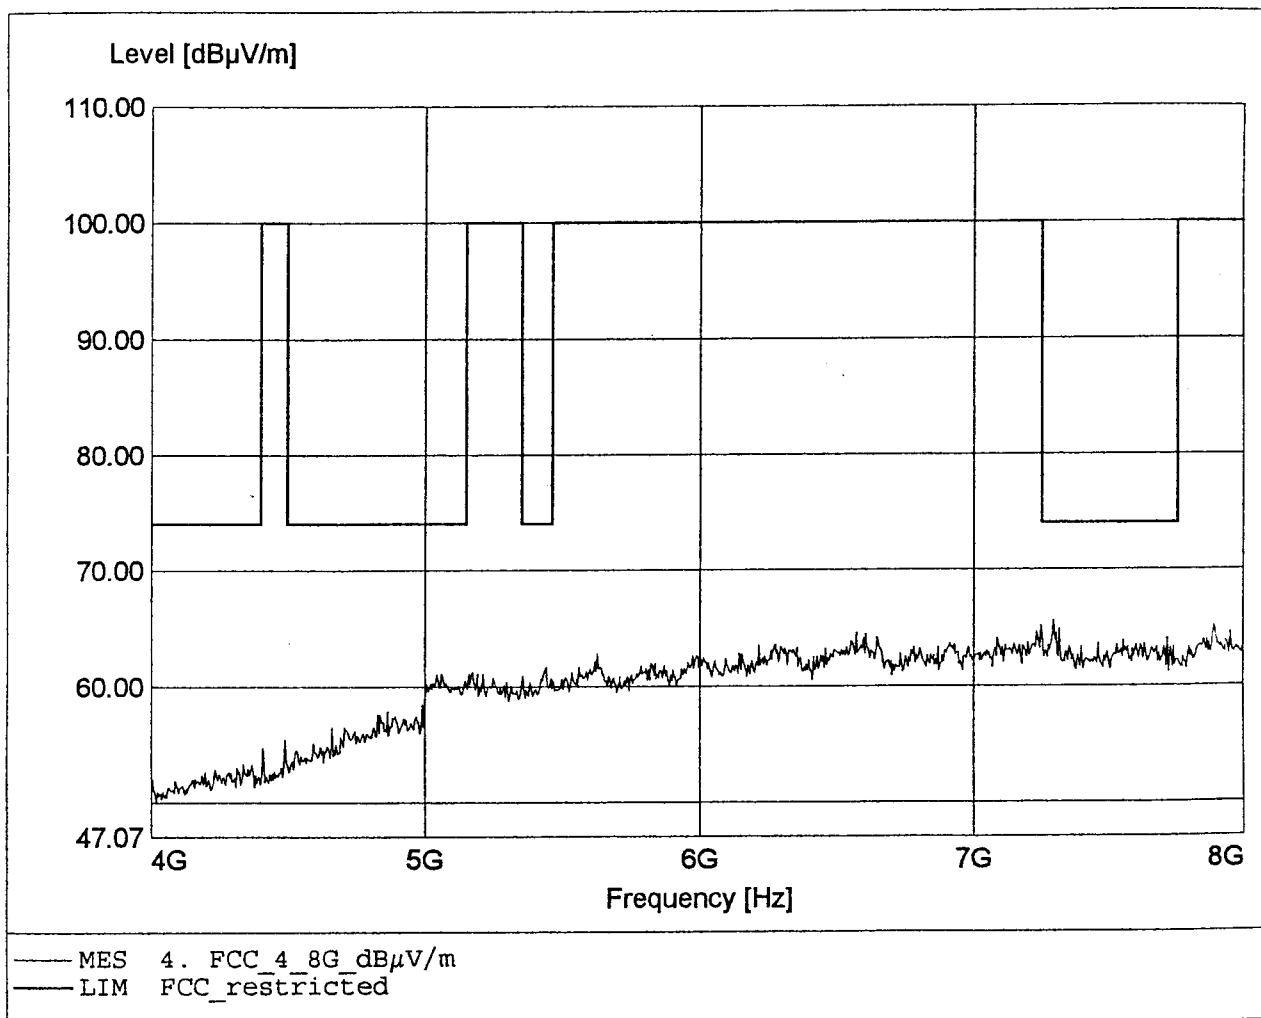

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:7444,44MHz Pmax:64,94dBμV/m

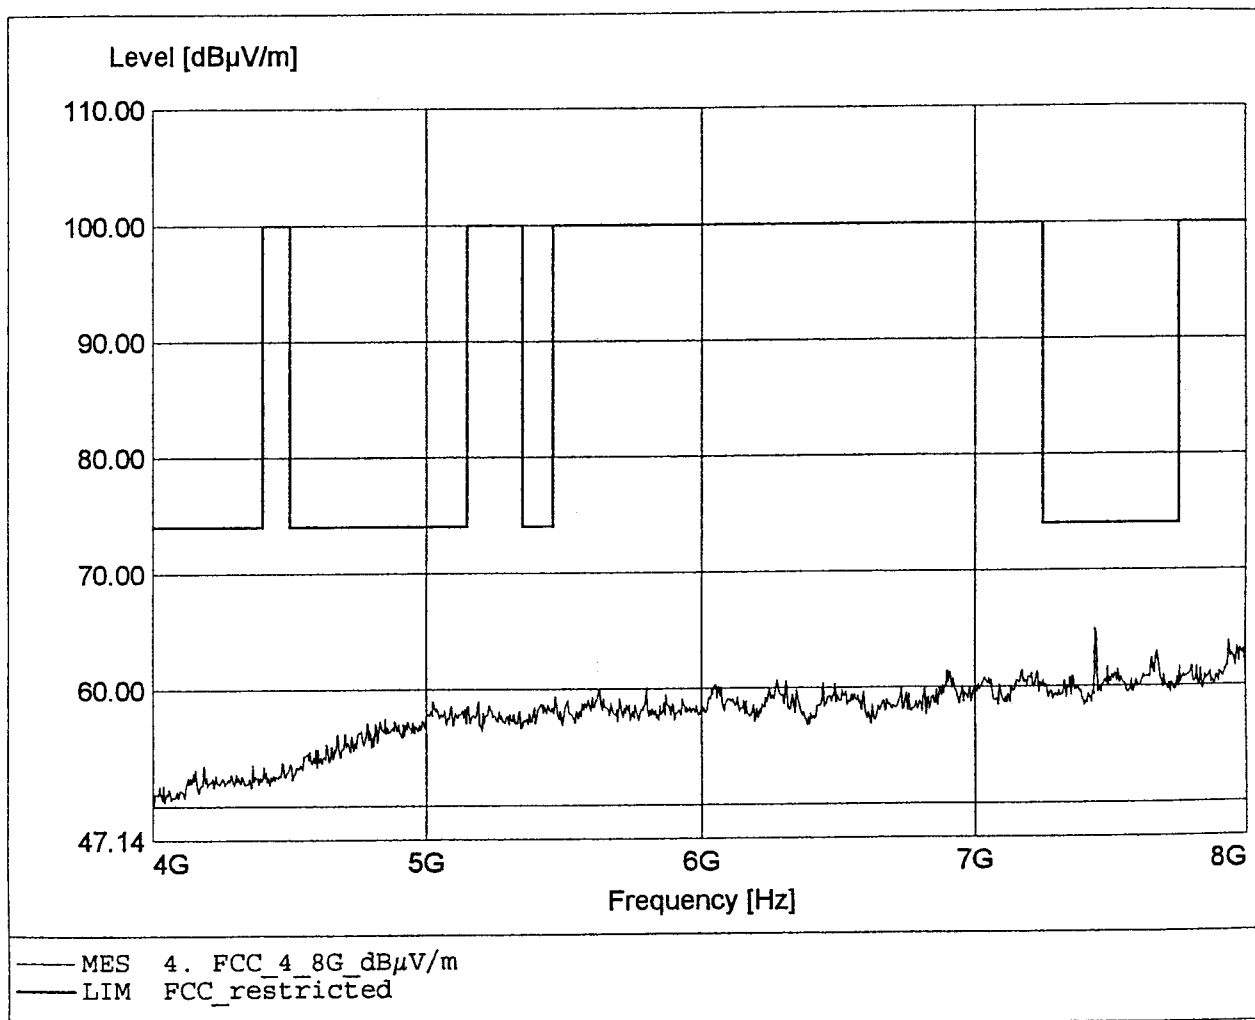

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:9922,22MHz Pmax:47,87dBμV/m

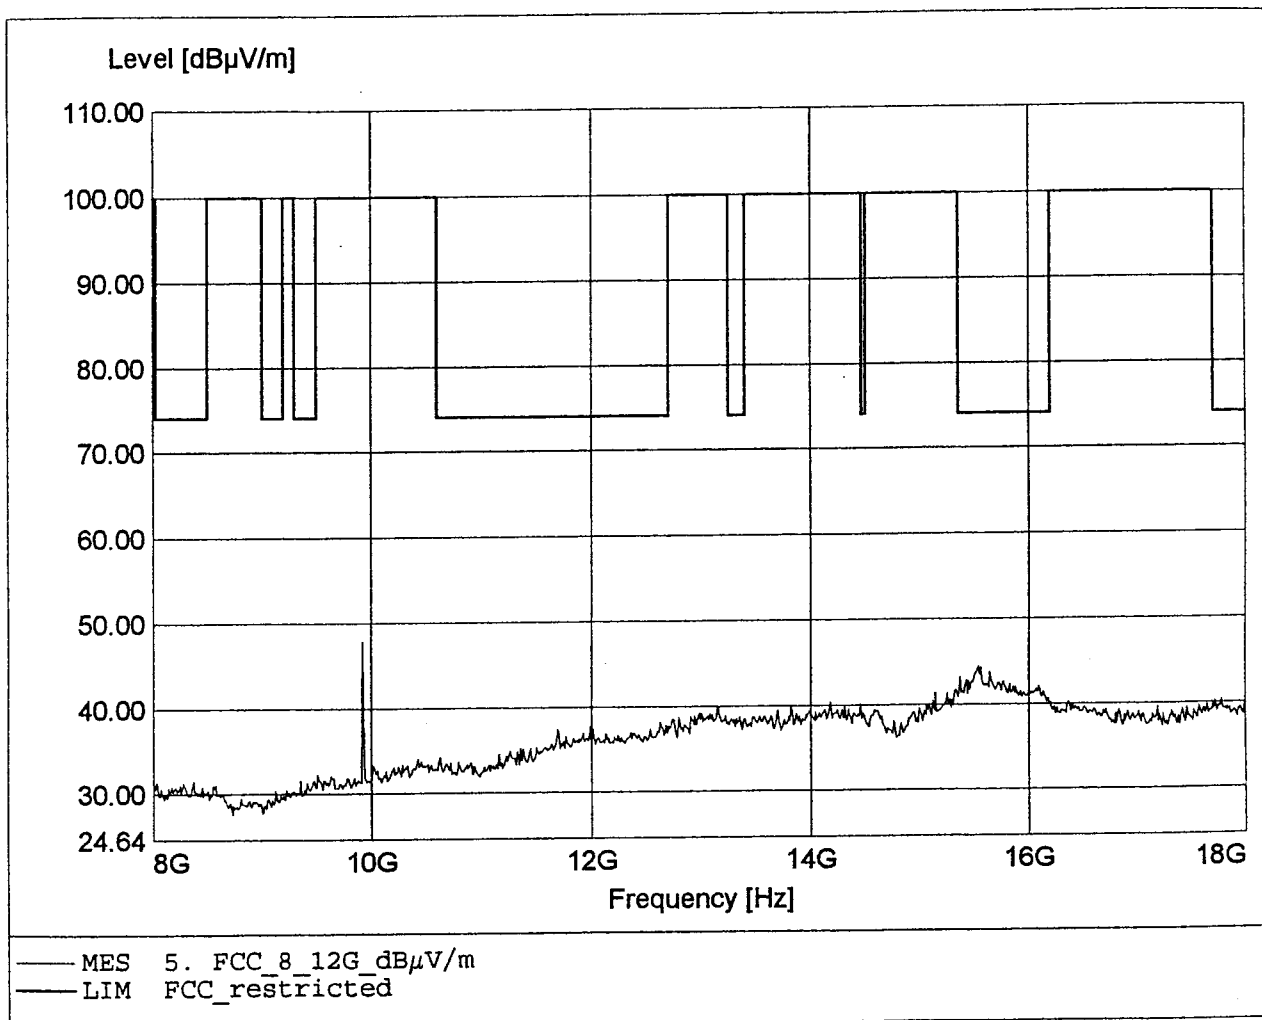

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:15522,22MHz Pmax:44,47dBμV/m

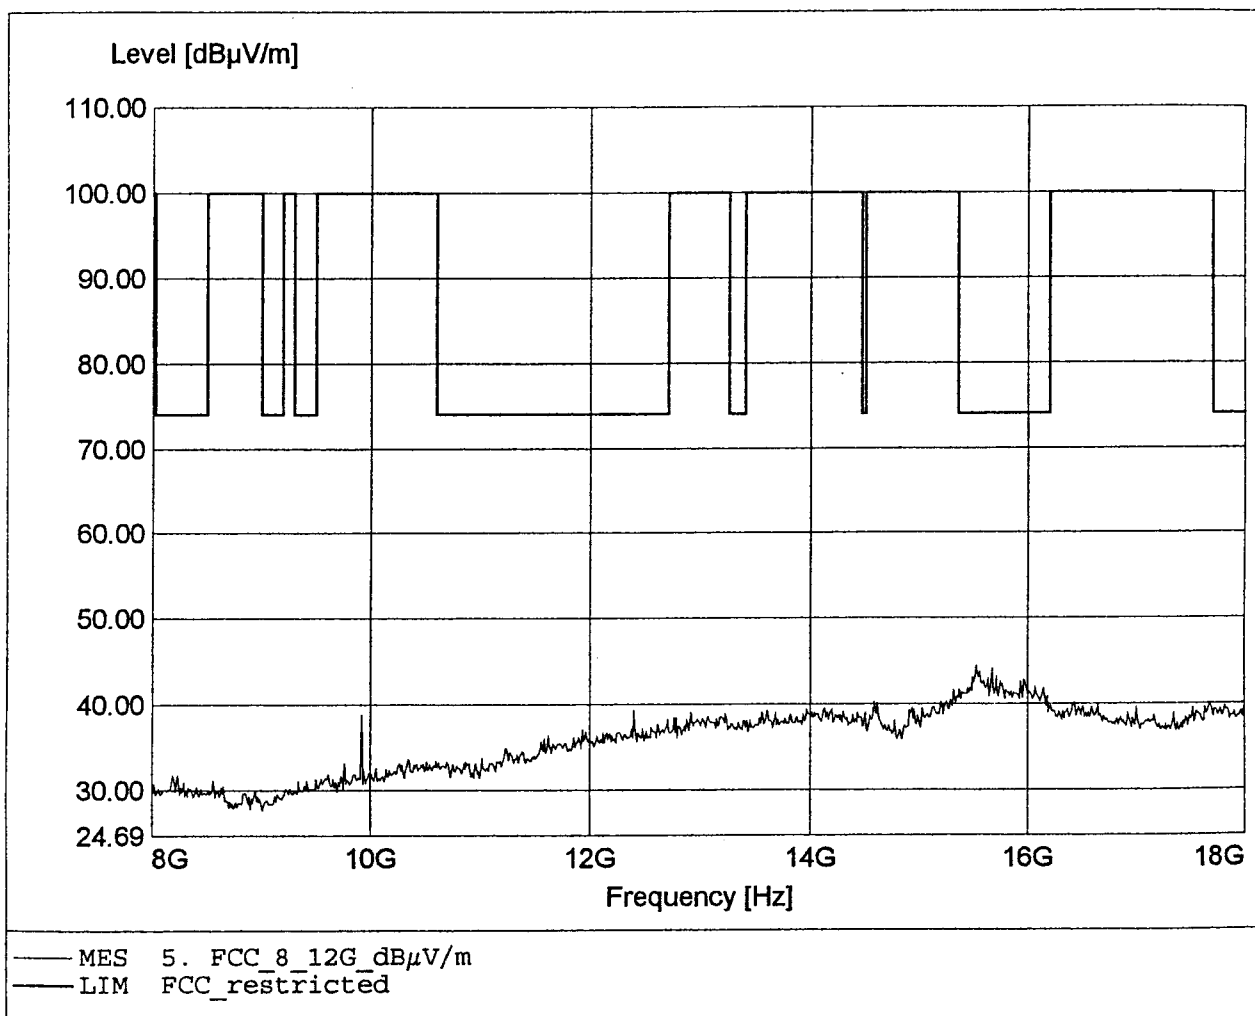

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:26311,11MHz Pmax:61,90dBμV/m

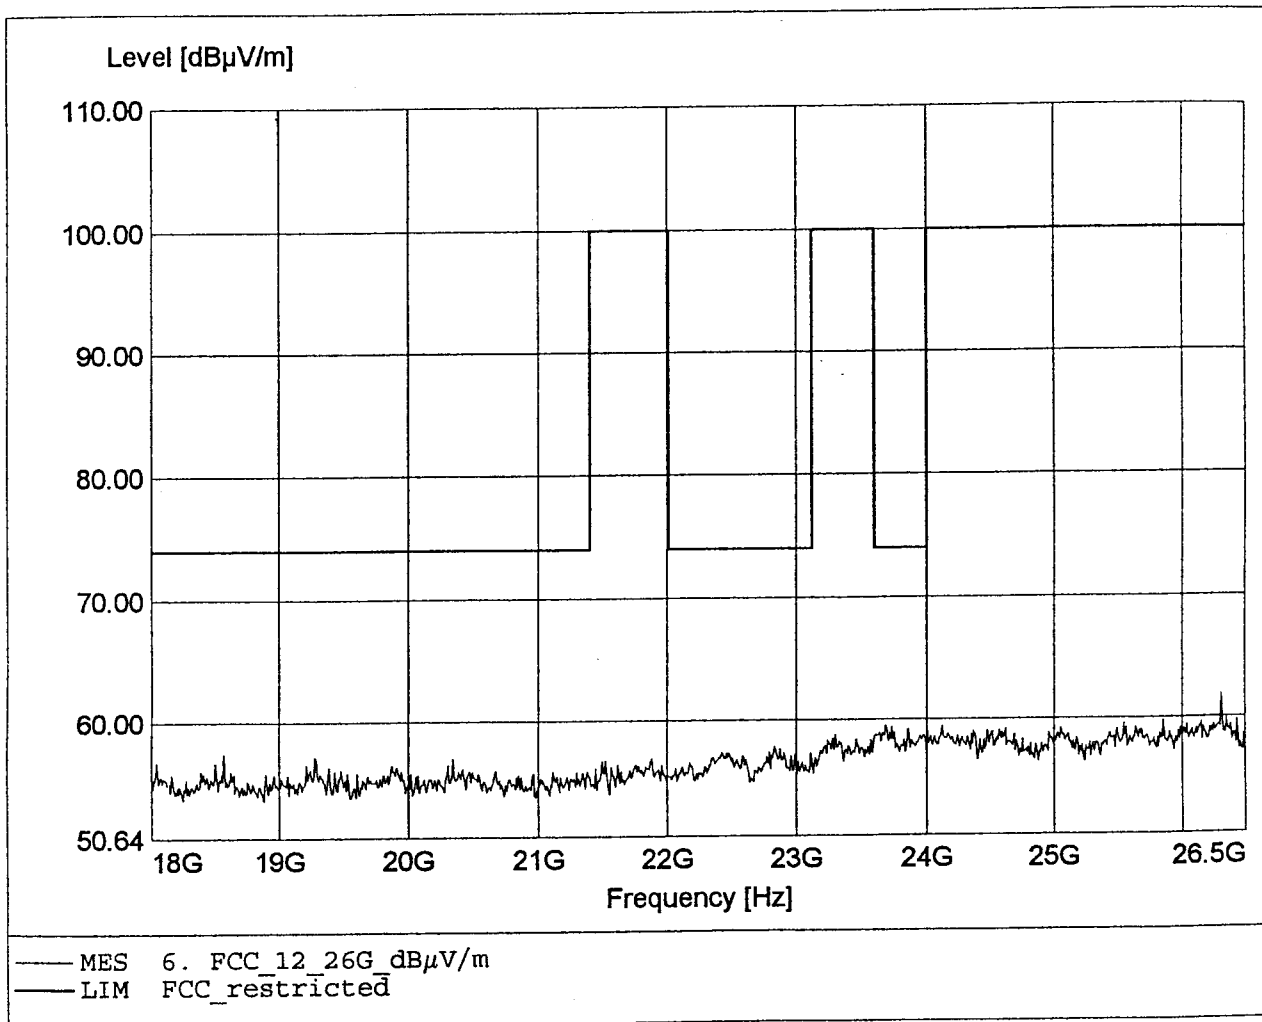

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:1 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq:24129,44MHz Pmax:60,16dBμV/m

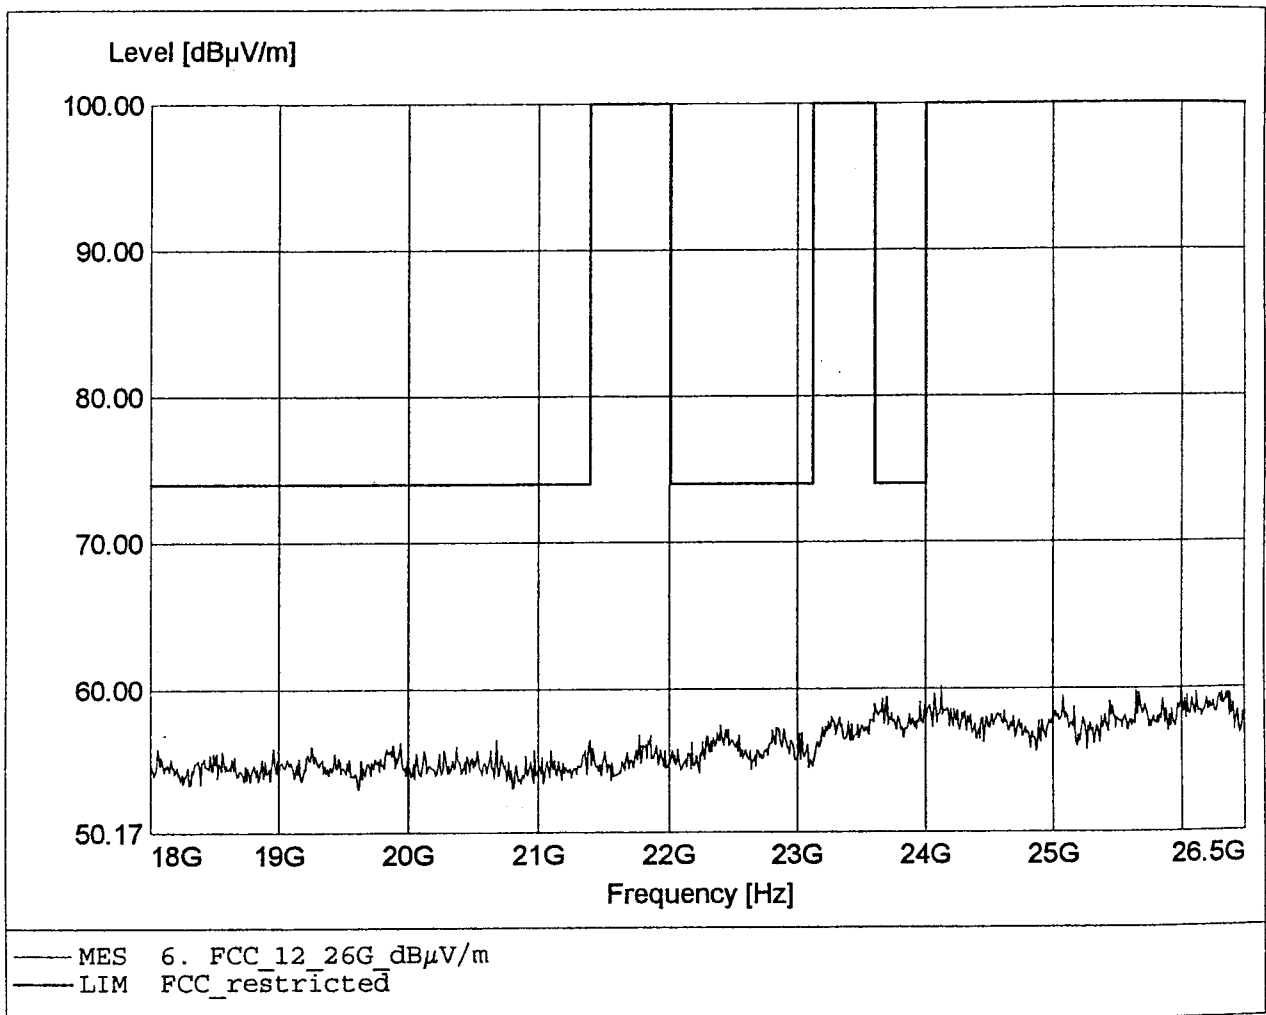

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFPP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:191,05MHz Pmax:27,68dBμV/m

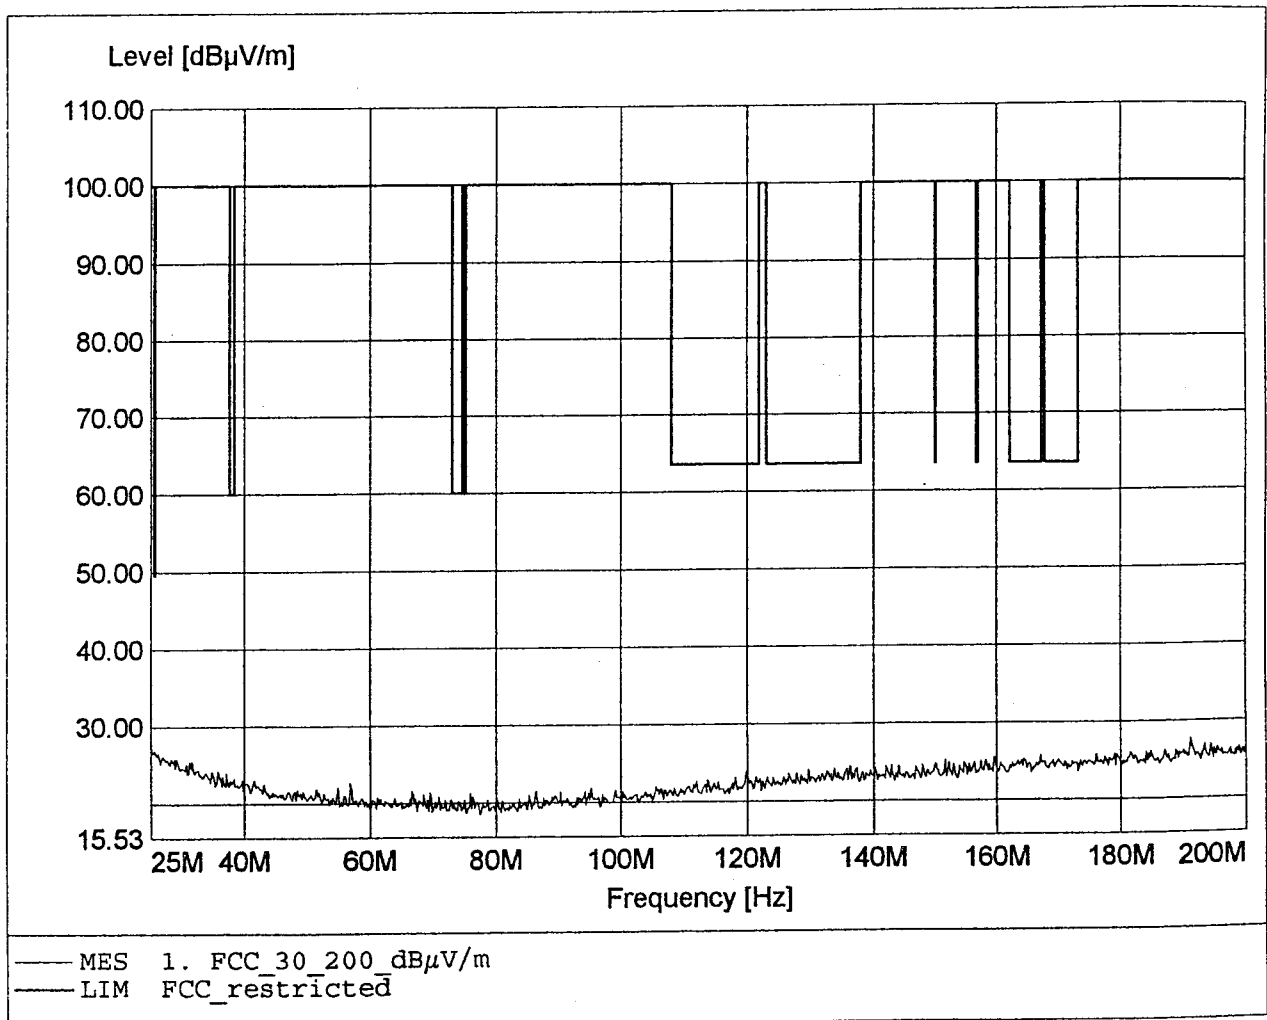

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:84,30MHz Pmax:30,10dBμV/m

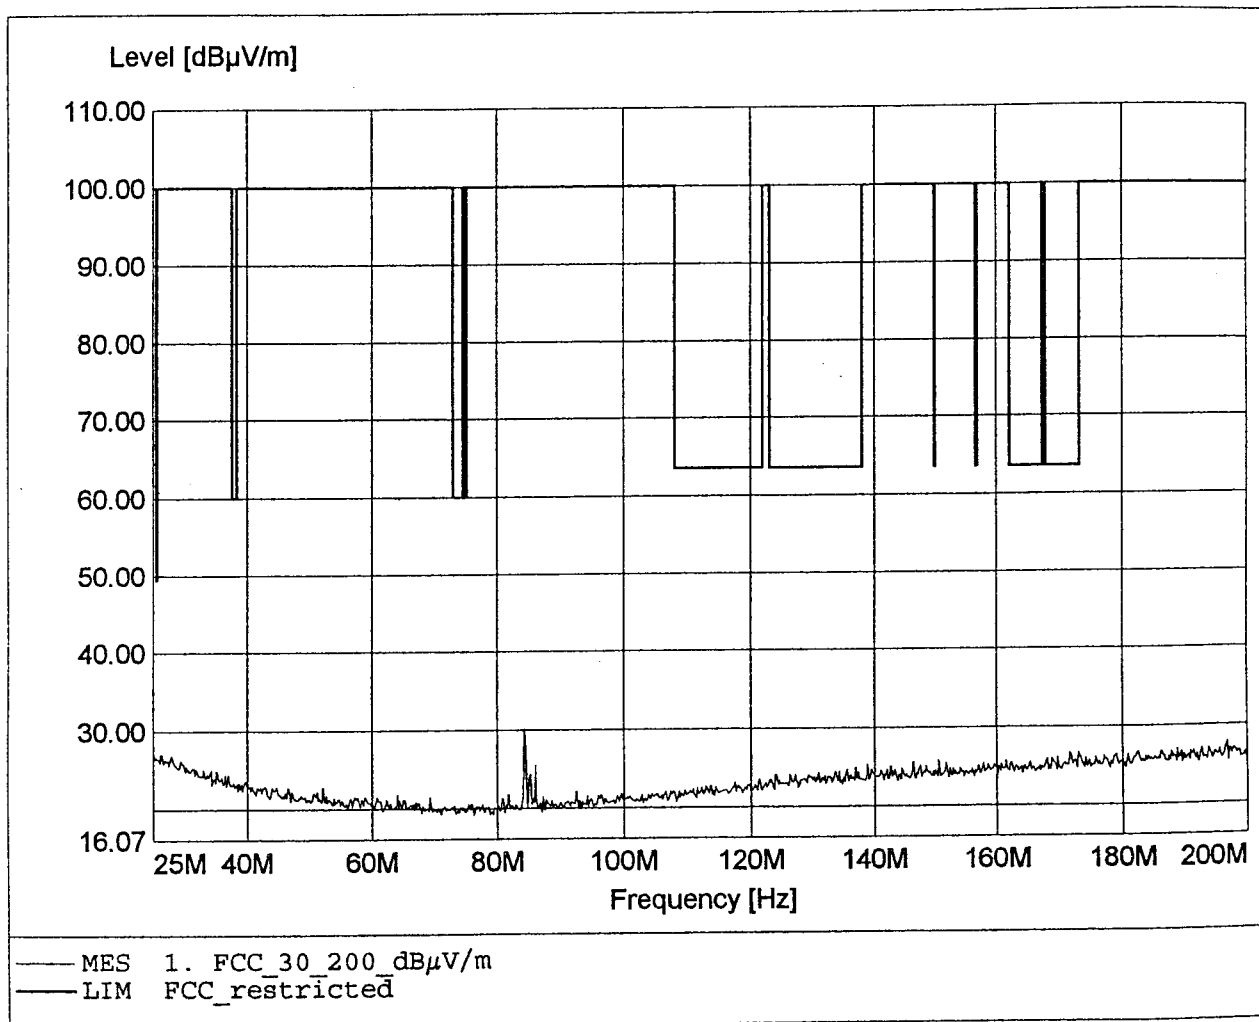

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:847,04MHz Pmax:35,4dBμV/m RBW:100KHz

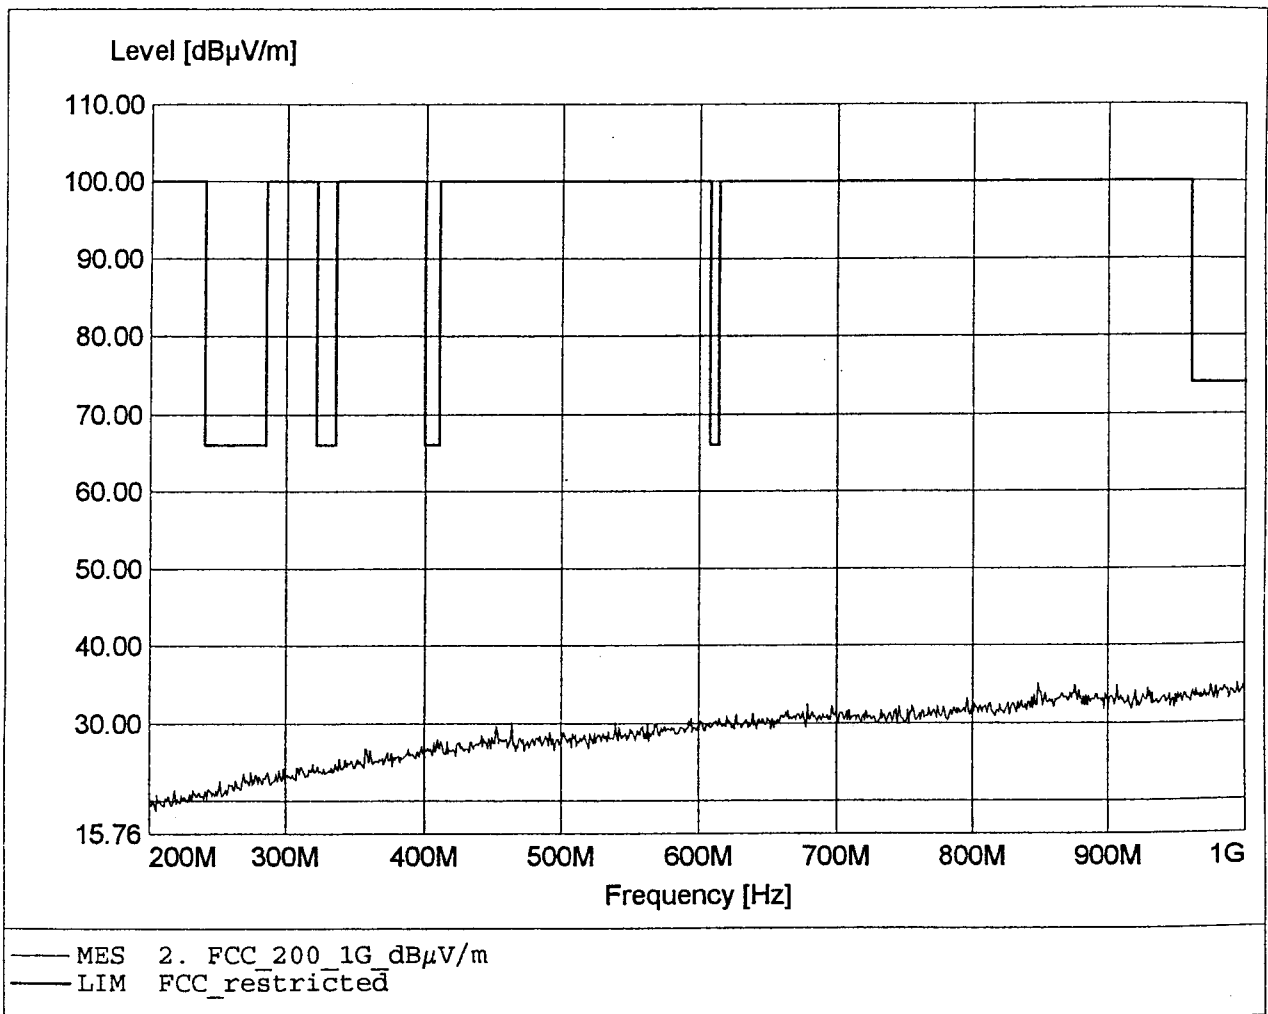

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRF 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S

Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq:994,66MHz Pmax:35,65dBμV/m

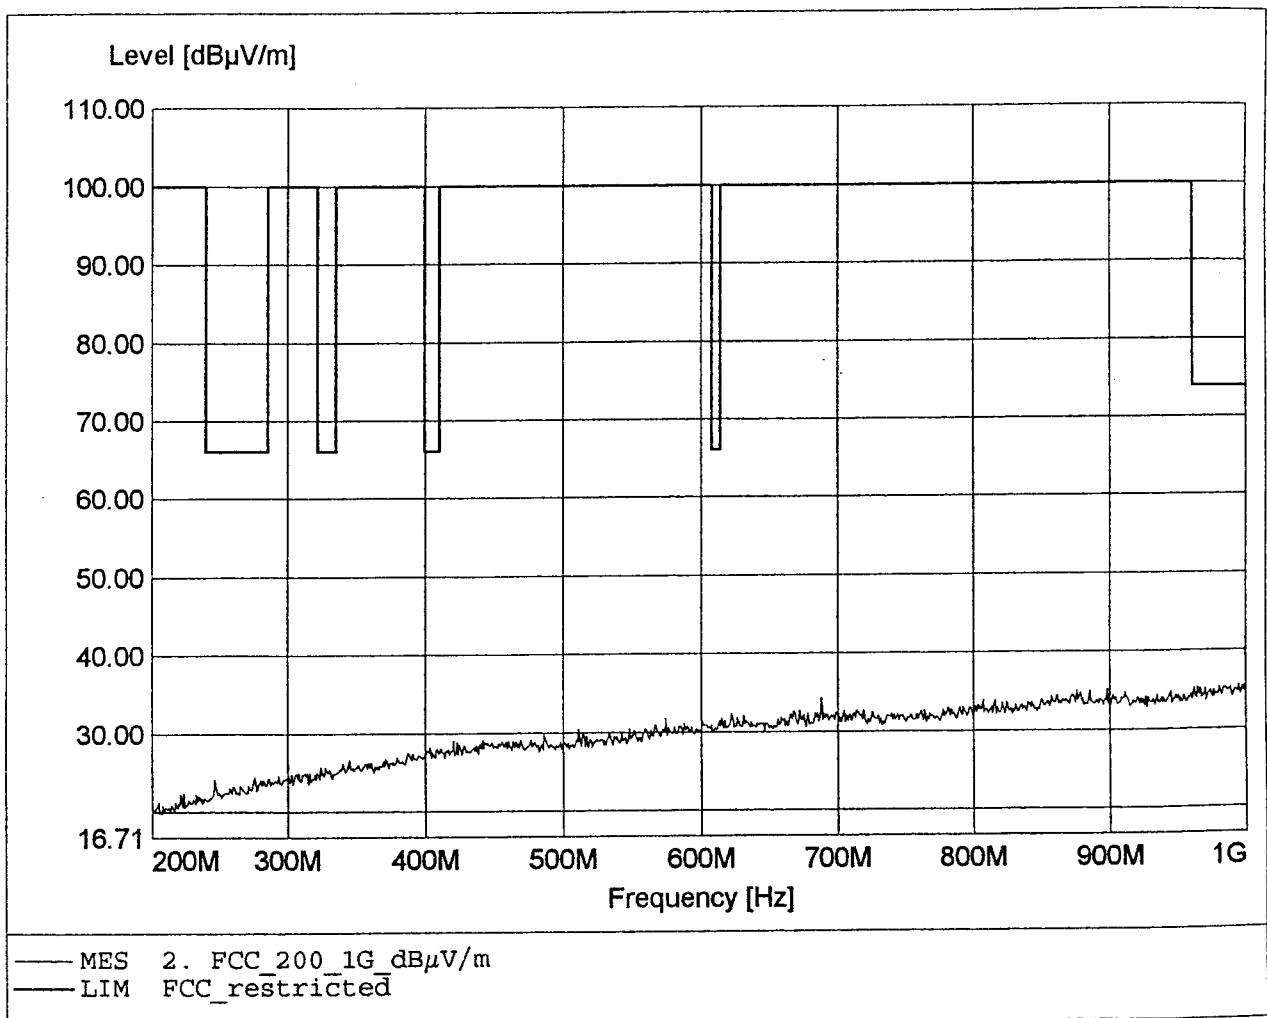

Spurious emissions (Field Strength Tx)
FCC RULES PART 15, SUBPART C)

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)
Manufacturer: Kirk Telecom A/S

Test Site / Operator: ETS / Mr. Matz
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq:2483,33MHz Pmax:113,55dBμV/m

