


**Spurious emissions (Field Strength Tx)  
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq:2483,33MHz Pmax:113,50dBμV/m

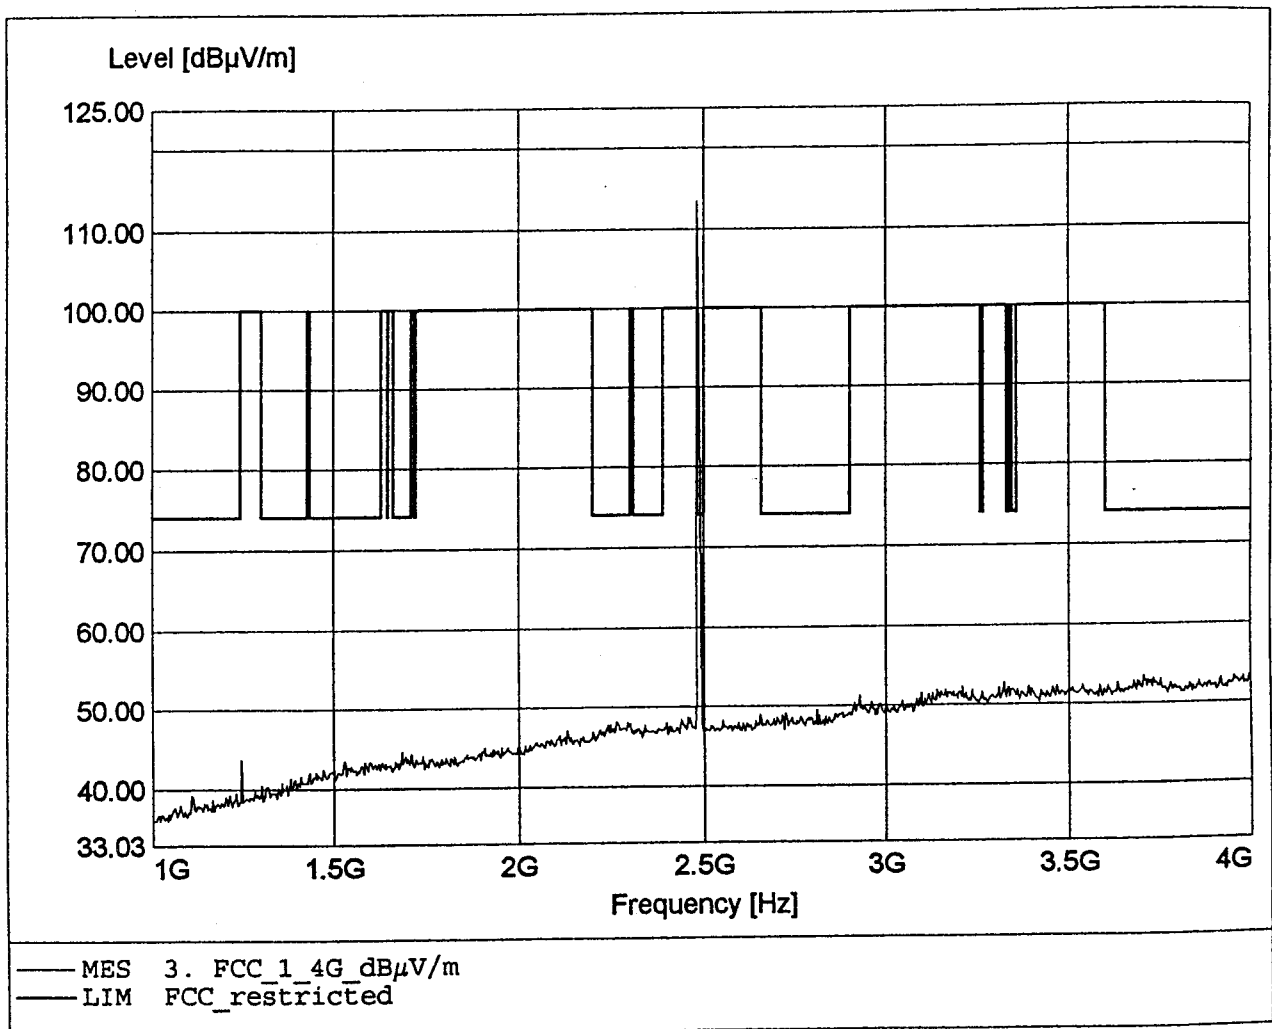

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:7955,55MHz Pmax:63,65dBµV/m

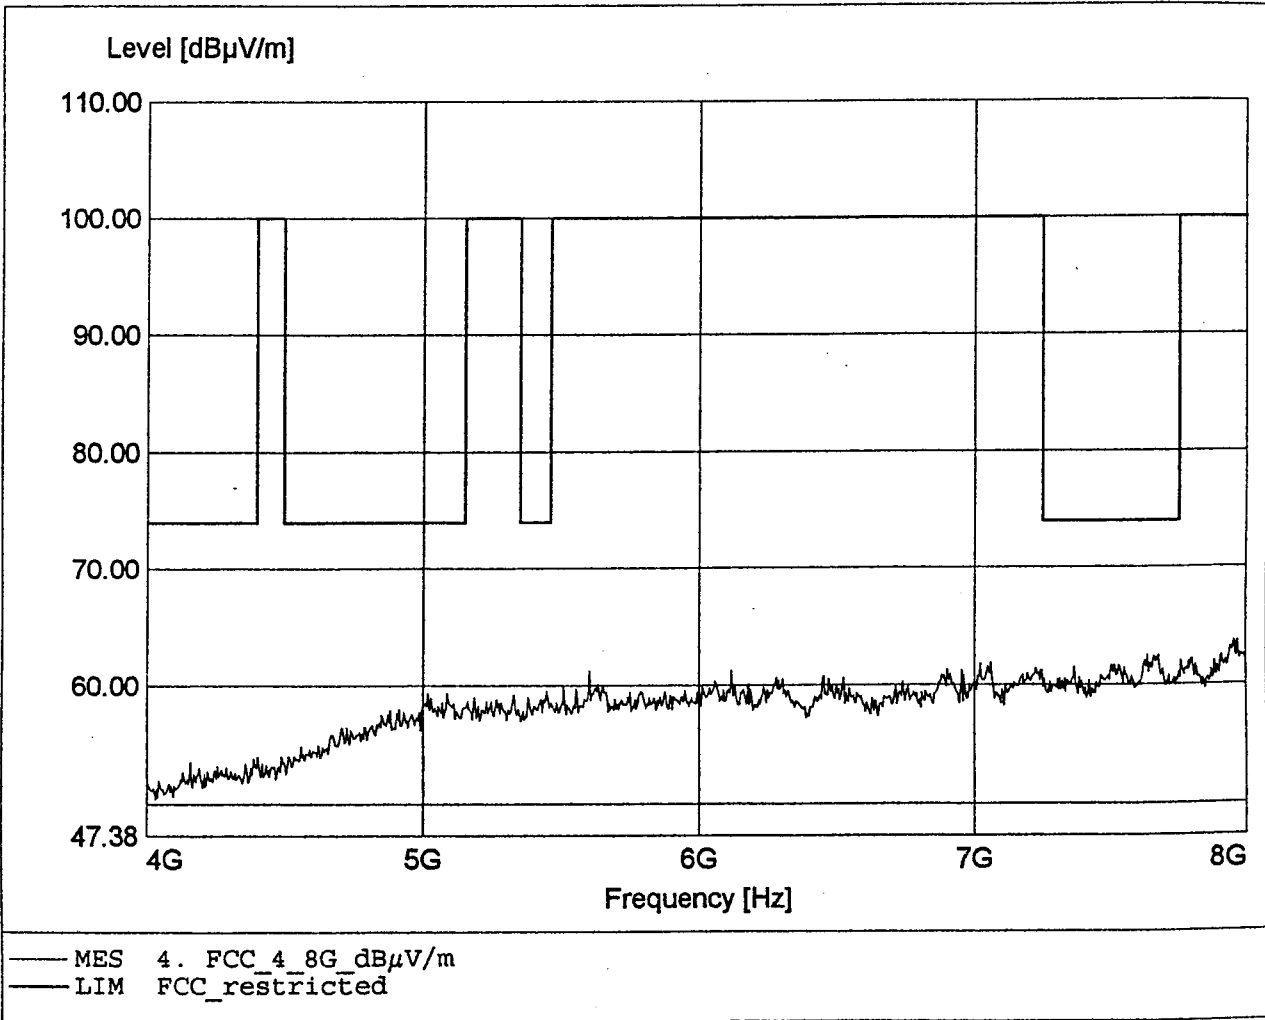

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:7968,88MHz Pmax:63,87dBµV/m

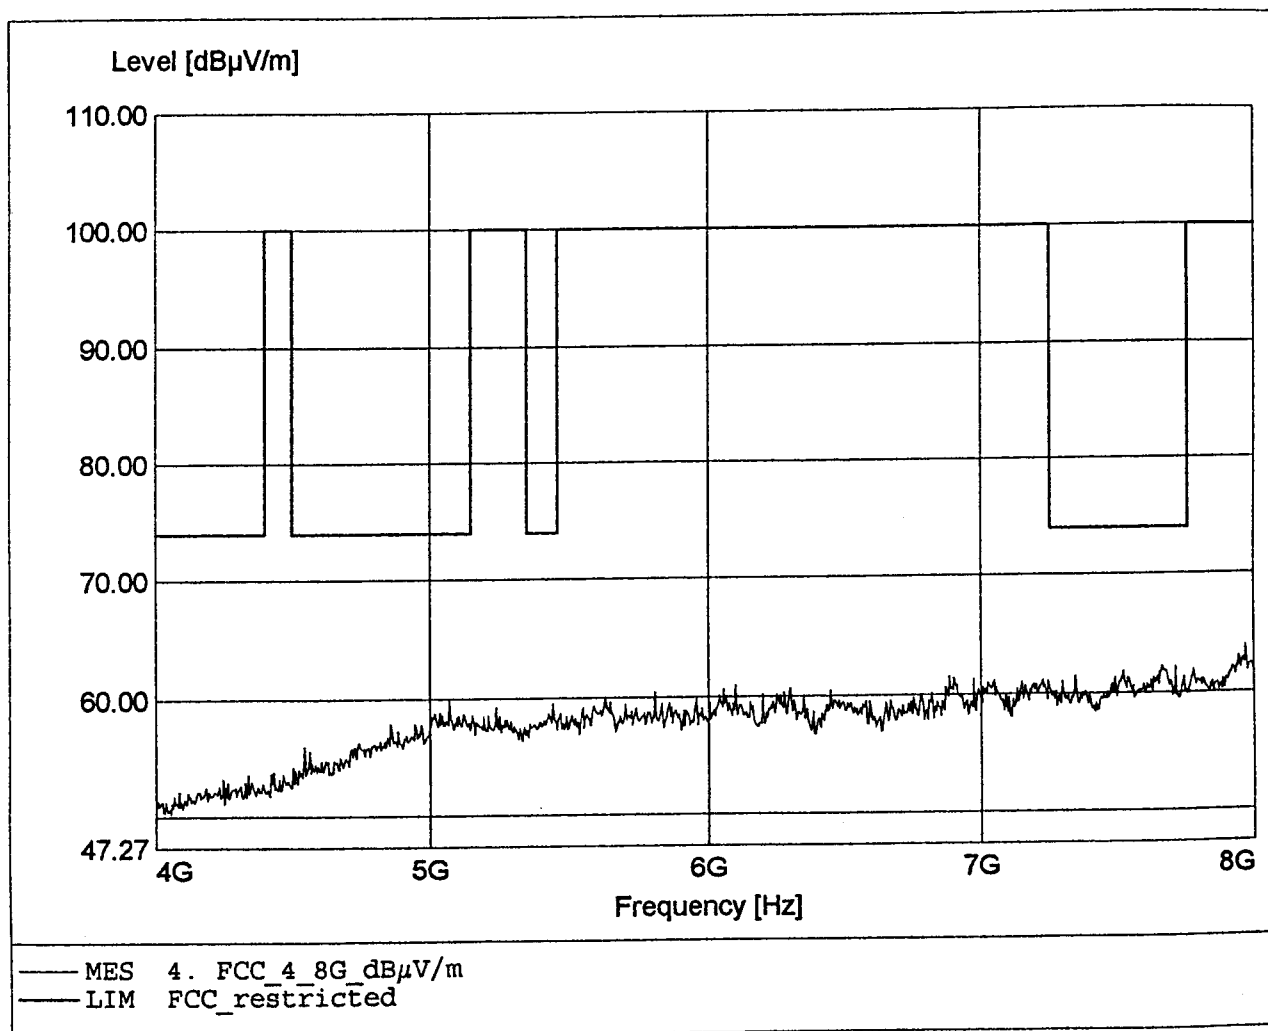

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:17655,55MHz Pmax:48,82dBμV/m

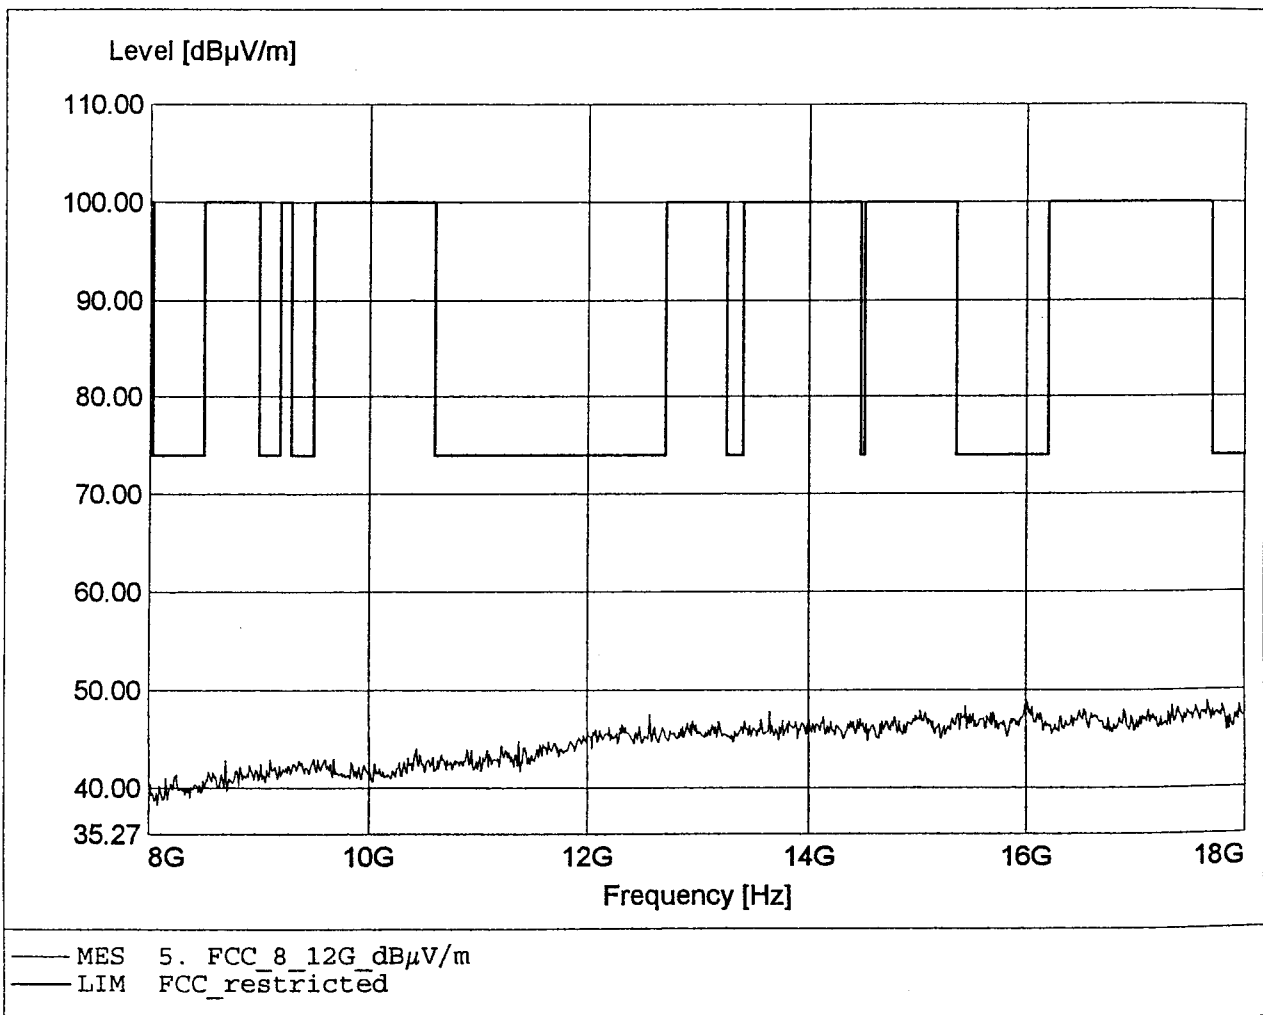

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:2 FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:17511,07MHz Pmax:49,7dBµV/m

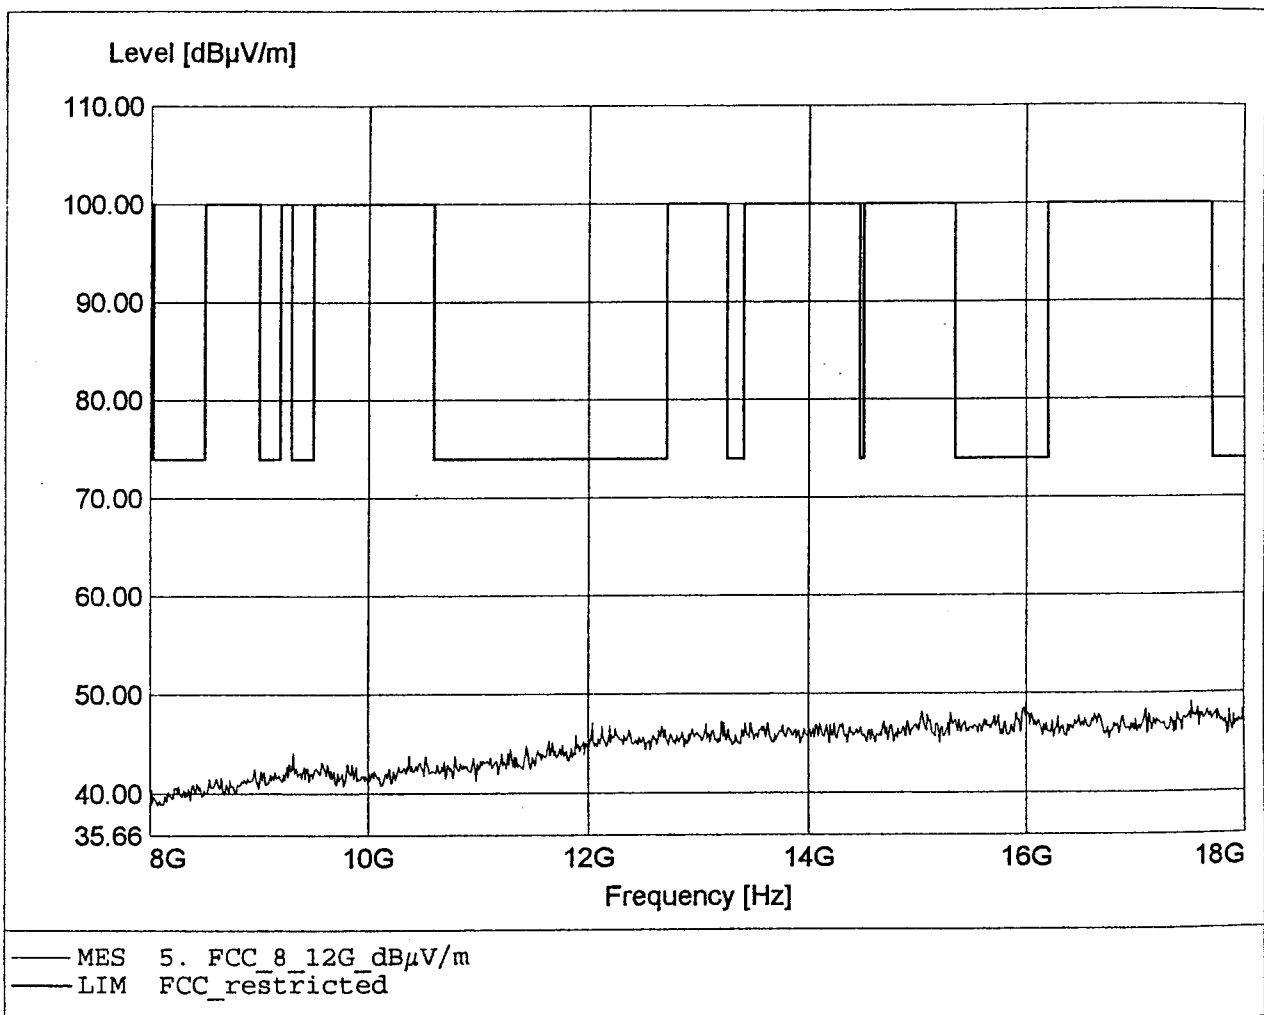

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:26292,22MHz Pmax:60,23dBμV/m

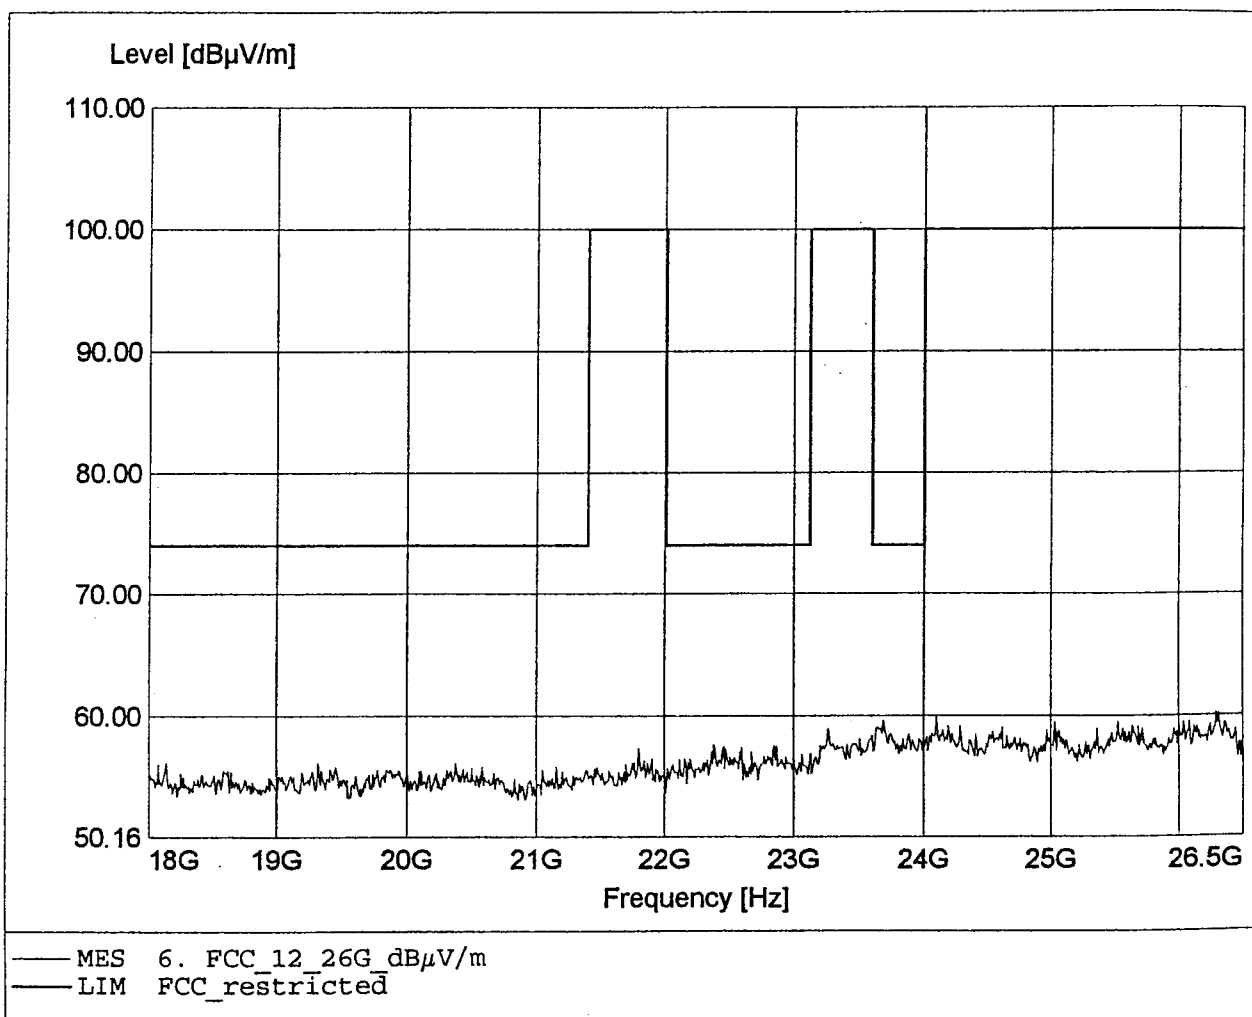

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:2 FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:25546,11MHz Pmax:59,58dBµV/m

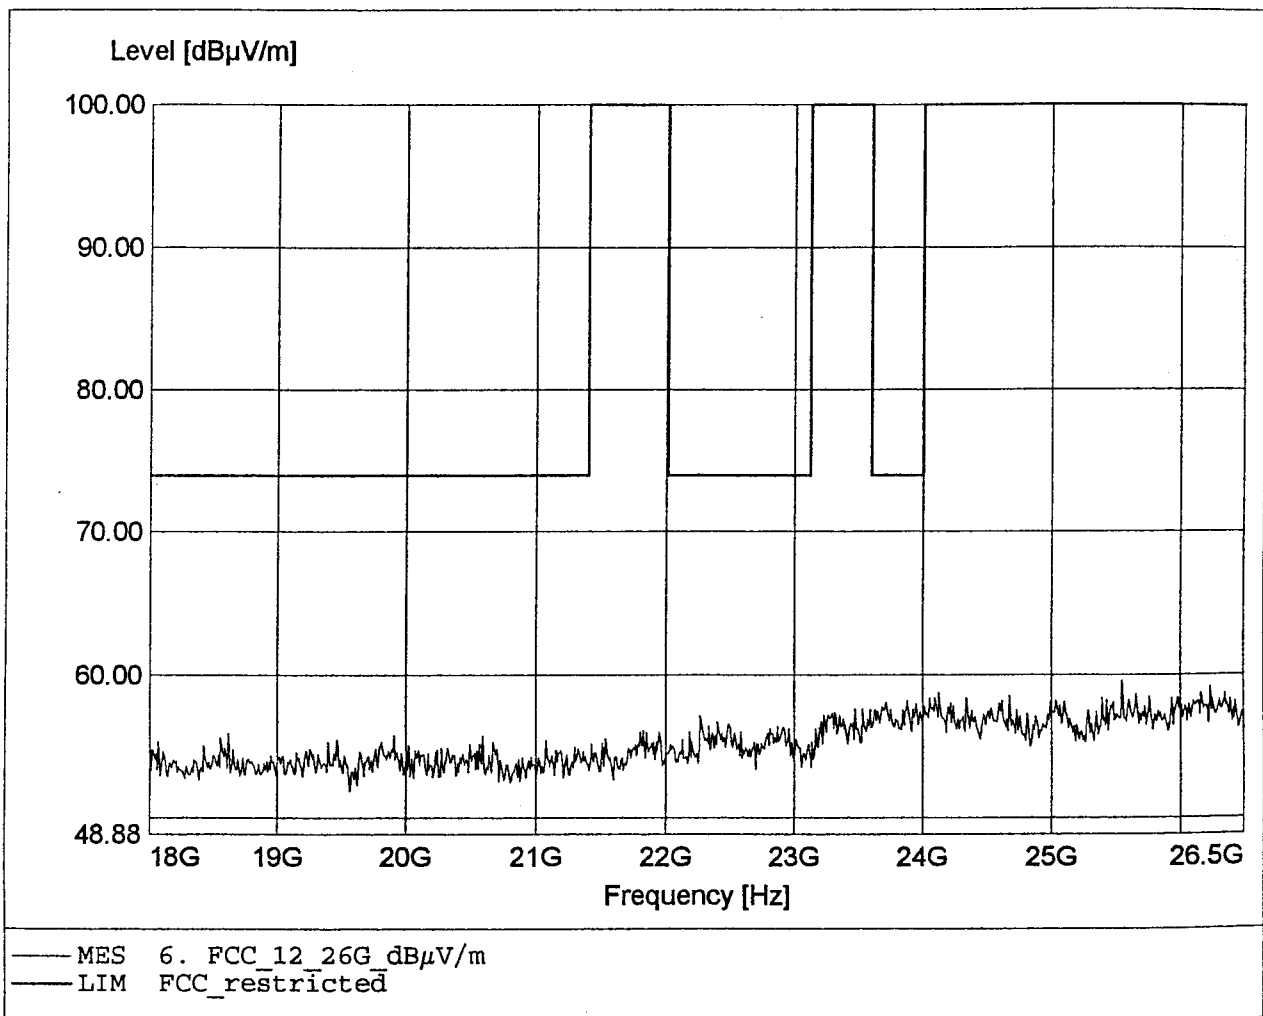

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S

Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:25,97MHz Pmax:26,81dBμV/m

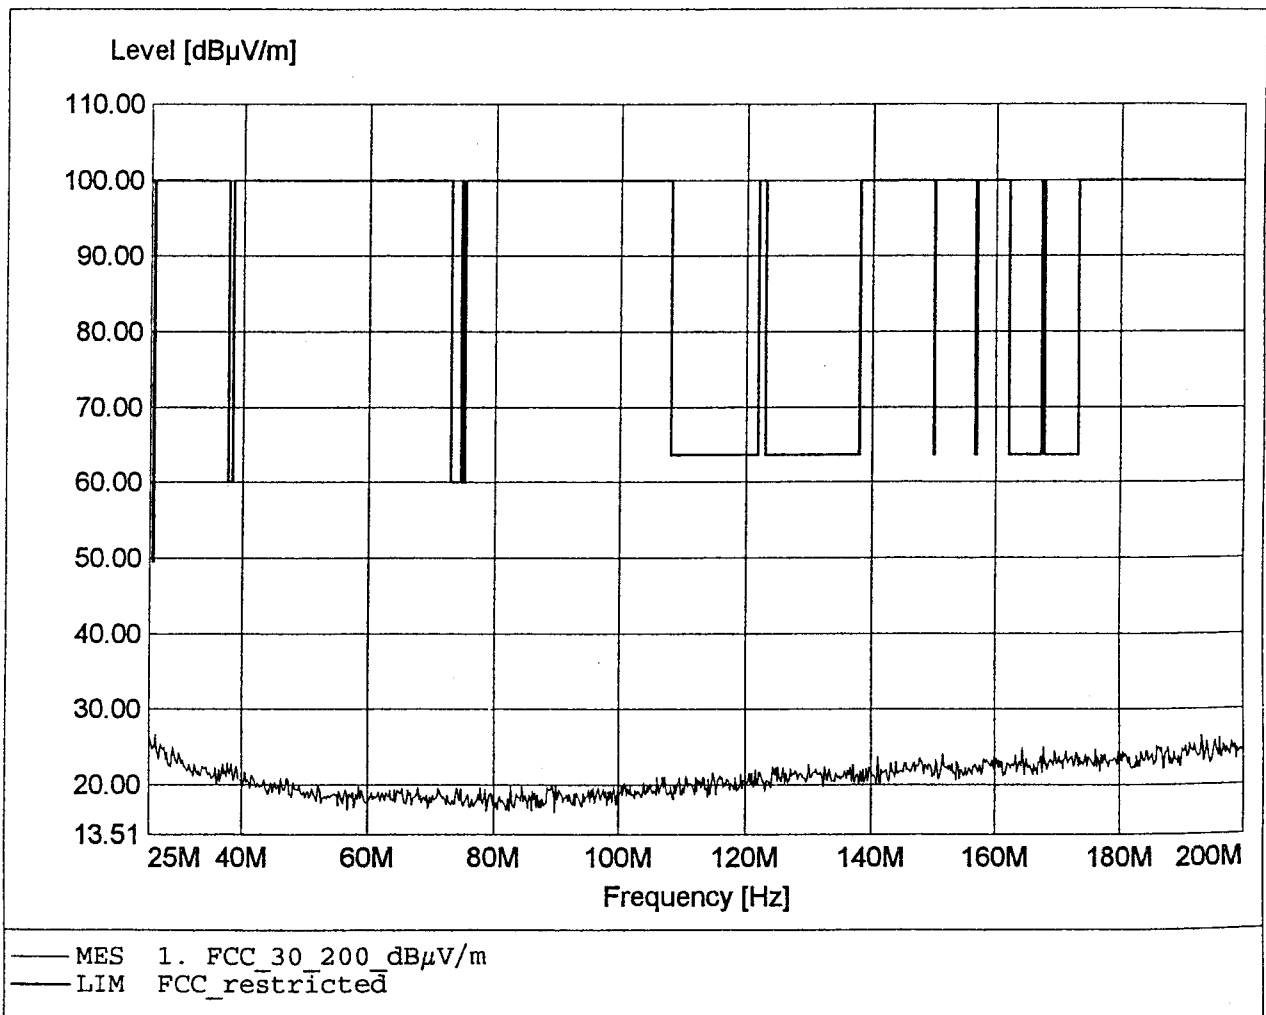




**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:189,02MHz Pmax:27,2dBμV/m

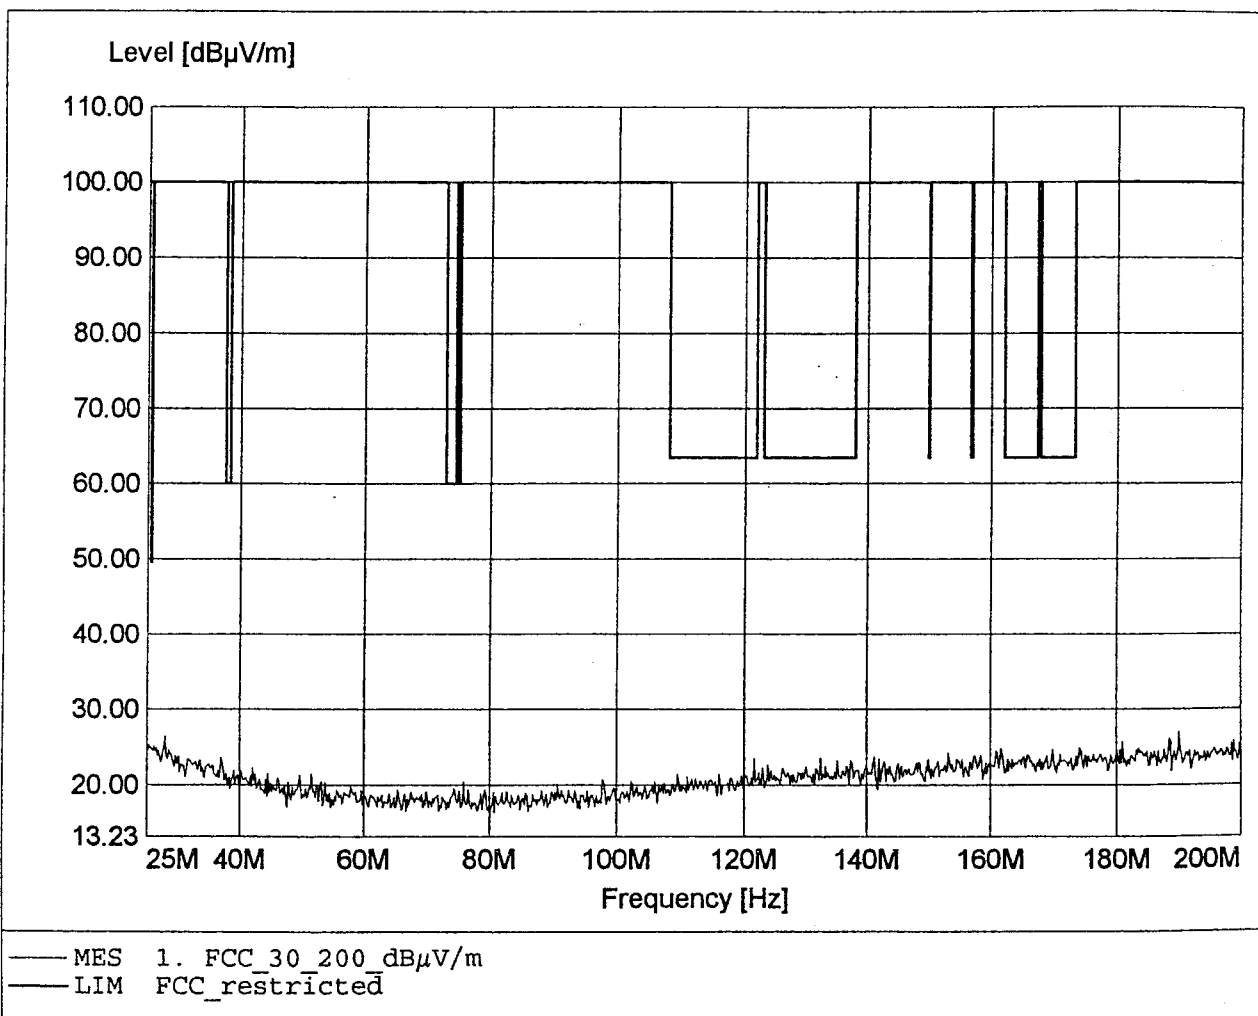

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq:993,77MHz Pmax:36,18dBμV/m

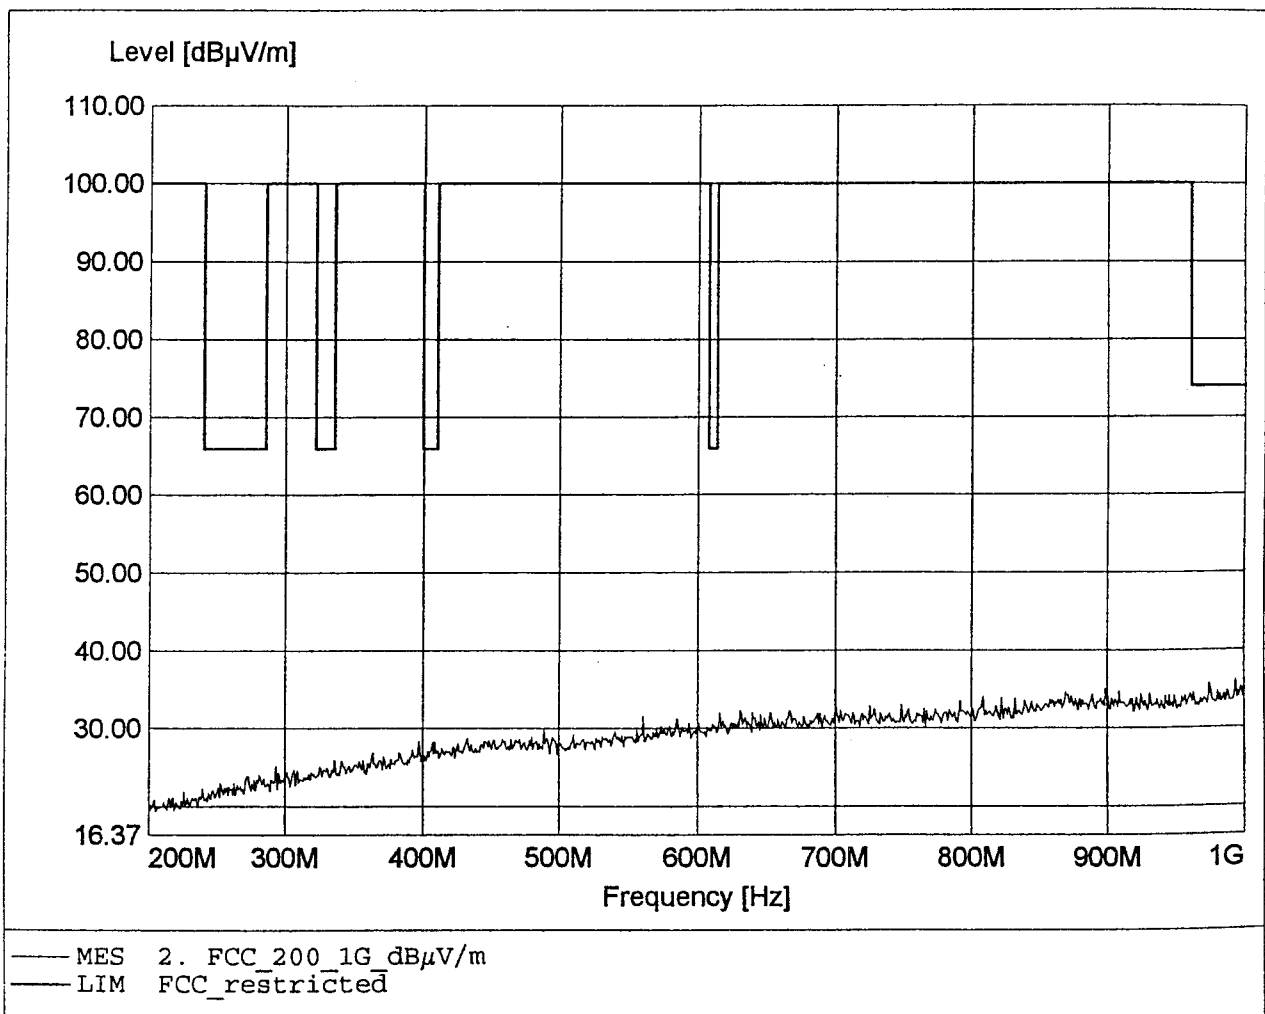

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq:982,22MHz Pmax:35,58dBμV/m

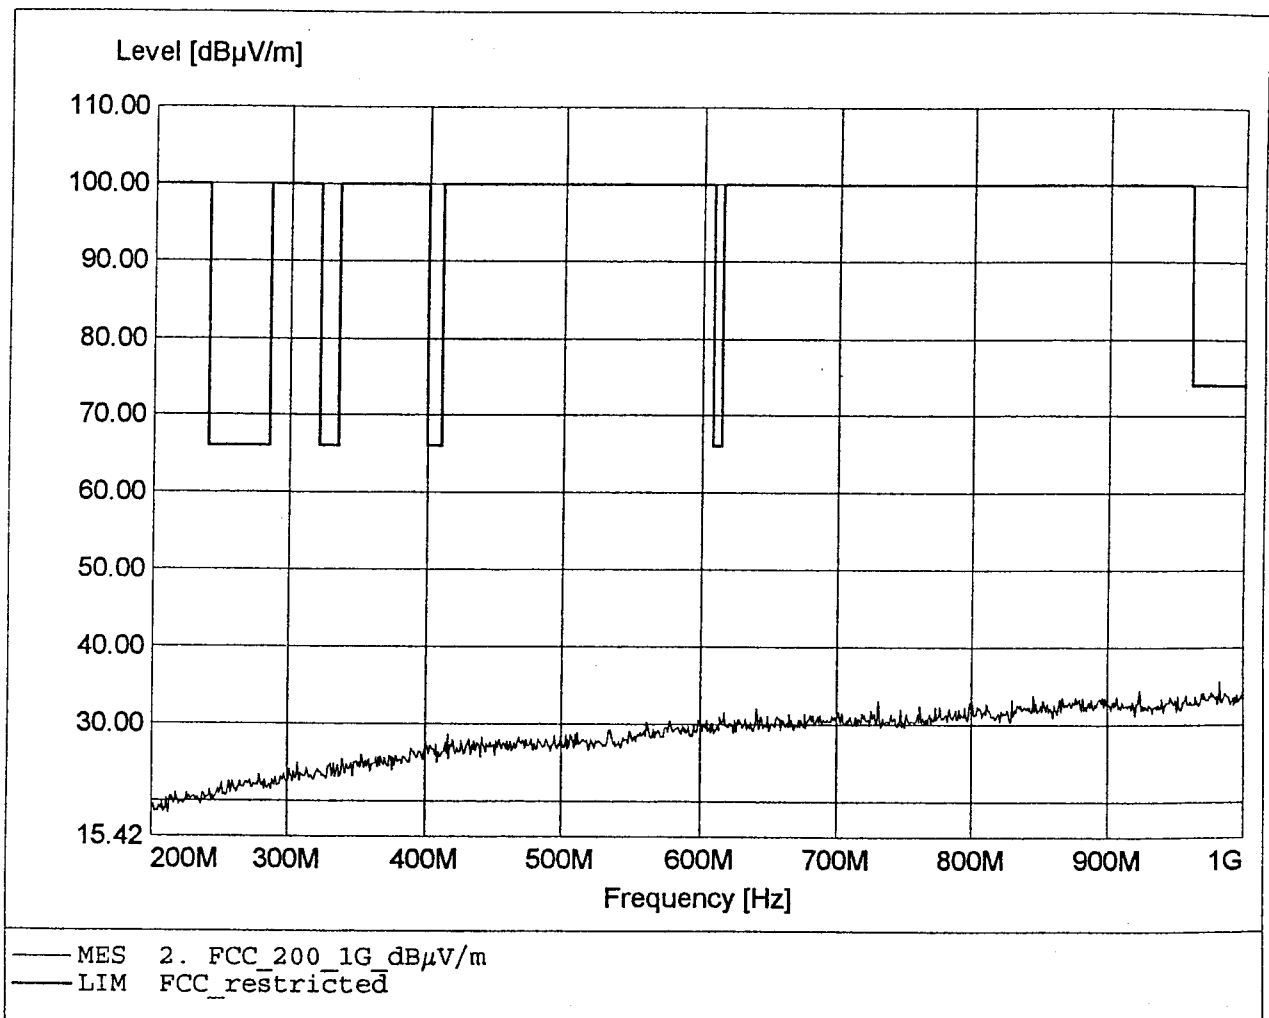

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq:2406,66MHz Pmax:122,18dBμV/m

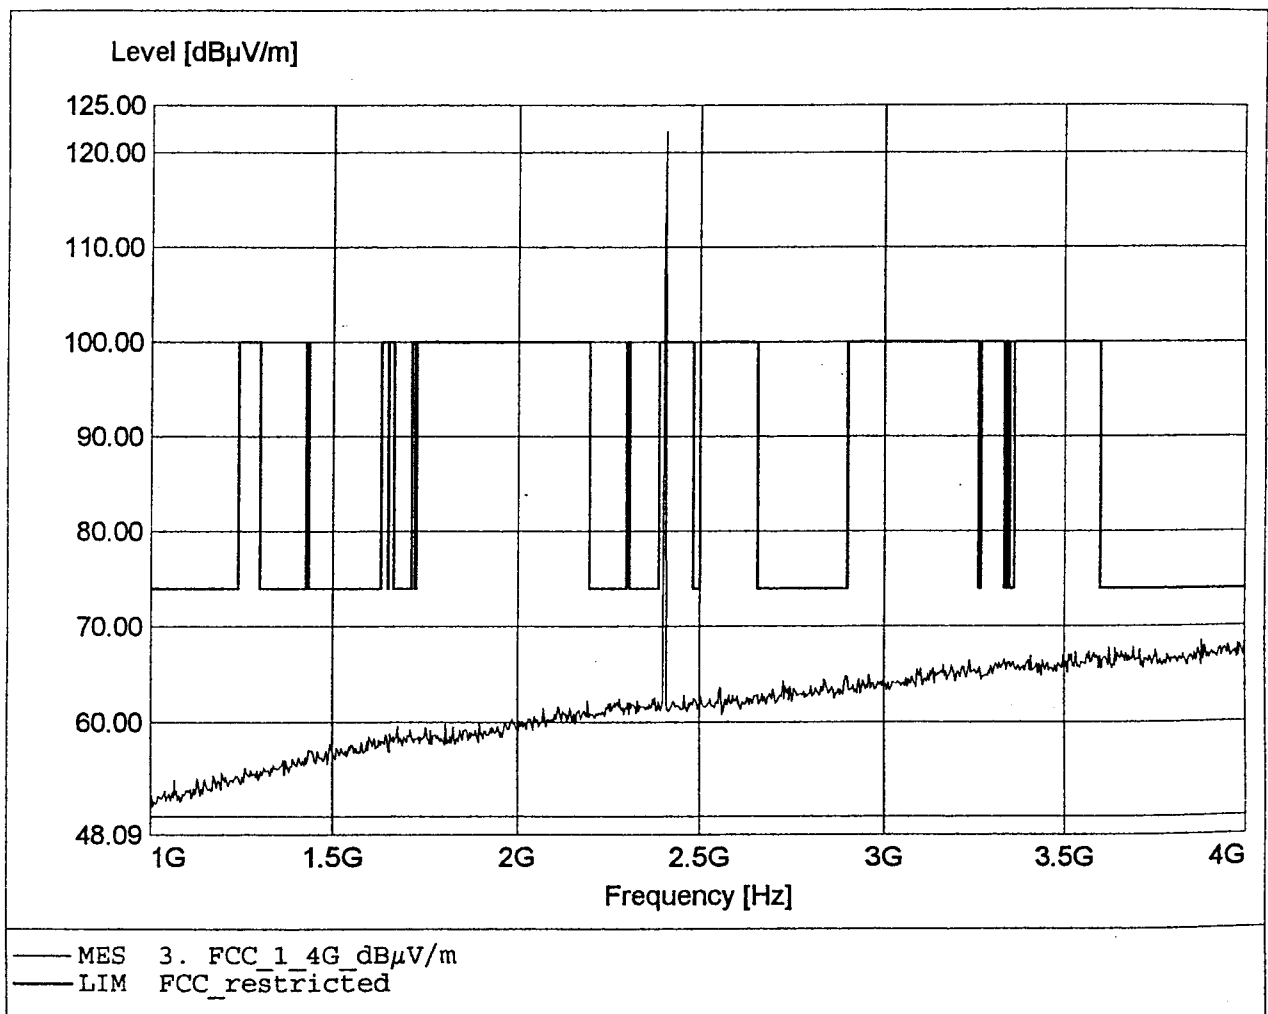

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq:2403,33MHz Pmax:114,81dBμV/m

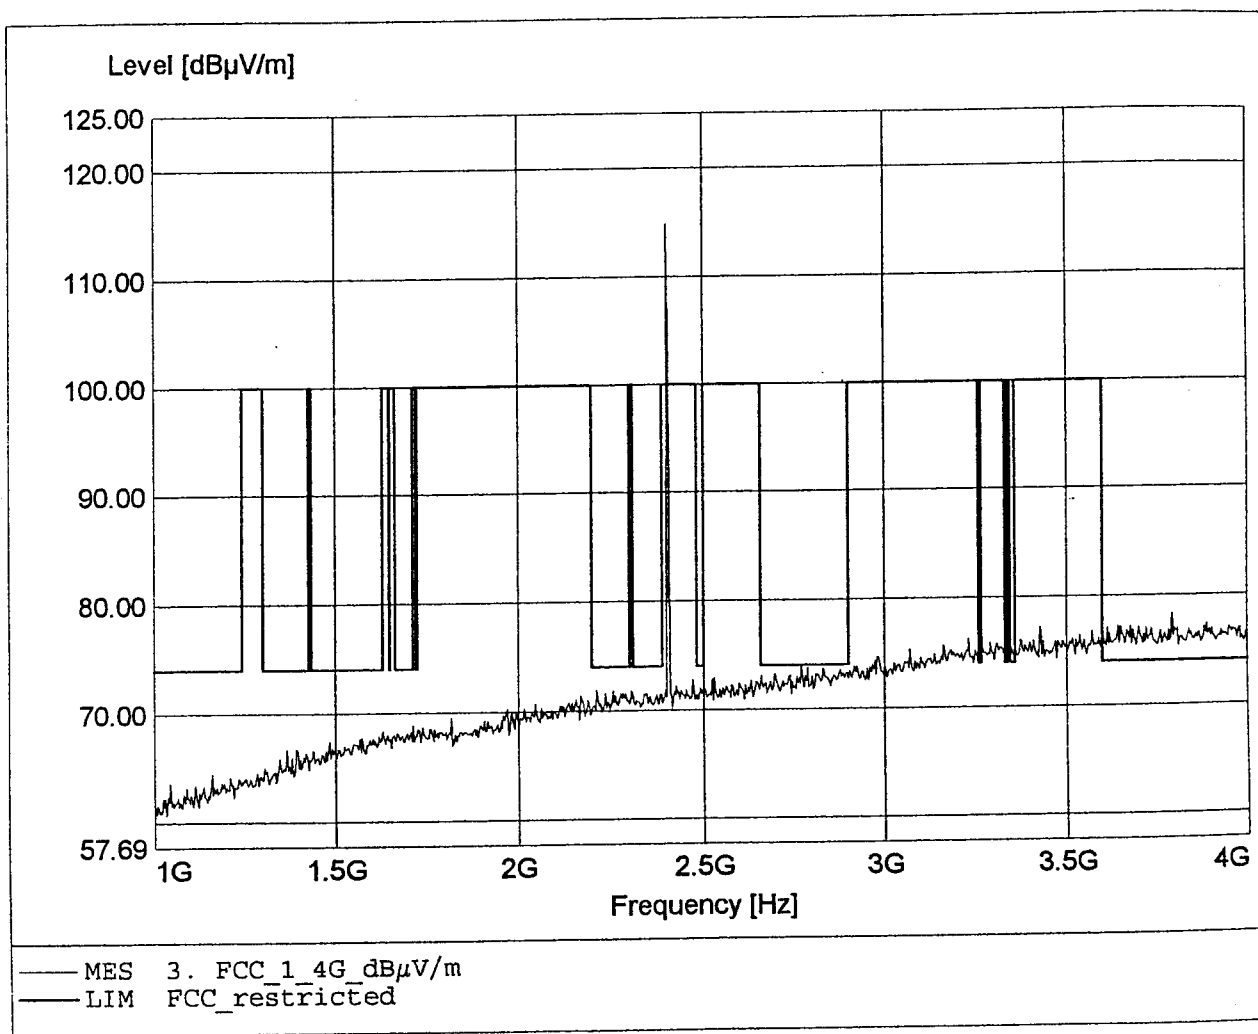

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:7146,66MHz Pmax:64,66dBμV/m

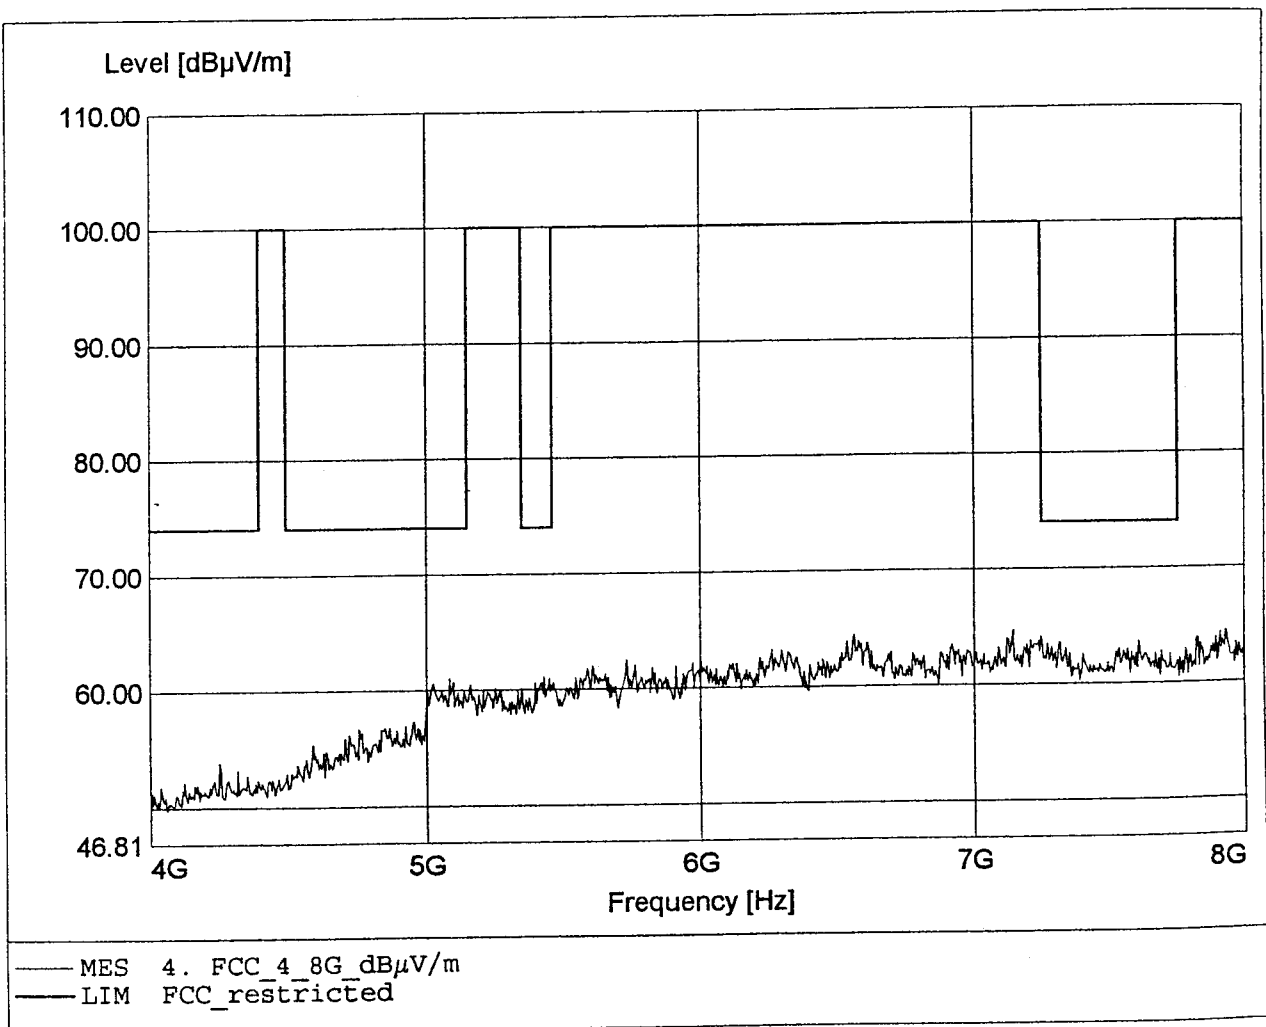

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:7897,77MHz Pmax:64,68dBμV/m

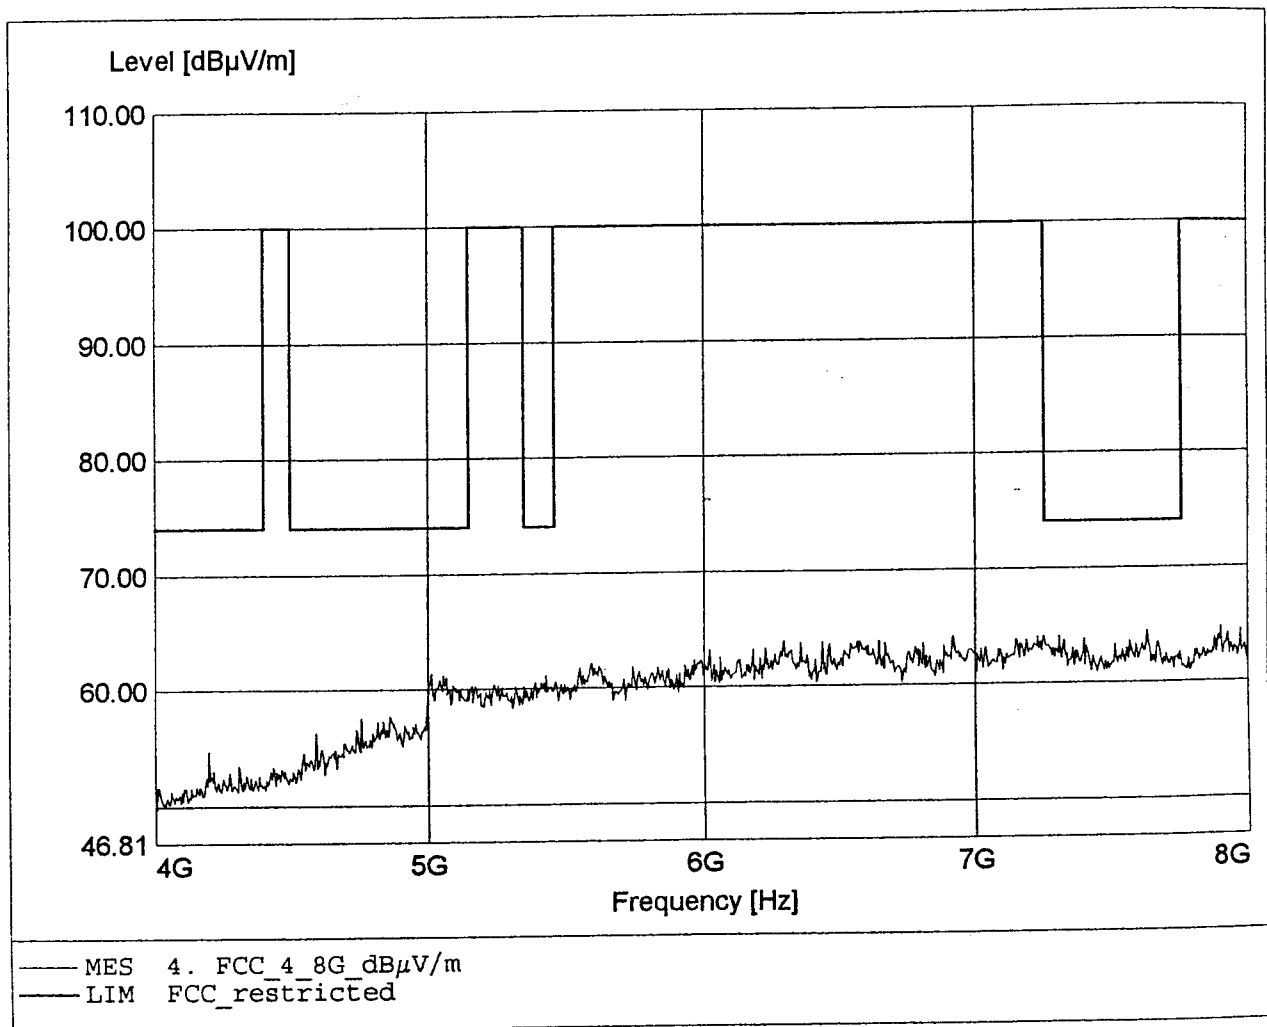

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRF4 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S

Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:15555,55MHz Pmax:42,87dBμV/m

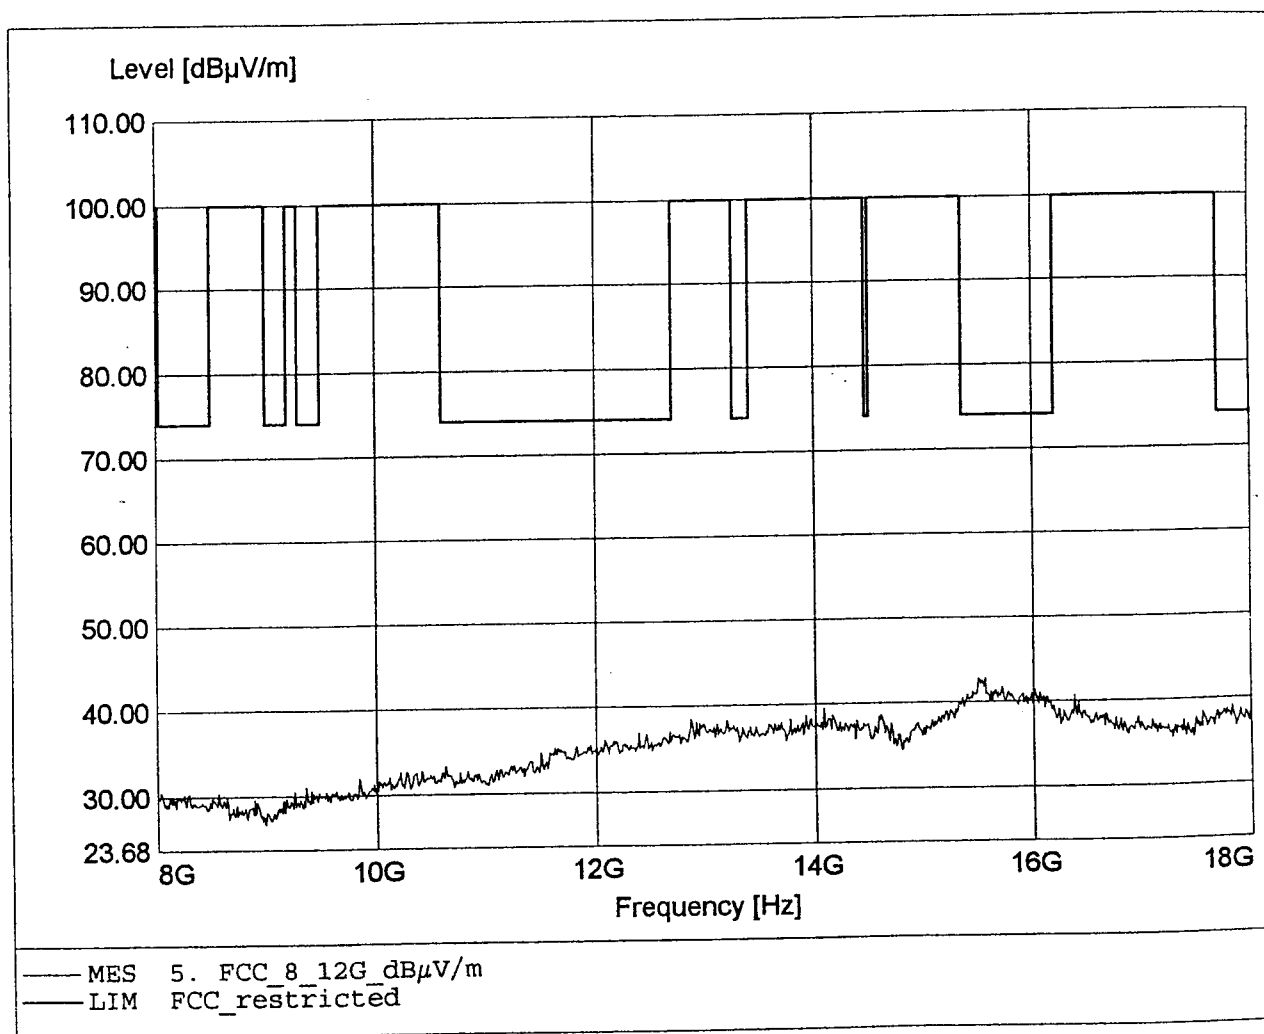




**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:15544,44MHz Pmax:43,42dBμV/m

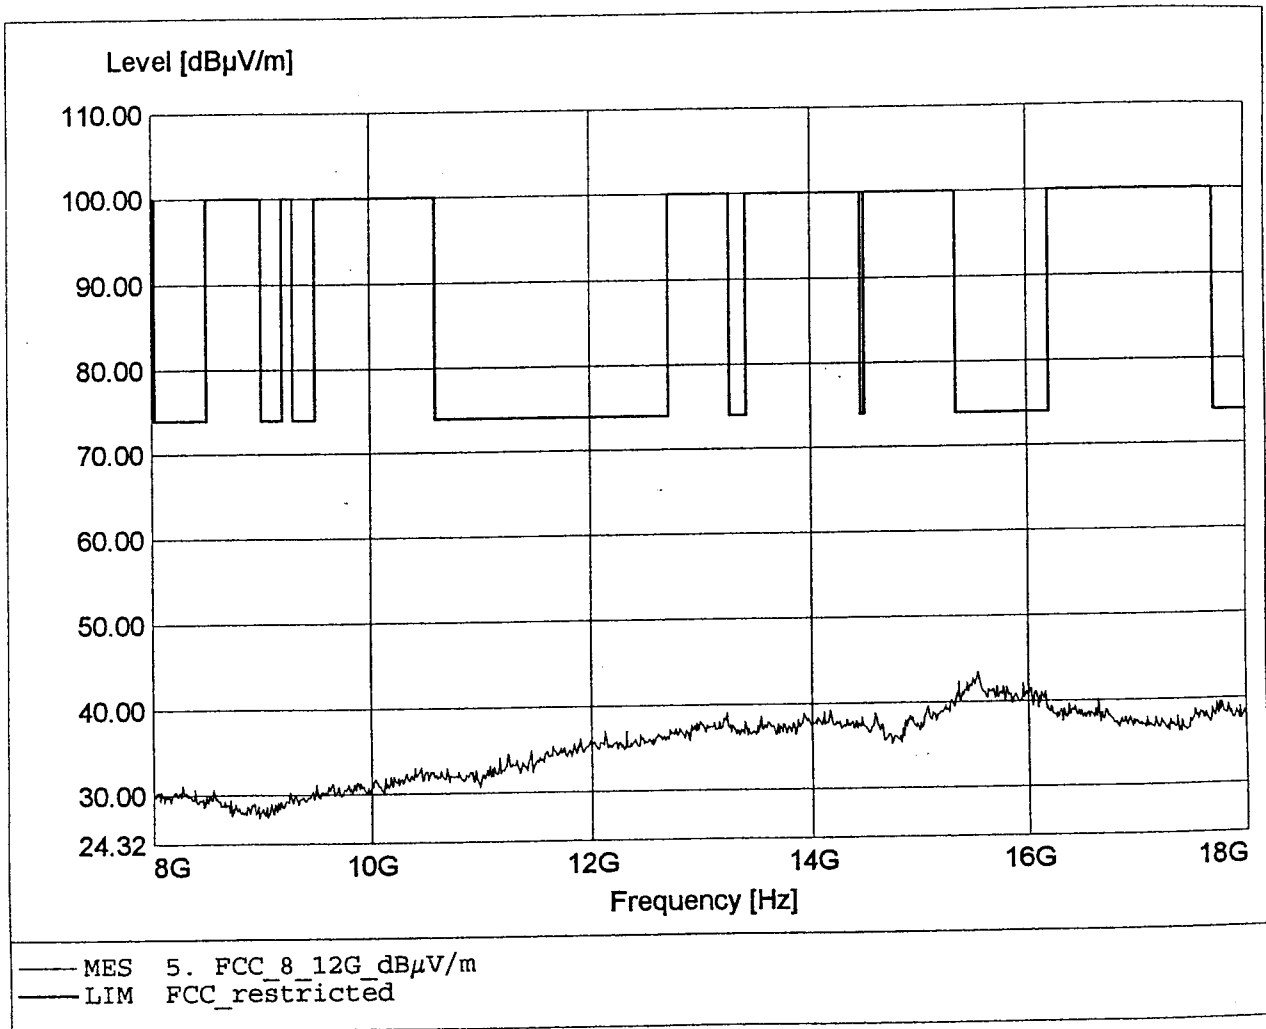

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:26499,99MHz Pmax:51,69dBμV/m

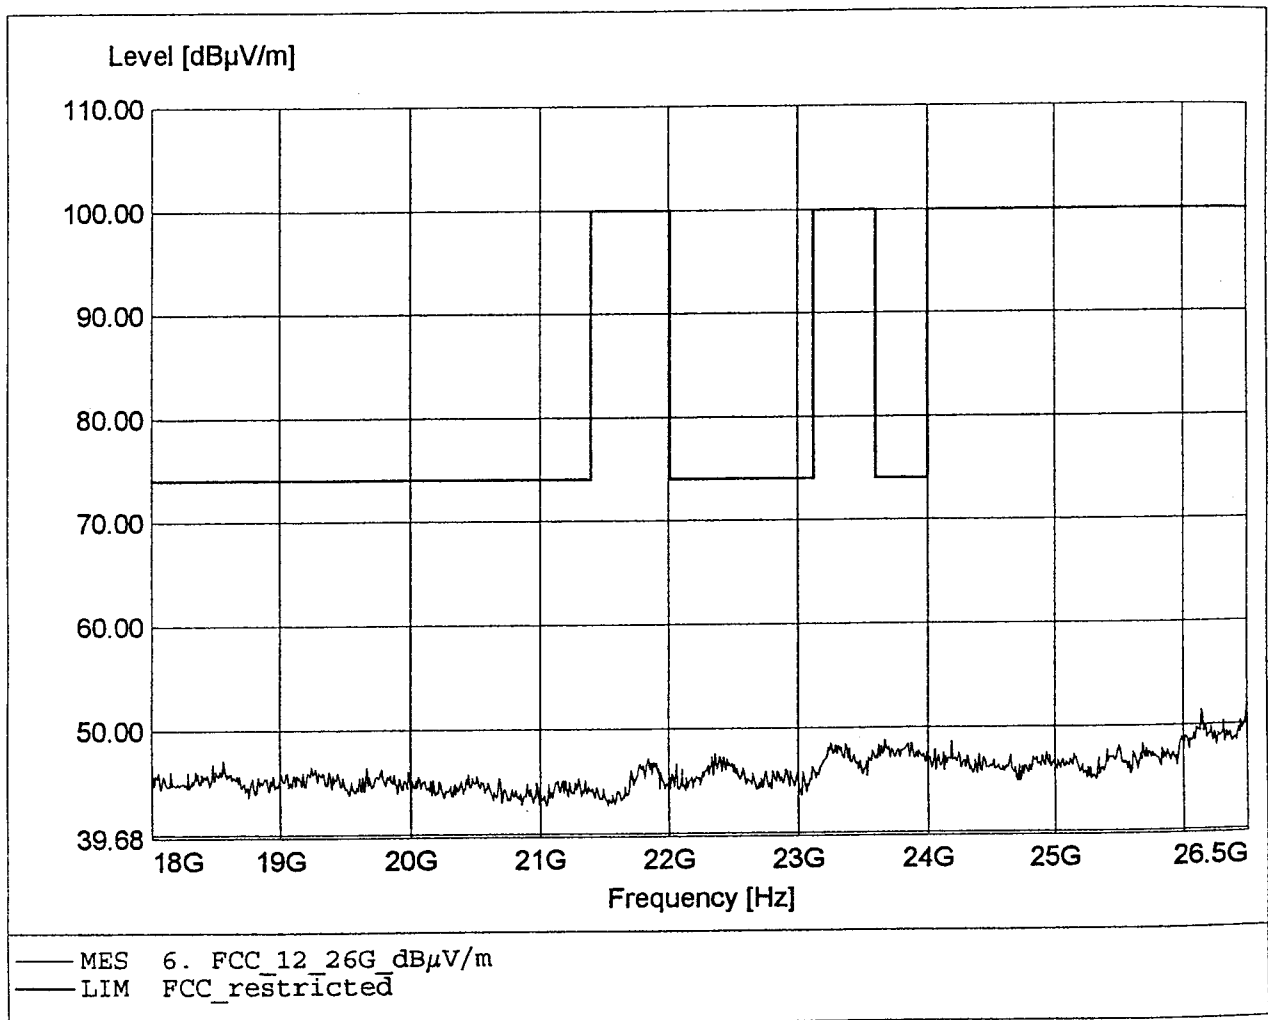

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP4 2G4 Ant:Ext. FP (Ch:0 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:26499,99MHz Pmax:50,70dBµV/m

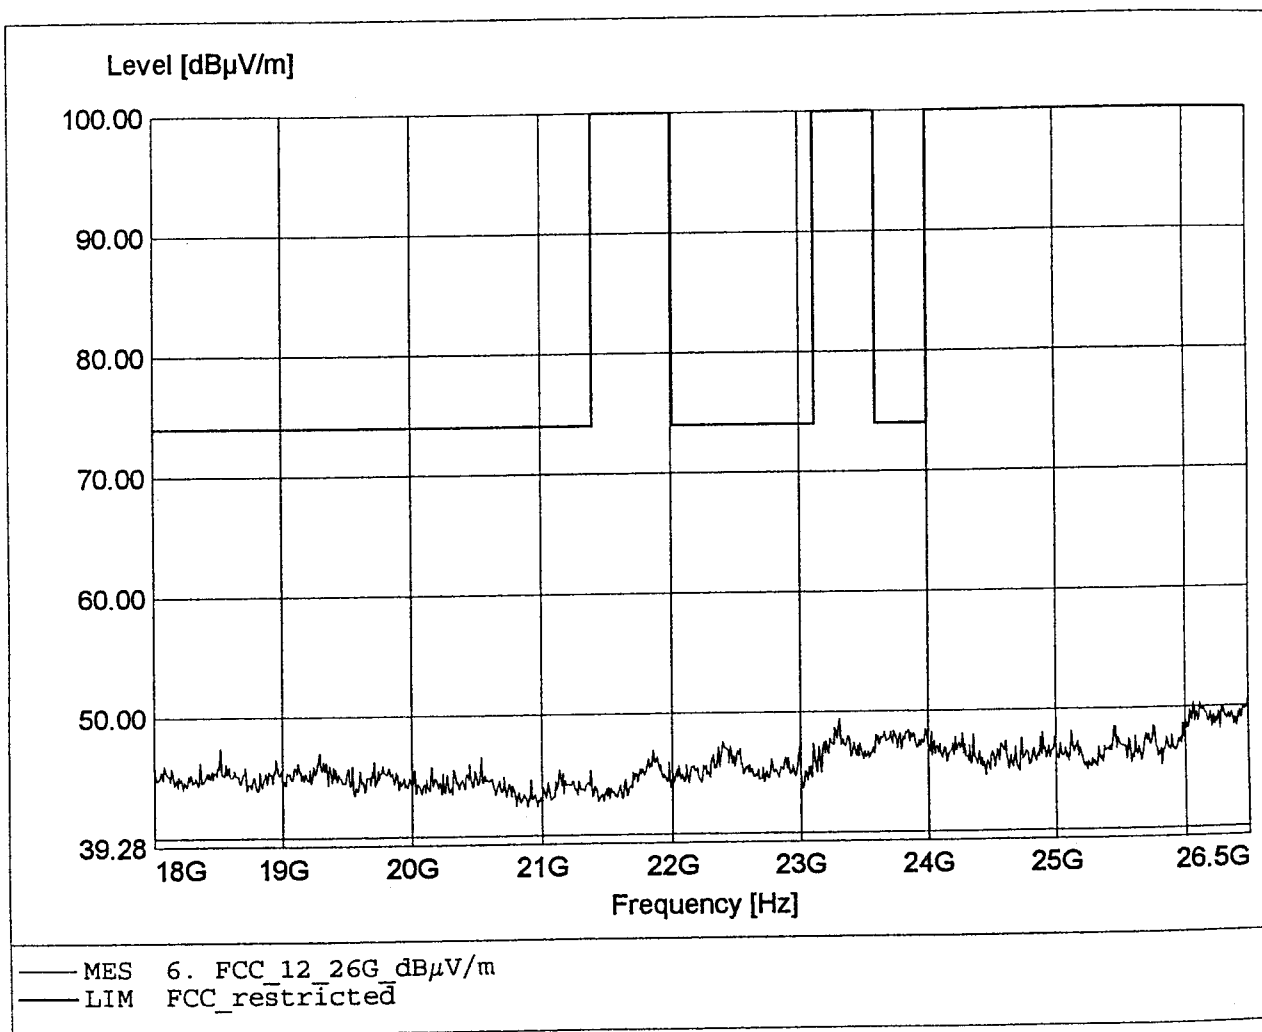

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:26,74MHz Pmax:26,45dBμV/m

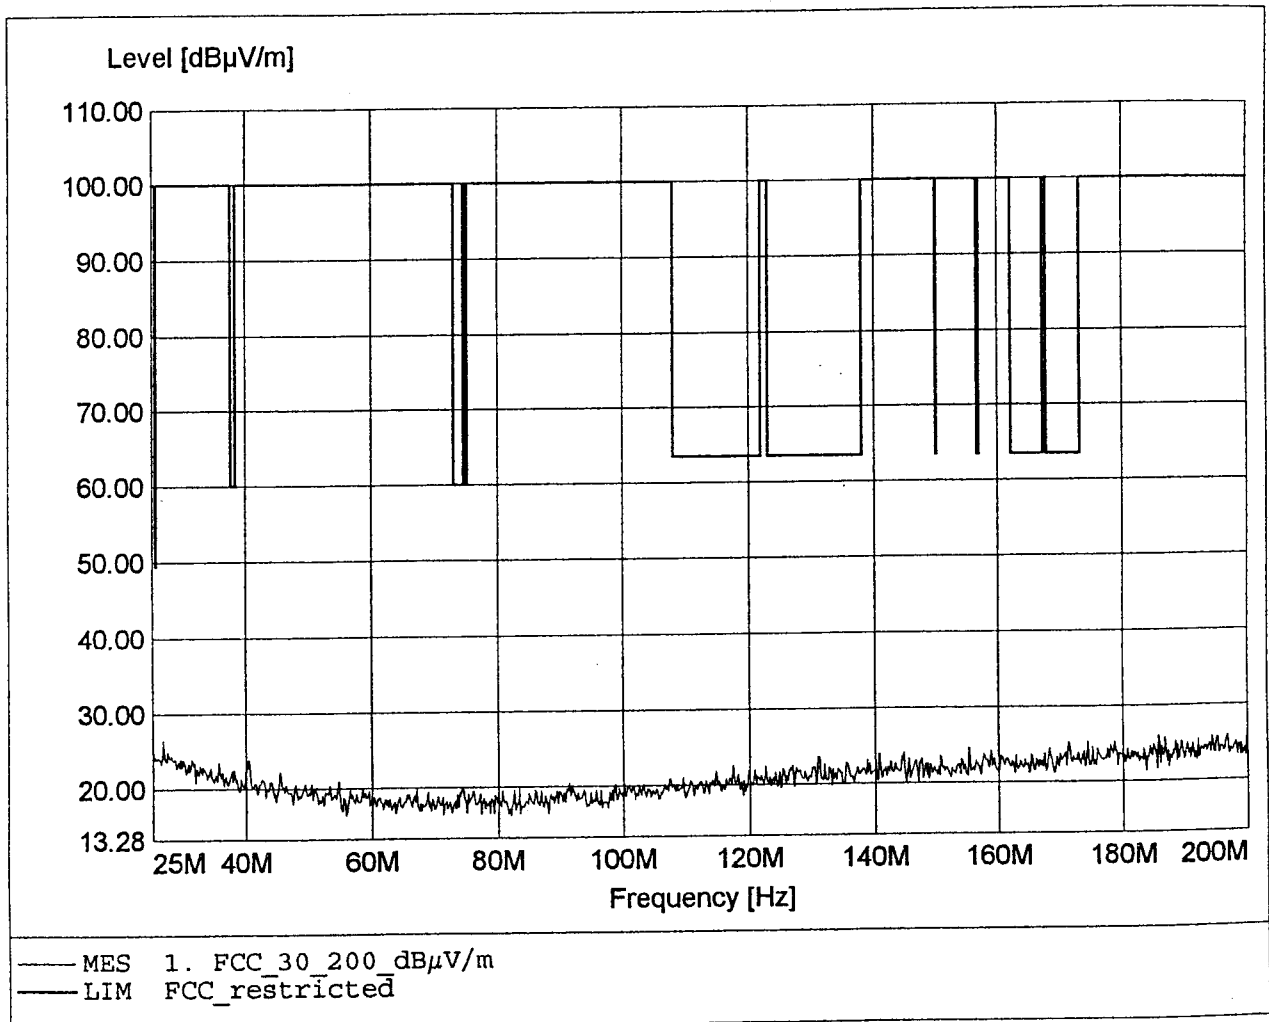

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:25,19MHz Pmax:27,59dBμV/m

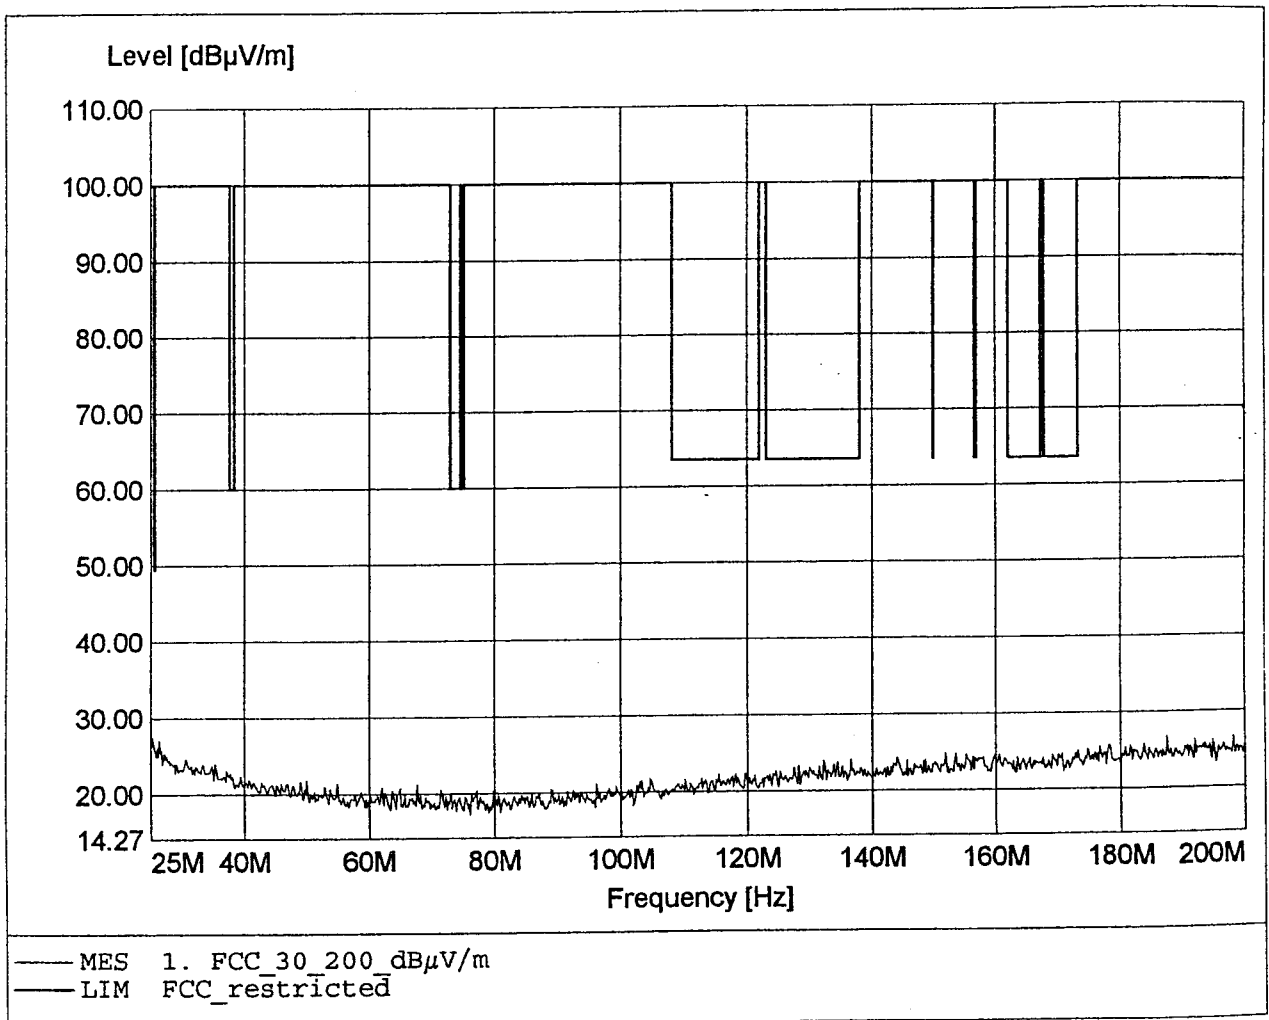

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq:891,55MHz Pmax:42,92dBμV/m

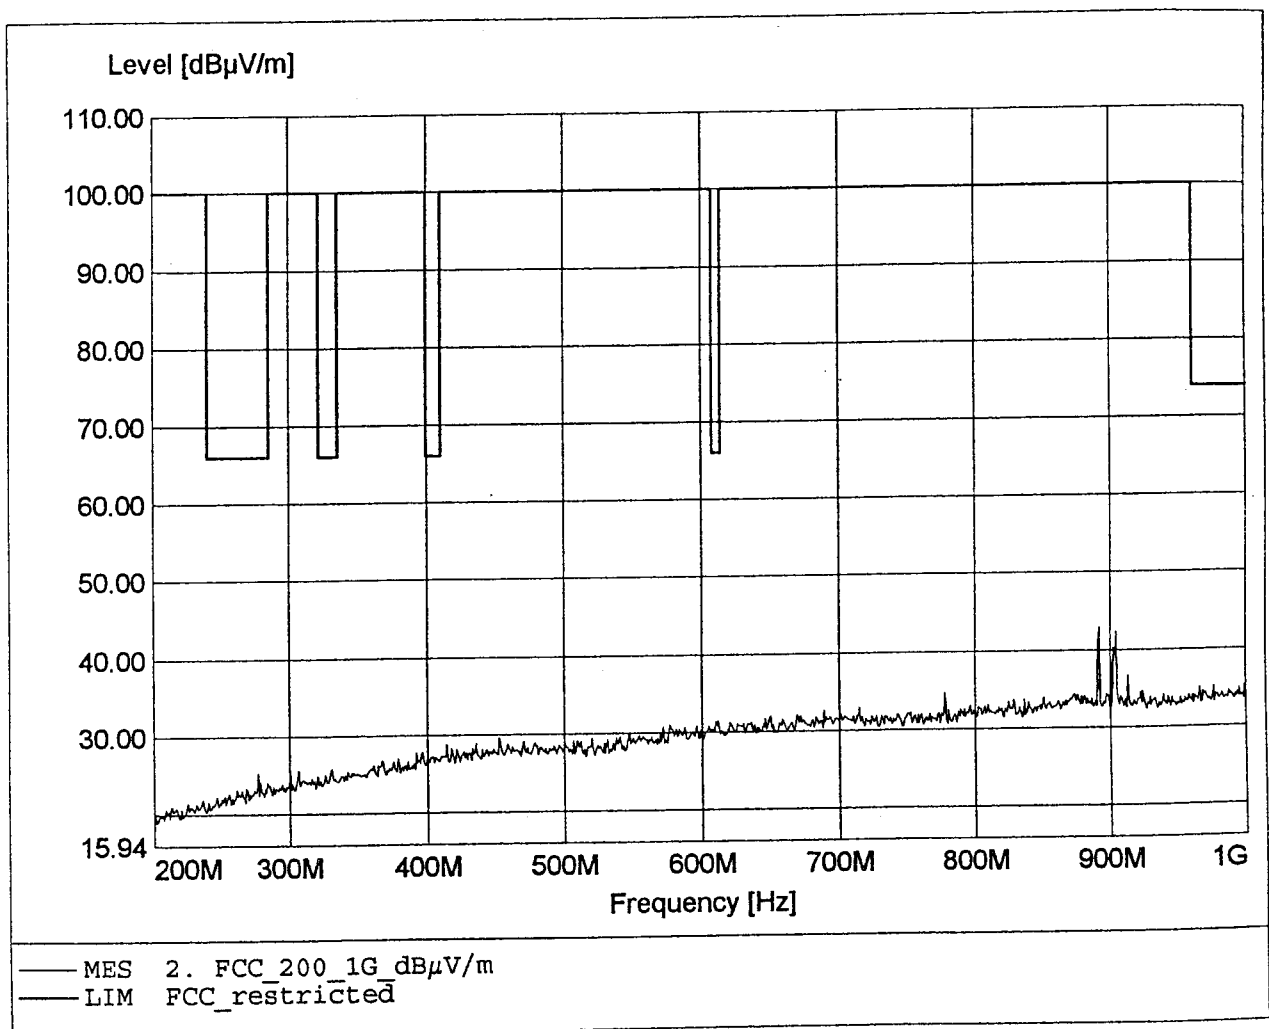

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq:953,77MHz Pmax:34,68dBµV/m

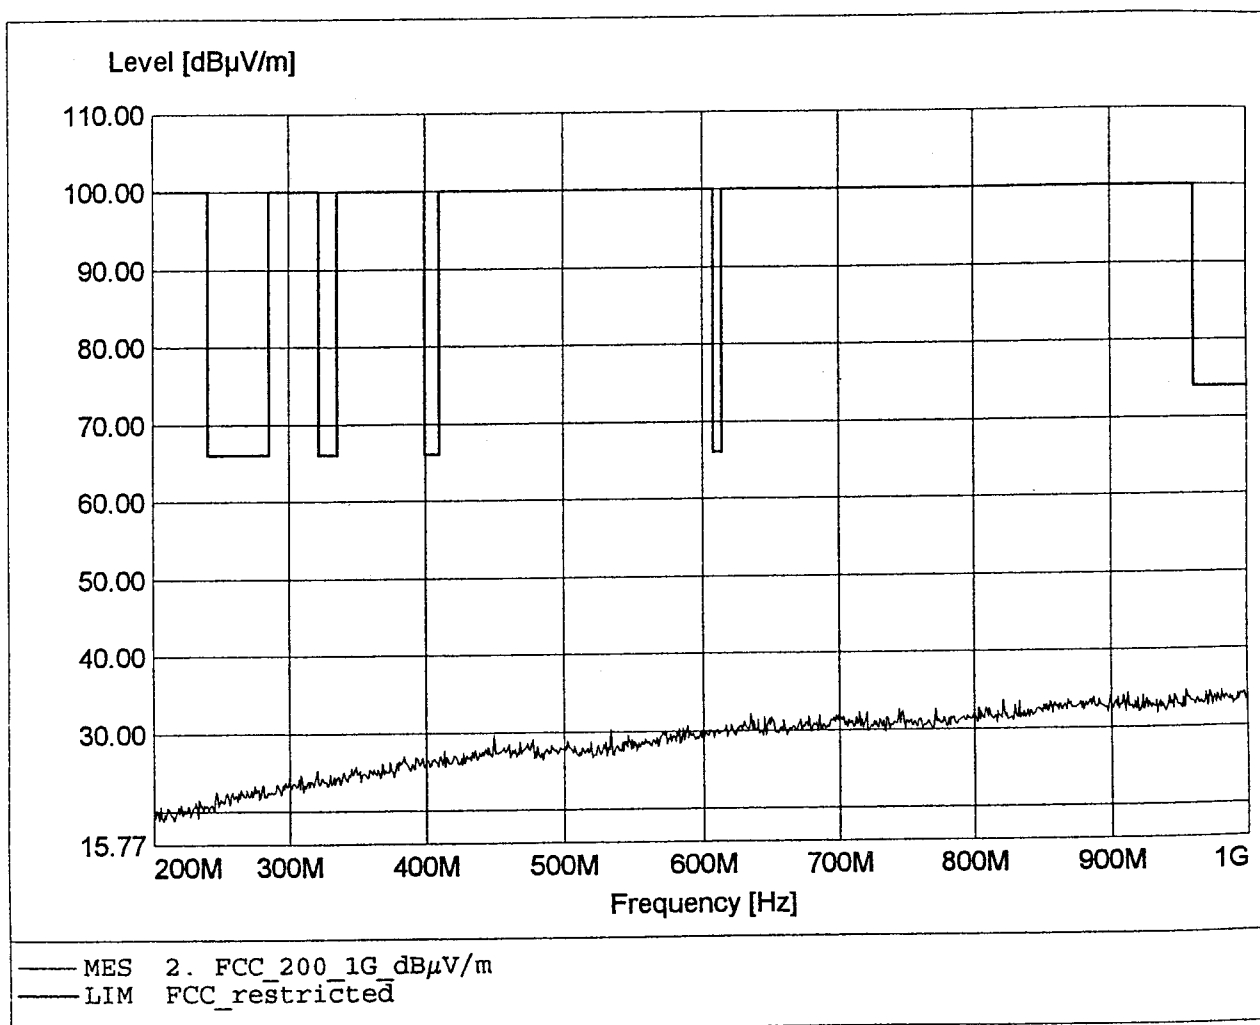

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S

Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq:2446,04MHz Pmax:122,4dBμV/m

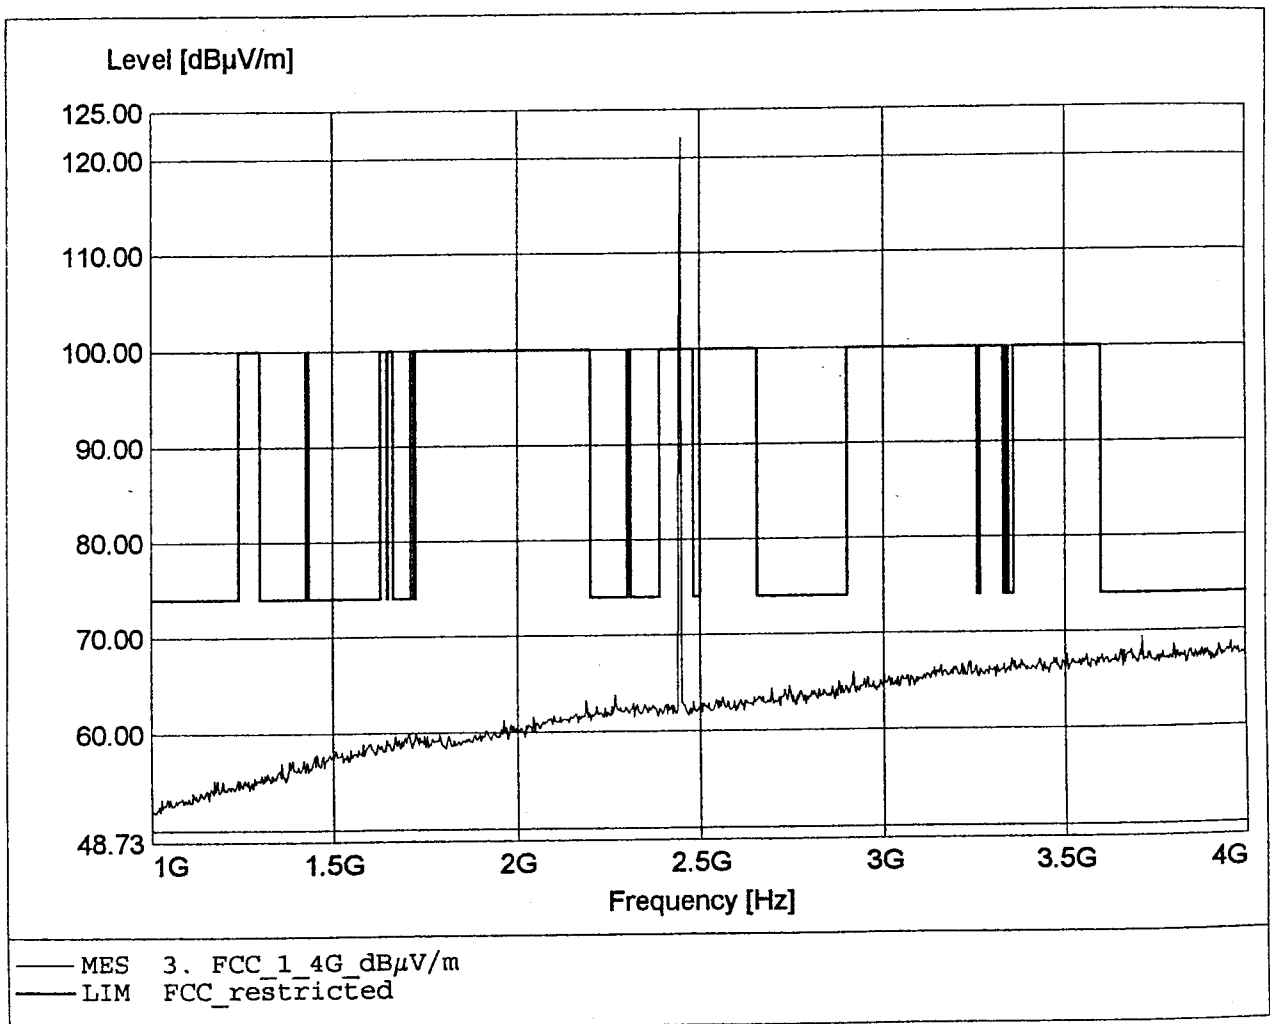




**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq:2446,66MHz Pmax:119,45dBμV/m

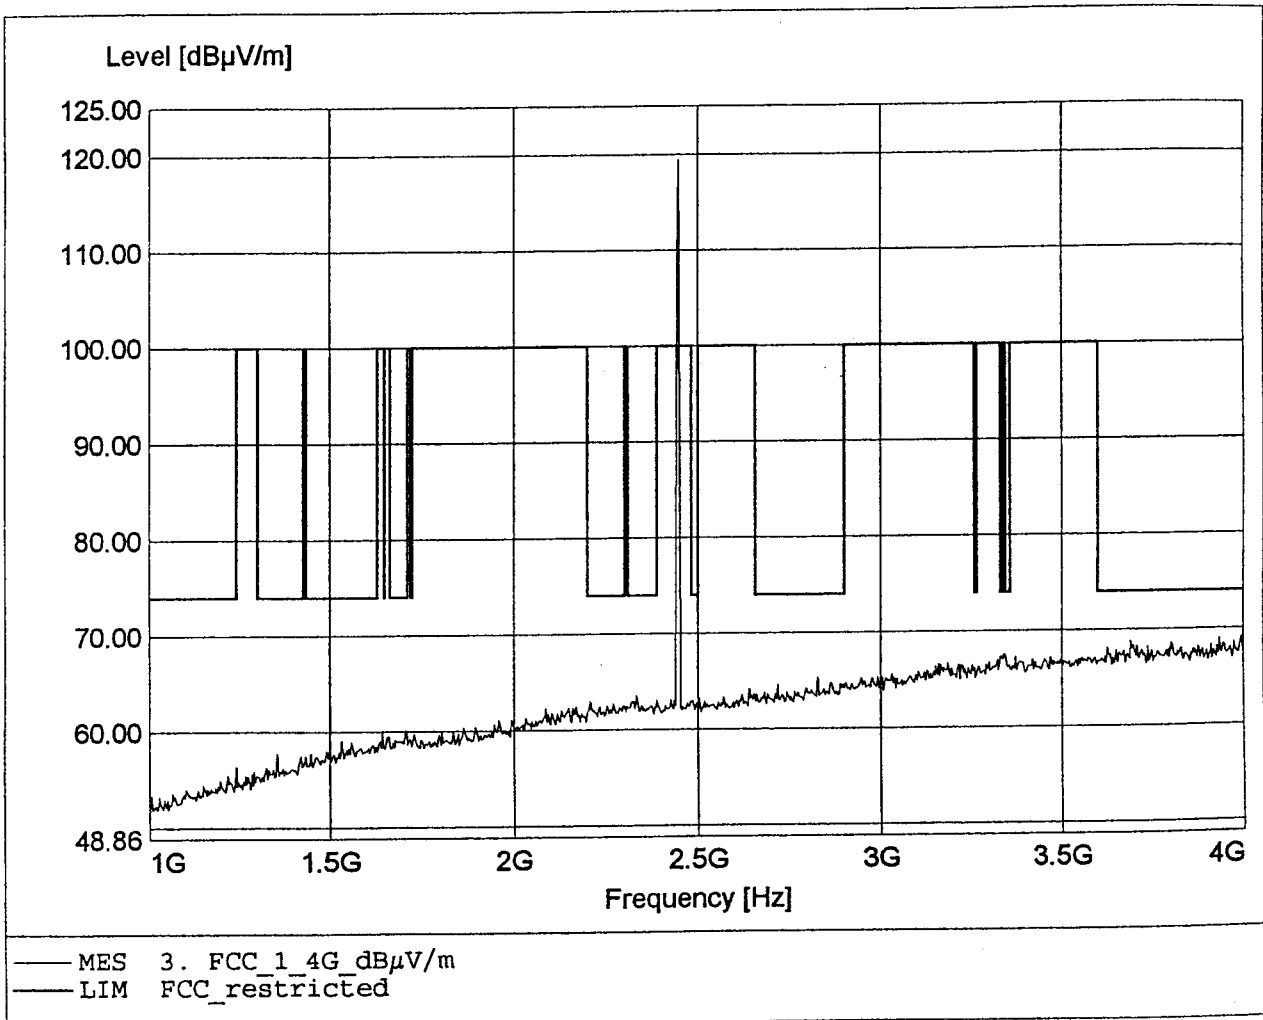

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRF 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:7942,22MHz Pmax:63,66dBμV/m

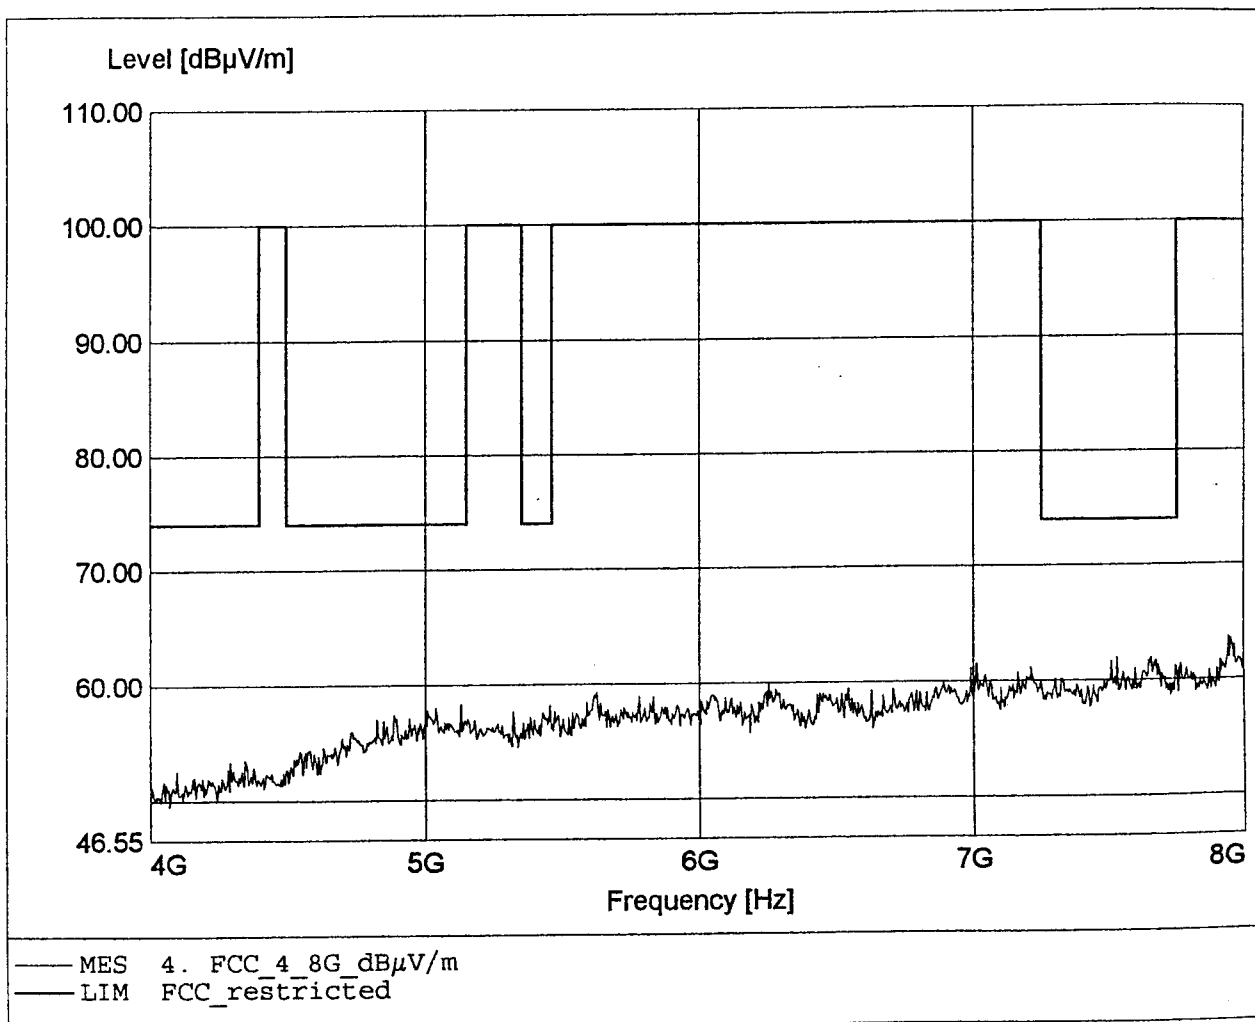

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRF 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:7662,22MHz Pmax:62,86dBμV/m

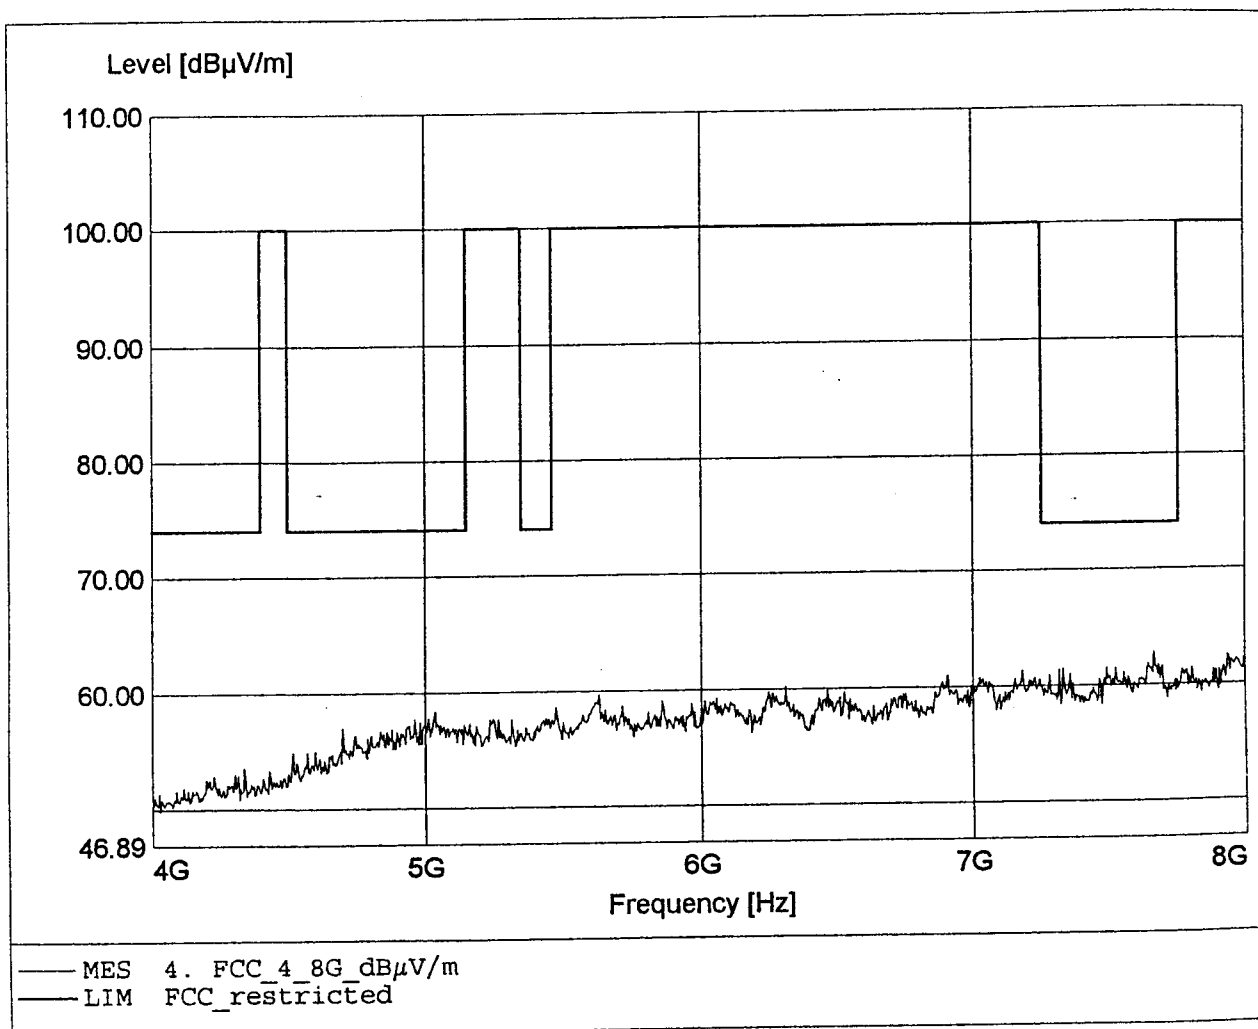

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRF 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:15499,99MHz Pmax:42,99dBμV/m

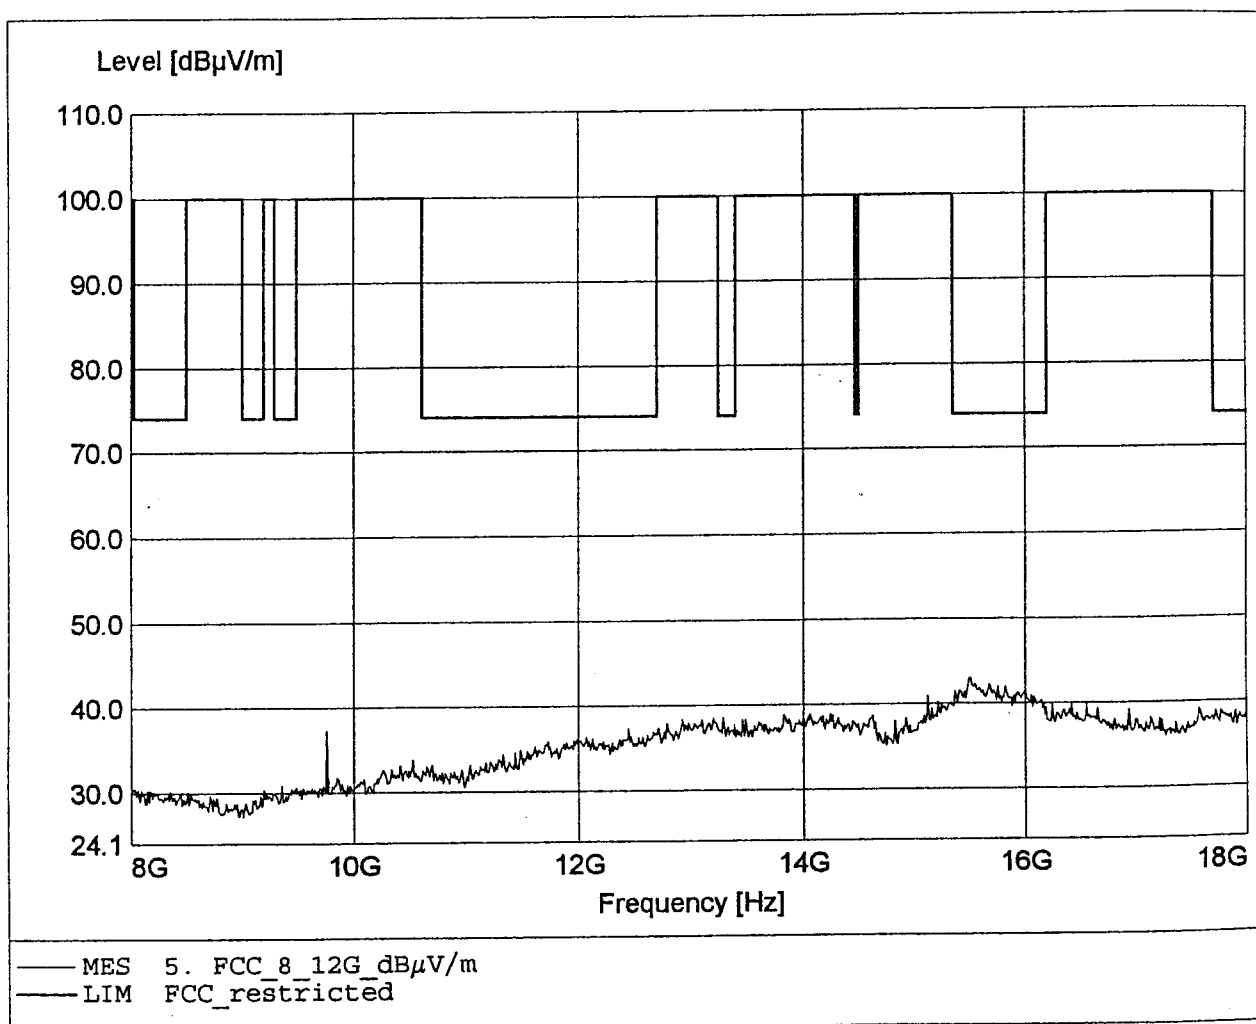

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFPP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:15555,55MHz Pmax:43,98dBμV/m

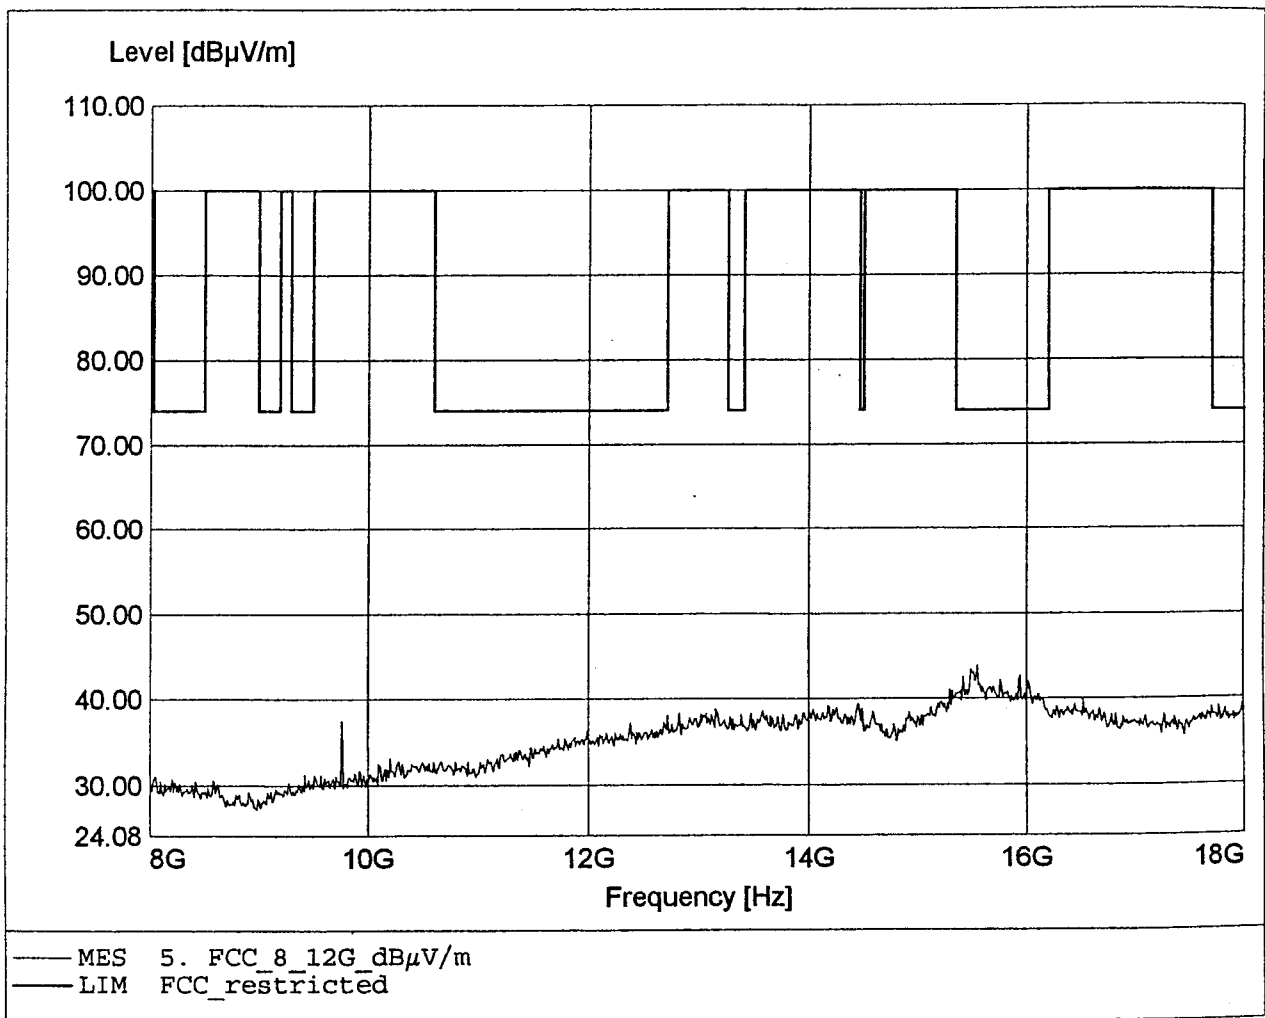

**Spurious emissions (Field Strength Tx)  
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:26141,11MHz Pmax:50,98dBµV/m

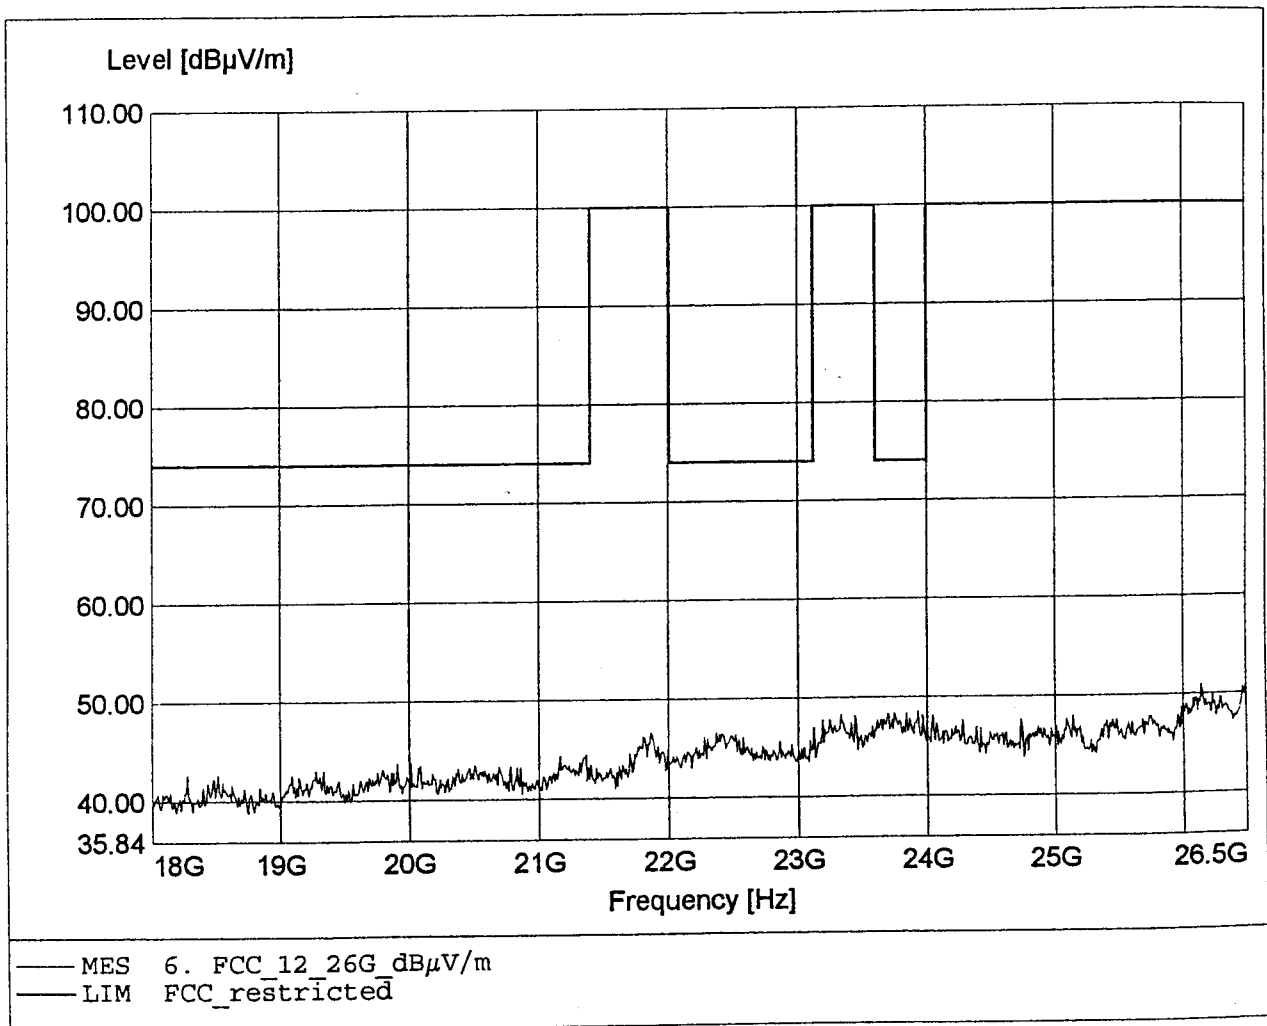

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:40 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:26481,11MHz Pmax:50,78dBμV/m

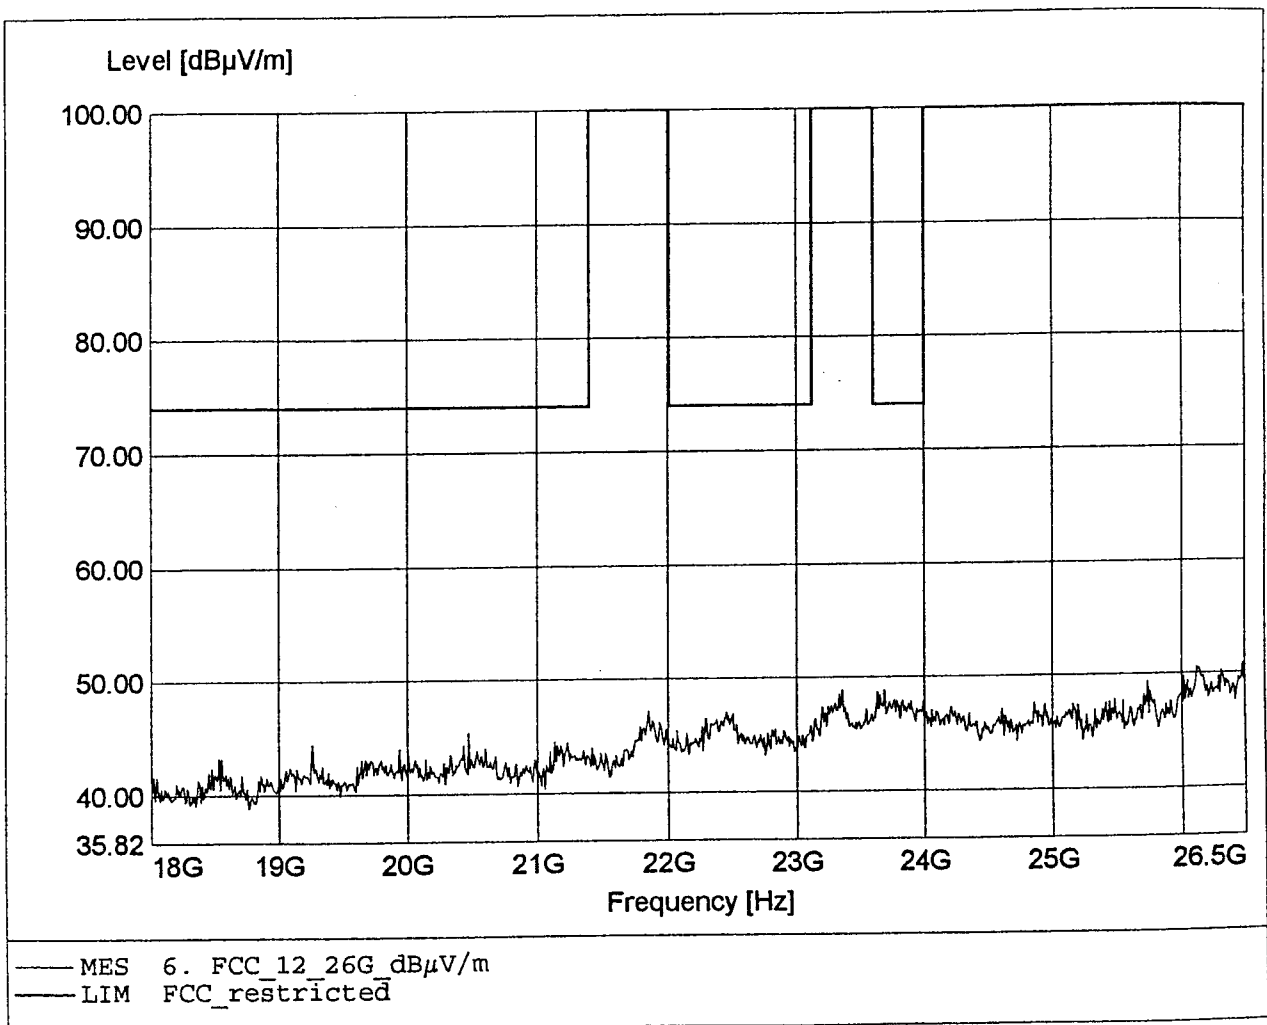

**Spurious emissions (Field Strength Tx)**  
**FCC RULES, PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S

Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:182,11MHz Pmax:26,71dBμV/m

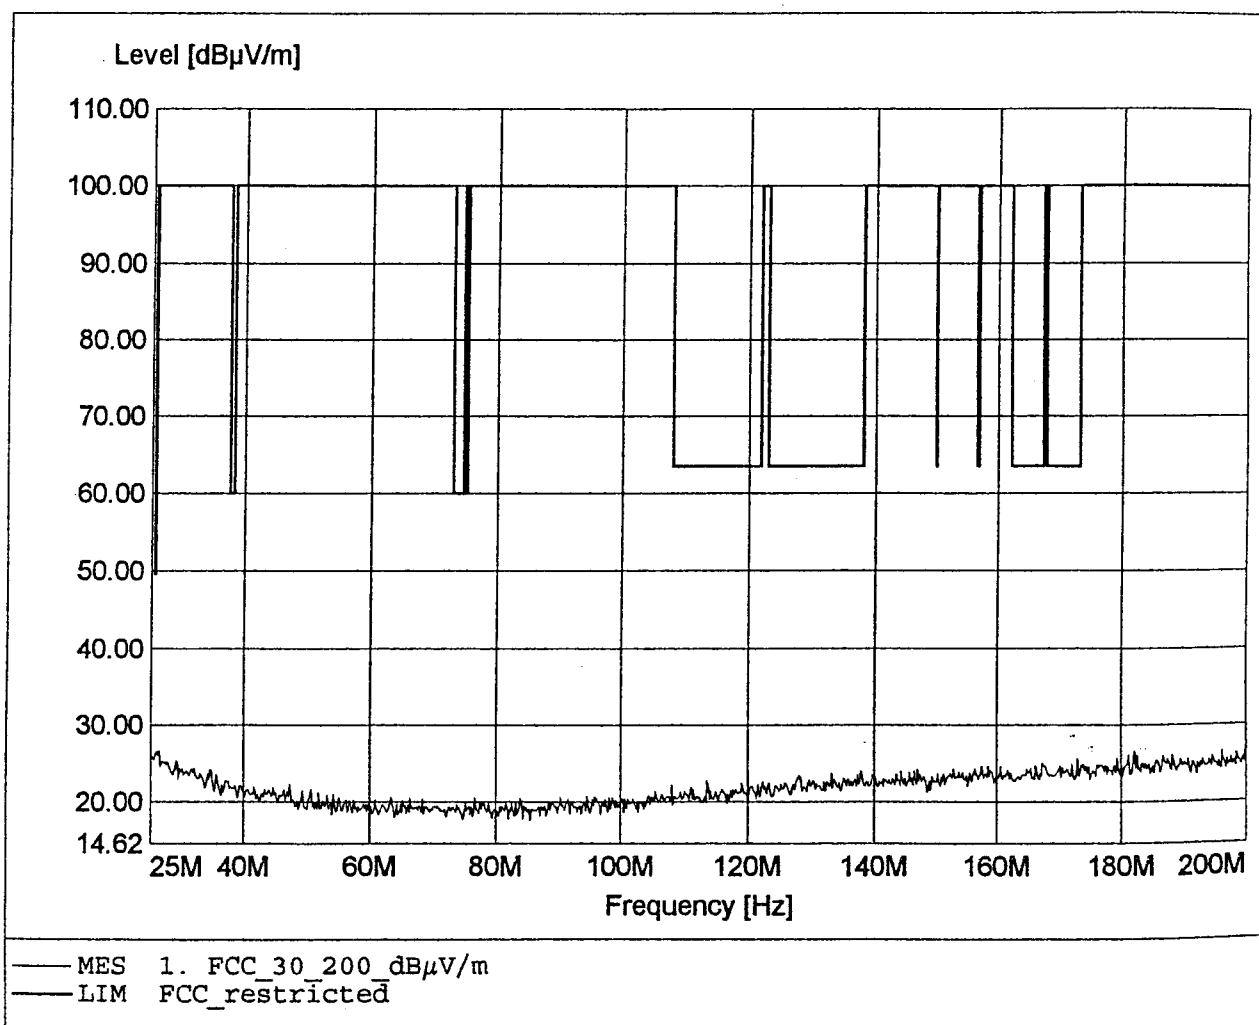




**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq:198,83MHz Pmax:26,23dBμV/m

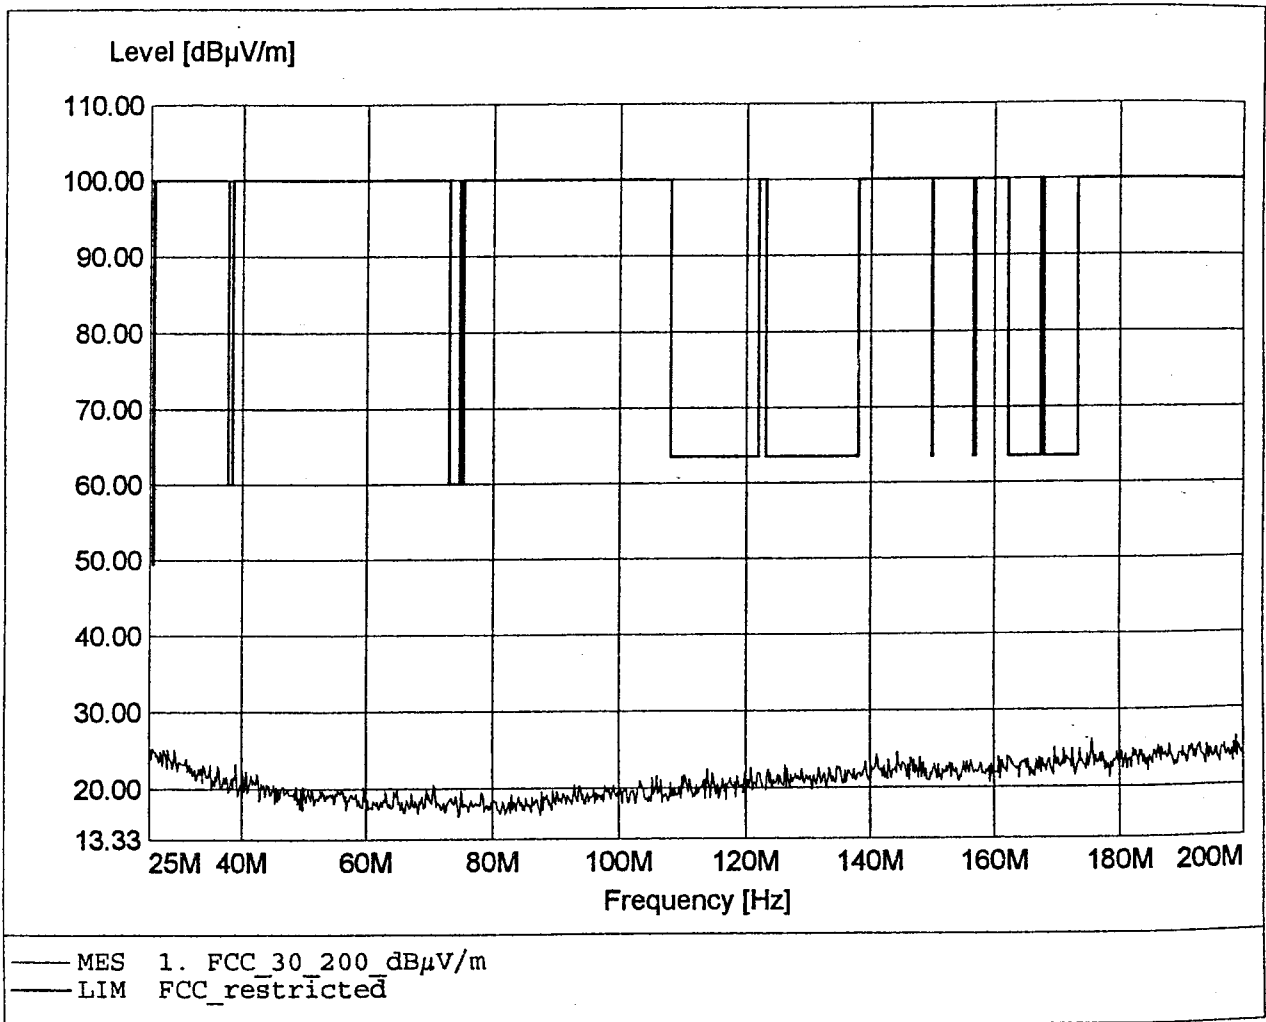

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq:975,99MHz Pmax:34,74dBμV/m

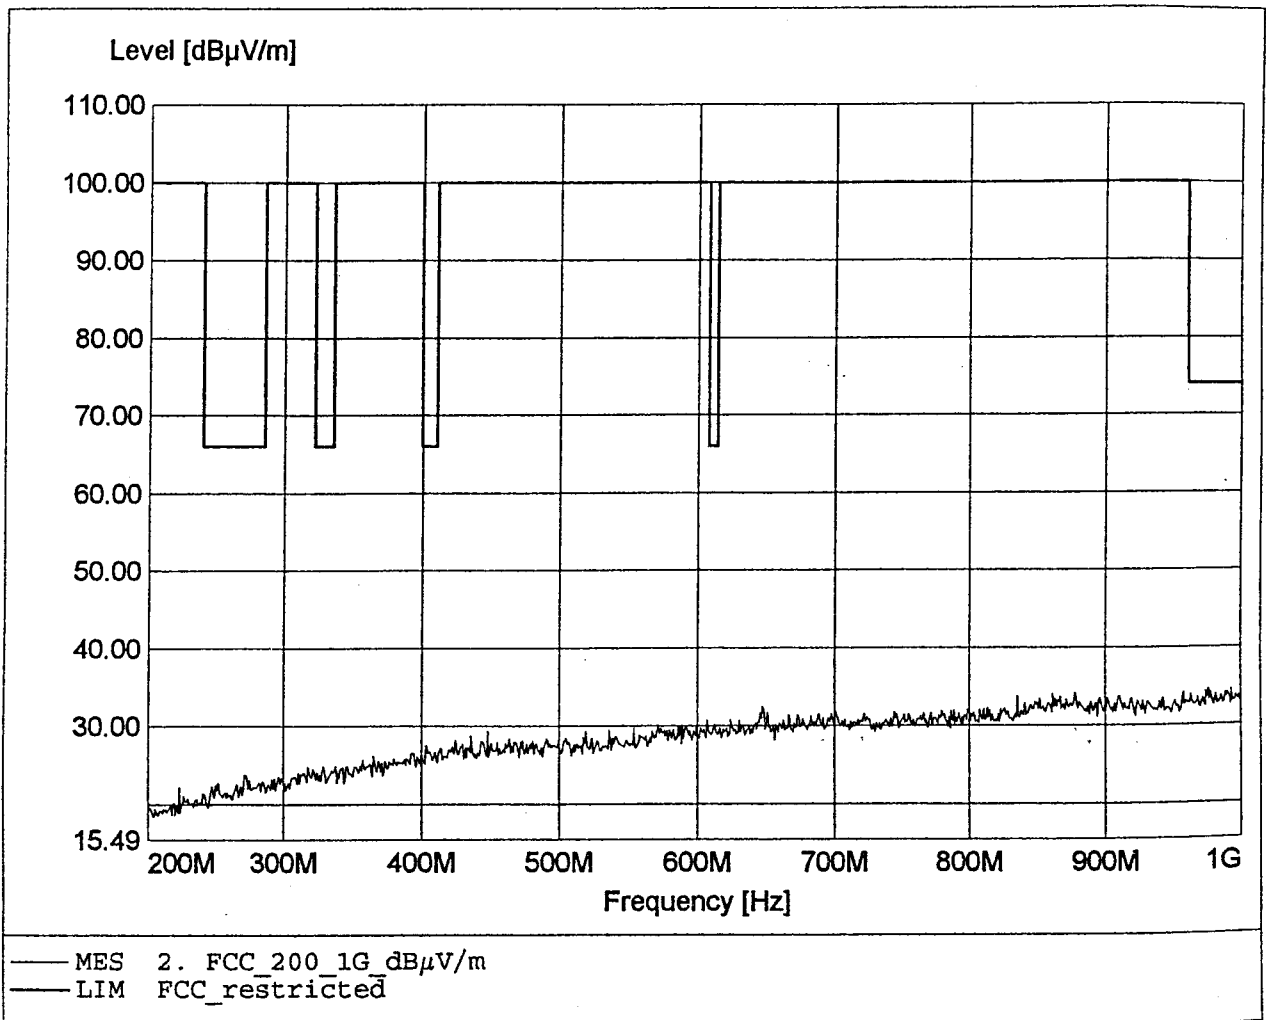

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq:941,33MHz Pmax:35,45dBμV/m

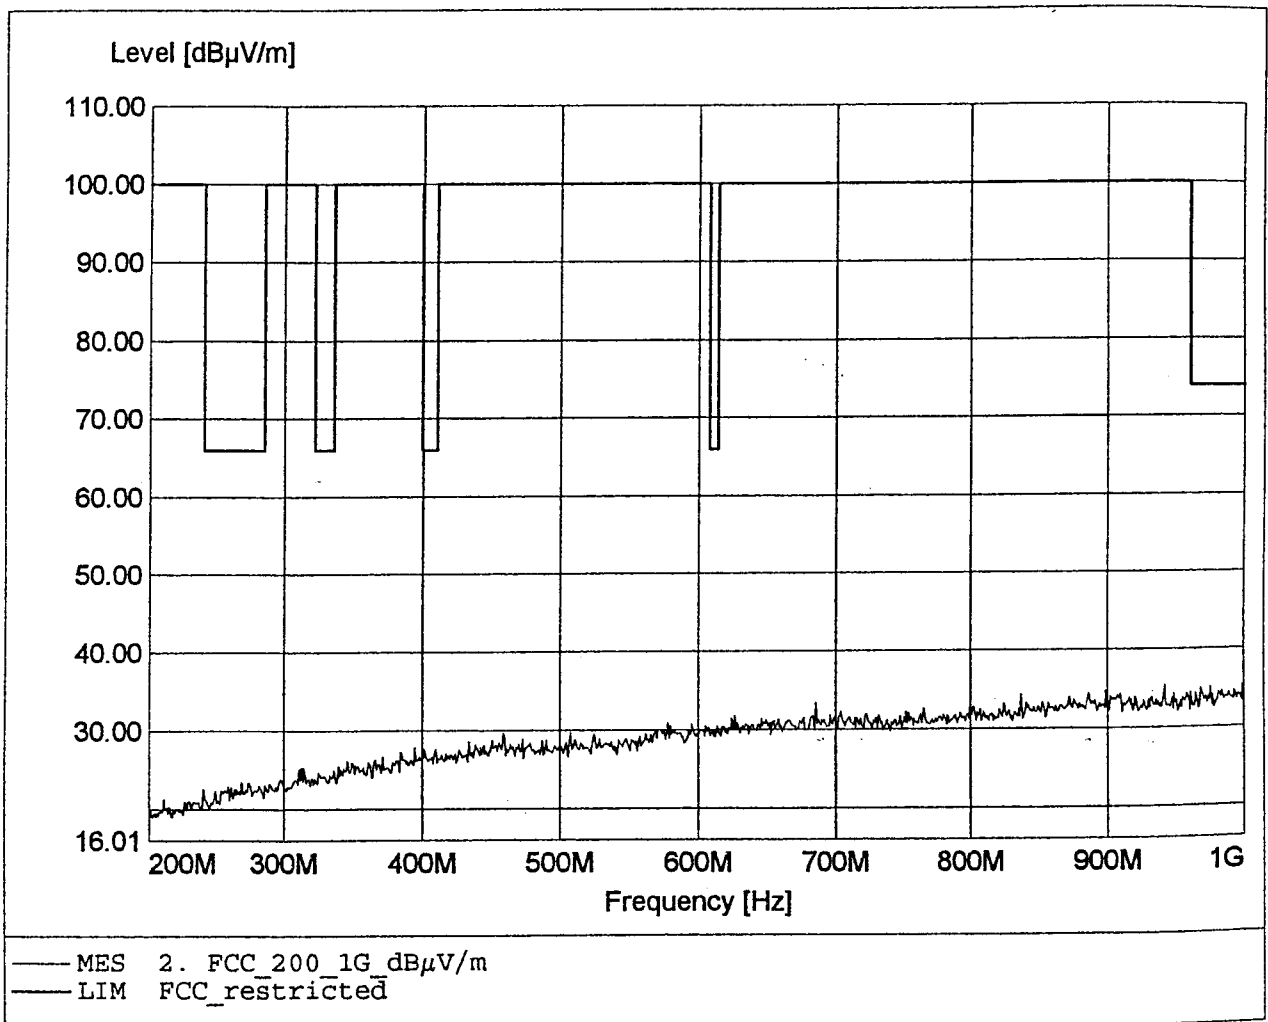

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq:2483,33MHz Pmax:122,73dBμV/m

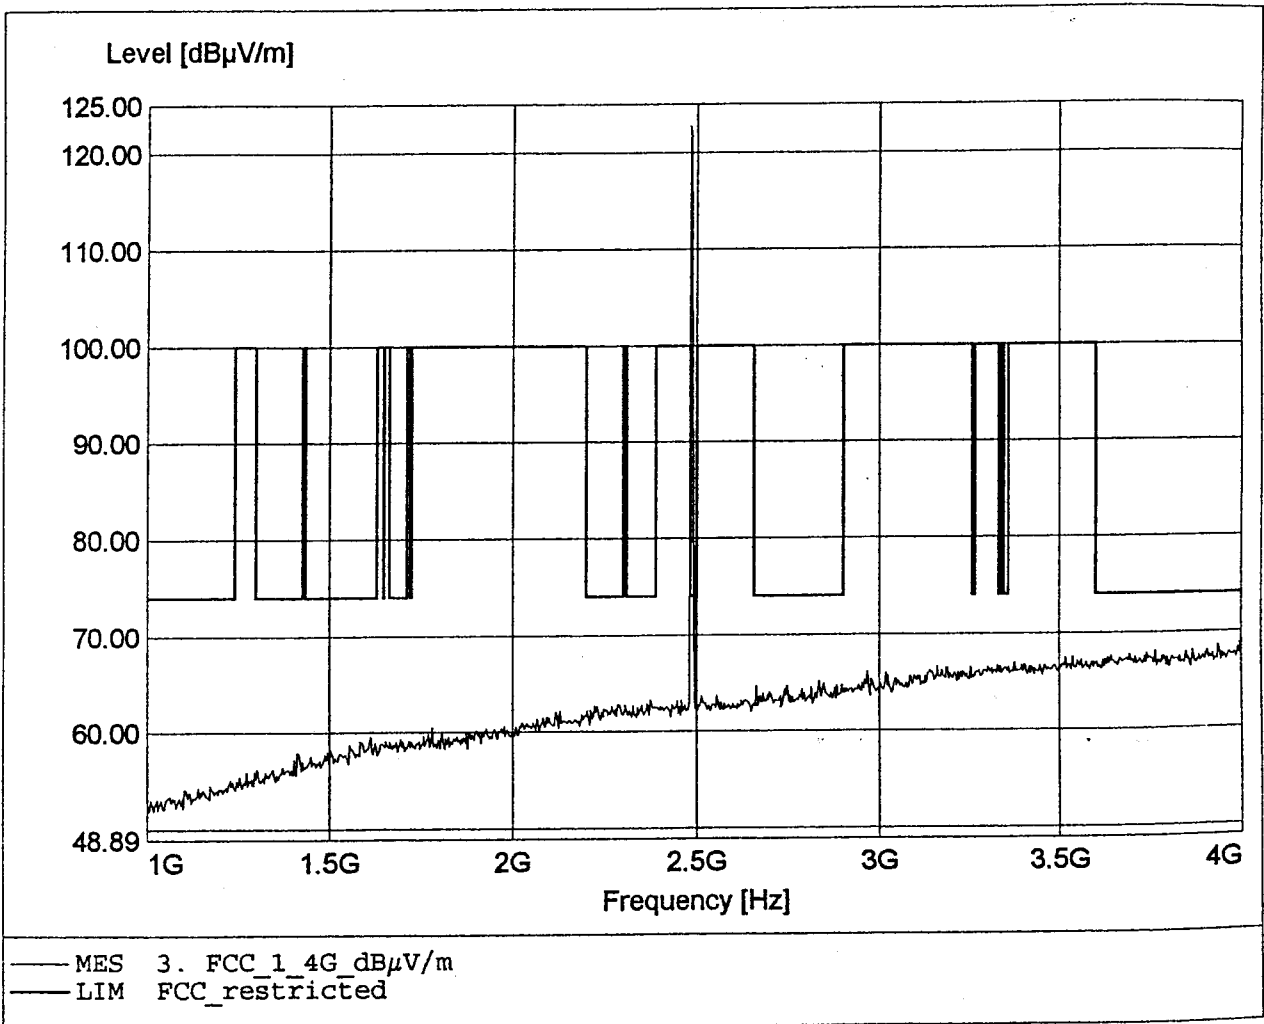

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq:2483,33MHz Pmax:119,18dBμV/m

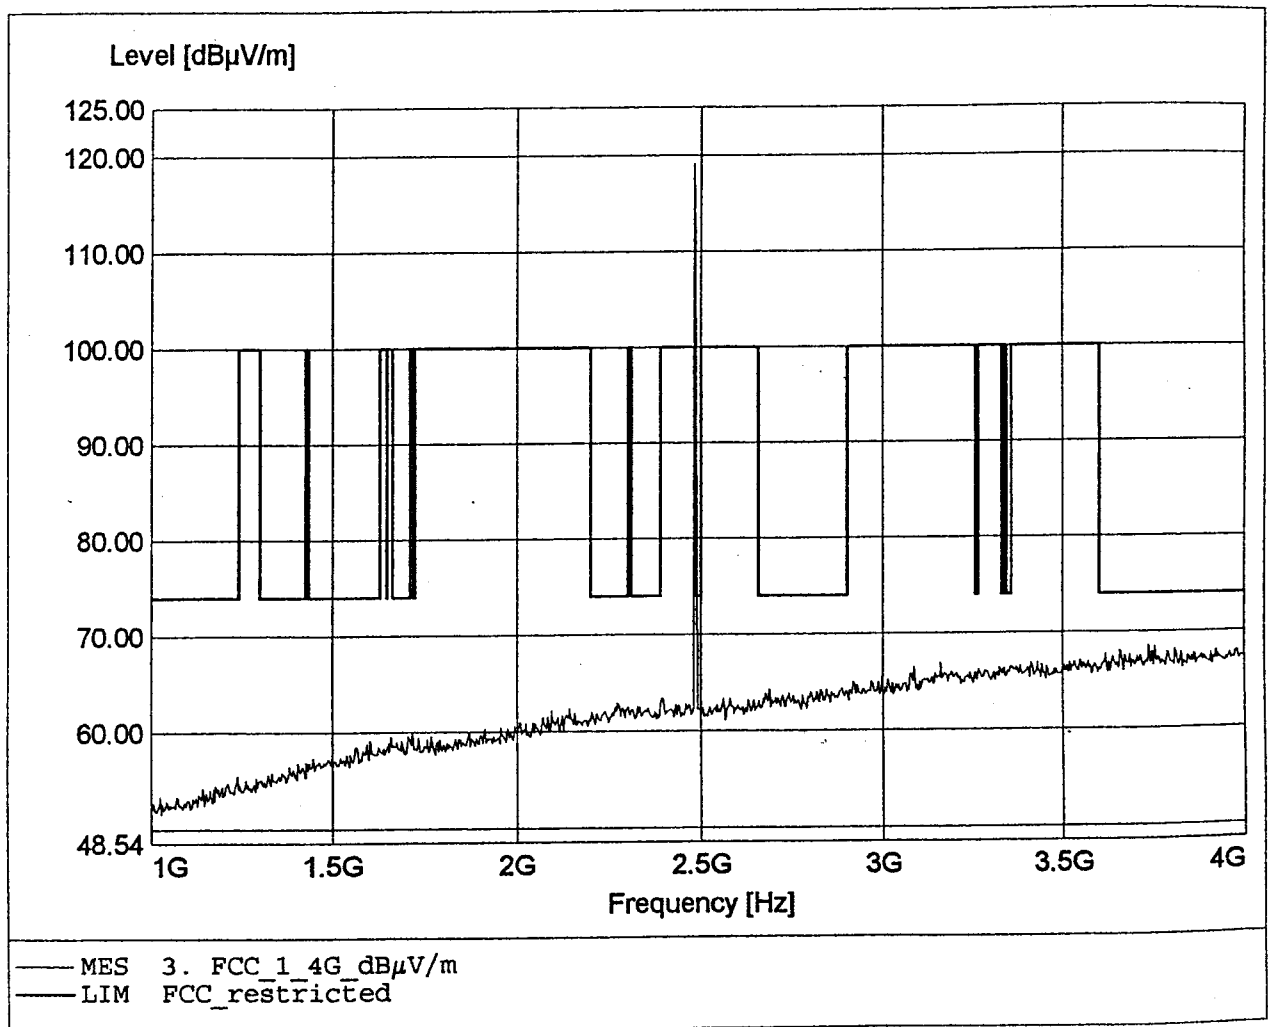

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:4960,00MHz Pmax:64,60dBμV/m

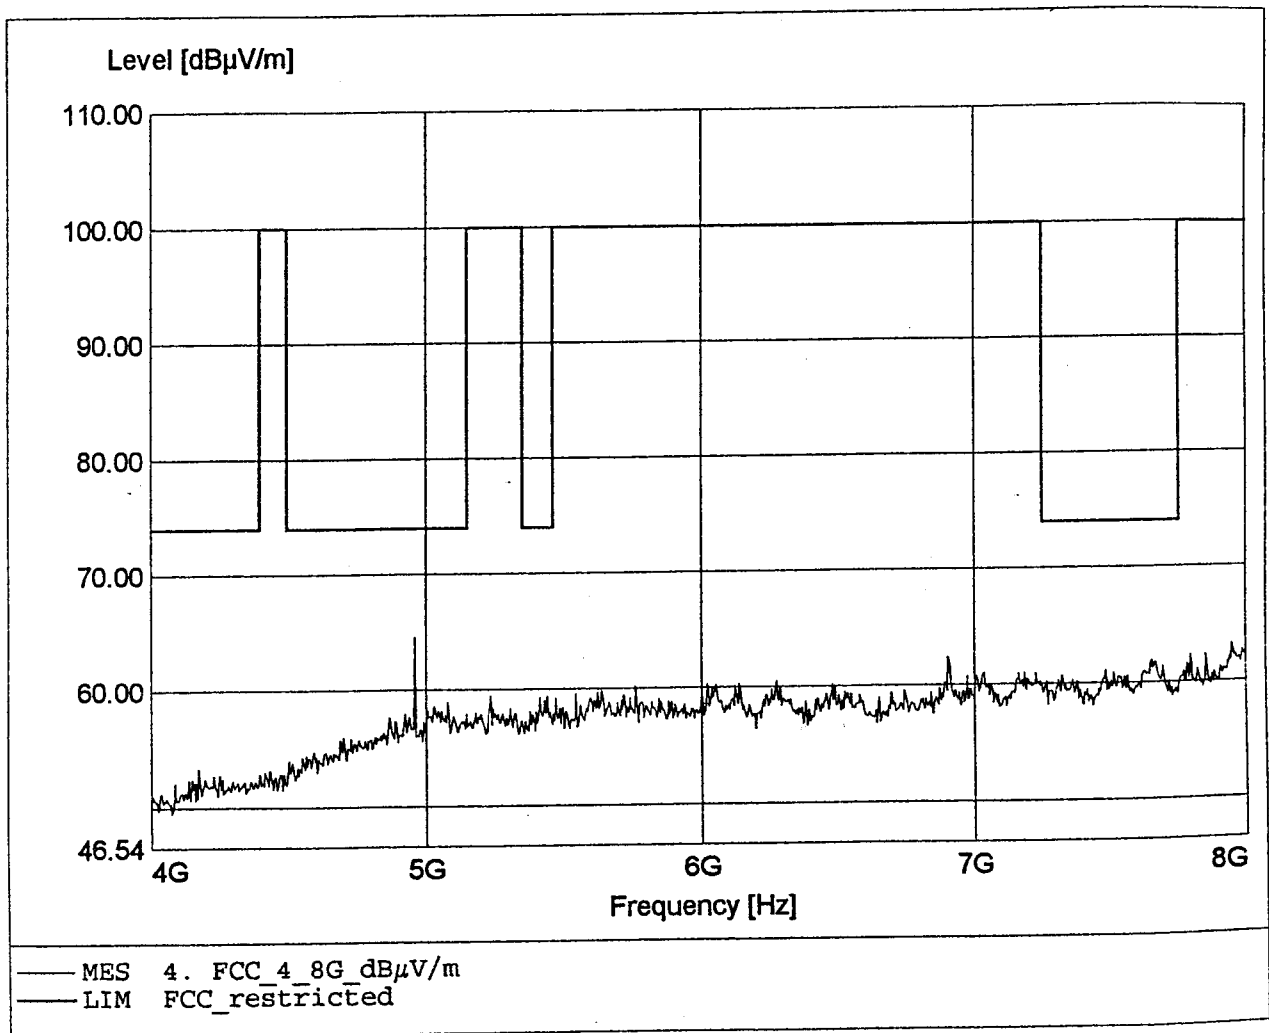

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:7973,33MHz Pmax:65,63dBμV/m

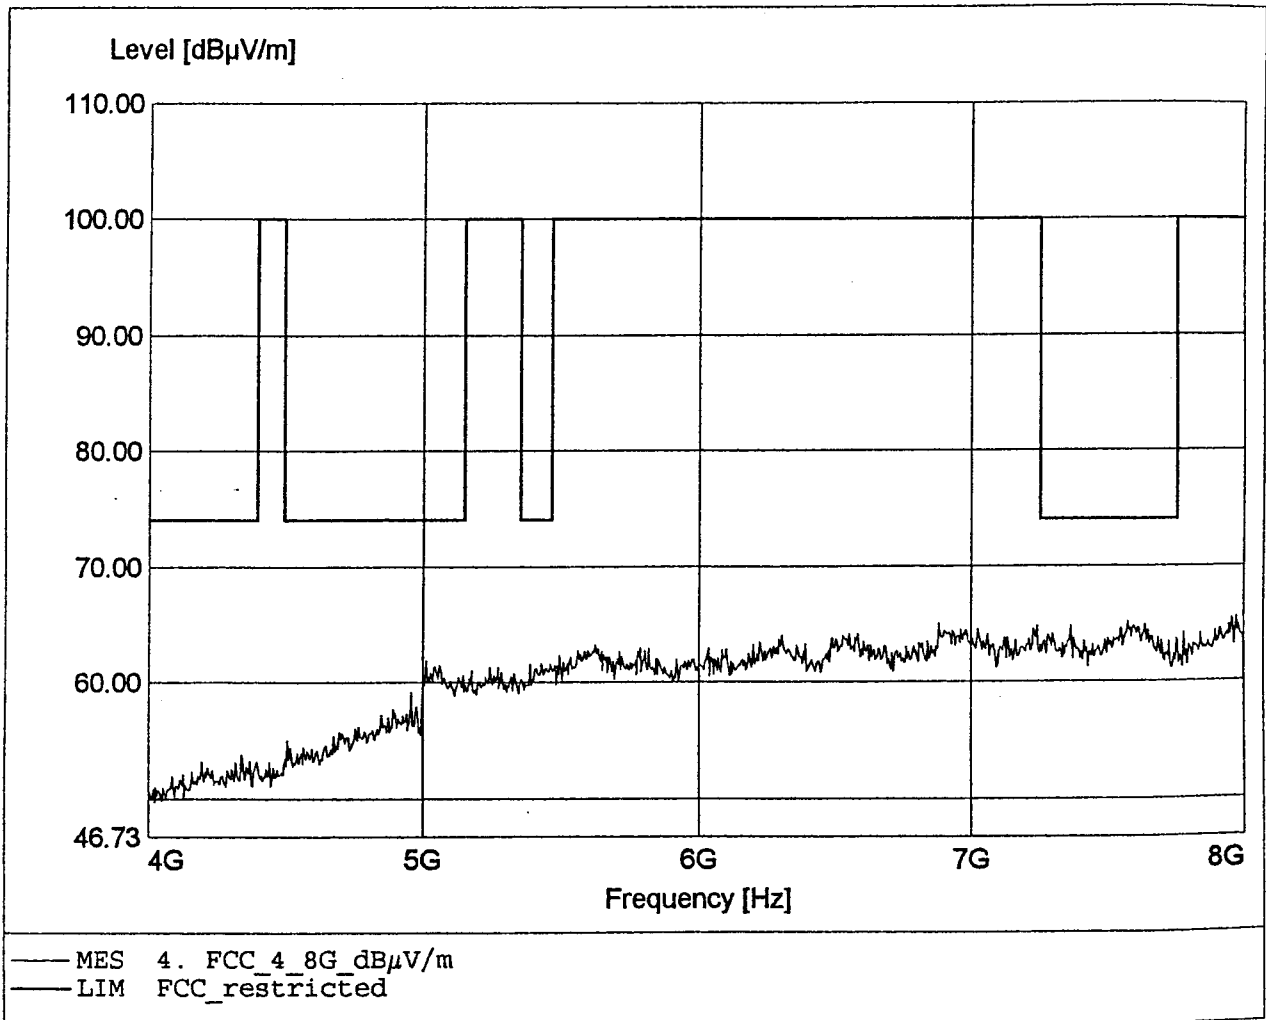

**Spurious emissions (Field Strength Tx)  
FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRF 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S

Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:15511,11MHz Pmax:43,63dBμV/m

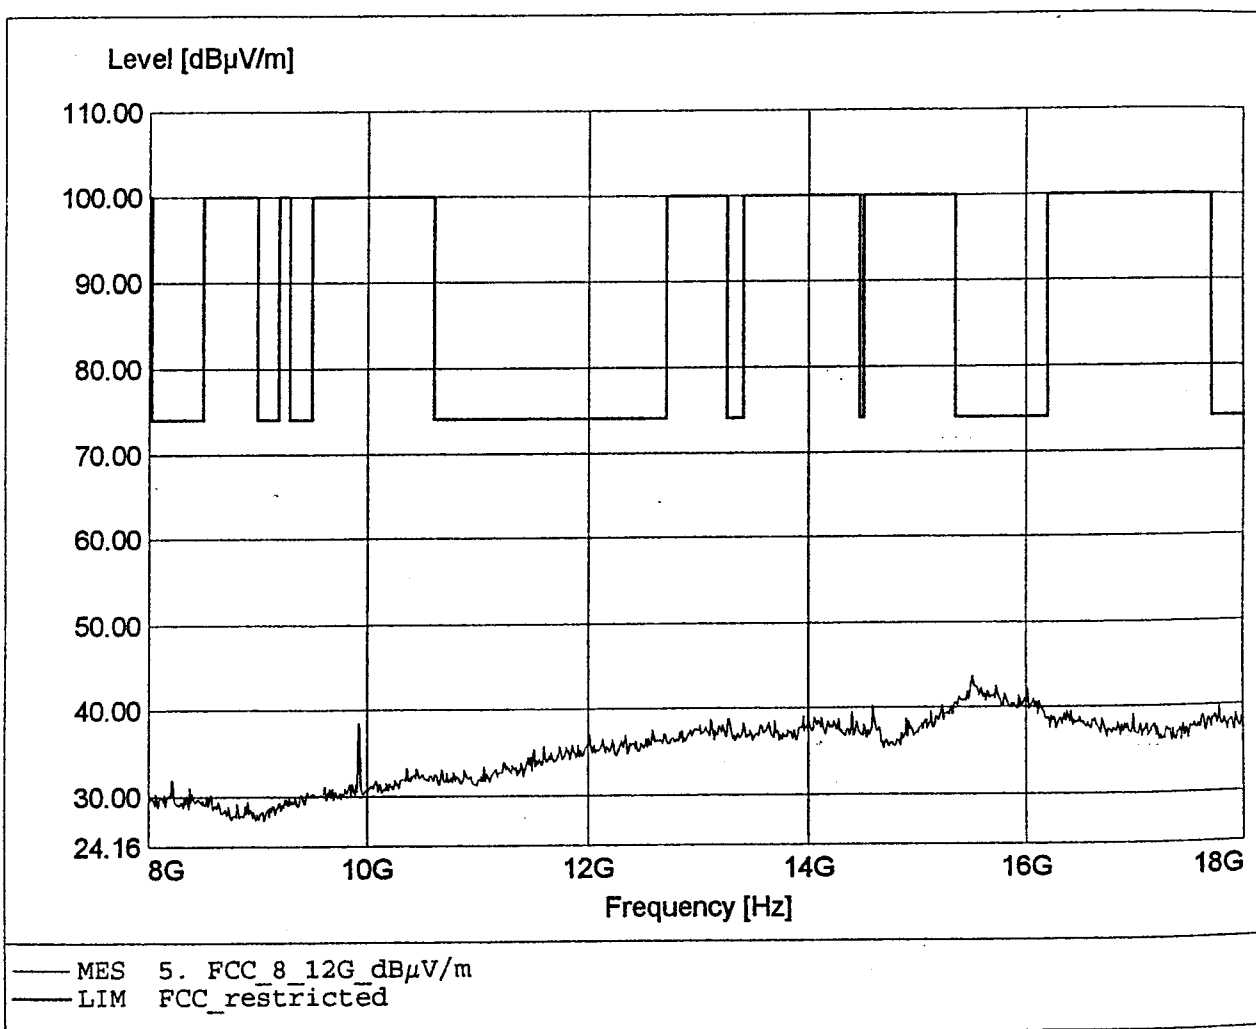




**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRF 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:15544,44MHz Pmax:43,54dBμV/m

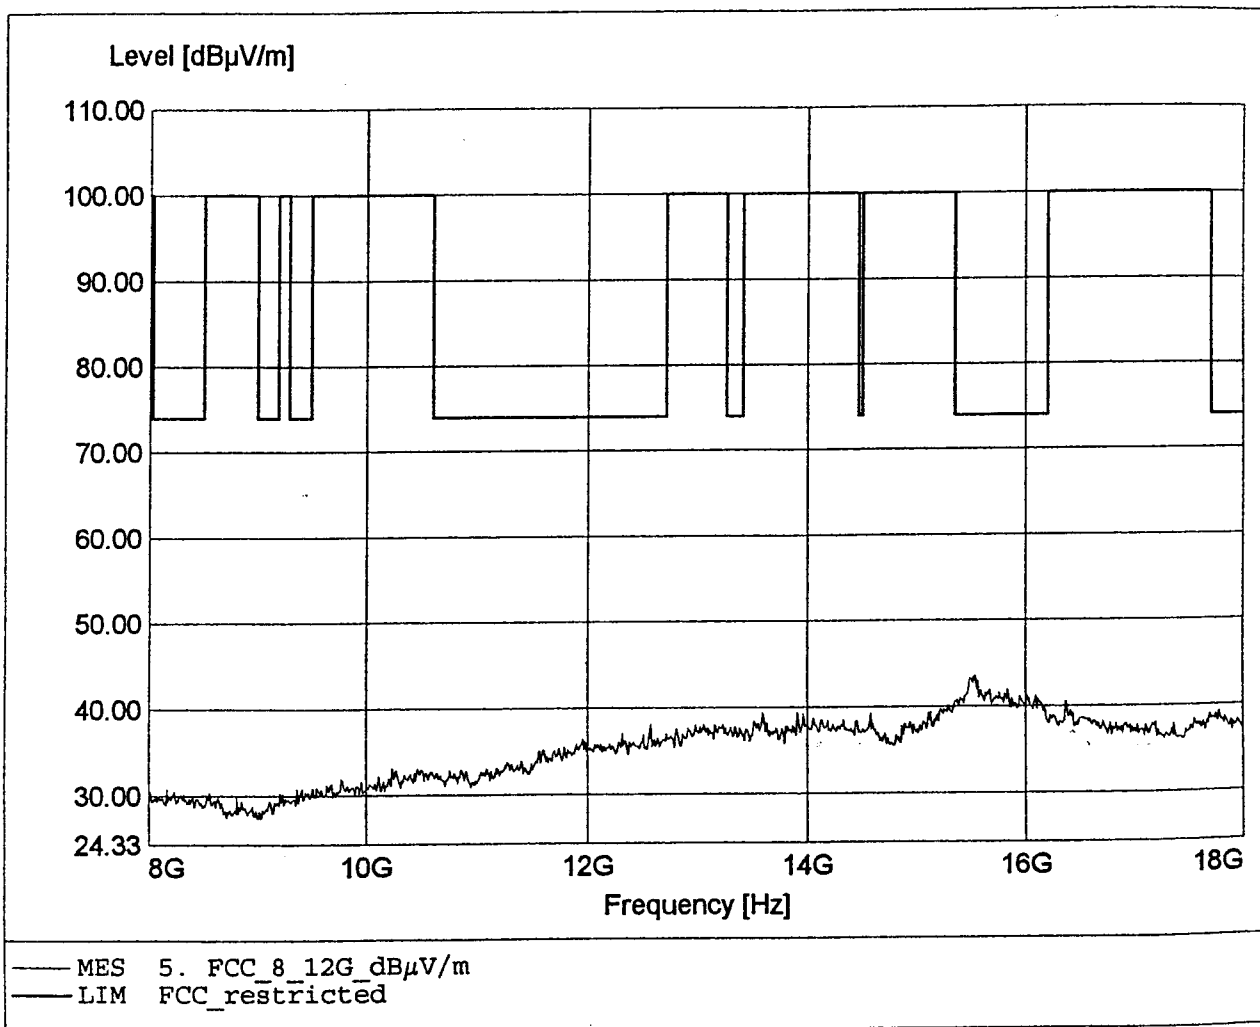

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S


Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:26169,44MHz Pmax:50,73dBµV/m

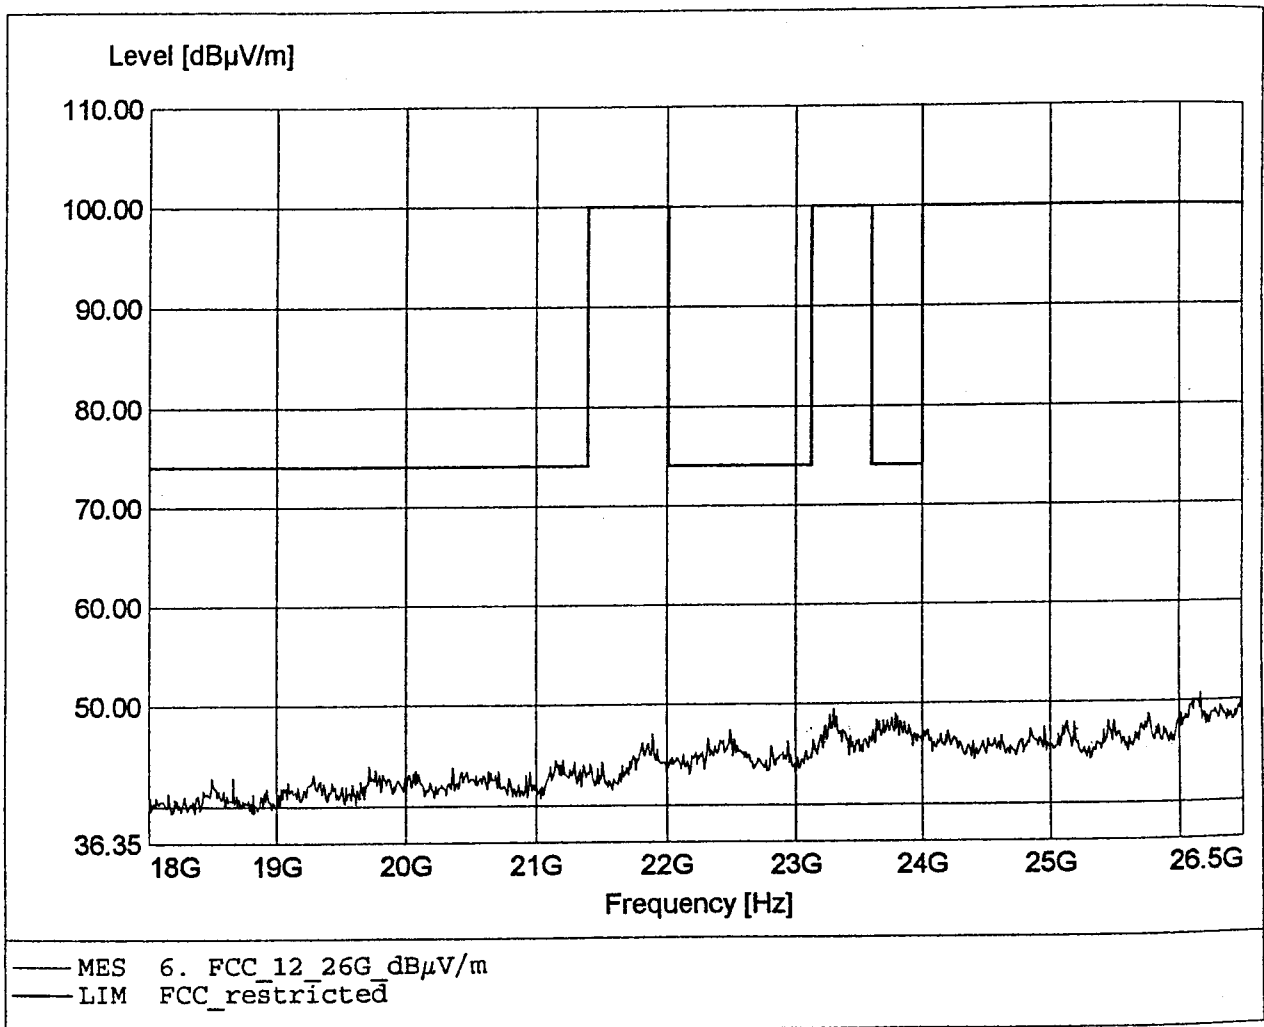

**Spurious emissions (Field Strength Tx)**  
**FCC RULES PART 15, SUBPART C)**

EUT / Model: 2,4 GHz DECT / WRFP 2G4 Ant:Ext. FP (Ch:78 Data:PSRBS)  
Manufacturer: Kirk Telecom A/S

Test Site / Operator: ETS / Mr. Matz  
Temperature/ Voltage: 23°C / 230 V (AC/DC adaptor)  
Test Specification: according to § 15.247 Limit 20dB up duty cycle 4.3%  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq:26150,55MHz Pmax:51,37dBµV/m

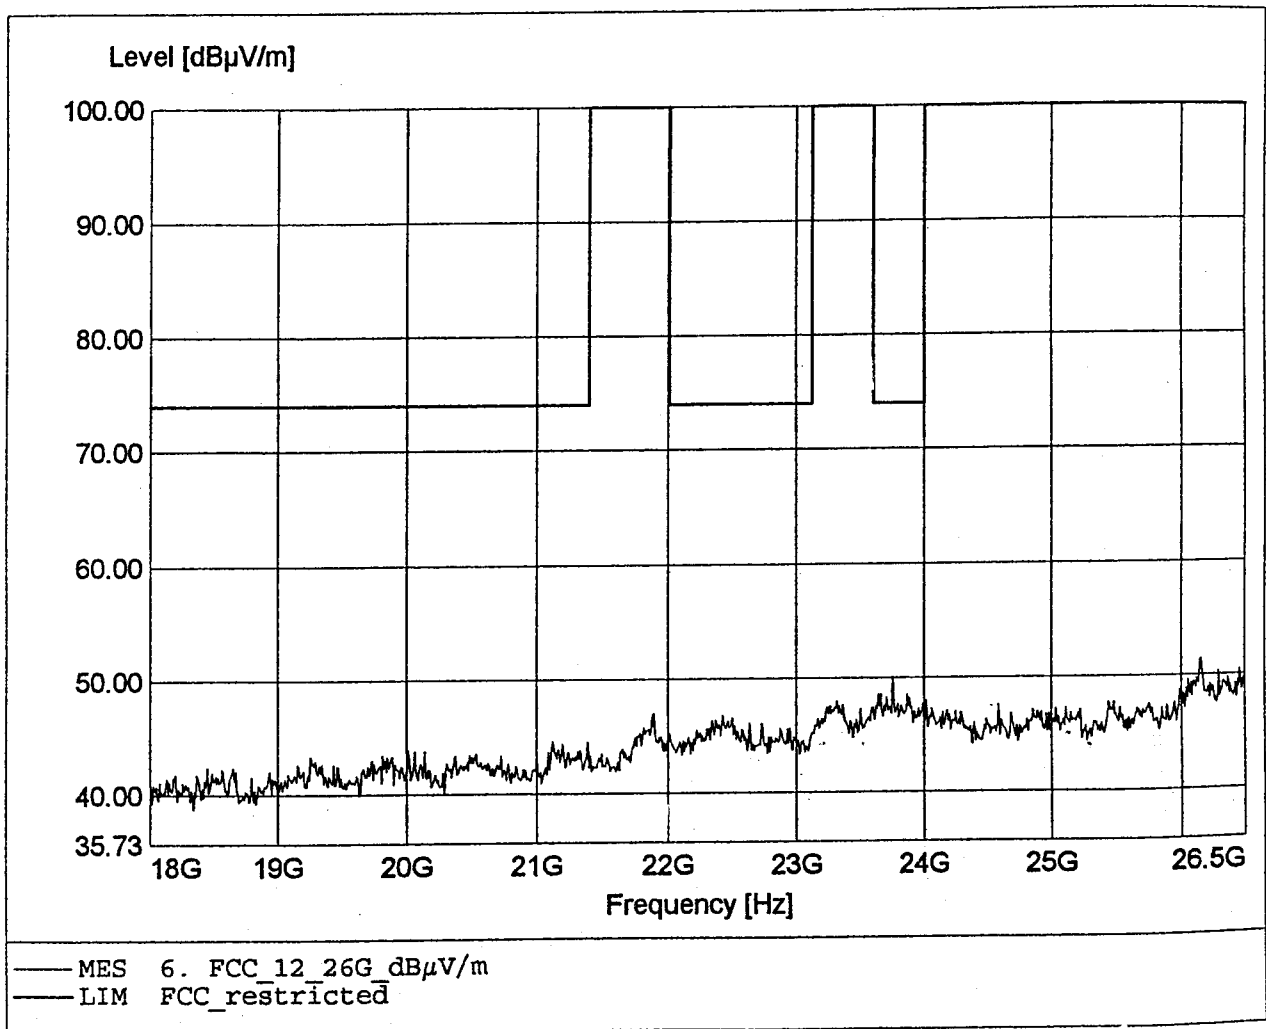



## Appendix D

Spurious Emissions conducted - Transmitter operating




## Appendix E

Carrier Frequency Separation



Date 10.Nov.'00 Time 13:11:46 Res.Bw 300.0 kHz[3dB] Vid.Bw 300 kHz  
Ref.Lvl 30.00 dBm Delta 0.58 dB TG.Lvl off  
CF.Stp 307.200 kHz RF.Att 45 dB  
Unit [dBm]


F1 OFF D1 OFF  
F2 OFF D2 OFF  
F2-F1 OFF D1-D2 OFF

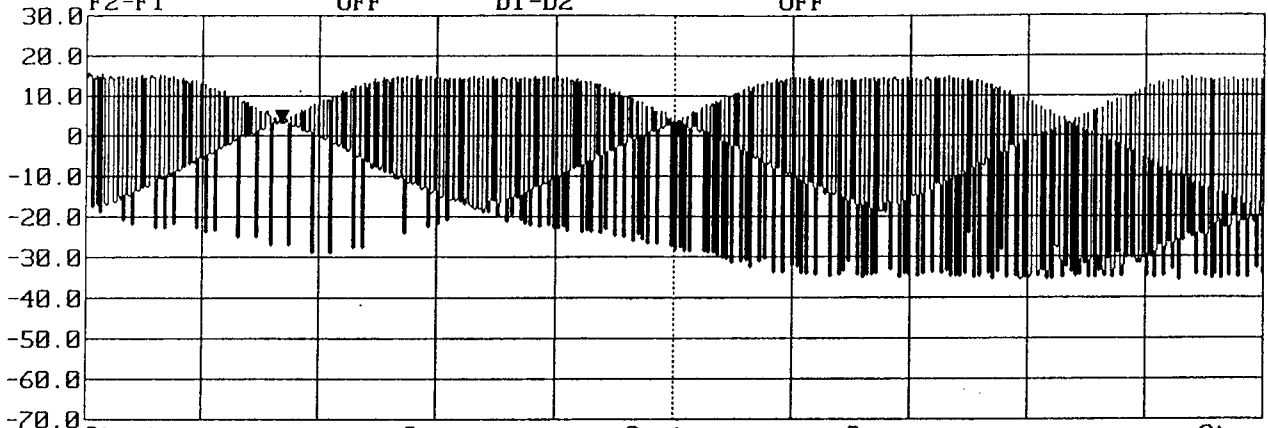

Start 2.44224 GHz Span 3.072 MHz Center 2.443776 GHz Sweep 200 s Stop 2.445312 GHz



Date 10.Nov.'00 Time 13:12:58 Res.Bw 300.0 kHz[3dB] Vid.Bw 300 kHz  
Ref.Lvl 30.00 dBm Delta -0.83 dB TG.Lvl off  
CF.Stp 307.200 kHz RF.Att 45 dB Unit [dBm]  
F1 OFF D1 OFF  
F2 OFF D2 OFF  
F2-F1 OFF D1-D2 OFF

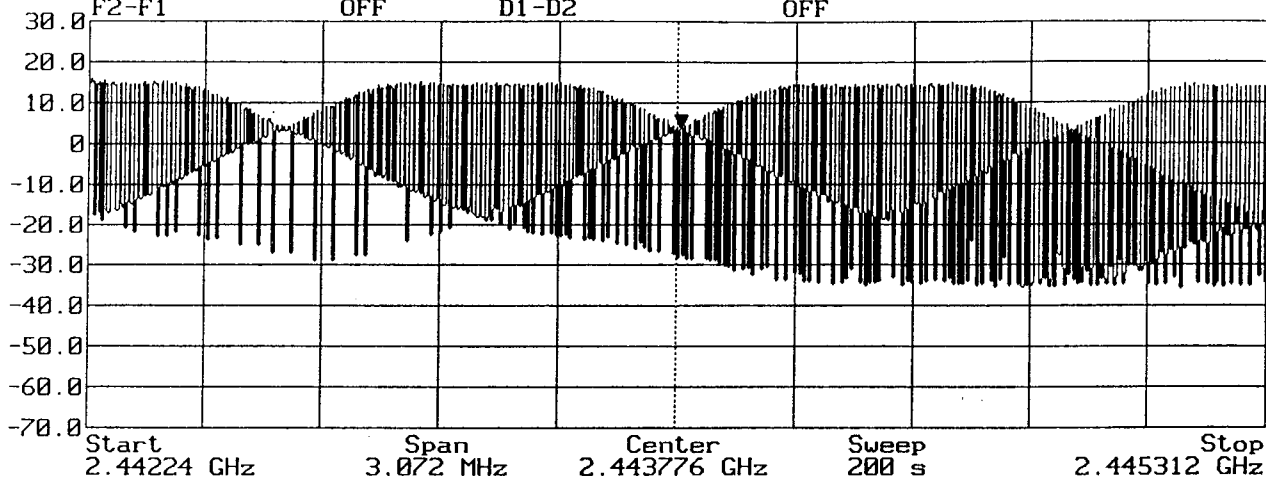



## Appendix F


Number of Hopping Frequencies





Date 10.Nov.'00 Time 12:38:34 Res.Bw 398.4 kHz[3dB] Vid.Bw 3 MHz  
Ref.Lvl 30.00 dBm Delta 0 dB TG.Lvl off RF.Att 45 dB  
CF.Stp 2.176 MHz Unit [dBm]

F1 OFF D1 OFF  
F2 OFF D2 OFF  
F2-F1 OFF D1-D2 OFF

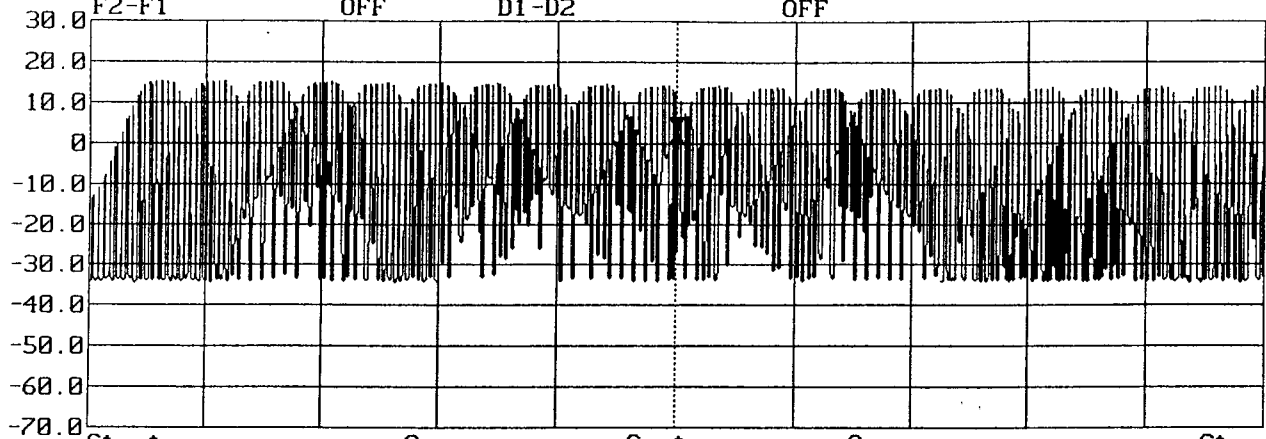


Start 2.4 GHz Span 21.76 MHz Center 2.41088 GHz Sweep 80 s Stop 2.42176 GHz



Date 10.Nov.'00 Time 12:42:31 Res.Bw 398.4 kHz[3dB] Vid.Bw 3 MHz  
Ref.Lvl Delta 0 dB TG.Lvl off RF.Att 45 dB  
30.00 dBm CF.Stp 2.048 MHz Unit [dBm]

F1 OFF D1 OFF  
F2 OFF D2 OFF  
F2-F1 OFF D1-D2 OFF

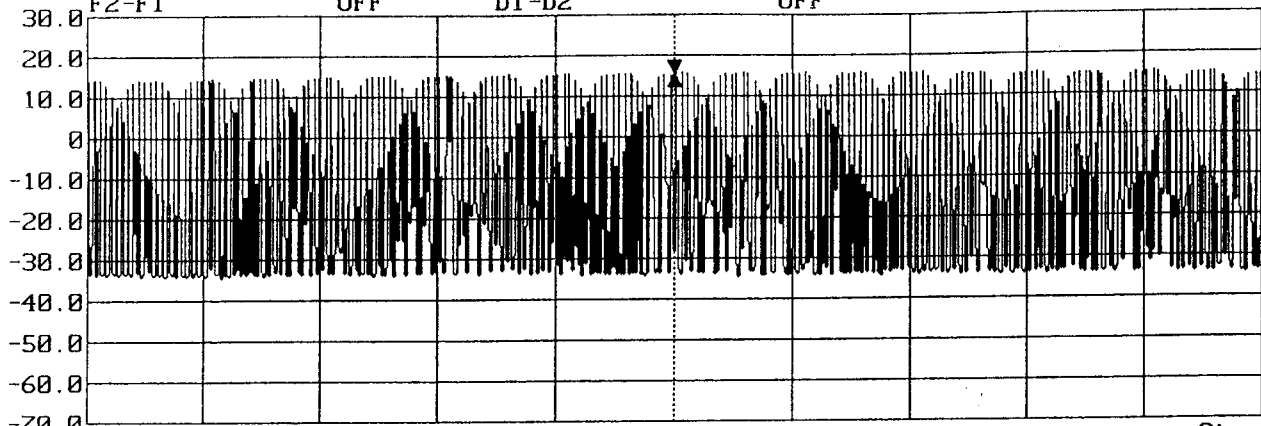


Start 2.42176 GHz Span 20.48 MHz Center 2.432 GHz Sweep 80 s Stop 2.44224 GHz



Date 10.Nov.'00 Time 12:48:26  
Ref.Lvl  
30.00 dBm

Res.Bw 398.4 kHz[3dB] Vid.Bw 3 MHz  
TG.Lvl off  
CF.Stp 2.048 MHz RF.Att 45 dB  
Unit [dBm]

F1 OFF D1 OFF  
F2 OFF D2 OFF  
F2-F1 OFF D1-D2 OFF

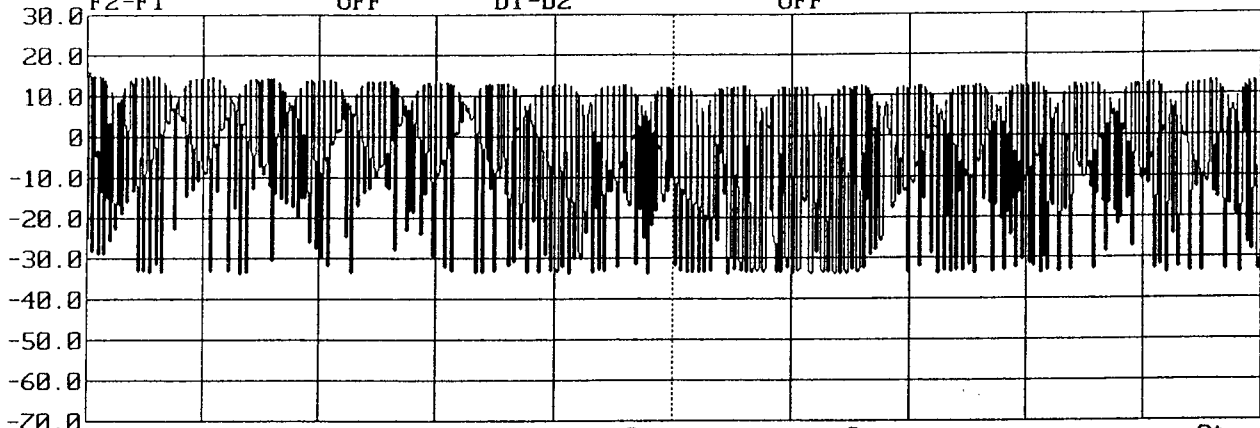

Start 2.44224 GHz Span 20.48 MHz Center 2.45248 GHz Sweep 80 s Stop 2.46272 GHz




Date 10.Nov.'00 Time 12:56:58

Ref.Lvl  
30.00 dBm

Res.Bw 398.4 kHz[3dB] Vid.Bw 3 MHz  
TG.Lvl off  
CF.Stp 2.078 MHz RF.Att 45 dB  
Unit [dBm]

F1	OFF	D1	OFF
F2	OFF	D2	OFF
F2-F1	OFF	D1-D2	OFF

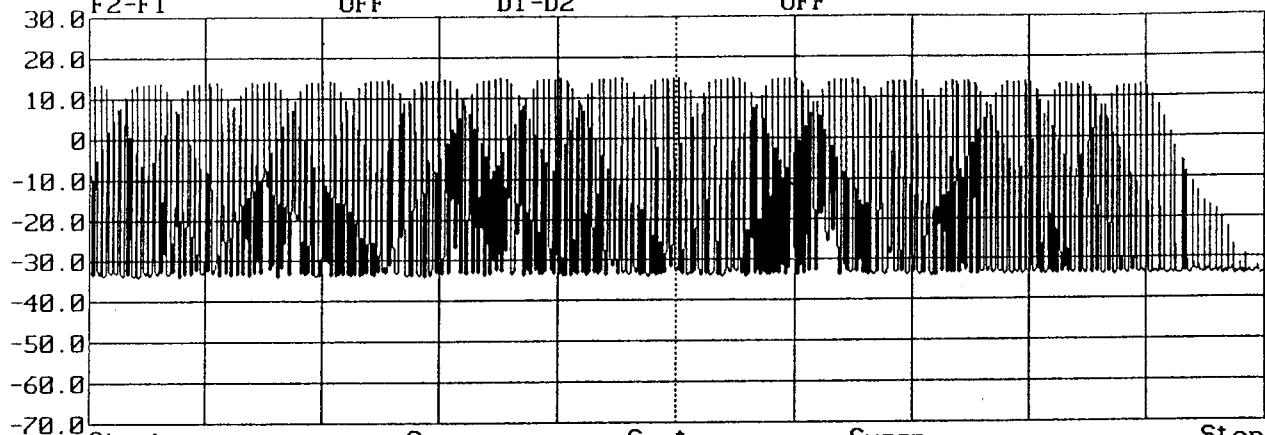

Start	Span	Center	Sweep	Stop
2.46272 GHz	20.78 MHz	2.47311 GHz	80 s	2.4835 GHz




## Appendix G

Time of Occupancy (Dwell Time)



Date 10.Nov.'00 Time 13:44:11 TRG  
Ref.Lvl 30.00 dBm Delta -9.12 dB  
Res.Bw 1.0 MHz[3dB] Vid.Bw 300 kHz  
TG.Lvl off  
CF.Stp 100.000 kHz RF.Att 45 dB  
Unit [dBm]  
T1 OFF D1 9.55 dBm  
T2 OFF D2 OFF  
T1-T2 OFF D1-D2 OFF

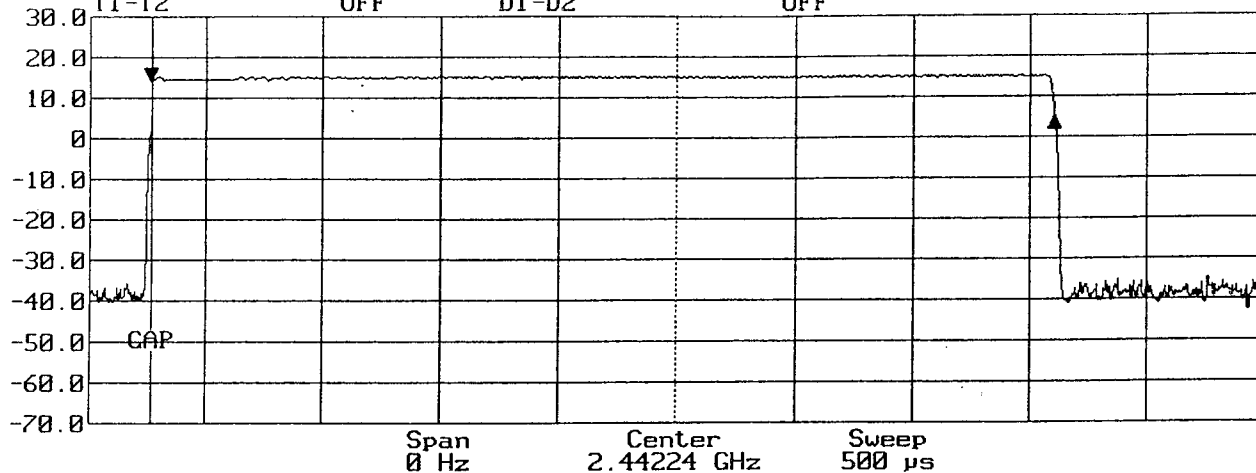




## Appendix H

20dB Bandwidth



Date 10.Nov.'00 Time 12:12:14 Res.Bw 10.0 kHz [3dB] Vid.Bw 100 kHz  
Ref.Lvl 15.00 dBm Delta -22.12 dB TG.Lvl off  
CF.Stp 500.0 kHz RF.Att 45 dB Unit [dBm]  
F1 2.40178222227 GHz D1 9.47 dBm  
F2 2.40078888892 GHz D2 -10.53 dBm  
F2-F1 993.33335 kHz D1-D2 -20.00 dBm

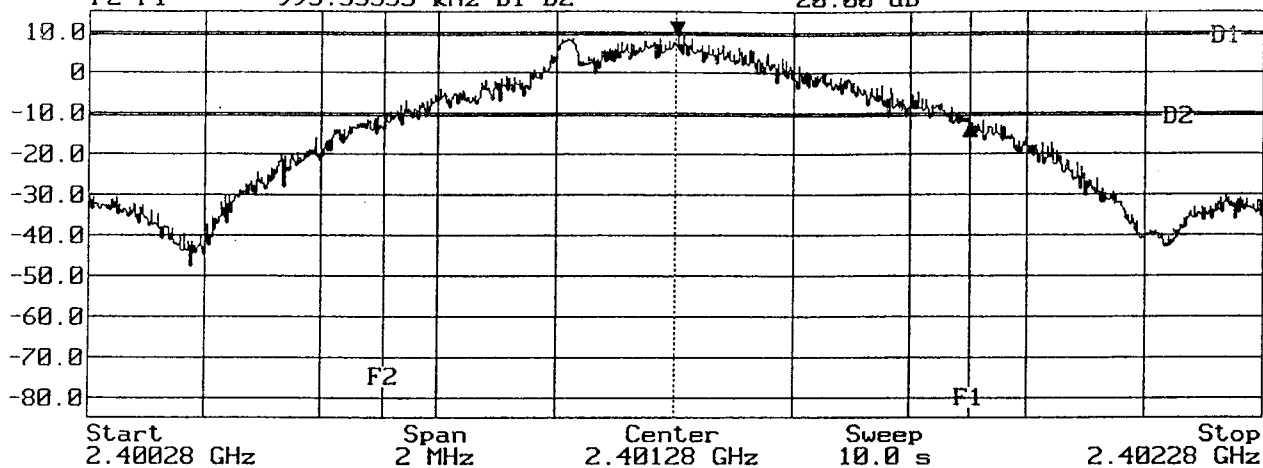






Date 10.Nov.'00 Time 12:14:15  
Ref.Lvl 15.00 dBm Delta 0 dB  
F1 2.4427555553 GHz D1  
F2 2.4417577779 GHz D2  
F2-F1 997.77774 kHz D1-D2


Res.Bw 10.0 kHz [3dB] Vid.Bw 100 kHz  
TG.Lvl off  
CF.Stp 200.000 kHz RF.Att 45 dB  
Unit [dBm]

9.11 dBm  
-10.89 dBm  
-20.00 dB

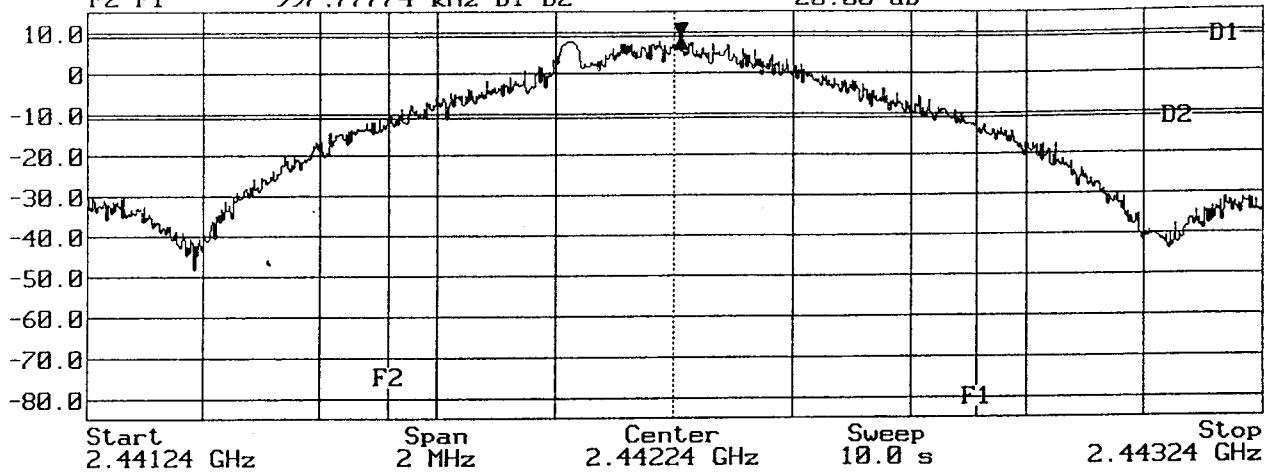




Date 10.Nov.'00 Time 12:20:21 Res.Bw 10.0 kHz[3dB] Vid.Bw 100 kHz  
Ref.Lvl 15.00 dBm Delta -21.68 dB TG.Lvl off  
15.00 dBm 502.2 kHz CF.Stp 200.000 kHz RF.Att 45 dB [dBm]  
Unit  
F1 2.48165866663 GHz D1 7.36 dBm  
F2 2.48065866670 GHz D2 -12.64 dBm  
F2-F1 999.99993 kHz D1-D2 -20.00 dB

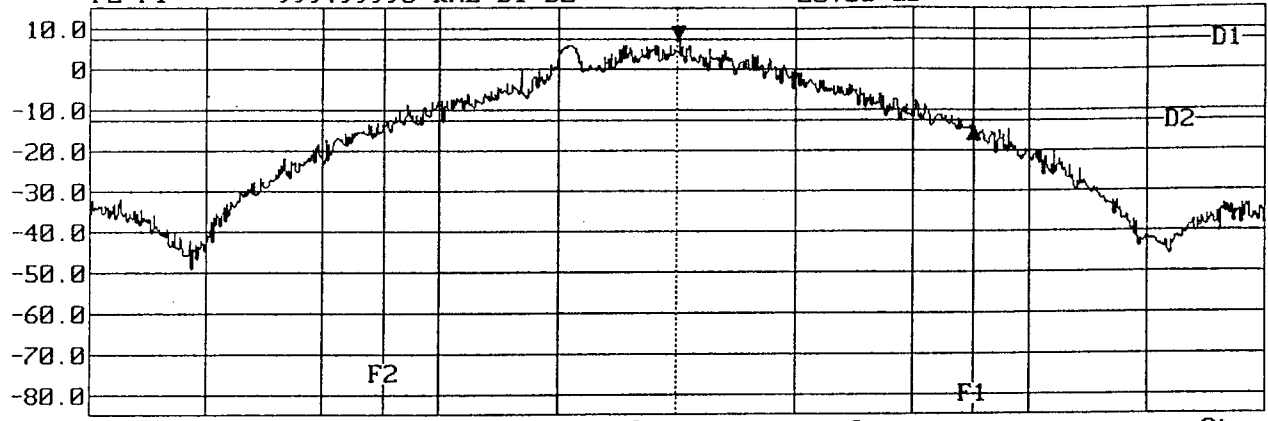

Start 2.480152 GHz Span 2 MHz Center 2.481152 GHz Sweep 10.0 s Stop 2.482152 GHz




## Appendix I

Band-edge Compliance of RF Emissions




Date 10.Nov.'00 Time 12:28:36 Res.Bw 10.0 kHz [3dB] Vid.Bw 100 kHz  
Ref.Lvl 15.00 dBm Delta 0 dB TG.Lvl off RF.Att 45 dB  
15.00 dBm 0 Hz CF.Stp 500.000 kHz Unit [dBm]  
F1 2.400000000000 GHz D1 9.55 dBm  
F2 2.40076333331 GHz D2 -10.45 dBm  
F2-F1 -763.33331 kHz D1-D2 -20.00 dB

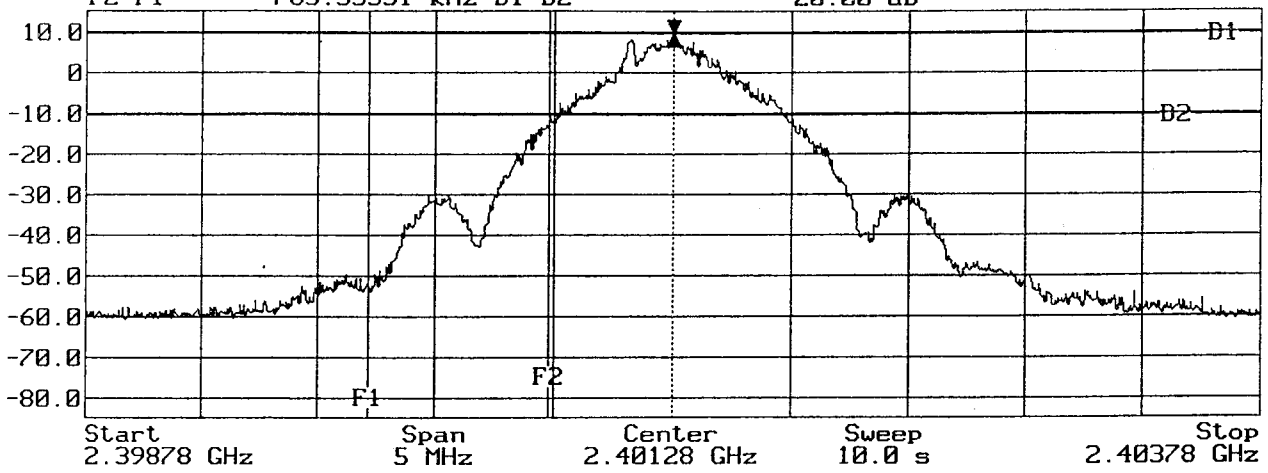



Date 10.Nov.'00 Time 12:24:04 Res.Bw 10.0 kHz[3dB] Vid.Bw 100 kHz  
Ref.Lvl Delta -61.33 dB TG.Lvl off RF.Att 45 dB  
15.00 dBm 1.266 MHz CF.Stp 500.000 kHz Unit [dBm]  
F1 2.483500000000 GHz D1 7.67 dBm  
F2 2.48161977784 GHz D2 -12.33 dBm  
F2-F1 1.88022216 MHz D1-D2 -20.00 dB

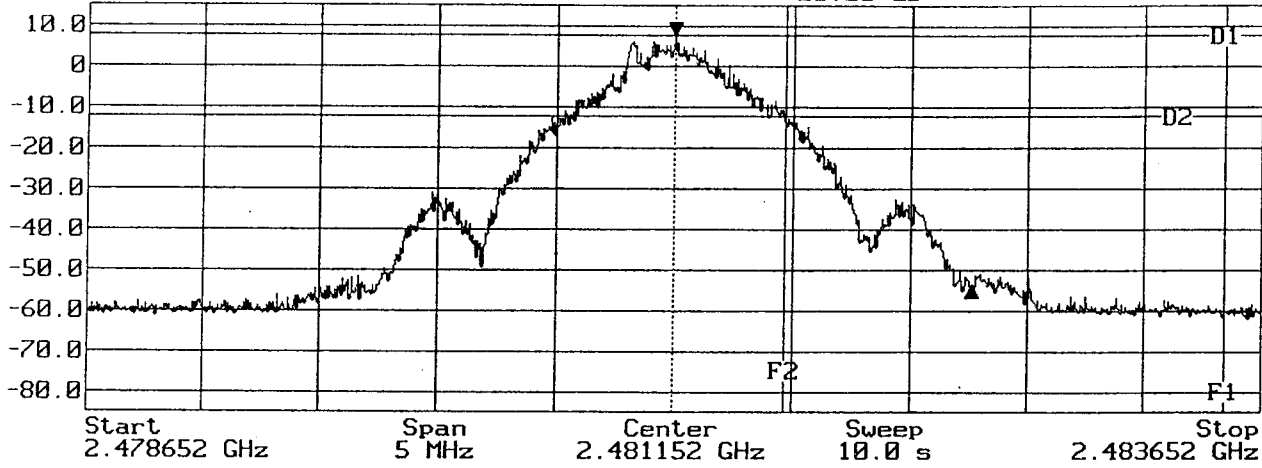



## Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: 2.4 GHz COMMUNICATION SYSTEM  
Manufacturer: KIRK TELECOM A/S  
Operating Condition: Unom: 230VAC(AC/DC-adaptor) , Tnom: 23°C  
Test Site: ETS  
Operator: Mr. Marquardt  
Test Specification: V-Network: ESH3-Z5  
Comment: model: WRFP4 2G4 mode: active

