

FCC TEST REPORT

REPORT NO.: RF940923L11

MODEL NO.: APRT-2518GS

RECEIVED: Sep. 26, 2005

TESTED: Oct. 06, 2005 ~ Mar. 10, 2006

ISSUED: Mar. 16, 2006

APPLICANT: RFNet Technologies Pte Ltd.

ADDRESS: 801 Lorong 7 Toa Payoh #05-02 Wearnes
Technology Building Singapore 319319

ISSUED BY : Advance Data Technology Corporation

LAB ADDRESS : No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION : No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 76 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

| | | |
|-------|--|----|
| 1 | CERTIFICATION..... | 4 |
| 2 | SUMMARY OF TEST RESULTS | 5 |
| 2.1 | MEASUREMENT UNCERTAINTY | 5 |
| 3 | GENERAL INFORMATION..... | 6 |
| 3.1 | GENERAL DESCRIPTION OF EUT..... | 6 |
| 3.2 | DESCRIPTION OF TEST MODES..... | 7 |
| 3.2.1 | CONFIGURATION OF SYSTEM UNDER TEST | 7 |
| 3.2.2 | TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... | 8 |
| 3.3 | GENERAL DESCRIPTION OF APPLIED STANDARDS..... | 10 |
| 3.4 | DESCRIPTION OF SUPPORT UNITS..... | 10 |
| 4 | TEST TYPES AND RESULTS | 11 |
| 4.1 | CONDUCTED EMISSION MEASUREMENT | 11 |
| 4.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT..... | 11 |
| 4.1.2 | TEST INSTRUMENTS..... | 11 |
| 4.1.3 | TEST PROCEDURES | 12 |
| 4.1.4 | DEVIATION FROM TEST STANDARD | 12 |
| 4.1.5 | TEST SETUP | 13 |
| 4.1.6 | EUT OPERATING CONDITIONS | 13 |
| 4.1.7 | TEST RESULTS | 14 |
| 4.2 | RADIATED EMISSION MEASUREMENT | 22 |
| 4.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT..... | 22 |
| 4.2.2 | TEST INSTRUMENTS..... | 23 |
| 4.2.3 | TEST PROCEDURES | 24 |
| 4.2.4 | DEVIATION FROM TEST STANDARD | 24 |
| 4.2.5 | TEST SETUP | 25 |
| 4.2.6 | EUT OPERATING CONDITIONS | 25 |
| 4.2.7 | TEST RESULTS | 26 |
| 4.3 | 6dB BANDWIDTH MEASUREMENT | 35 |
| 4.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT | 35 |
| 4.3.2 | TEST INSTRUMENTS..... | 35 |
| 4.3.3 | TEST PROCEDURE..... | 36 |
| 4.3.4 | DEVIATION FROM TEST STANDARD | 36 |
| 4.3.5 | TEST SETUP | 36 |
| 4.3.6 | EUT OPERATING CONDITIONS | 36 |
| 4.3.7 | TEST RESULTS | 37 |
| 4.4 | MAXIMUM PEAK OUTPUT POWER | 45 |
| 4.4.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT..... | 45 |
| 4.4.2 | TEST INSTRUMENTS..... | 45 |
| 4.4.3 | TEST PROCEDURES | 46 |
| 4.4.4 | DEVIATION FROM TEST STANDARD | 46 |
| 4.4.5 | TEST SETUP | 46 |
| 4.4.6 | EUT OPERATING CONDITIONS | 46 |



| | | |
|-------|--|-----|
| 4.4.7 | TEST RESULTS | 47 |
| 4.5 | POWER SPECTRAL DENSITY MEASUREMENT | 49 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT | 49 |
| 4.5.2 | TEST INSTRUMENTS..... | 49 |
| 4.5.3 | TEST PROCEDURE..... | 50 |
| 4.5.4 | DEVIATION FROM TEST STANDARD | 50 |
| 4.5.5 | TEST SETUP | 50 |
| 4.5.6 | EUT OPERATING CONDITIONS | 50 |
| 4.5.7 | TEST RESULTS | 51 |
| 4.6 | BAND EDGES MEASUREMENT | 59 |
| 4.6.1 | LIMITS OF BAND EDGES MEASUREMENT | 59 |
| 4.6.2 | TEST INSTRUMENTS..... | 59 |
| 4.6.3 | TEST PROCEDURE..... | 59 |
| 4.6.4 | DEVIATION FROM TEST STANDARD | 59 |
| 4.6.5 | EUT OPERATING CONDITION | 59 |
| 4.6.6 | TEST RESULTS | 60 |
| 4.7 | ANTENNA REQUIREMENT | 72 |
| 4.7.1 | STANDARD APPLICABLE | 72 |
| 4.7.2 | ANTENNA CONNECTED CONSTRUCTION | 72 |
| 5 | PHOTOGRAPHS OF THE TEST CONFIGURATION..... | 73 |
| 6 | INFORMATION ON THE TESTING LABORATORIES | 75 |
| | APPENDIX-A..... | A-1 |



1 CERTIFICATION

PRODUCT : Wireless Super G Router
MODEL NO.: APRT-2518GS
BRAND: RFNet
APPLICANT : RFNet Technologies Pte Ltd.
TESTED: Oct. 06, 2005 ~ Mar. 10, 2006
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Mar. 16, 2006
Andrea Hsia

TECHNICAL ACCEPTANCE : Leng Chen , **DATE:** Mar. 16, 2006
Responsible for RF Leng Chen

APPROVED BY : Gary Chang , **DATE:** Mar. 16, 2006
Gary Chang / Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C | | | |
|--|---|--------|--|
| Standard Section | Test Type and Limit | Result | REMARK |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit. Minimum passing margin is -10.41dB at 1.688MHz. |
| 15.247(a)(2) | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz | PASS | Meet the requirement of limit. |
| 15.247(b) | Maximum Peak Output Power Limit: max. 30dBm | PASS | Meet the requirement of limit. |
| 15.247(d) | Transmitter Radiated Emissions Limit: Table 15.209 | PASS | Meet the requirement of limit. Minimum passing margin is -1.35dB at 49.44MHz. |
| 15.247(e) | Power Spectral Density Limit: max. 8dBm | PASS | Meet the requirement of limit. |
| 15.247(d) | Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency | PASS | Meet the requirement of limit. |

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|------------------|-------------|
| Conducted emissions | 9kHz~30MHz | 2.44 dB |
| Radiated emissions | 30MHz ~ 200MHz | 3.73 dB |
| | 200MHz ~ 1000MHz | 3.74 dB |
| | 1GHz ~ 18GHz | 2.20 dB |
| | 18GHz ~ 40GHz | 1.88 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|------------------------------|---|
| PRODUCT | Wireless Super G Router |
| MODEL NO. | APRT-2518GS |
| FCC ID | PXP000004 |
| POWER SUPPLY | 5.0Vdc from AC adapter |
| MODULATION TYPE | CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM |
| MODULATION TECHNOLOGY | DSSS, OFDM |
| TRANSFER RATE | 802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (up to 108Mbps for turbo mode) |
| FREQUENCY RANGE | 2412MHz ~ 2462MHz |
| NUMBER OF CHANNEL | 11 for Normal mode / 1 for Turbo mode |
| MAXIMUM OUTPUT POWER | 65.615mW |
| ANTENNA TYPE | Dipole antenna with 0.79dBi gain |
| DATA CABLE | NA |
| I/O PORTS | RJ45 |
| ASSOCIATED DEVICES | NA |

NOTE:

- The EUT was powered by the following adapter:

| | |
|--------------------|--|
| Brand: | EPOCH |
| Model: | EP-DC5-05 |
| Input: | 100-240Vac, 50/60Hz, 260mA |
| Output: | 5Vdc, 1500mA |
| Power Line: | AC 1.45m non-shielded cable without core |

- The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
- The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 108Mbps.
- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES


Eleven channels are provided to this EUT.

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 1 | 2412 MHz | 7 | 2442 MHz |
| 2 | 2417 MHz | 8 | 2447 MHz |
| 3 | 2422 MHz | 9 | 2452 MHz |
| 4 | 2427 MHz | 10 | 2457 MHz |
| 5 | 2432 MHz | 11 | 2462 MHz |
| 6 | 2437 MHz | | |

For 802.11g: One channel is provided to this EUT for turbo mode.

| CHANNEL | FREQUENCY |
|---------|-----------|
| 6 | 2437 MHz |

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

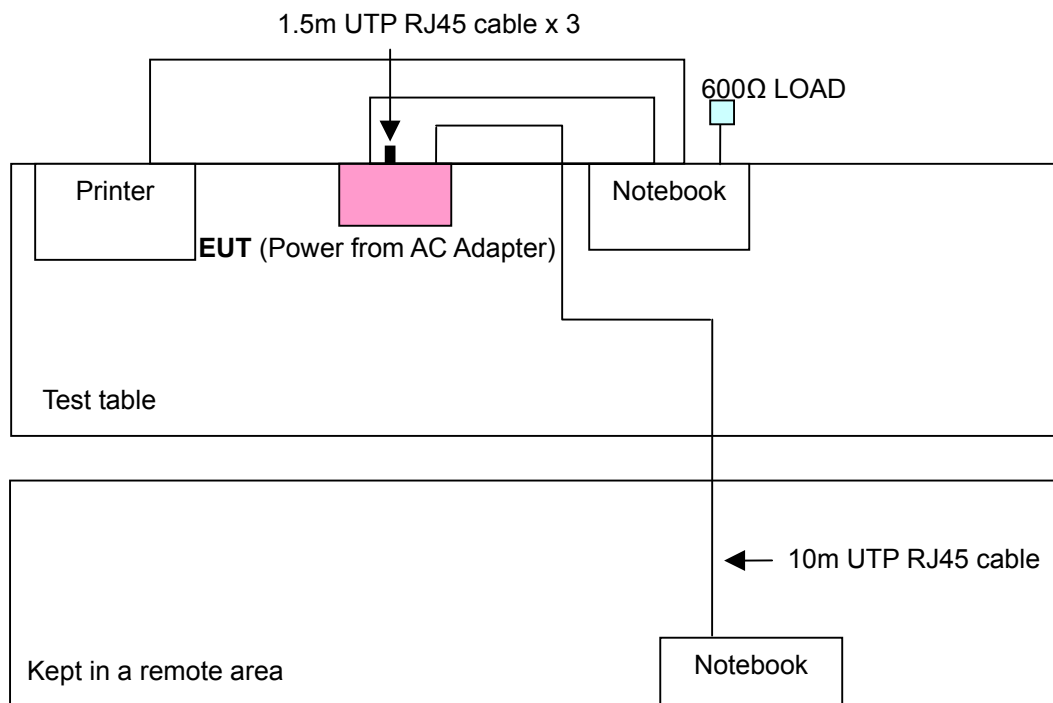

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT configure mode | Applicable to | | | | Description |
|--------------------|---------------|-------|-------|------|-------------|
| | PLC | RE<1G | RE≥1G | APCM | |
| - | √ | √ | √ | √ | - |

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6 |
| 802.11g Turbo | 6 | 6 | OFDM | QPSK | 12 |

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11g | 1 to 11 | 11 | OFDM | BPSK | 6 |
| 802.11g Turbo | 6 | 6 | OFDM | QPSK | 12 |

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6 |
| 802.11g Turbo | 6 | 6 | OFDM | QPSK | 12 |

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 11 | DSSS | CCK | 11 |
| 802.11g | 1 to 11 | 1, 11 | OFDM | BPSK | 6 |
| 802.11g Turbo | 6 | 6 | OFDM | QPSK | 12 |

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|---------------|-------------------|----------------|-----------------------|-----------------|------------------|
| 802.11b | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6 |
| 802.11g Turbo | 6 | 6 | OFDM | QPSK | 12 |



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|-------------------|--------|-----------|-------------|------------------|
| 1 | NOTEBOOK COMPUTER | Compaq | N800C | 470048-515 | FCC DoC Approved |
| 2 | PRINTER | EPSON | LQ-300+ | DCGY054147 | FCC DoC Approved |
| 3 | 600Ω LOAD | NA | NA | NA | NA |
| 4 | NOTEBOOK COMPUTER | DELL | PP05L | 25191592336 | E2K24CLNS |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | NA |
| 2 | 1.2m shielded cable without core. |
| 3 | NA |
| 4 | NA |

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 4 acted as communication partners to transfer data.



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|-----------------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 | 56 to 46 |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------------|-------------|----------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESCS30 | 100291 | Nov. 11, 2006 |
| RF signal cable Woken | 5D-FB | Cable-HYC01-01 | Jan. 06, 2007 |
| LISN ROHDE & SCHWARZ | ESH3-Z5 | 100312 | Feb. 15, 2007 |
| LISN ROHDE & SCHWARZ | ESH2-Z5 | 100104 | Feb. 07, 2007 |
| Software ADT | ADT_Cond_V3 | NA | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

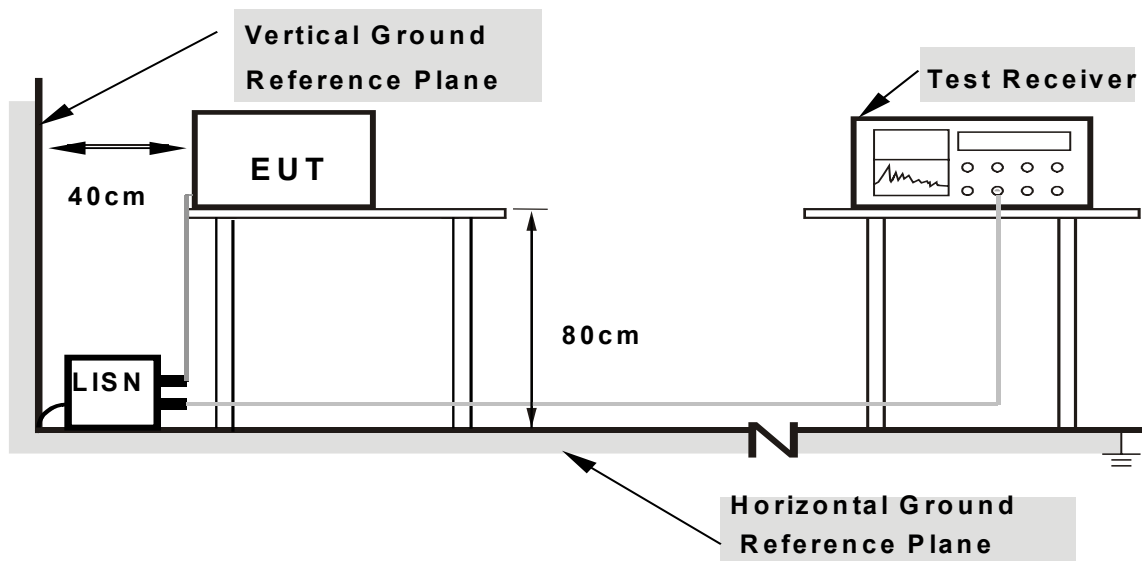

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT with Notebook and placed on a testing table.
- b. The Notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- c. The Notebook system sent "H" messages to its screen.
- d. The Notebook system sent "H" messages to printer, and the printer printed them on paper.
- e. Steps c ~ d were repeated.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA NORMAL MODE

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|-------------------------|
| CHANNEL | Channel 1 | PHASE | Line 1 |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 6Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 68%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Morgan Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.162 | 0.10 | 52.66 | - | 52.76 | - | 65.38 | 55.38 | -12.62 | - |
| 2 | 0.177 | 0.10 | 51.77 | - | 51.87 | - | 64.61 | 54.61 | -12.74 | - |
| 3 | 0.505 | 0.12 | 42.32 | - | 42.44 | - | 56.00 | 46.00 | -13.56 | - |
| 4 | 0.920 | 0.19 | 42.52 | - | 42.71 | - | 56.00 | 46.00 | -13.29 | - |
| 5 | 1.750 | 0.20 | 44.67 | - | 44.87 | - | 56.00 | 46.00 | -11.13 | - |
| 6 | 1.883 | 0.20 | 44.51 | - | 44.71 | - | 56.00 | 46.00 | -11.29 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

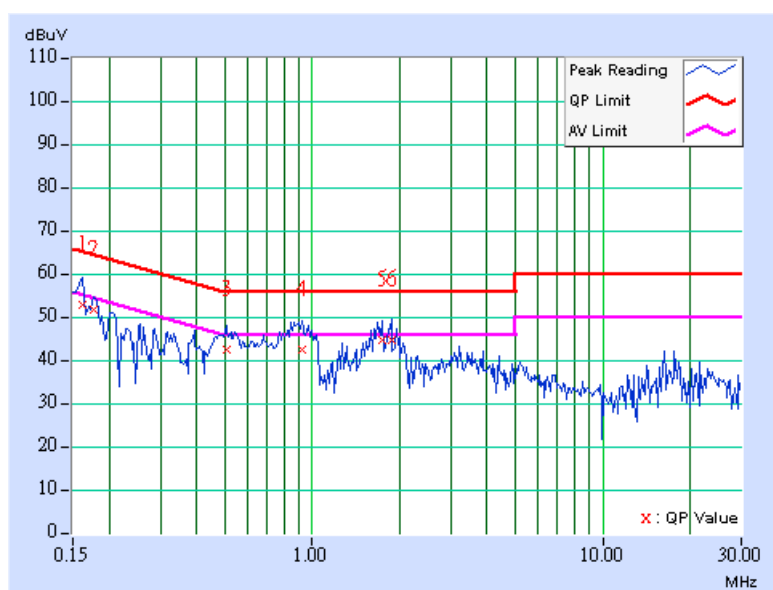

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|-------------------------|
| CHANNEL | Channel 1 | PHASE | Line 2 |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 6Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 68%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Morgan Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.154 | 0.10 | 54.75 | - | 54.85 | - | 65.79 | 55.79 | -10.94 | - |
| 2 | 0.166 | 0.10 | 46.90 | - | 47.00 | - | 65.18 | 55.18 | -18.18 | - |
| 3 | 0.517 | 0.10 | 40.14 | - | 40.24 | - | 56.00 | 46.00 | -15.76 | - |
| 4 | 0.841 | 0.10 | 41.40 | - | 41.50 | - | 56.00 | 46.00 | -14.50 | - |
| 5 | 1.828 | 0.18 | 44.41 | - | 44.59 | - | 56.00 | 46.00 | -11.41 | - |
| 6 | 1.969 | 0.20 | 41.00 | - | 41.20 | - | 56.00 | 46.00 | -14.80 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

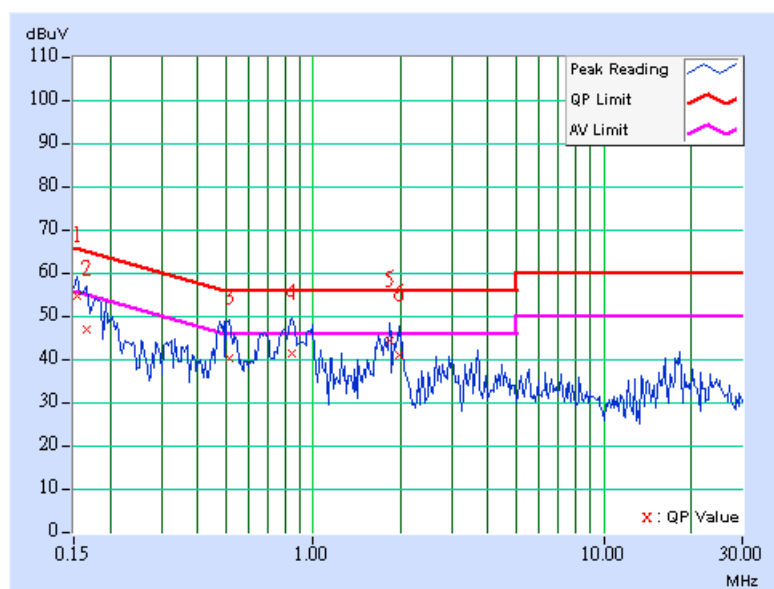

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|-------------------------|
| CHANNEL | Channel 6 | PHASE | Line 1 |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 6Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 68%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Morgan Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-------|--------------------------|-------|-----------------|-------|-------------|-------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.154 | 0.10 | 55.09 | - | 55.19 | - | 65.79 |
| 2 | 0.181 | 0.10 | 51.43 | - | 51.53 | - | 64.43 | 54.43 | -12.90 | - |
| 3 | 0.892 | 0.18 | 44.01 | - | 44.19 | - | 56.00 | 46.00 | -11.81 | - |
| 4 | 1.688 | 0.20 | 45.39 | - | 45.59 | - | 56.00 | 46.00 | -10.41 | - |
| 5 | 1.848 | 0.20 | 45.27 | - | 45.47 | - | 56.00 | 46.00 | -10.53 | - |
| 6 | 1.961 | 0.20 | 42.26 | - | 42.46 | - | 56.00 | 46.00 | -13.54 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

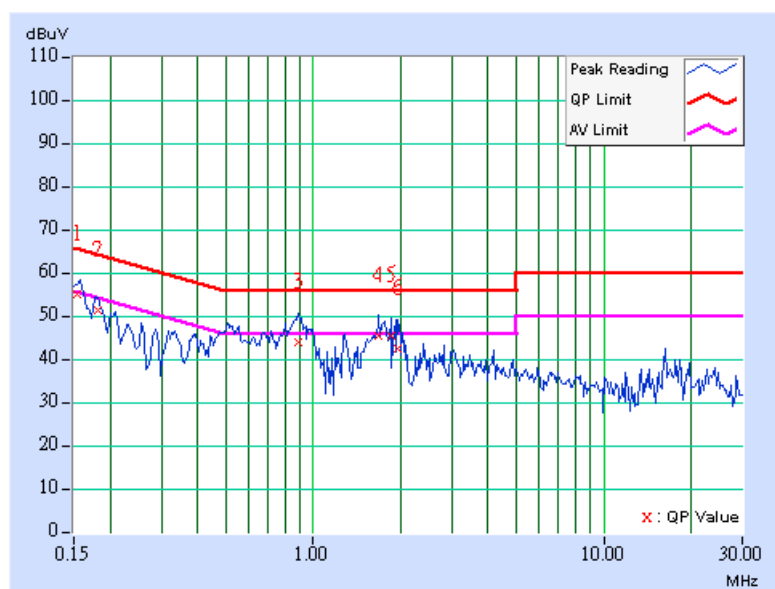

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|-------------------------|
| CHANNEL | Channel 6 | PHASE | Line 2 |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 6Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 68%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Morgan Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.154 | 0.10 | 53.62 | - | 53.72 | - | 65.79 | 55.79 | -12.07 | - |
| 2 | 0.502 | 0.10 | 40.16 | - | 40.26 | - | 56.00 | 46.00 | -15.74 | - |
| 3 | 0.670 | 0.10 | 38.99 | - | 39.09 | - | 56.00 | 46.00 | -16.91 | - |
| 4 | 0.857 | 0.10 | 40.08 | - | 40.18 | - | 56.00 | 46.00 | -15.82 | - |
| 5 | 1.738 | 0.17 | 40.06 | - | 40.23 | - | 56.00 | 46.00 | -15.77 | - |
| 6 | 1.832 | 0.18 | 42.71 | - | 42.89 | - | 56.00 | 46.00 | -13.11 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

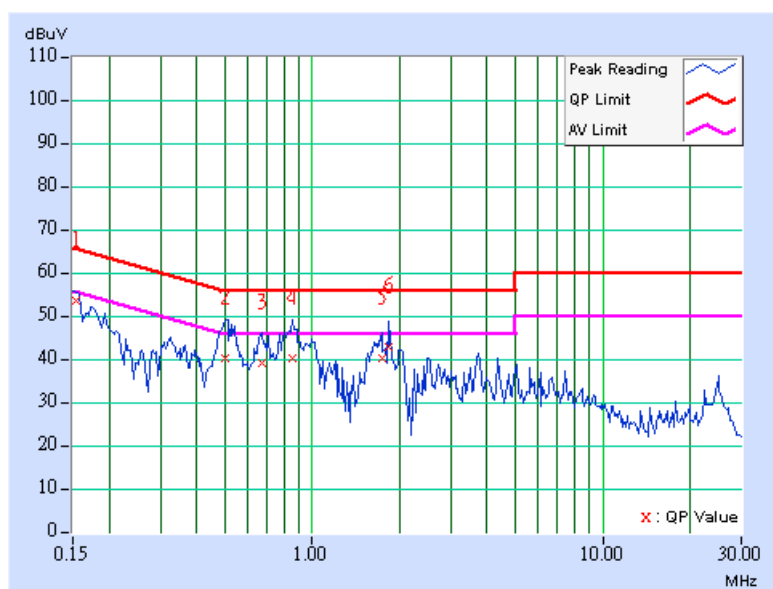

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|-------------------------|
| CHANNEL | Channel 11 | PHASE | Line 1 |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 6Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 68%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Morgan Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.154 | 0.10 | 54.36 | - | 54.46 | - | 65.79 | 55.79 | -11.33 | - |
| 2 | 0.197 | 0.10 | 44.82 | - | 44.92 | - | 63.74 | 53.74 | -18.82 | - |
| 3 | 0.521 | 0.12 | 38.79 | - | 38.91 | - | 56.00 | 46.00 | -17.09 | - |
| 4 | 0.865 | 0.18 | 39.66 | - | 39.84 | - | 56.00 | 46.00 | -16.16 | - |
| 5 | 1.898 | 0.20 | 38.18 | - | 38.38 | - | 56.00 | 46.00 | -17.62 | - |
| 6 | 25.004 | 1.03 | 41.74 | - | 42.77 | - | 60.00 | 50.00 | -17.23 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

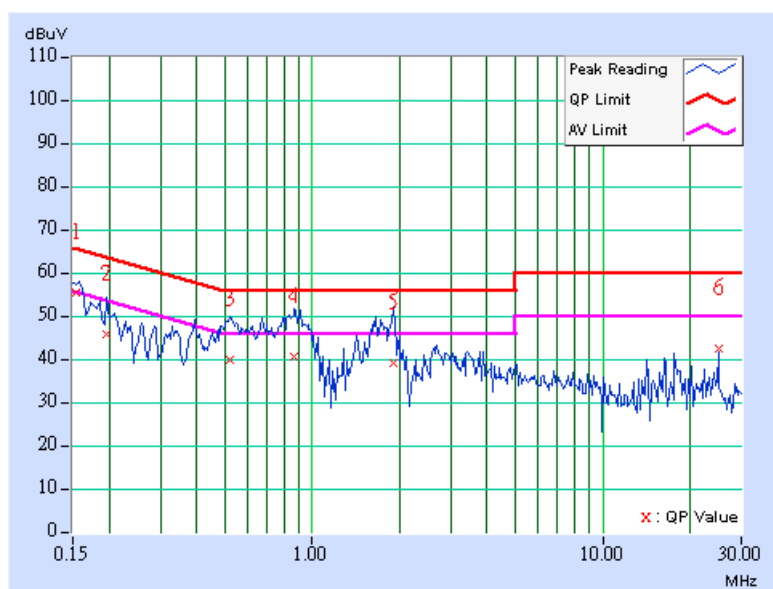

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|-------------------------|
| CHANNEL | Channel 11 | PHASE | Line 2 |
| MODULATION TYPE | BPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 6Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 68%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Morgan Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.158 | 0.10 | 52.55 | - | 52.65 | - | 65.58 | 55.58 | -12.93 | - |
| 2 | 0.177 | 0.10 | 49.43 | - | 49.53 | - | 64.61 | 54.61 | -15.08 | - |
| 3 | 0.498 | 0.10 | 41.00 | - | 41.10 | - | 56.04 | 46.04 | -14.94 | - |
| 4 | 0.677 | 0.10 | 39.78 | - | 39.88 | - | 56.00 | 46.00 | -16.12 | - |
| 5 | 1.504 | 0.15 | 40.29 | - | 40.44 | - | 56.00 | 46.00 | -15.56 | - |
| 6 | 1.801 | 0.18 | 42.53 | - | 42.71 | - | 56.00 | 46.00 | -13.29 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

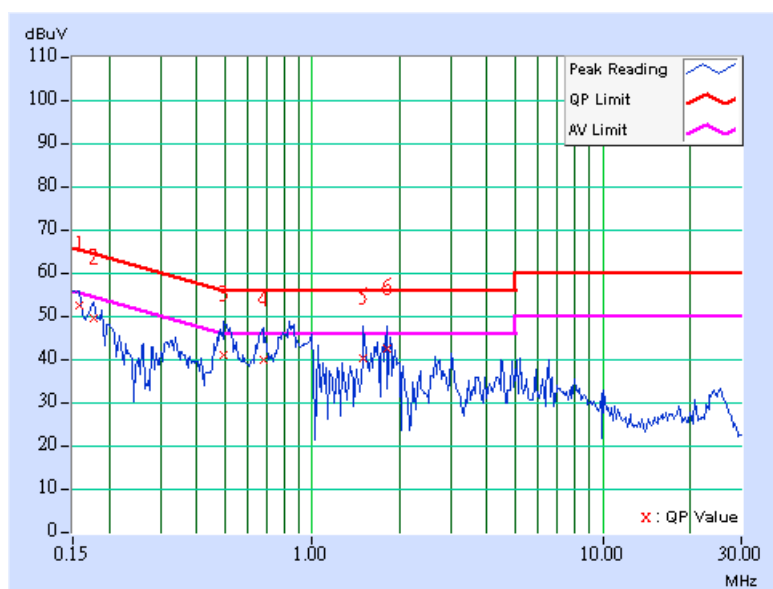


CONDUCTED WORST-CASE DATA TURBO MODE

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|-------------------------|
| CHANNEL | Channel 6 | PHASE | Line 1 |
| MODULATION TYPE | QPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 12Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 68%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Morgan Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | 1 | 0.162 | 0.10 | 52.66 | - | 52.76 | - | 65.37 | 55.37 | -12.61 |
| 2 | 0.177 | 0.10 | 51.77 | - | 51.87 | - | 64.61 | 54.61 | -12.74 | - |
| 3 | 0.505 | 0.12 | 42.32 | - | 42.44 | - | 56.00 | 46.00 | -13.56 | - |
| 4 | 0.920 | 0.19 | 42.52 | - | 42.71 | - | 56.00 | 46.00 | -13.29 | - |
| 5 | 1.750 | 0.20 | 44.67 | - | 44.87 | - | 56.00 | 46.00 | -11.13 | - |
| 6 | 1.883 | 0.20 | 44.51 | - | 44.71 | - | 56.00 | 46.00 | -11.29 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

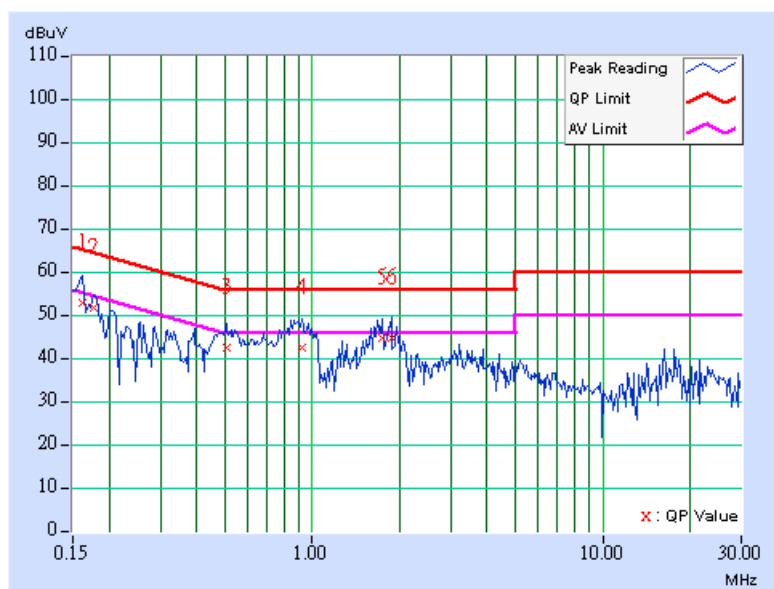

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|-------------------------|
| CHANNEL | Channel 6 | PHASE | Line 2 |
| MODULATION TYPE | QPSK | 6dB BANDWIDTH | 9 kHz |
| TRANSFER RATE | 12Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 68%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Morgan Chen |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|-------------|-------------------|-------------------------|-------|--------------------------|-------|-----------------|-------|-------------|-------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.154 | 0.10 | 54.78 | - | 54.88 | - | 65.79 |
| 2 | 0.166 | 0.10 | 46.95 | - | 47.05 | - | 65.18 | 55.18 | -18.13 | - |
| 3 | 0.517 | 0.10 | 40.16 | - | 40.26 | - | 56.00 | 46.00 | -15.74 | - |
| 4 | 0.842 | 0.10 | 41.43 | - | 41.53 | - | 56.00 | 46.00 | -14.47 | - |
| 5 | 1.828 | 0.18 | 44.43 | - | 44.61 | - | 56.00 | 46.00 | -11.39 | - |
| 6 | 1.969 | 0.20 | 41.04 | - | 41.24 | - | 56.00 | 46.00 | -14.76 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

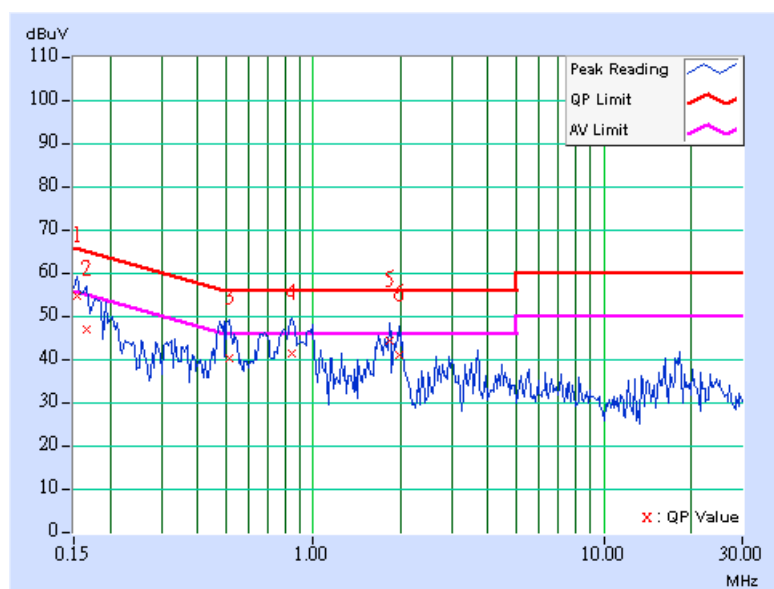



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequencies (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---|--------------------|-------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESI7 | 838496/016 | Jan. 01, 2007 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100041 | Dec. 04, 2006 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-155 | Jan. 15, 2007 |
| HORN Antenna SCHWARZBECK | BBHA 9120D | 9120D-404 | Jan. 01, 2007 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170242 | Jan. 19, 2007 |
| Preamplifier Agilent | 8449B | 3008A01960 | Nov. 09, 2006 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 219268/4 | Dec. 20, 2006 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 230129/4 | Dec. 20, 2006 |
| Software ADT. | ADT_Radiated_V5.14 | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 010303 | NA |
| Antenna Tower Controller inn-co GmbH | CO2000 | 019303 | NA |
| Turn Table ADT. | TT100. | TT93021704 | NA |
| Turn Table Controller ADT. | SC100. | SC93021704 | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

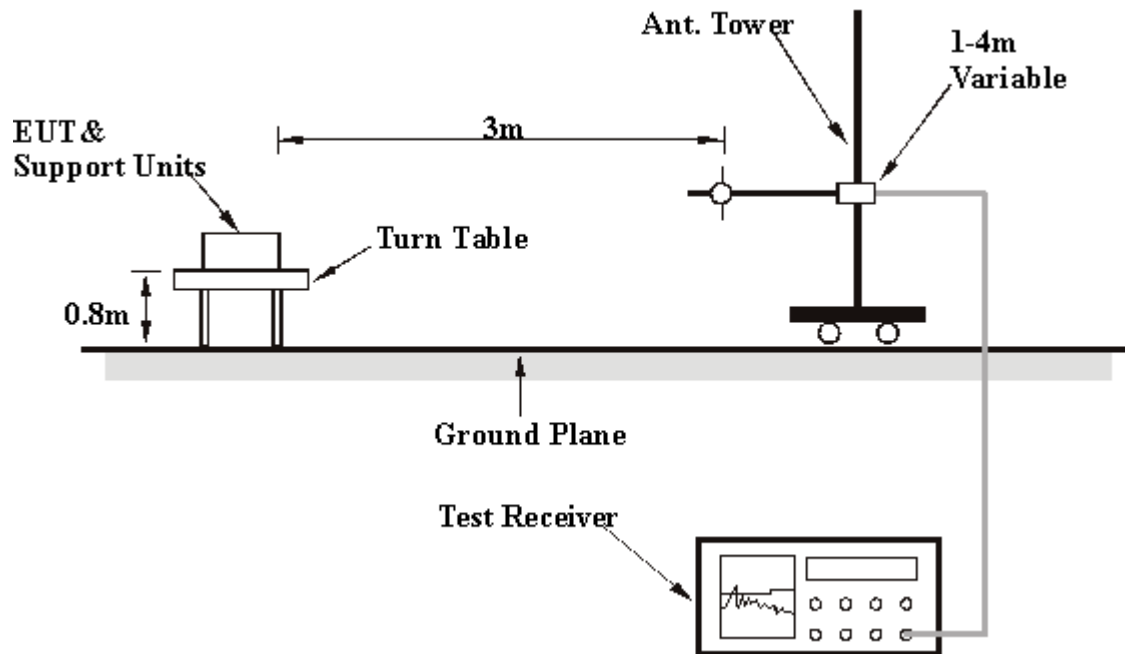

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

RADIATED WORST-CASE DATA: BELOW 1GHz NORMAL MODE

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|-------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | Below 1000MHz |
| MODULATION TYPE | BPSK | DETECTOR FUNCTION | Quasi-Peak |
| TRANSFER RATE | 6Mbps | ENVIRONMENTAL CONDITIONS | 22deg. C, 64%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Brad Wu |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 183.57 | 33.25 QP | 43.50 | -10.25 | 1.75 H | 262 | 21.58 | 11.66 |
| 2 | 274.93 | 33.92 QP | 46.00 | -12.08 | 1.50 H | 169 | 19.59 | 14.33 |
| 3 | 300.20 | 34.75 QP | 46.00 | -11.25 | 1.00 H | 181 | 19.32 | 15.43 |
| 4 | 459.60 | 28.23 QP | 46.00 | -17.77 | 1.75 H | 172 | 9.30 | 18.94 |
| 5 | 552.91 | 29.53 QP | 46.00 | -16.47 | 1.25 H | 202 | 8.43 | 21.09 |
| 6 | 720.08 | 28.96 QP | 46.00 | -17.04 | 1.00 H | 121 | 4.17 | 24.80 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 47.49 | 38.16 QP | 40.00 | -1.84 | 1.25 V | 43 | 23.38 | 14.78 |
| 2 | 183.57 | 31.14 QP | 43.50 | -12.36 | 1.00 V | 325 | 19.48 | 11.66 |
| 3 | 232.16 | 30.67 QP | 46.00 | -15.33 | 1.00 V | 55 | 18.83 | 11.84 |
| 4 | 274.93 | 34.80 QP | 46.00 | -11.20 | 1.75 V | 193 | 20.48 | 14.33 |
| 5 | 300.20 | 37.67 QP | 46.00 | -8.33 | 1.00 V | 235 | 22.24 | 15.43 |
| 6 | 368.24 | 33.22 QP | 46.00 | -12.78 | 1.25 V | 214 | 16.50 | 16.73 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



RADIATED WORST-CASE DATA: BELOW 1GHz TURBO MODE

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|-------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | Below 1000MHz |
| MODULATION TYPE | QPSK | DETECTOR FUNCTION | Quasi-Peak |
| TRANSFER RATE | 12Mbps | ENVIRONMENTAL CONDITIONS | 22deg. C, 64%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Brad Wu |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 183.57 | 30.40 QP | 43.50 | -13.10 | 1.25 H | 292 | 18.73 | 11.66 |
| 2 | 274.93 | 33.66 QP | 46.00 | -12.34 | 1.00 H | 121 | 19.33 | 14.33 |
| 3 | 300.20 | 32.91 QP | 46.00 | -13.09 | 1.00 H | 130 | 17.47 | 15.43 |
| 4 | 368.24 | 27.79 QP | 46.00 | -18.21 | 1.00 H | 313 | 11.06 | 16.73 |
| 5 | 459.60 | 27.63 QP | 46.00 | -18.37 | 1.25 H | 184 | 8.69 | 18.94 |
| 6 | 552.91 | 29.13 QP | 46.00 | -16.87 | 1.25 H | 181 | 8.04 | 21.09 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----------|--------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 49.44 | 38.65 QP | 40.00 | -1.35 | 1.00 V | 1 | 24.21 | 14.44 |
| 2 | 78.60 | 34.04 QP | 40.00 | -5.96 | 1.00 V | 328 | 23.39 | 10.65 |
| 3 | 183.57 | 31.85 QP | 43.50 | -11.65 | 1.00 V | 337 | 20.18 | 11.66 |
| 4 | 274.93 | 30.13 QP | 46.00 | -15.87 | 1.50 V | 172 | 15.80 | 14.33 |
| 5 | 300.20 | 37.05 QP | 46.00 | -8.95 | 1.25 V | 142 | 21.62 | 15.43 |
| 6 | 368.24 | 33.53 QP | 46.00 | -12.47 | 1.25 V | 175 | 16.80 | 16.73 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|----------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | CCK | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| TRANSFER RATE | 11Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1608.00 | 42.84 PK | 74.00 | -31.16 | 1.00 H | 87 | 14.07 | 28.78 |
| 1 | 1608.00 | 38.01 AV | 54.00 | -15.99 | 1.00 H | 87 | 9.24 | 28.78 |
| 2 | 2386.00 | 54.97 PK | 74.00 | -19.03 | 1.35 H | 213 | 22.95 | 32.02 |
| 2 | 2386.00 | 46.73 AV | 54.00 | -7.27 | 1.35 H | 213 | 14.71 | 32.02 |
| 3 | *2412.00 | 106.96 PK | | | 1.35 H | 213 | 74.83 | 32.13 |
| 3 | *2412.00 | 99.27 AV | | | 1.35 H | 213 | 67.14 | 32.13 |
| 4 | 4824.00 | 50.28 PK | 74.00 | -23.72 | 1.14 H | 250 | 12.08 | 38.20 |
| 4 | 4824.00 | 43.54 AV | 54.00 | -10.46 | 1.14 H | 250 | 5.34 | 38.20 |
| 5 | 9648.00 | 57.89 PK | 86.96 | -29.07 | 1.01 H | 104 | 10.06 | 47.83 |
| 5 | 9648.00 | 51.32 AV | 79.27 | -27.95 | 1.01 H | 104 | 3.49 | 47.83 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1608.00 | 44.23 PK | 74.00 | -29.77 | 1.12 V | 105 | 15.46 | 28.78 |
| 1 | 1608.00 | 40.44 AV | 54.00 | -13.56 | 1.12 V | 105 | 11.67 | 28.78 |
| 2 | 2386.00 | 60.98 PK | 74.00 | -13.02 | 1.34 V | 38 | 28.96 | 32.02 |
| 2 | 2386.00 | 51.49 AV | 54.00 | -2.51 | 1.34 V | 38 | 19.47 | 32.02 |
| 3 | *2412.00 | 112.80 PK | | | 1.34 V | 38 | 80.67 | 32.13 |
| 3 | *2412.00 | 105.34 AV | | | 1.34 V | 38 | 73.21 | 32.13 |
| 4 | 4824.00 | 54.77 PK | 74.00 | -19.23 | 1.11 V | 106 | 16.57 | 38.20 |
| 4 | 4824.00 | 47.43 AV | 54.00 | -6.57 | 1.11 V | 106 | 9.23 | 38.20 |
| 5 | 9648.00 | 62.14 PK | 92.80 | -30.66 | 1.26 V | 144 | 14.31 | 47.83 |
| 5 | 9648.00 | 57.85 AV | 85.34 | -27.49 | 1.26 V | 144 | 10.02 | 47.83 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|-----------------------------|---------------|---------------------------------|----------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | CCK | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| TRANSFER RATE | 11Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1624.00 | 43.27 PK | 74.00 | -30.73 | 1.23 H | 218 | 14.46 | 28.81 |
| 1 | 1624.00 | 38.95 AV | 54.00 | -15.05 | 1.23 H | 218 | 10.14 | 28.81 |
| 2 | *2437.00 | 107.27 PK | | | 1.32 H | 257 | 75.02 | 32.25 |
| 2 | *2437.00 | 99.95 AV | | | 1.32 H | 257 | 67.70 | 32.25 |
| 3 | 4874.00 | 54.65 PK | 74.00 | -19.35 | 1.00 H | 158 | 16.33 | 38.32 |
| 3 | 4874.00 | 47.43 AV | 54.00 | -6.57 | 1.00 H | 158 | 9.11 | 38.32 |
| 4 | 9748.00 | 61.16 PK | 87.27 | -26.11 | 1.30 H | 305 | 13.14 | 48.02 |
| 4 | 9748.00 | 56.96 AV | 79.95 | -22.99 | 1.30 H | 305 | 8.94 | 48.02 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1624.00 | 42.72 PK | 74.00 | -31.28 | 1.15 V | 105 | 13.91 | 28.81 |
| 1 | 1624.00 | 38.61 AV | 54.00 | -15.39 | 1.15 V | 105 | 9.80 | 28.81 |
| 2 | *2437.00 | 112.90 PK | | | 1.35 V | 6 | 80.65 | 32.25 |
| 2 | *2437.00 | 105.34 AV | | | 1.35 V | 6 | 73.09 | 32.25 |
| 3 | 4874.00 | 53.73 PK | 74.00 | -20.27 | 1.11 V | 239 | 15.41 | 38.32 |
| 3 | 4874.00 | 46.75 AV | 54.00 | -7.25 | 1.11 V | 239 | 8.43 | 38.32 |
| 4 | 9748.00 | 64.32 PK | 92.90 | -28.58 | 1.38 V | 187 | 16.30 | 48.02 |
| 4 | 9748.00 | 61.22 AV | 85.34 | -24.12 | 1.38 V | 187 | 13.20 | 48.02 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Crection Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|-----------------------------|---------------|---------------------------------|----------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | CCK | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| TRANSFER RATE | 11Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1641.00 | 41.86 PK | 74.00 | -32.14 | 1.19 H | 74 | 13.01 | 28.85 |
| 1 | 1641.00 | 36.62 AV | 54.00 | -17.38 | 1.19 H | 74 | 7.77 | 28.85 |
| 2 | *2462.00 | 106.04 PK | | | 1.30 H | 254 | 73.68 | 32.36 |
| 2 | *2462.00 | 98.38 AV | | | 1.30 H | 254 | 66.02 | 32.36 |
| 3 | 2487.00 | 54.60 PK | 74.00 | -19.40 | 1.30 H | 254 | 22.13 | 32.47 |
| 3 | 2487.00 | 47.01 AV | 54.00 | -6.99 | 1.30 H | 254 | 14.54 | 32.47 |
| 4 | 4924.00 | 50.96 PK | 74.00 | -23.04 | 1.29 H | 201 | 12.50 | 38.46 |
| 4 | 4924.00 | 43.66 AV | 54.00 | -10.34 | 1.29 H | 201 | 5.20 | 38.46 |
| 5 | 9848.00 | 59.90 PK | 86.04 | -26.14 | 1.38 H | 48 | 11.71 | 48.19 |
| 5 | 9848.00 | 52.96 AV | 78.38 | -25.42 | 1.38 H | 48 | 4.77 | 48.19 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1641.00 | 41.57 PK | 74.00 | -32.43 | 1.00 V | 102 | 12.72 | 28.85 |
| 1 | 1641.00 | 36.35 AV | 54.00 | -17.65 | 1.00 V | 102 | 7.50 | 28.85 |
| 2 | *2462.00 | 113.14 PK | | | 1.08 V | 19 | 80.78 | 32.36 |
| 2 | *2462.00 | 105.45 AV | | | 1.08 V | 19 | 73.09 | 32.36 |
| 3 | 2487.00 | 60.03 PK | 74.00 | -13.97 | 1.08 V | 19 | 27.56 | 32.47 |
| 3 | 2487.00 | 50.85 AV | 54.00 | -3.15 | 1.08 V | 19 | 18.38 | 32.47 |
| 4 | 4924.00 | 55.14 PK | 74.00 | -18.86 | 1.18 V | 236 | 16.68 | 38.46 |
| 4 | 4924.00 | 48.18 AV | 54.00 | -5.82 | 1.18 V | 236 | 9.72 | 38.46 |
| 5 | 9848.00 | 60.97 PK | 93.14 | -32.17 | 1.26 V | 177 | 12.78 | 48.19 |
| 5 | 9848.00 | 56.20 AV | 85.45 | -29.25 | 1.26 V | 177 | 8.01 | 48.19 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

802.11g OFDM NORMAL MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|----------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| TRANSFER RATE | 6Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Match Tsui |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1608.00 | 45.83 PK | 74.00 | -28.17 | 1.21 H | 93 | 17.06 | 28.78 |
| 1 | 1608.00 | 43.43 AV | 54.00 | -10.57 | 1.21 H | 93 | 14.66 | 28.78 |
| 2 | 2390.00 | 66.42 PK | 74.00 | -7.58 | 1.27 H | 272 | 34.38 | 32.04 |
| 2 | 2390.00 | 51.19 AV | 54.00 | -2.81 | 1.27 H | 272 | 19.15 | 32.04 |
| 3 | *2412.00 | 102.34 PK | | | 1.27 H | 272 | 70.21 | 32.13 |
| 3 | *2412.00 | 92.67 AV | | | 1.27 H | 272 | 60.54 | 32.13 |
| 4 | 3216.00 | 45.44 PK | 74.00 | -28.56 | 1.13 H | 287 | 11.51 | 33.93 |
| 4 | 3216.00 | 37.53 AV | 54.00 | -16.47 | 1.13 H | 287 | 3.60 | 33.93 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1608.00 | 45.35 PK | 74.00 | -28.65 | 1.08 V | 198 | 16.58 | 28.78 |
| 1 | 1608.00 | 42.90 AV | 54.00 | -11.10 | 1.08 V | 198 | 14.13 | 28.78 |
| 2 | 2390.00 | 65.76 PK | 74.00 | -8.24 | 1.05 V | 277 | 33.72 | 32.04 |
| 2 | 2390.00 | 51.87 AV | 54.00 | -2.13 | 1.05 V | 277 | 19.83 | 32.04 |
| 3 | *2412.00 | 109.89 PK | | | 1.05 V | 277 | 77.76 | 32.13 |
| 3 | *2412.00 | 100.55 AV | | | 1.05 V | 277 | 68.42 | 32.13 |
| 4 | 3216.00 | 45.97 PK | 74.00 | -28.03 | 1.07 V | 114 | 12.04 | 33.93 |
| 4 | 3216.00 | 39.31 AV | 54.00 | -14.69 | 1.07 V | 114 | 5.38 | 33.93 |
| 5 | 9648.00 | 59.06 PK | 74.00 | -14.94 | 1.37 V | 148 | 11.23 | 47.83 |
| 5 | 9648.00 | 45.31 AV | 54.00 | -8.69 | 1.37 V | 148 | -2.52 | 47.83 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|-----------------------------|---------------|---------------------------------|----------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| TRANSFER RATE | 6Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1624.00 | 42.95 PK | 74.00 | -31.05 | 1.00 H | 84 | 14.14 | 28.81 |
| 1 | 1624.00 | 39.09 AV | 54.00 | -14.91 | 1.00 H | 84 | 10.28 | 28.81 |
| 2 | *2437.00 | 102.63 PK | | | 1.31 H | 228 | 70.38 | 32.25 |
| 2 | *2437.00 | 92.87 AV | | | 1.31 H | 228 | 60.62 | 32.25 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1624.00 | 44.90 PK | 74.00 | -29.10 | 1.09 V | 127 | 16.09 | 28.81 |
| 1 | 1624.00 | 41.65 AV | 54.00 | -12.35 | 1.09 V | 127 | 12.84 | 28.81 |
| 2 | *2437.00 | 109.89 PK | | | 1.09 V | 204 | 77.64 | 32.25 |
| 2 | *2437.00 | 101.92 AV | | | 1.09 V | 204 | 69.67 | 32.25 |
| 3 | 9748.00 | 58.54 PK | 74.00 | -15.46 | 1.40 V | 108 | 10.52 | 48.02 |
| 3 | 9748.00 | 45.92 AV | 54.00 | -8.08 | 1.40 V | 108 | -2.10 | 48.02 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|----------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | BPSK | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| TRANSFER RATE | 6Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1641.00 | 42.94 PK | 74.00 | -31.06 | 1.18 H | 221 | 14.09 | 28.85 |
| 1 | 1641.00 | 39.04 AV | 54.00 | -14.96 | 1.18 H | 221 | 10.19 | 28.85 |
| 2 | *2462.00 | 102.63 PK | | | 1.32 H | 210 | 70.27 | 32.36 |
| 2 | *2462.00 | 91.75 AV | | | 1.32 H | 210 | 59.39 | 32.36 |
| 3 | 2483.50 | 60.58 PK | 74.00 | -13.42 | 1.32 H | 210 | 28.12 | 32.46 |
| 3 | 2483.50 | 48.80 AV | 54.00 | -5.20 | 1.32 H | 210 | 16.34 | 32.46 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1641.00 | 43.13 PK | 74.00 | -30.87 | 1.28 V | 24 | 14.28 | 28.85 |
| 1 | 1641.00 | 39.57 AV | 54.00 | -14.43 | 1.28 V | 24 | 10.72 | 28.85 |
| 2 | *2462.00 | 109.35 PK | | | 1.07 V | 17 | 76.99 | 32.36 |
| 2 | *2462.00 | 99.99 AV | | | 1.07 V | 17 | 67.63 | 32.36 |
| 3 | 2483.50 | 67.48 PK | 74.00 | -6.52 | 1.07 V | 17 | 35.02 | 32.46 |
| 3 | 2483.50 | 52.01 AV | 54.00 | -1.99 | 1.07 V | 17 | 19.55 | 32.46 |
| 4 | 9848.00 | 58.10 PK | 74.00 | -15.90 | 1.44 V | 186 | 9.91 | 48.19 |
| 4 | 9848.00 | 45.08 AV | 54.00 | -8.92 | 1.44 V | 186 | -3.11 | 48.19 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

802.11g OFDM TURBO MODULATION

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|----------------------|---------------|--------------------------|----------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | QPSK | DETECTOR FUNCTION | Peak(PK) Average (AV) |
| TRANSFER RATE | 12Mbps | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | TESTED BY | Match Tsui |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1624.00 | 44.68 PK | 74.00 | -29.32 | 1.22 H | 213 | 15.87 | 28.81 |
| 1 | 1624.00 | 41.76 AV | 54.00 | -12.24 | 1.22 H | 213 | 12.95 | 28.81 |
| 2 | 2390.00 | 56.24 PK | 74.00 | -17.76 | 1.06 H | 214 | 24.20 | 32.04 |
| 2 | 2390.00 | 47.48 AV | 54.00 | -6.52 | 1.06 H | 214 | 15.44 | 32.04 |
| 3 | *2437.00 | 100.35 PK | | | 1.06 H | 214 | 68.10 | 32.25 |
| 3 | *2437.00 | 90.79 AV | | | 1.06 H | 214 | 58.54 | 32.25 |
| 4 | 2483.50 | 54.72 PK | 74.00 | -19.28 | 1.06 H | 214 | 22.26 | 32.46 |
| 4 | 2483.50 | 46.43 AV | 54.00 | -7.57 | 1.06 H | 214 | 13.97 | 32.46 |
| 5 | 9748.00 | 55.49 PK | 74.00 | -18.51 | 1.12 H | 360 | 7.47 | 48.02 |
| 5 | 9748.00 | 42.81 AV | 54.00 | -11.19 | 1.12 H | 360 | -5.21 | 48.02 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1624.00 | 44.82 PK | 74.00 | -29.18 | 1.25 V | 335 | 16.01 | 28.81 |
| 1 | 1624.00 | 41.56 AV | 54.00 | -12.44 | 1.25 V | 335 | 12.75 | 28.81 |
| 2 | 2390.00 | 62.40 PK | 74.00 | -11.60 | 1.09 V | 12 | 30.36 | 32.04 |
| 2 | 2390.00 | 50.25 AV | 54.00 | -3.75 | 1.09 V | 12 | 18.21 | 32.04 |
| 3 | *2437.00 | 110.53 PK | | | 1.09 V | 12 | 78.28 | 32.25 |
| 3 | *2437.00 | 99.87 AV | | | 1.09 V | 12 | 67.62 | 32.25 |
| 4 | 2483.50 | 65.79 PK | 74.00 | -8.21 | 1.09 V | 12 | 33.33 | 32.46 |
| 4 | 2483.50 | 51.81 AV | 54.00 | -2.19 | 1.09 V | 12 | 19.35 | 32.46 |
| 5 | 9748.00 | 55.78 PK | 74.00 | -18.22 | 1.07 V | 93 | 7.76 | 48.02 |
| 5 | 9748.00 | 43.49 AV | 54.00 | -10.51 | 1.07 V | 93 | -4.53 | 48.02 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Crection Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

802.11b DSSS MODULATION


| | | | |
|-----------------------------|---------------|---------------------------------|------------------------|
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg.C, 66%RH, 991hPa |
| TESTED BY | Match Tsui | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS/FAIL |
|----------------|--------------------------------|----------------------------|----------------------------|------------------|
| 1 | 2412 | 11.24 | 0.5 | PASS |
| 6 | 2437 | 11.16 | 0.5 | PASS |
| 11 | 2462 | 12.08 | 0.5 | PASS |


CH1

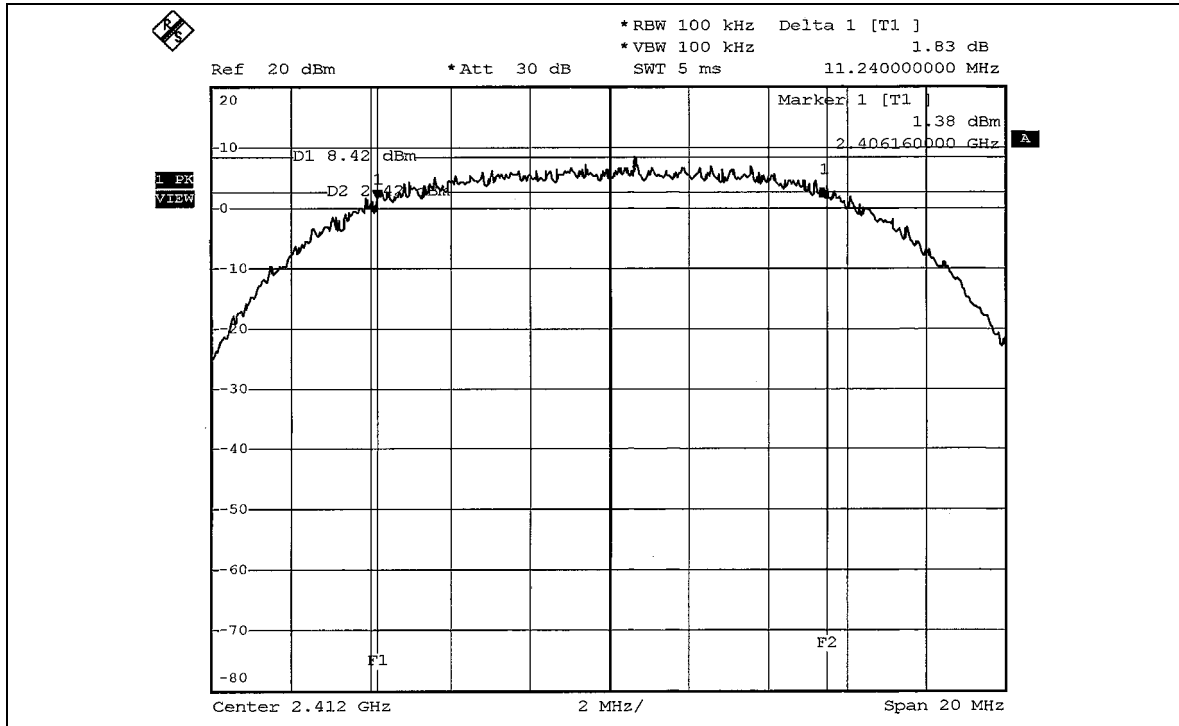

CH6

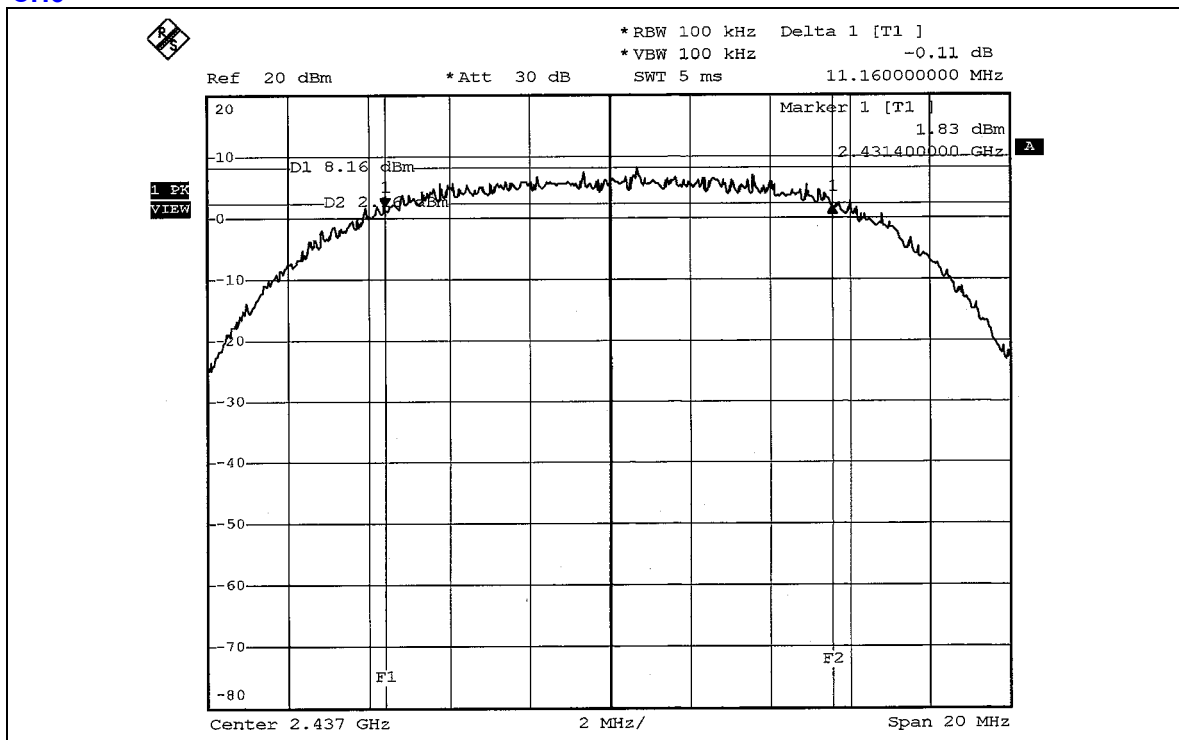

CH11

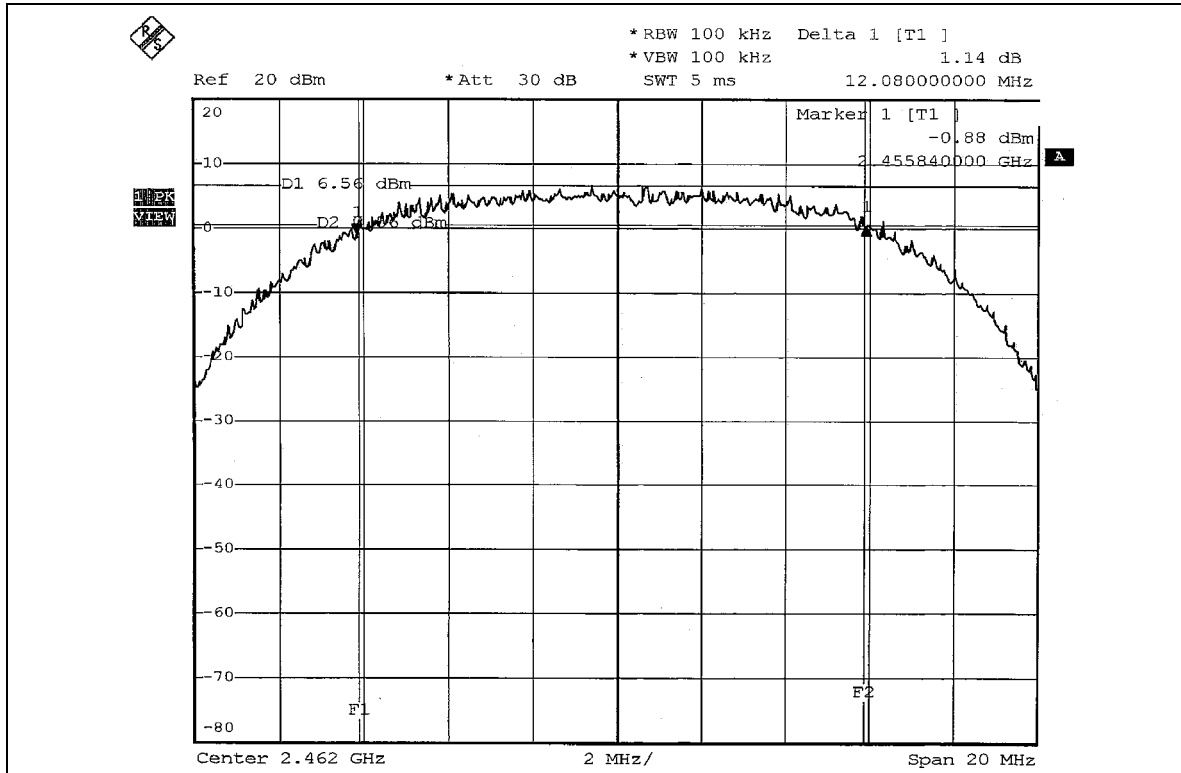




802.11g OFDM NORMAL MODULATION


| | | | |
|-----------------------------|---------------|---------------------------------|------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 6Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg.C, 66%RH, 991hPa |
| TESTED BY | Match Tsui | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6 dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS/FAIL |
|----------------|--------------------------------|-----------------------------|----------------------------|------------------|
| 1 | 2412 | 16.40 | 0.5 | PASS |
| 6 | 2437 | 16.44 | 0.5 | PASS |
| 11 | 2462 | 16.44 | 0.5 | PASS |


CH1

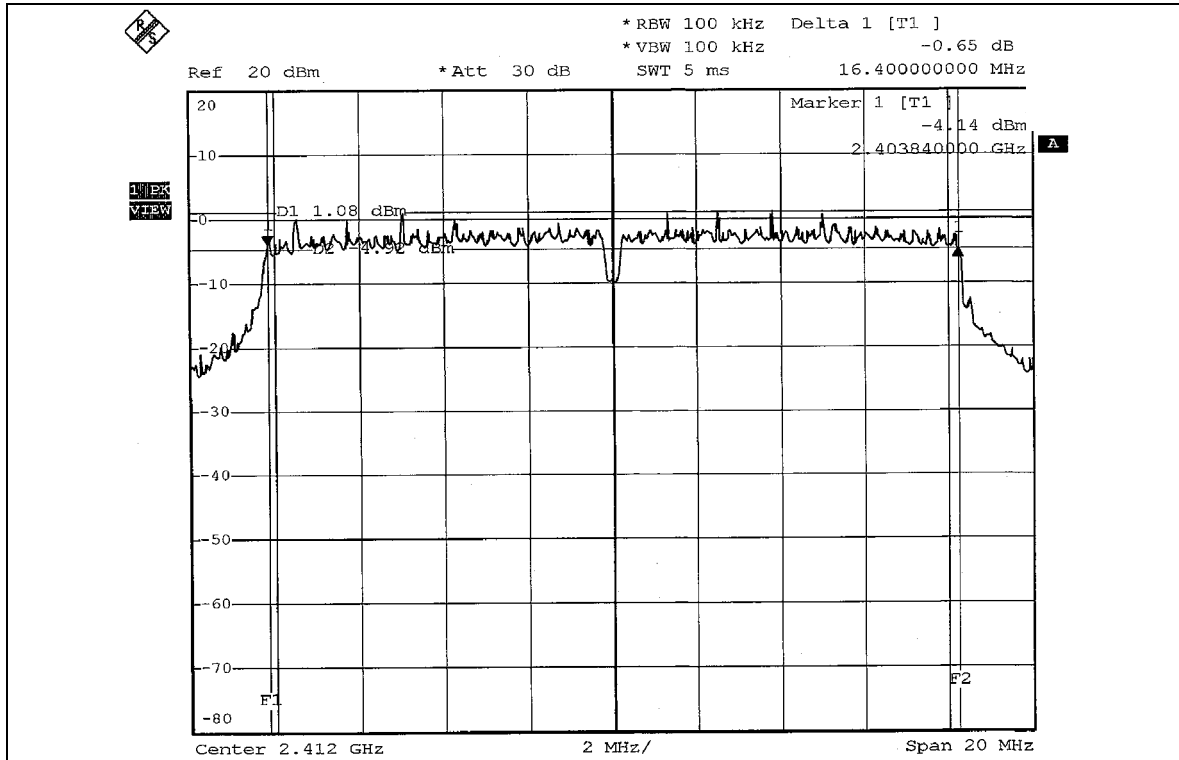

CH6

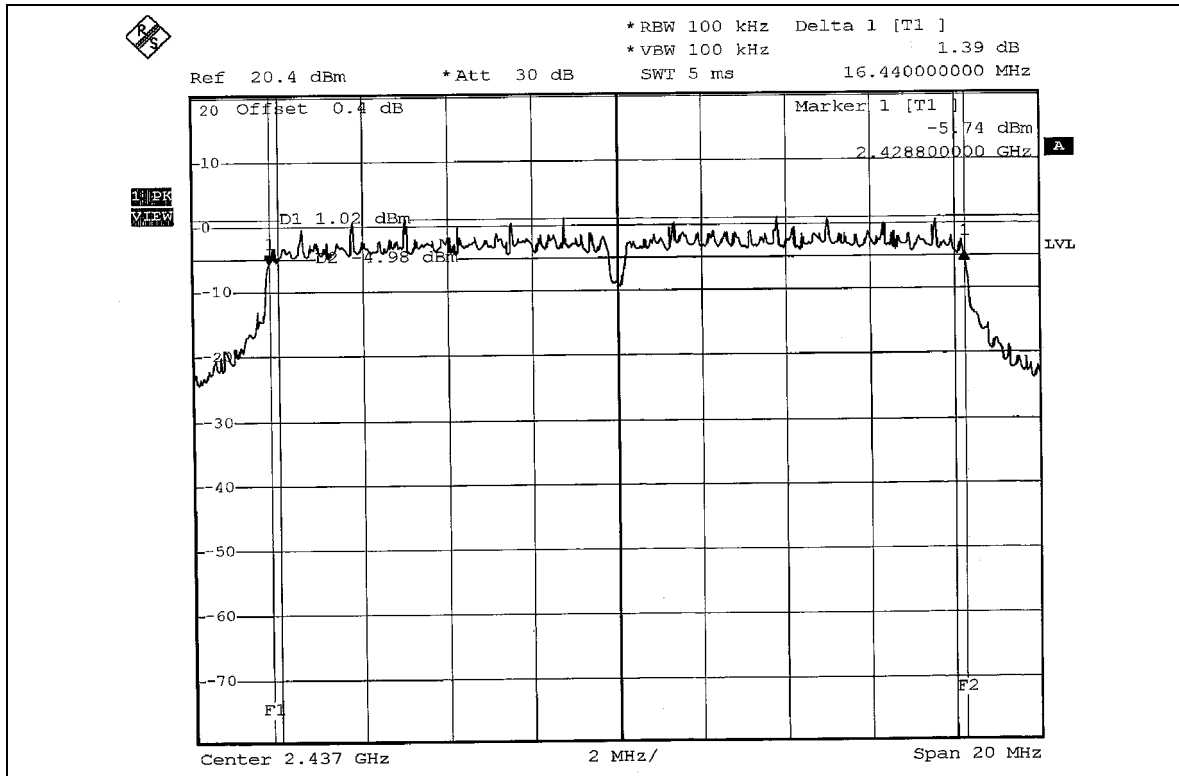

CH11

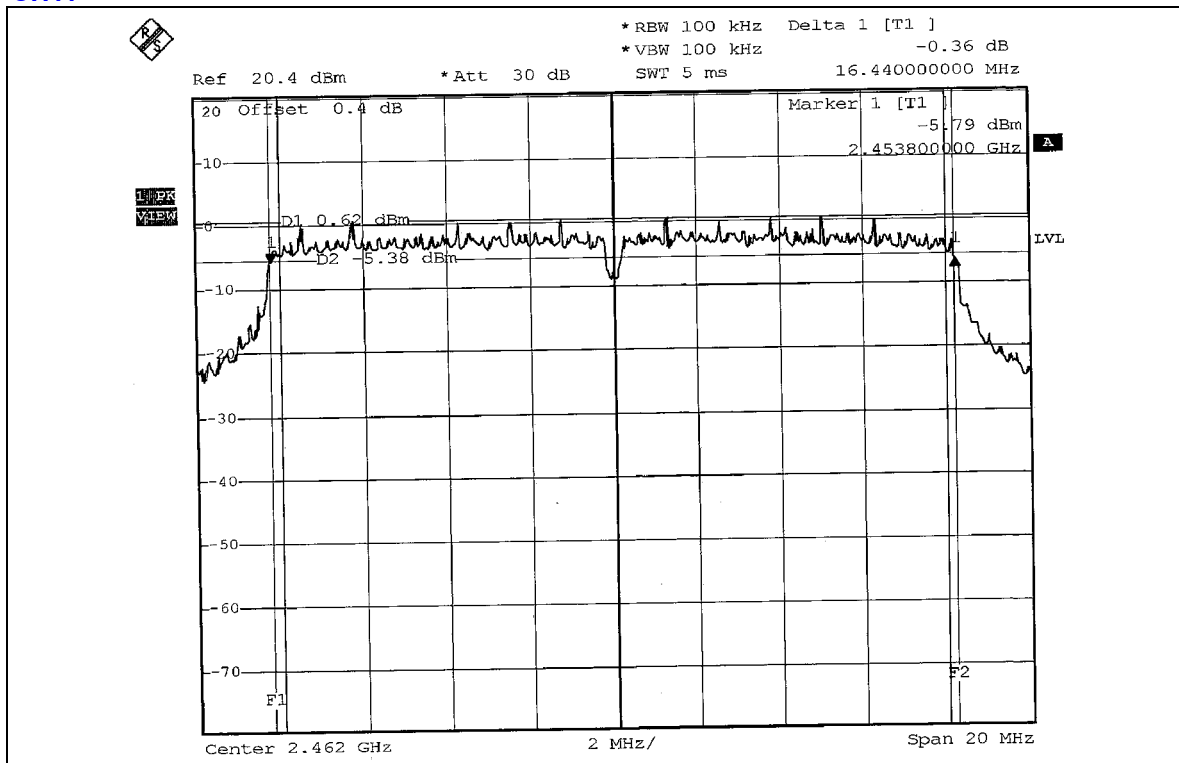




802.11g OFDM TURBO MODULATION

| | | | |
|-----------------------------|---------------|---------------------------------|------------------------|
| MODULATION TYPE | QPSK | TRANSFER RATE | 12Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg.C, 66%RH, 991hPa |
| TESTED BY | Match Tsui | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6 dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS/FAIL |
|----------------|--------------------------------|-----------------------------|----------------------------|------------------|
| 6 | 2437 | 32.48 | 0.5 | PASS |

CH6

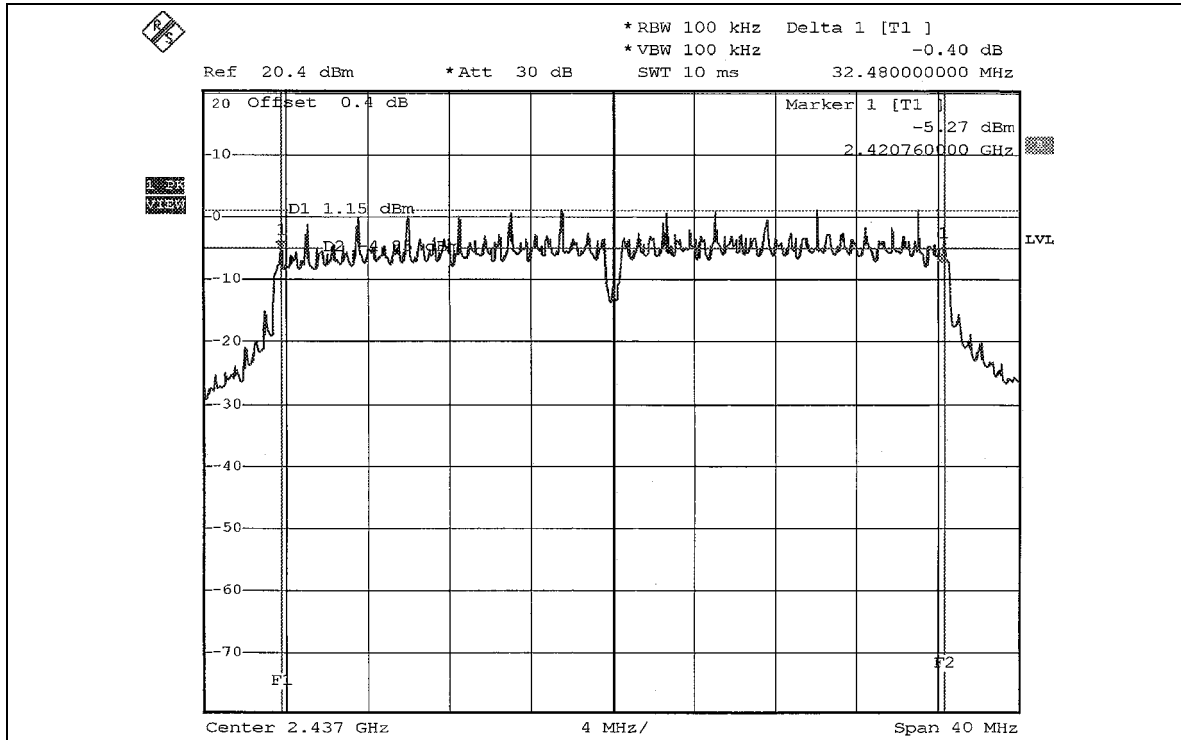



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm. .

4.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |
| AGILENT SIGNAL GENERATOR | E8257C | MY43320668 | Dec. 07, 2006 |
| DIGITAL RT OSCILLOSCOPE | TDS1012 | C037299 | Nov. 28, 2006 |
| NARDA DETECTOR | 4503A | FSCM99899 | NA |

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

802.11b DSSS MODULATION

| | | | |
|-----------------------------|---------------|---------------------------------|------------------------|
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg.C, 66%RH, 991hPa |
| TESTED BY | Match Tsui | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS/FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-----------|
| 1 | 2412 | 64.863 | 18.12 | 30 | PASS |
| 6 | 2437 | 65.615 | 18.17 | 30 | PASS |
| 11 | 2462 | 65.163 | 18.14 | 30 | PASS |

802.11g OFDM NORMAL MODULATION

| | | | |
|-----------------------------|---------------|---------------------------------|------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 6Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg.C, 66%RH, 991hPa |
| TESTED BY | Match Tsui | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS/FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-----------|
| 1 | 2412 | 41.210 | 16.15 | 30 | PASS |
| 6 | 2437 | 41.495 | 16.18 | 30 | PASS |
| 11 | 2462 | 40.832 | 16.11 | 30 | PASS |



802.11g OFDM TURBO MODULATION

| | | | |
|-----------------------------|---------------|---------------------------------|------------------------|
| MODULATION TYPE | QPSK | TRANSFER RATE | 12Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg.C, 66%RH, 991hPa |
| TESTED BY | Match Tsui | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS/FAIL |
|----------------|--------------------------------|-------------------------------|--------------------------------|-------------------------------|------------------|
| 6 | 2437 | 40.551 | 16.08 | 30 | PASS |



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




4.5.7 TEST RESULTS

802.11b DSSS MODULATION


| | | | |
|-----------------------------|---------------|---------------------------------|------------------------|
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg.C, 66%RH, 991hPa |
| TESTED BY | Match Tsui | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3 kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS/FAIL |
|----------------|--------------------------------|---|----------------------------|------------------|
| 1 | 2412 | -6.61 | 8 | PASS |
| 6 | 2437 | -6.22 | 8 | PASS |
| 11 | 2462 | -6.88 | 8 | PASS |


CH1

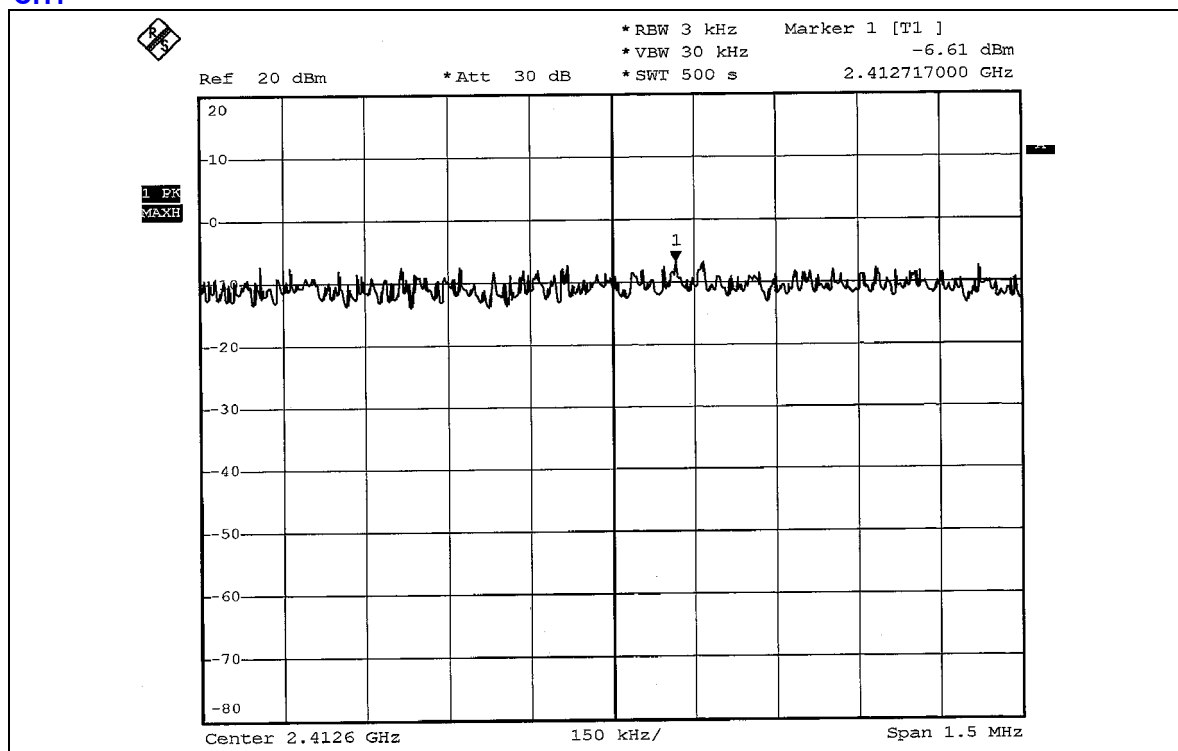

CH6

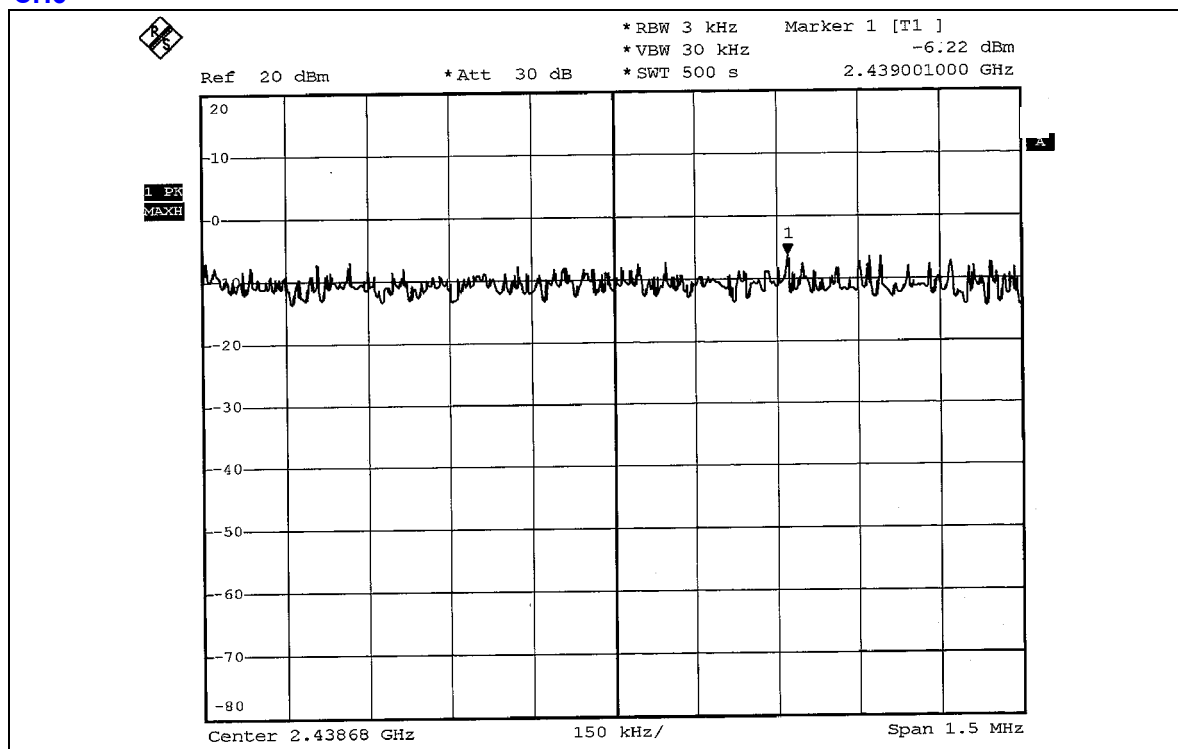

CH11

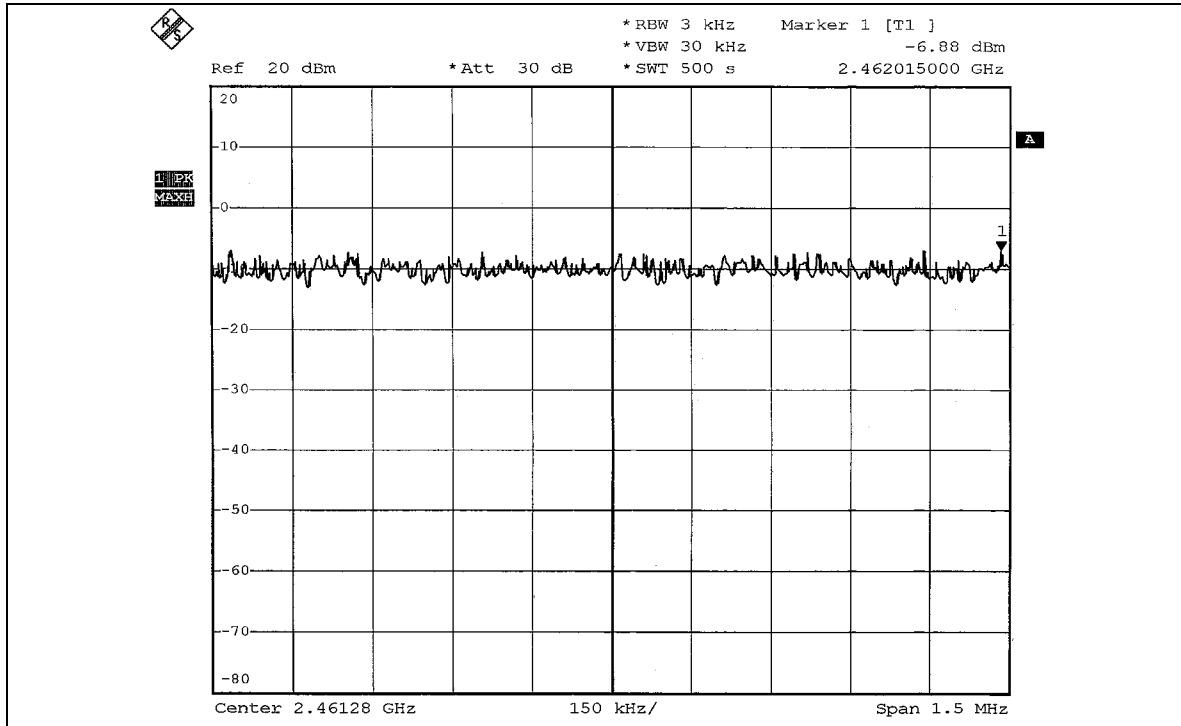




802.11g OFDM NORMAL MODULATION


| | | | |
|-----------------------------|---------------|---------------------------------|------------------------|
| MODULATION TYPE | BPSK | TRANSFER RATE | 6Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg.C, 66%RH, 991hPa |
| TESTED BY | Match Tsui | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3 kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS/FAIL |
|----------------|---------------------------------|---|----------------------------|------------------|
| 1 | 2412 | -12.43 | 8 | PASS |
| 6 | 2437 | -12.26 | 8 | PASS |
| 11 | 2462 | -12.52 | 8 | PASS |


CH1

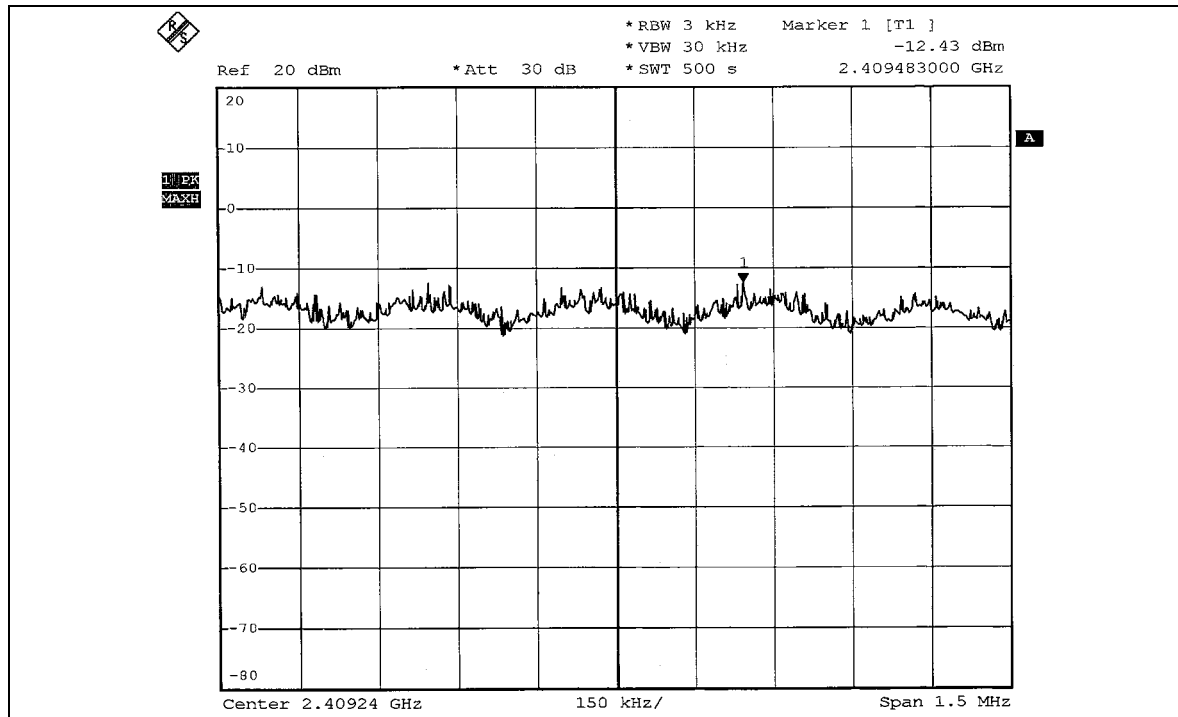

CH6

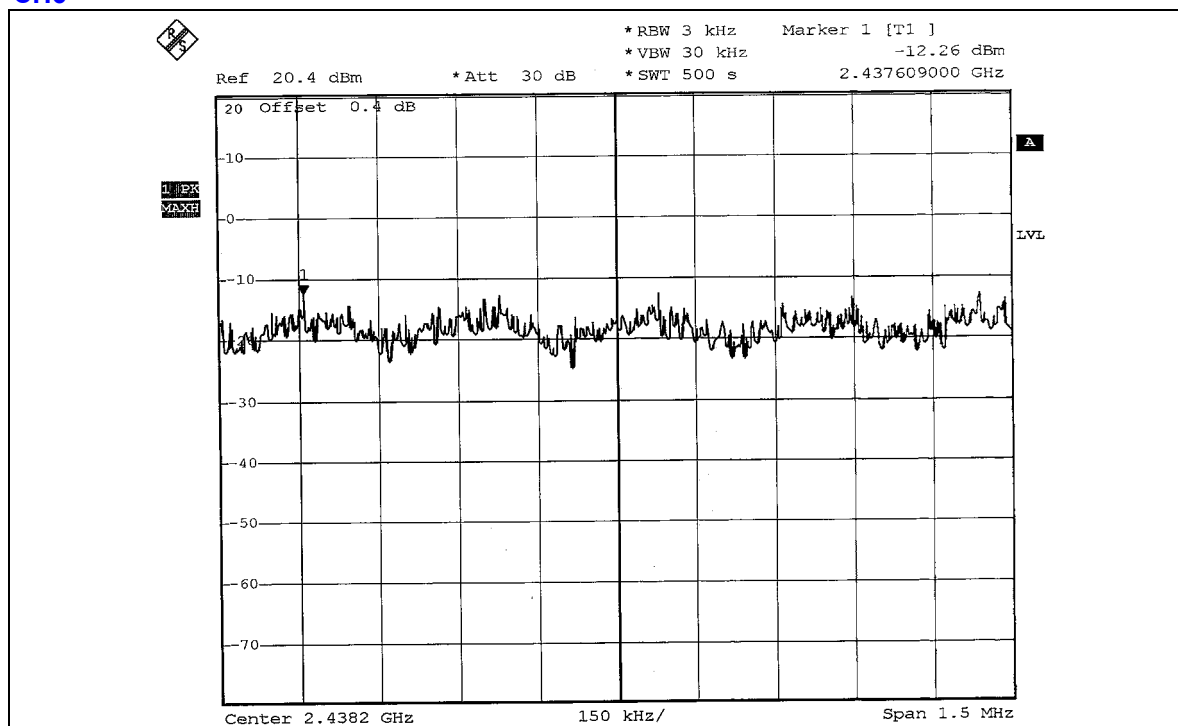

CH11

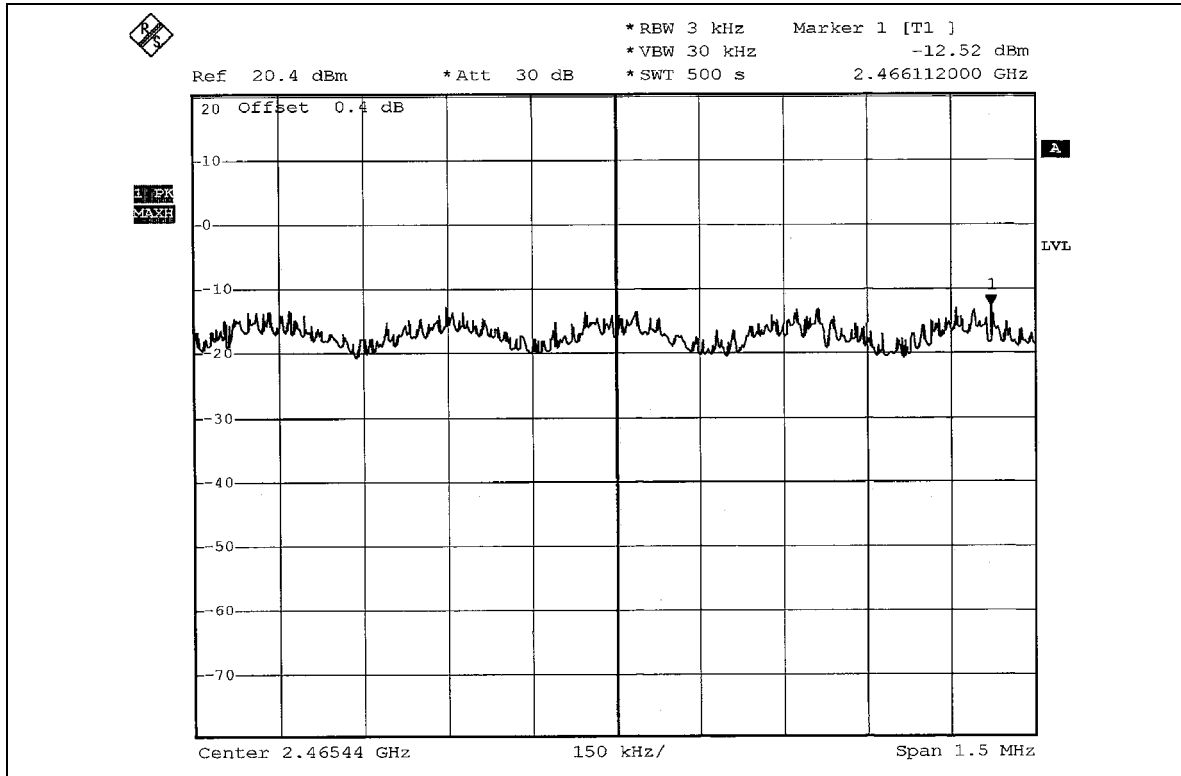




802.11g OFDM TURBO MODULATION

| | | | |
|-----------------------------|---------------|---------------------------------|------------------------|
| MODULATION TYPE | QPSK | TRANSFER RATE | 12Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg.C, 66%RH, 991hPa |
| TESTED BY | Match Tsui | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3 kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS/FAIL |
|----------------|--------------------------------|---|----------------------------|------------------|
| 6 | 2437 | -14.68 | 8 | PASS |

CH6

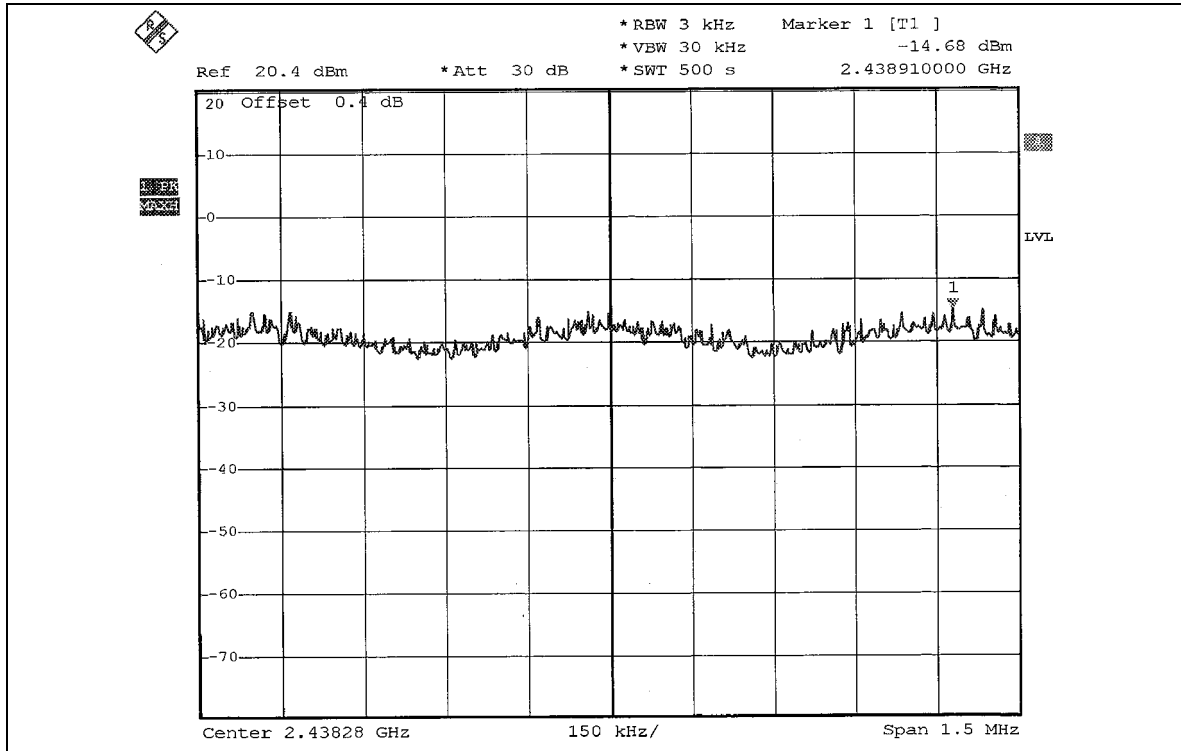



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=1kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION



NOTE 1: The band edge emission plot of DSSS technique on page 61 shows 51.93dBc between carrier maximum power and local maximum emission in restrict band (2.3862GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 112.80dBuV/m (Peak), so the maximum field strength in restrict band is $112.80 - 51.93 = 60.87$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of DSSS technique on page 61 shows 55.83dBc between carrier maximum power and local maximum emission in restrict band (2.3754GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.34dBuV/m (Average), so the maximum field strength in restrict band is $105.34 - 55.83 = 49.51$ dBuV/m which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot of DSSS technique on page 62 shows 48.12dBc between carrier maximum power and local maximum emission in restrict band (2.48668GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 113.14dBuV/m (Peak), so the maximum field strength in restrict band is $113.14 - 48.12 = 65.02$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of DSSS technique on page 63 shows 55.20dBc between carrier maximum power and local maximum emission in restrict band (2.4878GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.45dBuV/m (Average), so the maximum field strength in restrict band is $105.45 - 55.20 = 50.25$ dBuV/m which is under 54dBuV/m limit.

802.11b DSSS MODULATION

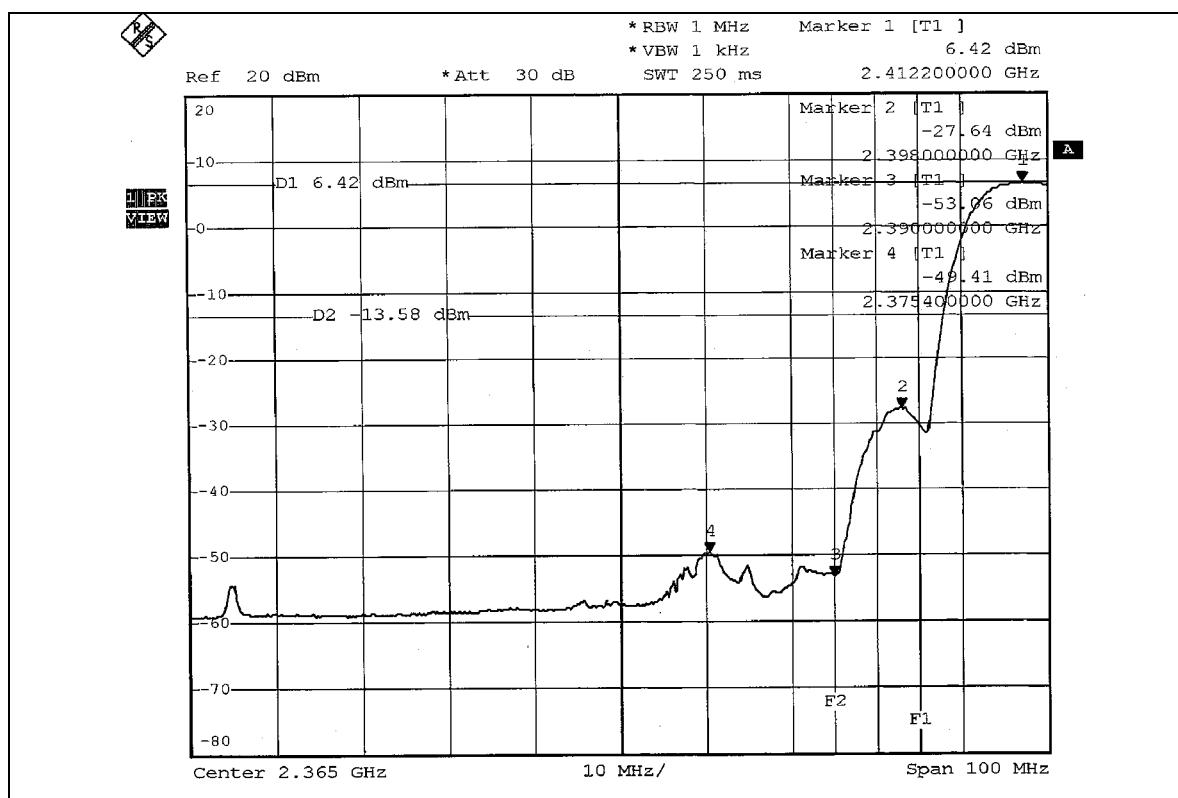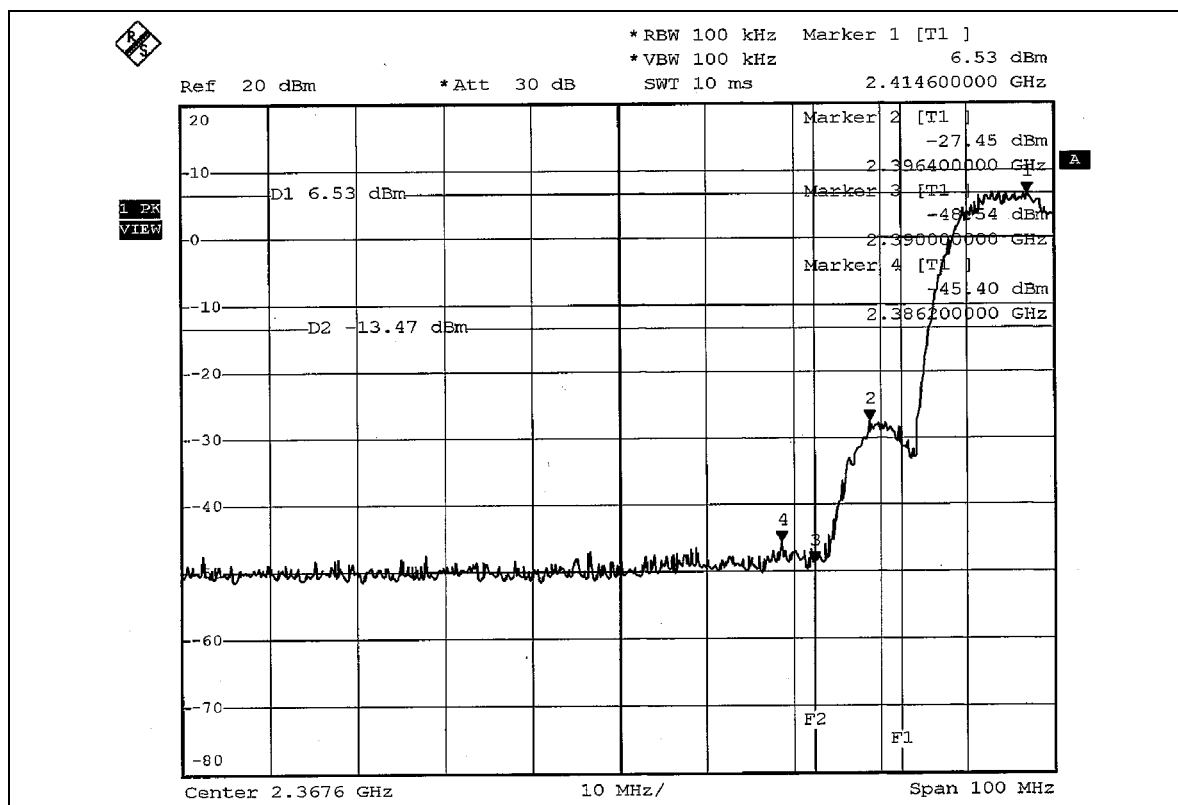

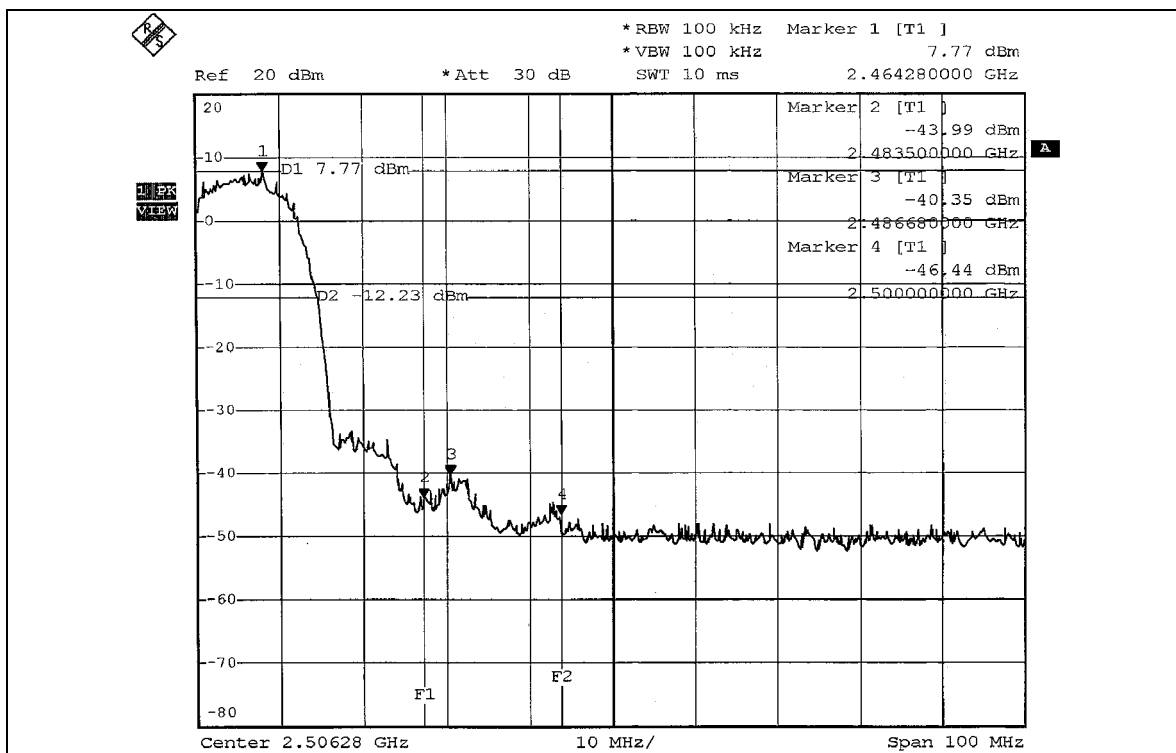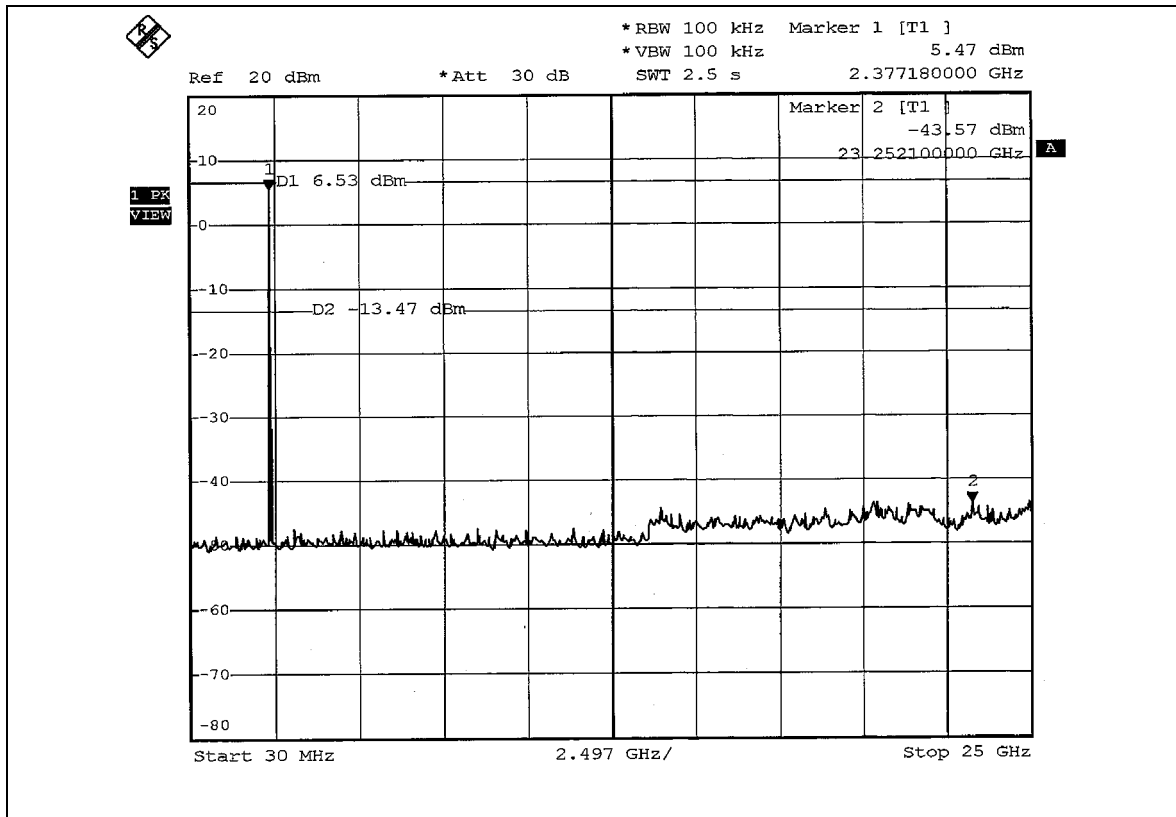

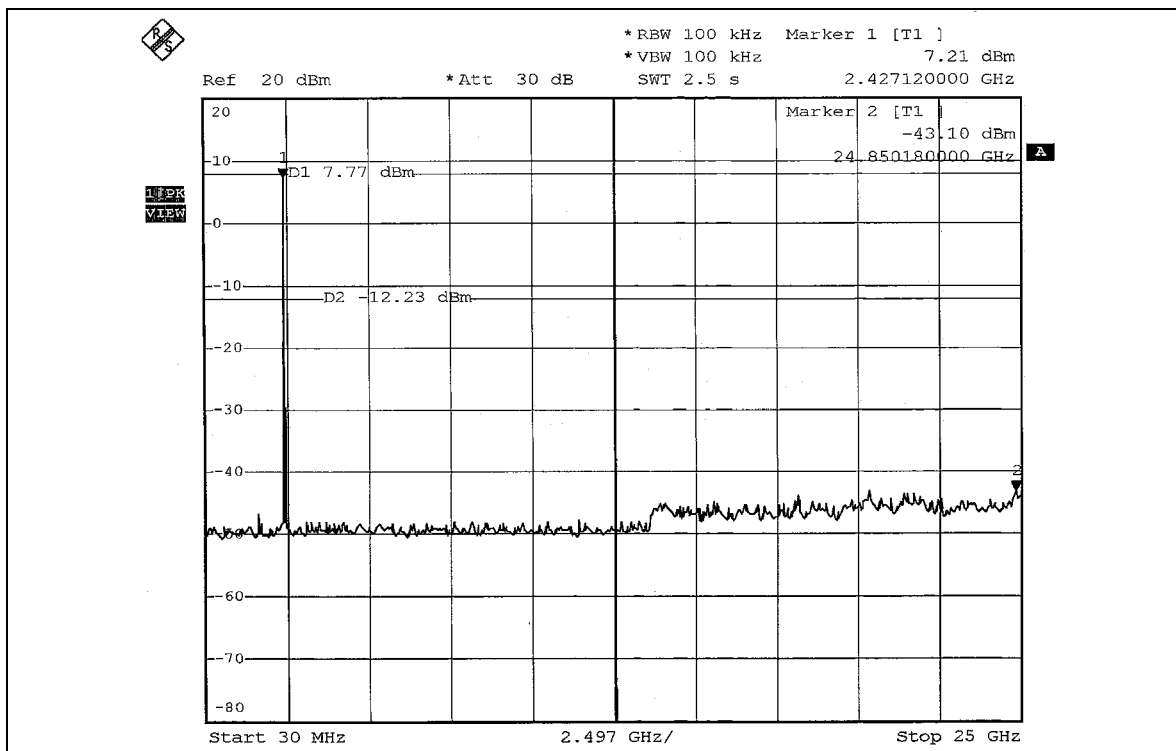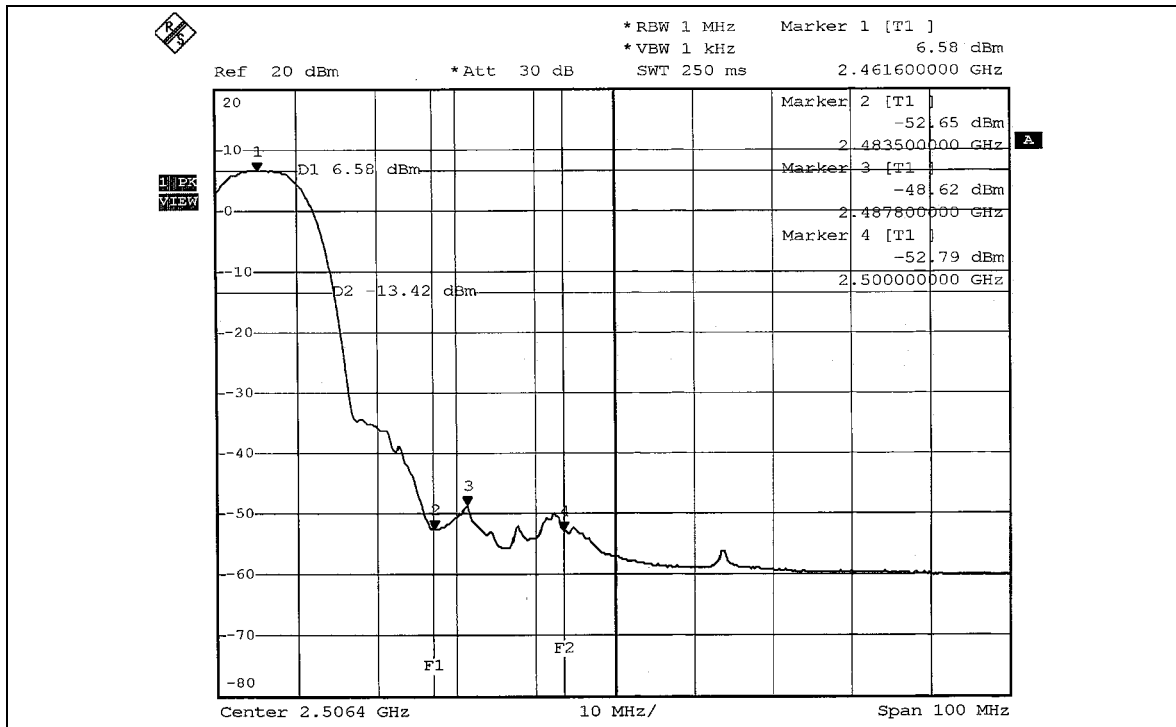

802.11g OFDM NORMAL MODULATION



NOTE 1: The band edge emission plot of OFDM technique on page 65 shows 44.33dBc between carrier maximum power and local maximum emission in restrict band (2.3884GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 109.89dBuV/m (Peak), so the maximum field strength in restrict band is $109.89 - 44.33 = 65.56$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on page 65 shows 48.33dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 100.55dBuV/m (Average), so the maximum field strength in restrict band is $100.55 - 48.33 = 52.22$ dBuV/m which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot of OFDM technique on page 66 shows 43.96dBc between carrier maximum power and local maximum emission in restrict band (2.4846GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 109.35dBuV/m (Peak), so the maximum field strength in restrict band is $109.35 - 43.96 = 65.39$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on page 67 shows 50.00dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.99dBuV/m (Average), so the maximum field strength in restrict band is $99.99 - 50.00 = 49.99$ dBuV/m which is under 54dBuV/m limit.

802.11g OFDM NORMAL MODULATION

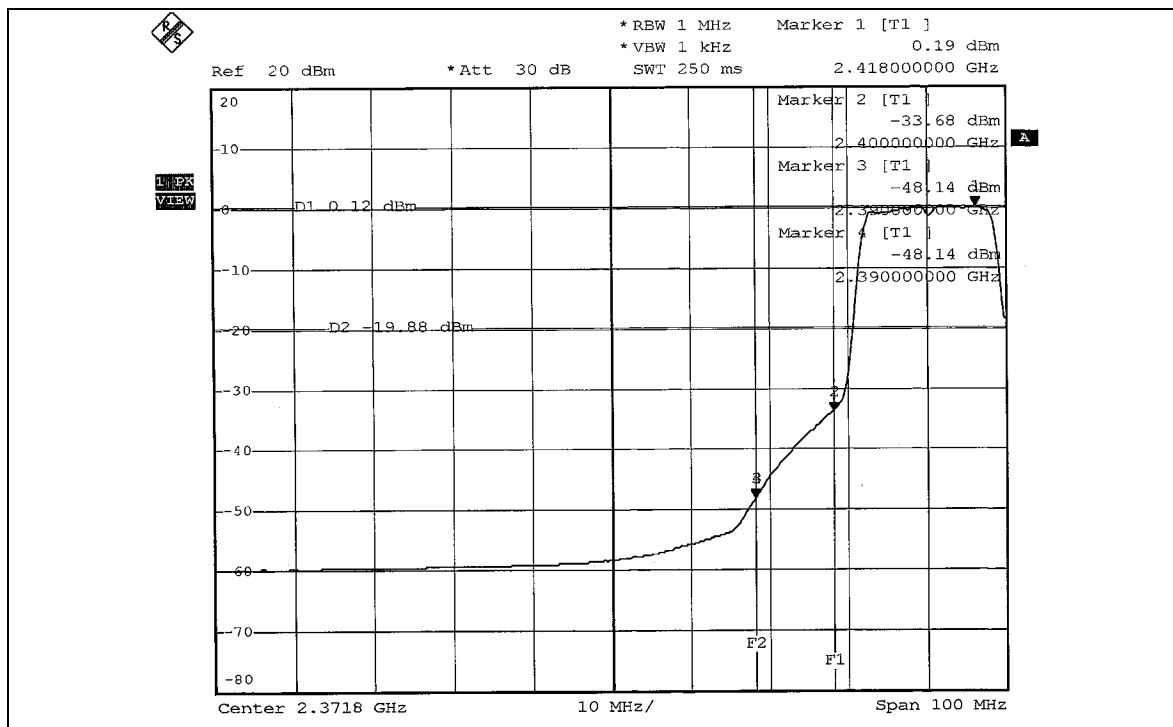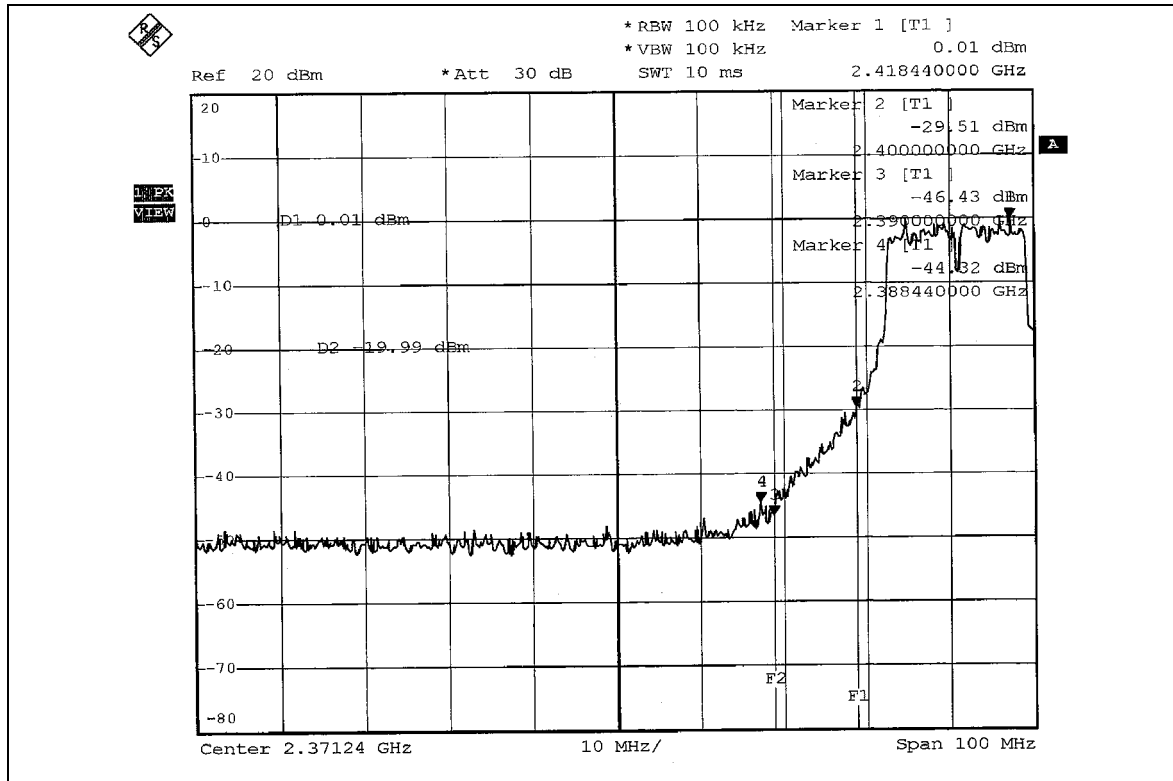

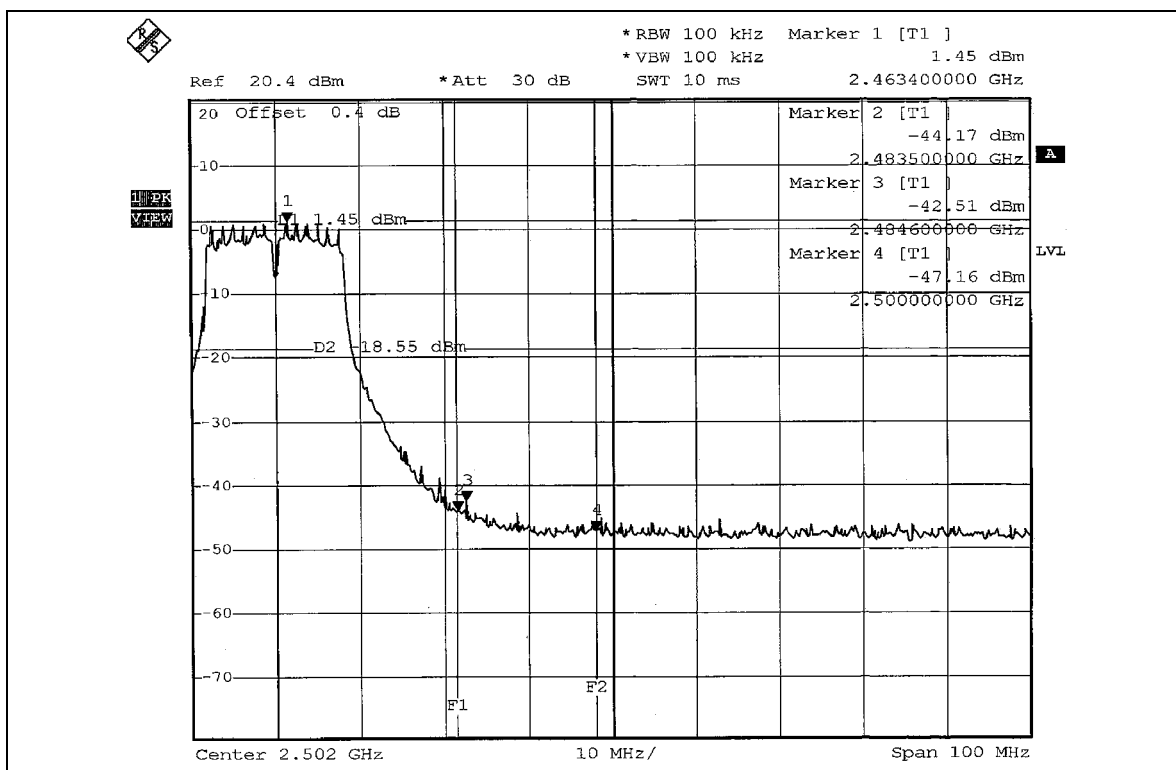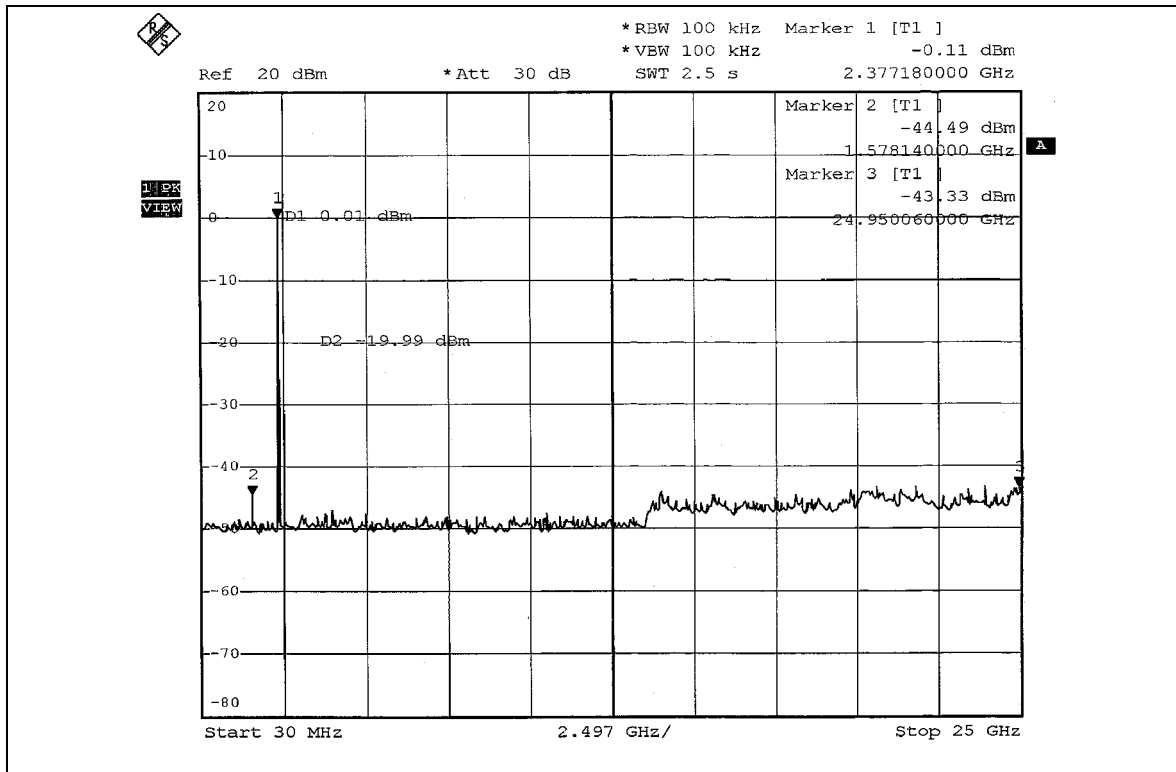

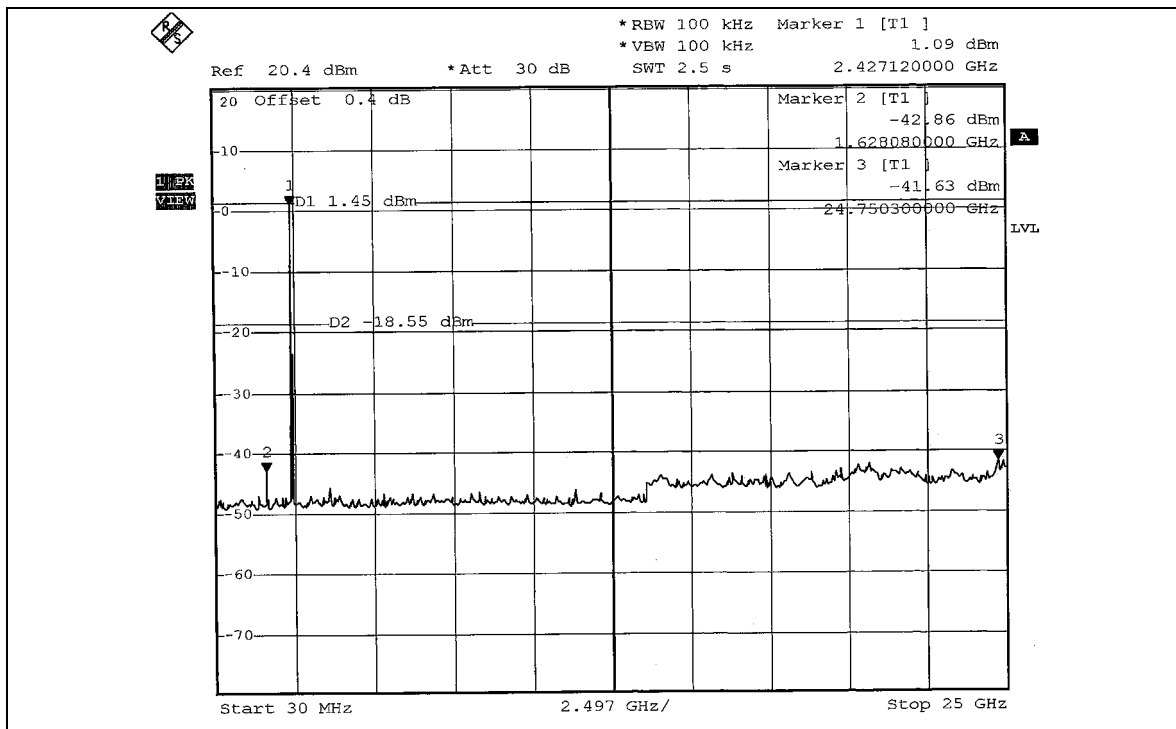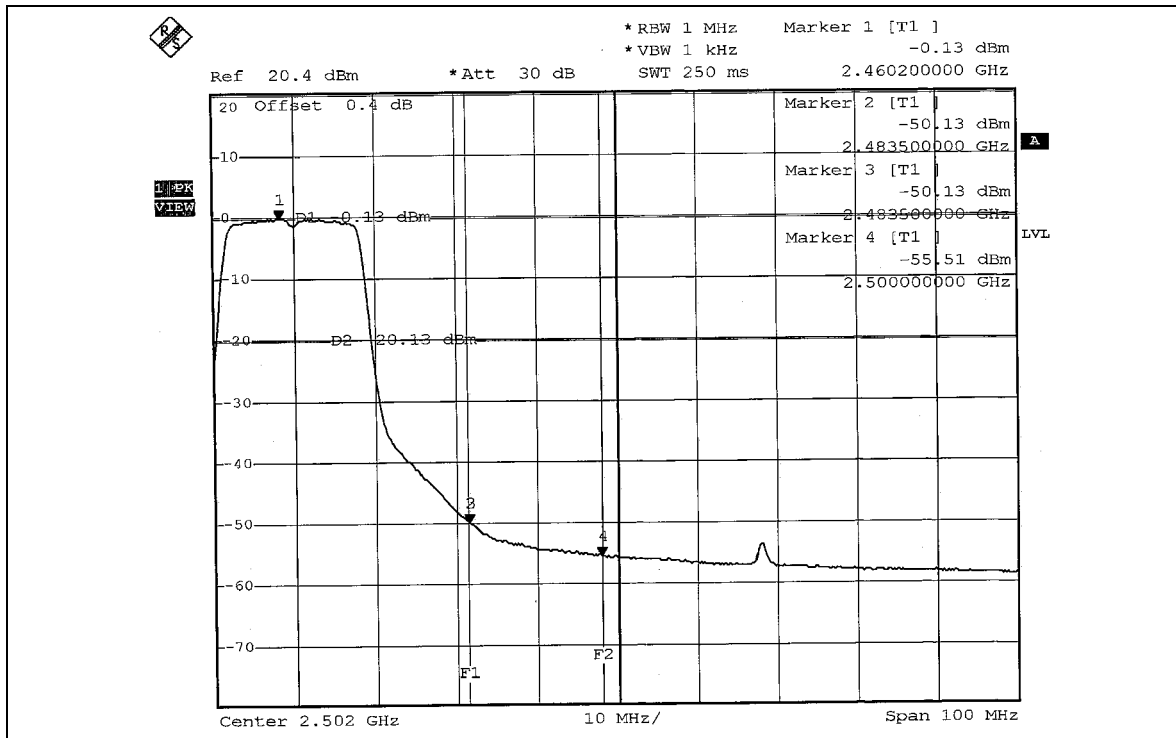

802.11g OFDM TURBO MODULATION



NOTE 1: The band edge emission plot of OFDM technique on page 69 shows 48.76dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 110.53dBuV/m (Peak), so the maximum field strength in restrict band is $110.53 - 48.76 = 61.79$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on page 69 shows 51.88dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 99.87dBuV/m (Average), so the maximum field strength in restrict band is $99.87 - 51.88 = 47.99$ dBuV/m which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot of OFDM technique on page 70 shows 46.92dBc between carrier maximum power and local maximum emission in restrict band (2.4891GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 110.53dBuV/m (Peak), so the maximum field strength in restrict band is $110.53 - 46.92 = 63.61$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on page 71 shows 50.45dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 99.87dBuV/m (Average), so the maximum field strength in restrict band is $99.87 - 50.45 = 49.42$ dBuV/m which is under 54dBuV/m limit.

802.11g OFDM TURBO MODULATION

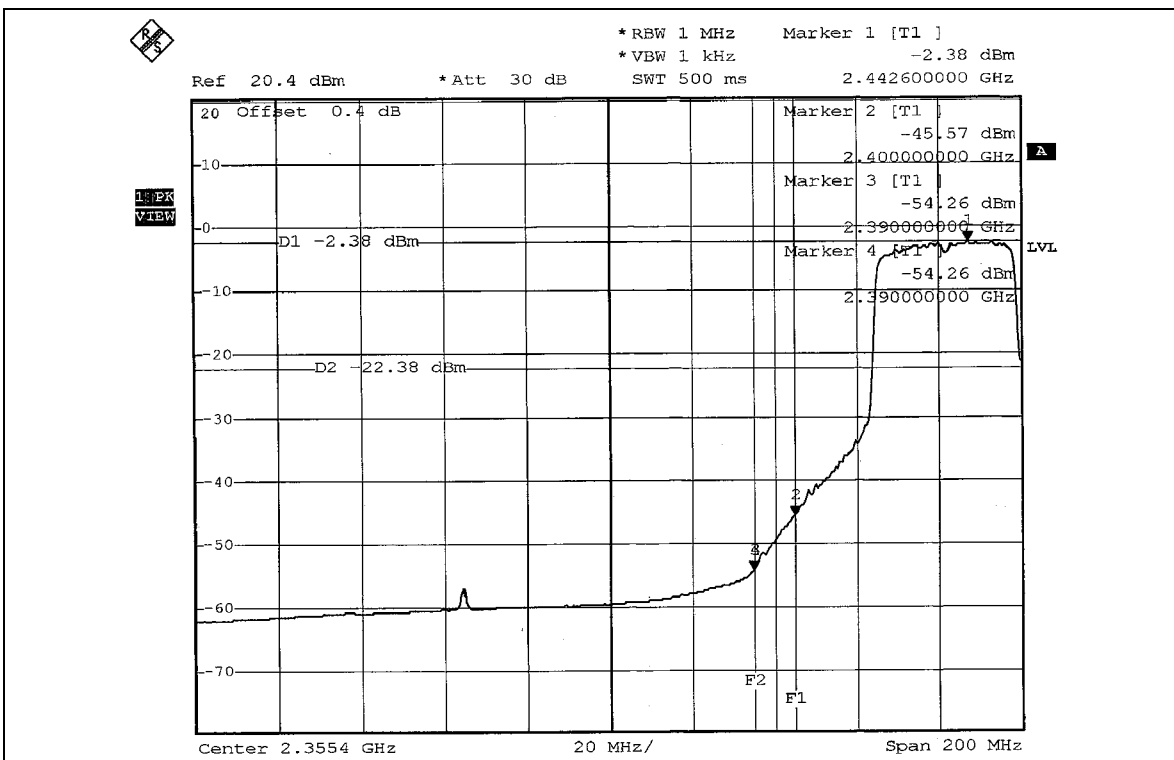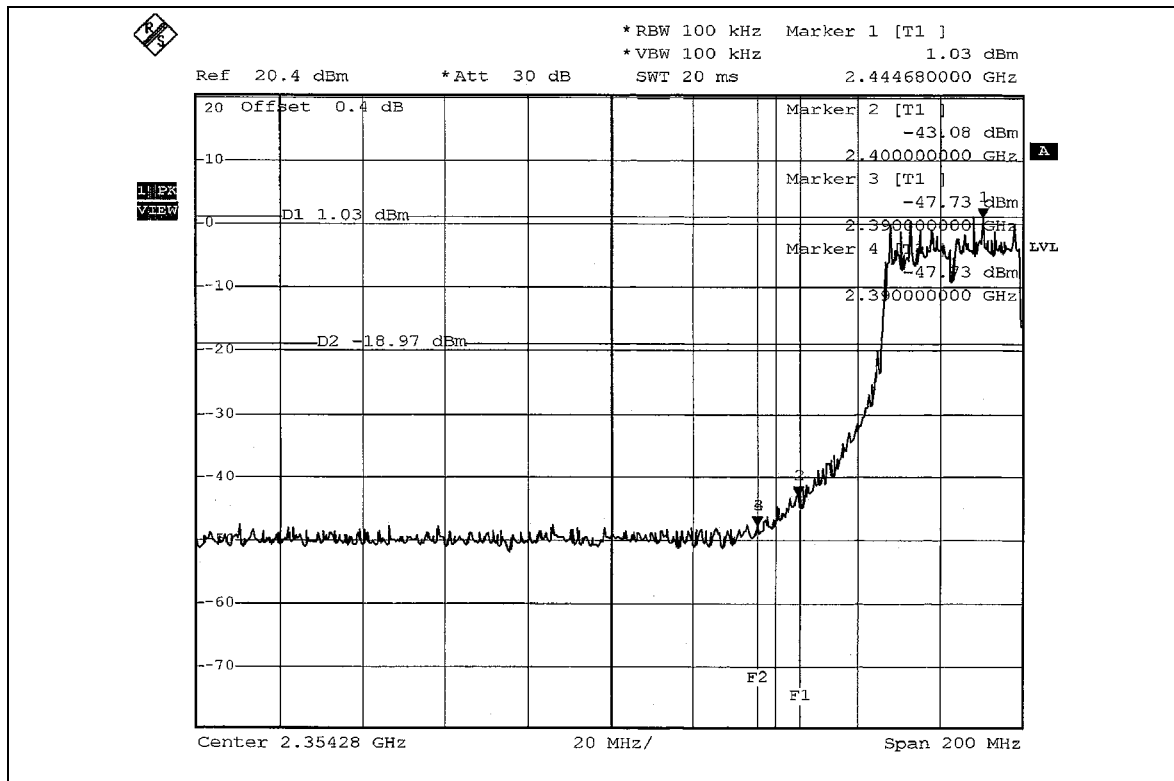

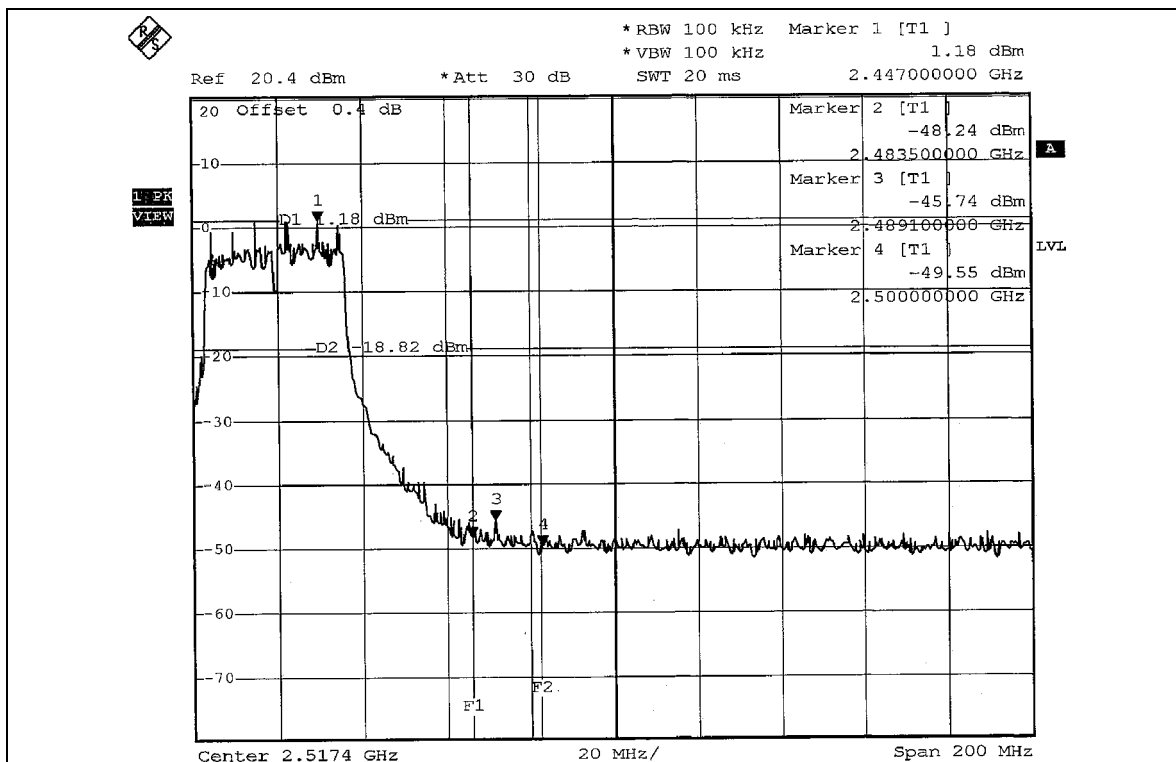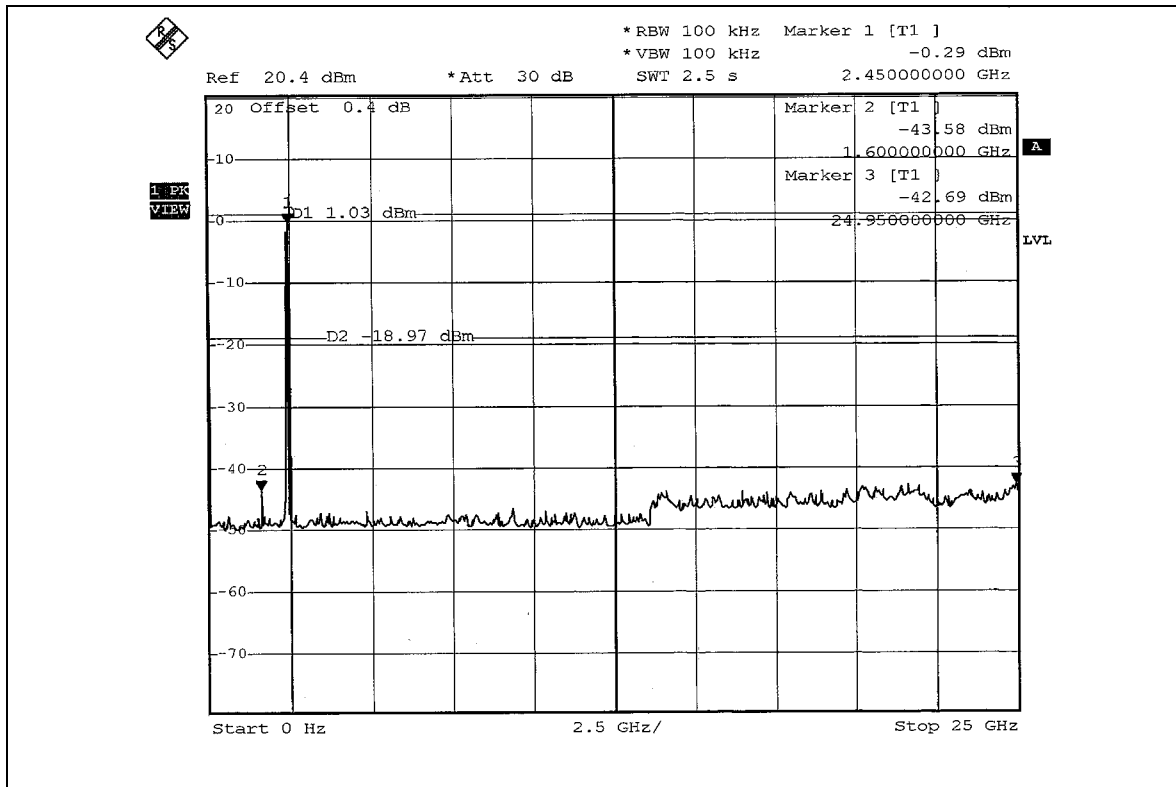

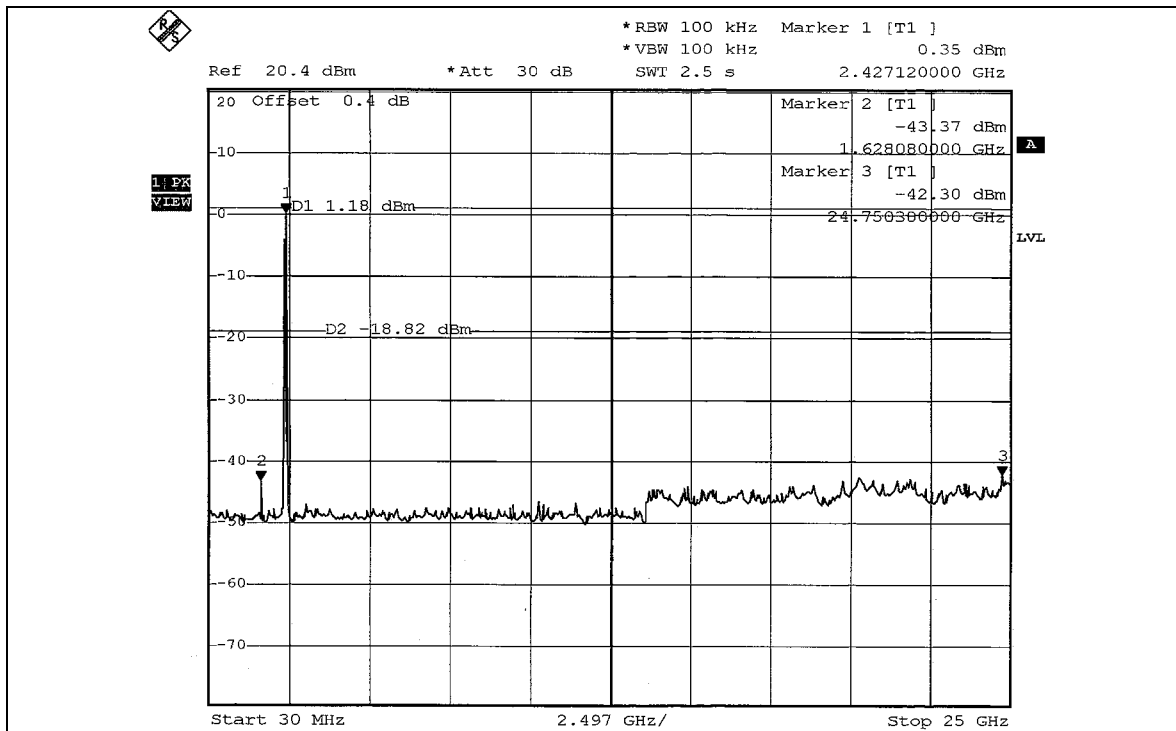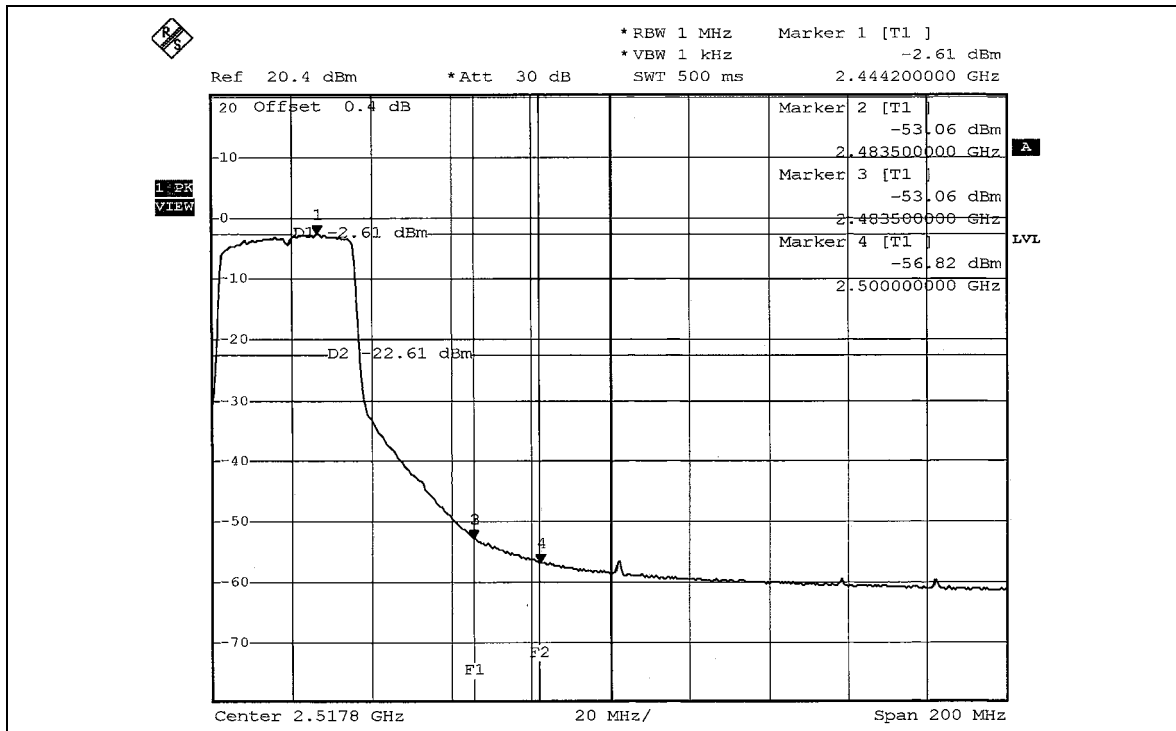



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION


The antenna used in this product is Dipole antenna with RSMA connector. The maximum Gain of the antenna is 0.79dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

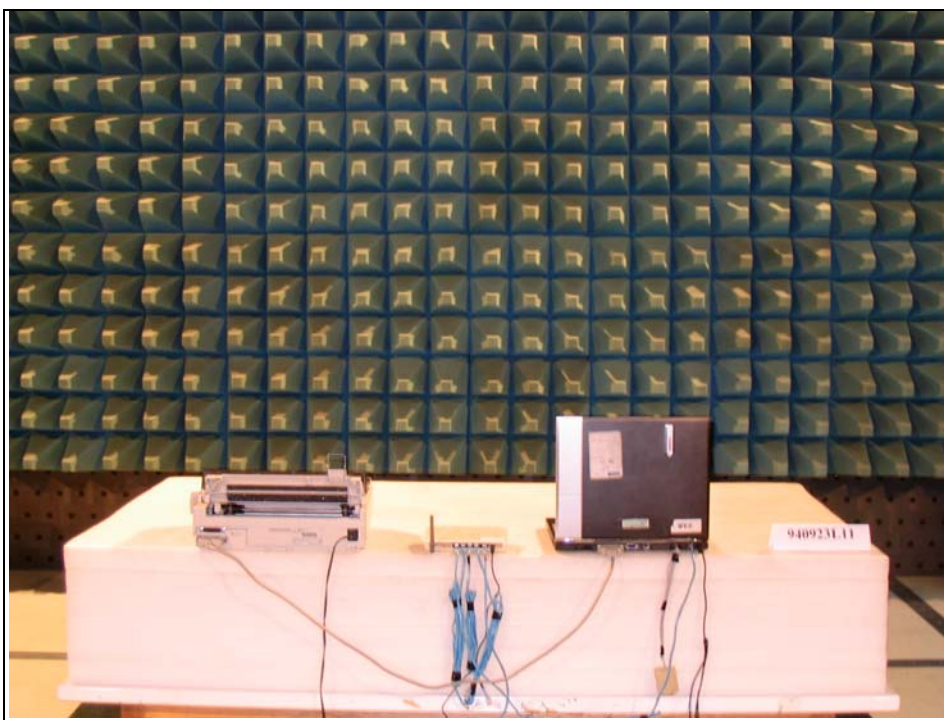



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

| | |
|--------------------|-----------------------|
| USA | FCC, UL, A2LA |
| Germany | TUV Rheinland |
| Japan | VCCI |
| Norway | NEMKO |
| Canada | INDUSTRY CANADA , CSA |
| R.O.C. | CNLA, BSMI, DGT |
| Netherlands | Telefication |
| Singapore | PSB , GOST-ASIA(MOU) |
| Russia | CERTIS(MOU) |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.