

FCC TEST REPORT

according to

FCC Rules and Regulations

Part 15 Subpart C

Applicant	Netgear Inc.
Address	4500 Great America Parkway Santa Clara California 95054 USA
Equipment	Mobile Broadband Router
Model No.	MBR814X
FCC ID	PY305200014
Trade Name	SerComm

Laboratory Accreditation



1332

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Exclusive Certification Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

Contents

1. Report of Measurements and Examinations	3
1.1. List of Measurements and Examinations	3
2. Test Configuration of Equipment under Test	3
2.1. Feature of Equipment under Test	3
Feature of Equipment under Test	3
RF Module Specifications	3
2.2. Test Mode and Test Software.....	3
2.3. Description of Test System	3
2.4. Connection Diagram of Test System	3
2.5. General Information of Test	3
2.6. History of this test report	3
3. Antenna Requirements	3
3.1. Standard Applicable	3
3.2. Antenna Construction and Directional Gain	3
4. Test of Conducted Emission	3
4.1. Test Limit	3
4.2. Test Procedures	3
4.3. Typical Test Setup	3
4.4. Measurement equipment	3
4.5. Test Result and Data.....	3
5. Test of Radiated Emission	3
5.1. Test Limit	3
5.2. Test Procedures	3
5.3. Typical Test Setup.....	3
5.4. Measurement equipment	3
5.5. Test Result and Data.....	3
6. 6dB Bandwidth Measurement	3
6.1. Test Procedure	3
6.2. Test Setup Layout	3
6.3. Test Result and Data.....	3
7. Maximum Peak Output Power.....	3
7.1. Test Procedure	3
7.2. Test Setup Layout	3
7.3. Test Result and Data.....	3
8. Band Edges Measurement.....	3
8.1. Test Procedure	3
8.2. Test Result and Data.....	3
8.3. Restrict band emission Measurement Data.....	3
9. Power Spectral Density Measurement	3
9.1. Test Procedure	3
9.2. Test Setup Layout	3
9.3. Test Result and Data.....	3
10. Restricted Bands of Operation	3
10.1. Labeling Requirement	3
Appendix A. Photographs of EUT.....	A11

CERTIFICATE OF COMPLIANCE

according to

FCC Rules and Regulations


Part 15 Subpart C

Applicant	Netgear Inc.
Address	4500 Great America Parkway Santa Clara California 95054 USA
Equipment	Mobile Broadband Router
Model No.	MBR814X
FCC ID	PY305200014

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2003)**. The test was carried out on Jul. 26, 2005 at *Exclusive Certification Corp.*

Signature

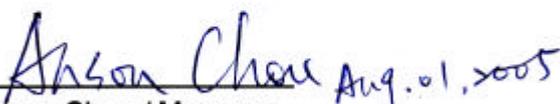
Anson Chou / Manager

1. Report of Measurements and Examinations

1.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(c)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(d)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass

Test engineer: Jerry

2. Test Configuration of Equipment under Test

2.1. Feature of Equipment under Test

Feature of Equipment under Test

Network Protocol and Standards Compatibility

Data and Routing Protocols: TCP/IP, RIP-1, RIP-2, DHCP, RFC 1483 Bridged or Routed Ethernet

Power Adapter

North America: 120V, 60 Hz, input
 United Kingdom, Australia: 240V, 50 Hz, input
 Europe: 230V, 50 Hz, input
 Japan: 100V, 50/60 Hz, input
 All regions (output): 15 V AC @ 1.0A output, 24W maximum 12V DC @ 1.2A

Physical Specifications

Dimensions: 10" x 6.7" x 1.3" 255 mm x 169 mm x 34 mm
 Weight: 1.4 lbs.
 0.62 kg

Environmental Specifications

Operating temperature: 0° to 40° C (32° to 104° F)
 Operating humidity: 90% maximum relative humidity, noncondensing

RF Module Specifications

TX power out B mode @ 11Mbps	15dBm +/-1 dB
TX power out G mode @ 54Mbps	14dBm +/-1dB
RX sensitivity (8% PER) B mode on channels 1, 6, and 11	-91dBm @ 1Mbps -89dBm @ 2Mbps -88dBm @ 5.5Mbps -86dBm @ 11Mbps
RX sensitivity (10% PER) G mode on channels 1, 6, and 11	-88dBm @ 6Mbps -87dBm @ 9Mbps -84dBm @ 12Mbps -82dBm @ 18Mbps -80dBm @ 24Mbps -75dBm @ 36Mbps -72dBm @ 48Mbps -70dBm @ 54Mbps
Transmit Sidelobe Level	-30 dBr beyond ±11 MHz and -50dBr beyond 22 MHz for 802.11b -20 dBr at 11 MHz, -28 dBr at 20MHz, and -40 dBr beyond 30 MHz for 802.11g
Frequency Accuracy	+/- 25ppm
Pre EMI Scan	3 dB below FCC limit
Error Vector Magnitude (EVM)	1, 2, 5.5, 11Mbps < 8% 6, 9, 12, 18, 24, 36Mbps < 12% 48Mbps < 8% 54Mbps < 6%

2.2. Test Mode and Test Software

The following test mode and test software was performed for conduction and radiation test:

- 802.11b (CH LO: 2412MHz) • 802.11b (CH MID: 2437MHz) • 802.11b (CH HI: 2462MHz)
- 802.11g (CH LO: 2412MHz) • 802.11g (CH MID: 2437MHz) • 802.11g (CH HI: 2462MHz)
- An executive programs, "telnet" Application under WIN XP.

The test mode include two kind of adapter:

Adapter model 1 : ADS6818-1812W

Adapter model 2 : DV-151A-1


2.3. Description of Test System

Device	Manufacturer	Model No.	Description
PC	IBM	IGV	Power Cable, Unshielding 1.8 m
Monitor	SlimAGE	510A	Power Cable, Adapter Unshielding 1.8 m Data Cable, VGA shielding 1.35 m
Keyboard	IBM	KB-0225	Data Cable, PS2, shielding 1.85 m
Mouse	IBM	MO28VO	Data Cable, USB shielding 1.85 m
Modem	ACEXX	DM-1414	Power Cable, Adapter Unshielding 1.8 m Data Cable, RS232 Unshielding 1.35 m
Printer	HP	Desk Jet400	Power Cable, Adapter Unshielding 1.8 m Data Cable, PRINT Shielding 1.6 m
Notebook (Remote site)	IBM	R40(2723-BV1)	Power Cable, Adapter Unshielding 1.8 m

Use Cable:

Cable	Description
RJ45	Unshielding, 10m
RJ45	Unshielding, 1.5m
RJ45*2	Unshielding, 0.5m

2.4. Connection Diagram of Test System

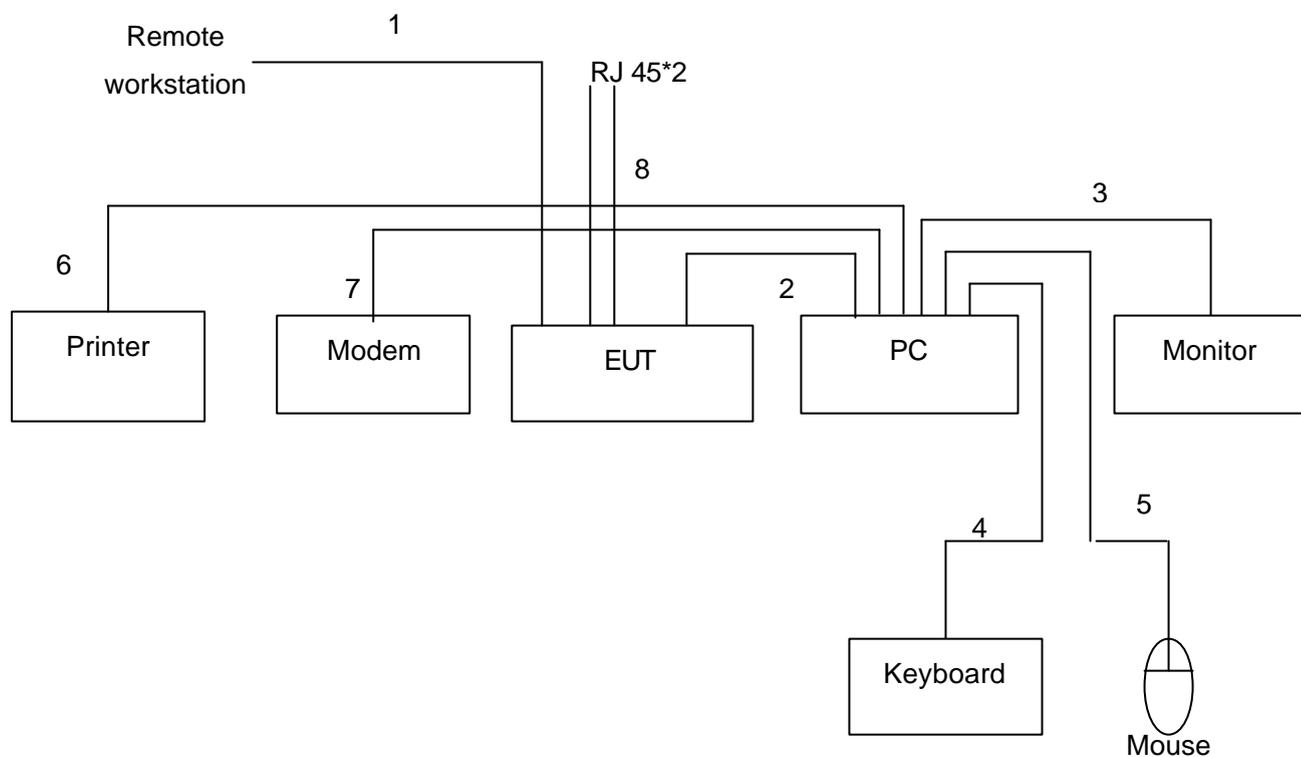

1. The RJ 45 cable is connected from Remote Workstation to the EUT.
2. The RJ 45 cable is connected from PC to the EUT.
3. The I/O cable is connected from PC to the Monitor.
4. The I/O cable is connected from PC to the Keyboard.
5. The I/O cable is connected from PC to the Mouse.
6. The I/O cable is connected from PC to the Printer.
7. The I/O cable is connected from PC to the Modem.
8. These RJ 45 cables are floating

2.5. General Information of Test

Test Site:	Exclusive Certification Corp. 4F-2, No. 28, Lane 78, Xing-Ai Rd. Nei-hu, Taipei City 114 Taiwan R.O.C.
Test Site Location (OATS1-SD):	No.68-1, Shihbachongsi, shihding Township, Taipei County 223, Taiwan, R.O.C.
Test Voltage:	AC 120V/ 60Hz
Test in Compliance with:	ANSI C63.4-2003 FCC Part 15 Subpart C
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 24620MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

2.6. History of this test report

ORIGINAL.

3. Antenna Requirements

3.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2. Antenna Construction and Directional Gain

Antenna type : Reverse SMA connector, dipole antenna

Antenna Gain: 2 dBi.

4. Test of Conducted Emission

4.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

4.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.3. Typical Test Setup

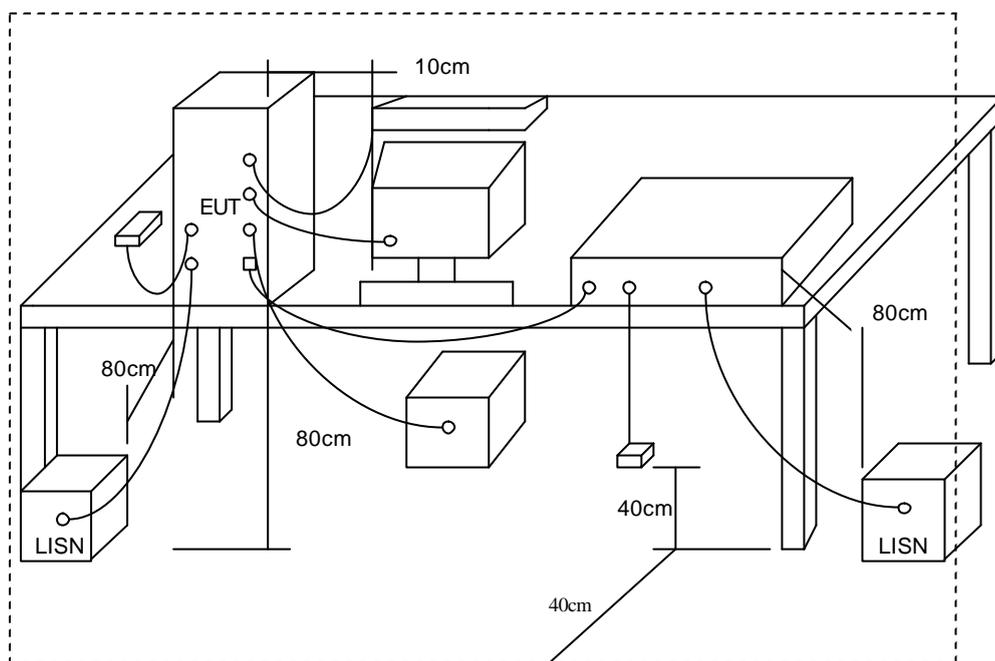

4.4. Measurement equipment


Instrument/Ancillary	Type	Manufacturer	Valid Date.
Receiver	SCR3501	Schaffner	2005/11/03
LISN	NNB-2/16Z	MESS TEC	2006/03/30
LISN	NNB-2/16Z	ROLF HEINE	2006/05/01

4.5. Test Result and Data

Test Adaptor 1: ADS6818-1812W

EUT : MBR814X
 Power : AC 120V
 Test Mode : 802.11b_ch1
 Memo : ADS6818-1812-W

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 64 %

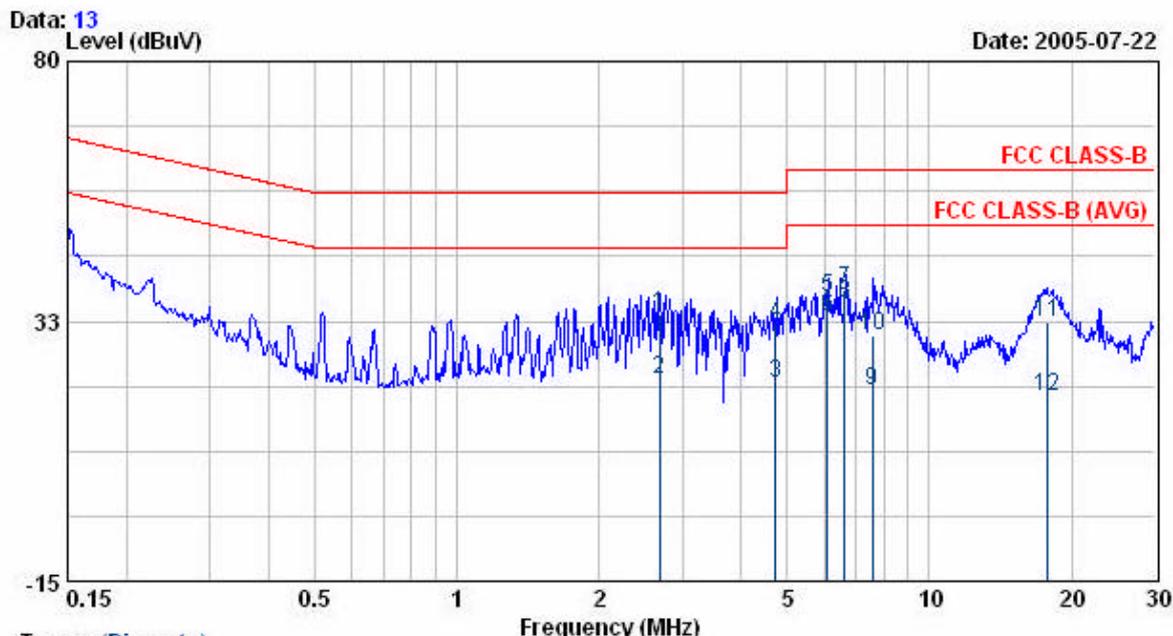


Trace: (Discrete)

Freq MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dBuV	Remark
2.69	33.28	0.60	33.88	56.00	-22.12	QP
2.69	21.30	0.60	21.90	46.00	-24.10	AVERAGE
4.73	20.58	0.60	21.18	46.00	-24.82	AVERAGE
4.73	31.53	0.60	32.13	56.00	-23.87	QP
6.08	36.24	0.60	36.84	60.00	-23.16	QP
6.08	32.75	0.60	33.35	50.00	-16.65	AVERAGE
6.62	37.78	0.60	38.38	60.00	-21.62	QP
6.62	35.16	0.60	35.76	50.00	-14.24	AVERAGE
7.59	19.08	0.60	19.68	50.00	-30.32	AVERAGE
7.59	29.22	0.60	29.82	60.00	-30.18	QP
17.76	31.57	0.84	32.41	60.00	-27.59	QP
17.76	17.81	0.84	18.65	50.00	-31.35	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : MBR814X
 Power : AC 120V
 Test Mode : 802.11b_ch1
 Memo : ADS6818-1812-W

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 64 %

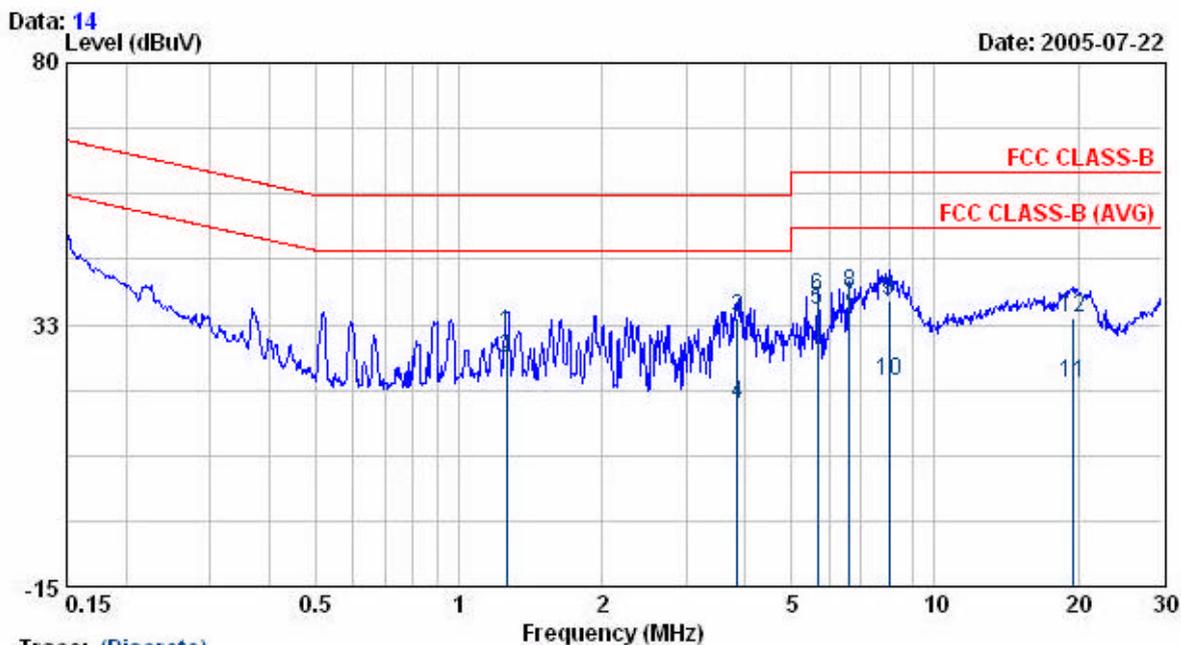


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
1.26	30.38	0.57	30.95	56.00	-25.05	QP
1.26	25.89	0.57	26.46	46.00	-19.54	AVERAGE
3.85	32.86	0.70	33.56	56.00	-22.44	QP
3.85	17.38	0.70	18.08	46.00	-27.92	AVERAGE
5.67	34.47	0.66	35.13	50.00	-14.87	AVERAGE
5.67	36.80	0.66	37.46	60.00	-22.54	QP
6.62	35.17	0.65	35.82	50.00	-14.18	AVERAGE
6.62	37.47	0.65	38.12	60.00	-21.88	QP
8.01	36.34	0.62	36.96	60.00	-23.04	QP
8.01	21.45	0.62	22.07	50.00	-27.93	AVERAGE
19.53	21.26	0.62	21.88	50.00	-28.12	AVERAGE
19.53	33.23	0.62	33.85	60.00	-26.15	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : MBR814X
 Power : AC 120V
 Test Mode : 802.11b_ch6
 Memo : ADS6818-1812-W

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 64 %

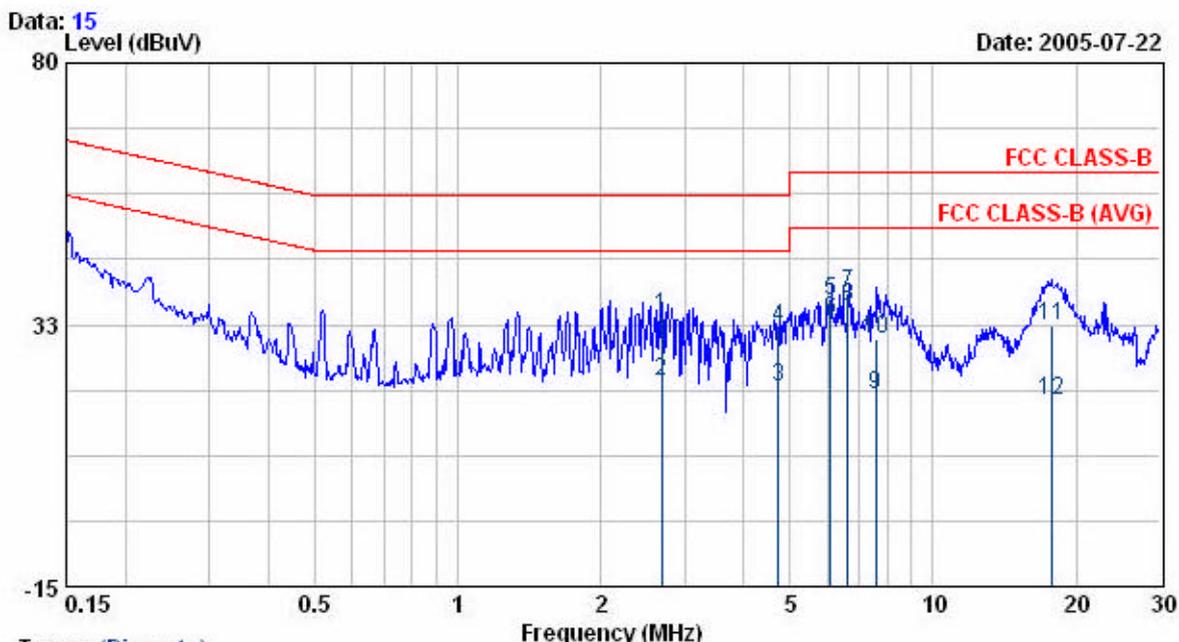

Trace: (Discrete)


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
2.69	33.33	0.60	33.93	56.00	-22.07	QP
2.69	21.50	0.60	22.10	46.00	-23.90	AVERAGE
4.73	20.60	0.60	21.20	46.00	-24.80	AVERAGE
4.73	31.53	0.60	32.13	56.00	-23.87	QP
6.08	36.11	0.60	36.71	60.00	-23.29	QP
6.08	32.68	0.60	33.28	50.00	-16.72	AVERAGE
6.62	37.69	0.60	38.29	60.00	-21.71	QP
6.62	35.11	0.60	35.71	50.00	-14.29	AVERAGE
7.59	19.26	0.60	19.86	50.00	-30.14	AVERAGE
7.59	29.35	0.60	29.95	60.00	-30.05	QP
17.76	31.57	0.84	32.41	60.00	-27.59	QP
17.76	17.81	0.84	18.65	50.00	-31.35	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : MBR814X
 Power : AC 120V
 Test Mode : 802.11b_ch6
 Memo : ADS6818-1812-W

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 64 %

Data: 16

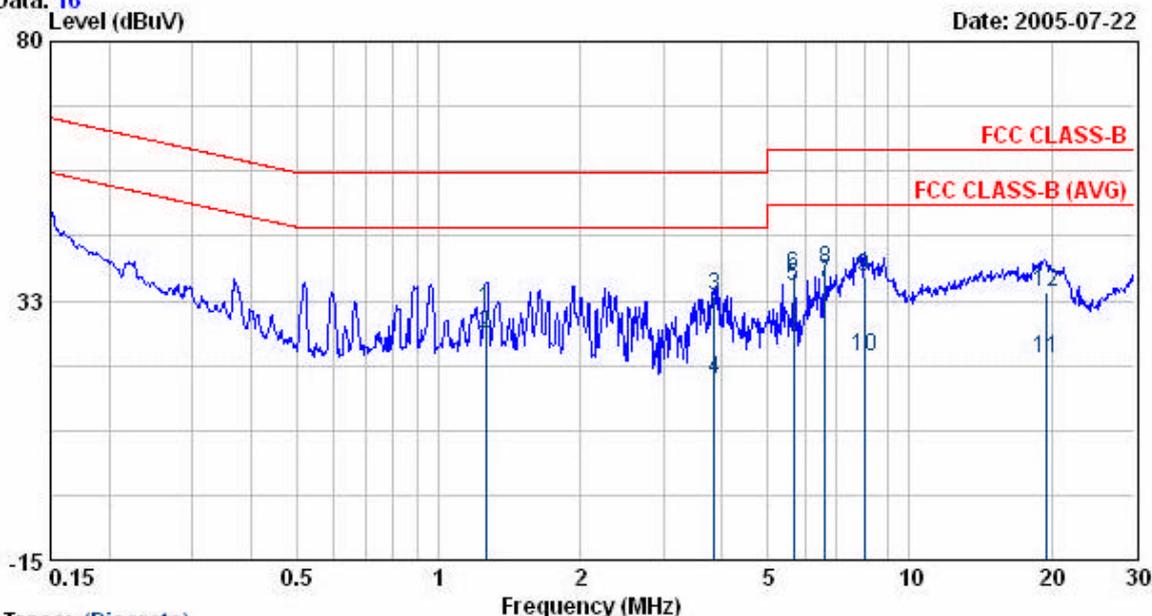


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
1.26	30.33	0.57	30.90	56.00	-25.10	QP
1.26	25.79	0.57	26.36	46.00	-19.64	AVERAGE
3.85	32.65	0.70	33.35	56.00	-22.65	QP
3.85	17.25	0.70	17.95	46.00	-28.05	AVERAGE
5.67	34.39	0.66	35.05	50.00	-14.95	AVERAGE
5.67	36.66	0.66	37.32	60.00	-22.68	QP
6.62	35.19	0.65	35.84	50.00	-14.16	AVERAGE
6.62	37.50	0.65	38.15	60.00	-21.85	QP
8.01	36.34	0.62	36.96	60.00	-23.04	QP
8.01	21.45	0.62	22.07	50.00	-27.93	AVERAGE
19.53	21.33	0.62	21.95	50.00	-28.05	AVERAGE
19.53	33.39	0.62	34.01	60.00	-25.99	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : MBR814X
 Power : AC 120V
 Test Mode : 802.11b_ch11
 Memo : ADS6818-1812-W

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 64 %

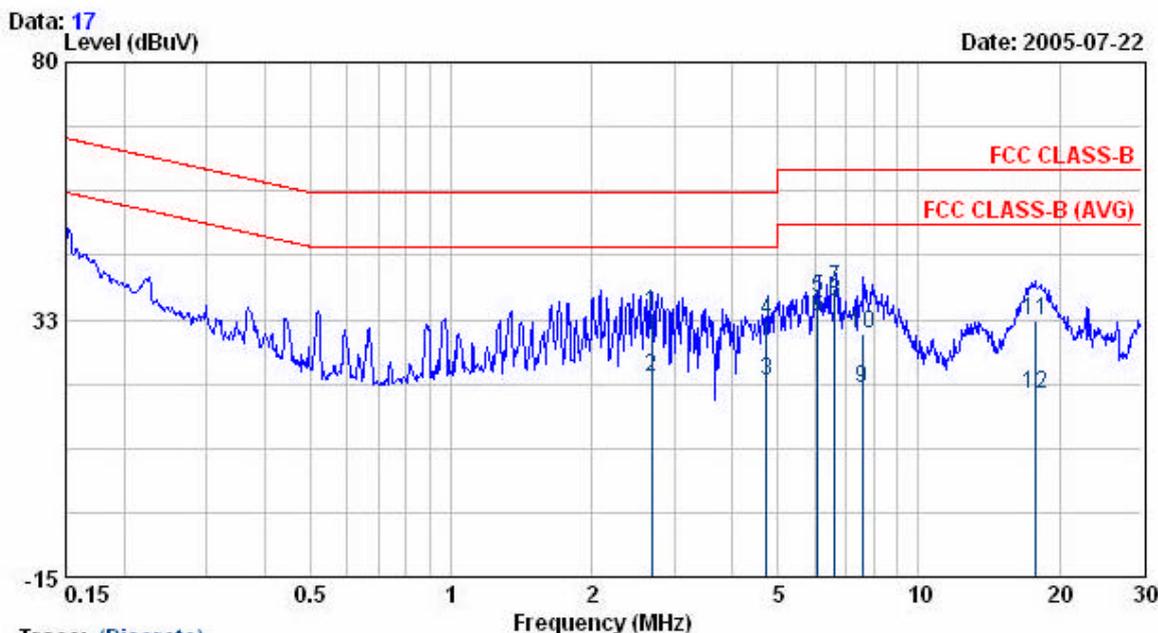


Trace: (Discrete)

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
2.69	33.21	0.60	33.81	56.00	-22.19	QP
2.69	21.38	0.60	21.98	46.00	-24.02	AVERAGE
4.73	20.55	0.60	21.15	46.00	-24.85	AVERAGE
4.73	31.66	0.60	32.26	56.00	-23.74	QP
6.08	36.04	0.60	36.64	60.00	-23.36	QP
6.08	32.57	0.60	33.17	50.00	-16.83	AVERAGE
6.62	37.55	0.60	38.15	60.00	-21.85	QP
6.62	35.09	0.60	35.69	50.00	-14.31	AVERAGE
7.59	19.30	0.60	19.90	50.00	-30.10	AVERAGE
7.59	29.32	0.60	29.92	60.00	-30.08	QP
17.76	31.57	0.84	32.41	60.00	-27.59	QP
17.76	17.81	0.84	18.65	50.00	-31.35	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : MBR814X
 Power : AC 120V
 Test Mode : 802.11b_ch11
 Memo : ADS6818-1812-W

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 64 %

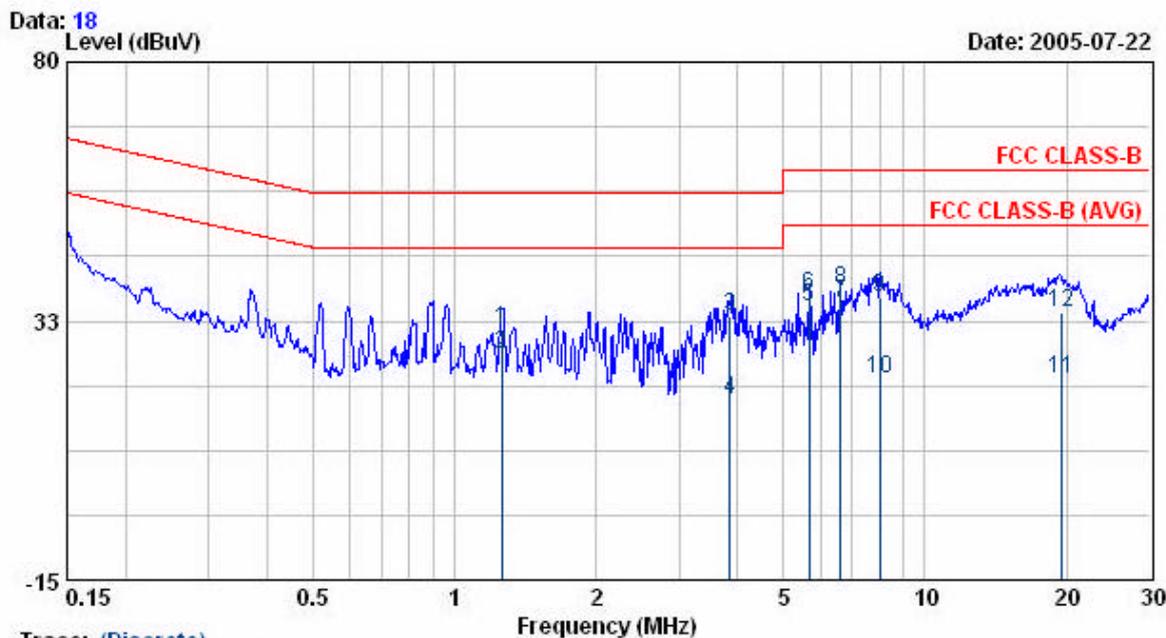


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
1.26	30.50	0.57	31.07	56.00	-24.93	QP
1.26	25.88	0.57	26.45	46.00	-19.55	AVERAGE
3.85	32.70	0.70	33.40	56.00	-22.60	QP
3.85	17.31	0.70	18.01	46.00	-27.99	AVERAGE
5.67	34.31	0.66	34.97	50.00	-15.03	AVERAGE
5.67	36.55	0.66	37.21	60.00	-22.79	QP
6.62	35.07	0.65	35.72	50.00	-14.28	AVERAGE
6.62	37.44	0.65	38.09	60.00	-21.91	QP
8.01	36.32	0.62	36.94	60.00	-23.06	QP
8.01	21.39	0.62	22.01	50.00	-27.99	AVERAGE
19.53	21.35	0.62	21.97	50.00	-28.03	AVERAGE
19.53	33.39	0.62	34.01	60.00	-25.99	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : MBR814X
 Power : AC 120V
 Test Mode : 802.11g_ch1
 Memo : ADS6818-1812-W

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 64 %

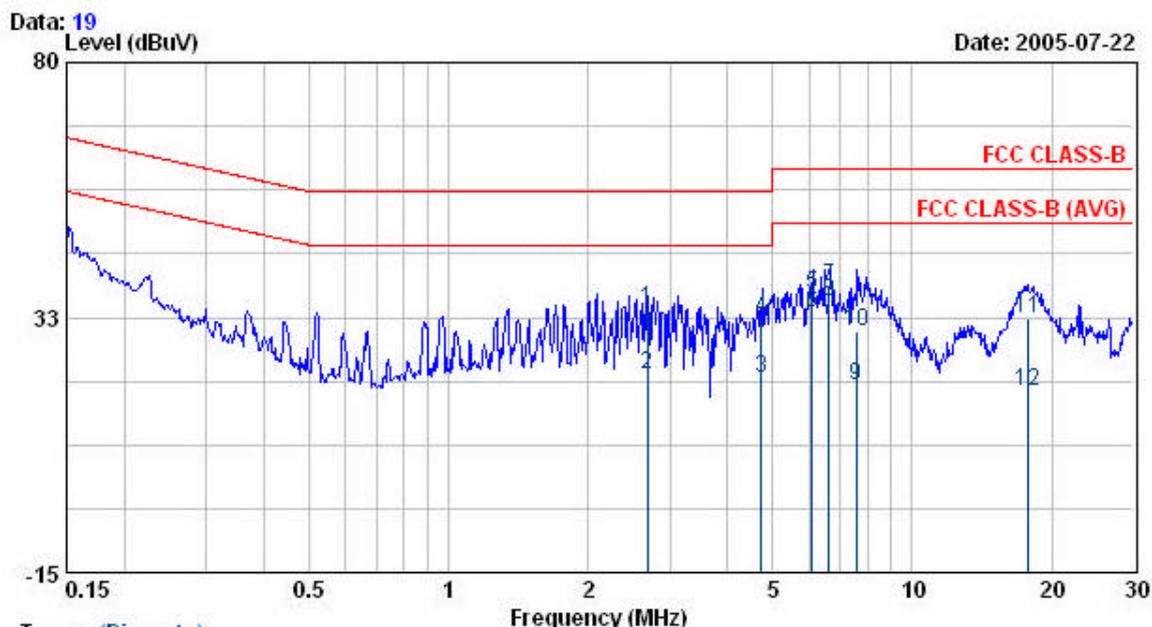


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
2.69	33.36	0.60	33.96	56.00	-22.04	QP
2.69	21.29	0.60	21.89	46.00	-24.11	AVERAGE
4.73	20.44	0.60	21.04	46.00	-24.96	AVERAGE
4.73	31.58	0.60	32.18	56.00	-23.82	QP
6.08	36.14	0.60	36.74	60.00	-23.26	QP
6.08	32.63	0.60	33.23	50.00	-16.77	AVERAGE
6.62	37.47	0.60	38.07	60.00	-21.93	QP
6.62	35.01	0.60	35.61	50.00	-14.39	AVERAGE
7.59	19.24	0.60	19.84	50.00	-30.16	AVERAGE
7.59	29.40	0.60	30.00	60.00	-30.00	QP
17.76	31.51	0.84	32.35	60.00	-27.65	QP
17.76	17.81	0.84	18.65	50.00	-31.35	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : MBR814X
 Power : AC 120V
 Test Mode : 802.11g_ch1
 Memo : ADS6818-1812-W

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 64 %

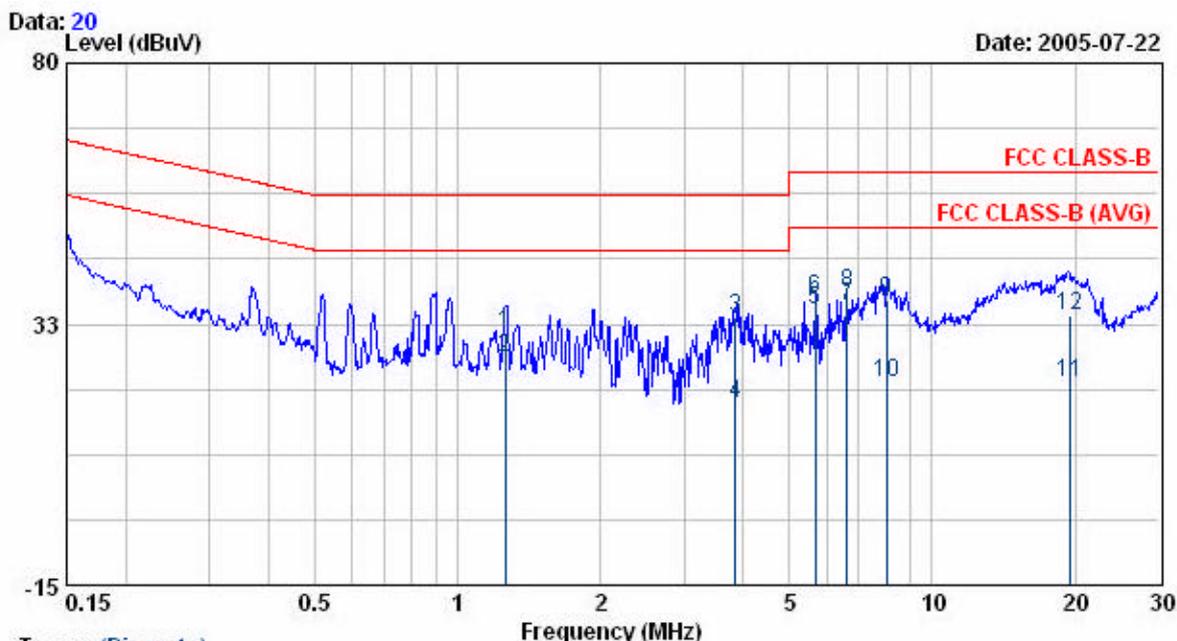


Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
1.26	30.44	0.57	31.01	56.00	-24.99	QP
1.26	25.80	0.57	26.37	46.00	-19.63	AVERAGE
3.85	32.89	0.70	33.59	56.00	-22.41	QP
3.85	17.36	0.70	18.06	46.00	-27.94	AVERAGE
5.67	34.39	0.66	35.05	50.00	-14.95	AVERAGE
5.67	36.40	0.66	37.06	60.00	-22.94	QP
6.62	35.11	0.65	35.76	50.00	-14.24	AVERAGE
6.62	37.49	0.65	38.14	60.00	-21.86	QP
8.01	36.38	0.62	37.00	60.00	-23.00	QP
8.01	21.37	0.62	21.99	50.00	-28.01	AVERAGE
19.53	21.39	0.62	22.01	50.00	-27.99	AVERAGE
19.53	33.40	0.62	34.02	60.00	-25.98	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : MBR814X
 Power : AC 120V
 Test Mode : 802.11g_ch6
 Memo : ADS6818-1812-W

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 64 %

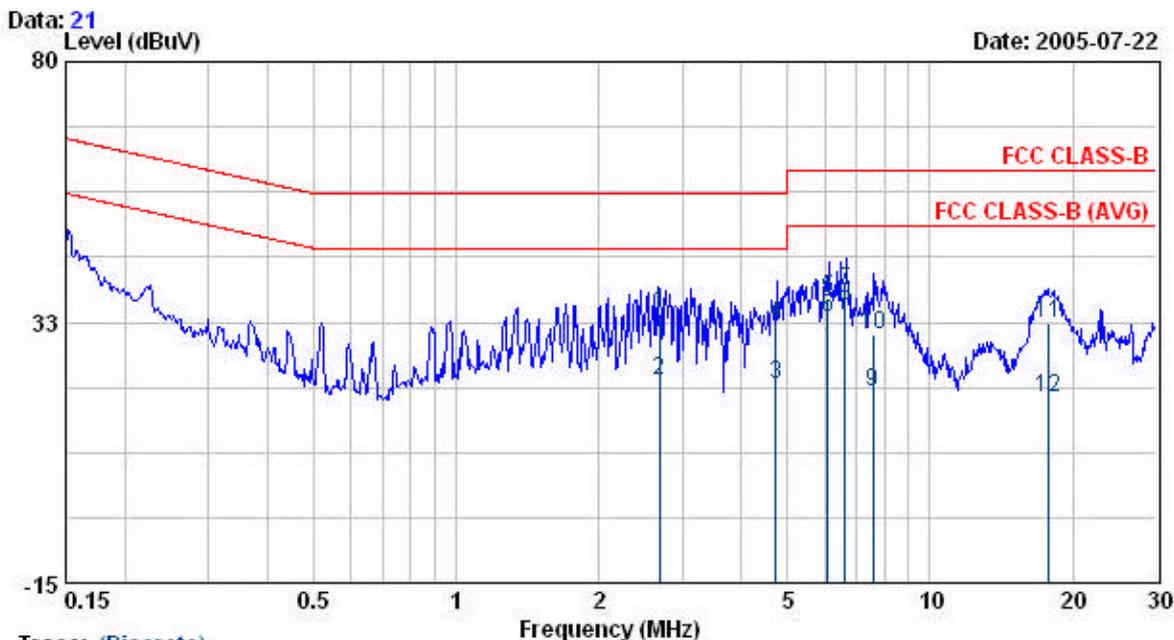

Trace: (Discrete)


Freq MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dBuV	Remark
2.69	33.53	0.60	34.13	56.00	-21.87	QP
2.69	21.40	0.60	22.00	46.00	-24.00	AVERAGE
4.73	20.60	0.60	21.20	46.00	-24.80	AVERAGE
4.73	31.68	0.60	32.28	56.00	-23.72	QP
6.08	36.25	0.60	36.85	60.00	-23.15	QP
6.08	32.70	0.60	33.30	50.00	-16.70	AVERAGE
6.62	37.50	0.60	38.10	60.00	-21.90	QP
6.62	35.01	0.60	35.61	50.00	-14.39	AVERAGE
7.59	19.30	0.60	19.90	50.00	-30.10	AVERAGE
7.59	29.75	0.60	30.35	60.00	-29.65	QP
17.76	31.50	0.84	32.34	60.00	-27.66	QP
17.76	17.81	0.84	18.65	50.00	-31.35	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : MBR814X
 Power : AC 120V
 Test Mode : 802.11g_ch6
 Memo : ADS6818-1812-W

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 64 %

Data: 22 Level (dBuV) Date: 2005-07-22

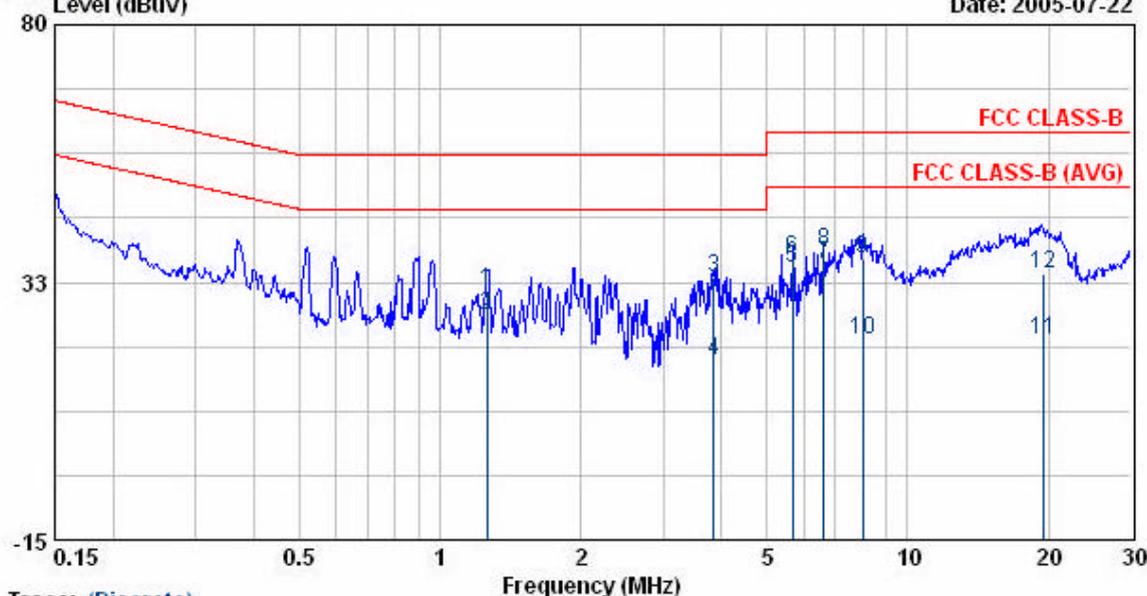

Trace: (Discrete)


Freq MHz	Read Level dBuV	Factor dB	Level dBuV	Limit dBuV	Over Limit dBuV	Remark
1.26	30.50	0.57	31.07	56.00	-24.93	QP
1.26	25.86	0.57	26.43	46.00	-19.57	AVERAGE
3.85	32.77	0.70	33.47	56.00	-22.53	QP
3.85	17.53	0.70	18.23	46.00	-27.77	AVERAGE
5.67	34.41	0.66	35.07	50.00	-14.93	AVERAGE
5.67	36.29	0.66	36.95	60.00	-23.05	QP
6.62	35.11	0.65	35.76	50.00	-14.24	AVERAGE
6.62	37.49	0.65	38.14	60.00	-21.86	QP
8.01	36.35	0.62	36.97	60.00	-23.03	QP
8.01	21.30	0.62	21.92	50.00	-28.08	AVERAGE
19.53	21.40	0.62	22.02	50.00	-27.98	AVERAGE
19.53	33.42	0.62	34.04	60.00	-25.96	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : MBR814X
 Power : AC 120V
 Test Mode : 802.11g_ch11
 Memo : ADS6818-1812-W

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 64 %

Data: 23

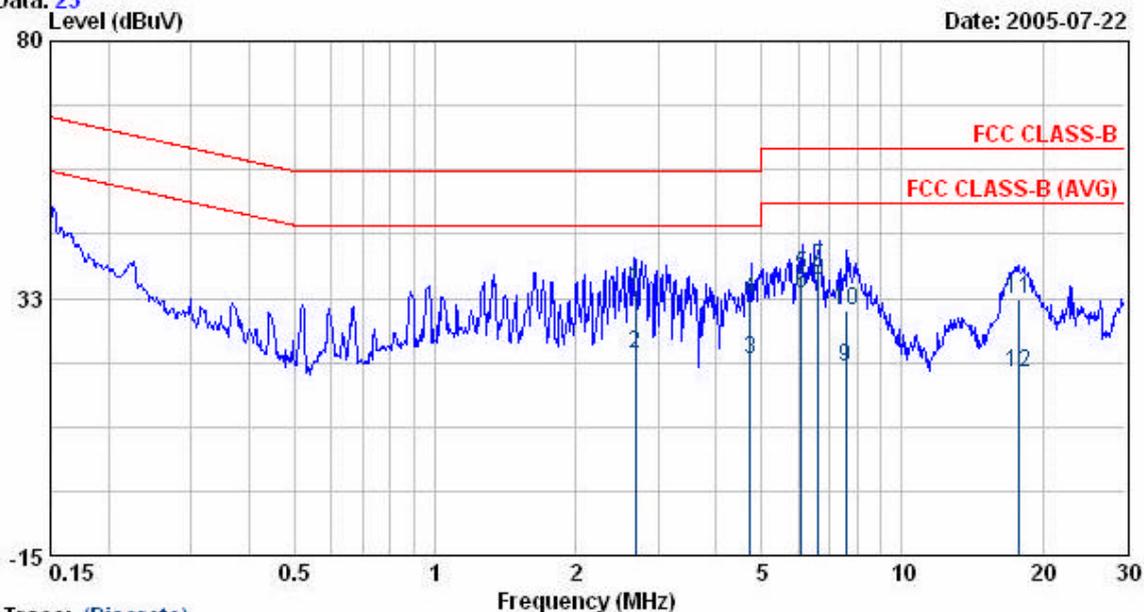

Trace: (Discrete)


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
2.69	33.59	0.60	34.19	56.00	-21.81	QP
2.69	21.60	0.60	22.20	46.00	-23.80	AVERAGE
4.73	20.66	0.60	21.26	46.00	-24.74	AVERAGE
4.73	31.60	0.60	32.20	56.00	-23.80	QP
6.08	36.29	0.60	36.89	60.00	-23.11	QP
6.08	32.73	0.60	33.33	50.00	-16.67	AVERAGE
6.62	37.47	0.60	38.07	60.00	-21.93	QP
6.62	35.20	0.60	35.80	50.00	-14.20	AVERAGE
7.59	19.35	0.60	19.95	50.00	-30.05	AVERAGE
7.59	29.70	0.60	30.30	60.00	-29.70	QP
17.76	31.53	0.84	32.37	60.00	-27.63	QP
17.76	17.86	0.84	18.70	50.00	-31.30	AVERAGE

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : MBR014X
 Power : AC 120V
 Test Mode : 802.11g_ch11
 Memo : ADS6818-1812-W

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 64 %

Data: 24

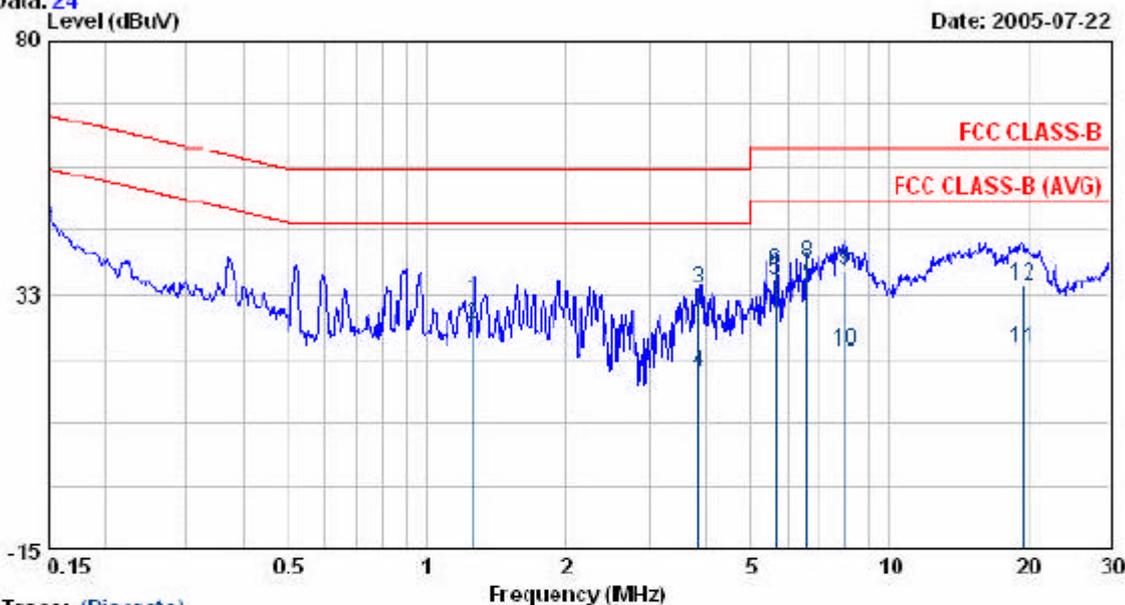

Trace: (Discrete)

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
1.26	30.80	0.57	31.37	56.00	-24.63	QP
1.26	26.15	0.57	26.72	46.00	-19.28	AVERAGE
3.85	32.77	0.70	33.47	56.00	-22.53	QP
3.85	17.53	0.70	18.23	46.00	-27.77	AVERAGE
5.67	34.50	0.66	35.16	50.00	-14.84	AVERAGE
5.67	36.32	0.66	36.98	60.00	-23.02	QP
6.62	35.18	0.65	35.83	50.00	-14.17	AVERAGE
6.62	37.54	0.65	38.19	60.00	-21.81	QP
8.01	36.30	0.62	36.92	60.00	-23.08	QP
8.01	21.20	0.62	21.82	50.00	-28.18	AVERAGE
19.53	21.45	0.62	22.07	50.00	-27.93	AVERAGE
19.53	33.47	0.62	34.09	60.00	-25.91	QP

Remarks: 1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss