




FOR CHAIN 1: CH 1

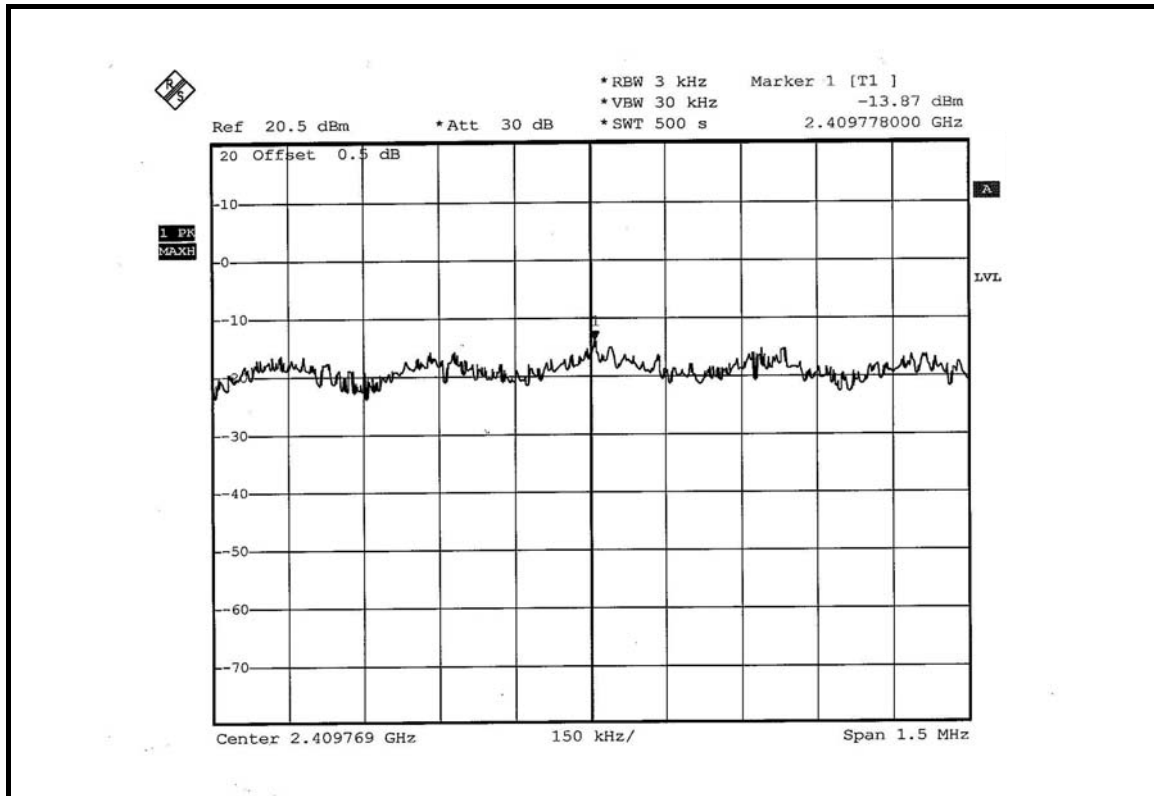

CH 6

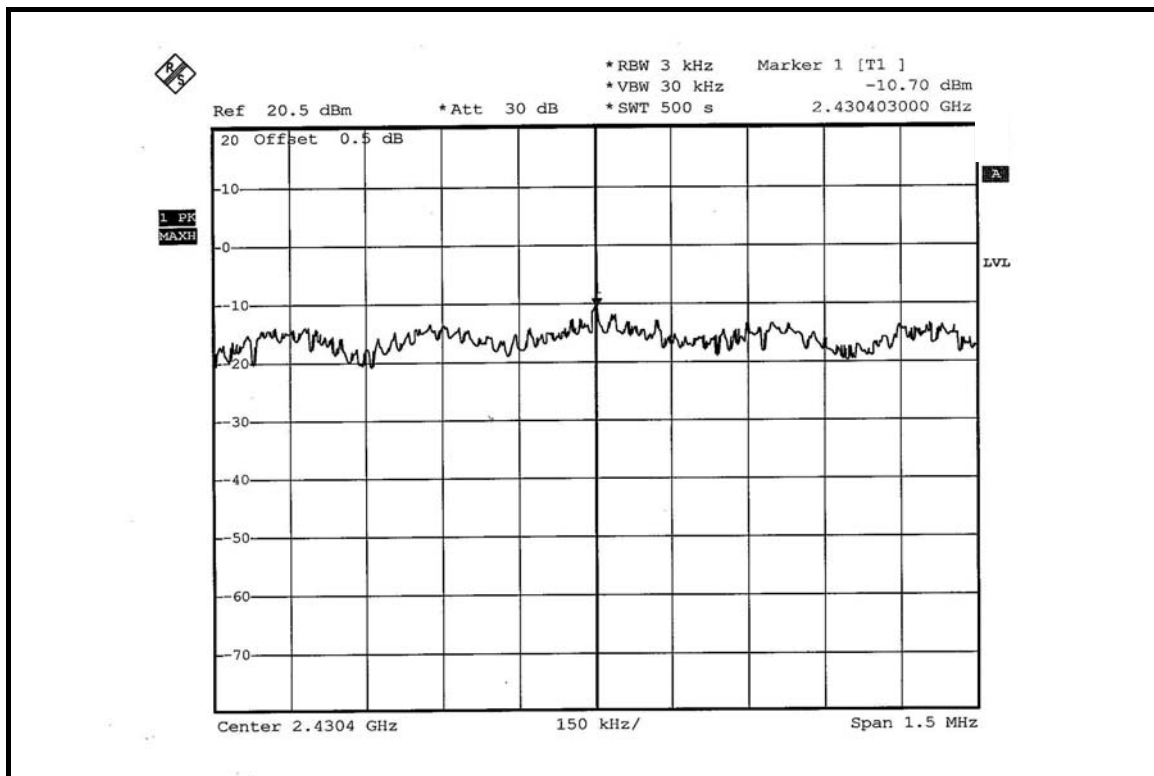

CH 11

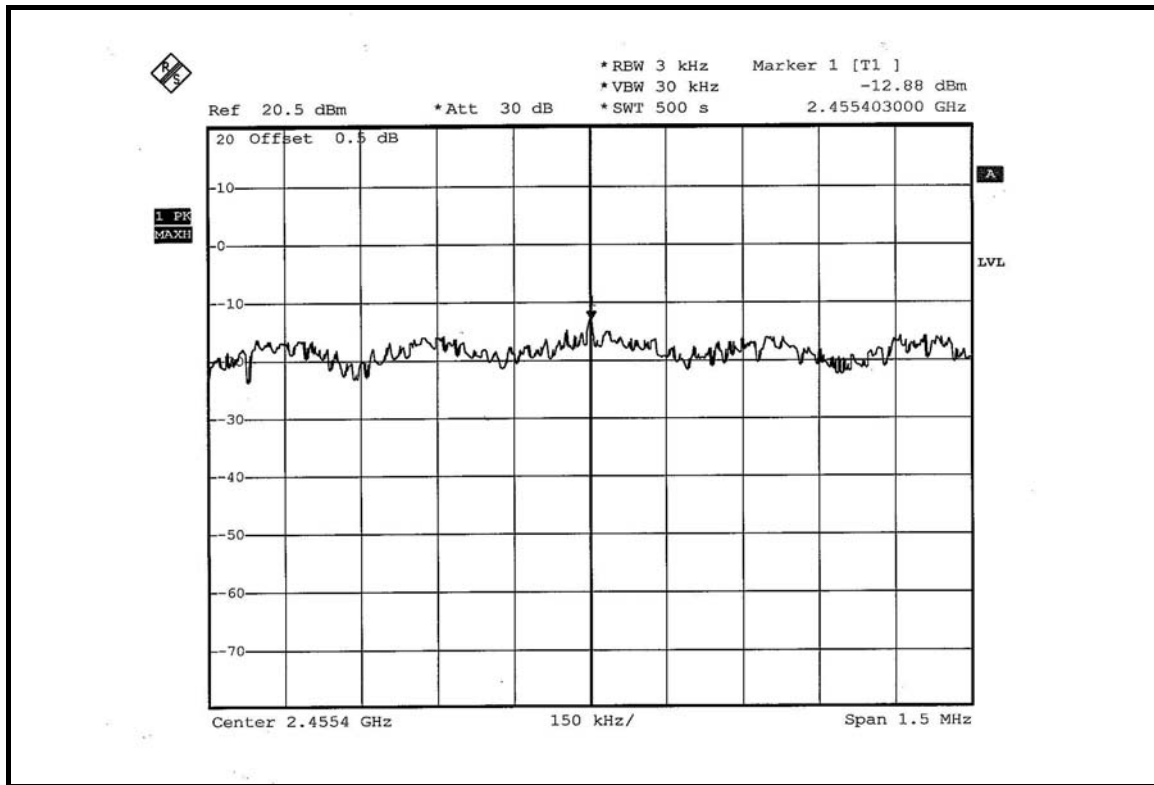




DRAFT 802.11n (40MHz) OFDM MODULATION: DUAL TX:


MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22deg.C, 61%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2422	-18.19	-18.23	8	PASS
4	2437	-15.04	-15.27	8	PASS
7	2452	-18.06	18.29	8	PASS


FOR CHAIN 0: CH 1

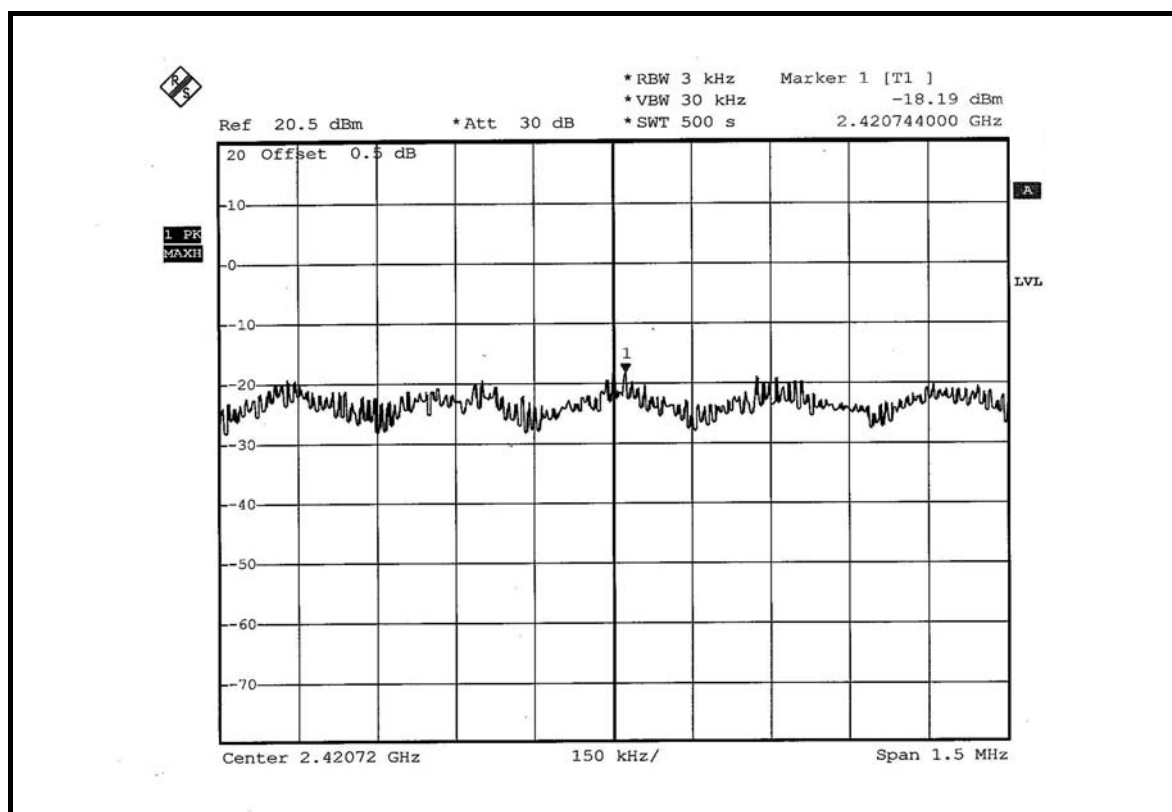


CH 4

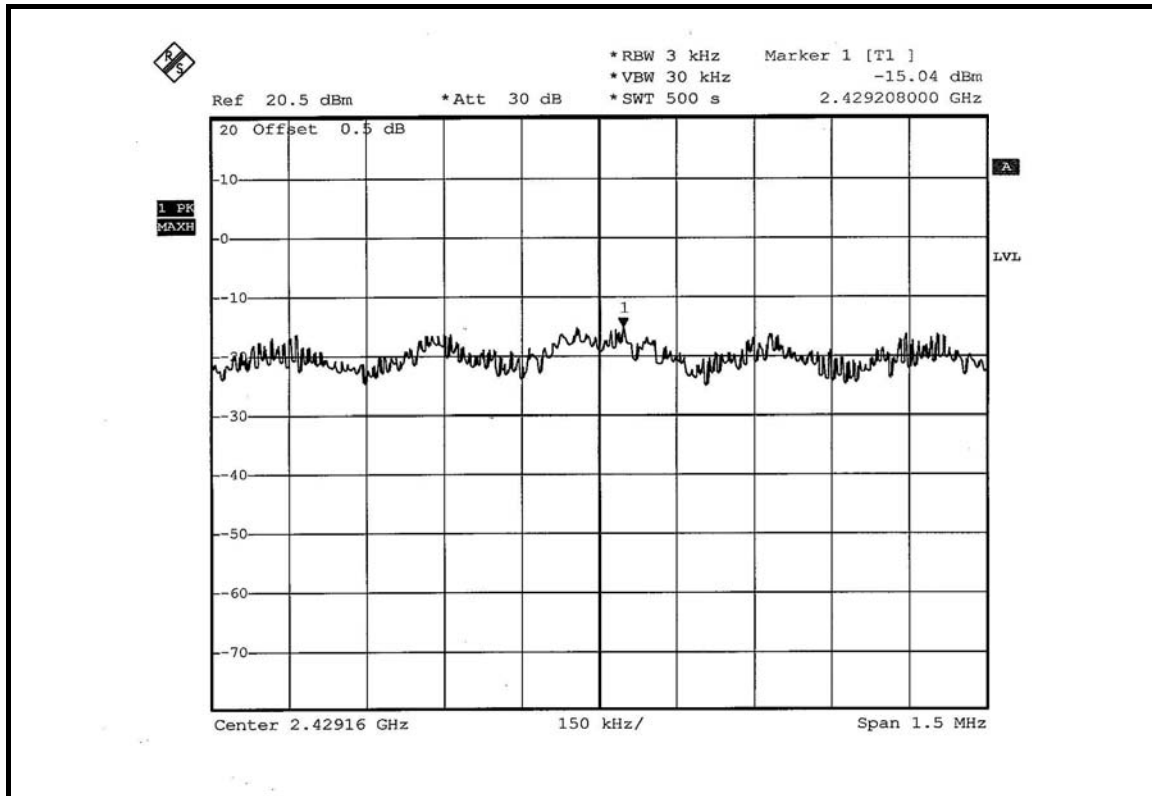


CH 7

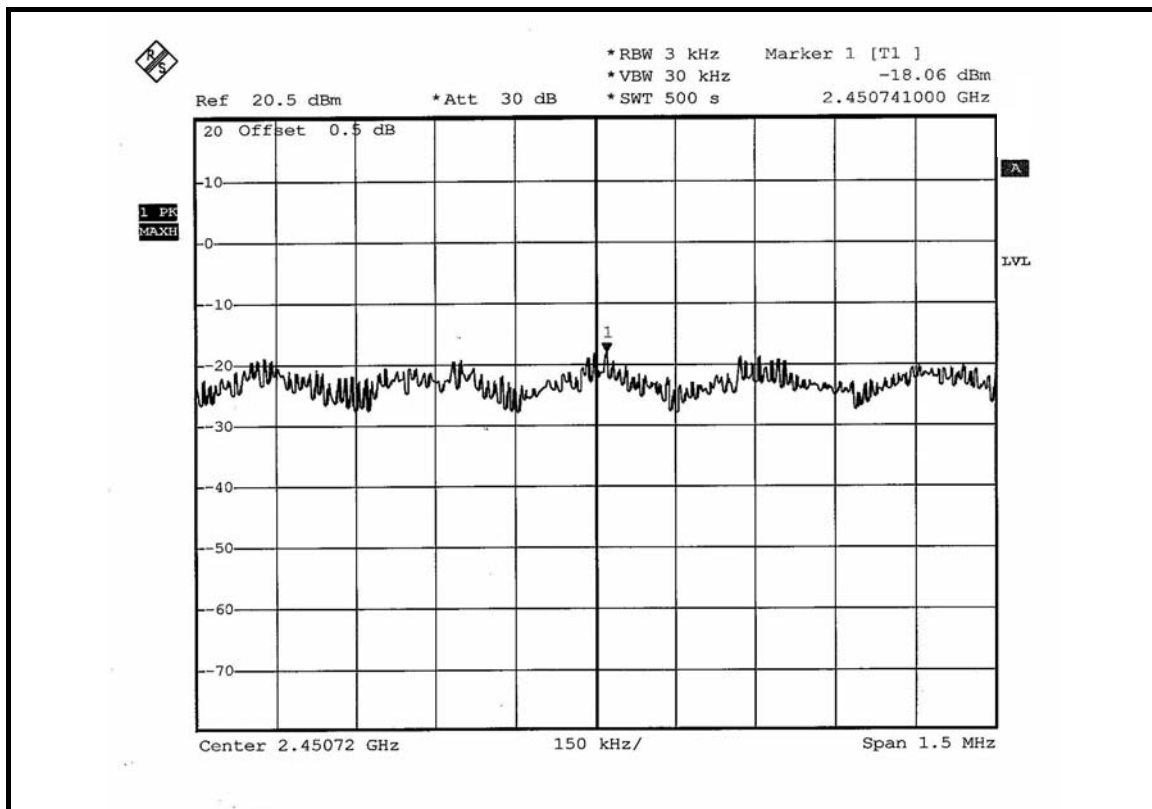


FOR CHAIN 1: CH 1

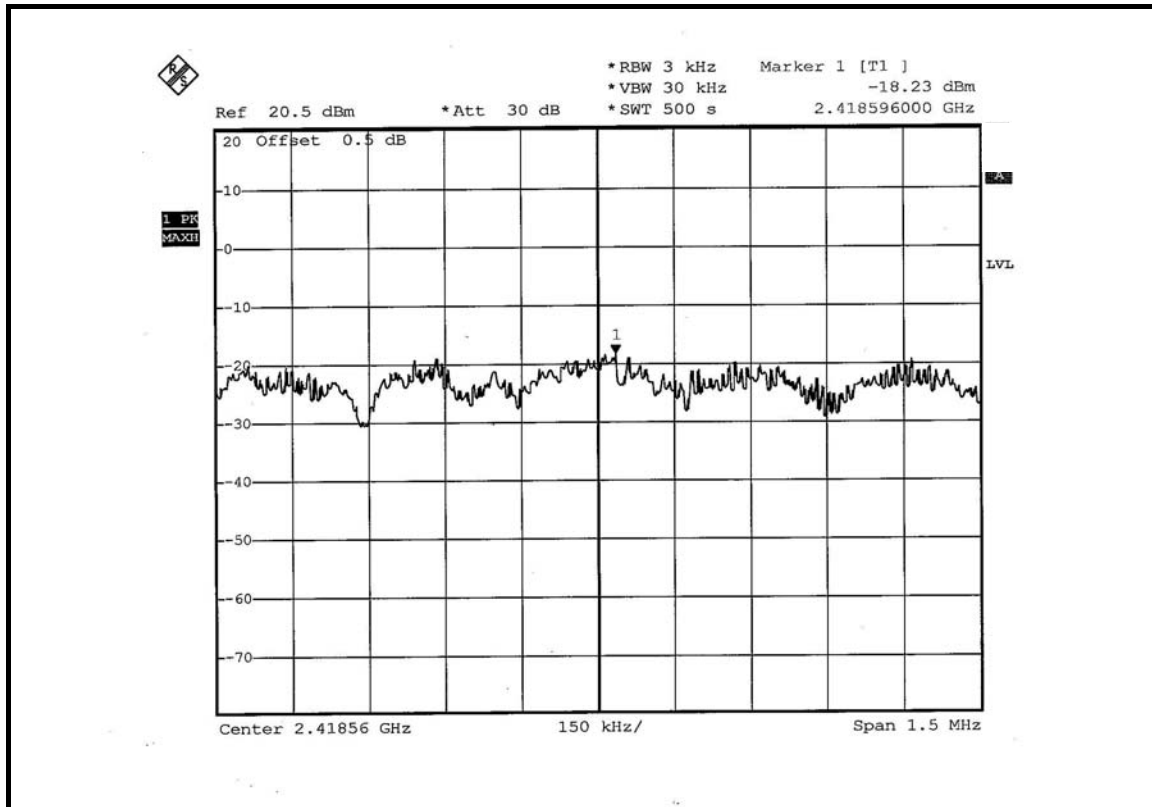

CH 4

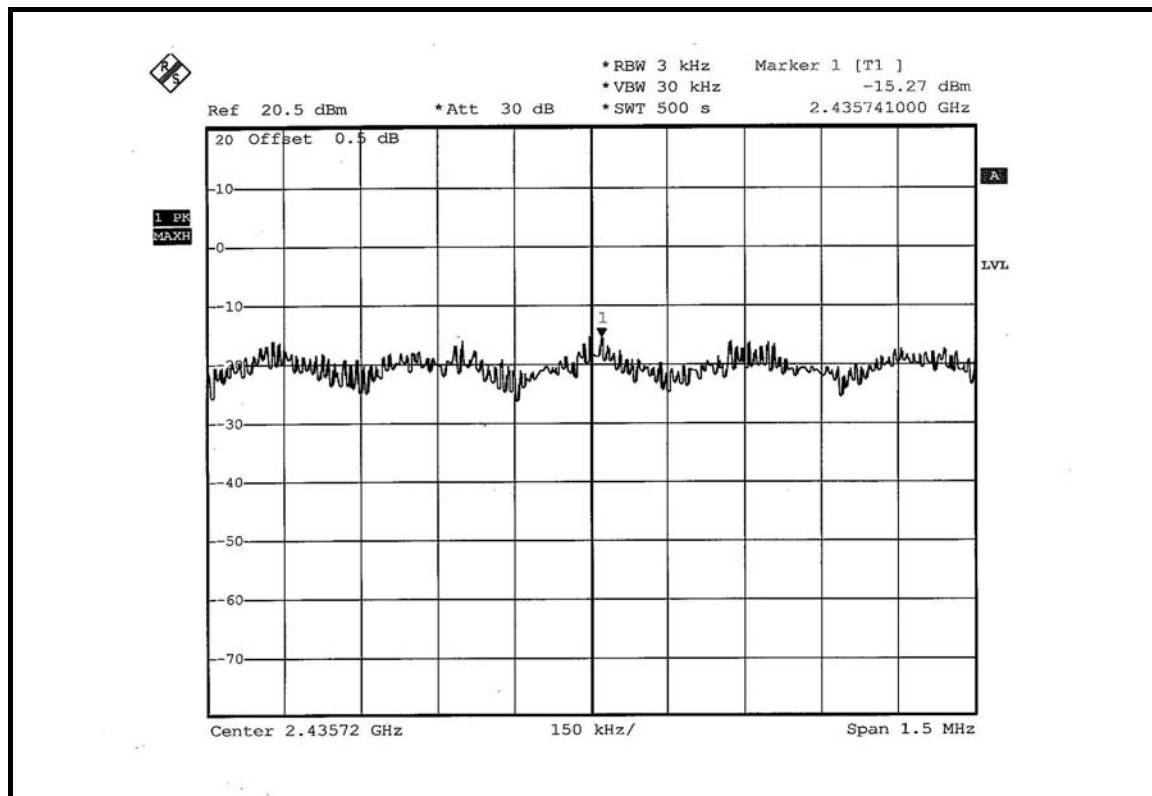

CH 7

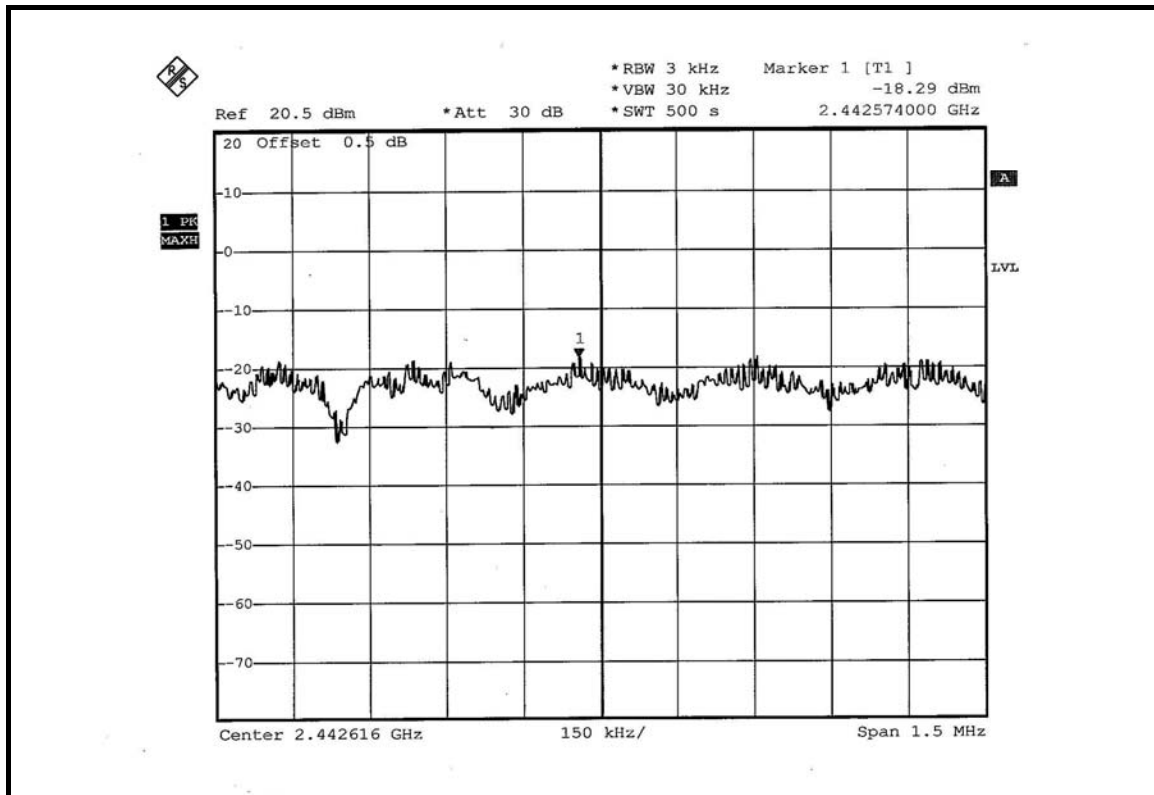



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

For Single TX:

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 10Hz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = VBW = 100kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

For Dual TX:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = VBW = 100kHz; Average RBW = 1MHz, VBW = 10Hz)

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 36 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS MODULATION: SINGLE TX



NOTE 1: The band edge emission plot of DSSS technique on the next page shows 49.83dBc between carrier maximum power and local maximum emission in restrict band (2.38620GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.59dBuV/m (Peak), so the maximum field strength in restrict band is $107.59 - 49.83 = 57.76$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of DSSS technique on the next page shows 52.10dBc between carrier maximum power and local maximum emission in restrict band (2.38680GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 103.83dBuV/m (Average), so the maximum field strength in restrict band is $103.83 - 52.10 = 51.73$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of DSSS technique on the next second page shows 52.73dBc between carrier maximum power and local maximum emission in restrict band (2.48750GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 107.87dBuV/m (Peak), so the maximum field strength in restrict band is $107.87 - 52.73 = 55.14$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of DSSS technique on the next third page shows 55.97dBc between carrier maximum power and local maximum emission in restrict band (2.48690GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.19dBuV/m (Average), so the maximum field strength in restrict band is $104.19 - 55.97 = 48.22$ dBuV/m which is under 54dBuV/m limit.

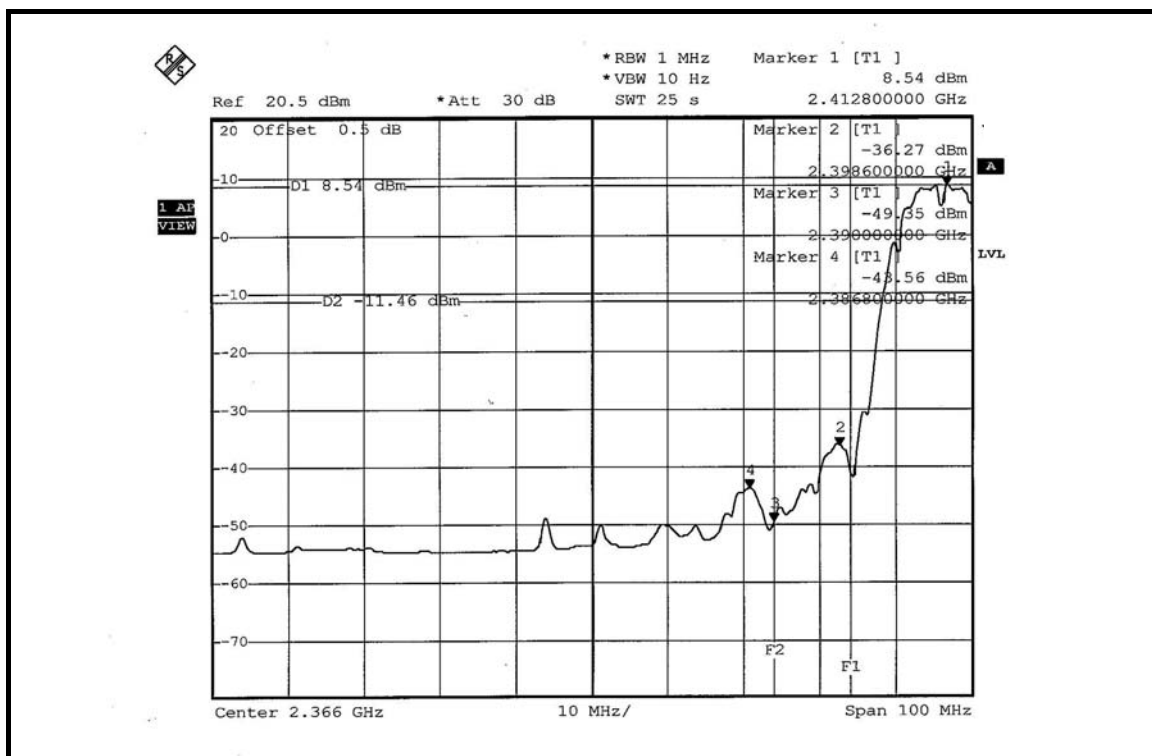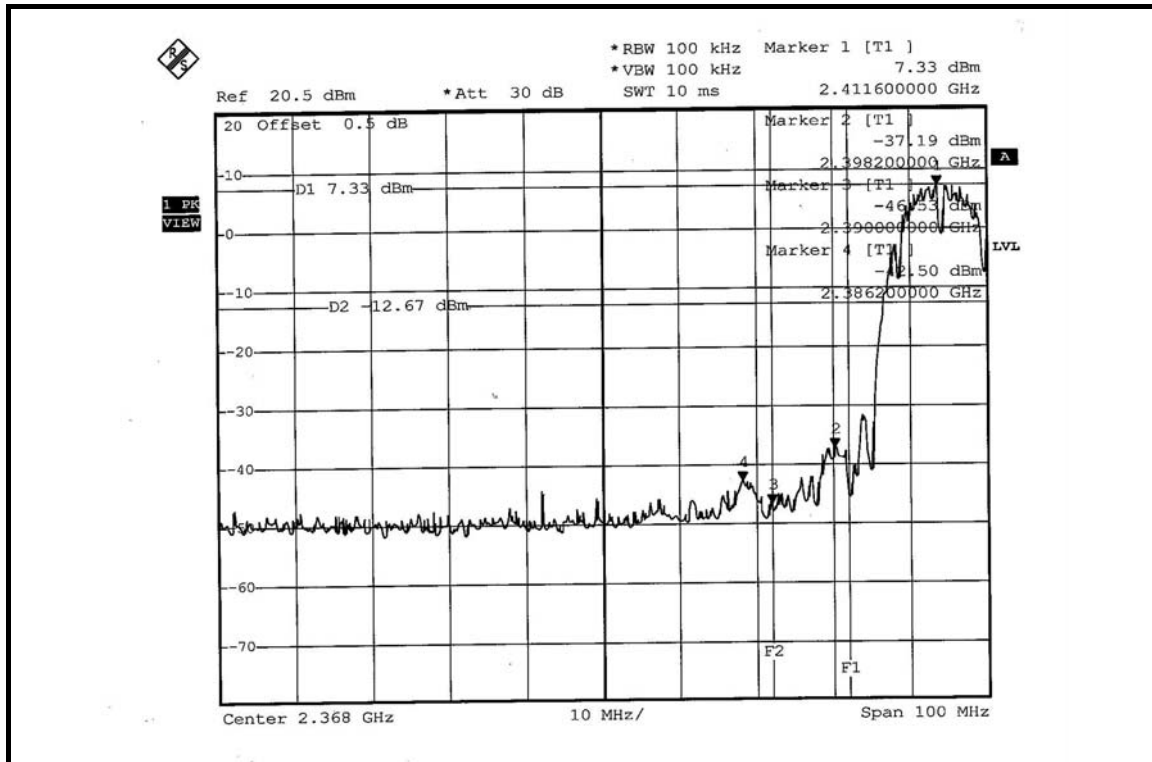

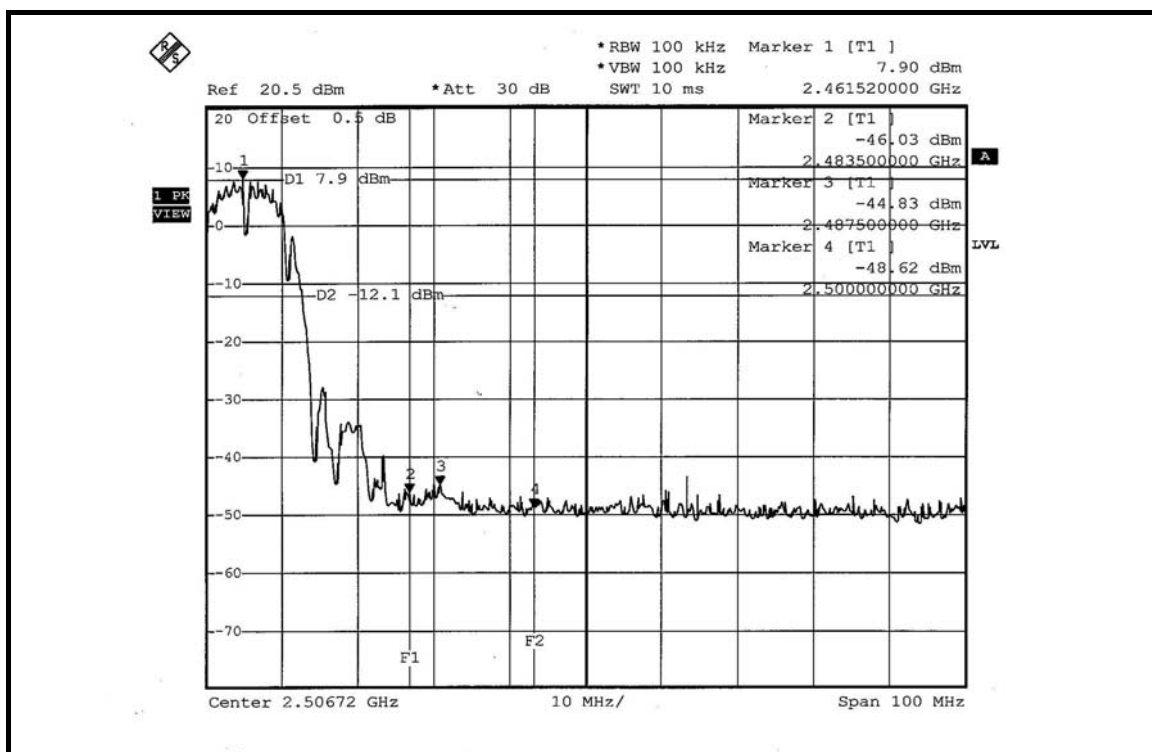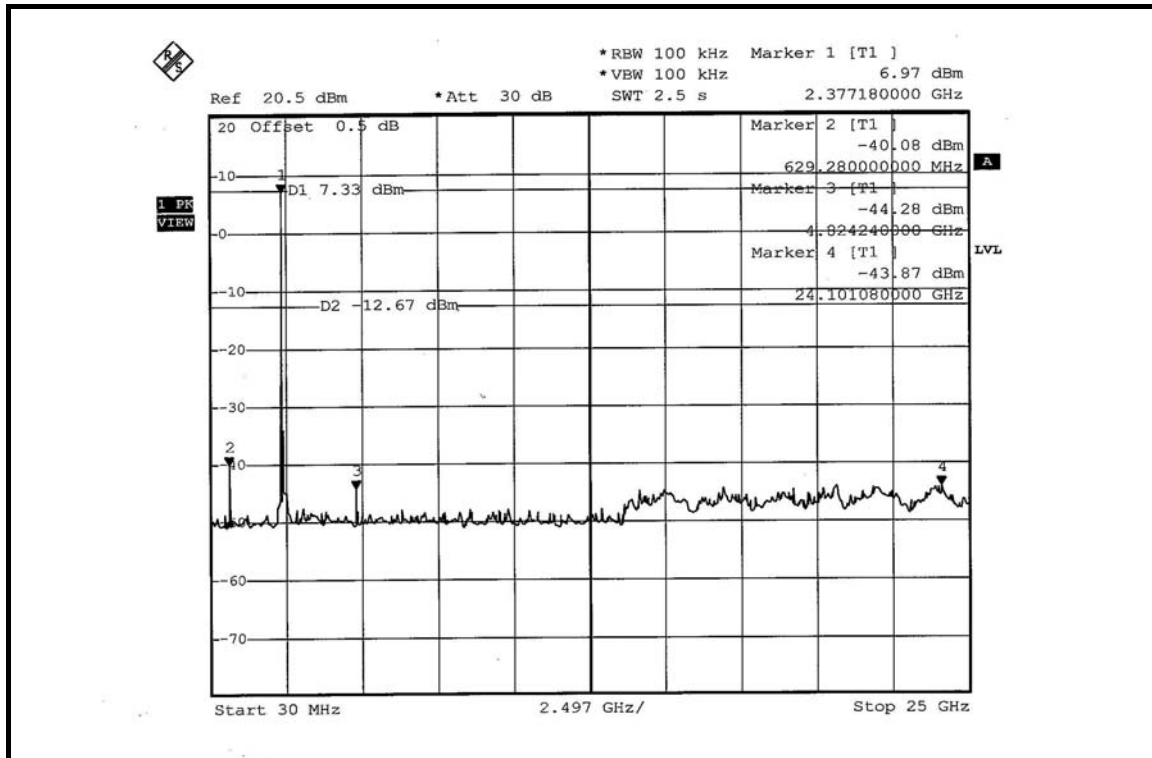

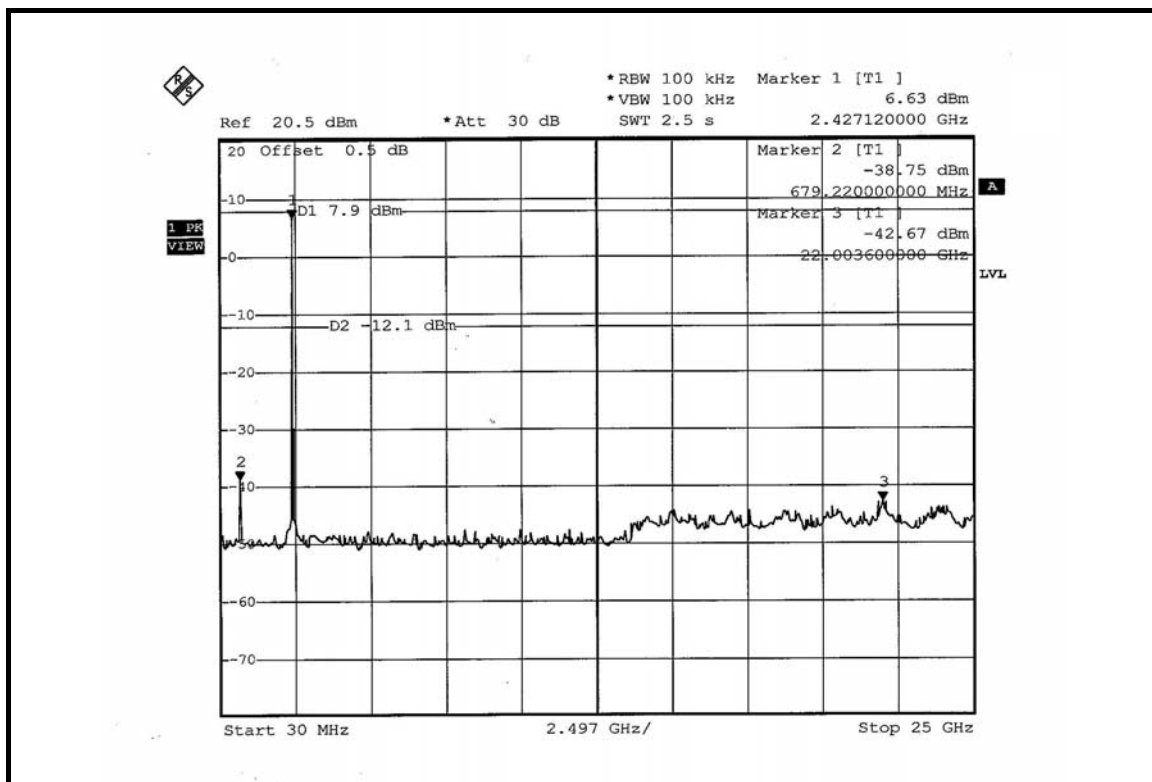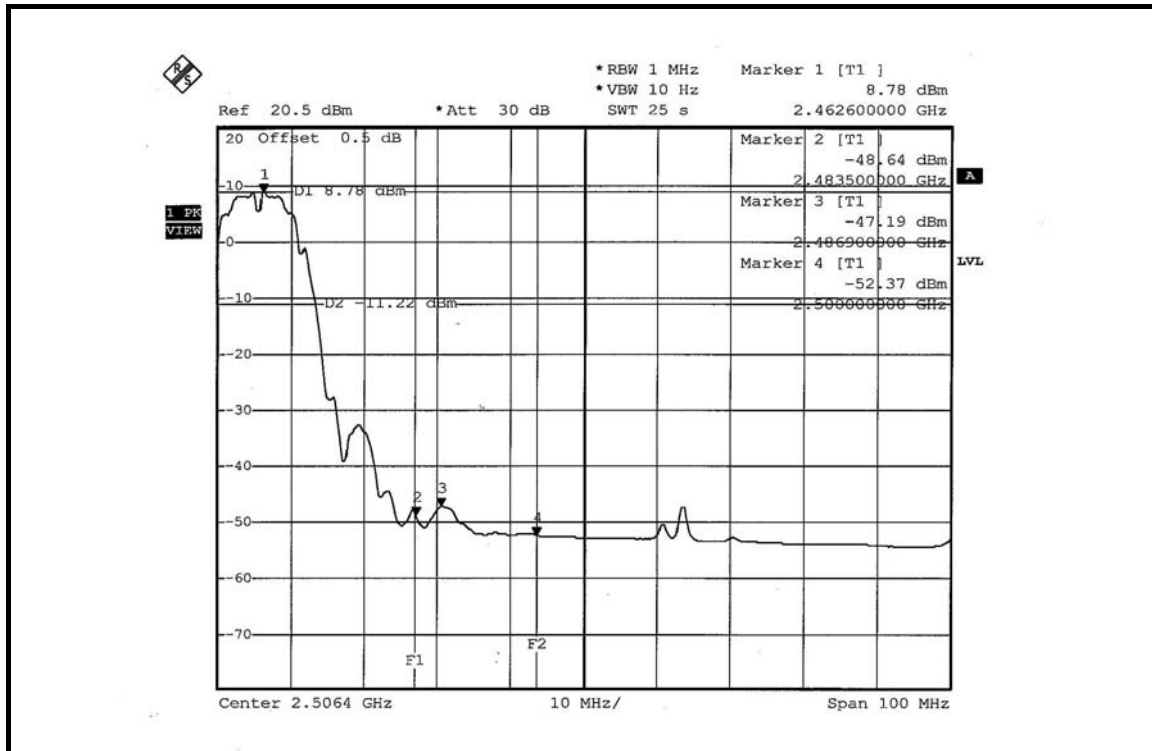



802.11b DSSS MODULATION: DUAL TX



NOTE 1: The band edge emission plot of DSSS technique on the next page shows 50.43dBc between carrier maximum power and local maximum emission in restrict band (2.38660GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 109.85dBuV/m (Peak), so the maximum field strength in restrict band is $109.85 - 50.43 = 59.42$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of DSSS technique on the next page shows 54.20dBc between carrier maximum power and local maximum emission in restrict band (2.38696GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.12dBuV/m (Average), so the maximum field strength in restrict band is $106.12 - 54.20 = 51.92$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of DSSS technique on the next second page shows 53.82dBc between carrier maximum power and local maximum emission in restrict band (2.48730GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.06dBuV/m (Peak), so the maximum field strength in restrict band is $110.06 - 53.82 = 56.24$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of DSSS technique on the next third page shows 60.97dBc between carrier maximum power and local maximum emission in restrict band (2.48782GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.31dBuV/m (Average), so the maximum field strength in restrict band is $106.31 - 60.97 = 45.34$ dBuV/m which is under 54dBuV/m limit.

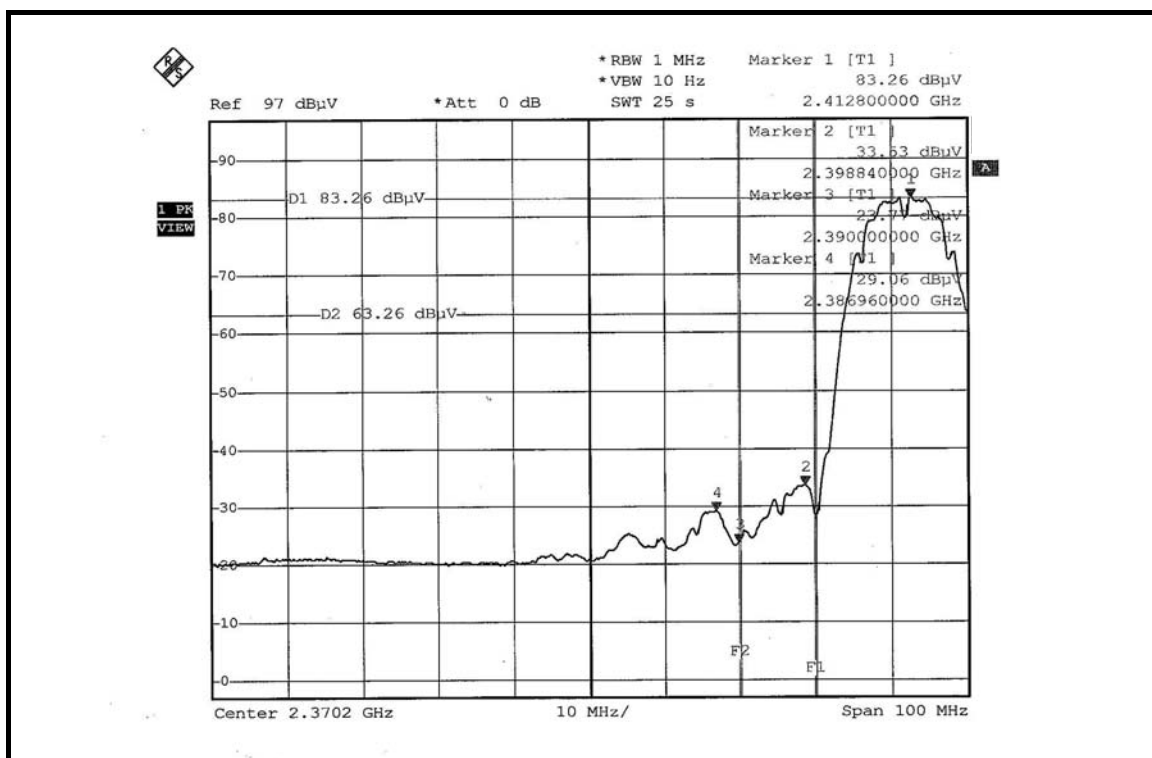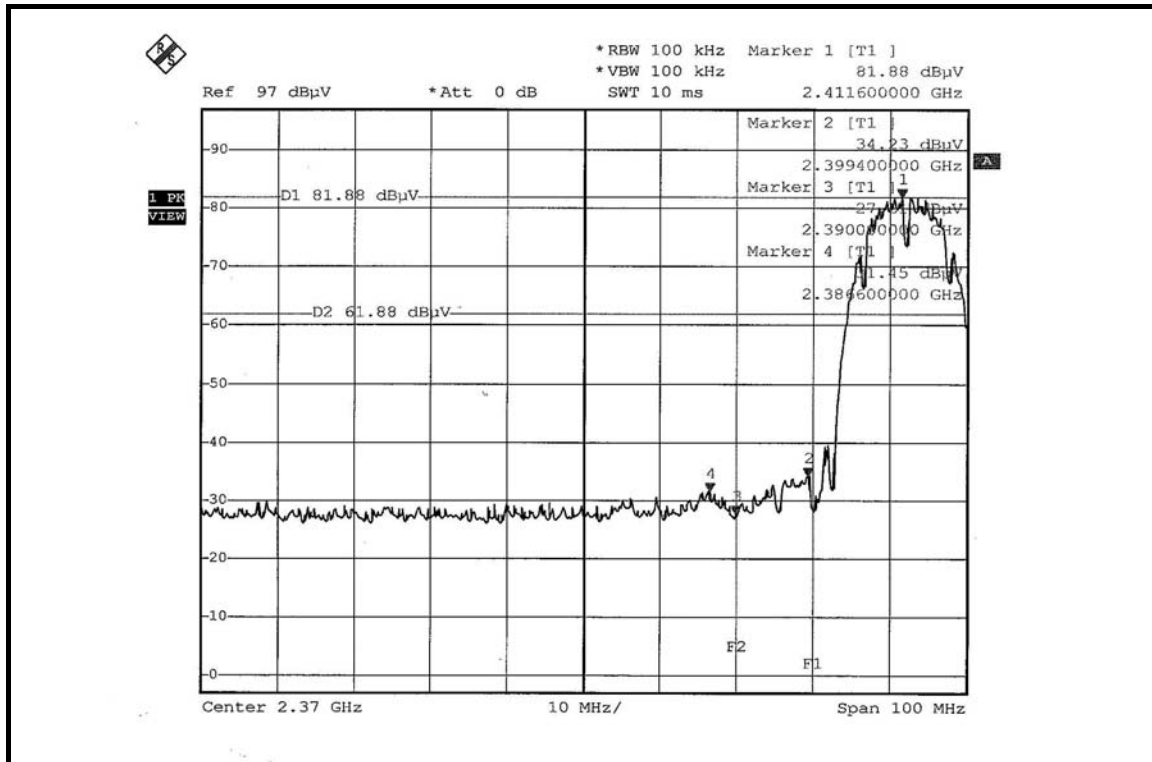

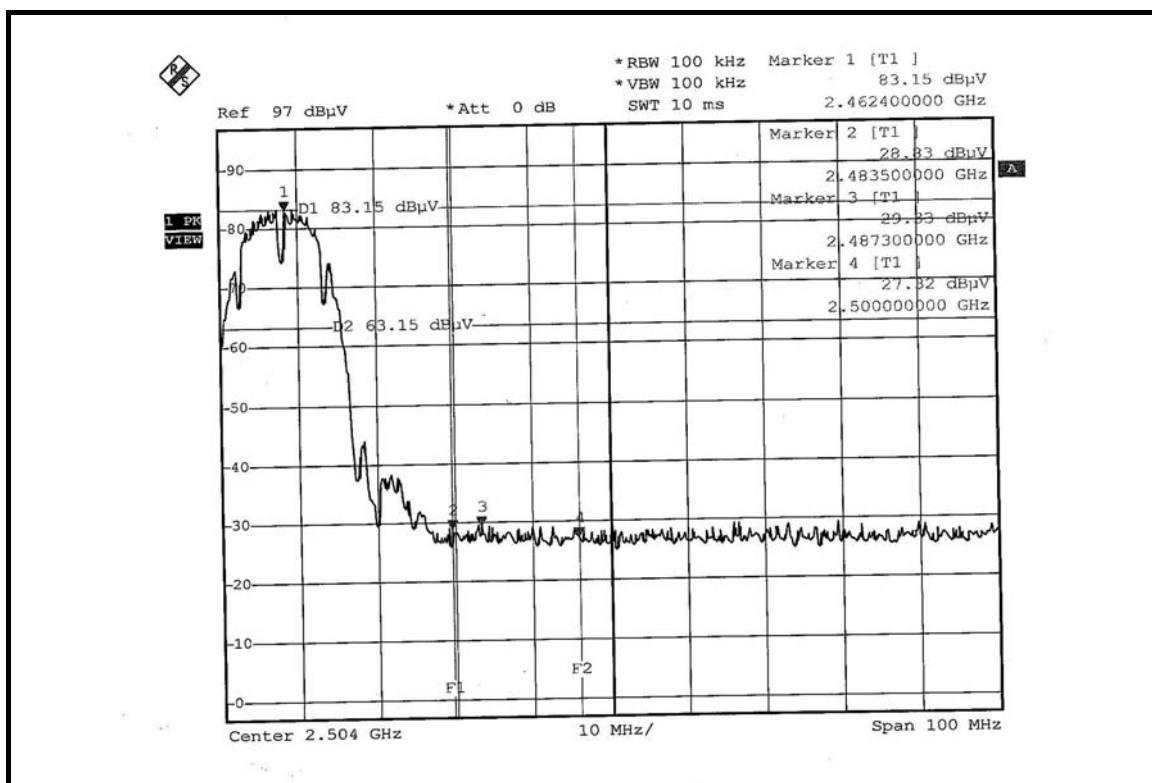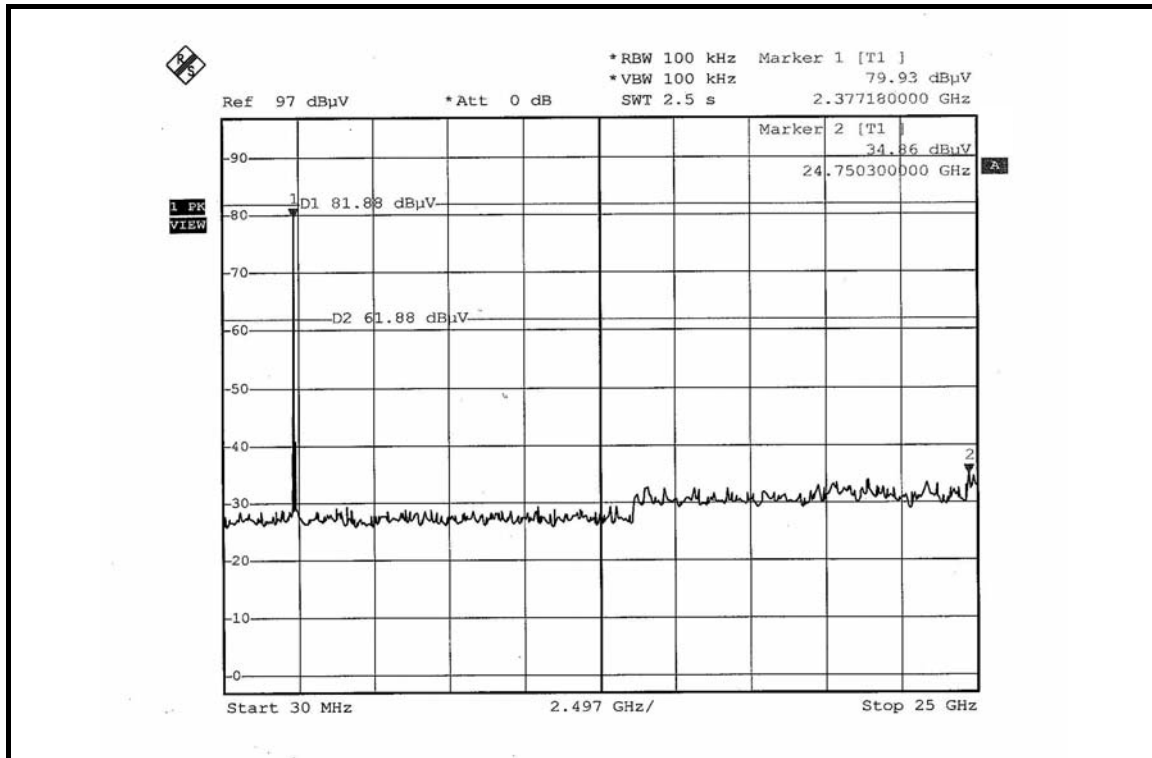

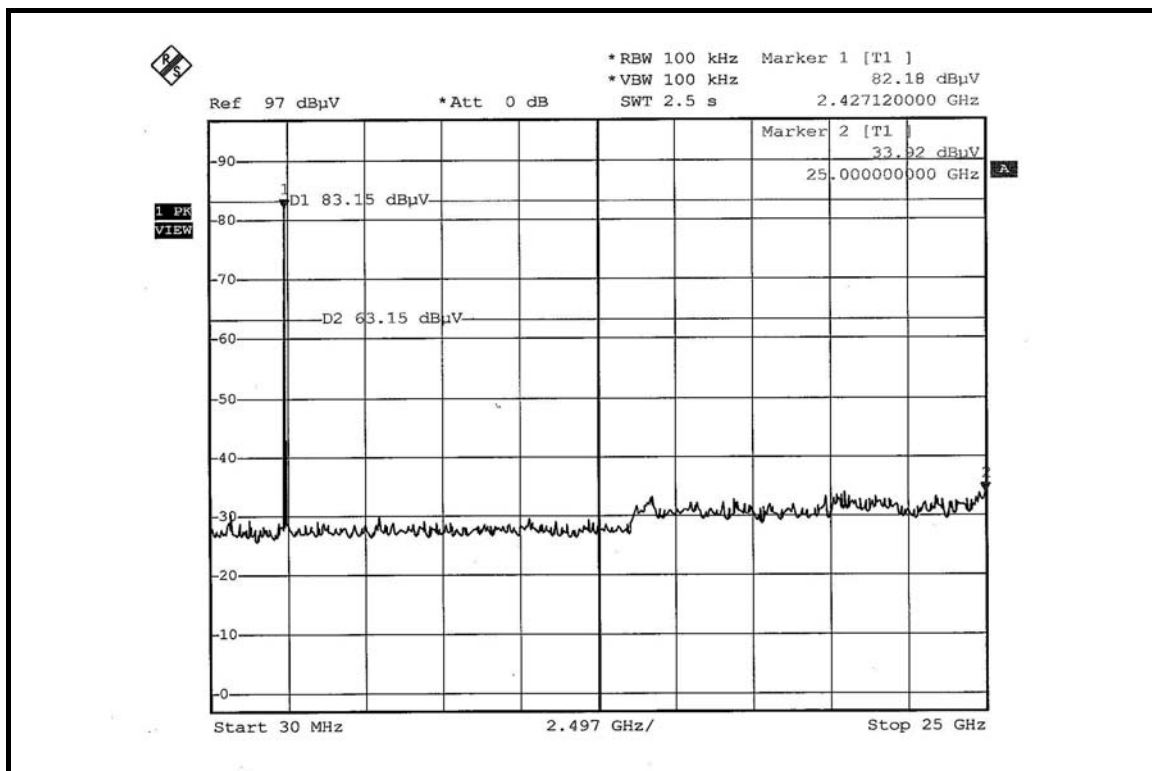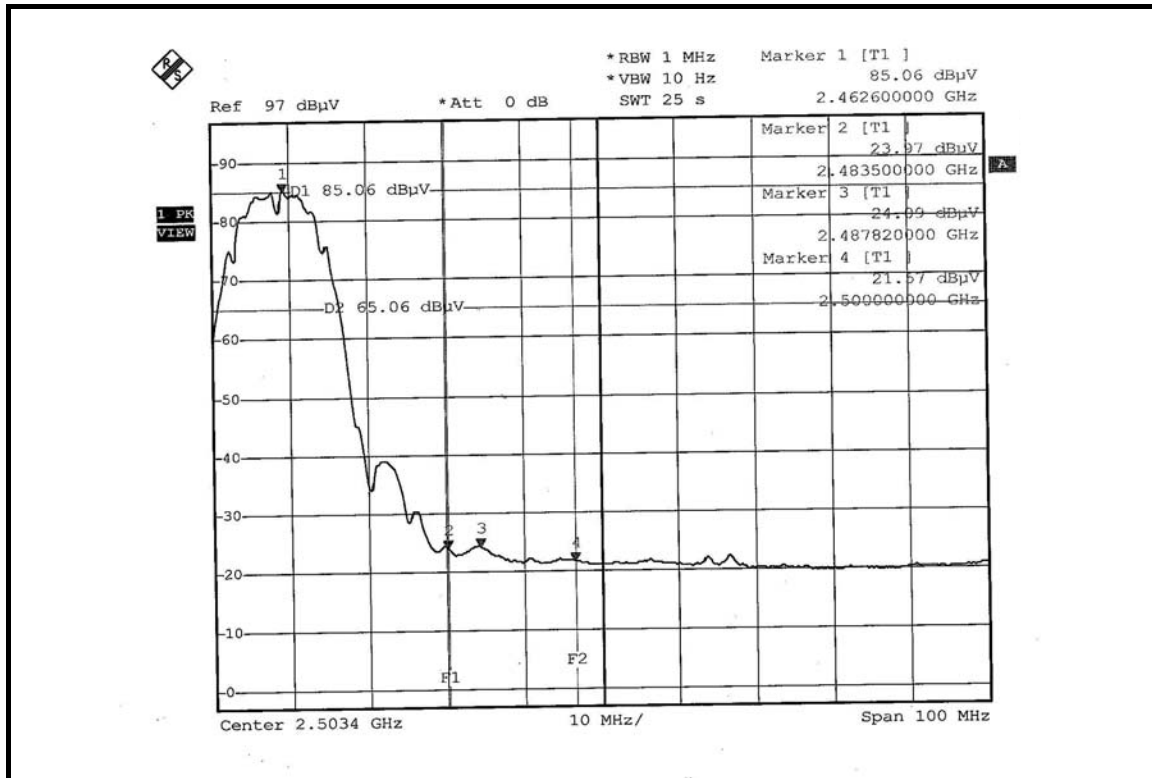



802.11g OFDM MODULATION: SINGLE TX



NOTE 1: The band edge emission plot of OFDM technique on the next page shows 40.44dBc between carrier maximum power and local maximum emission in restrict band (2.3890GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.29dBuV/m (Peak), so the maximum field strength in restrict band is $107.29 - 40.44 = 66.85$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on the next page shows 45.90dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 97.91dBuV/m (Average), so the maximum field strength in restrict band is $97.91 - 45.90 = 52.01$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of OFDM technique on the next second page shows 39.27dBc between carrier maximum power and local maximum emission in restrict band (2.48430GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 107.36dBuV/m (Peak), so the maximum field strength in restrict band is $107.36 - 39.27 = 68.09$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on the next third page shows 45.03dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.02dBuV/m (Average), so the maximum field strength in restrict band is $98.02 - 45.03 = 52.99$ dBuV/m which is under 54dBuV/m limit.

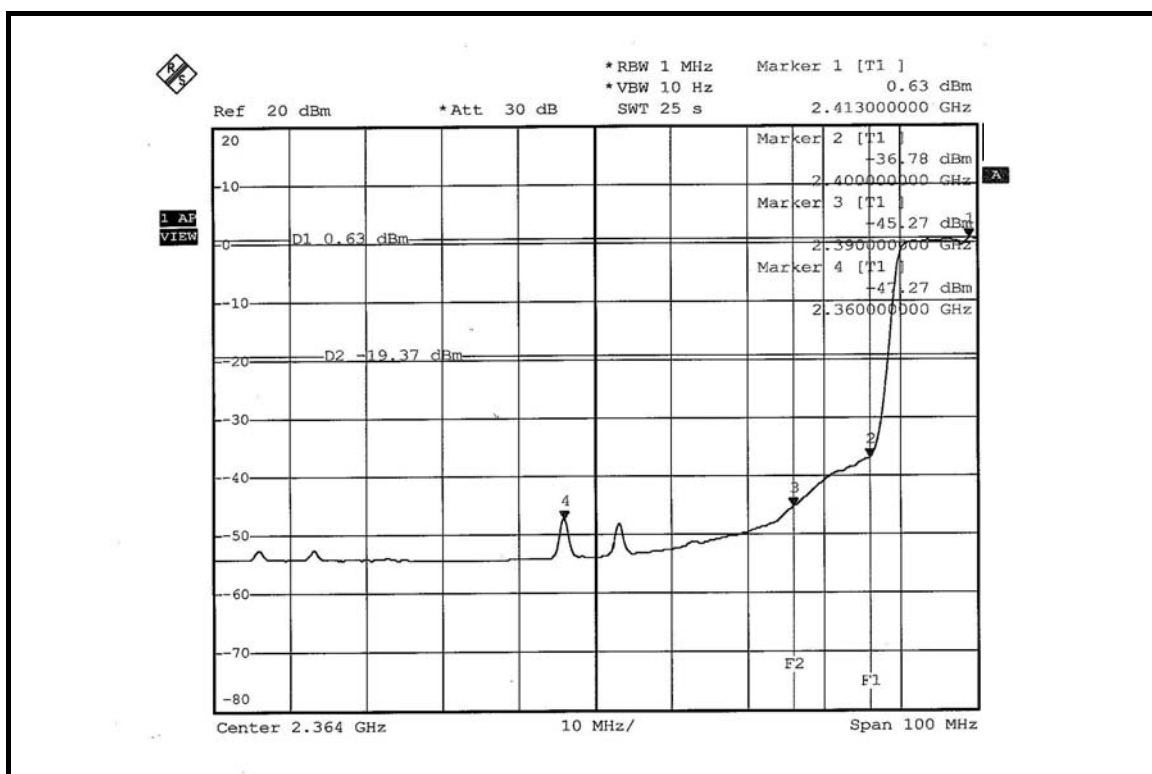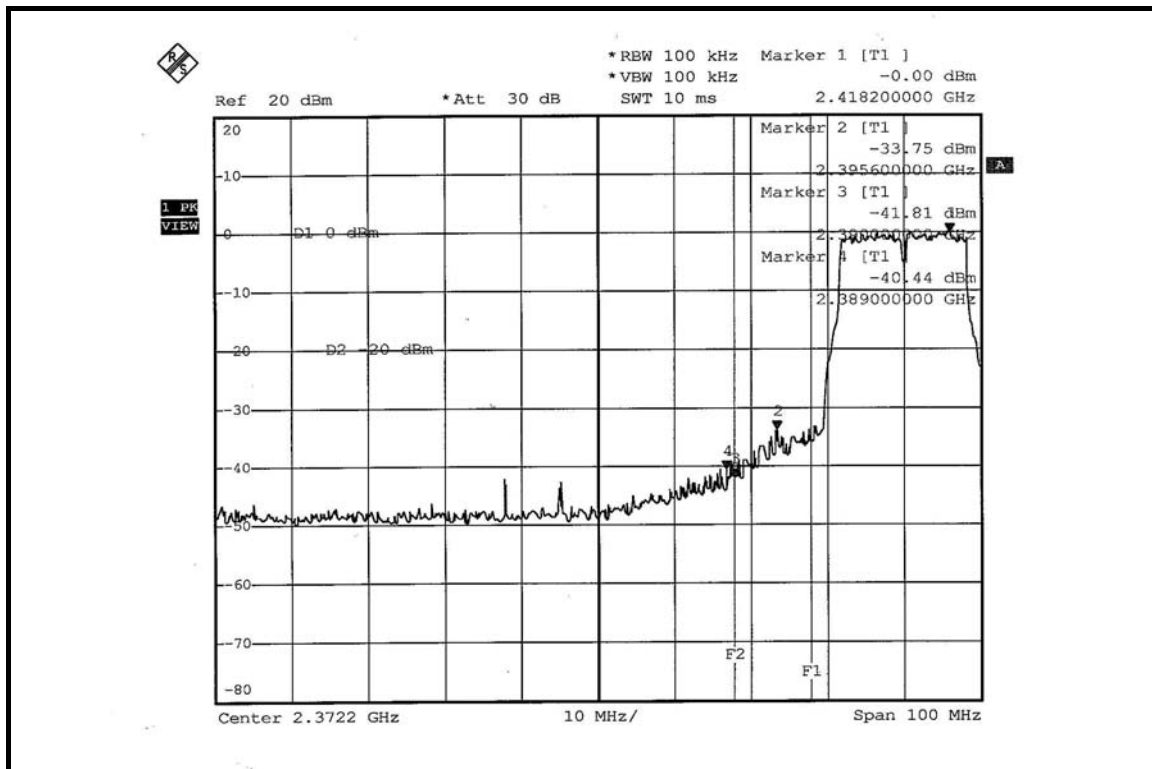

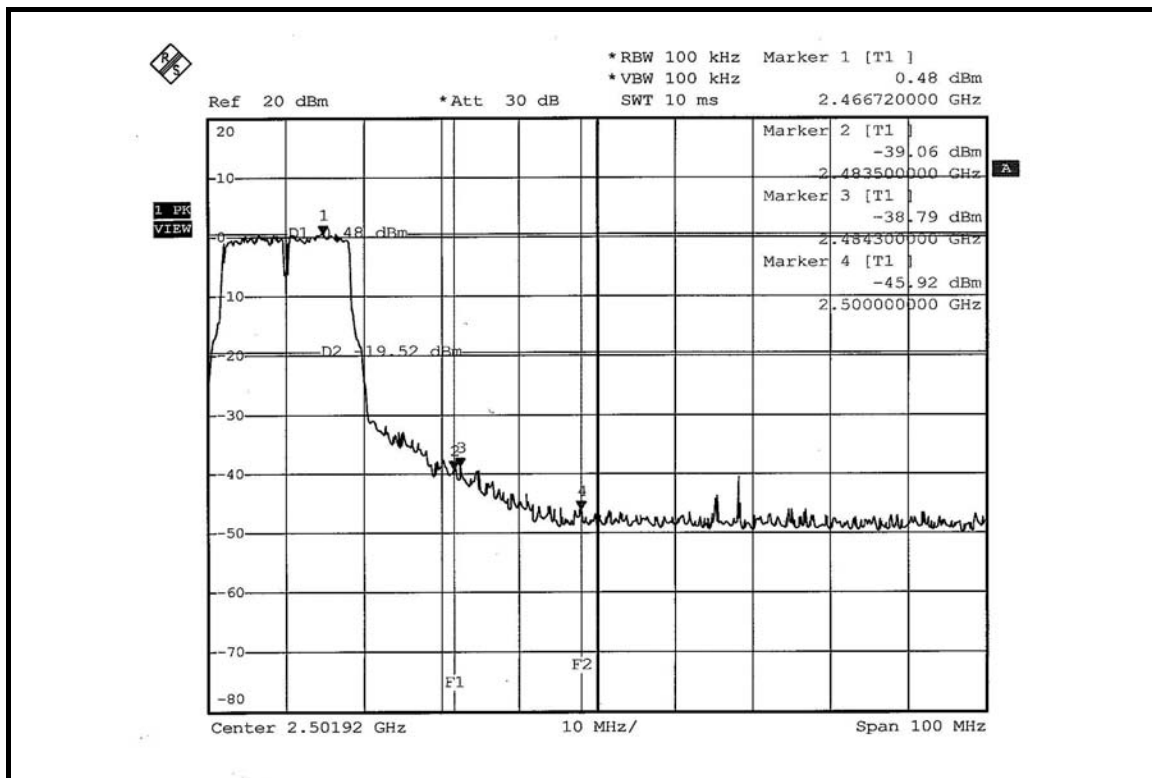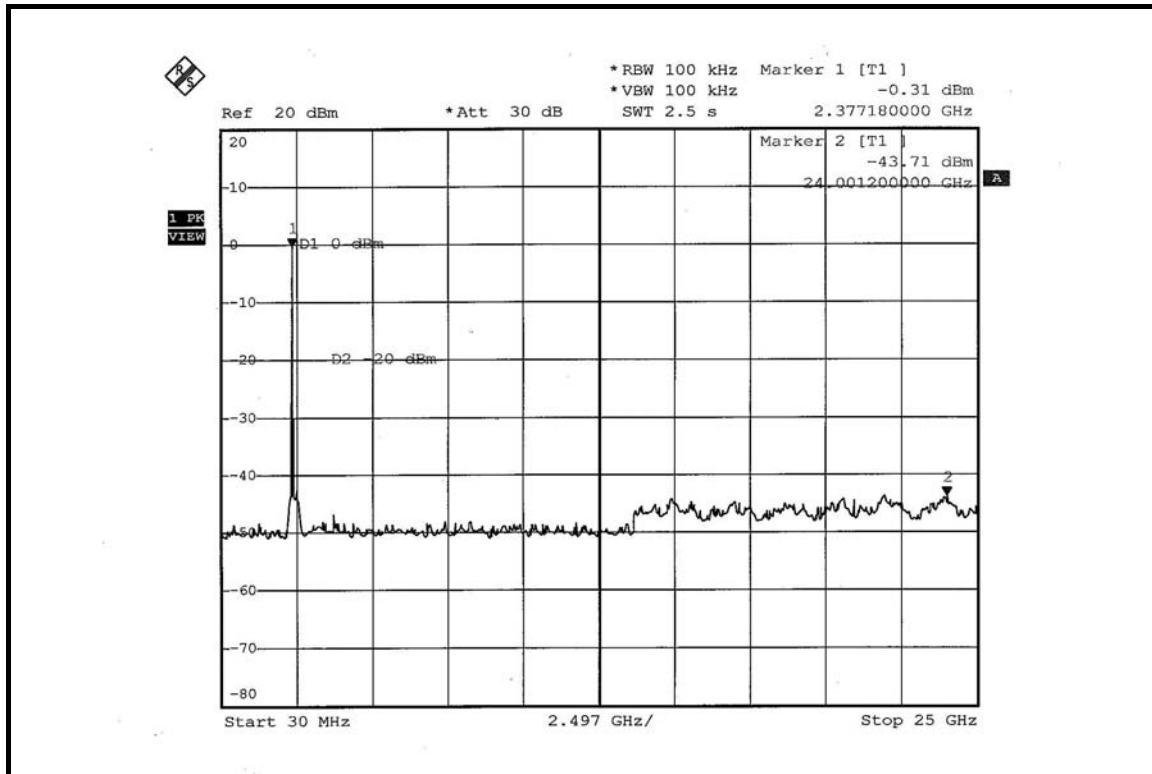

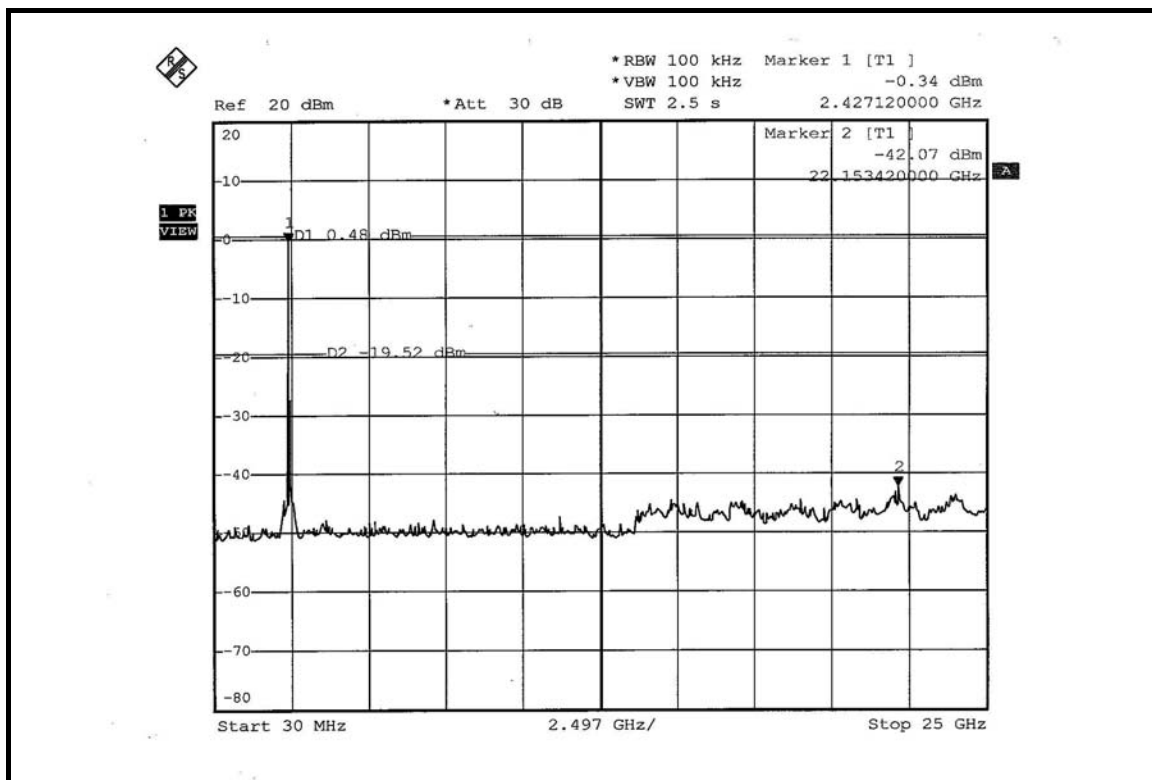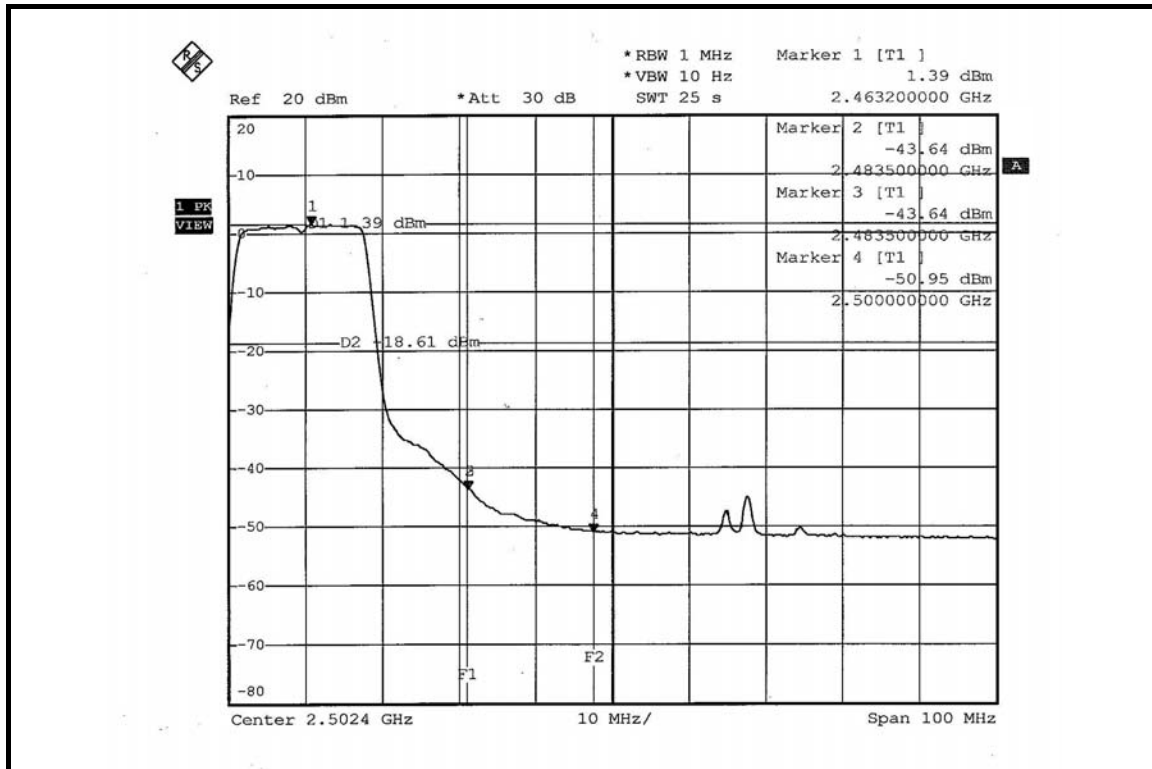



802.11g OFDM MODULATION: DUAL TX



NOTE 1: The band edge emission plot of OFDM technique on the next page shows 42.90dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.03dBuV/m (Peak), so the maximum field strength in restrict band is $108.03 - 42.90 = 65.13$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on the next page shows 46.94dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.52dBuV/m (Average), so the maximum field strength in restrict band is $98.52 - 46.94 = 51.58$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of OFDM technique on the next second page shows 40.92dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 108.51dBuV/m (Peak), so the maximum field strength in restrict band is $108.51 - 40.92 = 67.59$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on the next third page shows 47.25dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.03dBuV/m (Average), so the maximum field strength in restrict band is $99.03 - 47.25 = 51.78$ dBuV/m which is under 54dBuV/m limit.

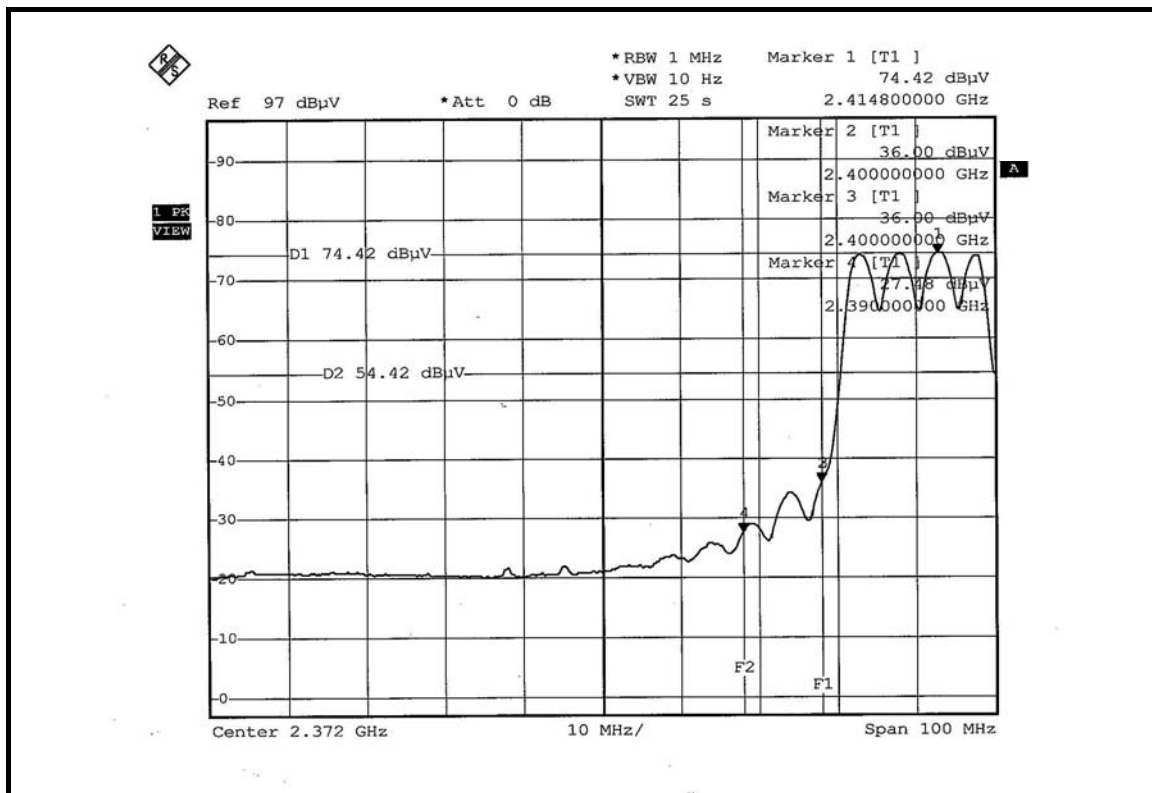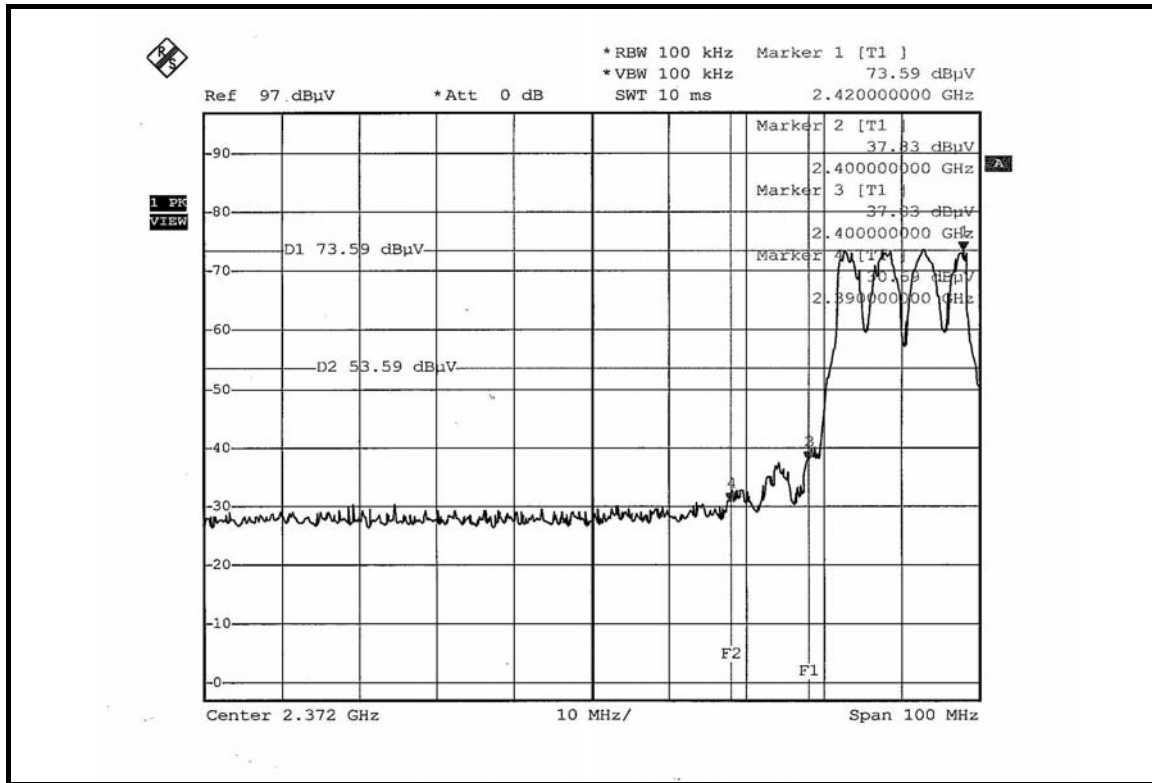

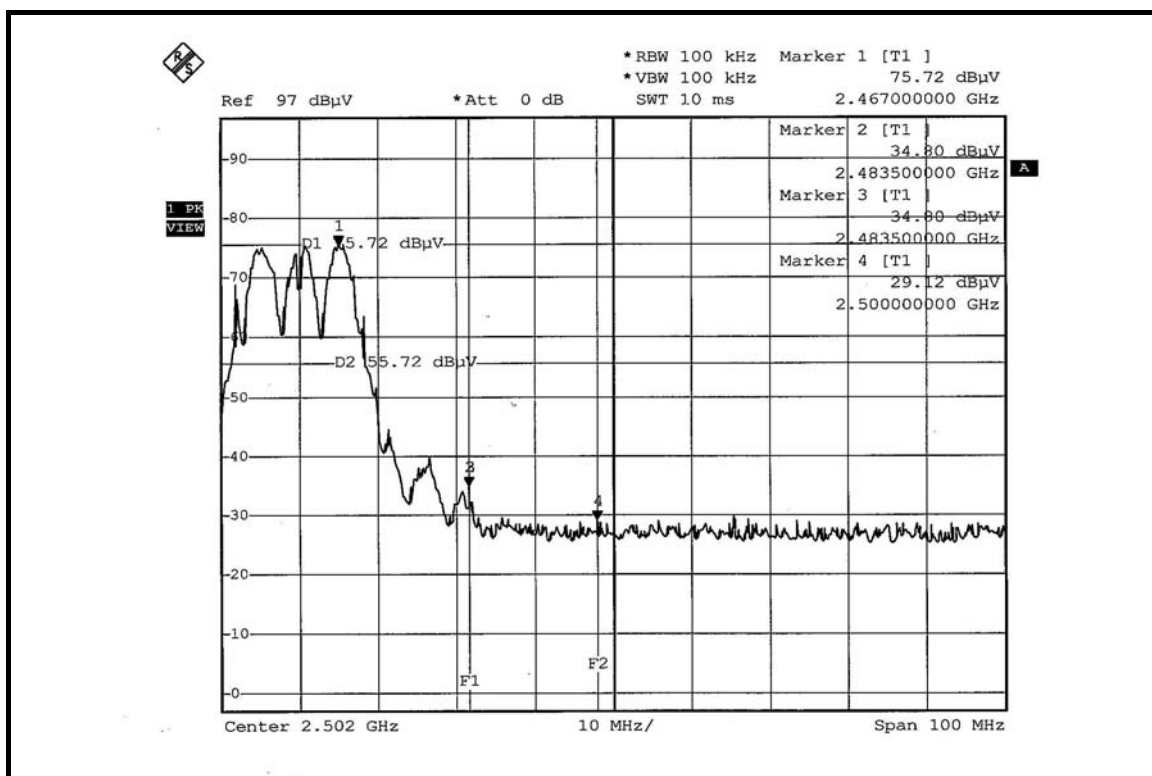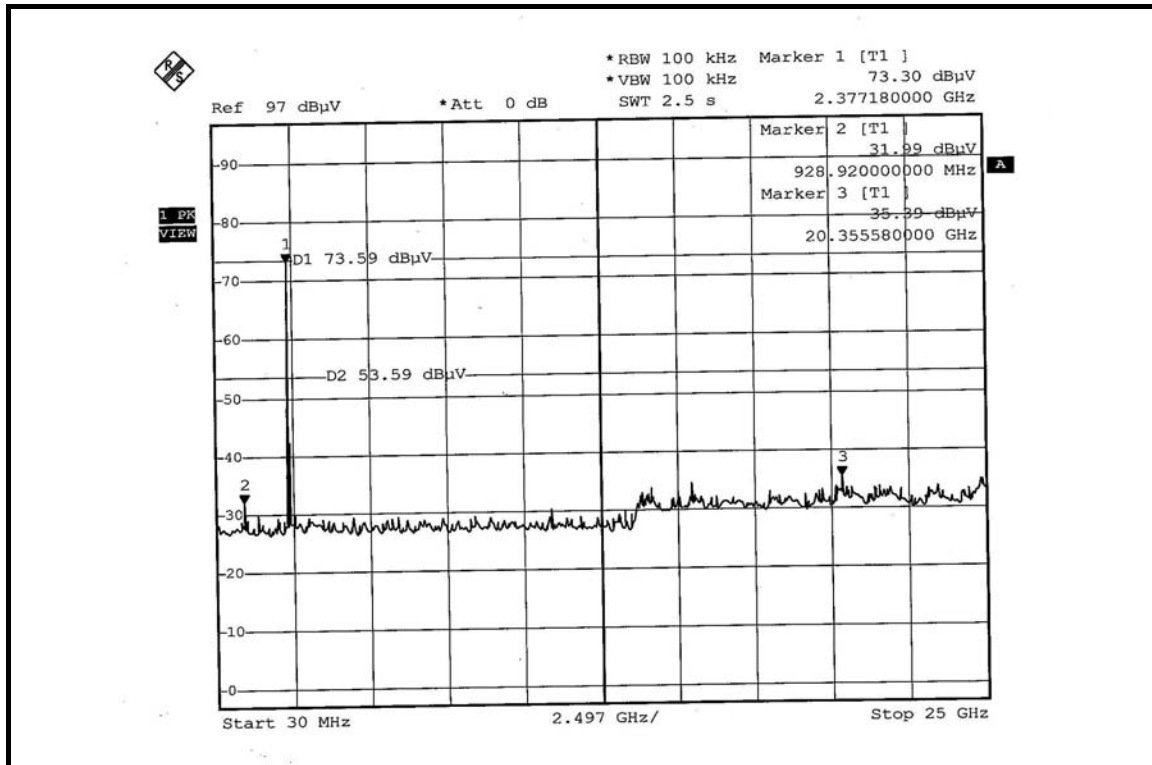

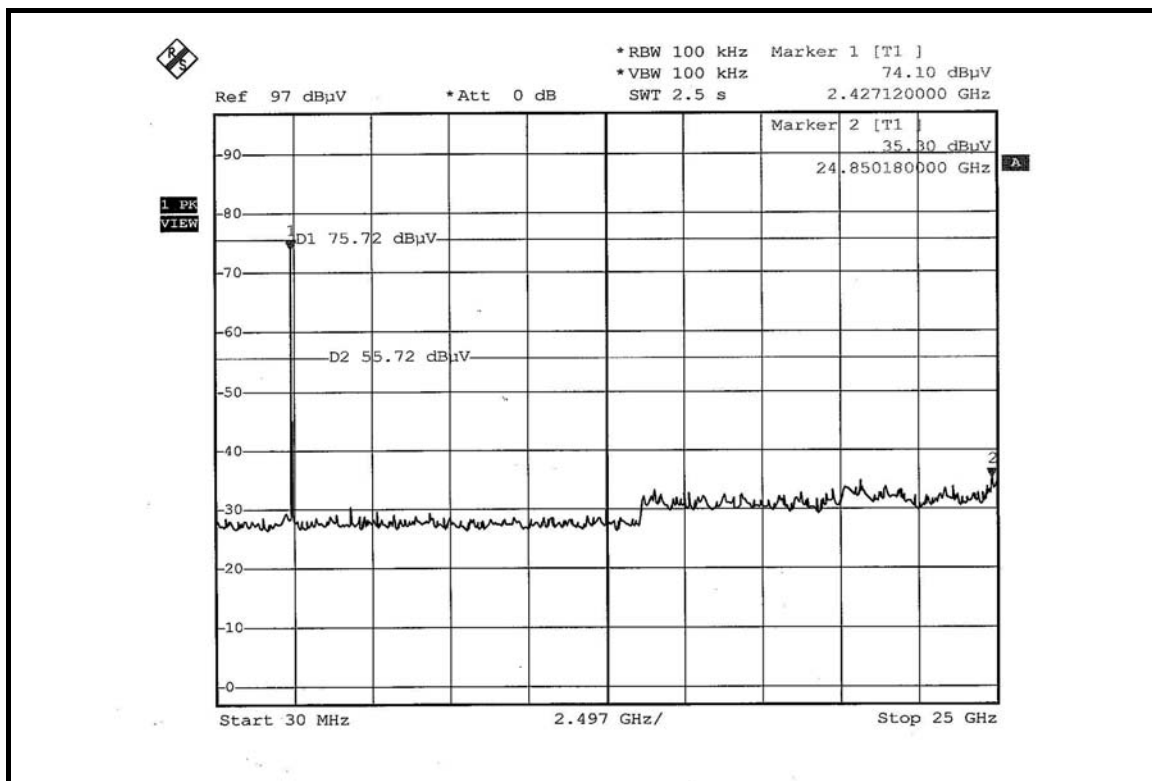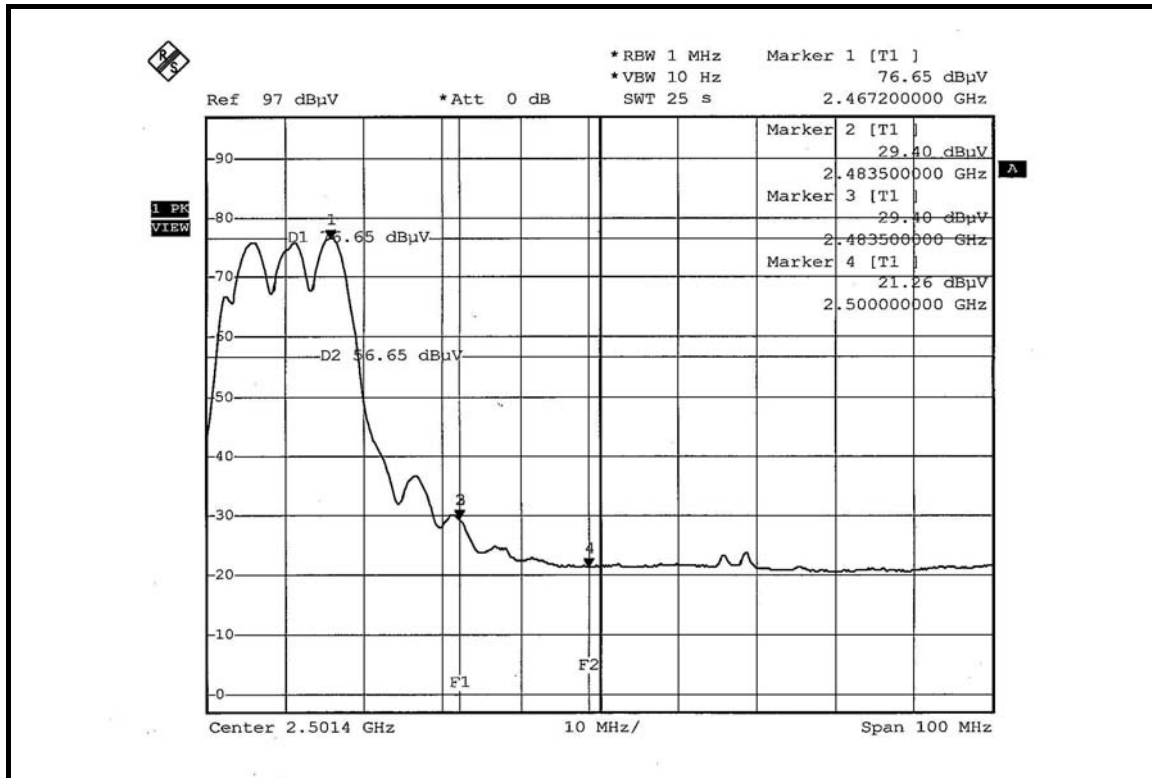



DRAFT 802.11n (20MHz) OFDM MODULATION: DUAL TX:



NOTE 1: The band edge emission plot of OFDM technique on the next page shows 39.73dBc between carrier maximum power and local maximum emission in restrict band (2.38960GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.55dBuV/m (Peak), so the maximum field strength in restrict band is $107.55 - 39.73 = 67.82$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on the next page shows 44.11dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 96.25dBuV/m (Average), so the maximum field strength in restrict band is $96.25 - 44.11 = 52.14$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of OFDM technique on the next second page shows 44.07dBc between carrier maximum power and local maximum emission in restrict band (2.48380GHz) is 108.62dBuV/m (Peak), so the maximum field strength in restrict band is $108.62 - 44.07 = 64.55$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on the next third page shows 44.64dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 97.35dBuV/m (Average), so the maximum field strength in restrict band is $97.35 - 44.64 = 52.71$ dBuV/m which is under 54dBuV/m limit.

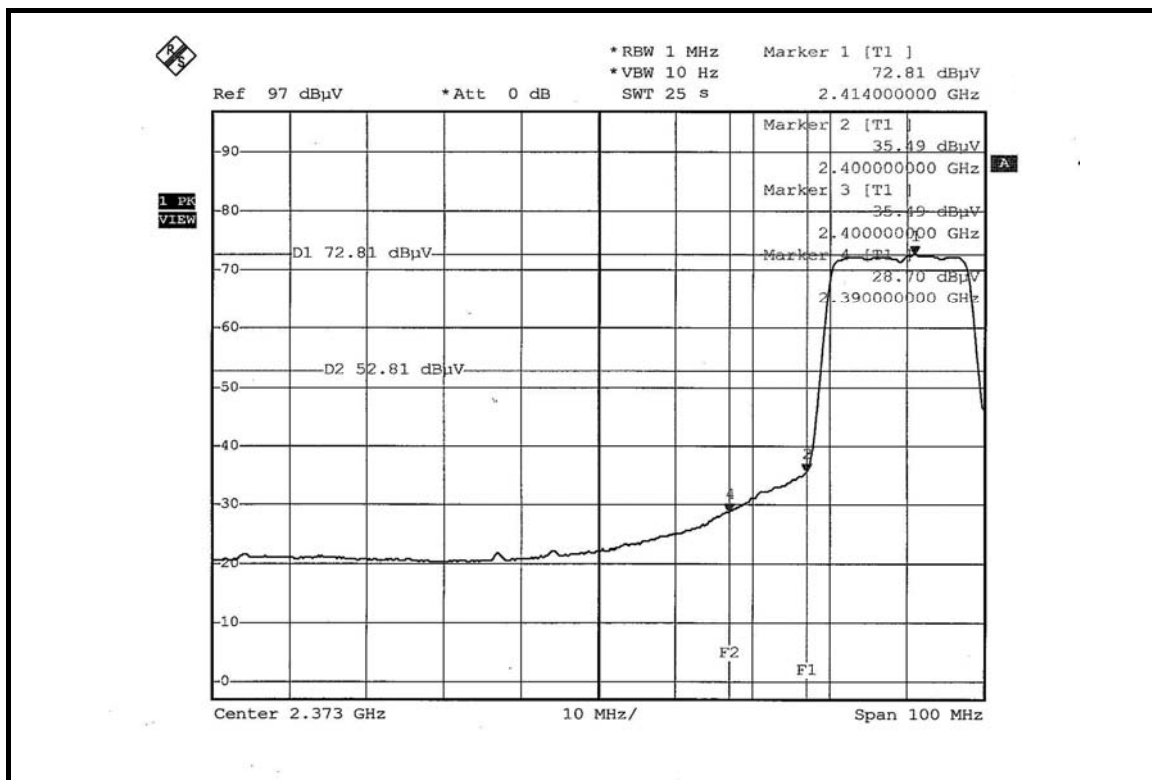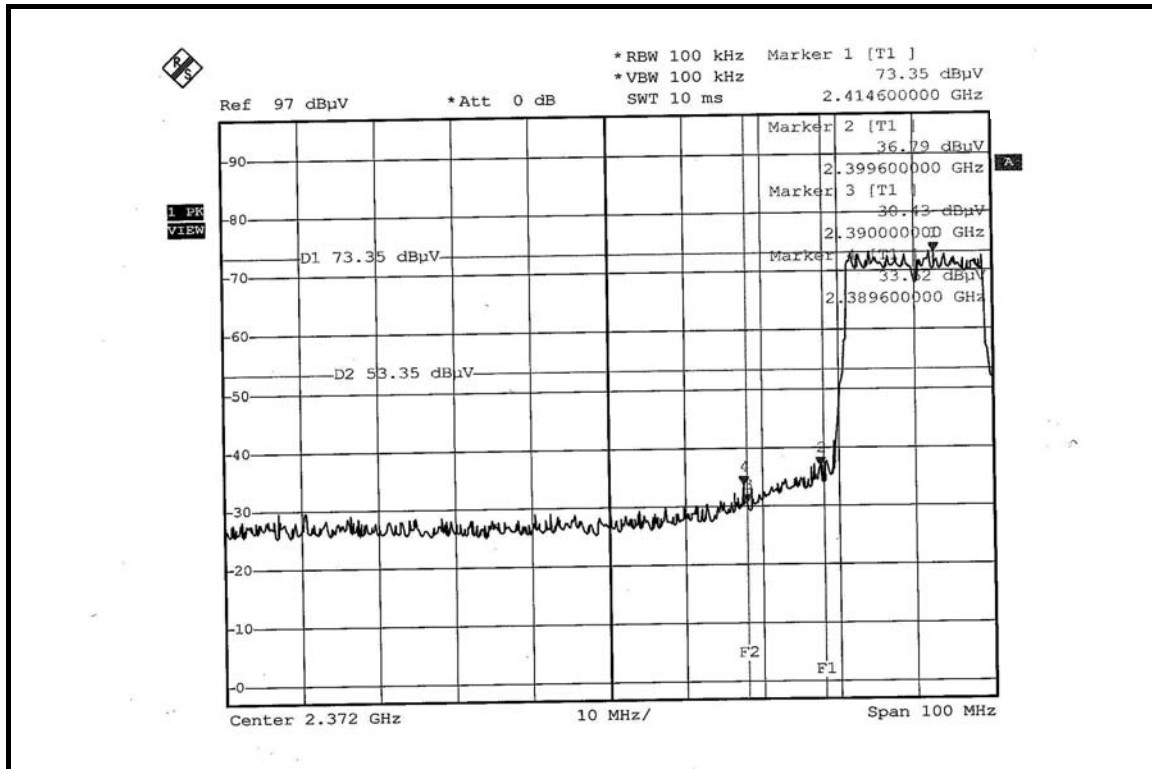

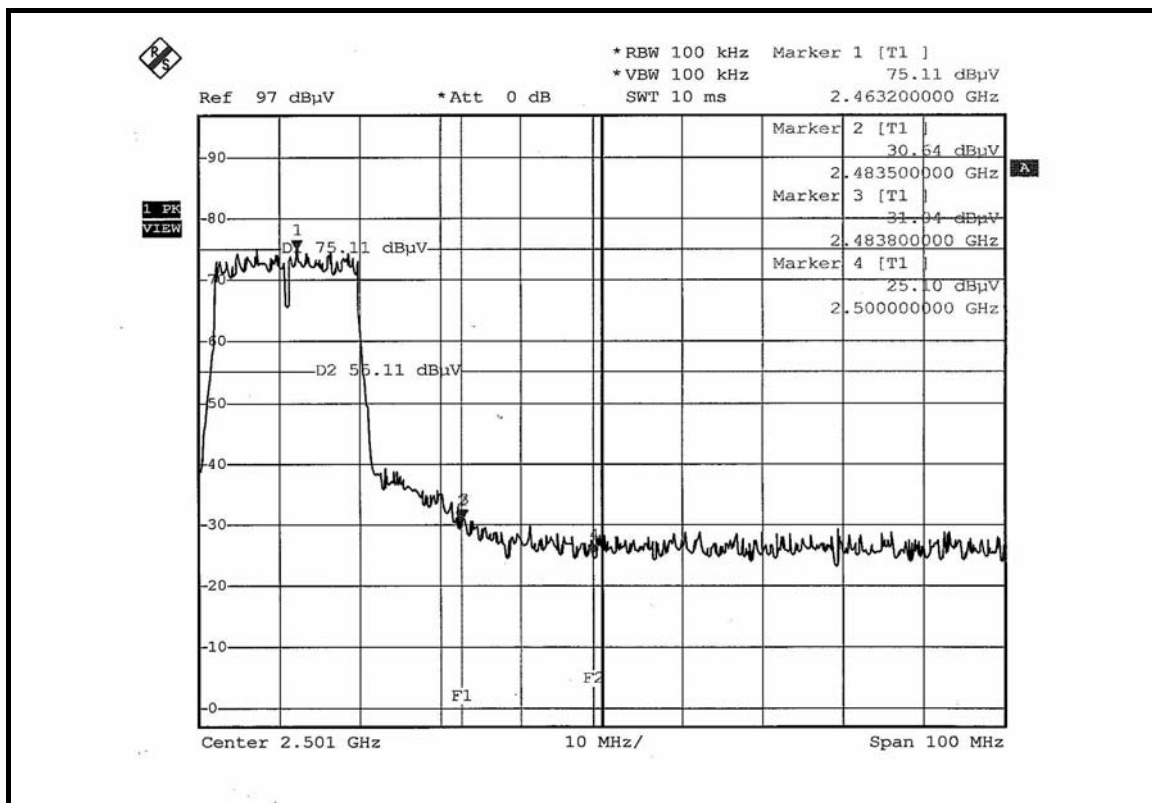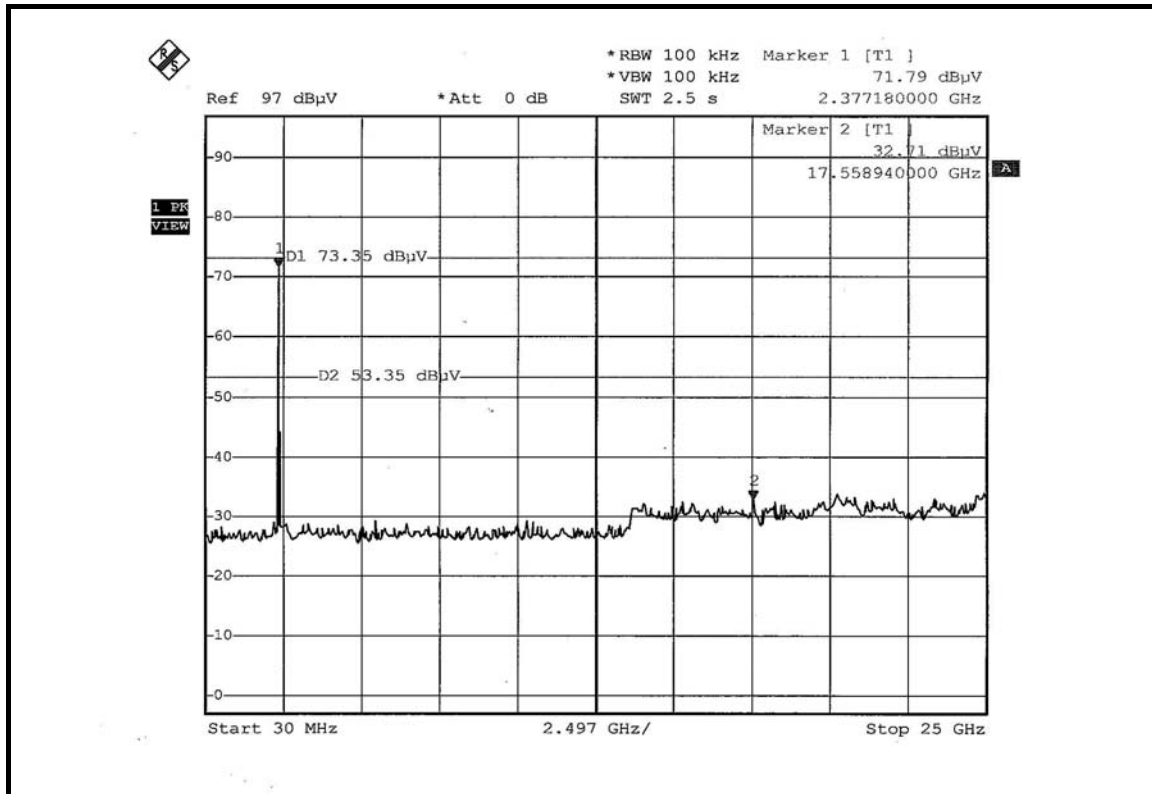

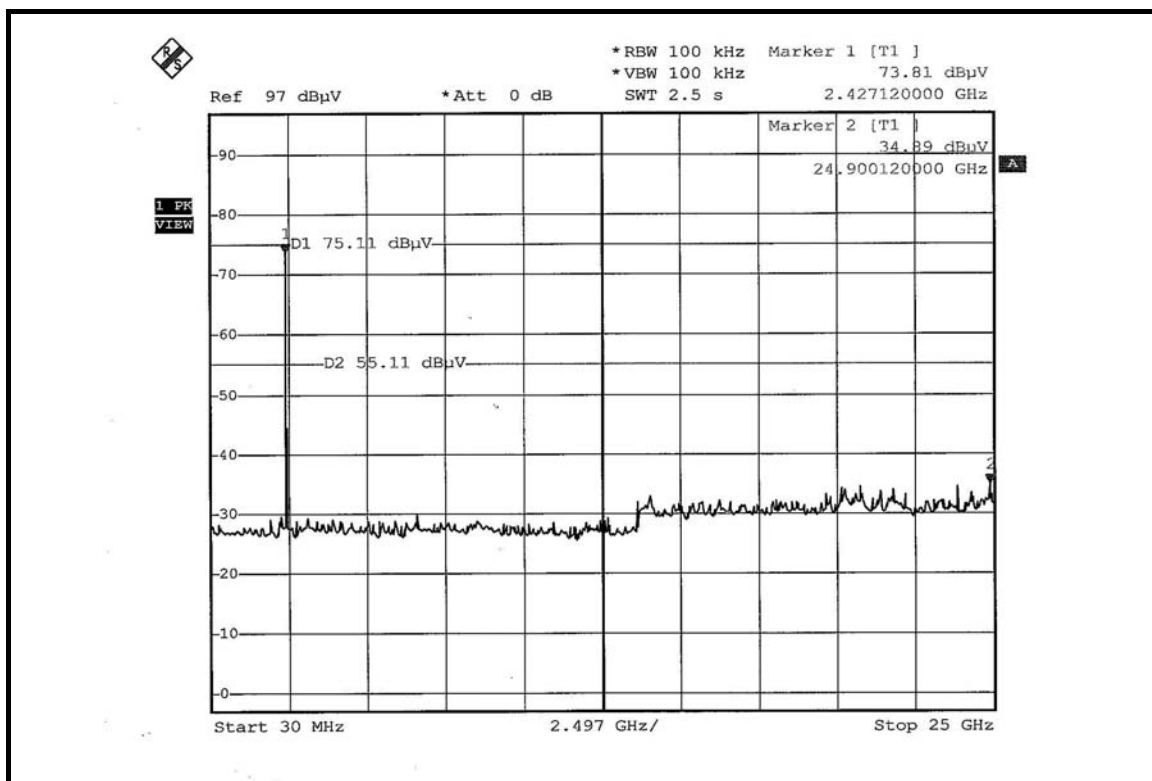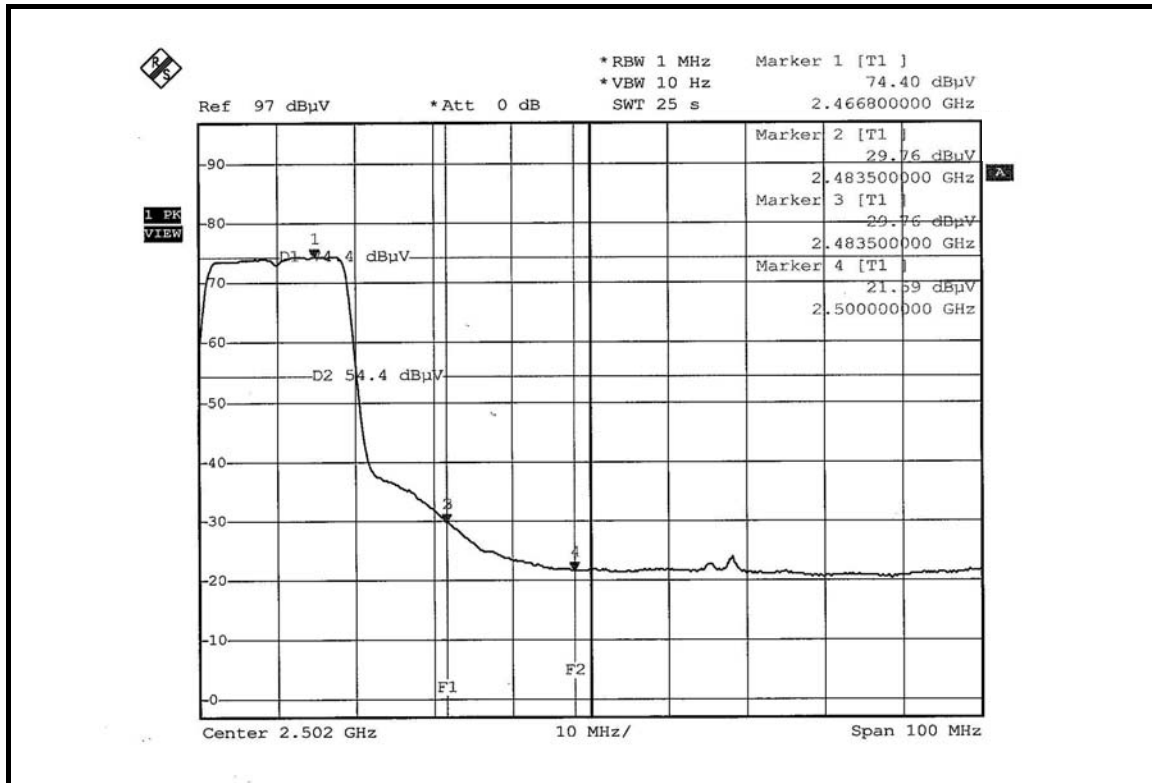



DRAFT 802.11n (40MHz) OFDM MODULATION: DUAL TX:



NOTE 1: The band edge emission plot of OFDM technique on the next page shows 36.54dBc between carrier maximum power and local maximum emission in restrict band (2.38200GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 102.31dBuV/m (Peak), so the maximum field strength in restrict band is $102.31 - 36.54 = 65.77$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on the next page shows 39.02dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 91.39dBuV/m (Average), so the maximum field strength in restrict band is $91.39 - 39.02 = 52.37$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of OFDM technique on the next second page shows 36.10dBc between carrier maximum power and local maximum emission in restrict band (2.4920GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.2.7 is 102.14dBuV/m (Peak), so the maximum field strength in restrict band is $102.14 - 36.10 = 66.04$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on the next third page shows 40.45dBc between carrier maximum power and local maximum emission in restrict band (2.49200GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.2.7 is 91.09dBuV/m (Average), so the maximum field strength in restrict band is $91.09 - 40.45 = 50.64$ dBuV/m which is under 54dBuV/m limit.

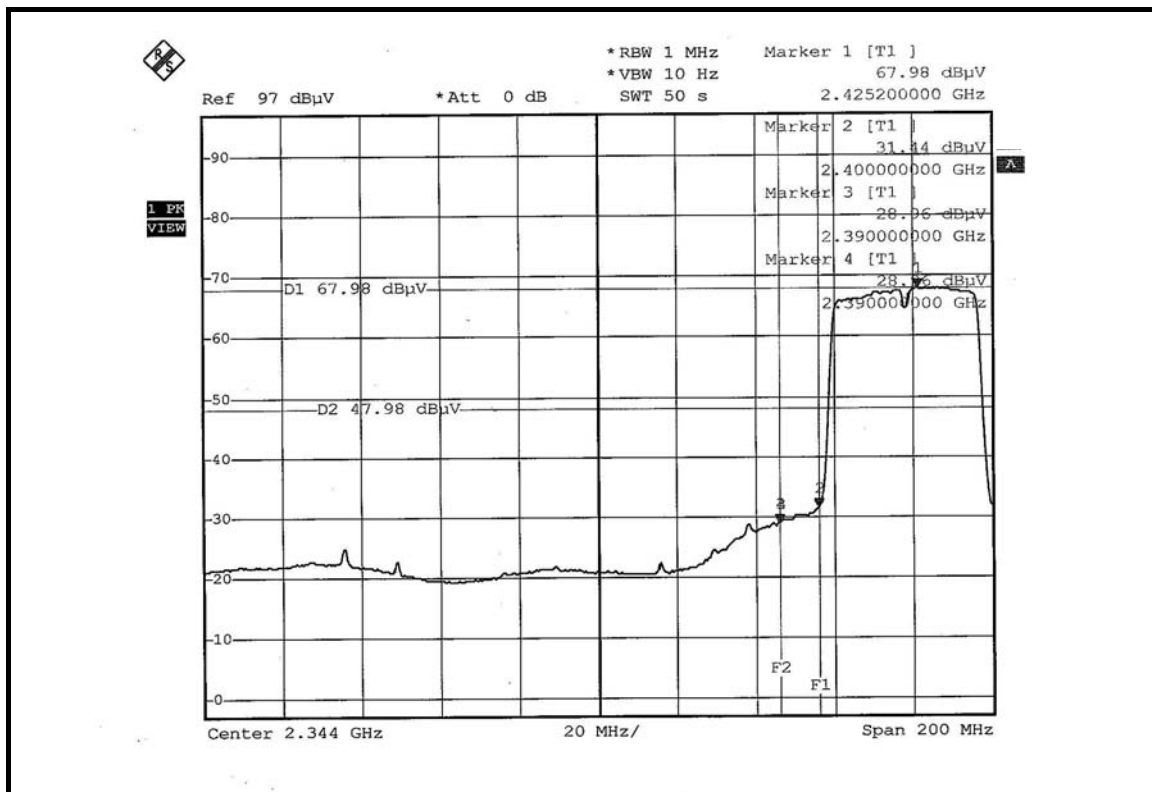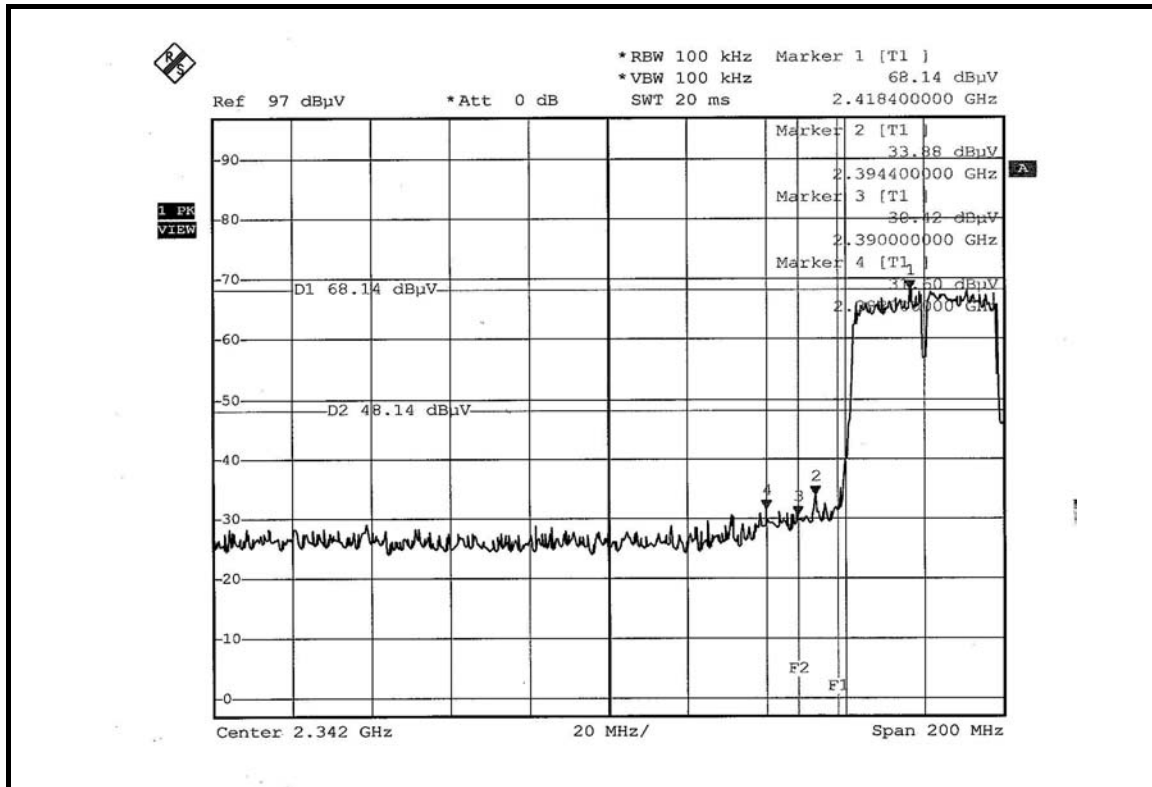

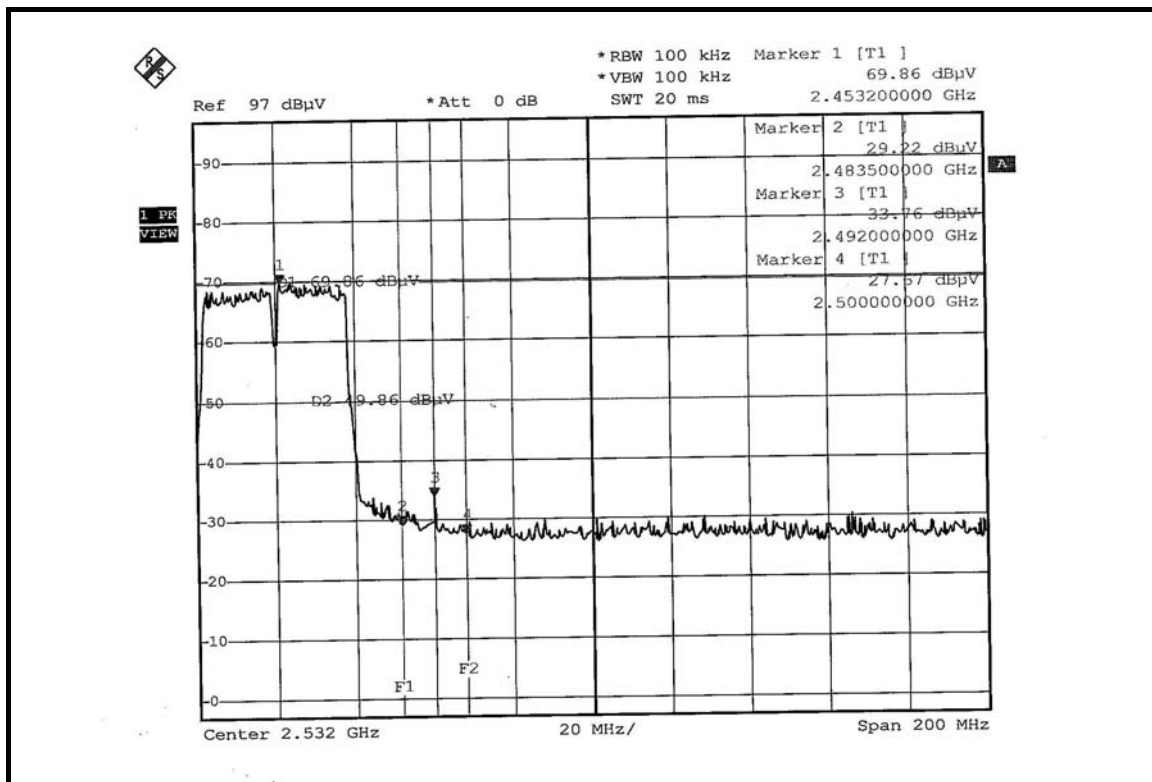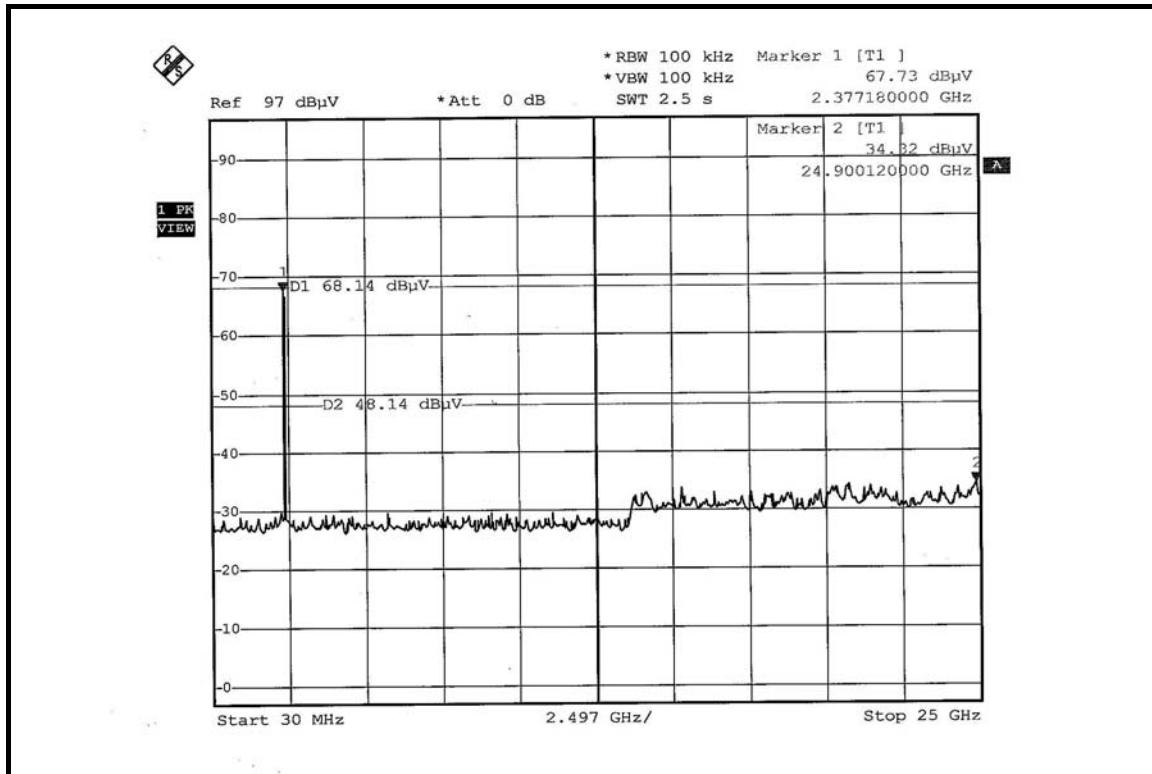

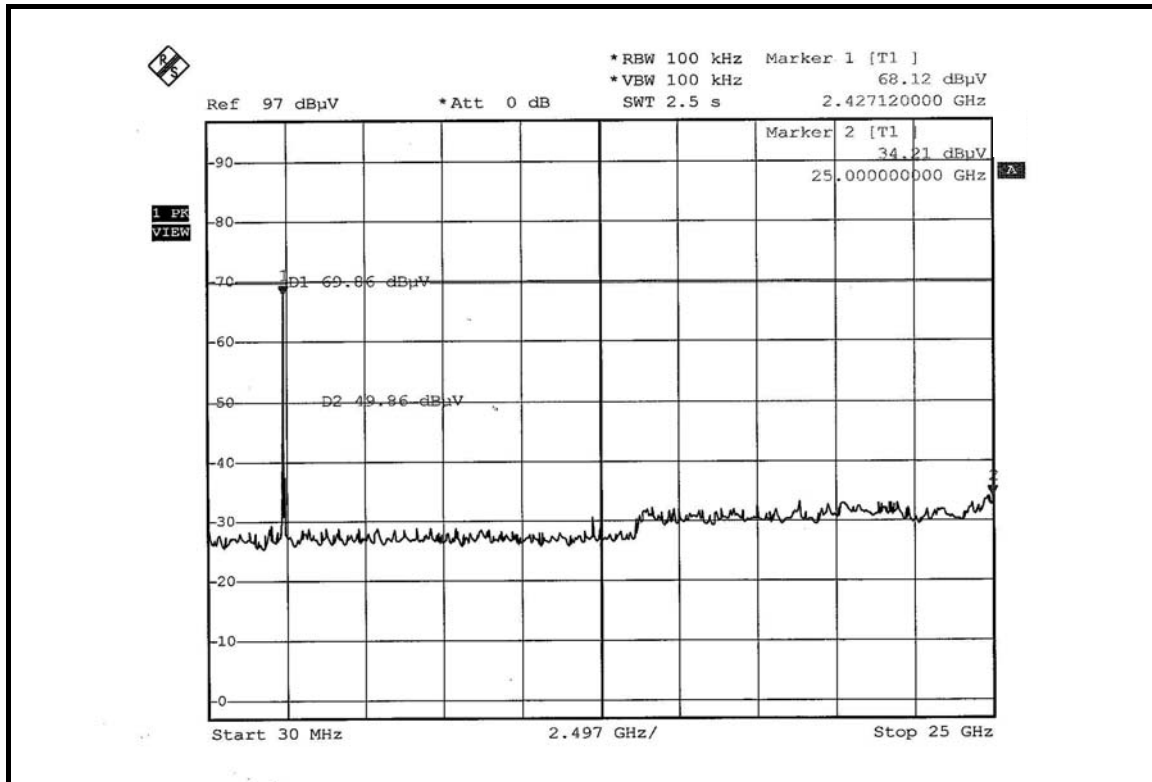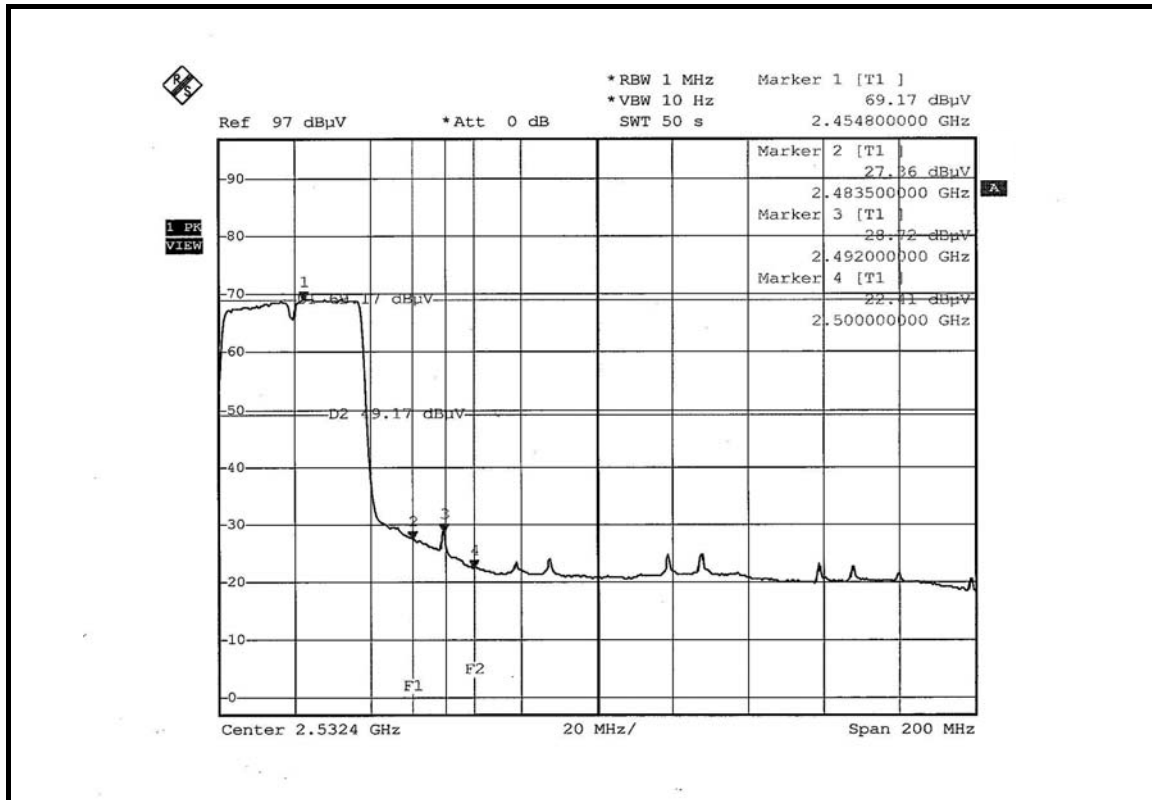



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION


The antenna used in this product is Dipole antenna with R-SMA connector. The maximum Gain of the antenna is -1.1dBi .

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

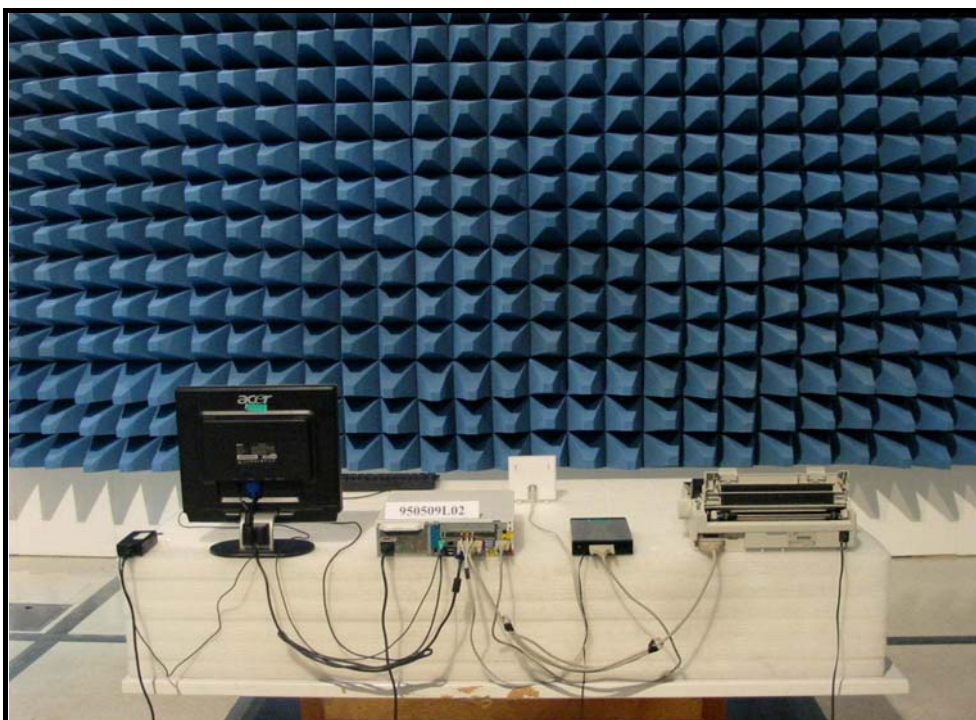



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab: Linko RF Lab.

Tel: 886-3-3183232
Fax: 886-3-3185050

Tel: 886-3-3270910
Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.