



**FCC 47 CFR PART 15 SUBPART C**

**TEST REPORT**

**For**

**NETGEAR WG111v3 54Mbps Wireless USB 2.0 Adapter**

**Model: WG111v3**

**Trade Name: NETGEAR**

*Issued to*

**NETGEAR Inc.  
4500 Great America Parkway, Santa Clara,  
CA 95054, United States**

*Issued by*

**Compliance Certification Services Inc.  
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,  
Taoyuan Hsien, (338) Taiwan, R.O.C.  
<http://www.ccsemc.com.tw>  
[service@tw.ccsemc.com](mailto:service@tw.ccsemc.com)**



---

*Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



# TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION ..... 3**
- 2. EUT DESCRIPTION..... 4**
- 3. TEST METHODOLOGY..... 5**
  - 3.1 EUT CONFIGURATION ..... 5
  - 3.2 EUT EXERCISE ..... 5
  - 3.3 GENERAL TEST PROCEDURES ..... 5
  - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS ..... 6
  - 3.5 DESCRIPTION OF TEST MODES ..... 7
- 4. INSTRUMENT CALIBRATION ..... 8**
  - 4.1 MEASURING INSTRUMENT CALIBRATION ..... 8
  - 4.2 MEASUREMENT EQUIPMENT USED ..... 8
- 5. FACILITIES AND ACCREDITATIONS..... 9**
  - 5.1 FACILITIES ..... 9
  - 5.2 EQUIPMENT ..... 9
  - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS ..... 10
- 6. SETUP OF EQUIPMENT UNDER TEST..... 11**
  - 6.1 SUPPORT EQUIPMENT ..... 11
  - 6.2 SUPPORT EQUIPMENT ..... 11
- 7. FCC PART 15.247 REQUIREMENTS ..... 12**
  - 7.1 6DB BANDWIDTH ..... 12
  - 7.2 PEAK POWER ..... 16
  - 7.3 AVERAGE POWER..... 20
  - 7.4 BAND EDGES MEASUREMENT ..... 24
  - 7.5 PEAK POWER SPECTRAL DENSITY ..... 33
  - 7.6 SPURIOUS EMISSIONS ..... 38
  - 7.7 POWERLINE CONDUCTED EMISSIONS ..... 52
- APPENDIX I RADIO FREQUENCY EXPOSURE ..... 55**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP..... 56**



# 1. TEST RESULT CERTIFICATION

**Applicant:** NETGEAR Inc.  
 4500 Great America Parkway, Santa Clara,  
 CA 95054, United States

**Equipment Under Test:** NETGEAR WG111v3 54Mbps Wireless USB 2.0 Adapter

**Trade Name:** NETGEAR

**Model:** WG111v3

**Date of Test:** March 13 ~ April 13, 2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted


We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements emission limits of FCC Rules Part 15.107, 15.109, 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

*Approved by:*

*Reviewed by:*

  
 \_\_\_\_\_  
 Johnny Liu  
 Section Manager  
 Compliance Certification Services Inc.

  
 \_\_\_\_\_  
 Amanda Wu  
 Section Manager  
 Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	NETGEAR WG111v3 54Mbps Wireless USB 2.0 Adapter
<b>Trade Name</b>	NETGEAR
<b>Model Number</b>	WG111v3
<b>Model Discrepancy</b>	N/A
<b>Power Supply</b>	Vdc from USB Port of Host PC
<b>Frequency Range</b>	2412 ~ 2462 MHz
<b>Transmit Power</b>	IEEE 802.11b: 21.72 dBm IEEE 802.11g: 19.73 dBm
<b>Modulation Technique</b>	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
<b>Transmit Data Rate</b>	IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps
<b>Number of Channels</b>	11 Channels
<b>Antenna Specification</b>	Printed Antenna / Gain: 2.09 dBi

**Remark:**

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **PY306300056** filing to comply with Section 15.227 of the FCC Part 15, Subpart C Rules.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.107, 15.109 and 15.207, 15.209, 15.247.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.107 and 15.109 under the FCC Rules Part 15 Subpart B and Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### **3.5 DESCRIPTION OF TEST MODES**

The EUT (model: WG111v3) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed. The worst case data rate is determined as the data rate with highest output power.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE802.11b: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 11Mbps data rate were chosen for full testing.

IEEE802.11g:

Base mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.



## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year.*

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/30/2008
Spectrum Analyzer	R&S	FSEK30	10026	03/21/2008

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	08/02/2007
Test Receiver	Rohde&Schwarz	ESCI	100064	11/13/2007
Switch Controller	TRC	Switch Controller	SC94050010	05/05/2007
4 Port Switch	TRC	4 Port Switch	SC94050020	05/05/2007
Horn-Antenna	TRC	HA-0502	06	06/06/2007
Horn-Antenna	TRC	HA-0801	04	05/05/2007
Horn-Antenna	TRC	HA-1201A	01	07/10/2007
Horn-Antenna	TRC	HA-1301A	01	07/18/2007
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/08/2008
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/25/2008
Test S/W	LABVIEW (V 6.1)			

*Remark: The measurement uncertainty is less than +/-2.0065dB (30MHz ~ 1GHz), +/-3.0958dB (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.*

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	10/31/2007
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/14/2007
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	03/19/2008
Test S/W	LABVIEW (V 6.1)			

*Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.*





## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT








Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, EIC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 0824-01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	 93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	 Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 2324C-3, IC 2324C-5) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	 IC 2324C-3 IC 2324C-5 IC 6106

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SUPPORT EQUIPMENT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	IBM	2672 (X31)	99PBTKB	WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	Notebook PC	Sony	PCG-6GFP	00045-578-554-578	WLAN: ETC094LPD0155 Bluetooth: ETC094LPD0156	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
3.	Super a/g 108Mbps Wireless Lan Router (Remote)	PLANEX	BLW-04SAG	40DDA0421	SJ9-BLW54SAG	N/A	Unshielded, 1.8m

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 6DB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted*

#### Test Data

##### Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	9750	>500	PASS
Mid	2437	9830		PASS
High	2462	9830		PASS

##### Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16080	>500	PASS
Mid	2437	16250		PASS
High	2462	16420		PASS



### Test Plot

### IEEE 802.11b

### 6dB Bandwidth (CH Low)

Agilent 20:29:31 Apr 11, 2007

R T


6dB BW, b Mode Low Ch.

Δ Mkr1 9.75 MHz

Ref 20 dBm

Atten 20 dB

0.03 dB

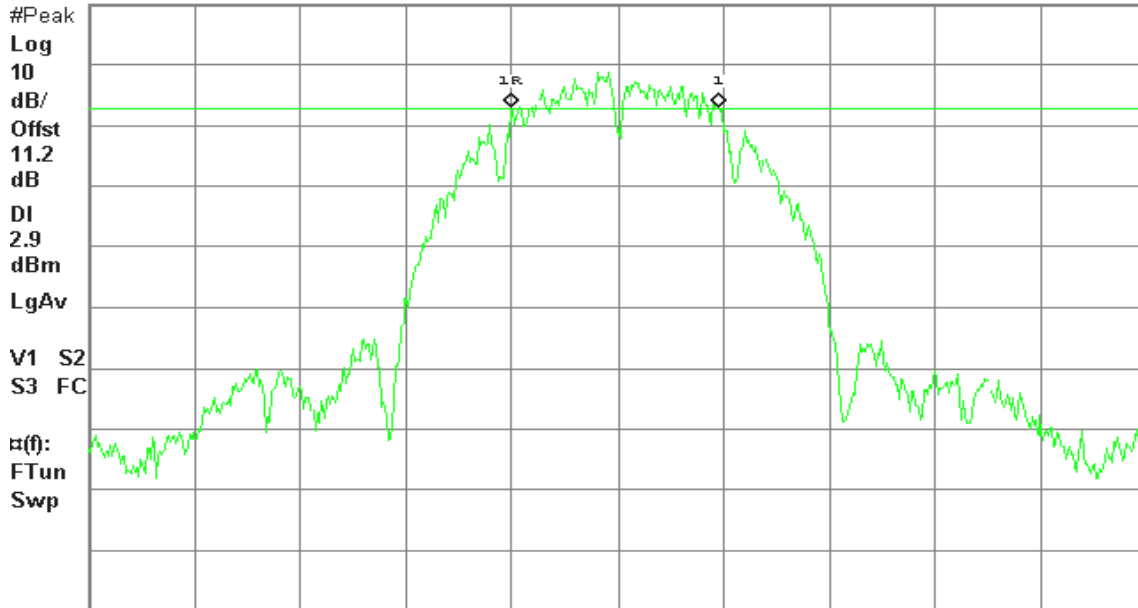

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

### 6dB Bandwidth (CH Mid)

Agilent 20:48:05 Apr 11, 2007

R T


6dB BW, b Mode Mid Ch.

Δ Mkr1 9.83 MHz

Ref 20 dBm

Atten 20 dB

-0.70 dB

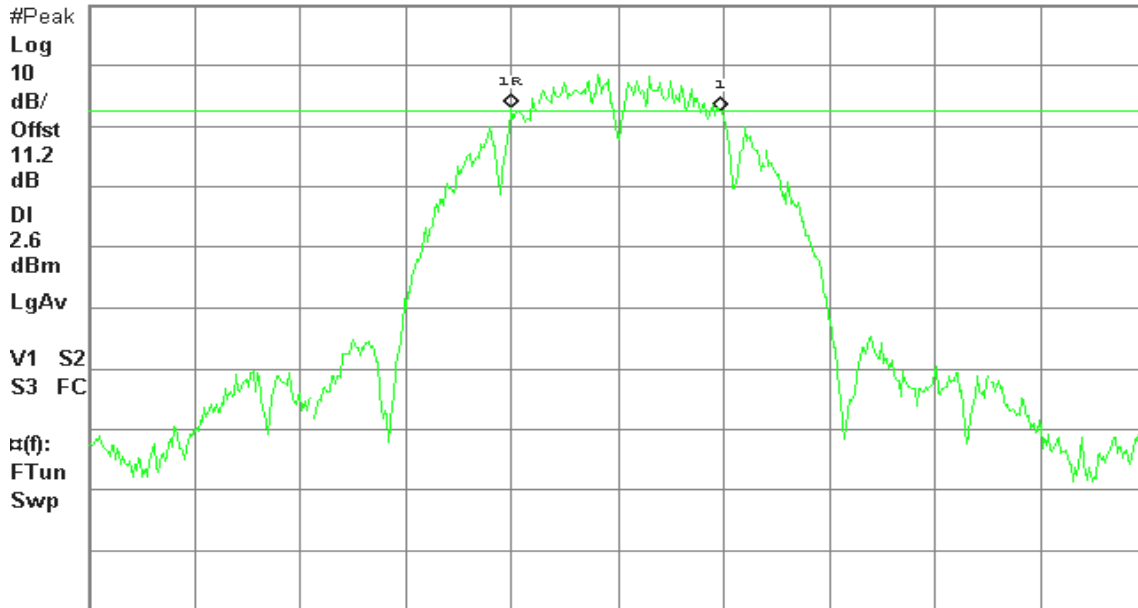

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



### 6dB Bandwidth (CH High)

Agilent 20:58:58 Apr 11, 2007

R T


6dB BW, b Mode High Ch.

Δ Mkr1 9.83 MHz

Ref 20 dBm

Atten 20 dB

-1.46 dB

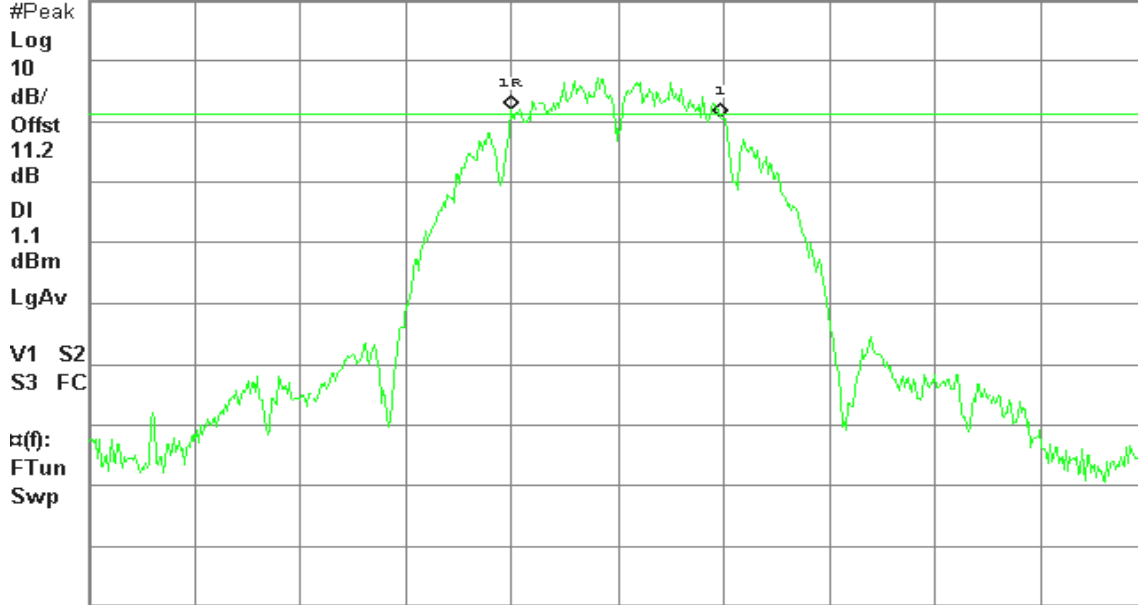

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

### IEEE 802.11g

### 6dB Bandwidth (CH Low)

Agilent 21:19:48 Apr 11, 2007

R T


6dB BW, g Mode Low Ch.

Δ Mkr1 16.08 MHz

Ref 20 dBm

Atten 20 dB

0.49 dB

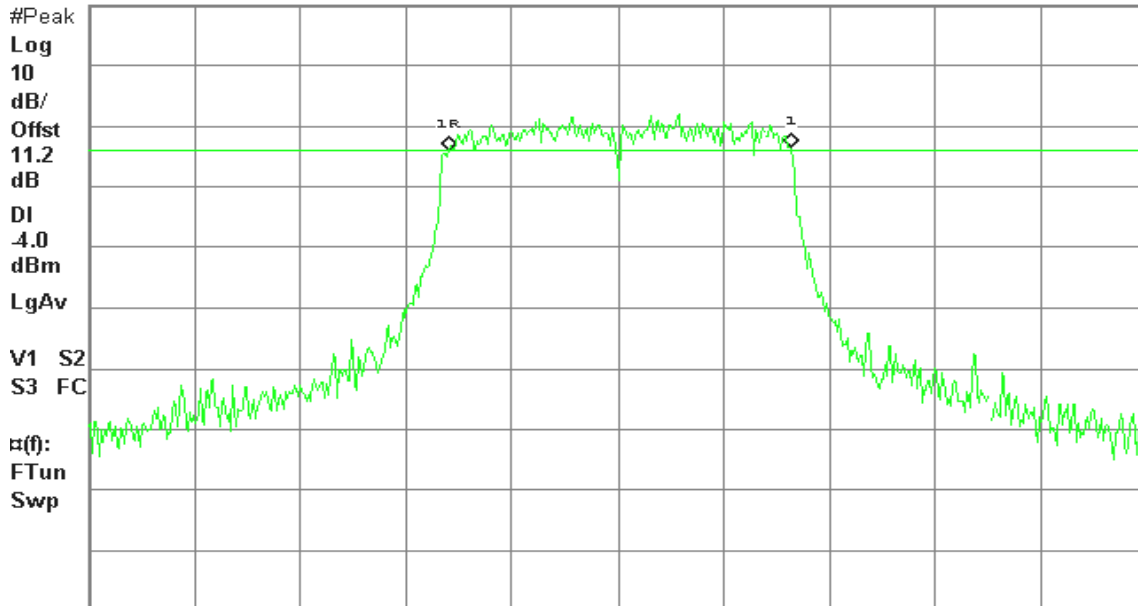

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



### 6dB Bandwidth (CH Mid)

Agilent 21:29:24 Apr 11, 2007

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 16.25 MHz

Ref 20 dBm

Atten 20 dB

-1.26 dB

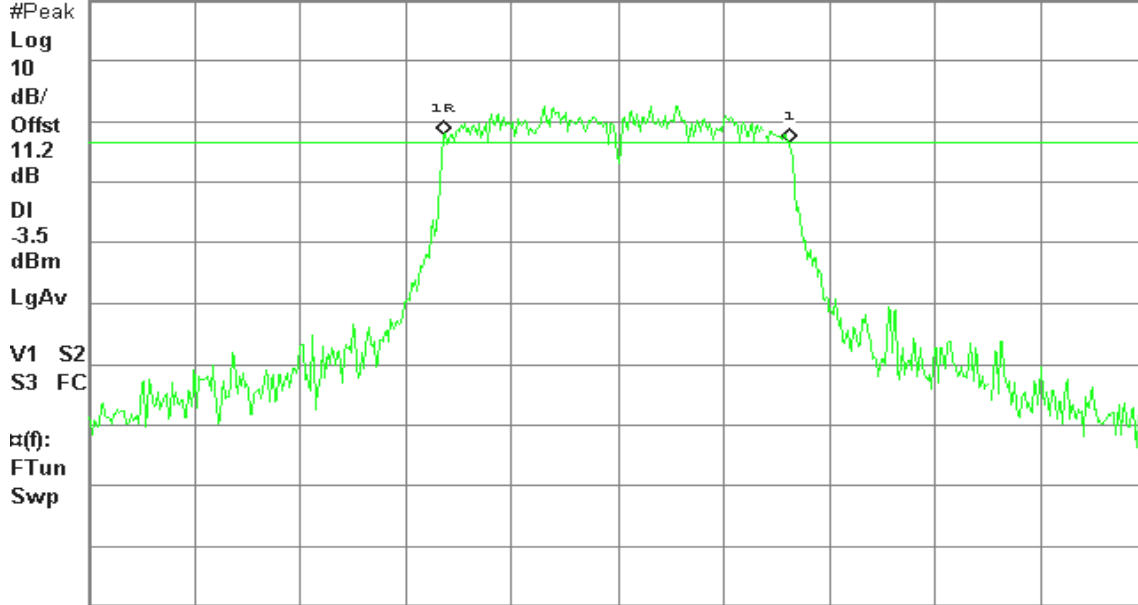

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

### 6dB Bandwidth (CH High)

Agilent 21:35:32 Apr 11, 2007

R L


6dB BW, g Mode High Ch.

Δ Mkr1 16.42 MHz

Ref 20 dBm

Atten 20 dB

-0.18 dB

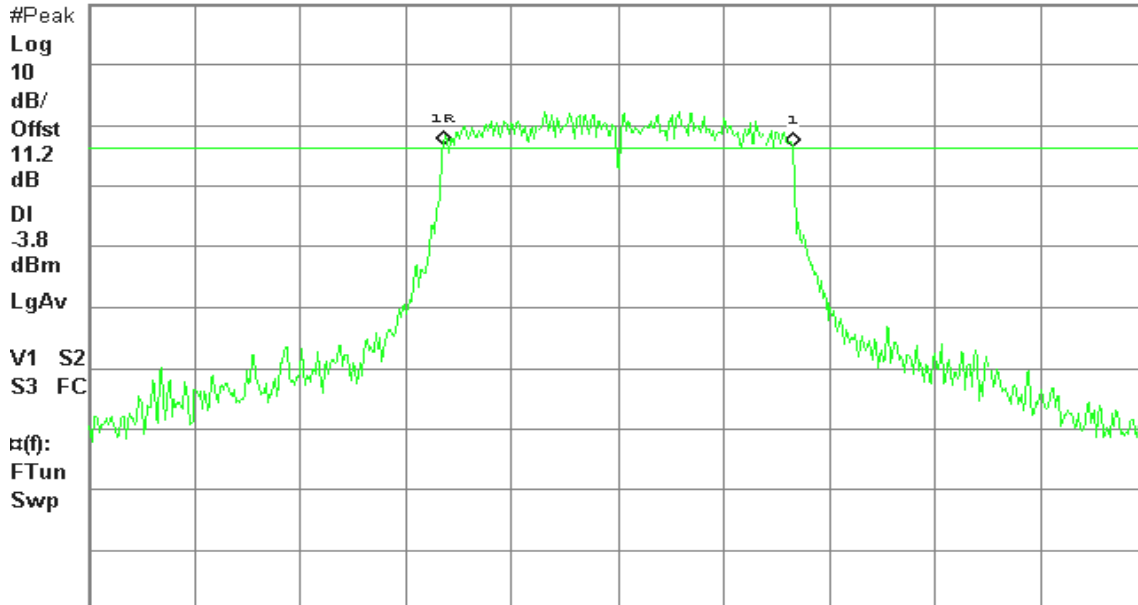

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)


## 7.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

### TEST RESULTS

*No non-compliance noted.*

#### Test Data

##### Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	21.72	0.14859	1	PASS
Mid	2437	21.66	0.14655		PASS
High	2462	20.48	0.11169		PASS

##### Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	18.91	0.07780	1	PASS
Mid	2437	19.73	0.09397		PASS
High	2462	19.22	0.08356		PASS





**Test Plot**

**IEEE 802.11b**

**Peak Power (CH Low)**


Agilent 20:37:40 Apr 11, 2007

R T

Peak Output Power, b Mode Low Ch.

Ref 20 dBm

Atten 20 dB

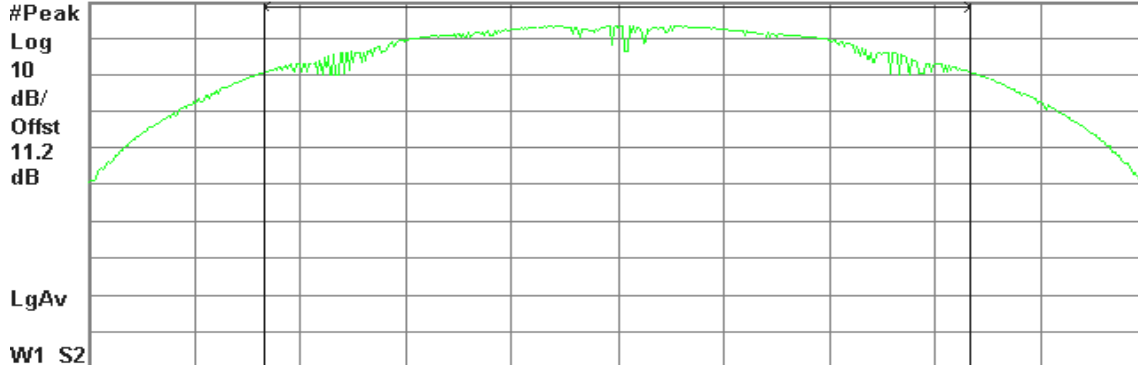

Center 2.412 00 GHz

Span 21.27 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

21.72 dBm / 14.1820 MHz

-49.80 dBm/Hz

**Peak Power (CH Mid)**


Agilent 20:49:17 Apr 11, 2007

R L

Peak Output Power, b Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

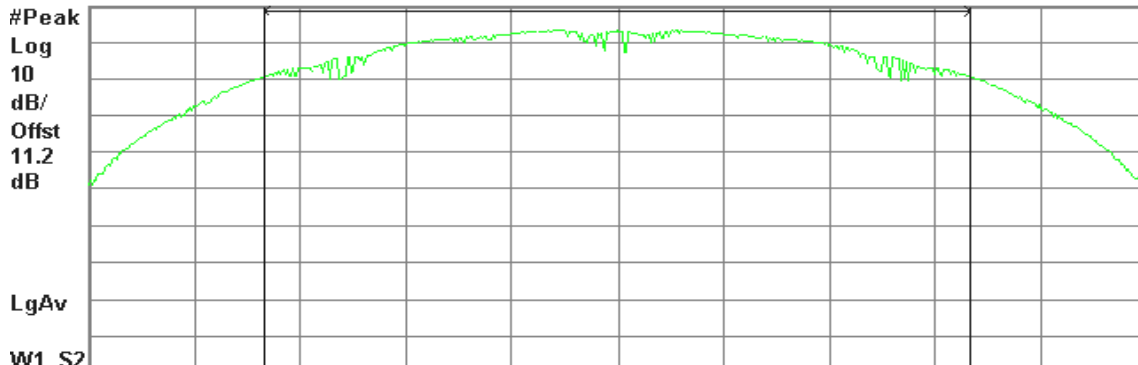

Center 2.437 00 GHz

Span 21.27 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

21.66 dBm / 14.1820 MHz

-49.86 dBm/Hz



### Peak Power (CH High)


Agilent 21:00:27 Apr 11, 2007

R T

Peak Output Power , b Mode High Ch.

Ref 20 dBm

Atten 20 dB

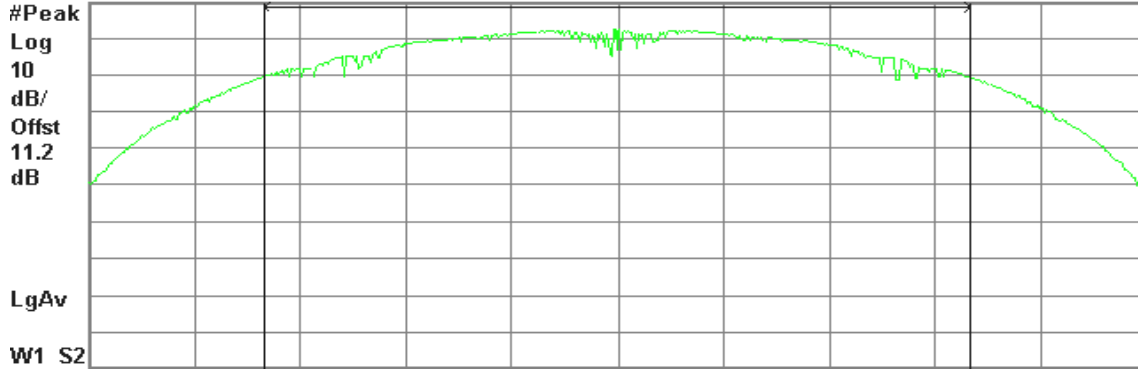

Center 2.462 00 GHz

Span 21.27 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

20.48 dBm / 14.1800 MHz

-51.04 dBm/Hz

### IEEE 802.11g


#### Peak Power (CH Low)

Agilent 21:28:04 Apr 11, 2007

R T

Ref 20 dBm

Atten 20 dB

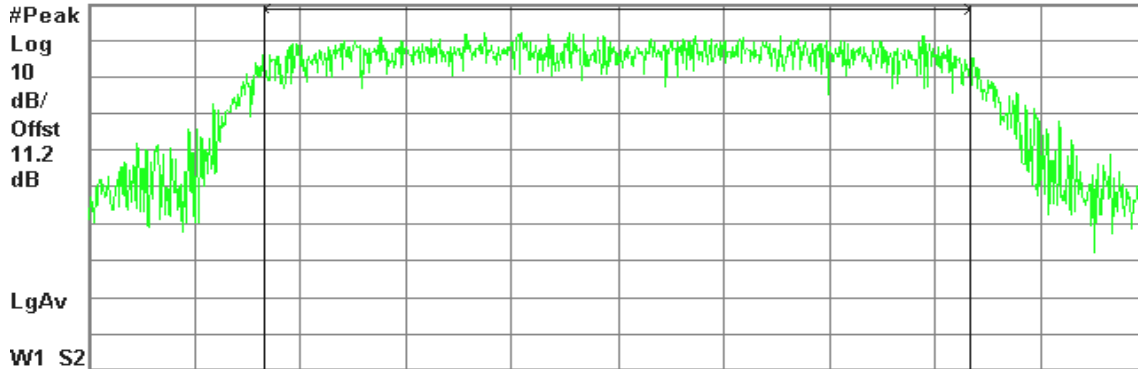

Center 2.412 00 GHz

Span 24.51 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (1001 pts)

Channel Power

Power Spectral Density

18.91 dBm / 16.3420 MHz

-53.22 dBm/Hz



### Peak Power (CH Mid)


Agilent 21:30:26 Apr 11, 2007

R T

Peak Output Power , g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

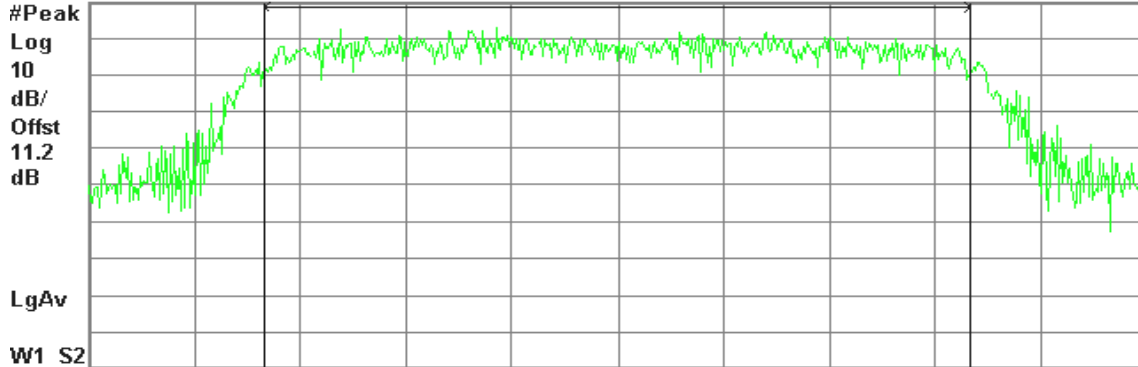

Center 2.437 00 GHz

Span 24.52 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

19.73 dBm / 16.3490 MHz

-52.40 dBm/Hz

### Peak Power (CH High)


Agilent 21:36:57 Apr 11, 2007

R T

Peak Output Power , g Mode High Ch.

Ref 20 dBm

Atten 20 dB

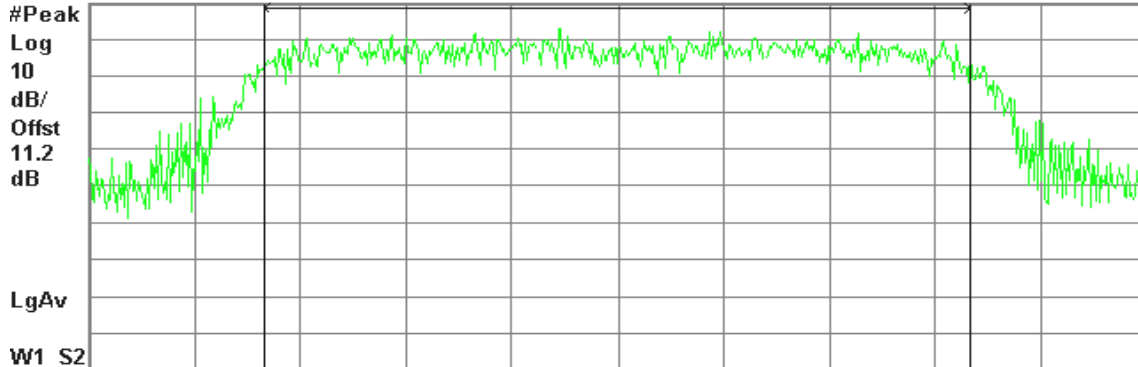

Center 2.462 00 GHz

Span 24.5 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

19.22 dBm / 16.3360 MHz

-52.91 dBm/Hz




### 7.3 AVERAGE POWER

#### LIMIT

None; for reporting purposes only.

#### Test Configuration



#### TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

#### TEST RESULTS

*No non-compliance noted.*

#### Test Data

##### Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	19.14	0.08204
Mid	2437	19.12	0.08166
High	2462	19.01	0.07962

##### Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	16.20	0.04169
Mid	2437	16.25	0.04217
High	2462	15.66	0.03681



**Test Plot**

**IEEE 802.11b**

**CH Low**


Agilent 20:38:24 Apr 11, 2007

R L

Avg Output Power , b Mode Low Ch.

Ref 30 dBm

Atten 30 dB

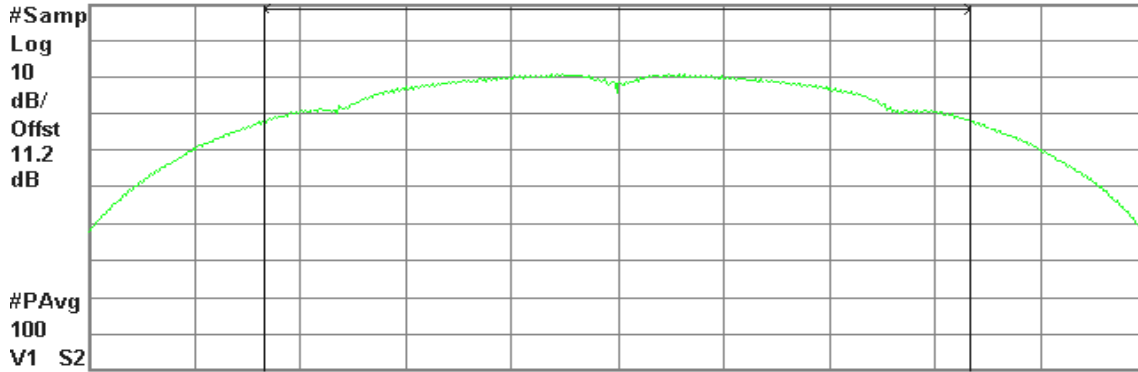

Center 2.412 00 GHz

Span 21.27 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

19.14 dBm / 14.1820 MHz

-52.37 dBm/Hz

**CH Mid**


Agilent 20:50:23 Apr 11, 2007

R T

Avg Output Power , b Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

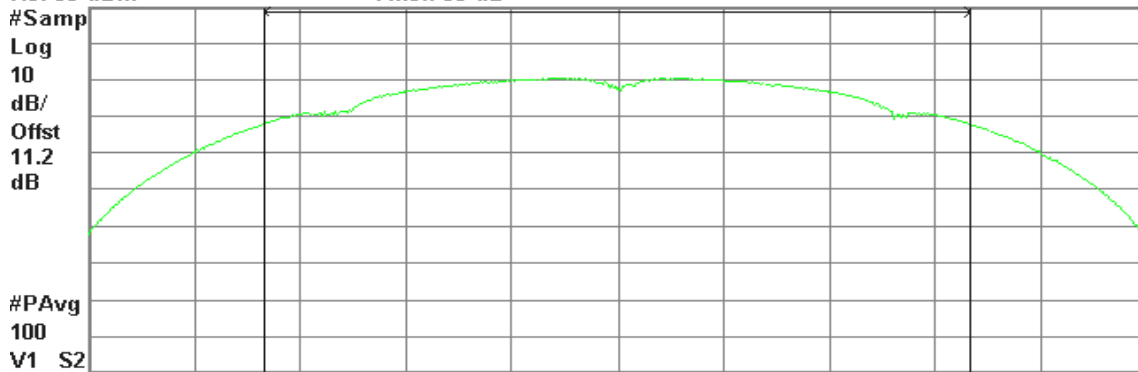

Center 2.437 00 GHz

Span 21.27 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

19.12 dBm / 14.1820 MHz

-52.39 dBm/Hz



**CH High**


Agilent 21:02:05 Apr 11, 2007

R T

Avg Output Power , b Mode High Ch.

Ref 30 dBm

Atten 30 dB

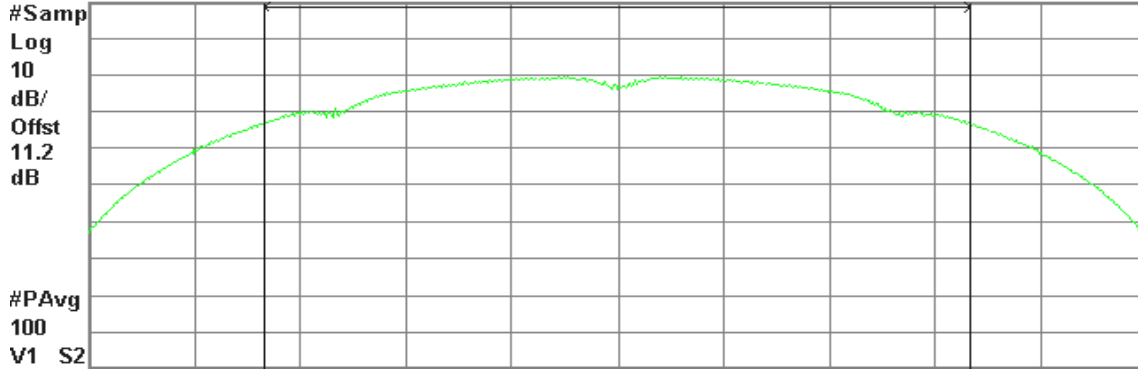

#Samp

Log

10

dB/

Offst

11.2

dB

#PAvg

100

V1 S2

Center 2.462 00 GHz

Span 21.27 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

19.01 dBm / 14.1800 MHz

-52.50 dBm/Hz

**IEEE 802.11g**

**CH Low**


Agilent 21:22:33 Apr 11, 2007

R T

Avg Output Power, g Mode Low Ch.

Ref 30 dBm

Atten 30 dB

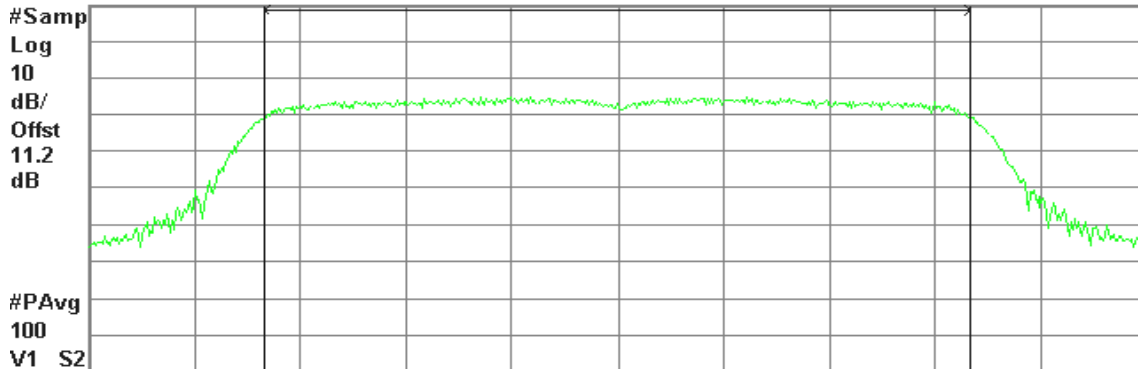

#Samp

Log

10

dB/

Offst

11.2

dB

#PAvg

100

V1 S2

Center 2.412 00 GHz

Span 24.51 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

16.20 dBm / 16.3420 MHz

-55.93 dBm/Hz



### CH Mid


Agilent 21:31:08 Apr 11, 2007

R L

Avg Output Power, g Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

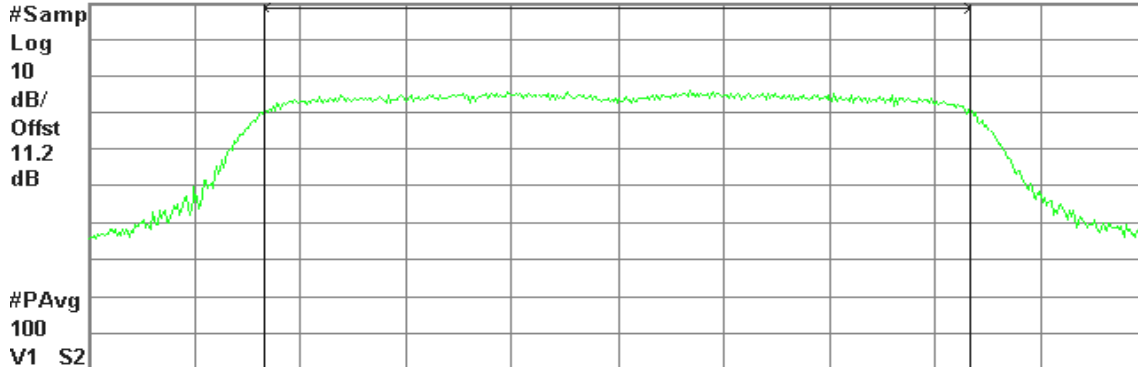

Center 2.437 00 GHz

Span 24.52 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

16.25 dBm / 16.3490 MHz

-55.88 dBm/Hz

### CH High


Agilent 21:37:57 Apr 11, 2007

R T

Avg Output Power, g Mode High Ch.

Ref 30 dBm

Atten 30 dB

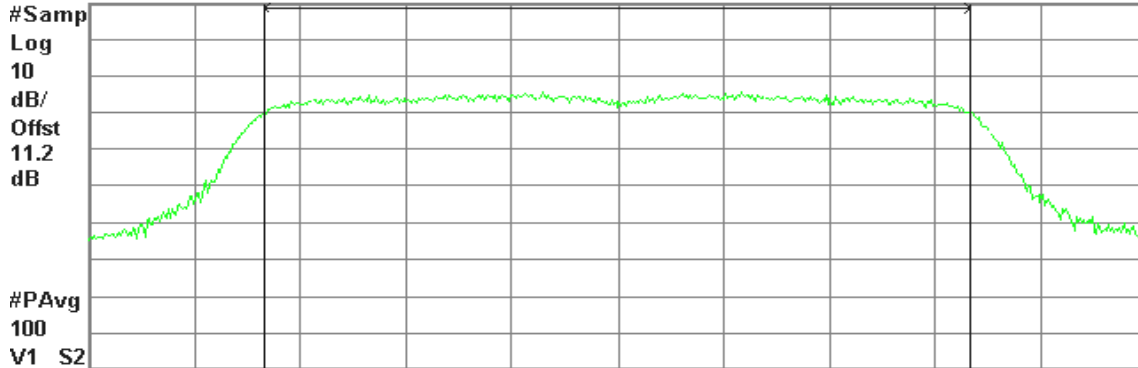

Center 2.462 00 GHz

Span 24.5 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.66 dBm / 16.3360 MHz


-56.47 dBm/Hz

## 7.4 BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

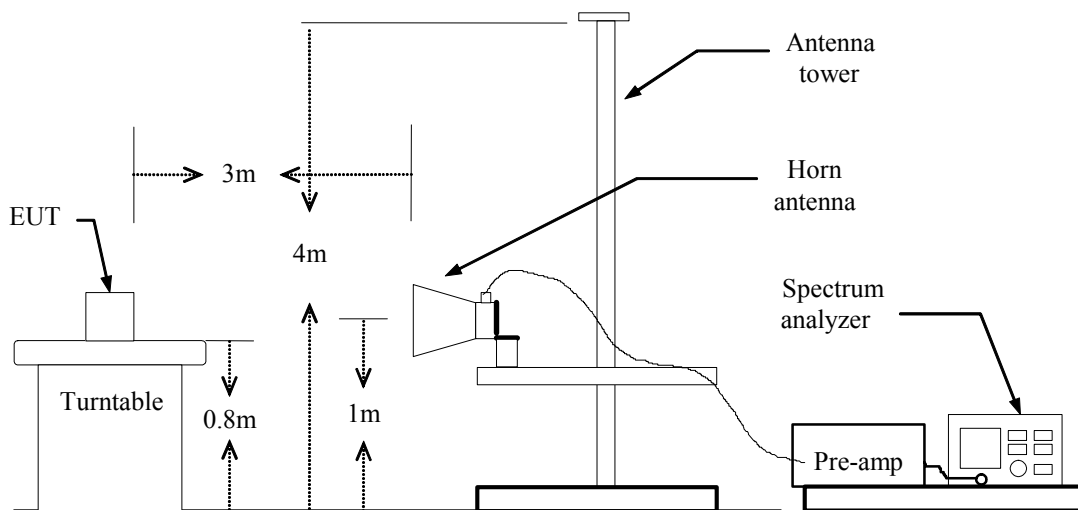

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=1MHz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS

Refer to attach spectrum analyzer data chart.





**IEEE 802.11b**

**Band Edges (CH Low)**


**Detector mode: Peak**

**Polarity: Vertical**

Agilent 22:57:27 Apr 11, 2007

R T

Mkr1 2.390 0 GHz  
53.75 dBµV

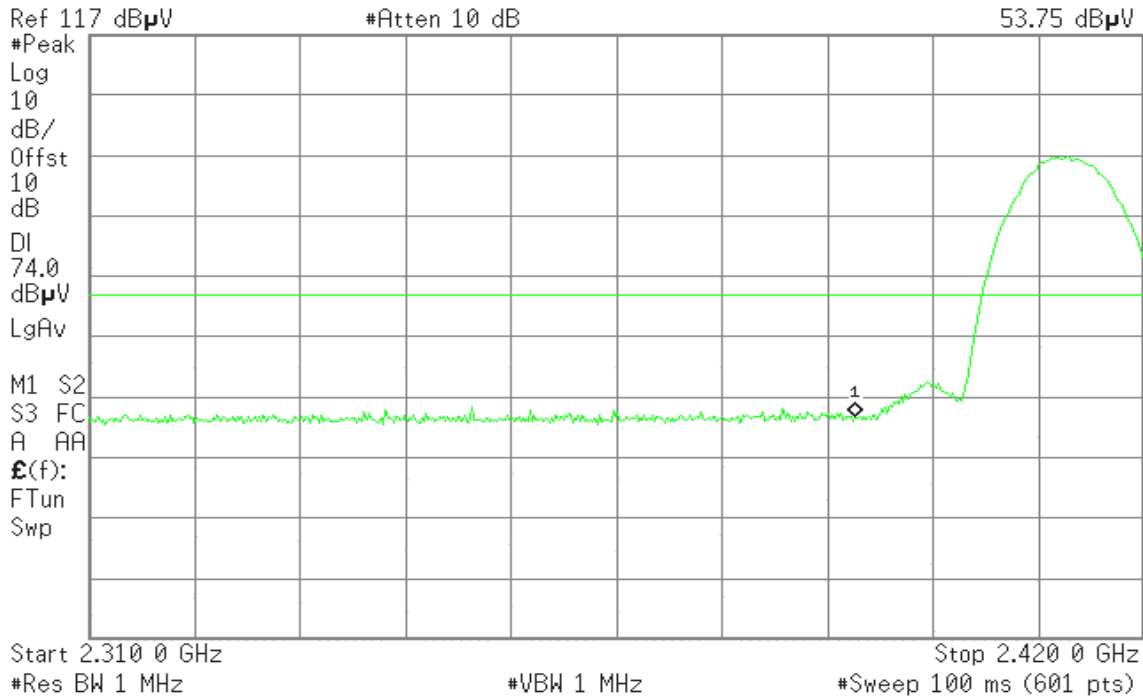

**Detector mode: Average**

**Polarity: Vertical**

Agilent 22:57:55 Apr 11, 2007

R T

Mkr1 2.390 0 GHz  
40.87 dBµV






Detector mode: Peak

Polarity: Horizontal

Agilent 22:53:27 Apr 11, 2007

R T

Mkr1 2.390 0 GHz  
54.54 dBμV

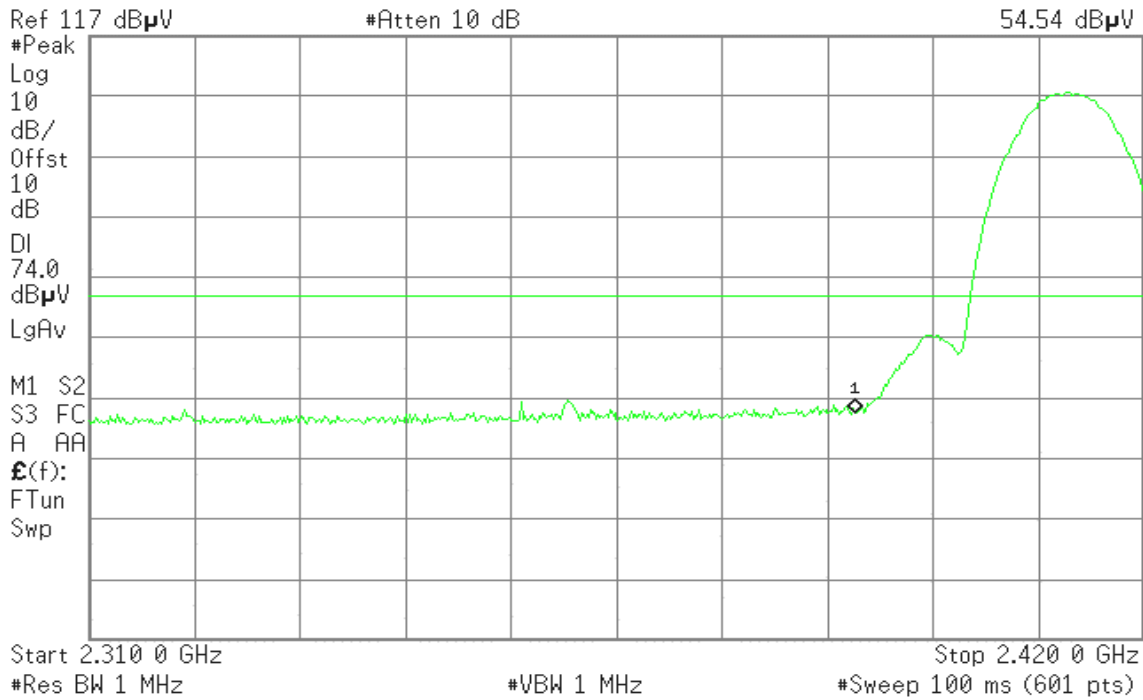


Detector mode: Average

Polarity: Horizontal

Agilent 22:53:54 Apr 11, 2007

R T

Mkr1 2.390 0 GHz  
42.80 dBμV

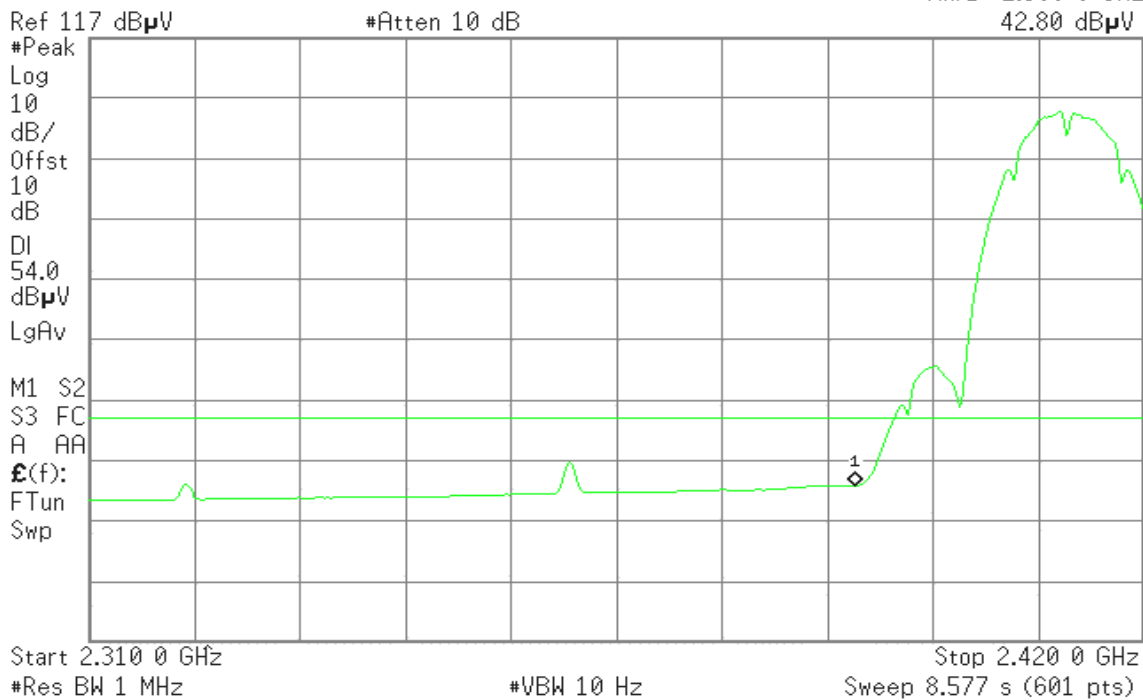



### Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 23:01:57 Apr 11, 2007

R T

Mkr1 2.483 50 GHz  
53.51 dBμV

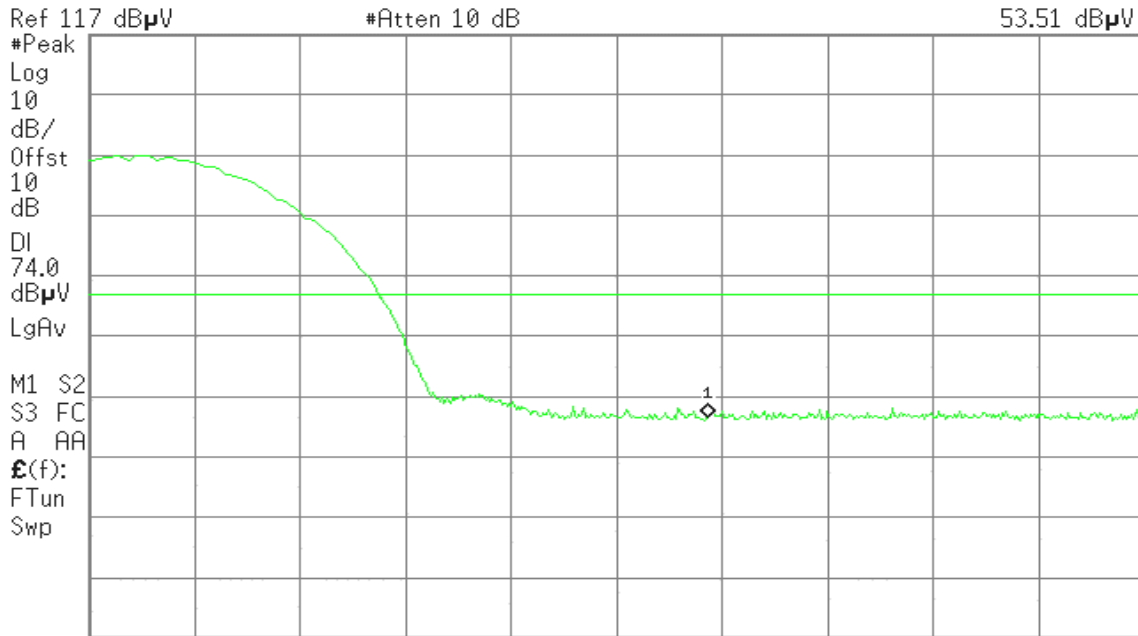

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 23:02:33 Apr 11, 2007

R T

Mkr1 2.483 50 GHz  
41.01 dBμV

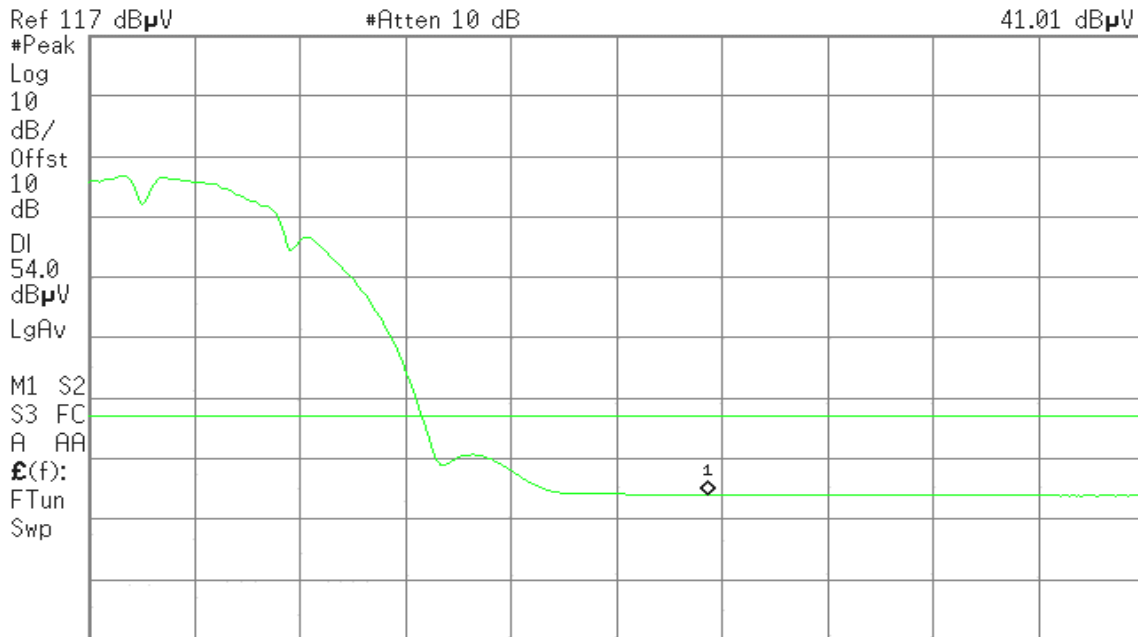

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 23:05:20 Apr 11, 2007

R T

Mkr1 2.483 50 GHz  
56.27 dBμV

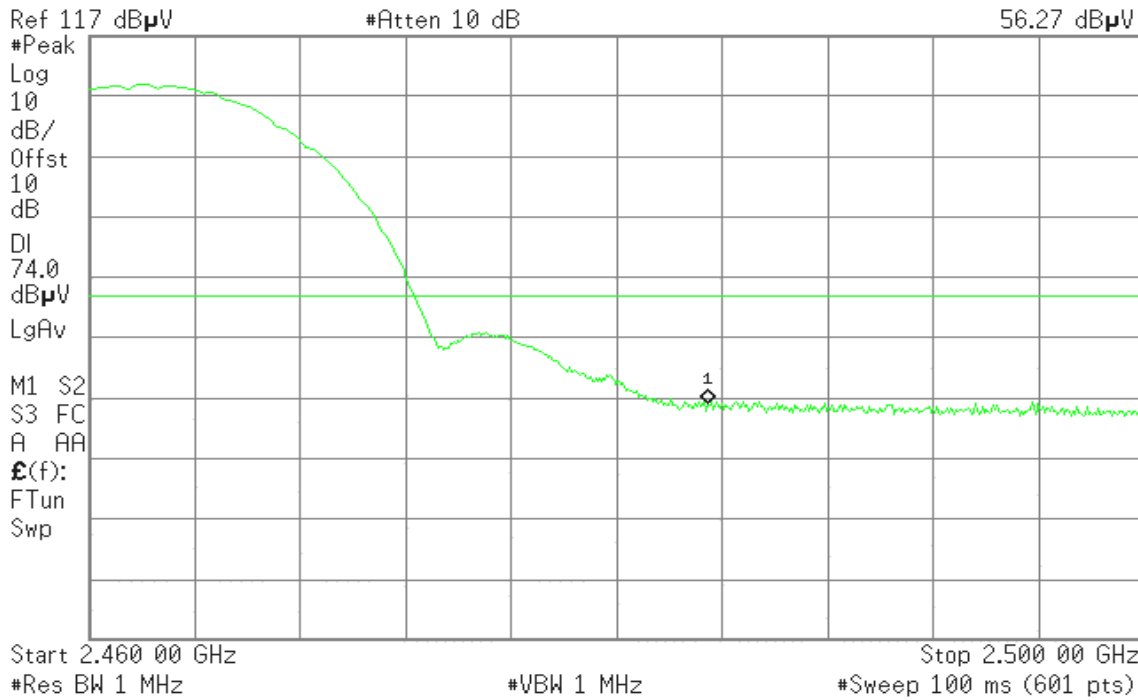


Detector mode: Average

Polarity: Horizontal

Agilent 23:05:42 Apr 11, 2007

R T

Mkr1 2.483 50 GHz  
43.42 dBμV

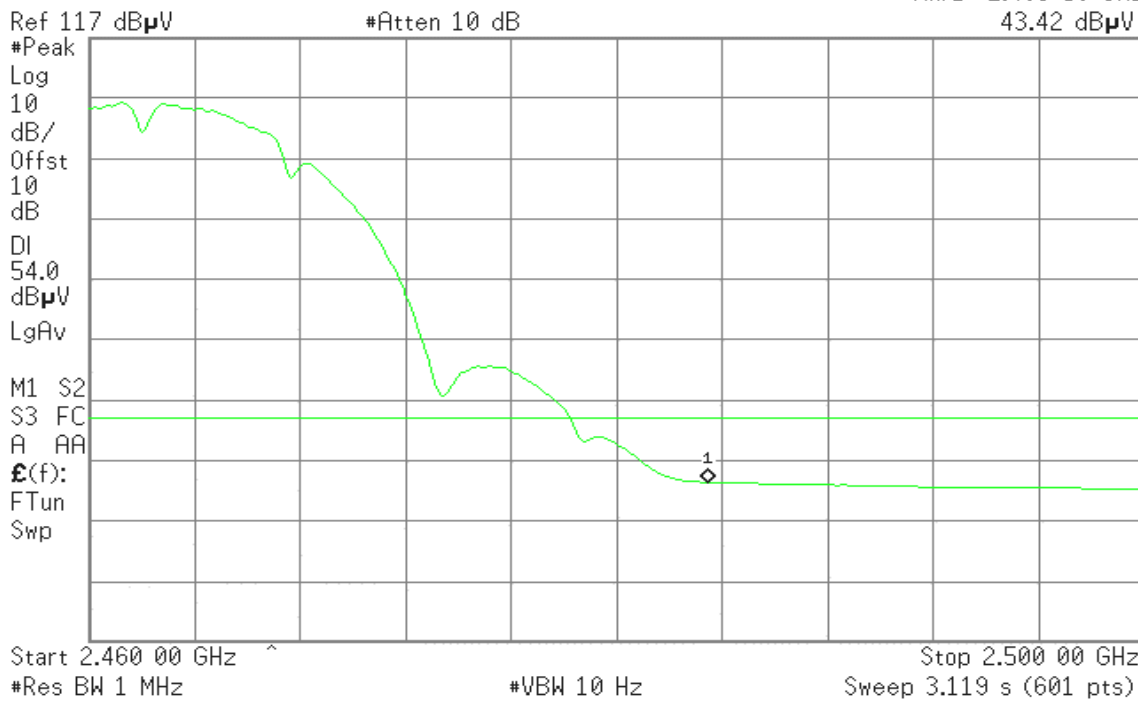



**IEEE 802.11g**

**Band Edges (CH Low)**


**Detector mode: Peak**

**Polarity: Vertical**

Agilent 23:15:05 Apr 11, 2007

R T

Mkr1 2.390 0 GHz  
54.64 dBµV

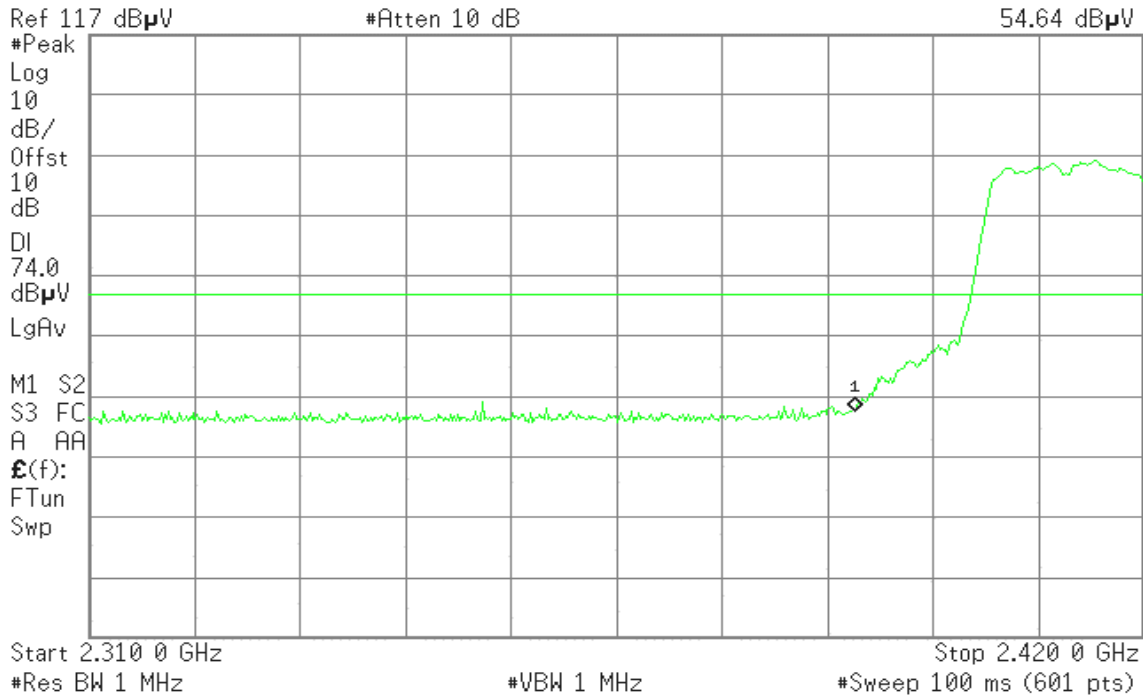

**Detector mode: Average**

**Polarity: Vertical**

Agilent 23:16:22 Apr 11, 2007

R T

Mkr1 2.390 0 GHz  
41.73 dBµV






Detector mode: Peak

Polarity: Horizontal

Agilent 23:19:06 Apr 11, 2007

R T

Mkr1 2.390 0 GHz  
61.96 dBμV

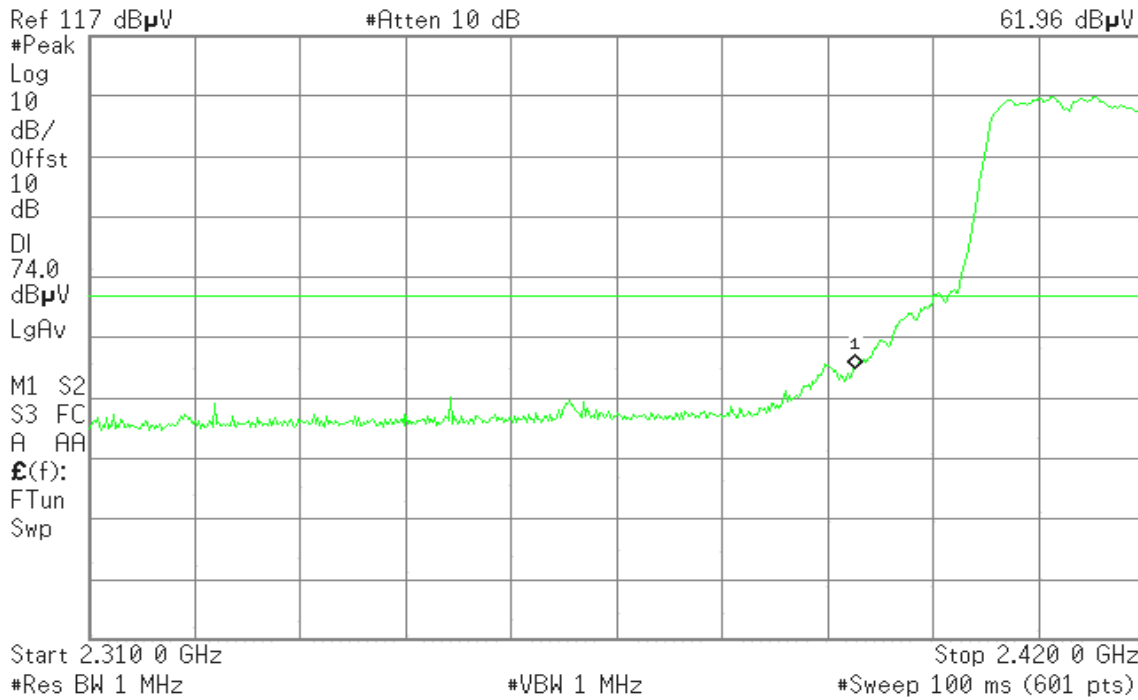


Detector mode: Average

Polarity: Horizontal

Agilent 23:19:31 Apr 11, 2007

R T

Mkr1 2.390 0 GHz  
46.37 dBμV

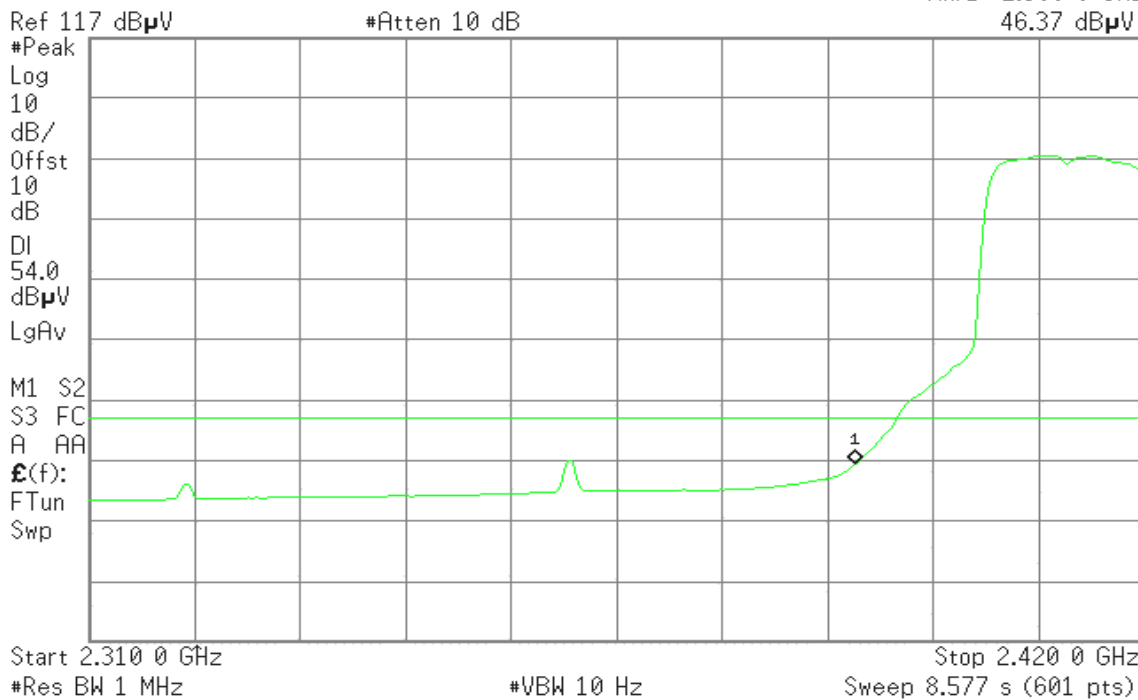



### Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 23:10:43 Apr 11, 2007

R T

Mkr1 2.483 50 GHz  
53.21 dB $\mu$ V

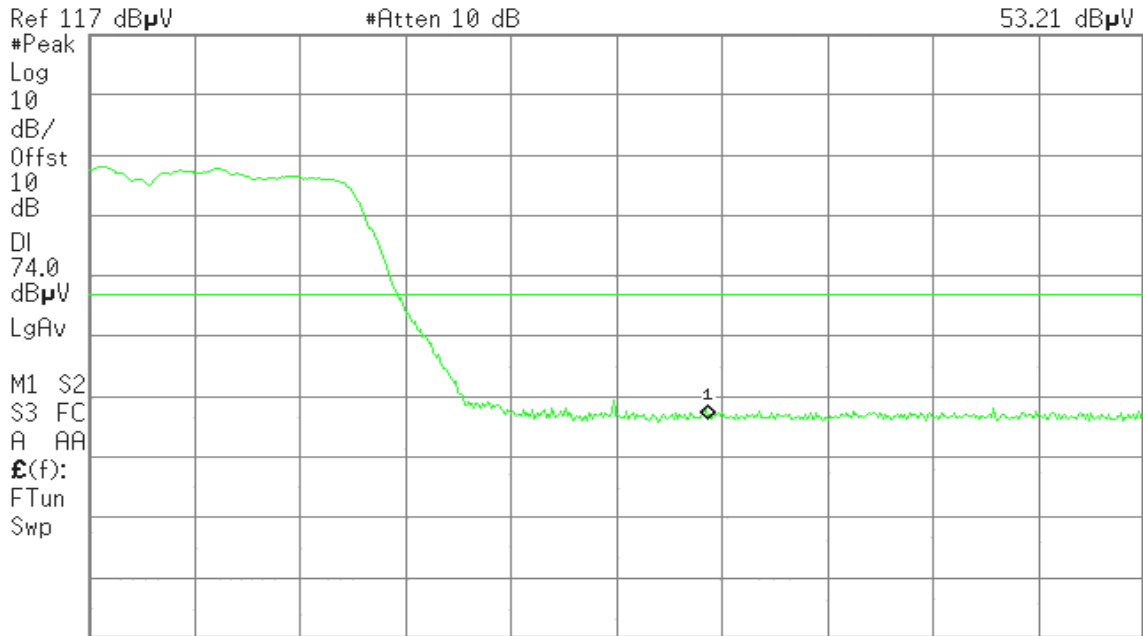

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 23:11:13 Apr 11, 2007

R T

Mkr1 2.483 50 GHz  
40.97 dB $\mu$ V

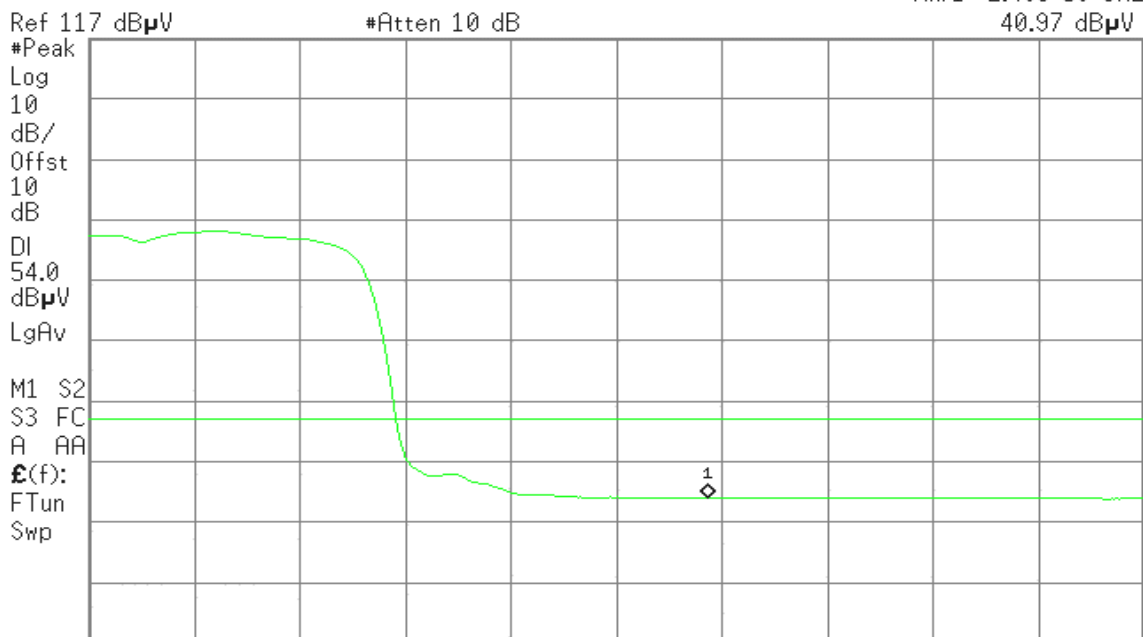

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 23:07:34 Apr 11, 2007

R T

Mkr1 2.483 50 GHz  
57.77 dBµV

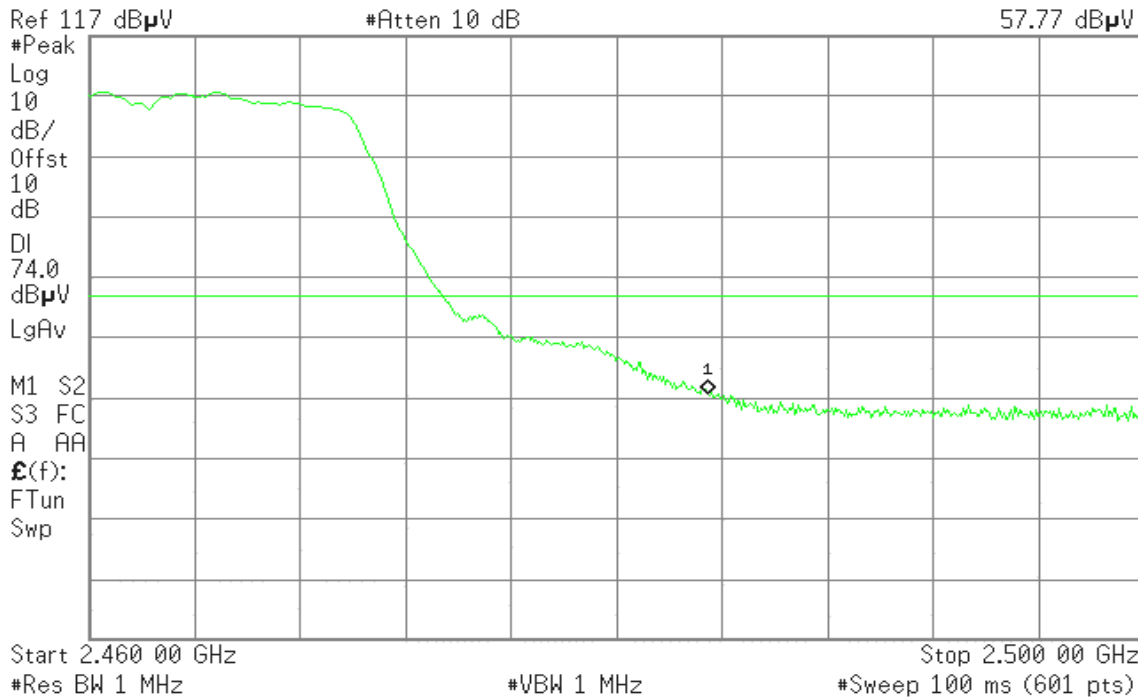


Detector mode: Average

Polarity: Horizontal

Agilent 23:07:13 Apr 11, 2007

R T

Mkr1 2.483 50 GHz  
44.64 dBµV

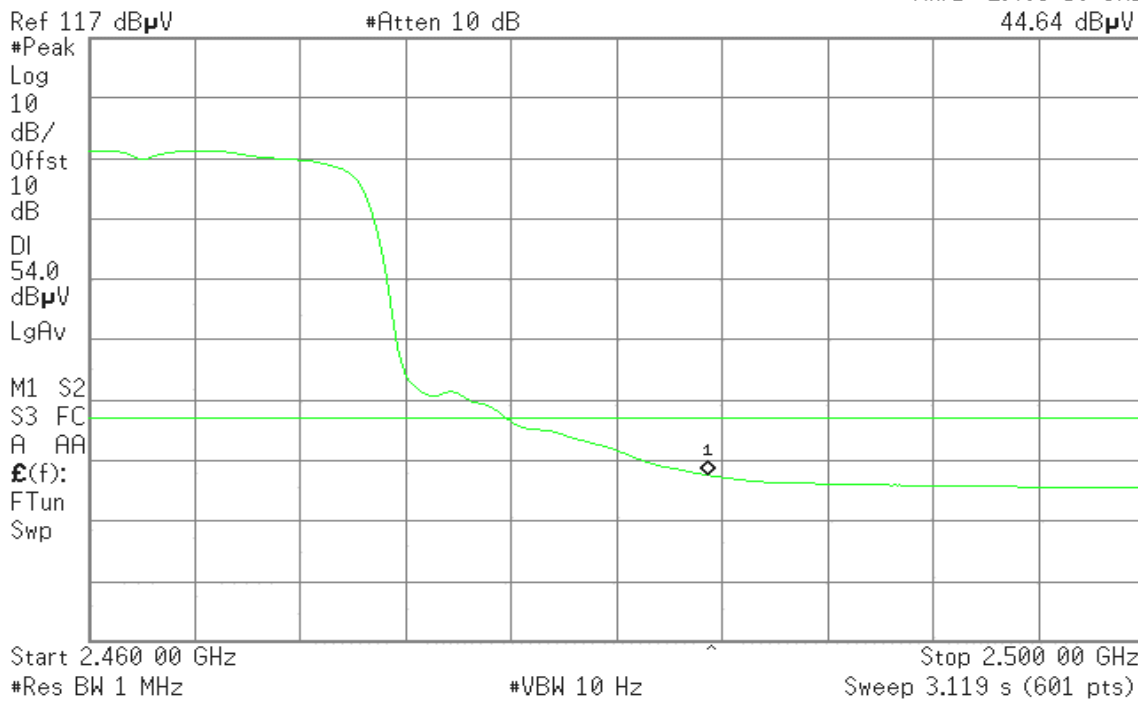




## 7.5 PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.



## TEST RESULTS

*No non-compliance noted*

### Test Data

**Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	PPSD (dBm)	LIMIT (DBM)	Result
Low	2412	-11.14	8.00	PASS
Mid	2437	-11.27		PASS
High	2462	-11.53		PASS

**Test mode: IEEE 802.11g**


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-9.90	8.00	PASS
Mid	2437	-9.94		PASS
High	2462	-10.24		PASS




### Test Plot

### IEEE 802.11b

### PPSD (CH Low)

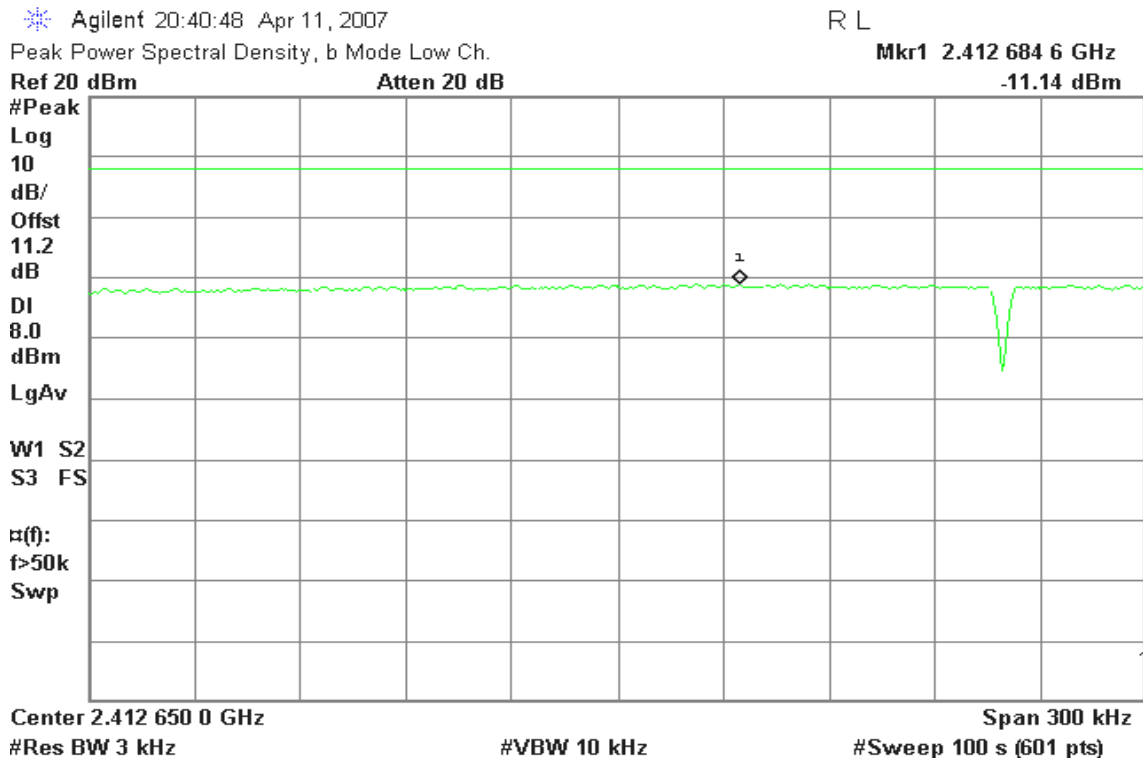

### PPSD (CH Mid)

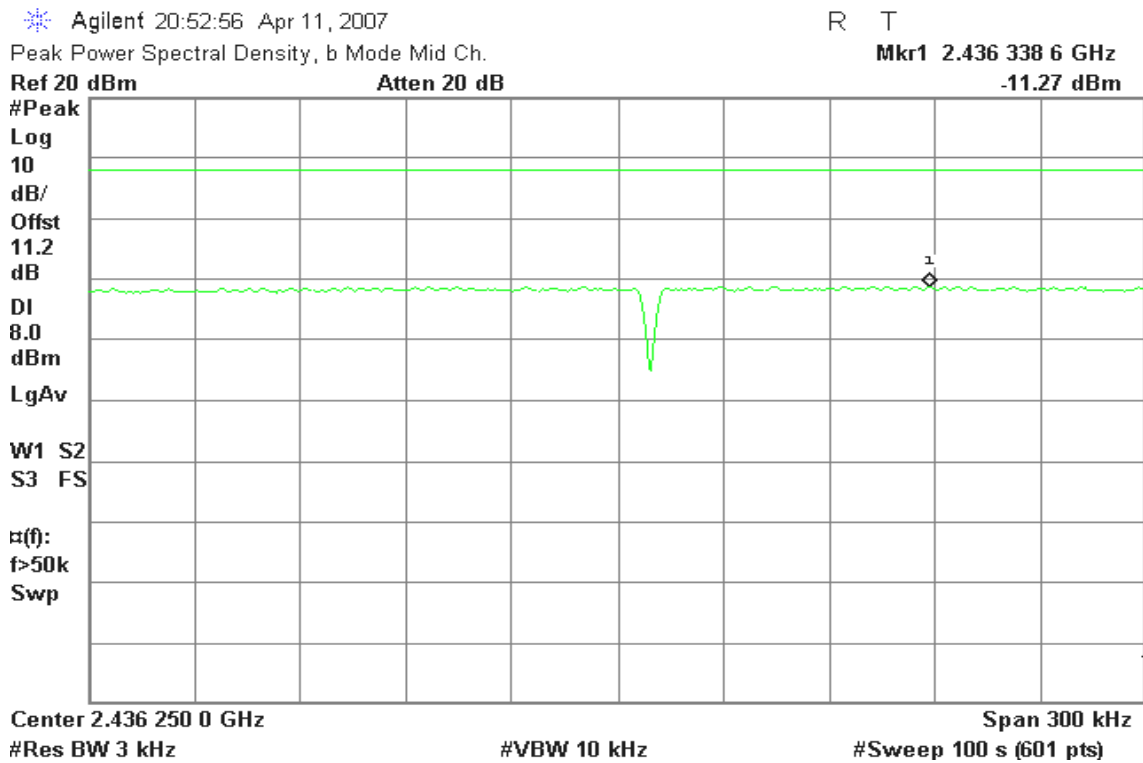



### PPSD (CH High)

Agilent 21:06:34 Apr 11, 2007

R T


Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.462 703 9 GHz

Ref 20 dBm

Atten 20 dB

-11.53 dBm

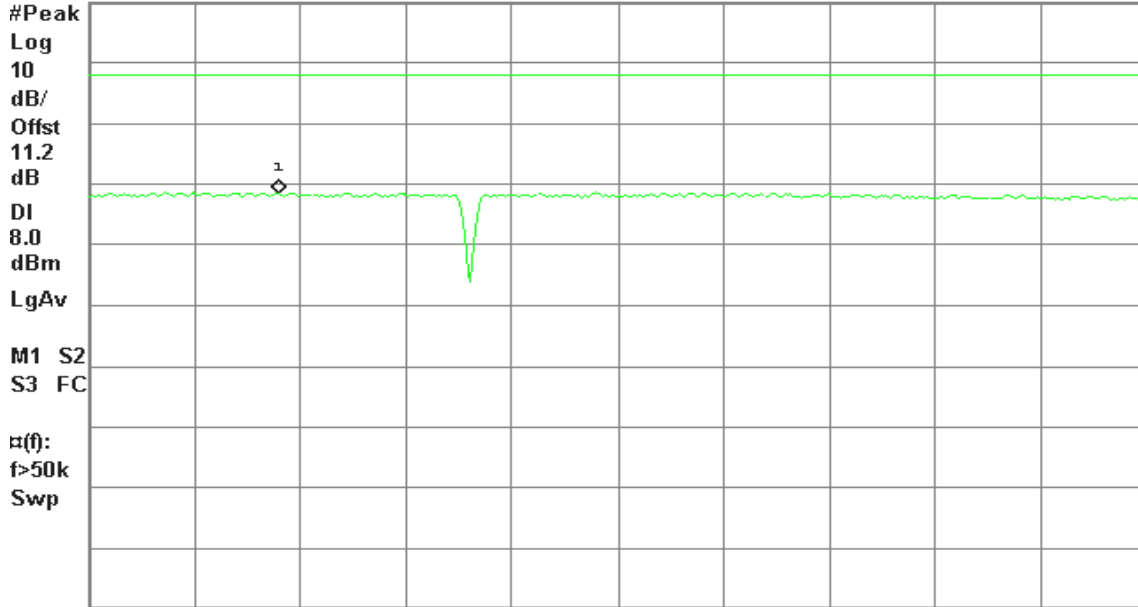

Center 2.462 800 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

### IEEE 802.11g

### PPSD (CH Low)

Agilent 21:25:12 Apr 11, 2007

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.410 714 0 GHz

Ref 20 dBm

Atten 20 dB

-9.90 dBm

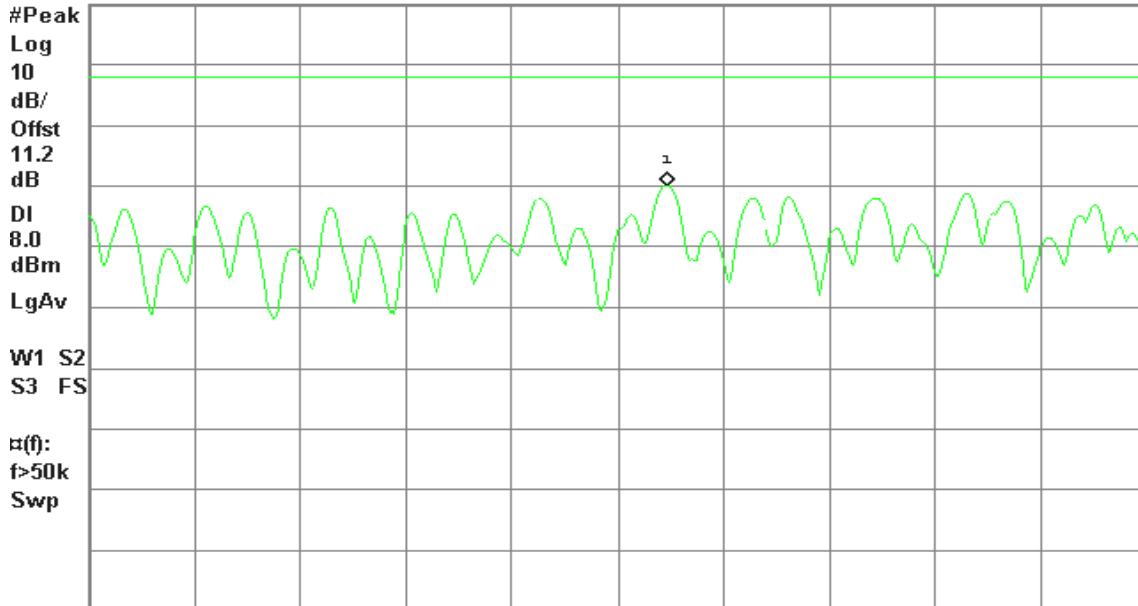

Center 2.410 700 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



### PPSD (CH Mid)

Agilent 21:33:28 Apr 11, 2007

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.435 714 1 GHz

Ref 20 dBm

Atten 20 dB

-9.94 dBm

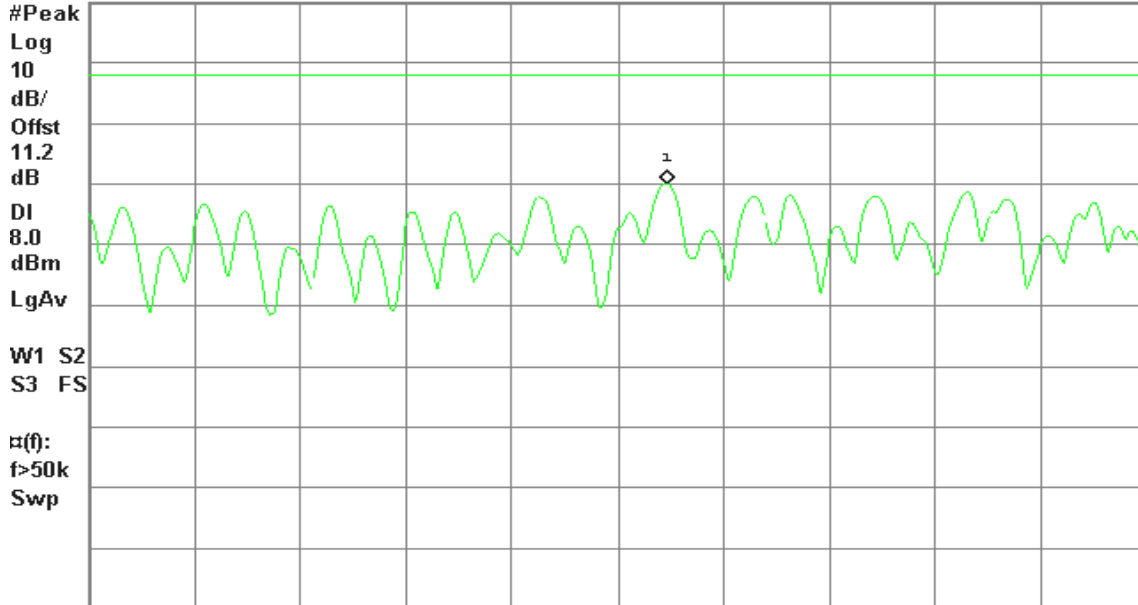

Center 2.435 700 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

### PPSD (CH High)

Agilent 21:40:20 Apr 11, 2007

R L


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.460 713 1 GHz

Ref 20 dBm

Atten 20 dB

-10.24 dBm

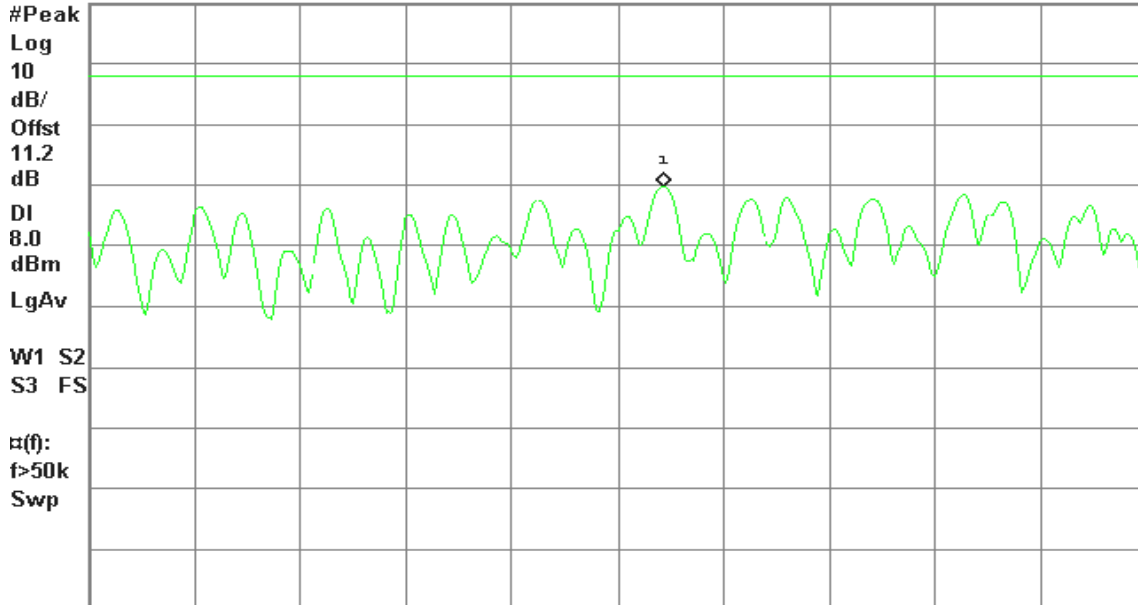

Center 2.460 700 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




## 7.6 SPURIOUS EMISSIONS

### 7.6.1 Conducted Measurement

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted*



### Test Plot

### IEEE 802.11b

### CH Low

Agilent 20:42:31 Apr 11, 2007

R T


Spurious, b Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

8.35 dBm

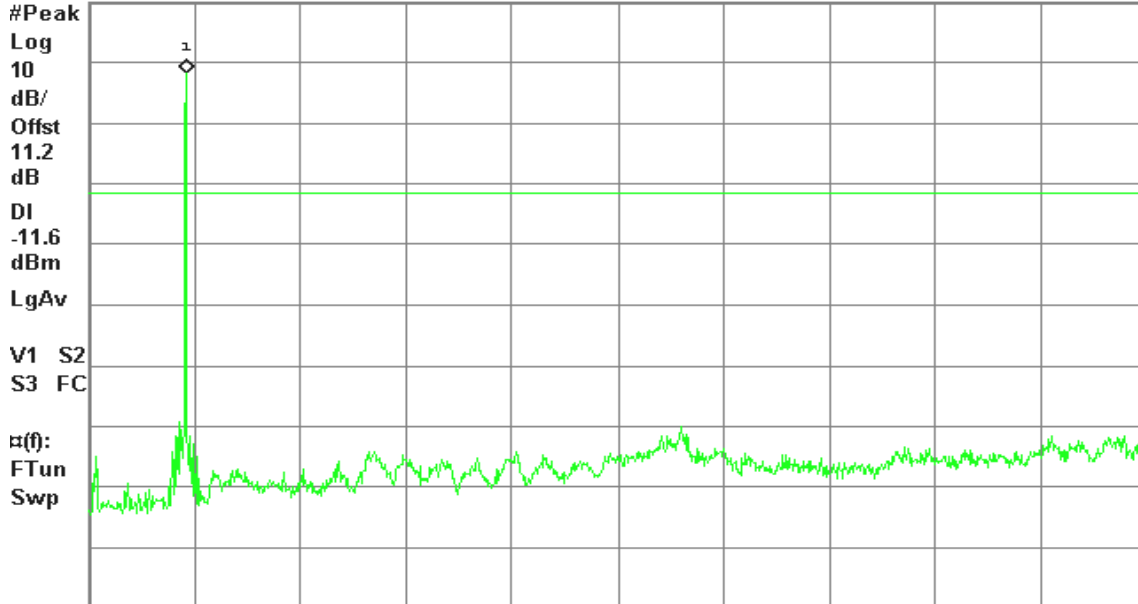

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

### CH Mid

Agilent 20:54:19 Apr 11, 2007

R T


Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

7.57 dBm

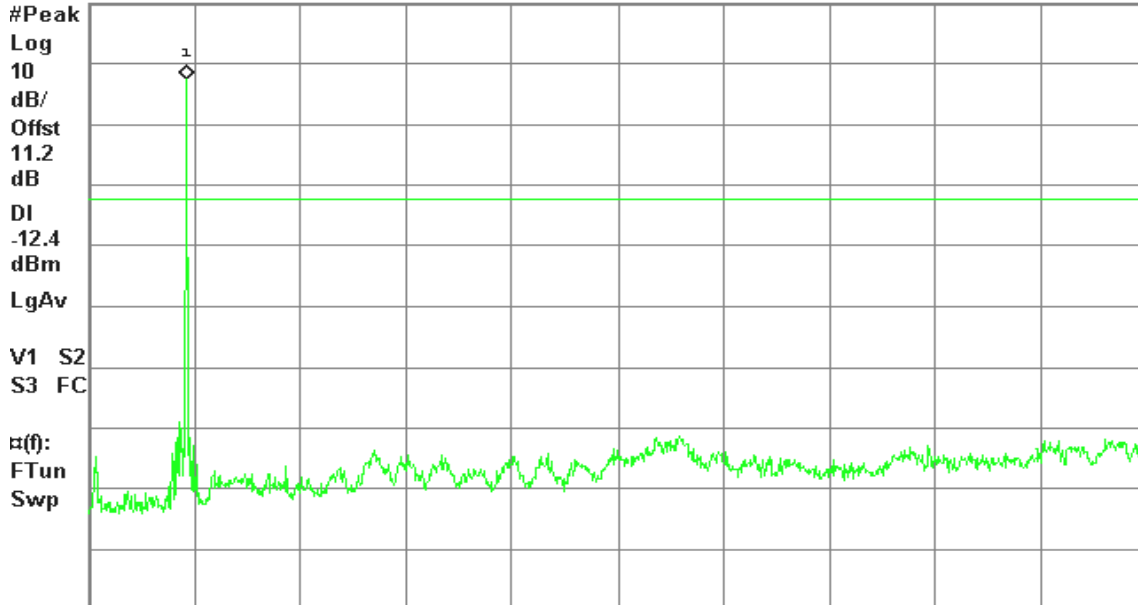

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



### CH High

Agilent 21:07:35 Apr 11, 2007

R L


Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

8.31 dBm

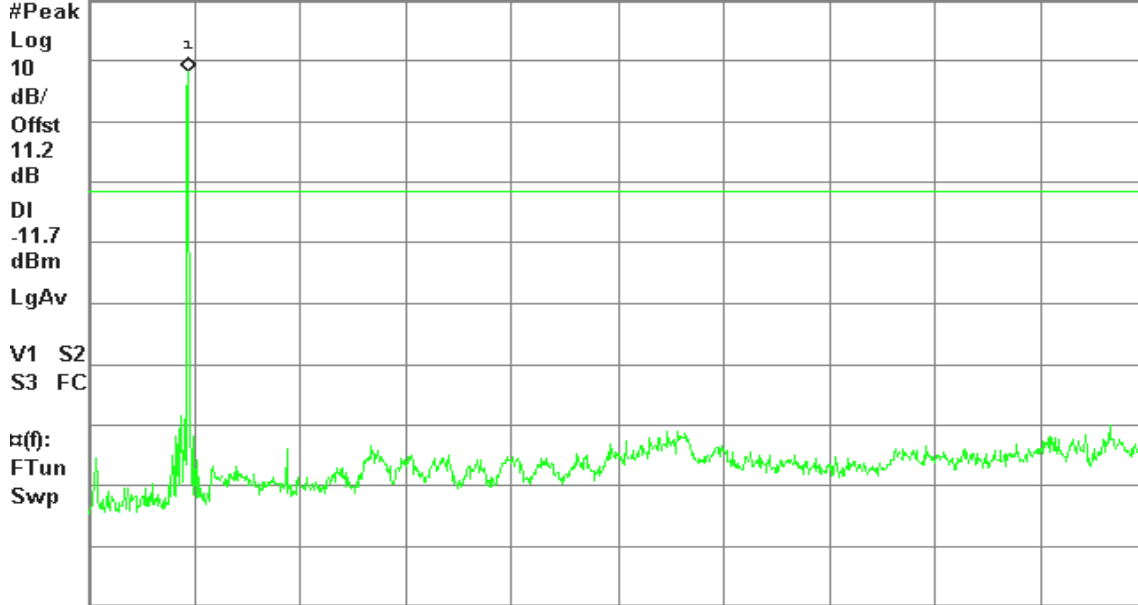

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

### IEEE 802.11g

#### CH Low

Agilent 21:26:05 Apr 11, 2007

R T


Spurious, g Mode Low Ch.

Mkr1 2.39 GHz

Ref 20 dBm

Atten 20 dB

0.98 dBm

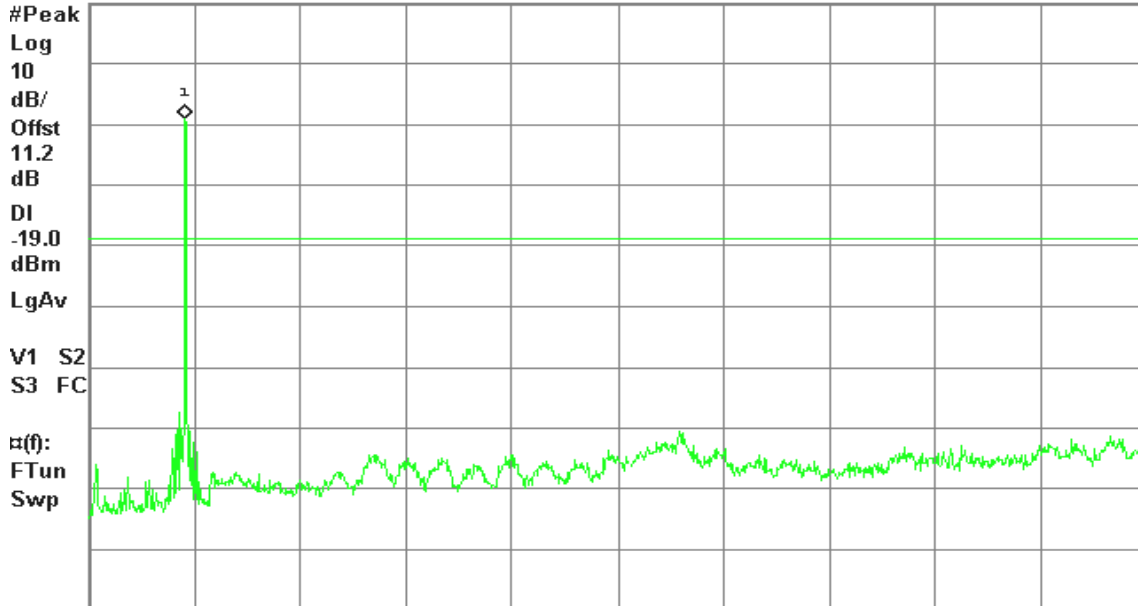

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)





### CH Mid

Agilent 21:34:25 Apr 11, 2007


R T

Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz  
2.64 dBm

Ref 20 dBm

Atten 20 dB

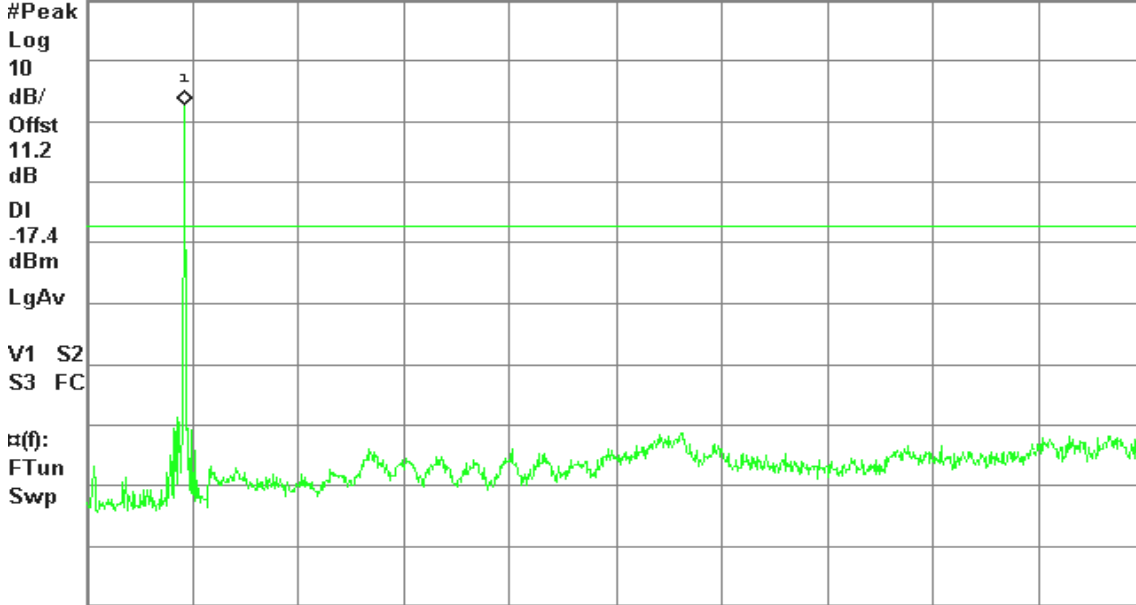

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

### CH High

Agilent 21:41:15 Apr 11, 2007


R T

Spurious, g Mode High Ch.

Mkr1 2.47 GHz  
2.32 dBm

Ref 20 dBm

Atten 20 dB

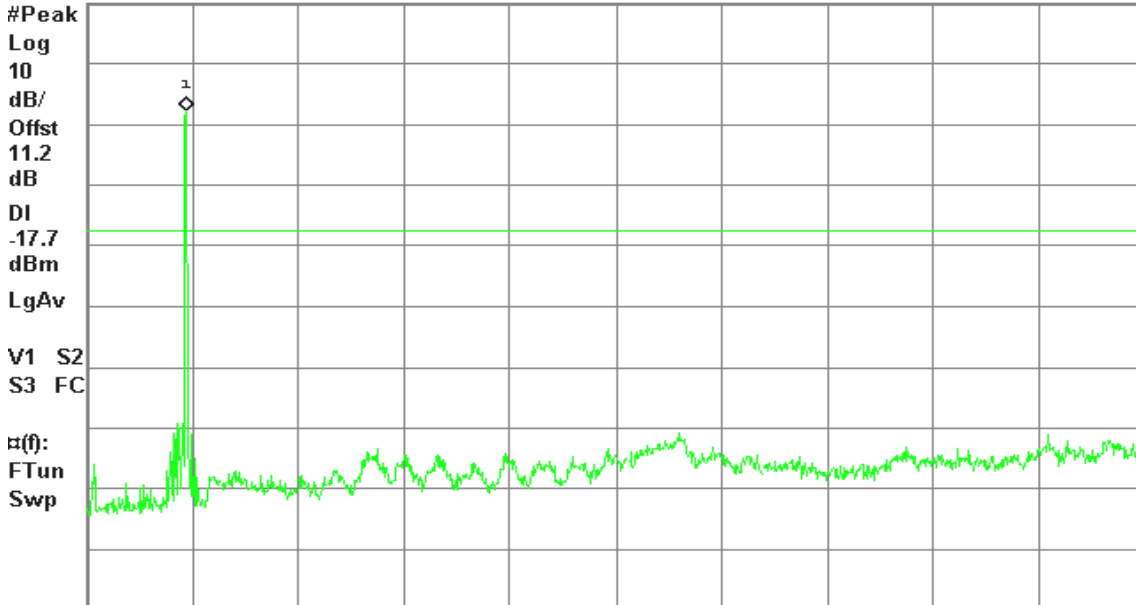

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



### 7.6.2 Radiated Measurement

#### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


*Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Test Configuration

#### Below 1 GHz

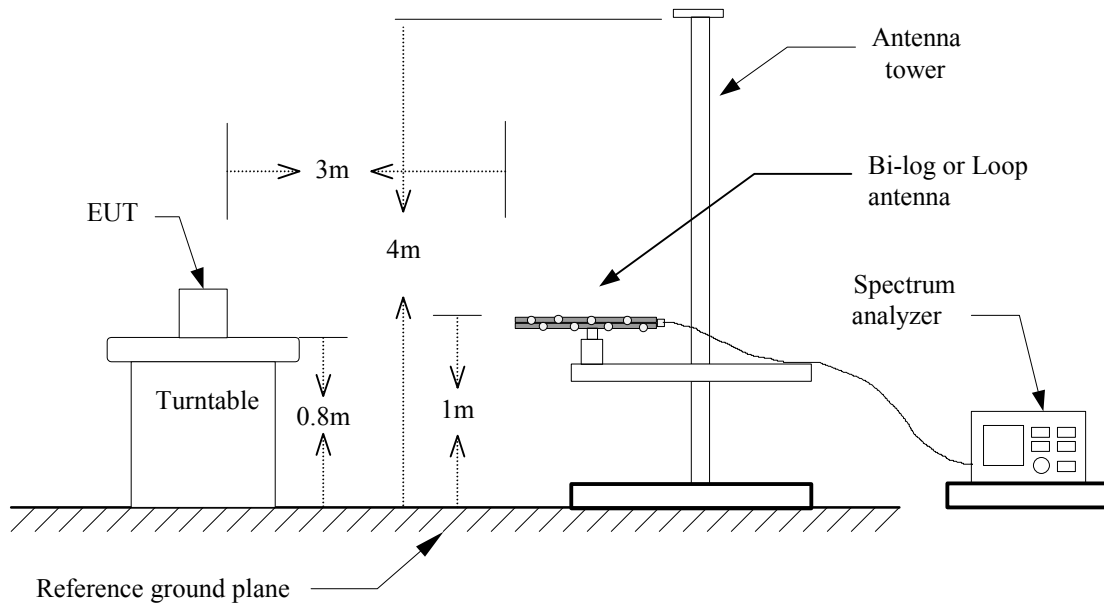

#### Above 1 GHz

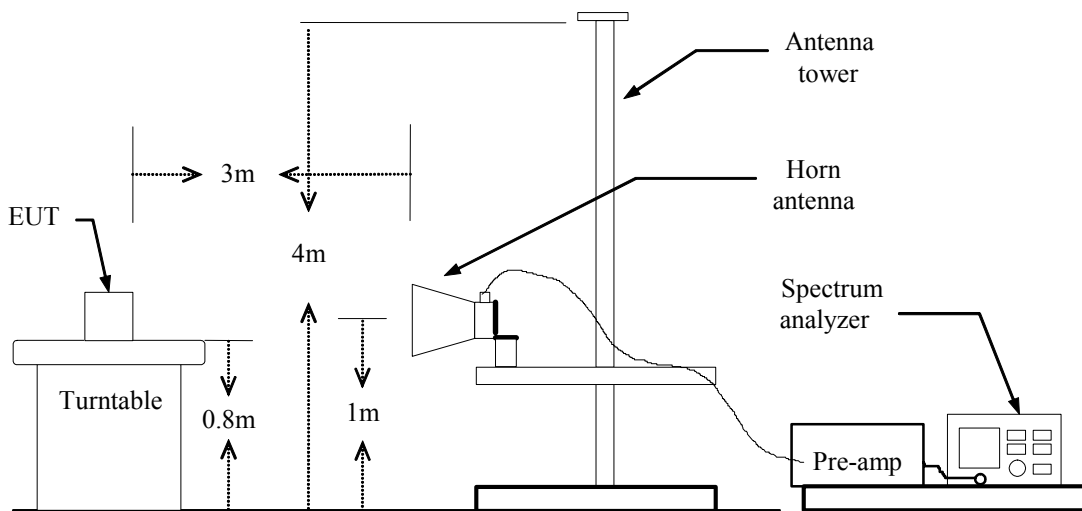



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:  
Below 1GHz:  
RBW=100kHz / VBW=300kHz / Sweep=AUTO  
Above 1GHz:  
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO  
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal Link**Test Date:** April 12, 2007**Temperature:** 20°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Mode
41.32	V	43.65	-13.72	29.93	40.00	-10.07	Peak
165.80	V	40.62	-14.55	26.07	43.50	-17.43	Peak
285.43	V	41.03	-12.68	28.35	46.00	-17.65	Peak
500.45	V	36.49	-7.86	28.64	46.00	-17.36	Peak
584.52	V	36.62	-6.20	30.42	46.00	-15.58	Peak
856.12	V	31.29	-2.62	28.66	46.00	-17.34	Peak
30.00	H	26.10	-4.65	21.45	40.00	-18.55	QP
165.80	H	42.32	-14.55	27.77	43.50	-15.73	Peak
285.43	H	40.98	-12.68	28.30	46.00	-17.70	Peak
584.52	H	35.44	-6.20	29.24	46.00	-16.76	Peak
799.53	H	39.36	-3.16	36.20	46.00	-9.80	Peak
915.93	H	34.17	-1.71	32.46	46.00	-13.54	Peak

**Remark:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
5.  $Margin (dB) = Result (Remark) (dBuV/m) - Quasi-peak limit (dBuV/m).$

**Above 1 GHz****Operation Mode:** IEEE 802.11b / TX / CH Low **Test Date:** April 12, 2007**Temperature:** 20°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1163.33	V	51.36	---	-10.52	40.83	---	74.00	54.00	-13.17	Peak
1338.33	V	49.92	---	-10.24	39.68	---	74.00	54.00	-14.32	Peak
1735.00	V	46.03	---	-7.64	38.39	---	74.00	54.00	-15.61	Peak
4826.67	V	51.88	---	0.56	52.44	---	74.00	54.00	-1.56	Peak
7230.00	V	46.12	---	3.56	49.68	---	74.00	54.00	-4.32	Peak
N/A										
1070.00	H	48.81	---	-10.68	38.13	---	74.00	54.00	-15.87	Peak
1163.33	H	48.66	---	-10.52	38.13	---	74.00	54.00	-15.87	Peak
1420.00	H	48.58	---	-10.10	38.47	---	74.00	54.00	-15.53	Peak
4826.67	H	48.08	---	0.56	48.64	---	74.00	54.00	-5.36	Peak
5620.00	H	44.03	---	1.57	45.60	---	74.00	54.00	-8.40	Peak
N/A										

**Remark:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*



Operation Mode: IEEE 802.11b / TX / CH Mid Test Date: April 12, 2007

Temperature: 20°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1000.00	V	51.24	---	-10.79	40.44	---	74.00	54.00	-13.56	Peak
1163.33	V	52.16	---	-10.52	41.63	---	74.00	54.00	-12.37	Peak
1338.33	V	48.29	---	-10.24	38.05	---	74.00	54.00	-15.95	Peak
1408.33	V	48.35	---	-10.12	38.23	---	74.00	54.00	-15.77	Peak
1746.67	V	45.42	---	-7.52	37.90	---	74.00	54.00	-16.10	Peak
4873.33	V	50.24	---	0.60	50.84	---	74.00	54.00	-3.16	Peak
1081.67	H	48.46	---	-10.66	37.80	---	74.00	54.00	-16.20	Peak
1163.33	H	49.05	---	-10.52	38.53	---	74.00	54.00	-15.47	Peak
4873.33	H	48.85	---	0.60	49.46	---	74.00	54.00	-4.54	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** IEEE 802.11b / TX / CH High **Test Date:** April 12, 2007**Temperature:** 20°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1000.00	V	51.53	---	-10.79	40.74	---	74.00	54.00	-13.26	Peak
1081.67	V	50.77	---	-10.66	40.12	---	74.00	54.00	-13.88	Peak
1163.33	V	50.71	---	-10.52	40.18	---	74.00	54.00	-13.82	Peak
1338.33	V	49.35	---	-10.24	39.11	---	74.00	54.00	-14.89	Peak
1746.67	V	46.45	---	-7.52	38.93	---	74.00	54.00	-15.07	Peak
4920.00	V	47.91	---	0.65	48.56	---	74.00	54.00	-5.44	Peak
1000.00	H	51.31	---	-10.79	40.52	---	74.00	54.00	-13.48	Peak
1081.67	H	49.89	---	-10.66	39.23	---	74.00	54.00	-14.77	Peak
1163.33	H	48.40	---	-10.52	37.88	---	74.00	54.00	-16.12	Peak
3718.33	H	43.02	---	-1.29	41.73	---	74.00	54.00	-12.27	Peak
4920.00	H	45.70	---	0.65	46.34	---	74.00	54.00	-7.66	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: IEEE 802.11g / TX / CH Low Test Date: April 12, 2007

Temperature: 20°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1163.33	V	51.28	---	-10.52	40.75	---	74.00	54.00	-13.25	Peak
1338.33	V	48.20	---	-10.24	37.96	---	74.00	54.00	-16.04	Peak
1735.00	V	44.71	---	-7.64	37.07	---	74.00	54.00	-16.93	Peak
6681.67	V	44.42	---	3.35	47.77	---	74.00	54.00	-6.23	Peak
N/A										
1163.33	H	46.90	---	-10.52	36.38	---	74.00	54.00	-17.62	Peak
1338.33	H	48.60	---	-10.24	38.36	---	74.00	54.00	-15.64	Peak
7766.67	H	42.91	---	4.46	47.37	---	74.00	54.00	-6.63	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11g / TX / CH Mid Test Date: April 12, 2007

Temperature: 20°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1163.33	V	51.58	---	-10.52	41.05	---	74.00	54.00	-12.95	Peak
1338.33	V	49.77	---	-10.24	39.54	---	74.00	54.00	-14.46	Peak
4780.00	V	43.24	---	0.51	43.75	---	74.00	54.00	-10.25	Peak
6728.33	V	43.79	---	3.45	47.24	---	74.00	54.00	-6.76	Peak
N/A										
1151.67	H	47.42	---	-10.54	36.88	---	74.00	54.00	-17.12	Peak
1338.33	H	47.80	---	-10.24	37.56	---	74.00	54.00	-16.44	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11g / TX / CH High Test Date: April 12, 2007

Temperature: 20°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1163.33	V	51.15	---	-10.52	40.62	---	74.00	54.00	-13.38	Peak
1746.67	V	46.55	---	-7.52	39.03	---	74.00	54.00	-14.97	Peak
3310.00	V	42.91	---	-2.06	40.85	---	74.00	54.00	-13.15	Peak
N/A										
1326.67	H	46.94	---	-10.26	36.68	---	74.00	54.00	-17.32	Peak
2038.33	H	43.51	---	-4.91	38.60	---	74.00	54.00	-15.40	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.7 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

#### Test Data

**Operation Mode:** Normail Link                      **Test Date:** March 13, 2007  
**Temperature:** 25°C                                      **Tested by:** Ivan Tsai  
**Humidity:** 55% RH

Frequency (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.200	43.690	41.070	0.100	43.790	41.170	63.611	53.611	-19.821	-12.441	L1
0.271	39.020	36.280	0.100	39.120	36.380	61.087	51.087	-21.967	-14.707	L1
0.333	36.980	36.570	0.100	37.080	36.670	59.376	49.376	-22.296	-12.706	L1
0.469	36.630	36.220	0.100	36.730	36.320	56.532	46.532	-19.802	-10.212	L1
16.122	31.090	29.070	0.890	31.980	29.960	60.000	50.000	-28.020	-20.040	L1
18.908	30.040	27.060	1.113	31.153	28.173	60.000	50.000	-28.847	-21.827	L1
0.203	42.620	40.900	0.100	42.720	41.000	63.487	53.487	-20.767	-12.487	L2
0.271	38.860	35.110	0.100	38.960	35.210	61.087	51.087	-22.127	-15.877	L2
0.335	36.480	35.200	0.100	36.580	35.300	59.326	49.326	-22.746	-14.026	L2
15.867	32.400	30.350	0.869	33.269	31.219	60.000	50.000	-26.731	-18.781	L2
18.025	32.130	30.020	1.042	33.172	31.062	60.000	50.000	-26.828	-18.938	L2
18.908	32.030	29.760	1.113	33.143	30.873	60.000	50.000	-26.857	-19.127	L2


#### Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




### Test Plots

#### Conducted emissions (Line 1)

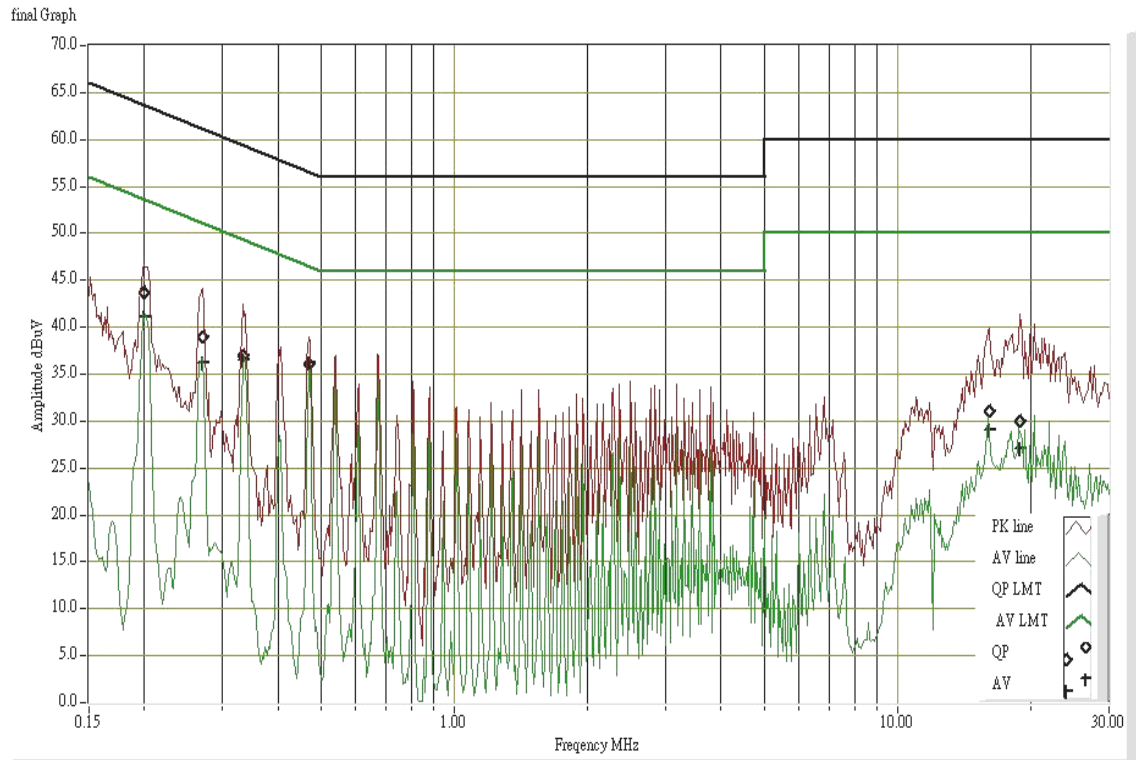

#### Conducted emissions (Line 2)

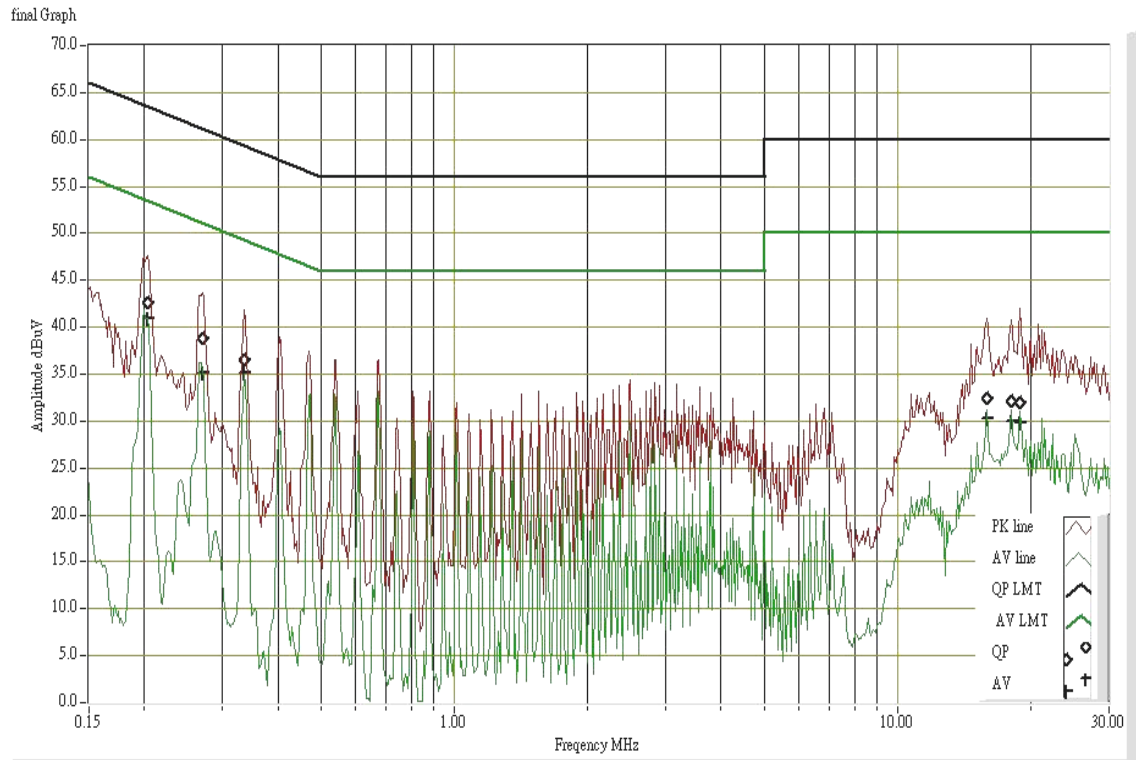



## APPENDIX I RADIO FREQUENCY EXPOSURE

### LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

### EUT Specification

<b>EUT</b>	NETGEAR WG111v3 54Mbps Wireless USB 2.0 Adapter
<b>Frequency band (Operating)</b>	<input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input type="checkbox"/> Others _____
<b>Device category</b>	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others _____
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure ( $S = 5\text{mW}/\text{cm}^2$ ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ( $S=1\text{mW}/\text{cm}^2$ )
<b>Antenna diversity</b>	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> TX diversity <input type="checkbox"/> RX diversity <input type="checkbox"/> TX/RX diversity
<b>Max. output power</b>	IEEE 802.11b: 21.72 dBm (148.59mW) IEEE 802.11g: 19.73 dBm (93.97mW)
<b>Antenna gain (Max)</b>	2.09 dBi (Numeric gain: 1.62)
<b>Evaluation applied</b>	<input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation* <input type="checkbox"/> N/A

#### **Remark:**

1. The maximum output power is 21.72dBm (148.59mW) at 2412MHz (with 1.62 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation, MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The minimum separation generally be used is at least 20 cm, even if the calculations indicate that the MPE distance would be lesser.

### TEST RESULTS

No non-compliance noted.

**Remark:** Please refer to the separated SAR report.