


Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 4	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 11 Mbps

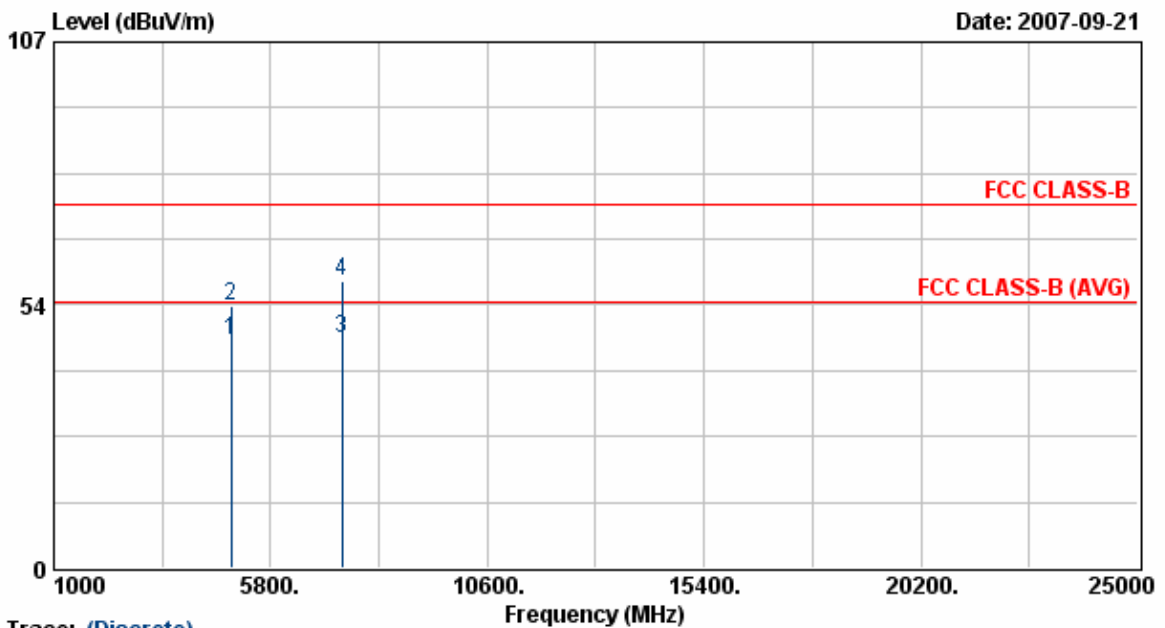


Trace: (Discrete)

Item	Freq MHz	Read Value dBuV/m	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Ant Pos cm	Tab Pos Deg
1	4923.88	37.34	8.92	46.26	54.00	-7.74	Average	128	204
2	4923.88	44.51	8.92	53.43	74.00	-20.57	Peak	128	204
3	7386.50	31.99	14.84	46.83	54.00	-7.17	Average	128	204
4	7386.50	43.47	14.84	58.31	74.00	-15.69	Peak	128	204

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 4	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 11 Mbps

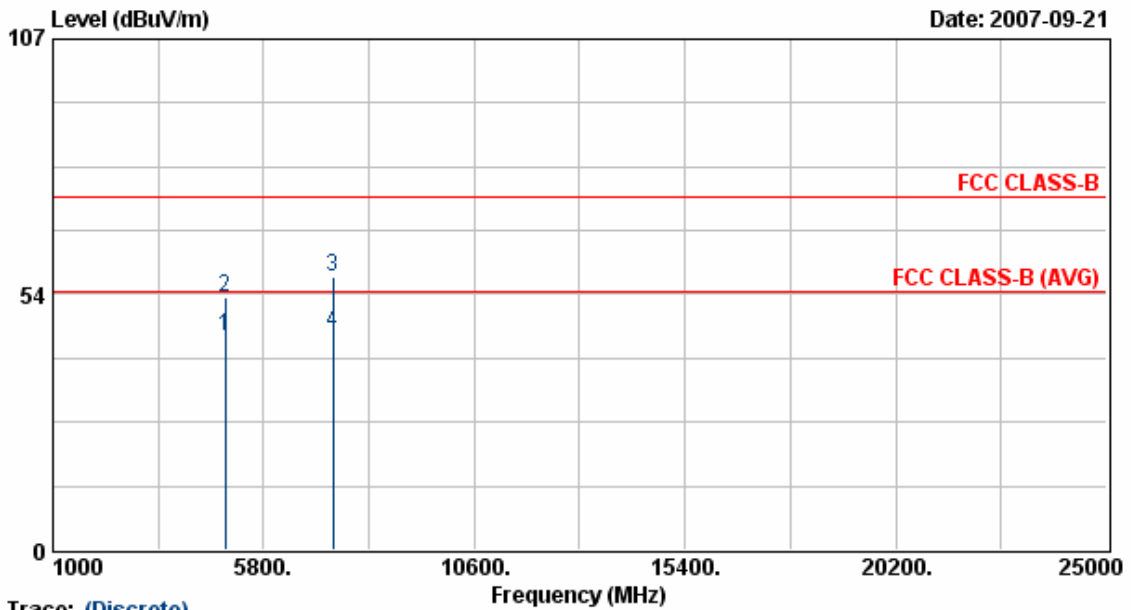


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.00	35.99	8.92	44.91	54.00	-9.09	Average	124	218
2	4924.00	43.98	8.92	52.90	74.00	-21.10	Peak	124	218
3	7386.50	42.38	14.84	57.22	74.00	-16.78	Peak	124	218
4	7386.50	30.67	14.84	45.51	54.00	-8.49	Average	124	218

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 4	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 54 Mbps

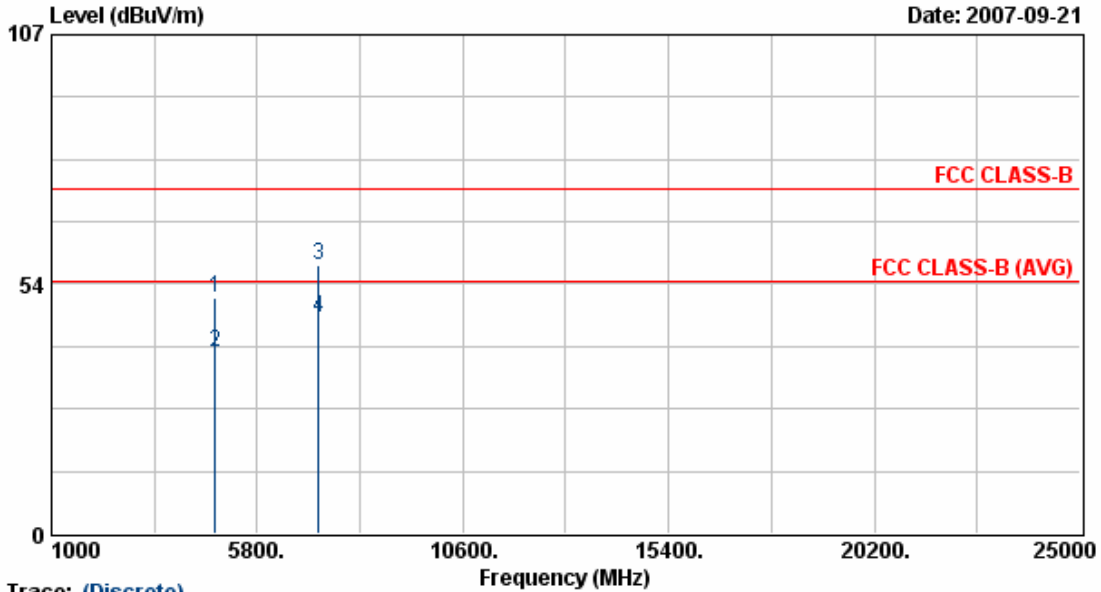


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.63	41.96	8.64	50.60	74.00	-23.40	Peak	128	204
2	4823.63	30.37	8.64	39.01	54.00	-14.99	Average	128	204
3	7235.88	43.17	14.35	57.52	74.00	-16.48	Peak	128	204
4	7235.88	32.09	14.35	46.45	54.00	-7.55	Average	128	204

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 4	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 54 Mbps

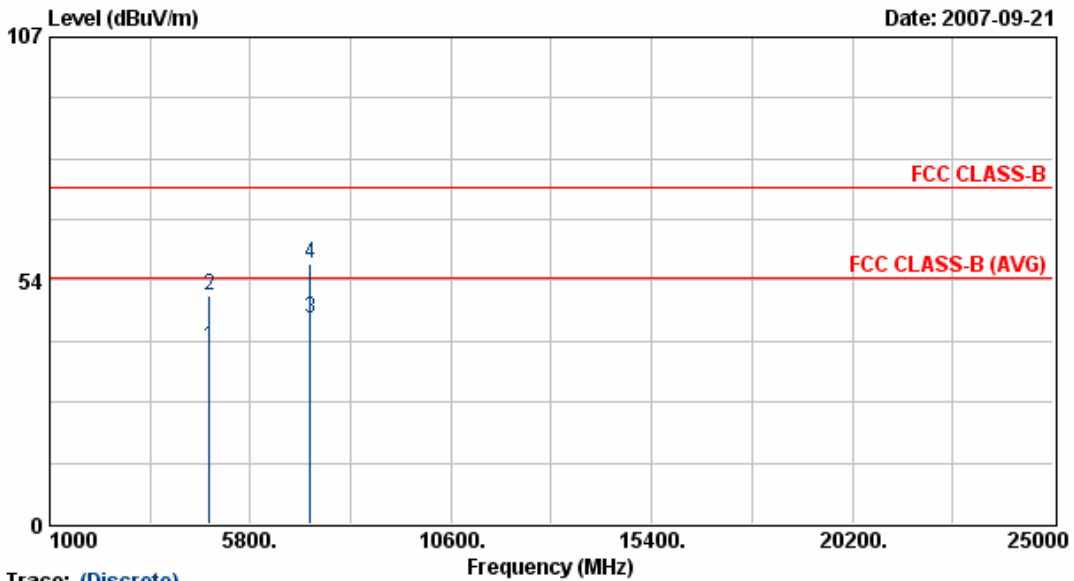


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.13	30.37	8.64	39.01	54.00	-14.99	Average	124	218
2	4823.13	41.72	8.64	50.36	74.00	-23.64	Peak	124	218
3	7235.75	30.80	14.35	45.15	54.00	-8.85	Average	124	218
4	7235.75	42.85	14.35	57.20	74.00	-16.80	Peak	124	218

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 4	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 54 Mbps

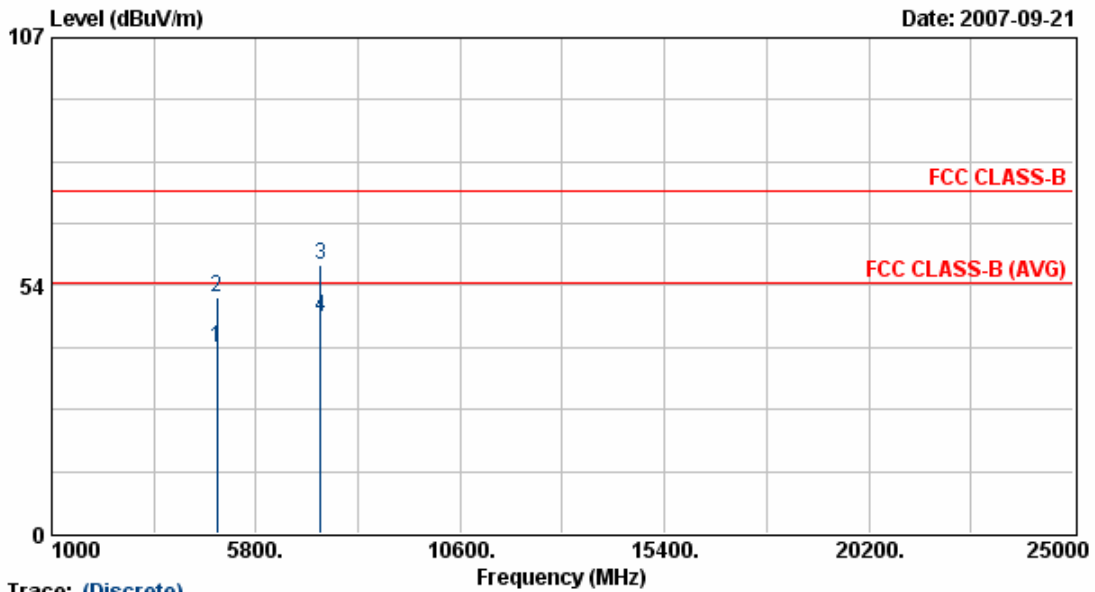


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.63	31.18	8.78	39.96	54.00	-14.04	Average	128	204
2	4873.63	42.38	8.78	51.16	74.00	-22.84	Peak	128	204
3	7311.38	43.30	14.60	57.90	74.00	-16.10	Peak	128	204
4	7311.38	32.07	14.60	46.67	54.00	-7.33	Average	128	204

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 4	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 54 Mbps

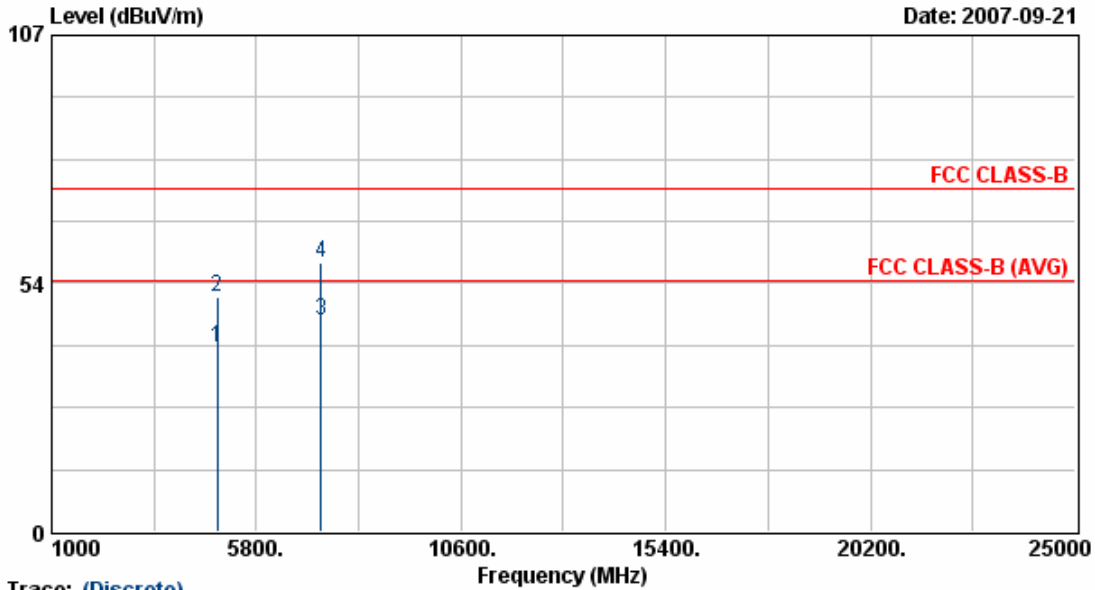


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.13	30.75	8.78	39.53	54.00	-14.47	Average	124	218
2	4874.13	41.62	8.78	50.40	74.00	-23.60	Peak	124	218
3	7311.00	30.99	14.60	45.59	54.00	-8.41	Average	124	218
4	7311.00	43.32	14.60	57.91	74.00	-16.09	Peak	124	218

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 4	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 54 Mbps

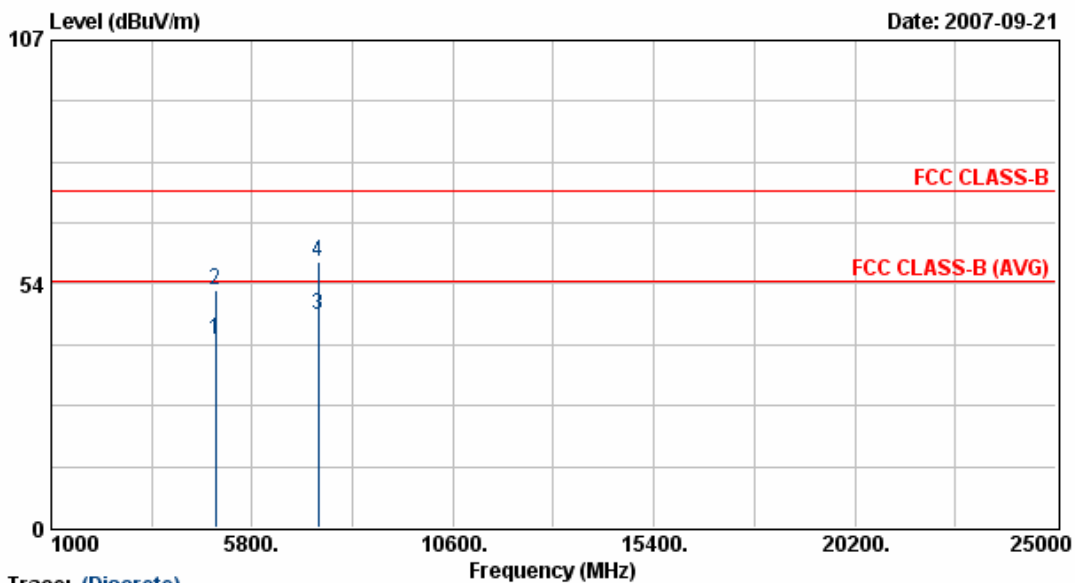


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.38	32.13	8.93	41.05	54.00	-12.95	Average	128	204
2	4924.38	43.34	8.93	52.27	74.00	-21.73	Peak	128	204
3	7385.75	31.86	14.84	46.70	54.00	-7.30	Average	128	204
4	7385.75	43.69	14.84	58.53	74.00	-15.47	Peak	128	204

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 4	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 54 Mbps

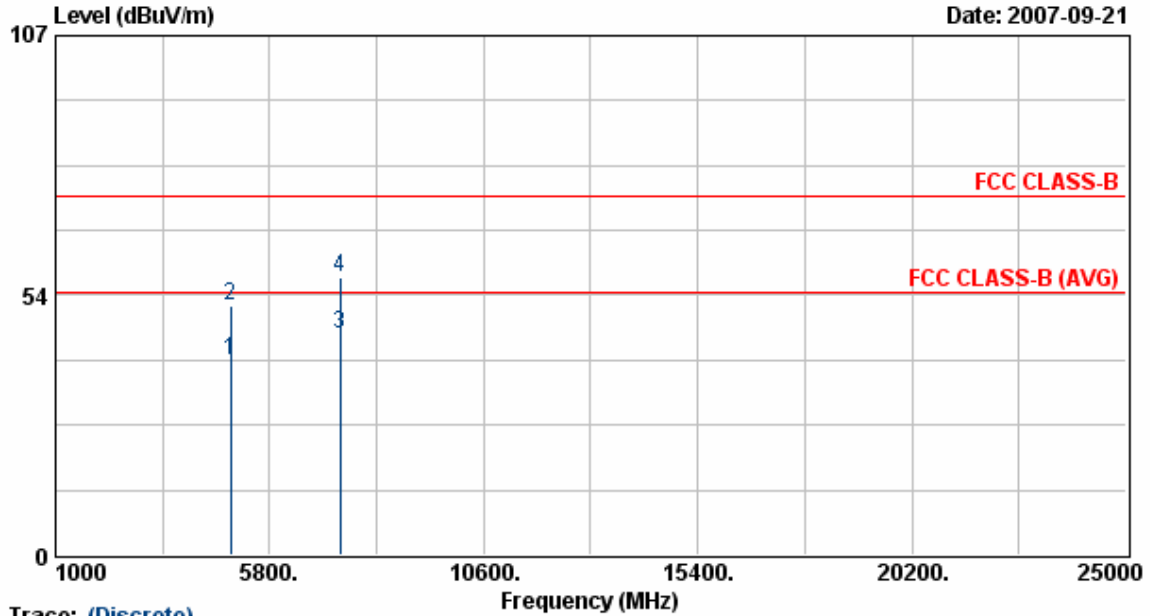


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.88	31.26	8.92	40.19	54.00	-13.81	Average	124	218
2	4923.88	42.42	8.92	51.34	74.00	-22.66	Peak	124	218
3	7386.13	30.85	14.84	45.69	54.00	-8.31	Average	124	218
4	7386.13	42.36	14.84	57.20	74.00	-16.80	Peak	124	218

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 4	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1antenna 2+4	Rate	: 108 Mbps

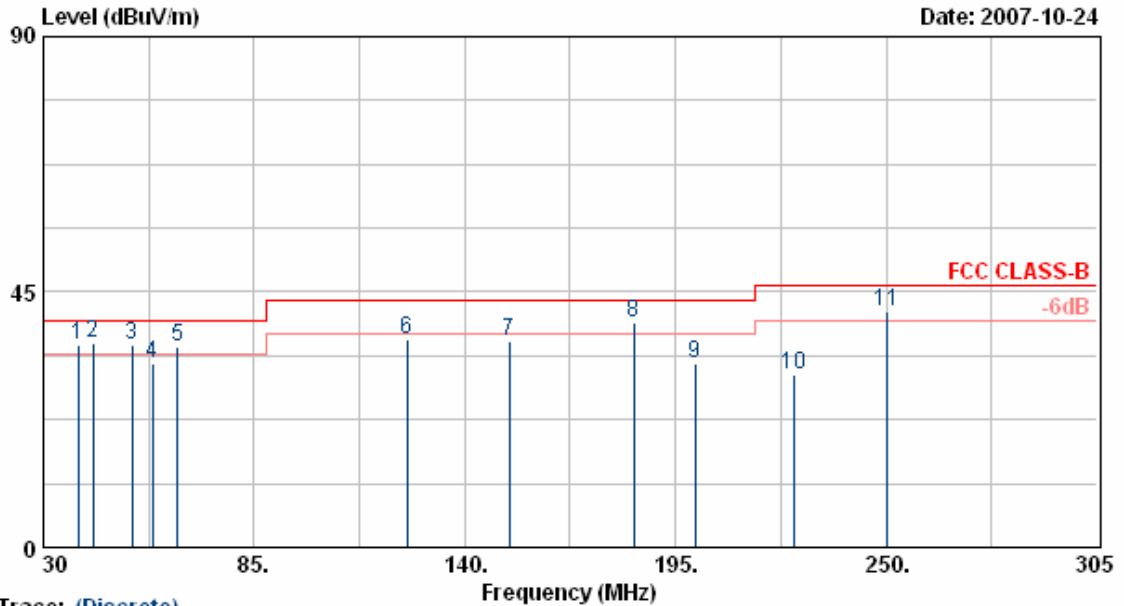


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	39.08	50.13	-14.58	35.55	40.00	-4.45	QP	300	81
2	42.95	51.86	-15.94	35.92	40.00	-4.08	QP	100	79
3	53.10	55.03	-19.52	35.51	40.00	-4.49	QP	100	89
4	58.60	50.14	-17.85	32.29	40.00	-7.71	Peak	100	78
5	64.93	58.12	-22.74	35.38	40.00	-4.62	QP	100	84
6	124.99	47.86	-11.29	36.57	43.50	-6.93	Peak	100	84
7	151.55	49.31	-12.85	36.46	43.50	-7.04	Peak	100	223
8	184.00	51.22	-11.49	39.74	43.50	-3.76	QP	100	88
9	200.23	45.06	-12.76	32.30	43.50	-11.20	Peak	100	81
10	225.80	45.32	-14.73	30.59	46.00	-15.41	Peak	100	80
11	250.00	52.61	-11.04	41.57	46.00	-4.43	QP	100	86

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 4	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 108 Mbps

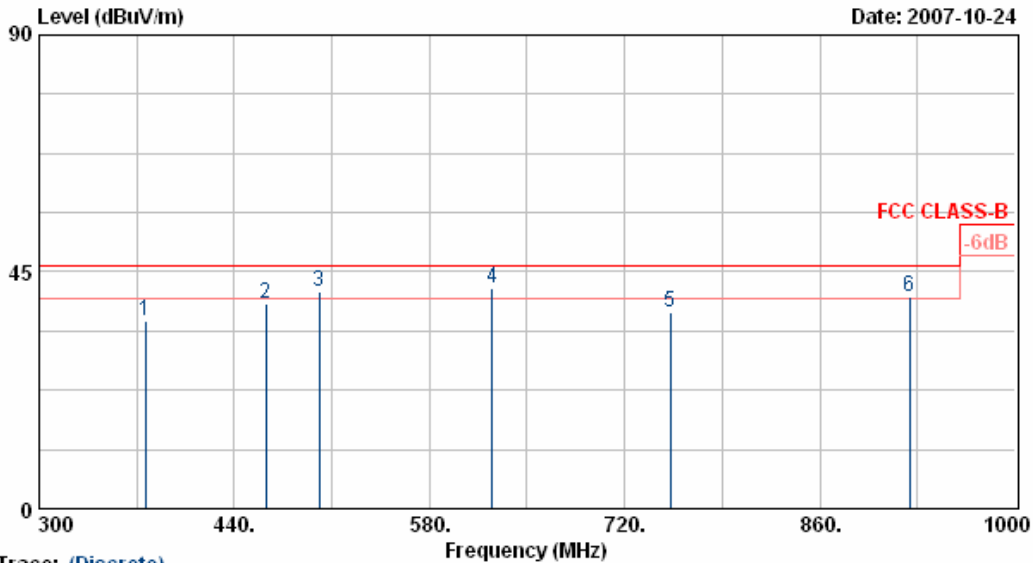


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	45.29	-9.67	35.62	46.00	-10.38	Peak	100	312
2	462.40	45.68	-6.57	39.11	46.00	-6.89	Peak	100	309
3	500.90	46.06	-4.71	41.35	46.00	-4.65	QP	100	316
4	624.83	47.13	-5.38	41.75	46.00	-4.25	QP	100	308
5	752.90	40.45	-3.25	37.20	46.00	-8.80	Peak	100	311
6	924.40	37.11	3.16	40.26	46.00	-5.74	QP	100	75

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 4	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 108 Mbps

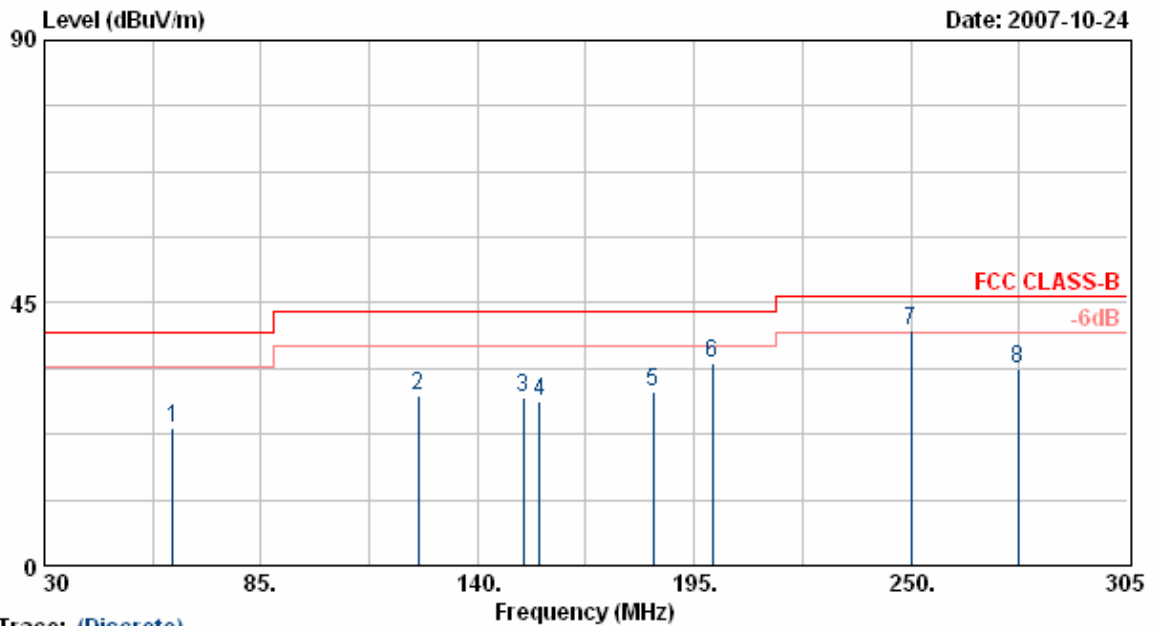


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	62.73	51.45	-27.86	23.59	40.00	-16.41	Peak	400	72
2	125.00	49.14	-20.04	29.10	43.50	-14.40	Peak	400	68
3	151.55	48.08	-19.23	28.85	43.50	-14.65	Peak	400	76
4	155.65	47.15	-19.04	28.11	43.50	-15.39	Peak	400	66
5	184.55	51.07	-21.37	29.70	43.50	-13.80	Peak	400	75
6	199.68	53.77	-19.04	34.73	43.50	-8.77	Peak	400	180
7	250.01	55.85	-15.68	40.17	46.00	-5.83	QP	400	74
8	277.23	47.15	-13.59	33.57	46.00	-12.43	Peak	400	68

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 4	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 108 Mbps

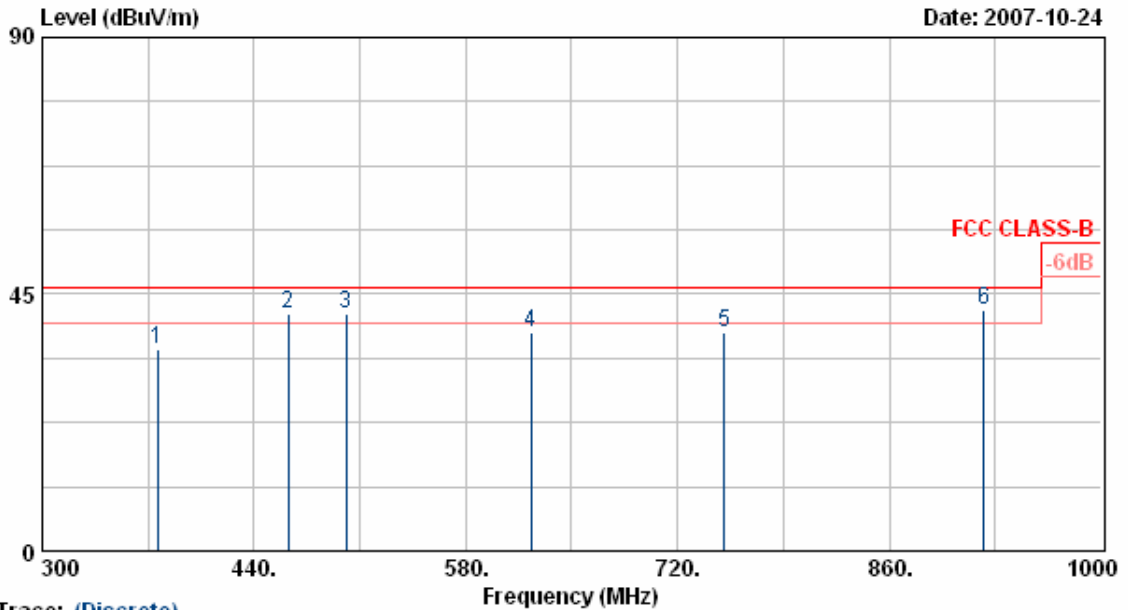


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	45.81	-10.46	35.35	46.00	-10.65	Peak	100	208
2	462.40	49.15	-7.63	41.52	46.00	-4.48	QP	400	200
3	500.90	48.23	-6.57	41.65	46.00	-4.35	QP	100	50
4	623.40	43.16	-4.80	38.35	46.00	-7.65	Peak	100	203
5	750.80	43.35	-5.20	38.15	46.00	-7.85	Peak	100	210
6	922.30	39.45	2.78	42.23	46.00	-3.77	QP	100	200

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 4	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 108 Mbps

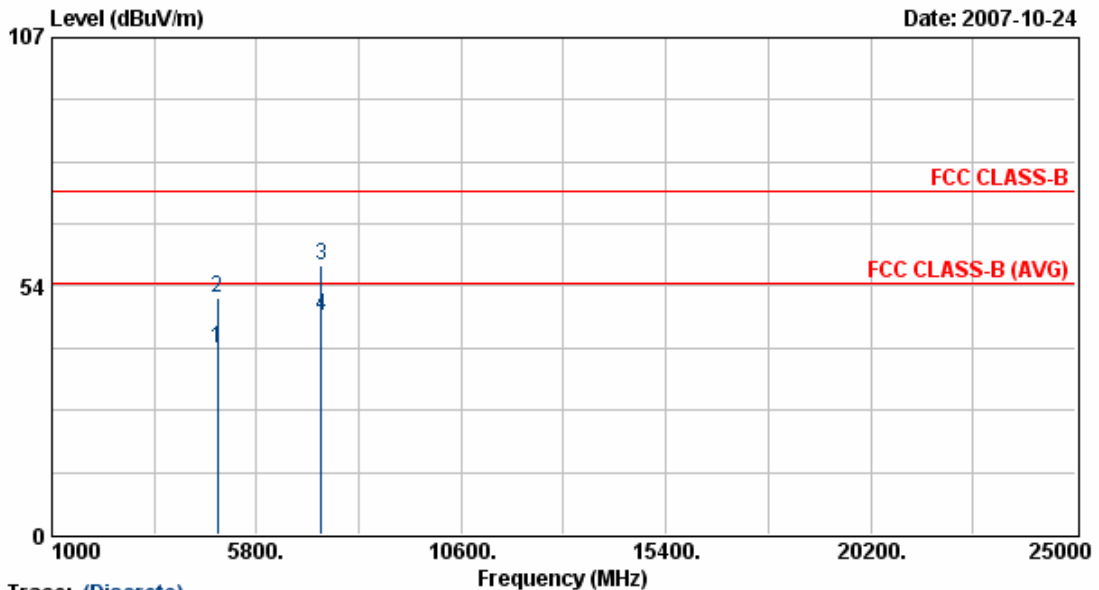


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.63	31.47	8.78	40.25	54.00	-13.75	Average	128	204
2	4873.63	42.37	8.78	51.15	74.00	-22.85	Peak	128	204
3	7311.38	43.29	14.60	57.89	74.00	-16.11	Peak	128	204
4	7311.38	32.47	14.60	47.07	54.00	-6.93	Average	128	204

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 4	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 2+4	Rate	: 108 Mbps

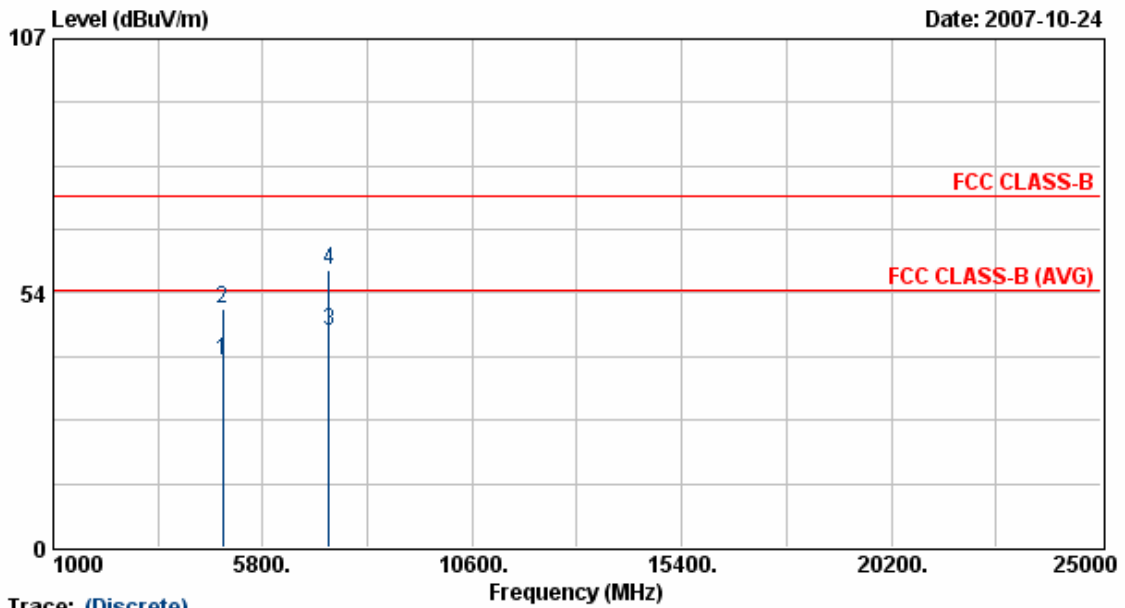


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.13	30.51	8.78	39.29	54.00	-14.71	Average	124	218
2	4874.13	41.46	8.78	50.24	74.00	-23.76	Peak	124	218
3	7311.00	30.94	14.60	45.54	54.00	-8.46	Average	124	218
4	7311.00	43.63	14.60	58.23	74.00	-15.77	Peak	124	218

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 54 Mbps

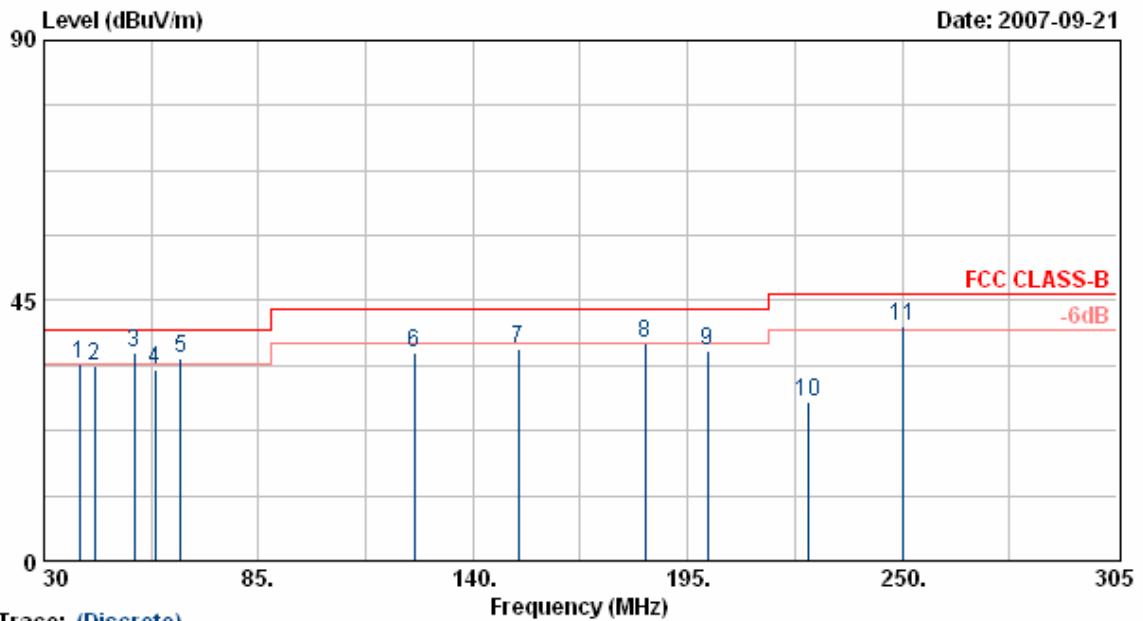


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	39.08	48.72	-14.58	34.14	40.00	-5.86	QP	300	66
2	42.95	49.72	-15.94	33.78	40.00	-6.22	Peak	100	51
3	53.10	55.38	-19.52	35.86	40.00	-4.14	QP	100	67
4	58.60	50.98	-17.85	33.13	40.00	-6.87	Peak	100	62
5	64.93	57.66	-22.74	34.92	40.00	-5.08	QP	100	57
6	124.99	47.21	-11.29	35.92	43.50	-7.58	Peak	100	65
7	151.55	49.35	-12.85	36.50	43.50	-7.00	Peak	100	127
8	184.00	49.11	-11.49	37.62	43.50	-5.88	QP	100	61
9	200.23	48.95	-12.76	36.19	43.50	-7.31	Peak	100	58
10	225.80	42.12	-14.73	27.39	46.00	-18.61	Peak	100	60
11	250.00	51.77	-11.04	40.73	46.00	-5.27	QP	100	65

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 54 Mbps

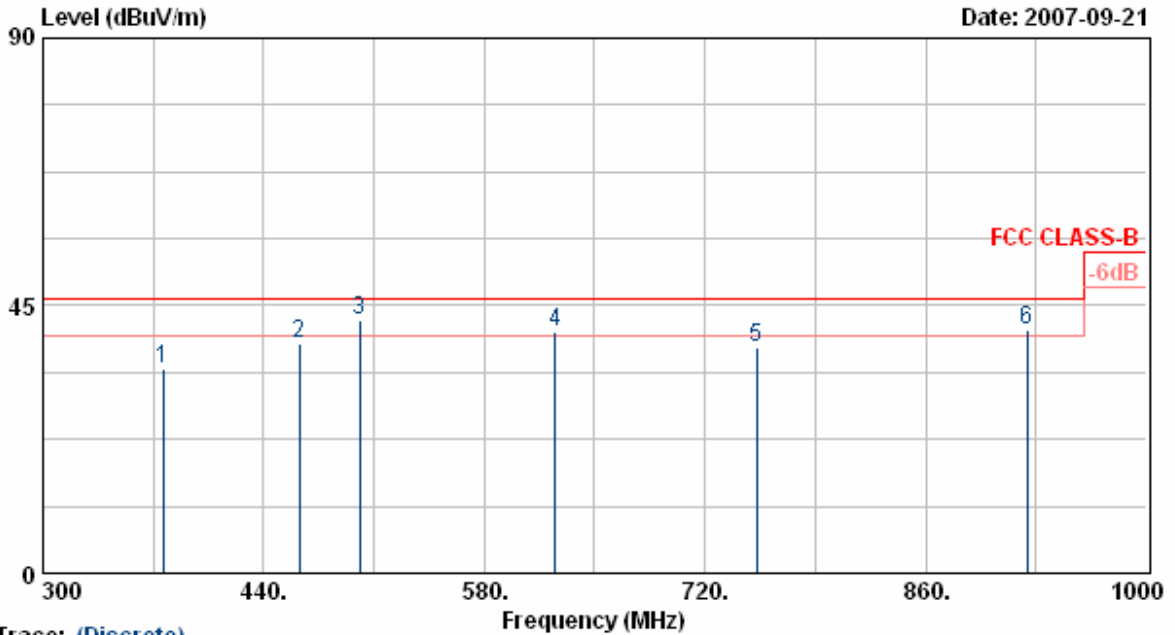


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	43.99	-9.67	34.32	46.00	-11.68	Peak	100	310
2	462.40	45.12	-6.57	38.55	46.00	-7.45	Peak	100	315
3	500.90	47.12	-4.71	42.41	46.00	-3.59	QP	100	309
4	624.83	45.80	-5.38	40.42	46.00	-5.58	QP	100	299
5	752.90	41.20	-3.25	37.95	46.00	-8.05	Peak	100	306
6	924.40	37.77	3.16	40.93	46.00	-5.07	QP	100	33

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 54 Mbps

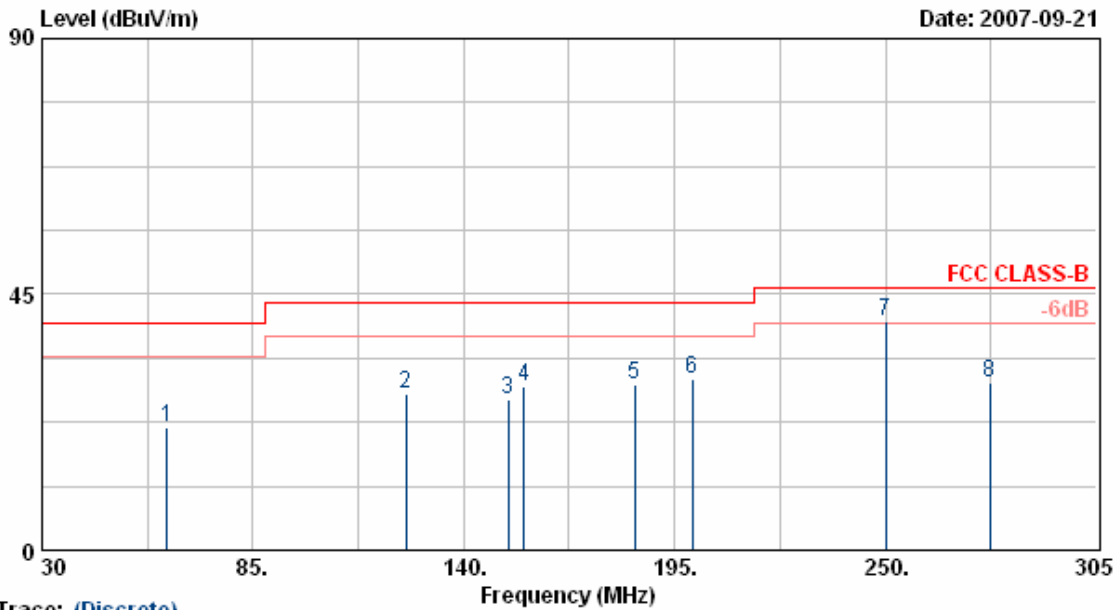


Trace: (Discrete)									
Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	62.73	49.33	-27.86	21.47	40.00	-18.53	Peak	400	46
2	125.00	47.62	-20.04	27.58	43.50	-15.92	Peak	400	48
3	151.55	45.62	-19.23	26.39	43.50	-17.11	Peak	400	38
4	155.65	47.91	-19.04	28.87	43.50	-14.63	Peak	400	42
5	184.55	50.64	-21.37	29.27	43.50	-14.23	Peak	400	44
6	199.68	49.11	-19.04	30.07	43.50	-13.43	Peak	400	115
7	250.01	55.92	-15.68	40.24	46.00	-5.76	QP	400	51
8	277.23	43.12	-13.59	29.53	46.00	-16.47	Peak	400	49

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 54 Mbps

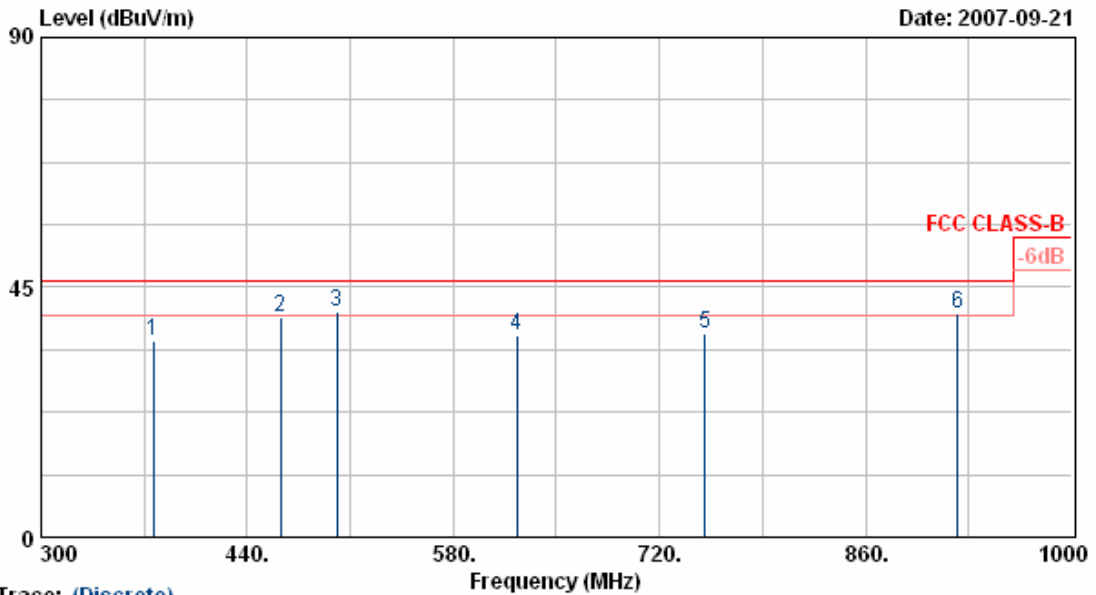


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	45.88	-10.46	35.42	46.00	-10.58	Peak	100	254
2	462.40	47.12	-7.63	39.49	46.00	-6.51	Peak	400	254
3	500.90	47.15	-6.57	40.58	46.00	-5.42	QP	100	12
4	623.40	41.13	-4.80	36.32	46.00	-9.68	Peak	100	252
5	750.80	41.98	-5.20	36.78	46.00	-9.22	Peak	100	259
6	922.30	37.59	2.78	40.37	46.00	-5.63	QP	100	261

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 11 Mbps

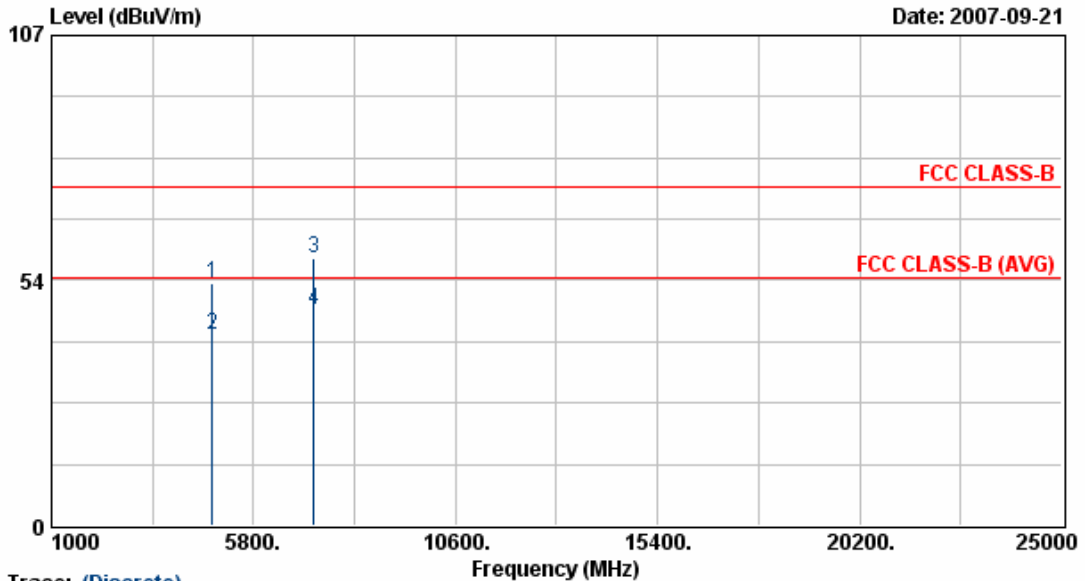


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.00	44.21	8.64	52.85	74.00	-21.15	Peak	136	135
2	4824.00	32.97	8.64	41.61	54.00	-12.39	Average	136	135
3	7238.00	44.15	14.36	58.51	74.00	-15.49	Peak	136	135
4	7238.00	32.62	14.36	46.98	54.00	-7.02	Average	136	135

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 11 Mbps

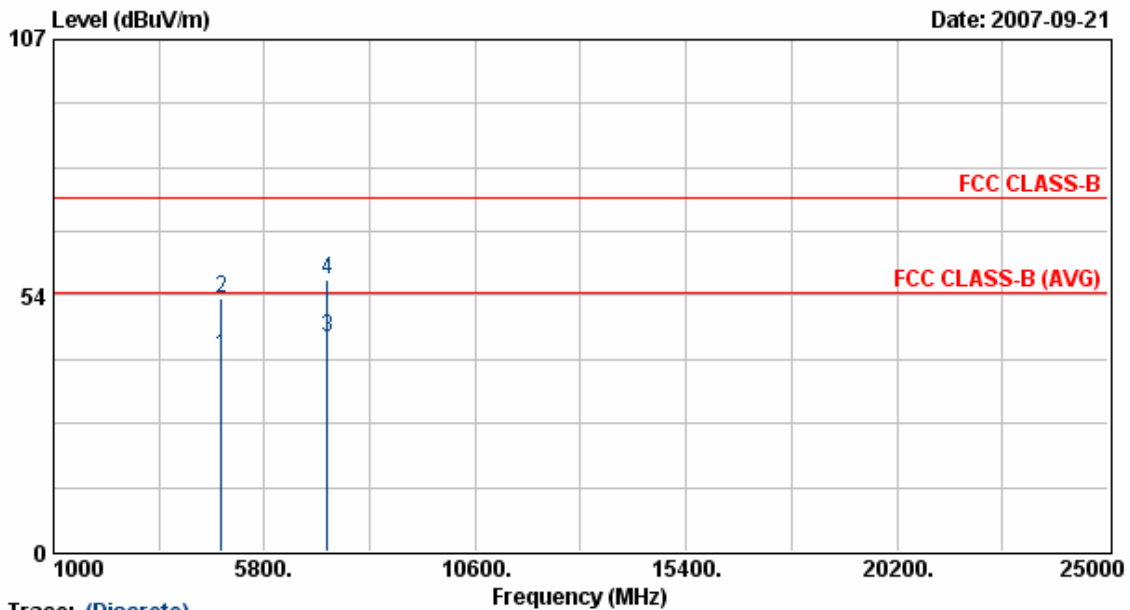


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.88	32.40	8.64	41.04	54.00	-12.96	Average	118	212
2	4823.88	44.45	8.64	53.09	74.00	-20.91	Peak	118	212
3	7235.63	30.31	14.35	44.66	54.00	-9.34	Average	118	212
4	7235.63	42.49	14.35	56.84	74.00	-17.16	Peak	118	212

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 11 Mbps

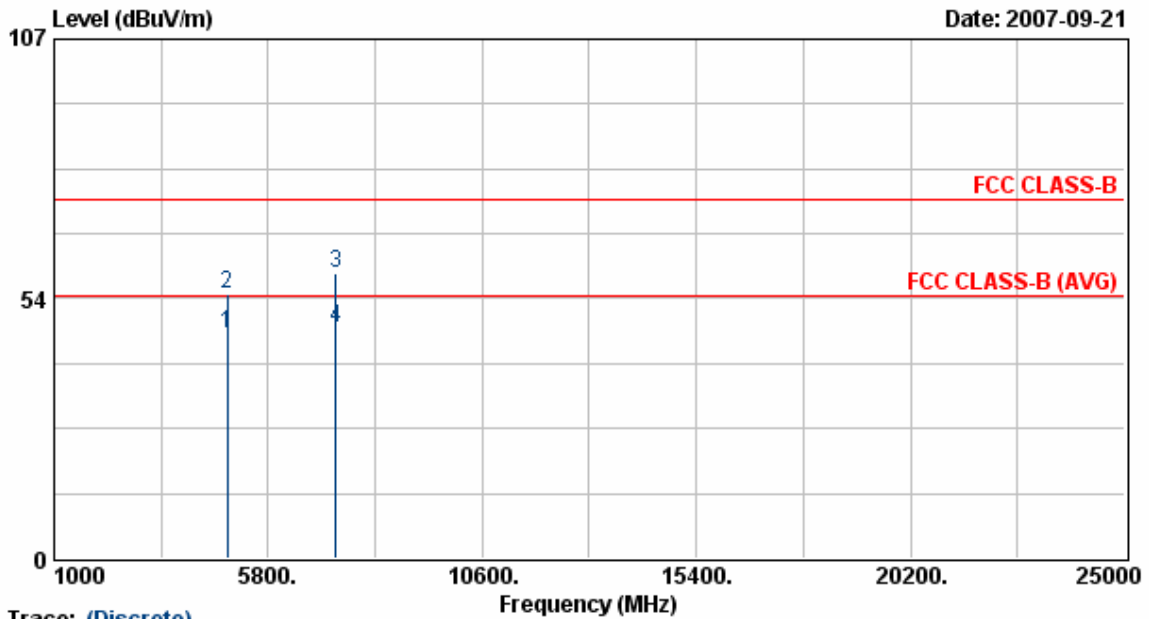


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.88	37.67	8.78	46.45	54.00	-7.55	Average	136	135
2	4873.88	45.76	8.78	54.54	74.00	-19.46	Peak	136	135
3	7315.50	44.17	14.61	58.78	74.00	-15.22	Peak	136	135
4	7315.50	32.94	14.61	47.55	54.00	-6.45	Average	136	135

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 11 Mbps

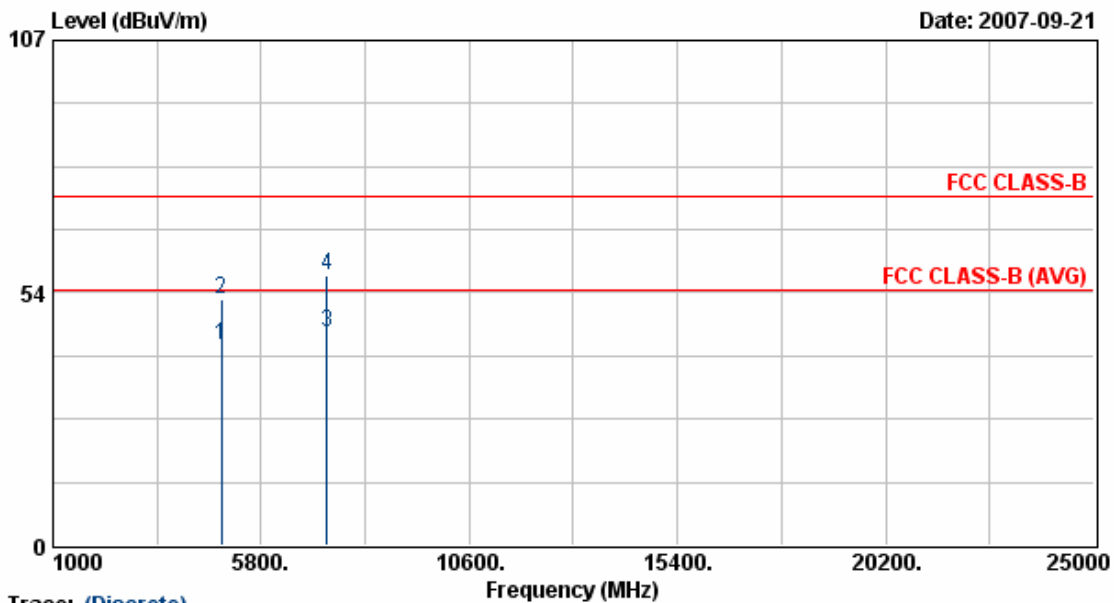


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.88	33.46	8.78	42.24	54.00	-11.76	Average	118	212
2	4873.88	43.22	8.78	52.00	74.00	-22.00	Peak	118	212
3	7310.75	30.47	14.60	45.07	54.00	-8.93	Average	118	212
4	7310.75	42.69	14.60	57.28	74.00	-16.72	Peak	118	212

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 11 Mbps

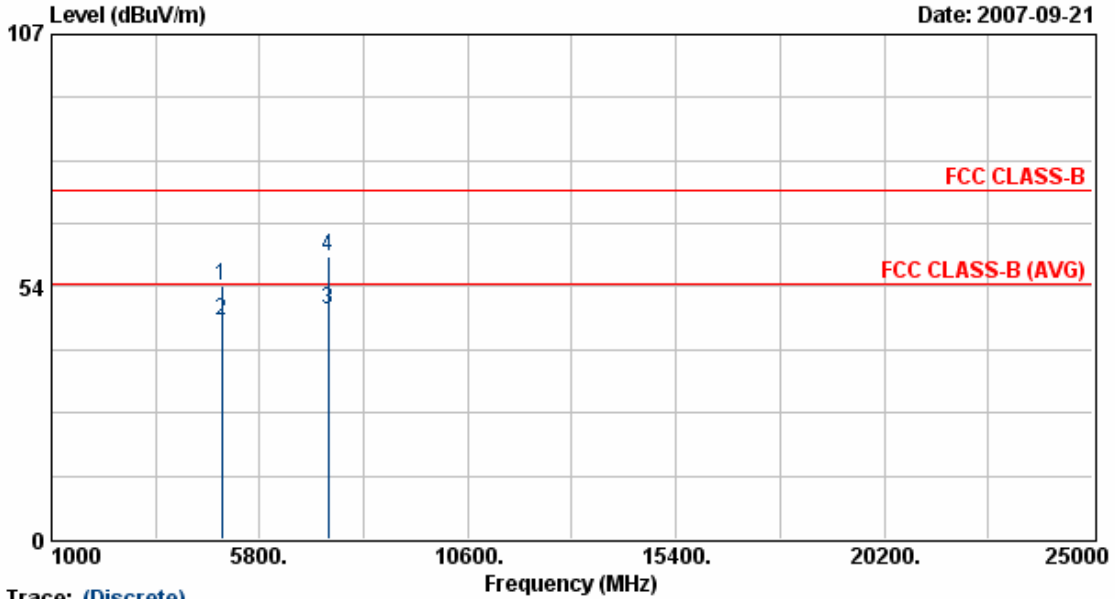


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.88	44.91	8.92	53.83	74.00	-20.17	Peak	136	135
2	4923.88	37.51	8.92	46.43	54.00	-7.57	Average	136	135
3	7385.00	33.96	14.84	48.79	54.00	-5.21	Average	136	135
4	7385.00	44.94	14.84	59.77	74.00	-14.23	Peak	136	135

- Notes:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
 5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
 6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 11 Mbps

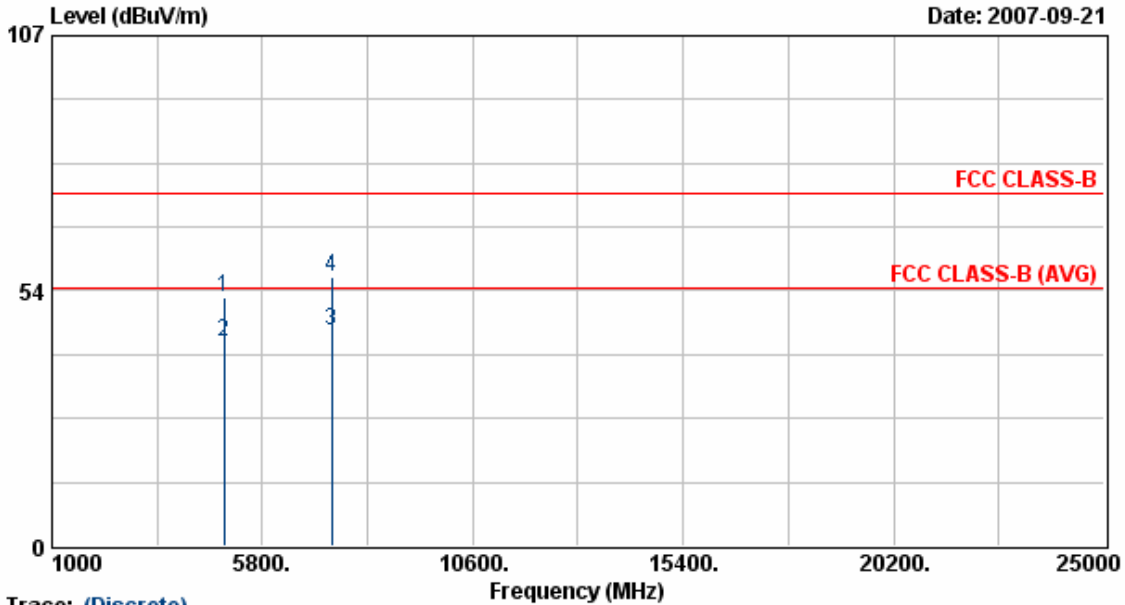


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.88	43.32	8.92	52.24	74.00	-21.76	Peak	118	212
2	4923.88	33.80	8.92	42.72	54.00	-11.28	Average	118	212
3	7385.63	30.27	14.84	45.11	54.00	-8.89	Average	118	212
4	7385.63	41.75	14.84	56.59	74.00	-17.41	Peak	118	212

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 54 Mbps

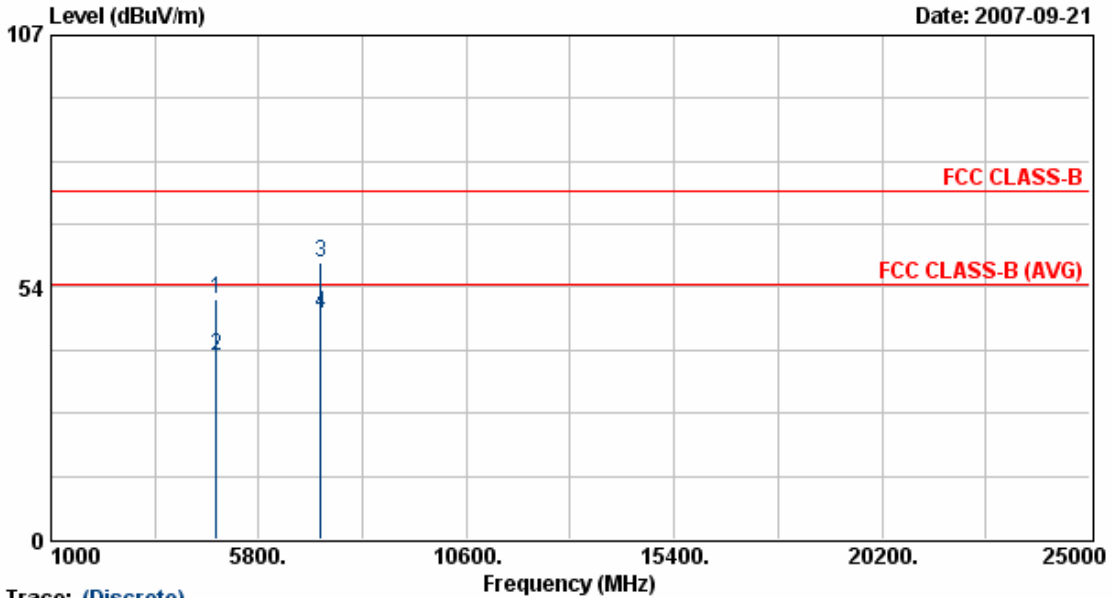


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.50	42.34	8.64	50.98	74.00	-23.02	Peak	136	135
2	4824.50	30.24	8.64	38.88	54.00	-15.12	Average	136	135
3	7236.25	44.40	14.36	58.75	74.00	-15.25	Peak	136	135
4	7236.25	33.37	14.36	47.72	54.00	-6.28	Average	136	135

- Notes:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
 5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
 6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 54 Mbps

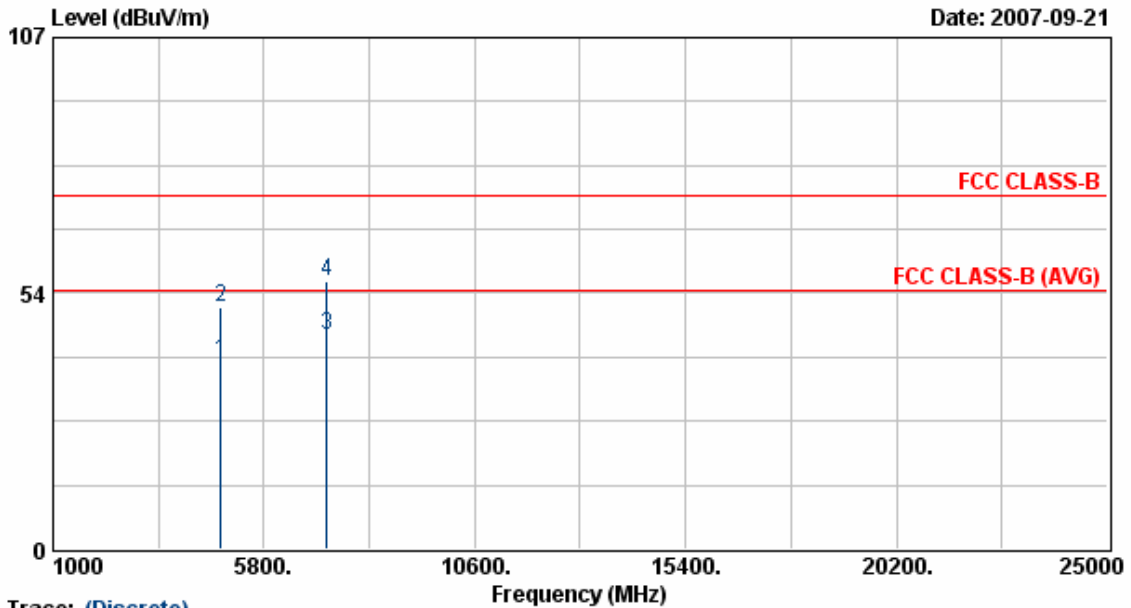


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.88	30.57	8.64	39.21	54.00	-14.79	Average	118	212
2	4823.88	41.85	8.64	50.49	74.00	-23.51	Peak	118	212
3	7235.75	30.26	14.35	44.61	54.00	-9.39	Average	118	212
4	7235.75	41.51	14.35	55.86	74.00	-18.14	Peak	118	212

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 54 Mbps

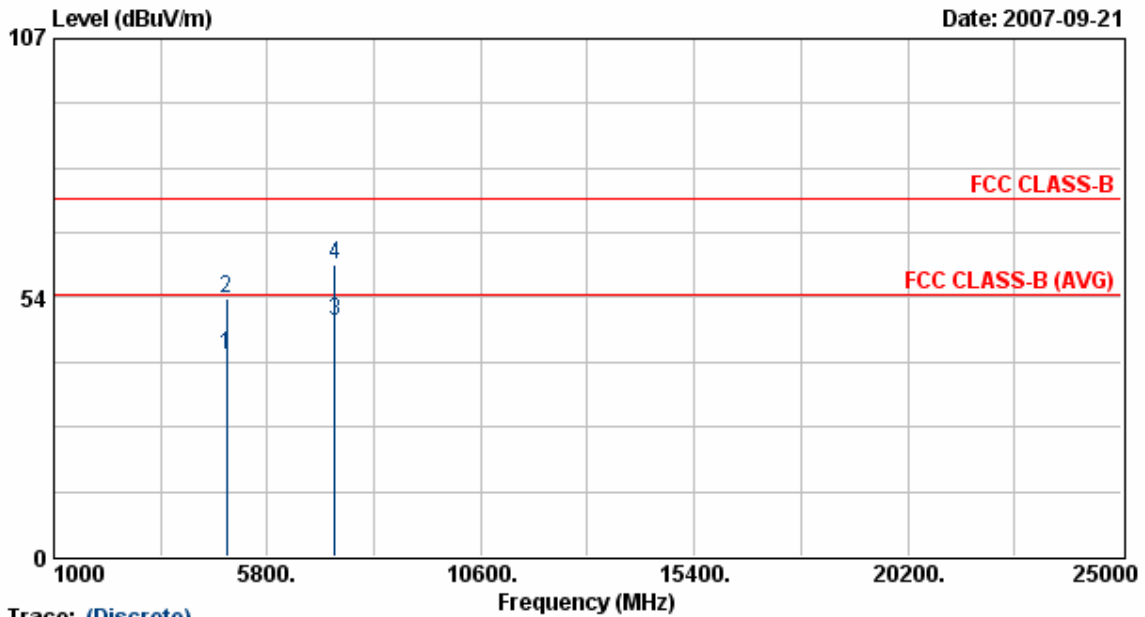


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.63	32.69	8.78	41.47	54.00	-12.53	Average	136	135
2	4874.63	44.43	8.78	53.21	74.00	-20.79	Peak	136	135
3	7311.00	34.22	14.60	48.81	54.00	-5.19	Average	136	135
4	7311.00	45.65	14.60	60.25	74.00	-13.75	Peak	136	135

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 54 Mbps

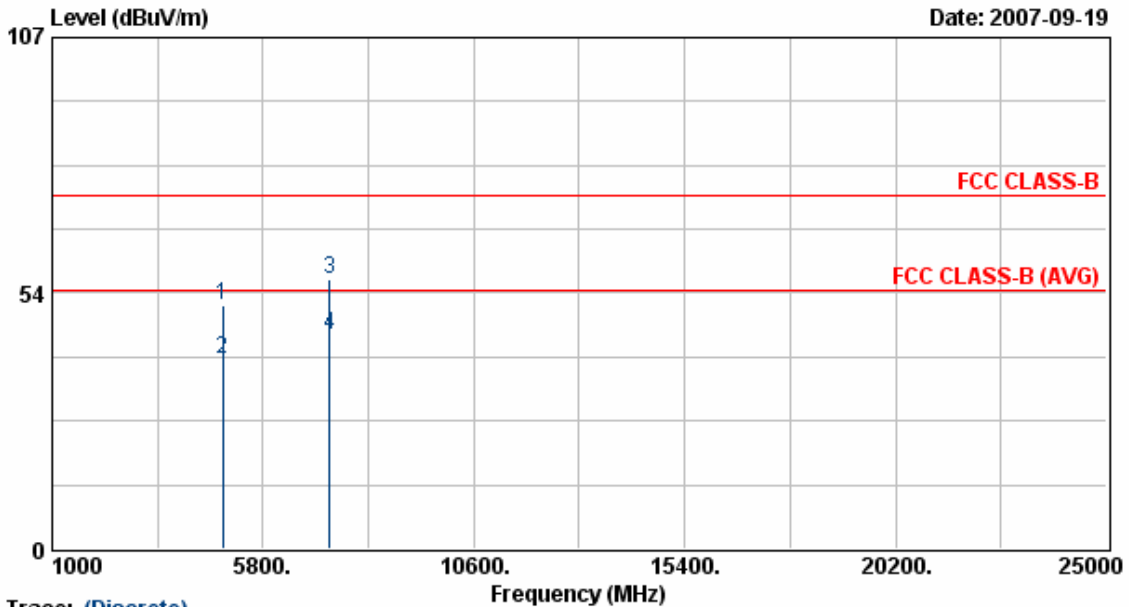


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.13	42.37	8.78	51.15	74.00	-22.85	Peak	118	212
2	4874.13	30.89	8.78	39.67	54.00	-14.33	Average	118	212
3	7311.25	41.63	14.60	56.23	74.00	-17.77	Peak	118	212
4	7311.25	30.27	14.60	44.87	54.00	-9.13	Average	118	212

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 54 Mbps

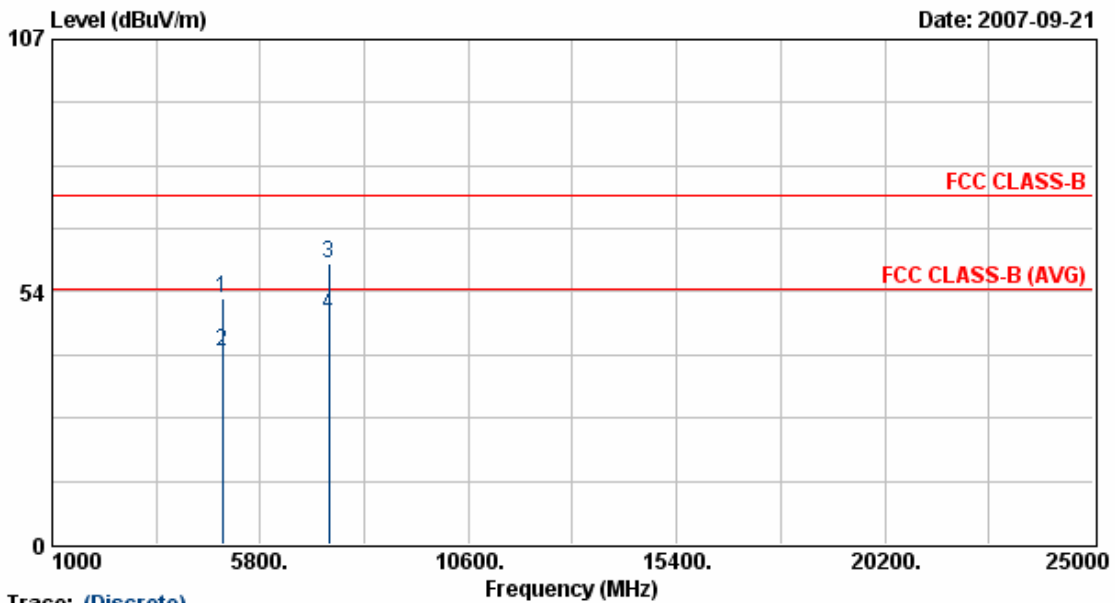


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.00	43.38	8.92	52.30	74.00	-21.70	Peak	136	135
2	4923.00	31.99	8.92	40.91	54.00	-13.09	Average	136	135
3	7382.50	44.58	14.83	59.41	74.00	-14.59	Peak	136	135
4	7382.50	33.64	14.83	48.47	54.00	-5.53	Average	136	135

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 54 Mbps

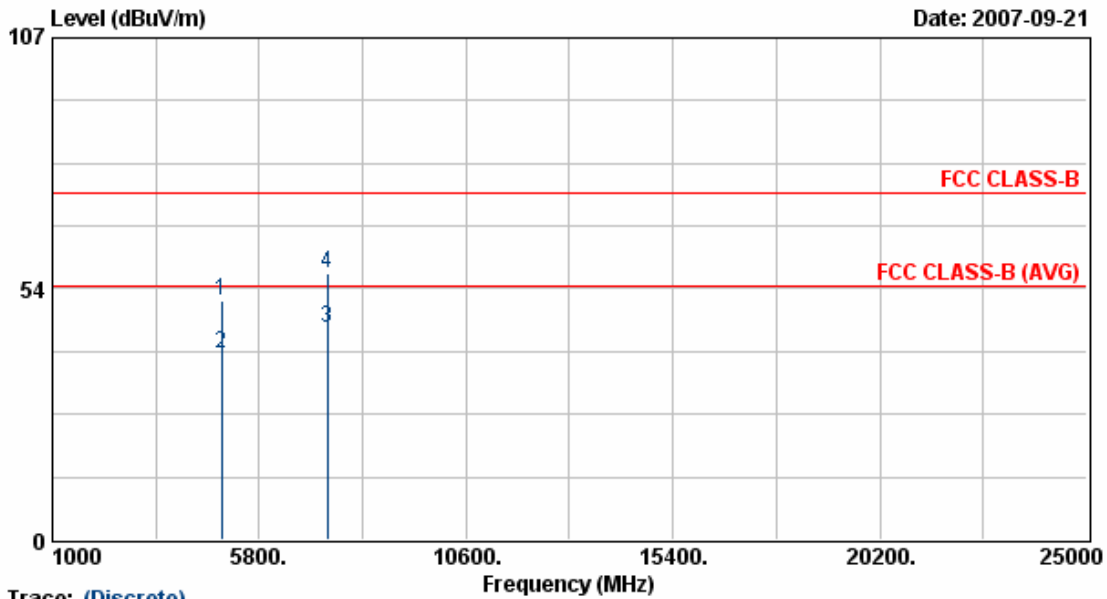


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.13	41.90	8.92	50.83	74.00	-23.17	Peak	118	212
2	4924.13	30.65	8.92	39.57	54.00	-14.43	Average	118	212
3	7385.75	30.19	14.84	45.03	54.00	-8.97	Average	118	212
4	7385.75	41.96	14.84	56.80	74.00	-17.20	Peak	118	212

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1antenna 3	Rate	: 108 Mbps

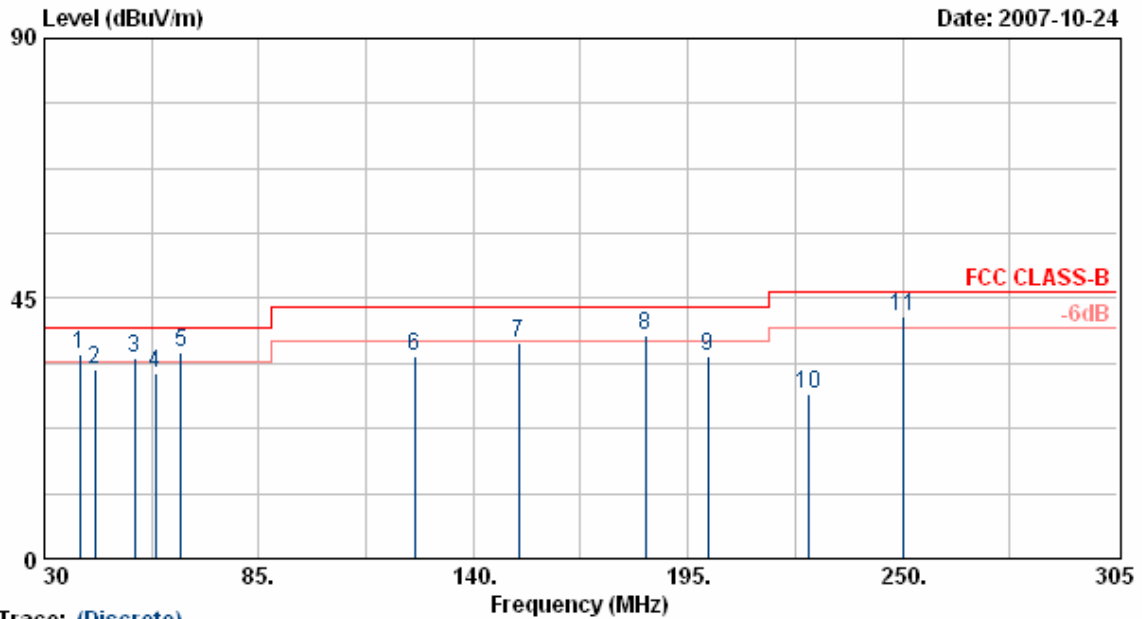


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	39.08	49.83	-14.58	35.25	40.00	-4.75	QP	300	66
2	42.95	48.61	-15.94	32.67	40.00	-7.33	Peak	100	51
3	53.10	54.26	-19.52	34.74	40.00	-5.26	QP	100	67
4	58.60	49.87	-17.85	32.02	40.00	-7.98	Peak	100	62
5	64.93	58.55	-22.74	35.81	40.00	-4.19	QP	100	57
6	124.99	46.18	-11.29	34.89	43.50	-8.61	Peak	100	65
7	151.55	50.32	-12.85	37.47	43.50	-6.03	Peak	100	127
8	184.00	50.22	-11.49	38.73	43.50	-4.77	QP	100	61
9	200.23	47.84	-12.76	35.08	43.50	-8.42	Peak	100	58
10	225.80	43.23	-14.73	28.50	46.00	-17.50	Peak	100	60
11	250.00	52.88	-11.04	41.84	46.00	-4.16	QP	100	65

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 108 Mbps

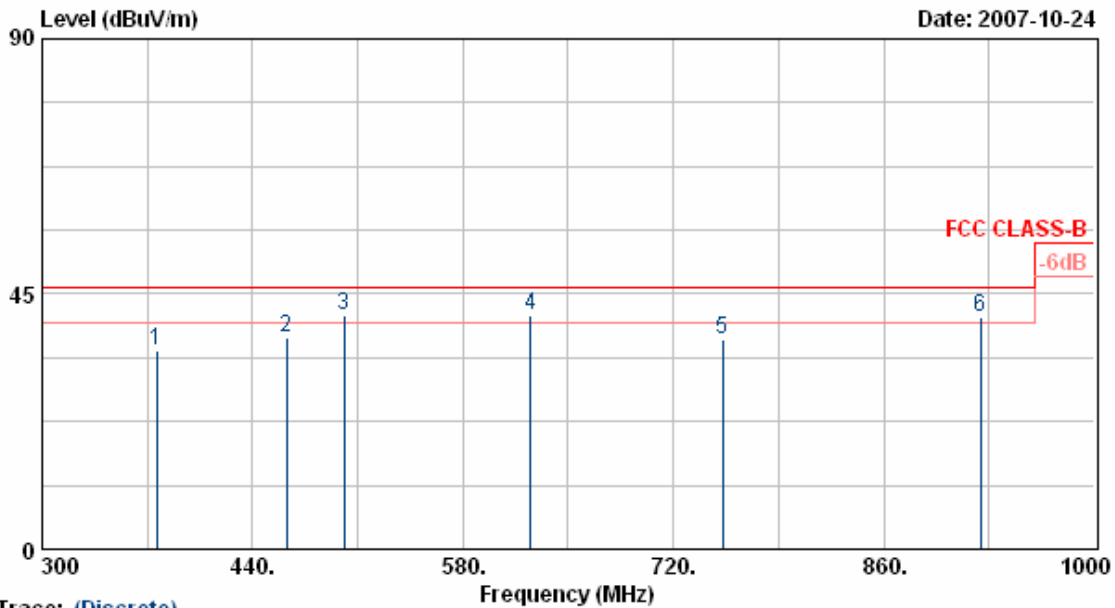


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	44.81	-9.67	35.14	46.00	-10.86	Peak	100	310
2	462.40	44.01	-6.57	37.44	46.00	-8.56	Peak	100	315
3	500.90	46.01	-4.71	41.30	46.00	-4.70	QP	100	309
4	624.83	46.76	-5.38	41.38	46.00	-4.62	QP	100	299
5	752.90	40.19	-3.25	36.94	46.00	-9.06	Peak	100	306
6	924.40	37.66	3.16	40.82	46.00	-5.18	QP	100	33

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 108 Mbps

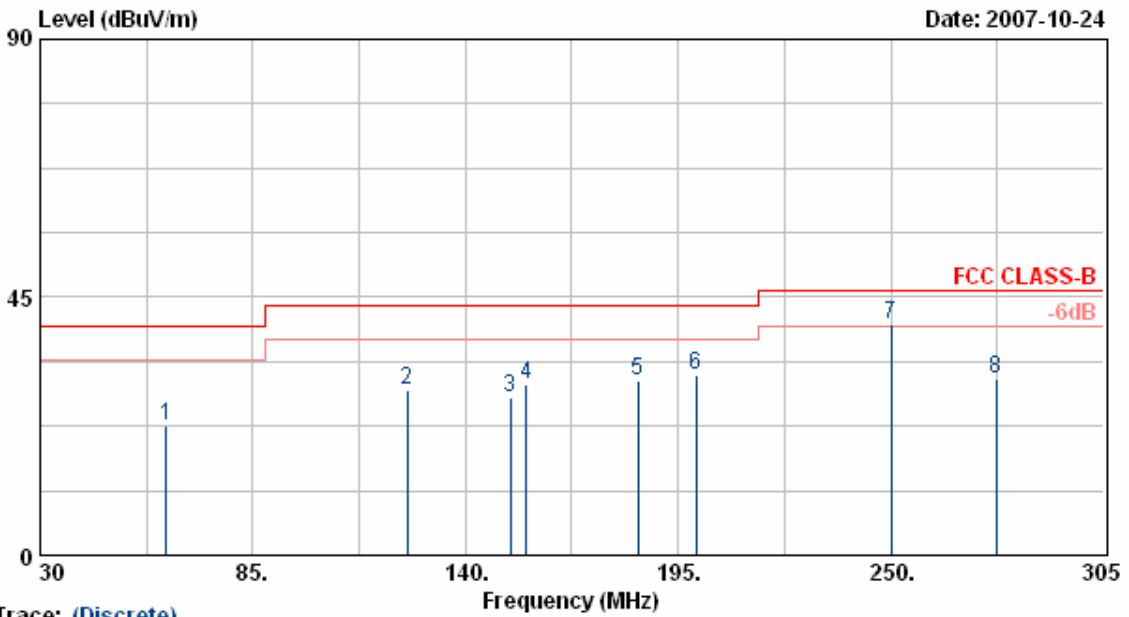


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	62.73	50.31	-27.86	22.45	40.00	-17.55	Peak	400	46
2	125.00	48.72	-20.04	28.68	43.50	-14.82	Peak	400	48
3	151.55	46.73	-19.23	27.50	43.50	-16.00	Peak	400	38
4	155.65	48.82	-19.04	29.78	43.50	-13.72	Peak	400	42
5	184.55	51.76	-21.37	30.39	43.50	-13.11	Peak	400	44
6	199.68	50.33	-19.04	31.29	43.50	-12.21	Peak	400	115
7	250.01	56.03	-15.68	40.35	46.00	-5.65	QP	400	51
8	277.23	44.26	-13.59	30.67	46.00	-15.33	Peak	400	49

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 108 Mbps

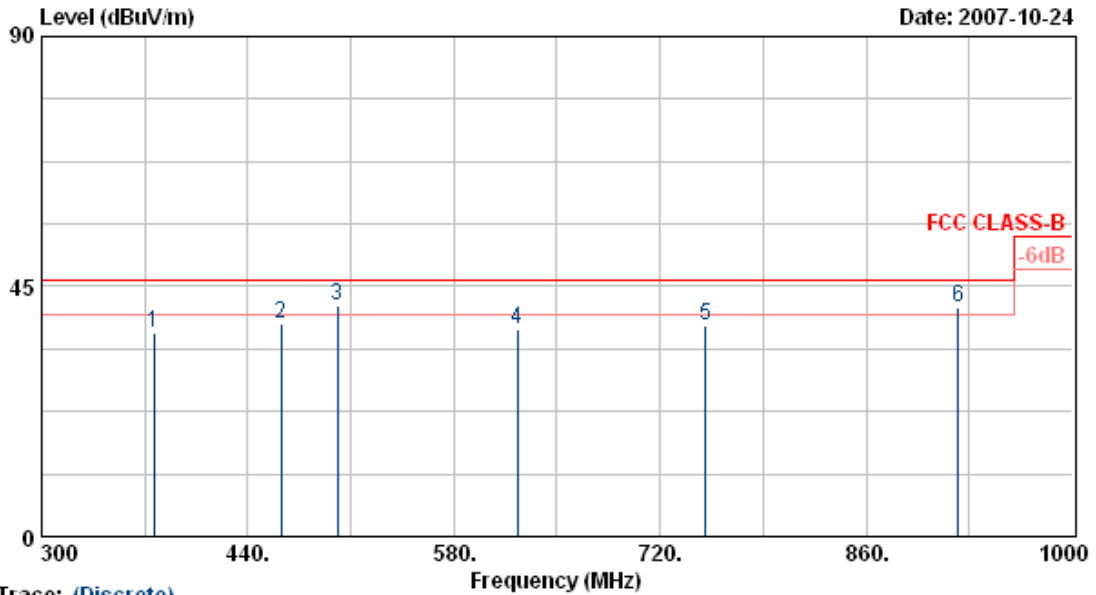


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	46.99	-10.46	36.53	46.00	-9.47	Peak	100	254
2	462.40	46.01	-7.63	38.38	46.00	-7.62	Peak	400	254
3	500.90	48.26	-6.57	41.69	46.00	-4.31	QP	100	12
4	623.40	42.24	-4.80	37.43	46.00	-8.57	Peak	100	252
5	750.80	43.06	-5.20	37.86	46.00	-8.14	Peak	100	259
6	922.30	38.61	2.78	41.39	46.00	-4.61	QP	100	261

- Notes:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
 4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
 5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
 6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 108 Mbps

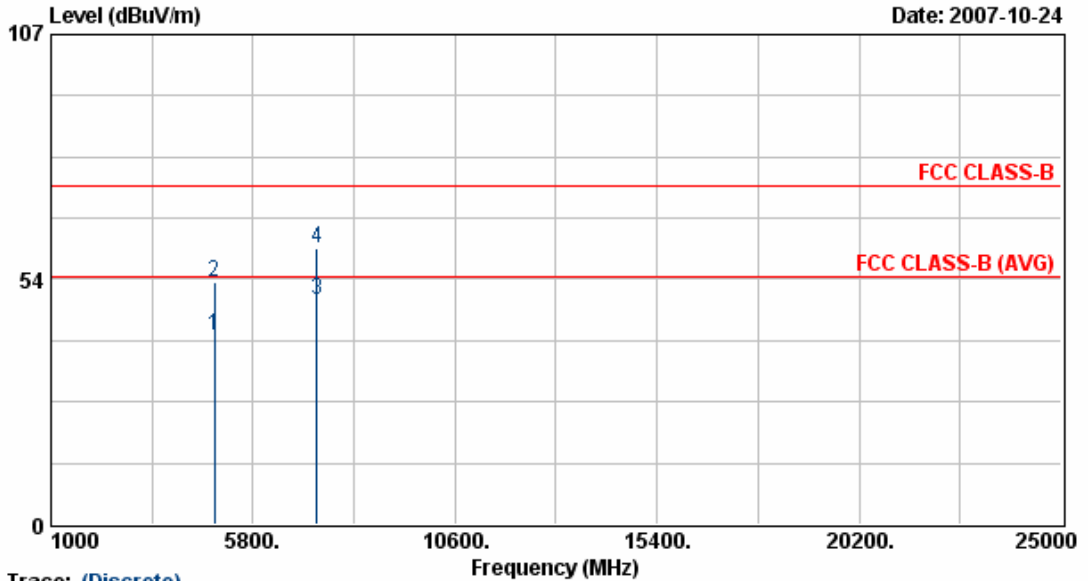


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.63	32.47	8.78	41.25	54.00	-12.75	Average	136	135
2	4874.63	44.25	8.78	53.04	74.00	-20.96	Peak	136	135
3	7311.00	34.42	14.60	49.02	54.00	-4.98	Average	136	135
4	7311.00	45.62	14.60	60.22	74.00	-13.78	Peak	136	135

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3	Rate	: 108 Mbps

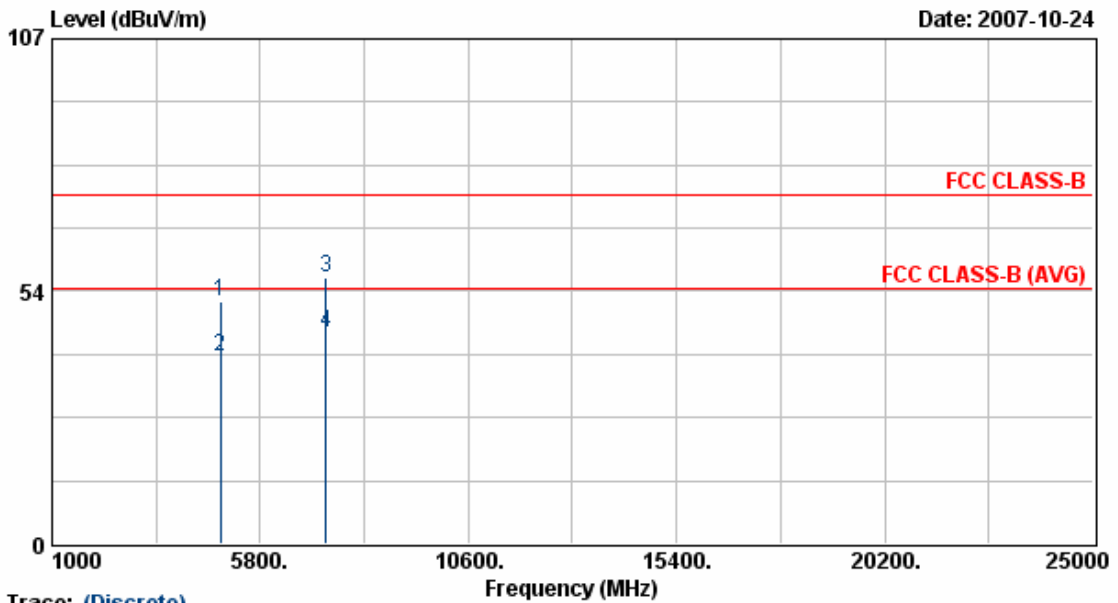


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.13	42.39	8.78	51.17	74.00	-22.83	Peak	118	212
2	4874.13	30.99	8.78	39.77	54.00	-14.23	Average	118	212
3	7311.25	41.76	14.60	56.36	74.00	-17.64	Peak	118	212
4	7311.25	30.30	14.60	44.90	54.00	-9.10	Average	118	212

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 6	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 54 Mbps

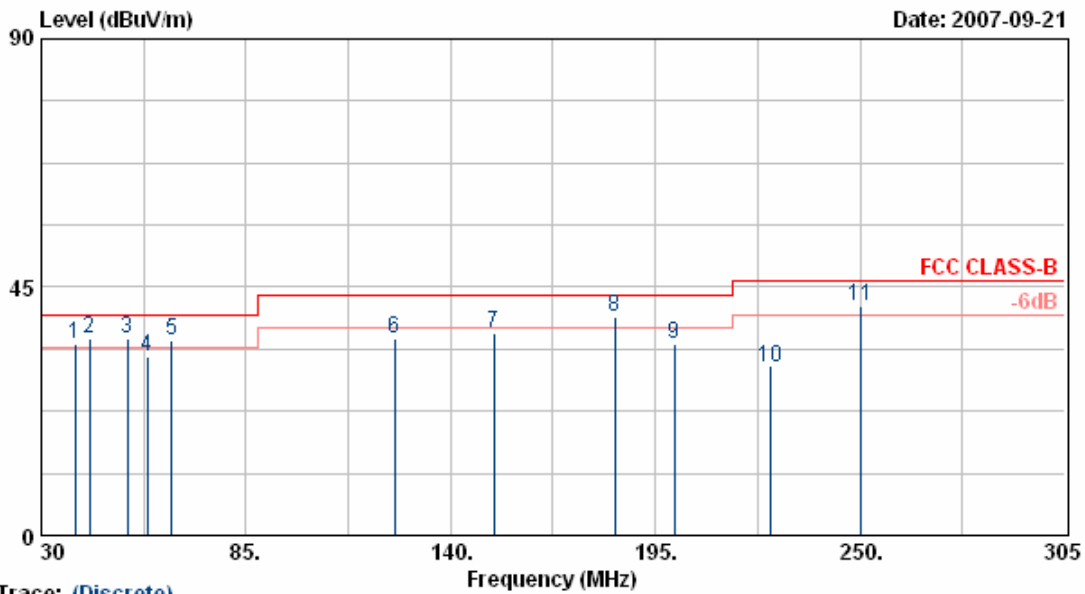


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV/m	dB		cm	Deg
1	39.08	49.16	-14.58	34.58	40.00	-5.42	QP	300	70
2	42.95	51.66	-15.94	35.72	40.00	-4.28	QP	100	64
3	53.10	55.19	-19.52	35.67	40.00	-4.33	QP	100	71
4	58.60	50.12	-17.85	32.27	40.00	-7.73	Peak	100	69
5	64.93	58.12	-22.74	35.38	40.00	-4.62	QP	100	65
6	124.99	47.11	-11.29	35.82	43.50	-7.68	Peak	100	64
7	151.55	49.38	-12.85	36.53	43.50	-6.97	Peak	100	214
8	184.00	51.12	-11.49	39.64	43.50	-3.86	QP	100	67
9	200.23	47.36	-12.76	34.60	43.50	-8.90	Peak	100	69
10	225.80	45.33	-14.73	30.60	46.00	-15.40	Peak	100	72
11	250.00	52.48	-11.04	41.44	46.00	-4.56	QP	100	66

- Notes:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
 4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
 5. According to technical experiences, all spurious emission of 802.11g mode at channel 1, 6, 11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
 6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 6	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 54 Mbps

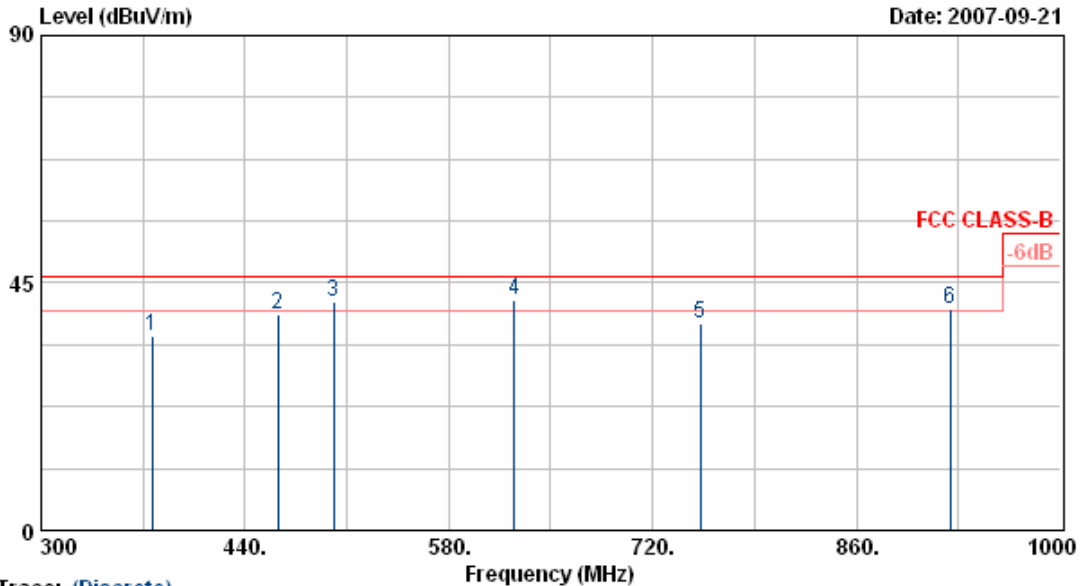


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	45.12	-9.67	35.45	46.00	-10.55	Peak	100	308
2	462.40	45.99	-6.57	39.42	46.00	-6.58	Peak	100	299
3	500.90	46.34	-4.71	41.63	46.00	-4.37	QP	100	304
4	624.83	47.12	-5.38	41.74	46.00	-4.26	QP	100	300
5	752.90	40.98	-3.25	37.73	46.00	-8.27	Peak	100	309
6	924.40	37.12	3.16	40.28	46.00	-5.72	QP	100	89

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 6	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 54 Mbps

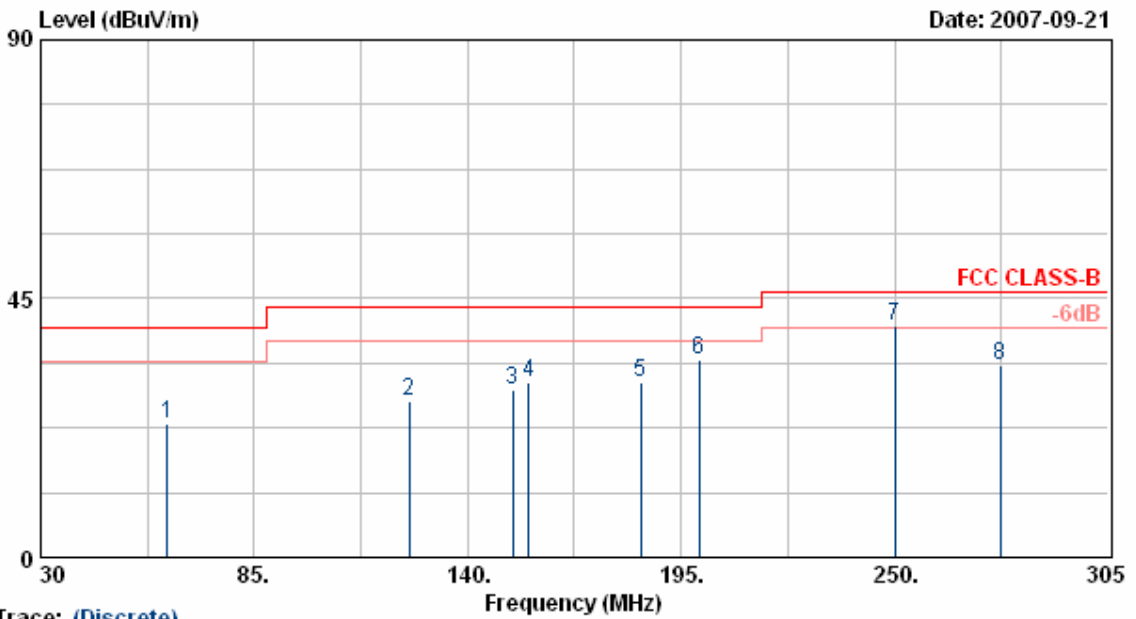


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	62.73	51.22	-27.86	23.36	40.00	-16.64	Peak	400	64
2	125.00	47.33	-20.04	27.29	43.50	-16.21	Peak	400	62
3	151.55	48.19	-19.23	28.96	43.50	-14.54	Peak	400	74
4	155.65	49.33	-19.04	30.29	43.50	-13.21	Peak	400	79
5	184.55	51.67	-21.37	30.30	43.50	-13.20	Peak	400	77
6	199.68	53.47	-19.04	34.43	43.50	-9.07	Peak	400	194
7	250.01	55.97	-15.68	40.29	46.00	-5.71	QP	400	67
8	277.23	47.12	-13.59	33.53	46.00	-12.47	Peak	400	71

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 6	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 54 Mbps

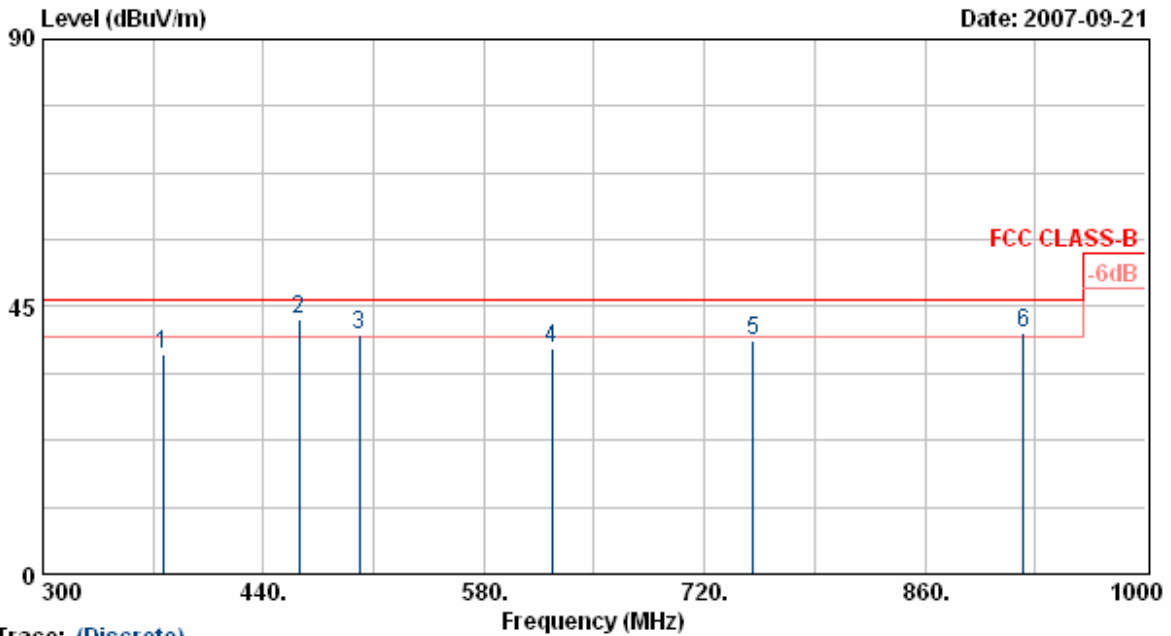


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	47.33	-10.46	36.87	46.00	-9.13	Peak	100	219
2	462.40	50.39	-7.63	42.76	46.00	-3.24	QP	400	210
3	500.90	46.98	-6.57	40.41	46.00	-5.59	QP	100	44
4	623.40	42.79	-4.80	37.99	46.00	-8.01	Peak	100	214
5	750.80	44.38	-5.20	39.18	46.00	-6.82	Peak	100	216
6	922.30	37.76	2.78	40.54	46.00	-5.46	QP	100	211

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 11 Mbps

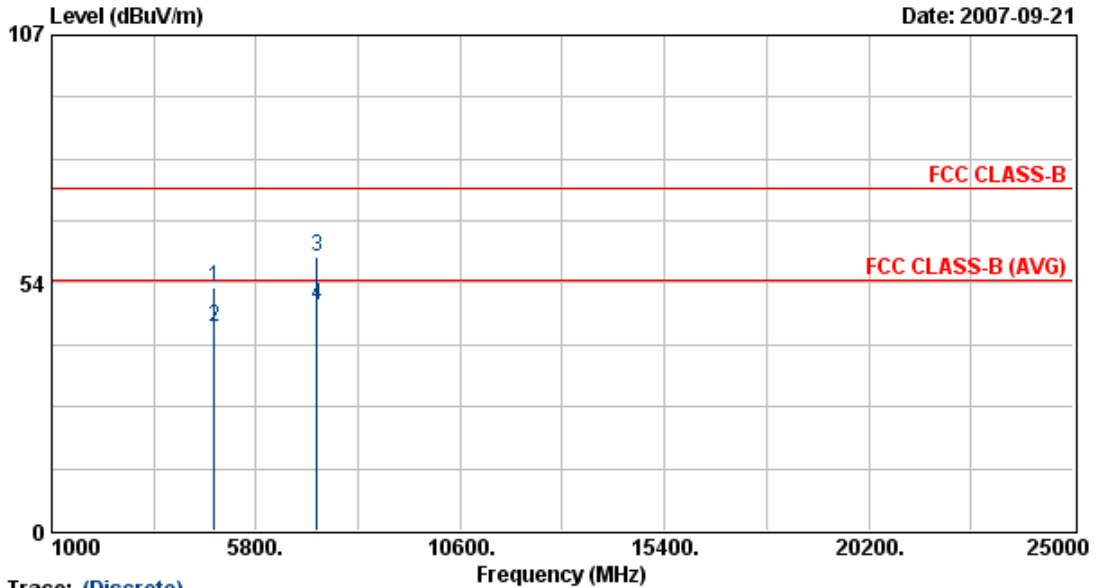


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.88	43.76	8.64	52.40	74.00	-21.60	Peak	119	119
2	4823.88	35.39	8.64	44.03	54.00	-9.97	Average	119	119
3	7235.13	44.88	14.35	59.23	74.00	-14.77	Peak	119	119
4	7235.13	34.33	14.35	48.68	54.00	-5.32	Average	119	119

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 11 Mbps

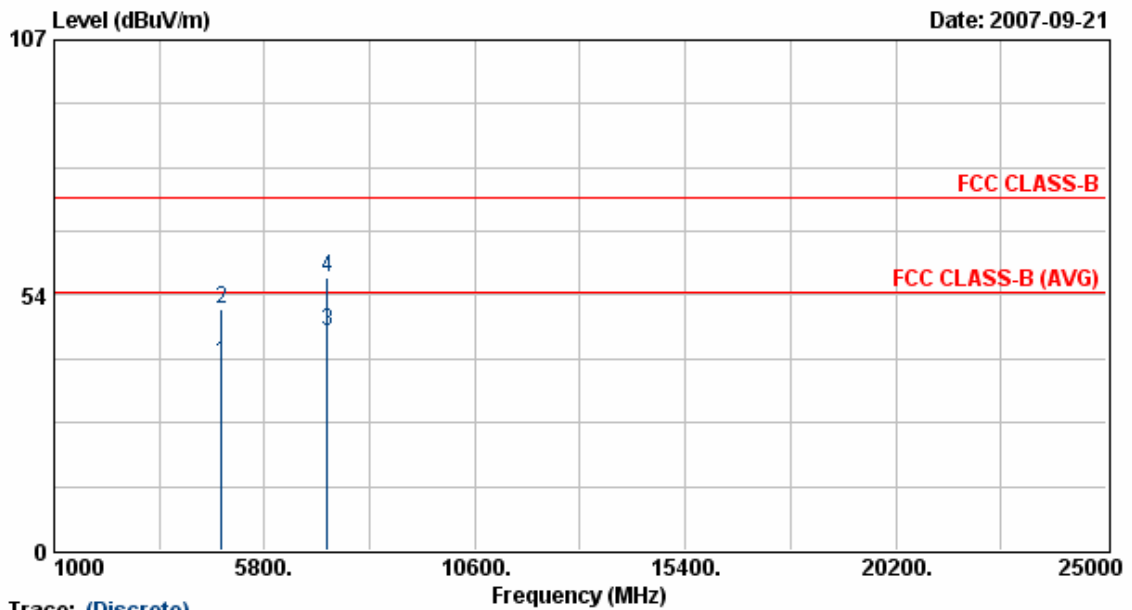


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.88	30.74	8.64	39.38	54.00	-14.62	Average	114	211
2	4823.88	42.08	8.64	50.72	74.00	-23.28	Peak	114	211
3	7236.88	31.39	14.36	45.75	54.00	-8.25	Average	114	211
4	7236.88	42.76	14.36	57.11	74.00	-16.89	Peak	114	211

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 11 Mbps

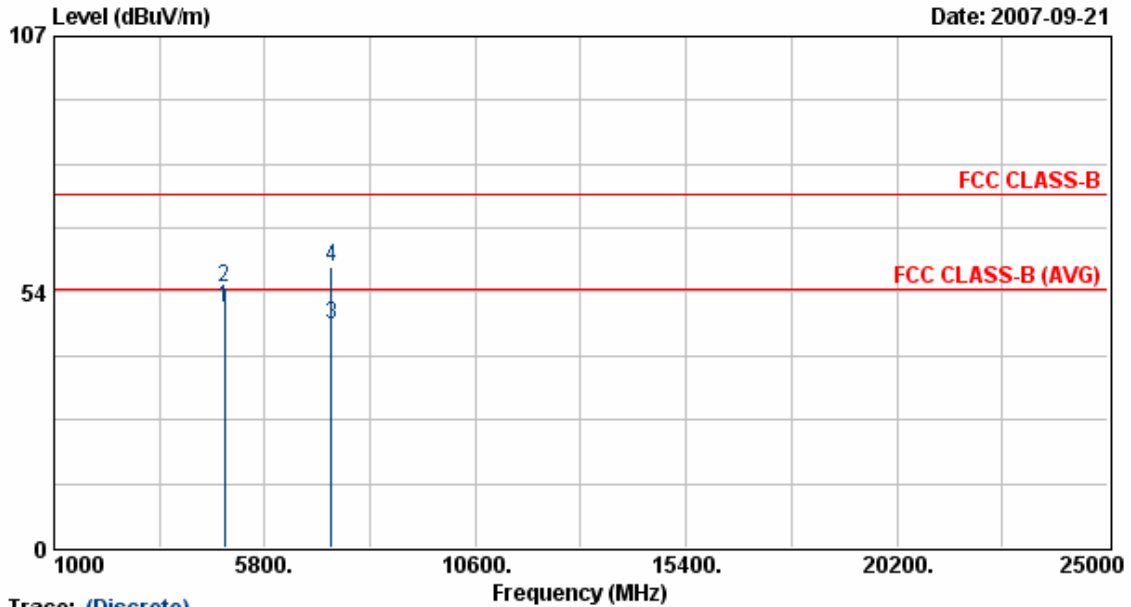


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.00	41.45	8.78	50.23	54.00	-3.77	Average	119	119
2	4874.00	45.70	8.78	54.48	74.00	-19.52	Peak	119	119
3	7309.25	32.22	14.59	46.81	54.00	-7.19	Average	119	119
4	7309.25	44.33	14.59	58.92	74.00	-15.08	Peak	119	119

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 11 Mbps

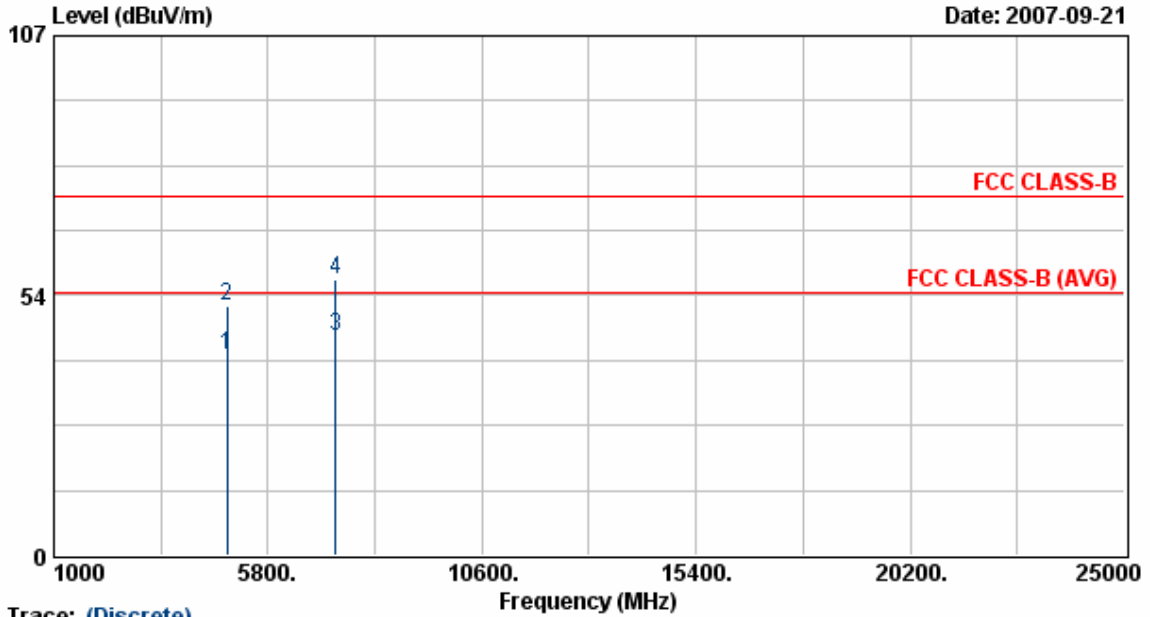


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.88	32.29	8.78	41.07	54.00	-12.93	Average	114	211
2	4873.88	42.49	8.78	51.27	74.00	-22.73	Peak	114	211
3	7310.75	30.70	14.60	45.29	54.00	-8.71	Average	114	211
4	7310.75	42.06	14.60	56.65	74.00	-17.35	Peak	114	211

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 11 Mbps

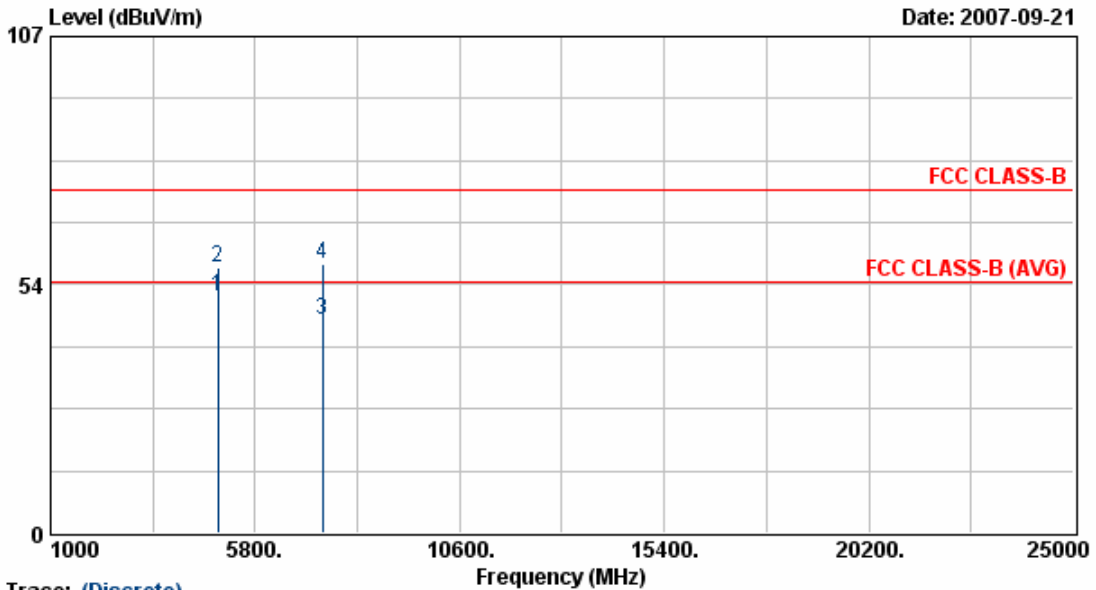


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.88	42.06	8.92	50.98	54.00	-3.02	Average	119	119
2	4923.88	48.41	8.92	57.34	74.00	-16.66	Peak	119	119
3	7387.75	31.11	14.85	45.95	54.00	-8.05	Average	119	119
4	7387.75	43.18	14.85	58.02	74.00	-15.98	Peak	119	119

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 11 Mbps

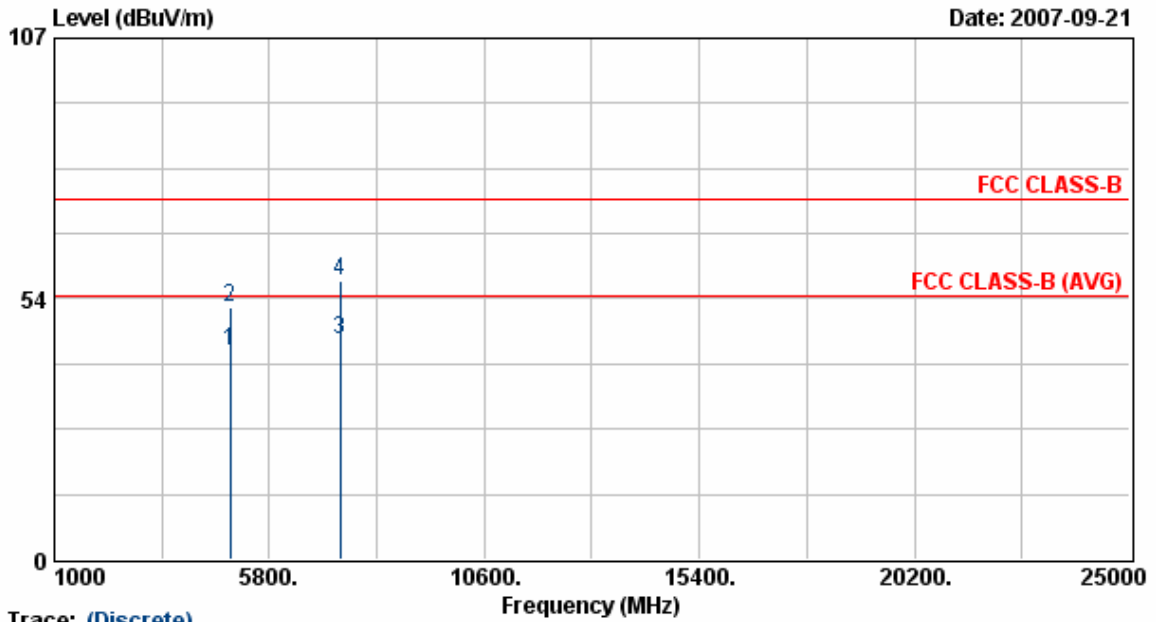


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.88	33.93	8.92	42.85	54.00	-11.15	Average	114	211
2	4923.88	42.65	8.92	51.58	74.00	-22.42	Peak	114	211
3	7386.63	30.29	14.84	45.13	54.00	-8.87	Average	114	211
4	7386.63	42.32	14.84	57.16	74.00	-16.84	Peak	114	211

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 54 Mbps

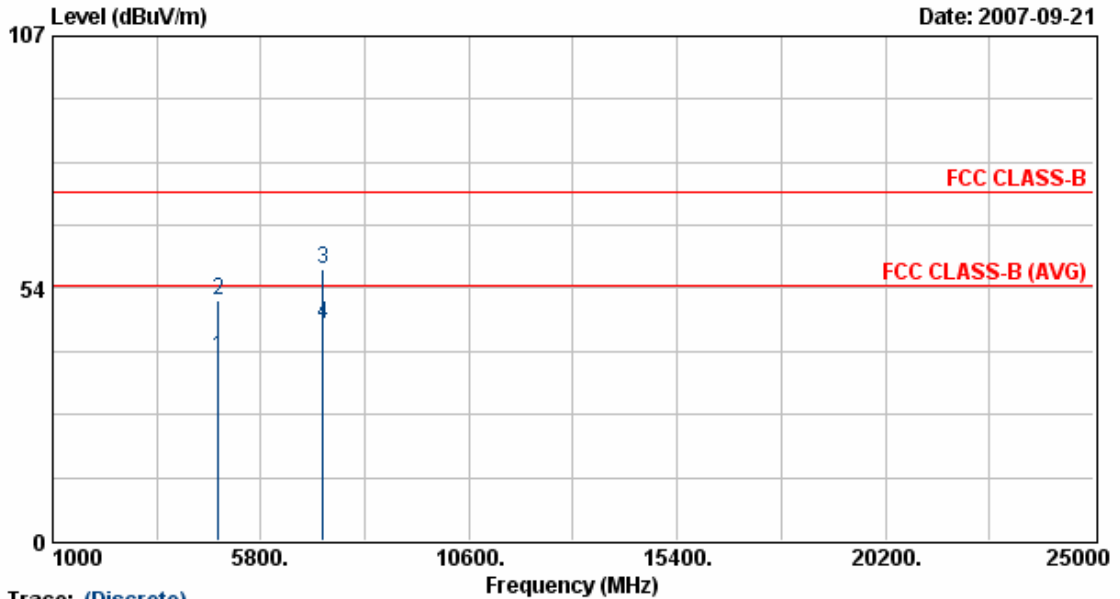


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4825.63	30.46	8.64	39.10	54.00	-14.90	Average	119	119
2	4825.63	42.40	8.64	51.05	74.00	-22.95	Peak	119	119
3	7235.75	43.28	14.35	57.63	74.00	-16.37	Peak	119	119
4	7235.75	31.71	14.35	46.06	54.00	-7.94	Average	119	119

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 54 Mbps

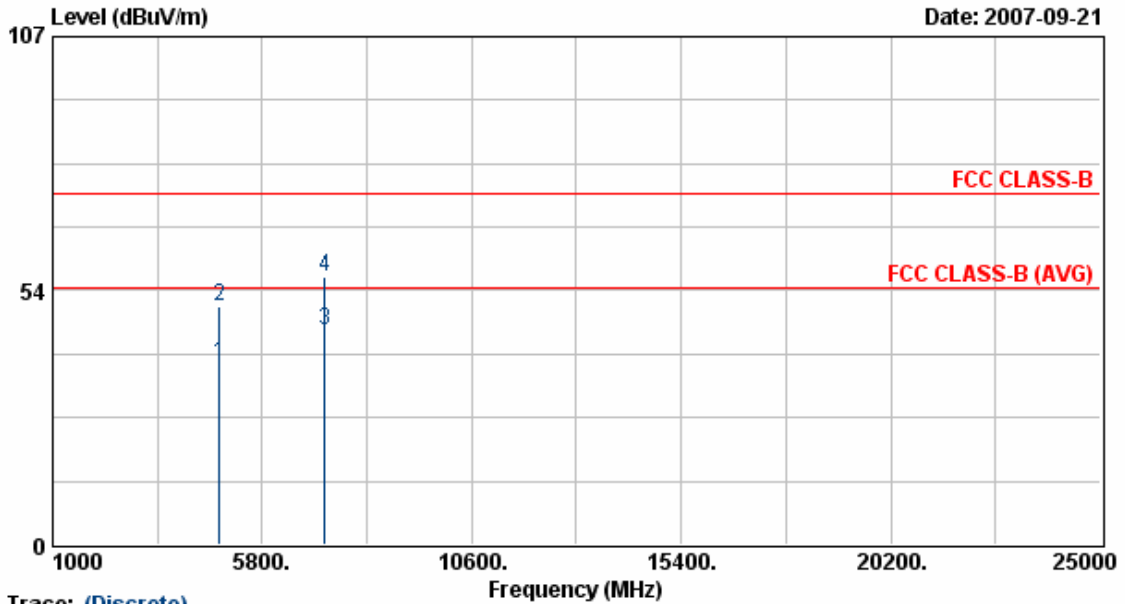


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.63	29.64	8.64	38.28	54.00	-15.72	Average	114	211
2	4823.63	41.36	8.64	50.00	74.00	-24.00	Peak	114	211
3	7236.38	30.69	14.36	45.05	54.00	-8.95	Average	114	211
4	7236.38	42.20	14.36	56.55	74.00	-17.45	Peak	114	211

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 54 Mbps

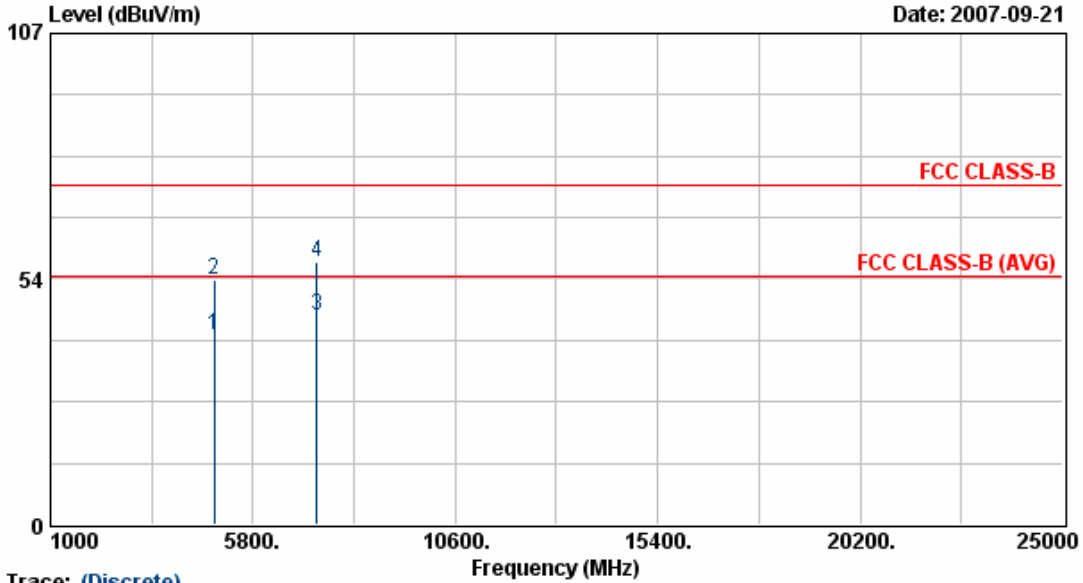


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.50	32.37	8.78	41.15	54.00	-12.85	Average	119	119
2	4873.50	44.47	8.78	53.25	74.00	-20.75	Peak	119	119
3	7310.38	30.98	14.60	45.57	54.00	-8.43	Average	119	119
4	7310.38	42.72	14.60	57.31	74.00	-16.69	Peak	119	119

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 54 Mbps

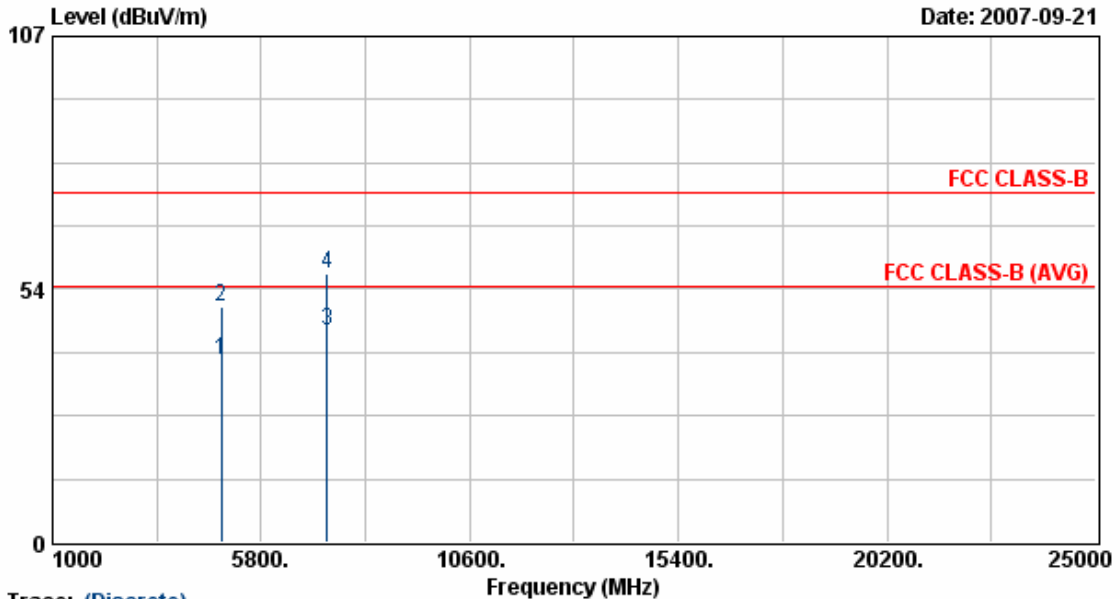


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.13	29.88	8.78	38.66	54.00	-15.34	Average	114	211
2	4873.13	41.13	8.78	49.91	74.00	-24.09	Peak	114	211
3	7310.88	30.33	14.60	44.92	54.00	-9.08	Average	114	211
4	7310.88	42.30	14.60	56.90	74.00	-17.10	Peak	114	211

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 54 Mbps

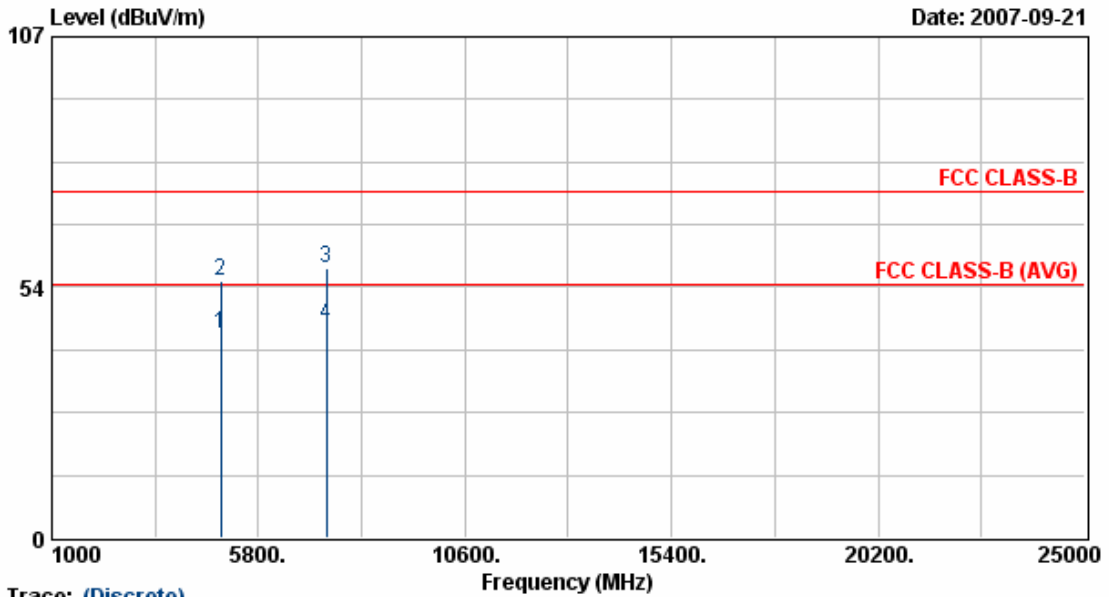


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.50	34.53	8.93	43.45	54.00	-10.55	Average	119	119
2	4924.50	45.80	8.93	54.73	74.00	-19.27	Peak	119	119
3	7386.25	42.73	14.84	57.57	74.00	-16.43	Peak	119	119
4	7386.25	30.66	14.84	45.50	54.00	-8.50	Average	119	119

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 54 Mbps

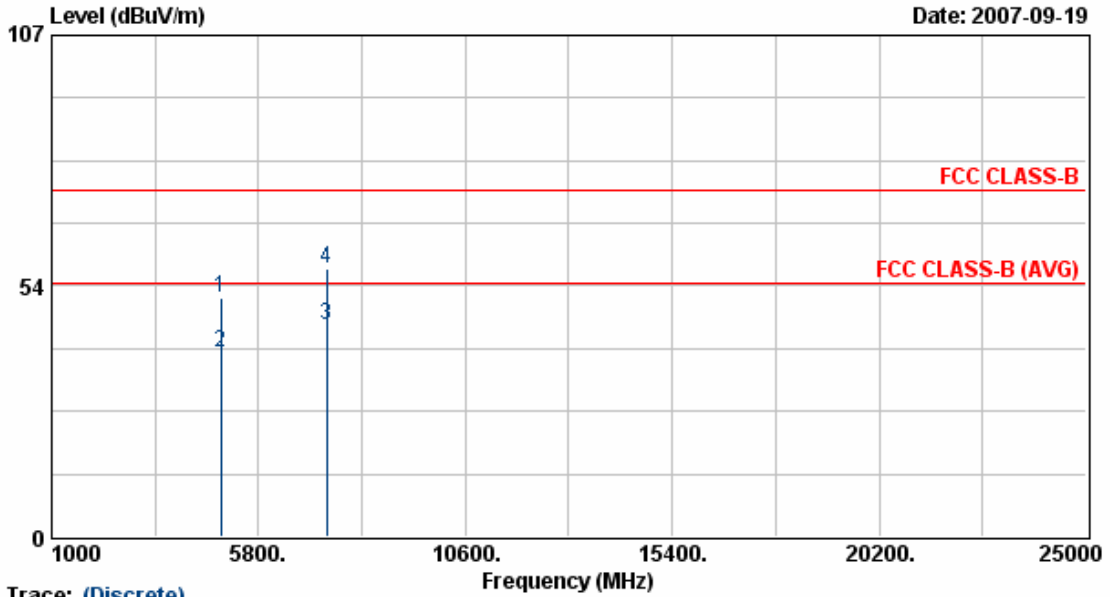


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.13	42.13	8.92	51.05	74.00	-22.95	Peak	114	211
2	4924.13	30.25	8.92	39.17	54.00	-14.83	Average	114	211
3	7386.13	30.10	14.84	44.94	54.00	-9.06	Average	114	211
4	7386.13	42.28	14.84	57.12	74.00	-16.88	Peak	114	211

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 6	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1antenna 3+4	Rate	: 108 Mbps

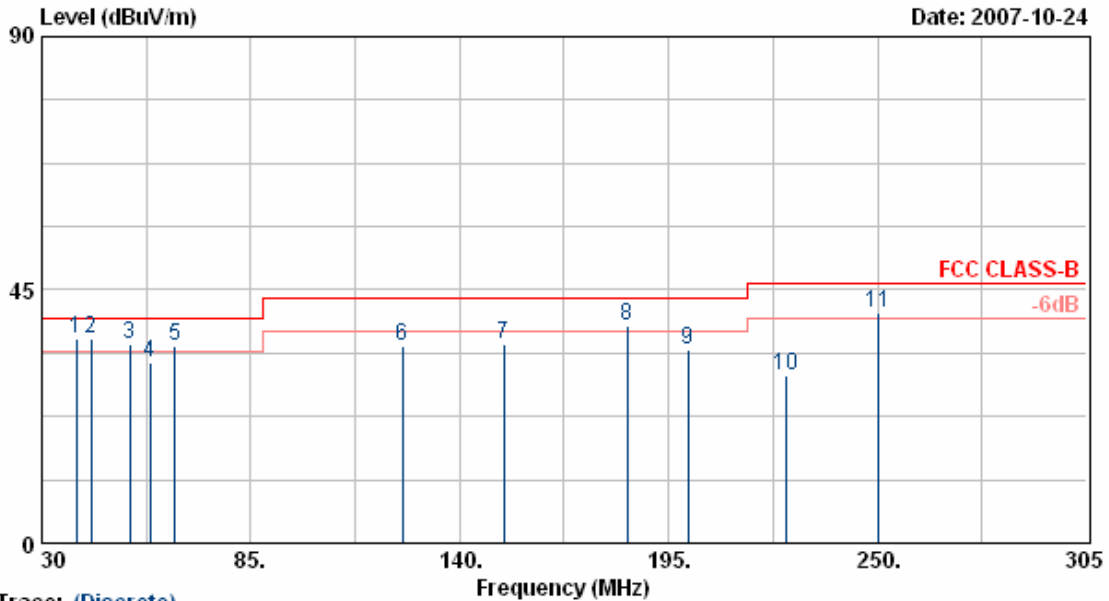


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	39.08	50.87	-14.58	36.29	40.00	-3.71	QP	300	70
2	42.95	52.15	-15.94	36.20	40.00	-3.80	QP	100	64
3	53.10	54.92	-19.52	35.40	40.00	-4.60	QP	100	71
4	58.60	49.76	-17.85	31.91	40.00	-8.09	Peak	100	69
5	64.93	57.65	-22.74	34.91	40.00	-5.09	QP	100	65
6	124.99	46.37	-11.29	35.08	43.50	-8.42	Peak	100	64
7	151.55	48.19	-12.85	35.34	43.50	-8.16	Peak	100	214
8	184.00	50.06	-11.49	38.58	43.50	-4.92	QP	100	67
9	200.23	46.98	-12.76	34.22	43.50	-9.28	Peak	100	69
10	225.80	44.35	-14.73	29.62	46.00	-16.38	Peak	100	72
11	250.00	51.87	-11.04	40.83	46.00	-5.17	QP	100	66

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 6	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 108 Mbps

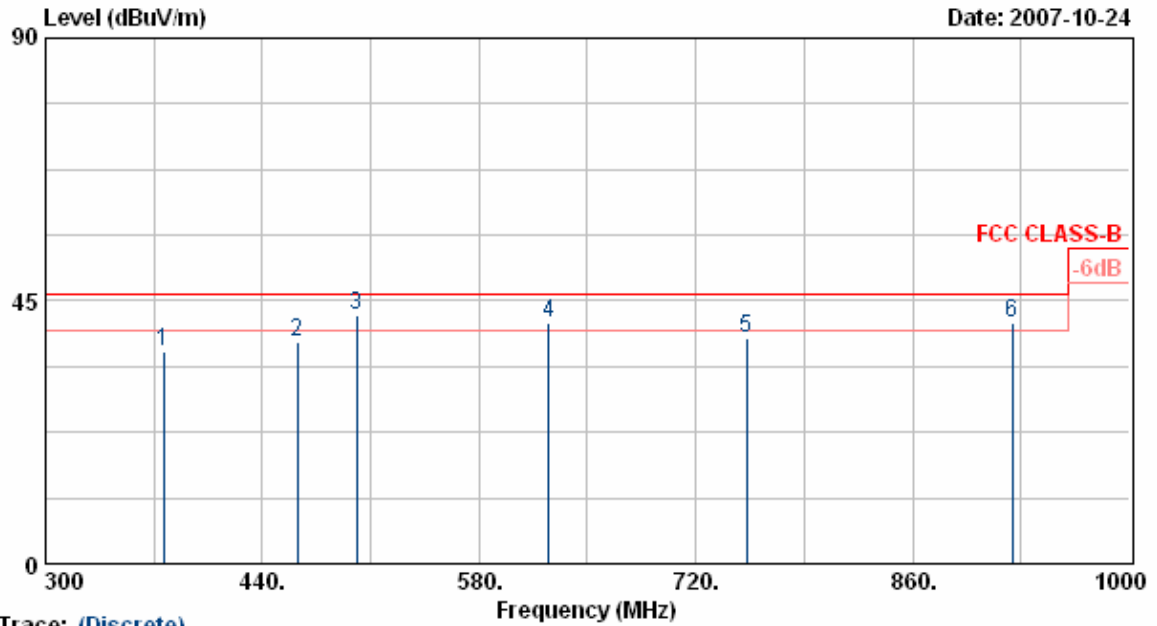


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	46.06	-9.67	36.39	46.00	-9.61	Peak	100	308
2	462.40	44.46	-6.57	37.88	46.00	-8.12	Peak	100	299
3	500.90	47.17	-4.71	42.46	46.00	-3.54	QP	100	304
4	624.83	46.57	-5.38	41.19	46.00	-4.81	QP	100	300
5	752.90	41.82	-3.25	38.57	46.00	-7.43	Peak	100	309
6	924.40	38.16	3.16	41.31	46.00	-4.69	QP	100	89

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 6	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 108 Mbps

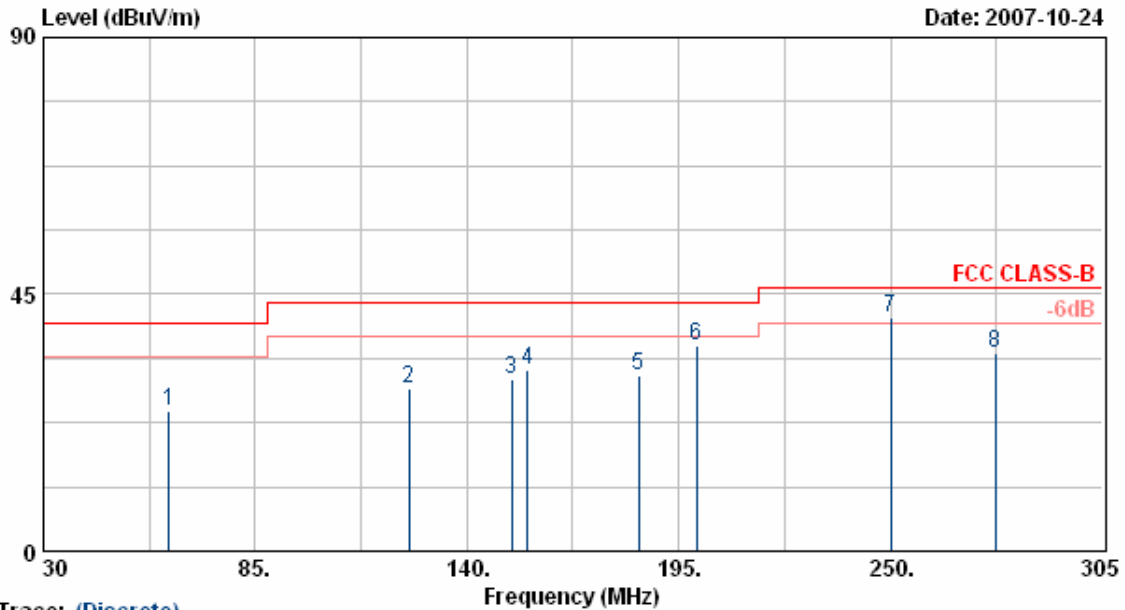


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	62.73	52.44	-27.86	24.58	40.00	-15.42	Peak	400	64
2	125.00	48.67	-20.04	28.63	43.50	-14.87	Peak	400	62
3	151.55	49.38	-19.23	30.15	43.50	-13.35	Peak	400	74
4	155.65	50.72	-19.04	31.68	43.50	-11.82	Peak	400	79
5	184.55	52.25	-21.37	30.88	43.50	-12.62	Peak	400	77
6	199.68	54.94	-19.04	35.90	43.50	-7.60	Peak	400	194
7	250.01	56.71	-15.68	41.03	46.00	-4.97	QP	400	67
8	277.23	48.23	-13.59	34.64	46.00	-11.36	Peak	400	71

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 6	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 108 Mbps

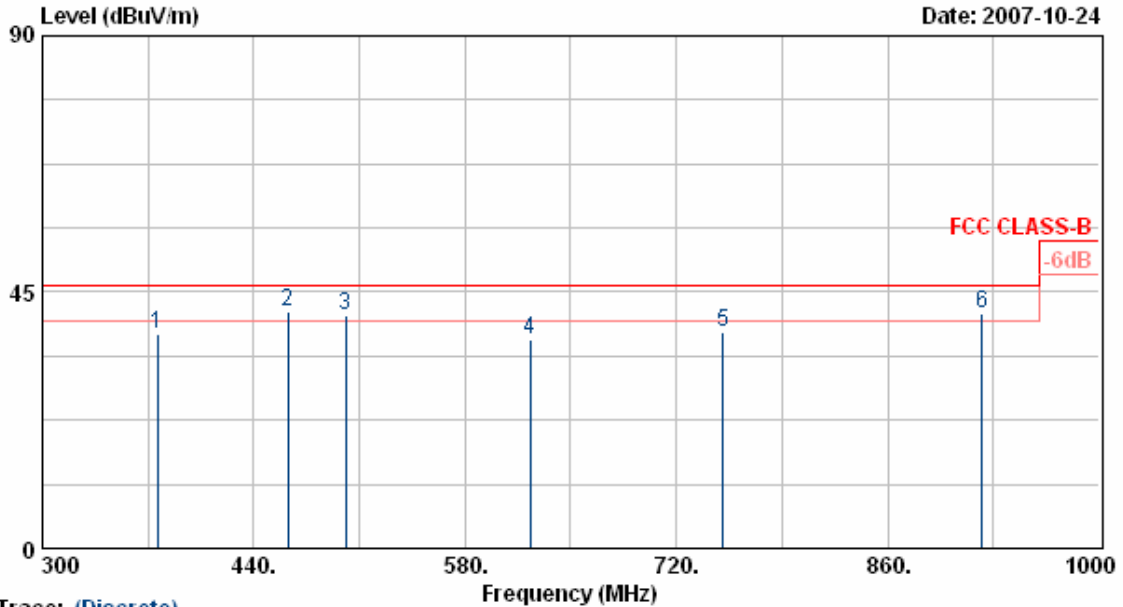


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	48.15	-10.46	37.69	46.00	-8.31	Peak	100	219
2	462.40	49.28	-7.63	41.65	46.00	-4.35	QP	400	210
3	500.90	47.45	-6.57	40.88	46.00	-5.12	QP	100	44
4	623.40	41.37	-4.80	36.56	46.00	-9.44	Peak	100	214
5	750.80	43.13	-5.20	37.93	46.00	-8.07	Peak	100	216
6	922.30	38.42	2.78	41.20	46.00	-4.80	QP	100	211

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 108 Mbps

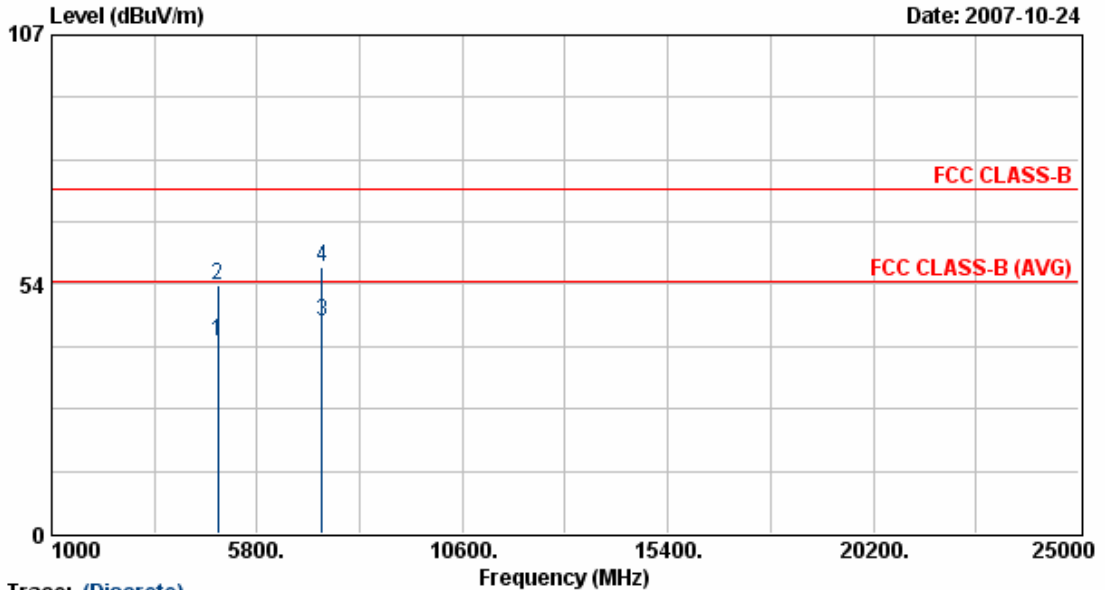


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.50	32.36	8.78	41.14	54.00	-12.86	Average	119	119
2	4873.50	44.66	8.78	53.44	74.00	-20.56	Peak	119	119
3	7310.38	30.77	14.60	45.37	54.00	-8.63	Average	119	119
4	7310.38	42.77	14.60	57.36	74.00	-16.64	Peak	119	119

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 6	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 3+4	Rate	: 108 Mbps

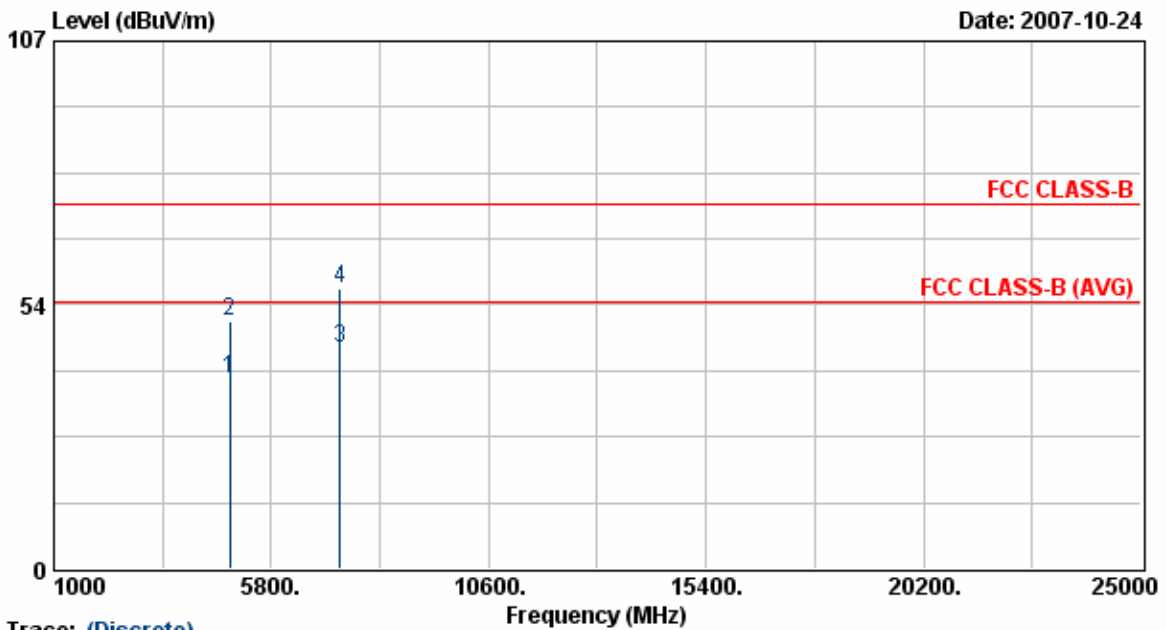


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV/m	dB		cm	Deg
1	4873.13	29.59	8.78	38.37	54.00	-15.63	Average	114	211
2	4873.13	41.43	8.78	50.21	74.00	-23.79	Peak	114	211
3	7310.88	30.33	14.60	44.93	54.00	-9.07	Average	114	211
4	7310.88	42.35	14.60	56.95	74.00	-17.05	Peak	114	211

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 54 Mbps

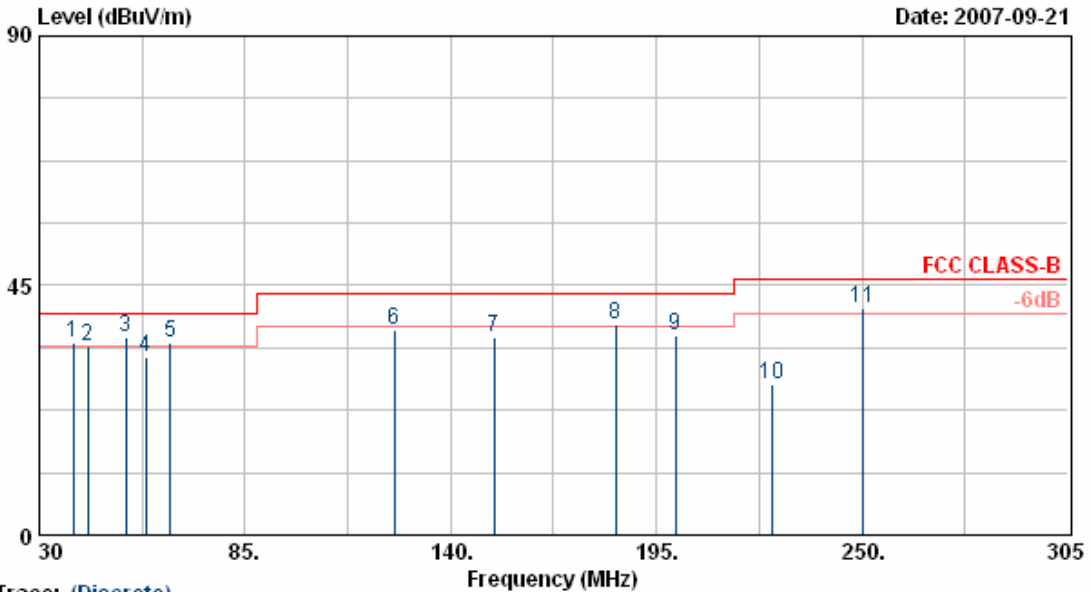


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	39.08	49.25	-14.58	34.67	40.00	-5.33	QP	300	113
2	42.95	50.11	-15.94	34.17	40.00	-5.83	QP	100	120
3	53.10	55.10	-19.52	35.58	40.00	-4.42	QP	100	119
4	58.60	49.98	-17.85	32.13	40.00	-7.87	Peak	100	121
5	64.93	57.33	-22.74	34.59	40.00	-5.41	QP	100	113
6	124.99	48.12	-11.29	36.83	43.50	-6.67	Peak	100	122
7	151.55	48.37	-12.85	35.52	43.50	-7.98	Peak	100	125
8	184.00	49.33	-11.49	37.84	43.50	-5.66	QP	100	122
9	200.23	48.77	-12.76	36.01	43.50	-7.49	Peak	100	81
10	225.80	41.95	-14.73	27.22	46.00	-18.78	Peak	100	119
11	250.00	51.99	-11.04	40.95	46.00	-5.05	QP	100	120

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 54 Mbps

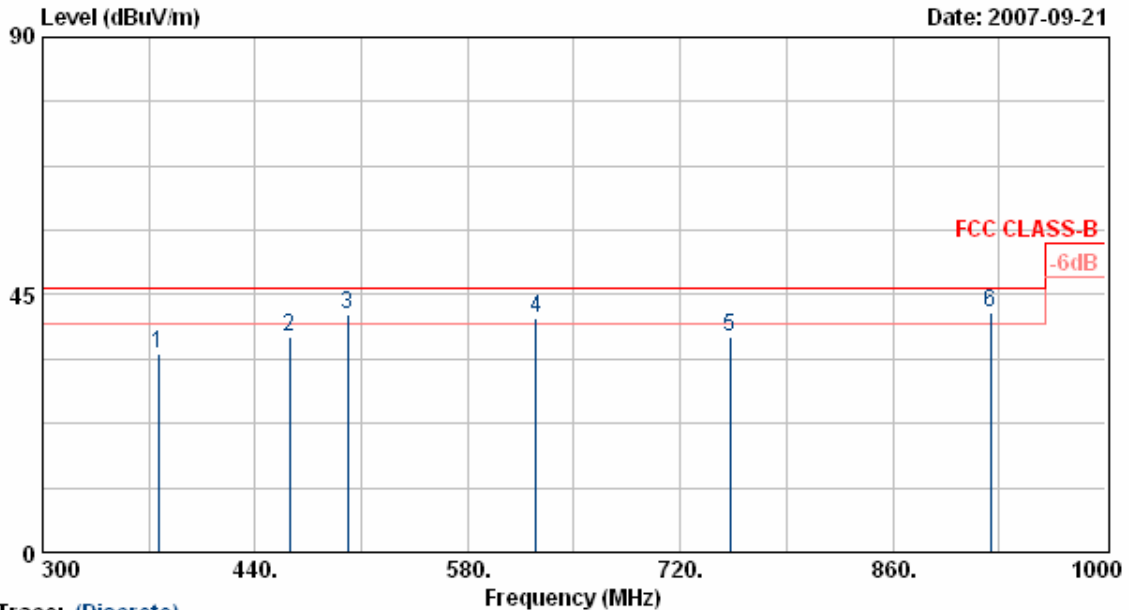


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	44.31	-9.67	34.64	46.00	-11.36	Peak	100	309
2	462.40	44.19	-6.57	37.61	46.00	-8.39	Peak	100	315
3	500.90	46.12	-4.71	41.41	46.00	-4.59	QP	100	311
4	624.83	46.15	-5.38	40.77	46.00	-5.23	QP	100	198
5	752.90	40.98	-3.25	37.73	46.00	-8.27	Peak	100	315
6	924.40	38.77	3.16	41.93	46.00	-4.07	QP	100	314

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 54 Mbps

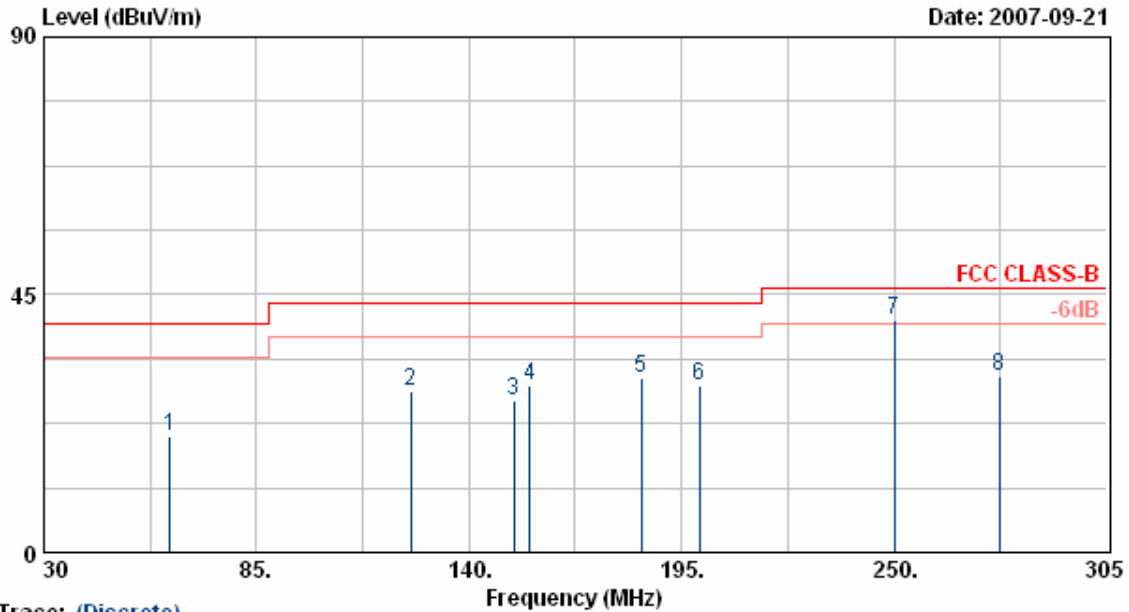


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	62.73	48.11	-27.86	20.25	40.00	-19.75	Peak	400	46
2	125.00	48.12	-20.04	28.08	43.50	-15.42	Peak	400	48
3	151.55	45.77	-19.23	26.54	43.50	-16.96	Peak	400	44
4	155.65	48.33	-19.04	29.29	43.50	-14.21	Peak	400	42
5	184.55	51.66	-21.37	30.29	43.50	-13.21	Peak	400	89
6	199.68	48.12	-19.04	29.08	43.50	-14.42	Peak	400	41
7	250.01	56.33	-15.68	40.65	46.00	-5.35	QP	400	44
8	277.23	44.30	-13.59	30.71	46.00	-15.29	Peak	400	93

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 54 Mbps

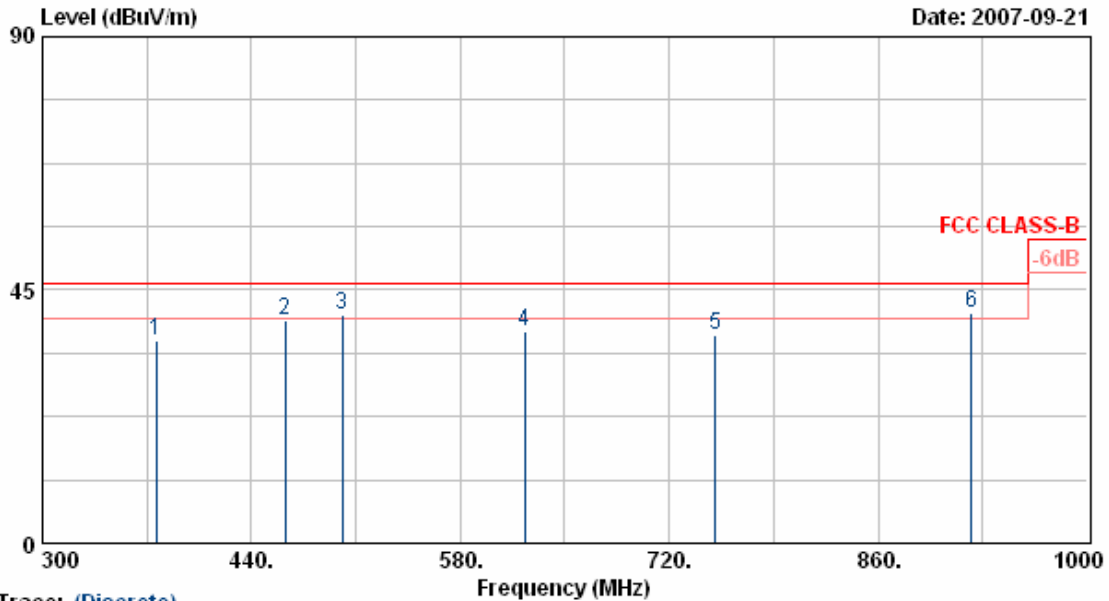


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	46.33	-10.46	35.87	46.00	-10.13	Peak	100	268
2	462.40	47.15	-7.63	39.52	46.00	-6.48	Peak	400	270
3	500.90	47.15	-6.57	40.58	46.00	-5.42	QP	100	268
4	623.40	42.32	-4.80	37.52	46.00	-8.48	Peak	100	273
5	750.80	42.33	-5.20	37.13	46.00	-8.87	Peak	100	279
6	922.30	38.19	2.78	40.97	46.00	-5.03	QP	100	158

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 11 Mbps

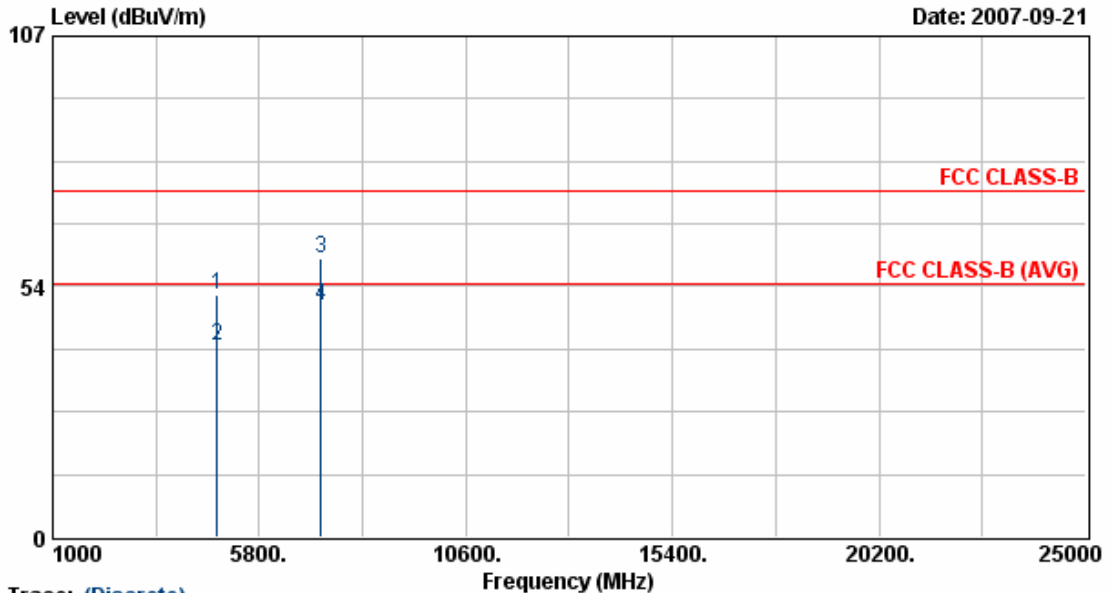


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.88	43.07	8.64	51.71	74.00	-22.29	Peak	115	200
2	4823.88	32.06	8.64	40.70	54.00	-13.30	Average	115	200
3	7235.13	45.27	14.35	59.62	74.00	-14.38	Peak	115	200
4	7235.13	35.25	14.35	49.60	54.00	-4.40	Average	115	200

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 11 Mbps

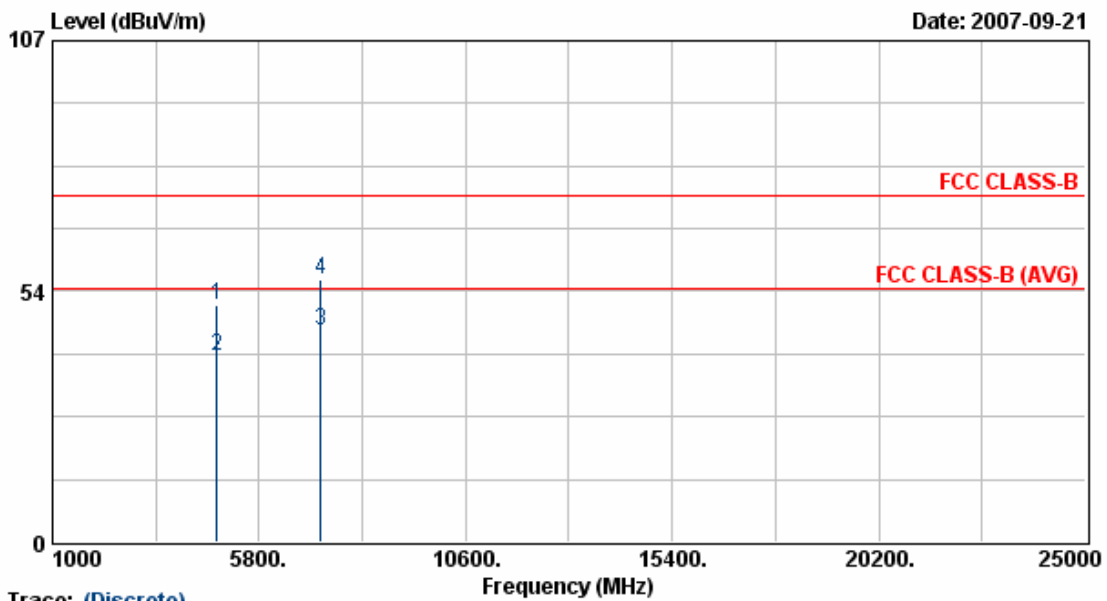


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.00	42.06	8.64	50.70	74.00	-23.30	Peak	114	210
2	4824.00	31.17	8.64	39.81	54.00	-14.19	Average	114	210
3	7235.75	30.71	14.35	45.07	54.00	-8.93	Average	114	210
4	7235.75	41.85	14.35	56.20	74.00	-17.80	Peak	114	210

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 11 Mbps

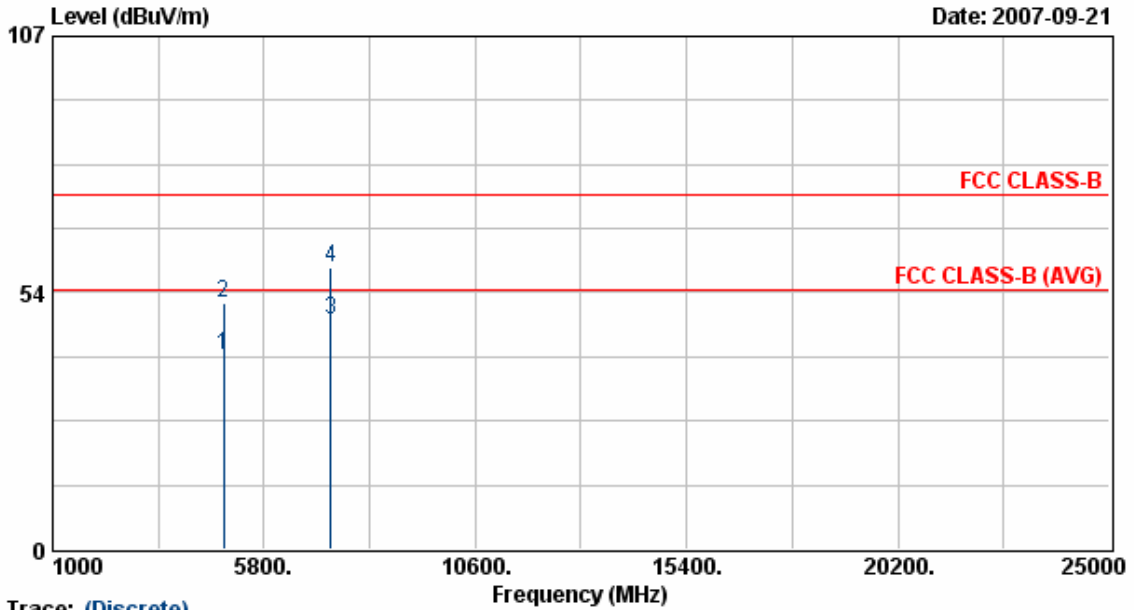


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.00	31.73	8.78	40.51	54.00	-13.49	Average	115	200
2	4874.00	42.51	8.78	51.29	74.00	-22.71	Peak	115	200
3	7309.25	33.26	14.59	47.85	54.00	-6.15	Average	115	200
4	7309.25	44.29	14.59	58.88	74.00	-15.12	Peak	115	200

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 11 Mbps

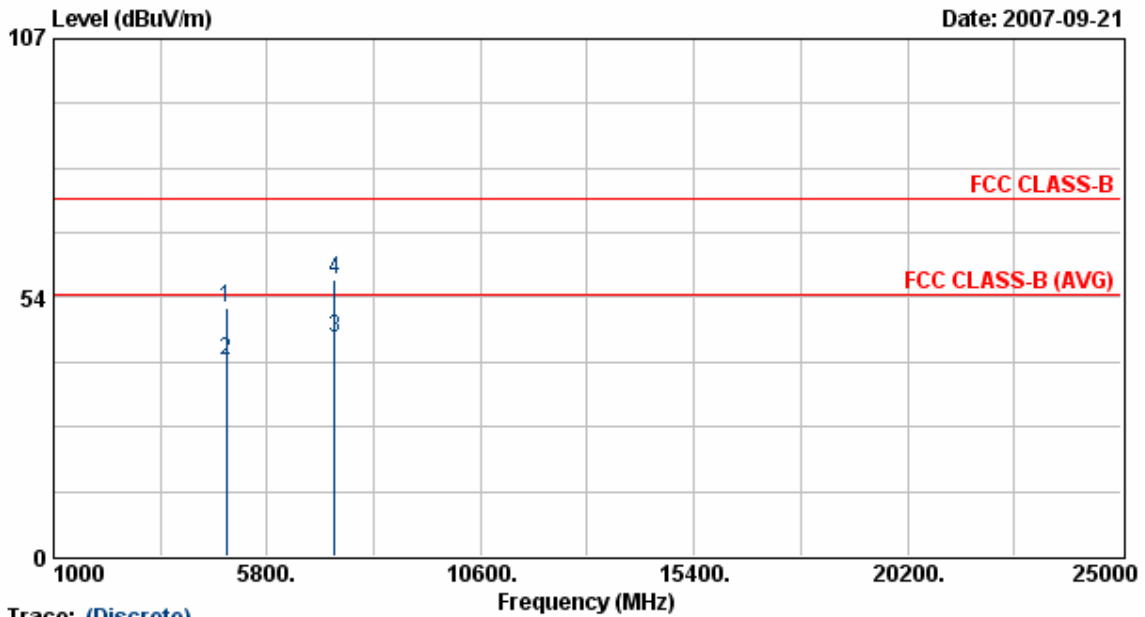


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.88	42.62	8.78	51.40	74.00	-22.60	Peak	114	210
2	4873.88	31.74	8.78	40.52	54.00	-13.48	Average	114	210
3	7310.38	30.42	14.60	45.02	54.00	-8.98	Average	114	210
4	7310.38	42.51	14.60	57.10	74.00	-16.90	Peak	114	210

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 11 Mbps

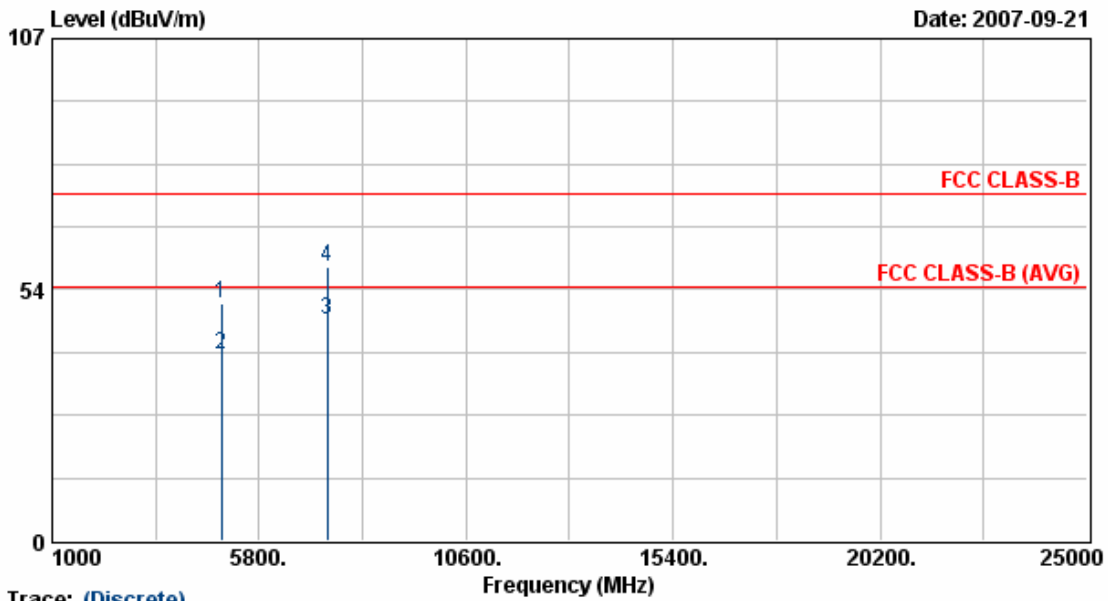


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.00	41.74	8.92	50.66	74.00	-23.34	Peak	115	200
2	4924.00	30.76	8.92	39.68	54.00	-14.32	Average	115	200
3	7387.75	32.09	14.85	46.94	54.00	-7.06	Average	115	200
4	7387.75	43.65	14.85	58.49	74.00	-15.51	Peak	115	200

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 11 Mbps

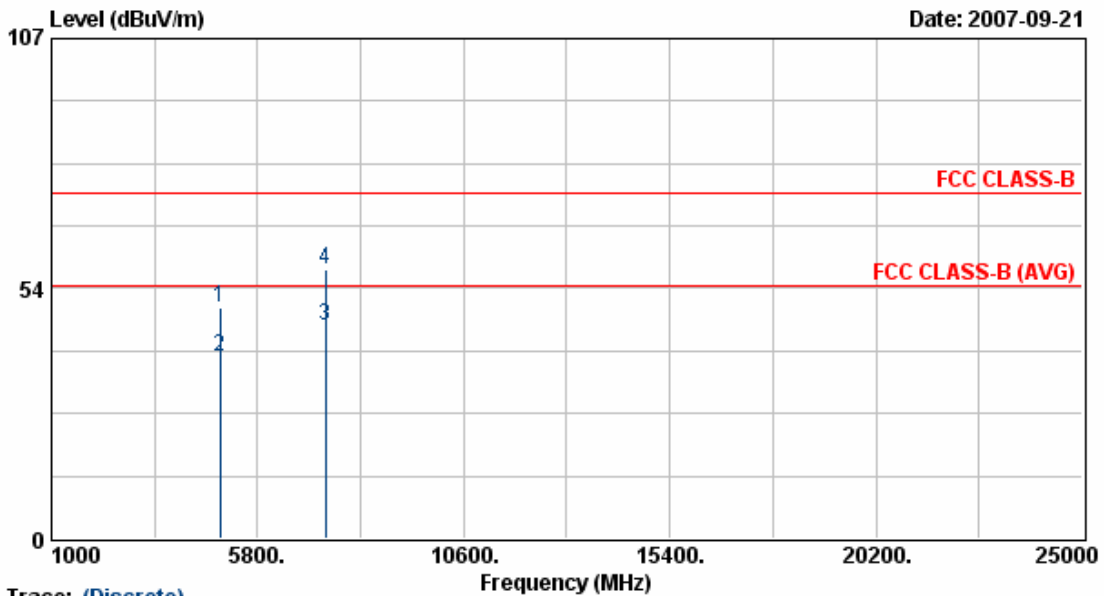


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.88	40.34	8.92	49.26	74.00	-24.74	Peak	114	210
2	4923.88	29.87	8.92	38.79	54.00	-15.21	Average	114	210
3	7384.38	30.66	14.84	45.49	54.00	-8.51	Average	114	210
4	7384.38	42.56	14.84	57.40	74.00	-16.60	Peak	114	210

- Notes:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
 5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
 6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 54 Mbps

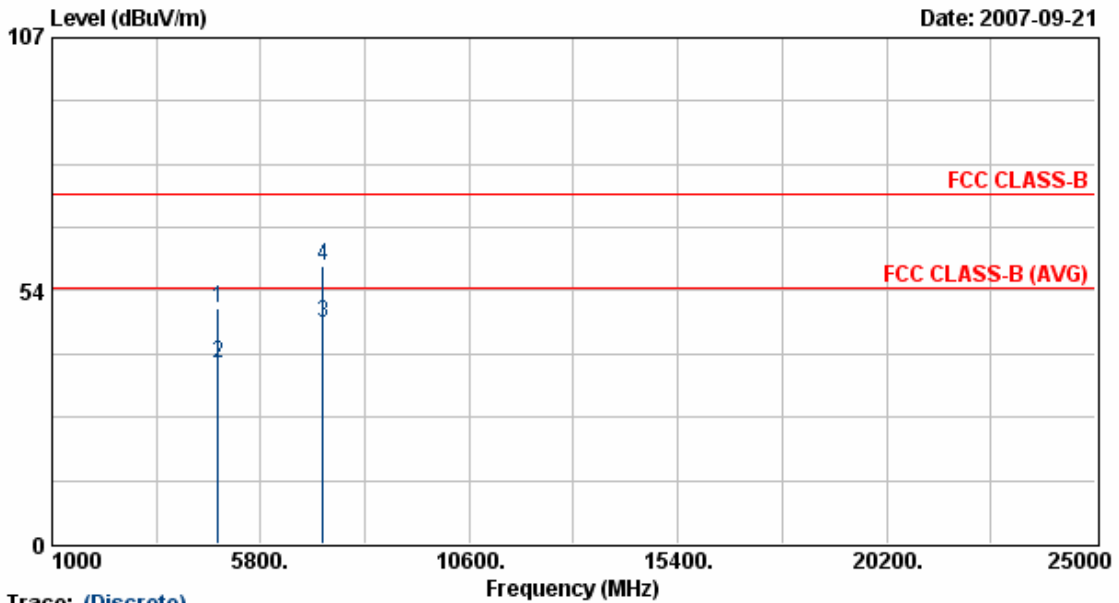


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.75	41.29	8.64	49.93	74.00	-24.07	Peak	115	200
2	4823.75	29.57	8.64	38.21	54.00	-15.79	Average	115	200
3	7235.00	32.46	14.35	46.81	54.00	-7.19	Average	115	200
4	7235.00	44.50	14.35	58.85	74.00	-15.15	Peak	115	200

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 54 Mbps

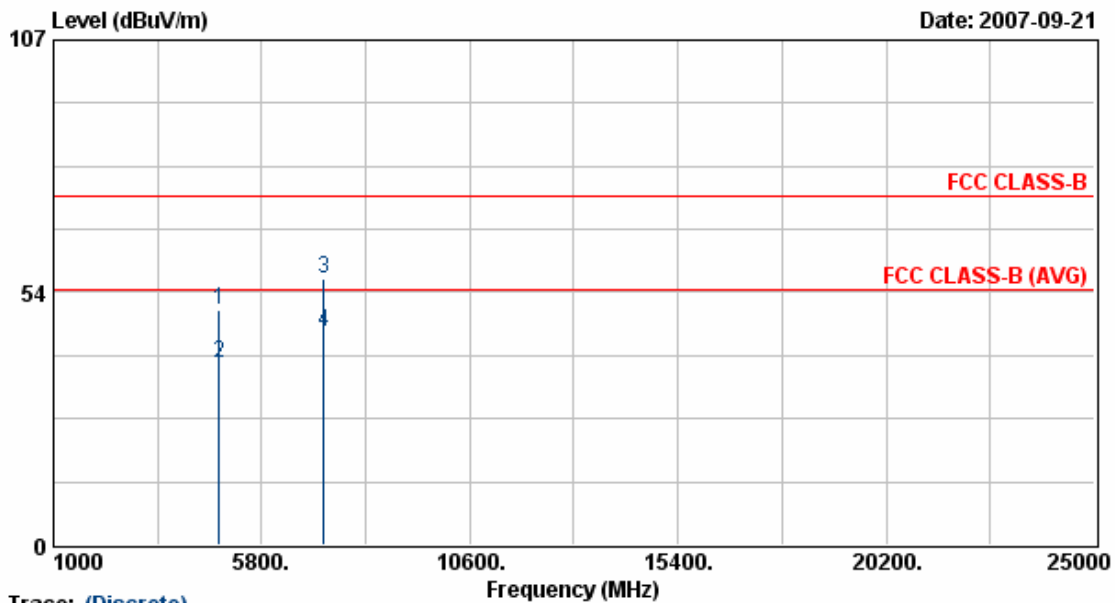


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.00	41.24	8.64	49.88	74.00	-24.12	Peak	114	210
2	4824.00	29.69	8.64	38.33	54.00	-15.67	Average	114	210
3	7236.13	42.24	14.36	56.60	74.00	-17.40	Peak	114	210
4	7236.13	30.84	14.36	45.19	54.00	-8.81	Average	114	210

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 54 Mbps

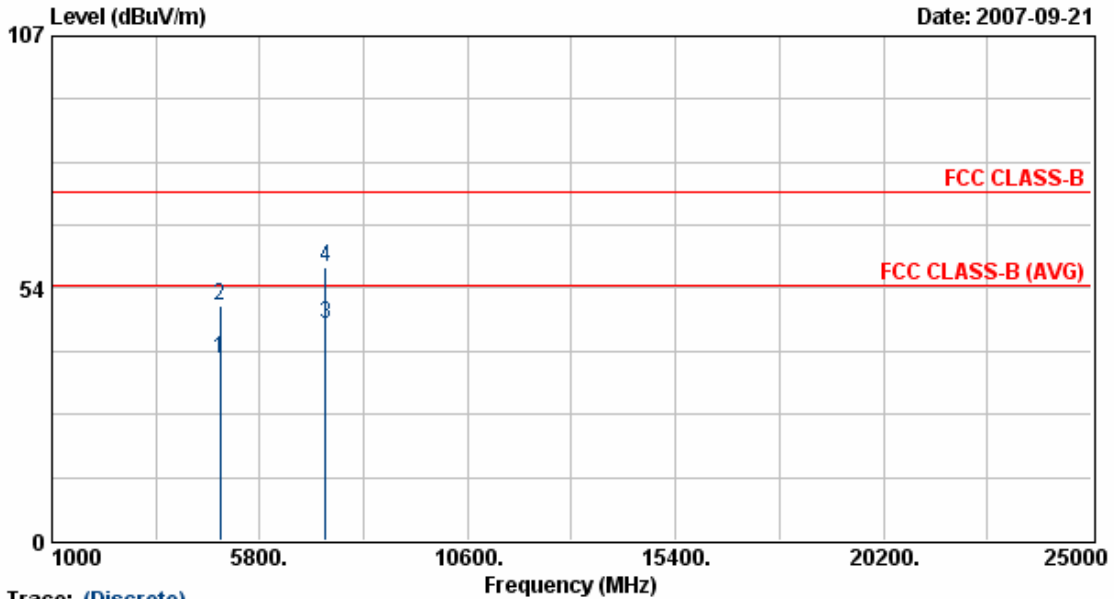


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.88	29.62	8.78	38.40	54.00	-15.60	Average	115	200
2	4873.88	40.87	8.78	49.66	74.00	-24.34	Peak	115	200
3	7309.75	31.38	14.59	45.97	54.00	-8.03	Average	115	200
4	7309.75	43.44	14.59	58.03	74.00	-15.97	Peak	115	200

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 54 Mbps

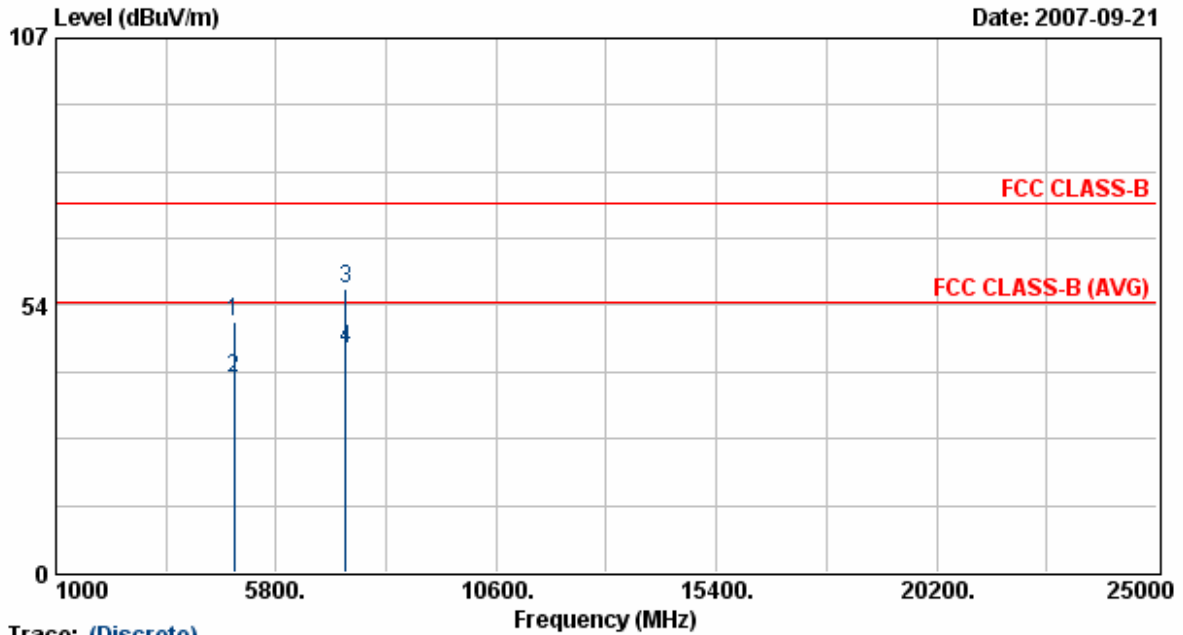


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.88	41.28	8.78	50.06	74.00	-23.94	Peak	114	210
2	4873.88	30.17	8.78	38.95	54.00	-15.05	Average	114	210
3	7311.38	42.21	14.60	56.81	74.00	-17.19	Peak	114	210
4	7311.38	30.18	14.60	44.78	54.00	-9.22	Average	114	210

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 54 Mbps

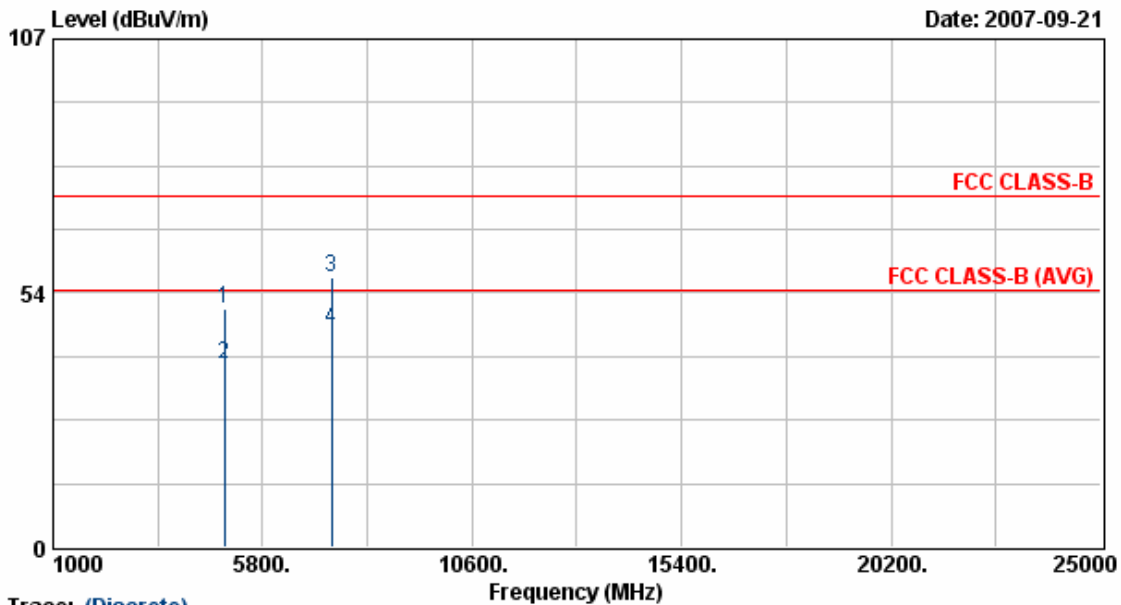


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.63	41.15	8.92	50.07	74.00	-23.93	Peak	115	200
2	4923.63	29.67	8.92	38.59	54.00	-15.41	Average	115	200
3	7386.00	42.15	14.84	56.99	74.00	-17.01	Peak	115	200
4	7386.00	30.98	14.84	45.82	54.00	-8.18	Average	115	200

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 54 Mbps

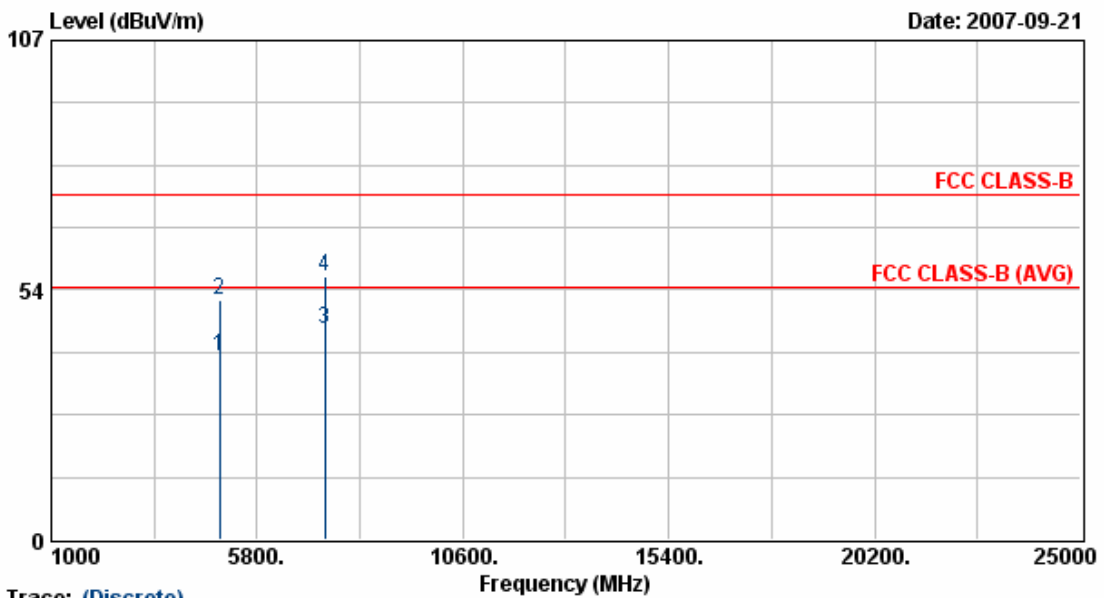


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4922.75	30.47	8.92	39.39	54.00	-14.61	Average	114	210
2	4922.75	42.40	8.92	51.32	74.00	-22.68	Peak	114	210
3	7386.13	30.22	14.84	45.06	54.00	-8.94	Average	114	210
4	7386.13	41.47	14.84	56.31	74.00	-17.69	Peak	114	210

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1antenna 4	Rate	: 108 Mbps

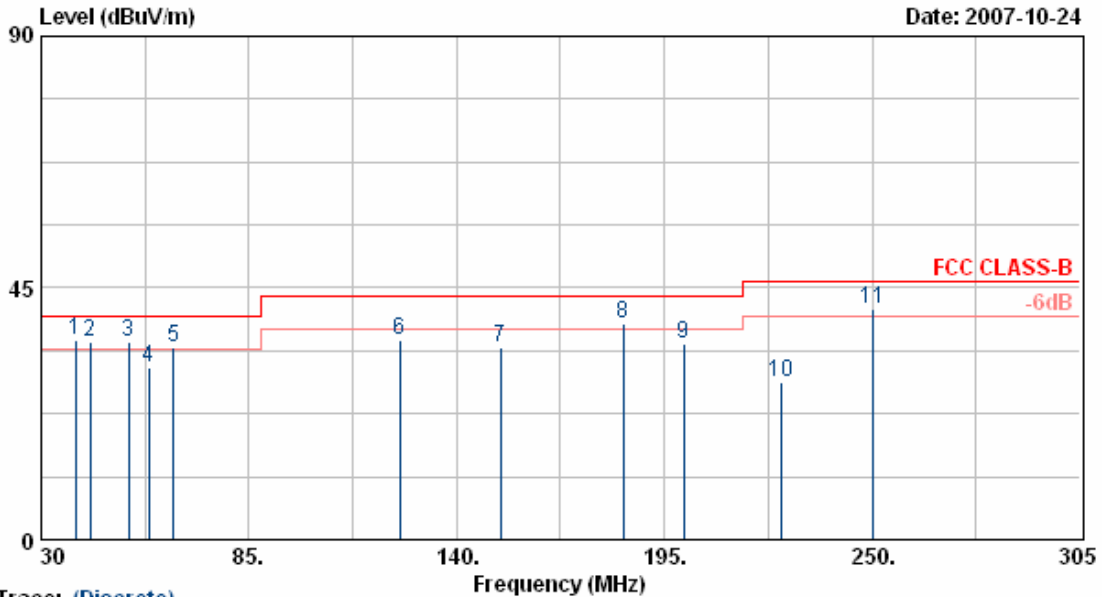


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	39.08	50.35	-14.58	35.77	40.00	-4.23	QP	300	113
2	42.95	51.22	-15.94	35.28	40.00	-4.72	QP	100	120
3	53.10	54.92	-19.52	35.40	40.00	-4.60	QP	100	119
4	58.60	48.77	-17.85	30.92	40.00	-9.08	Peak	100	121
5	64.93	57.12	-22.74	34.38	40.00	-5.62	QP	100	113
6	124.99	47.01	-11.29	35.72	43.50	-7.78	Peak	100	122
7	151.55	47.26	-12.85	34.41	43.50	-9.09	Peak	100	125
8	184.00	50.22	-11.49	38.73	43.50	-4.77	QP	100	122
9	200.23	47.66	-12.76	34.90	43.50	-8.60	Peak	100	81
10	225.80	42.84	-14.73	28.11	46.00	-17.89	Peak	100	119
11	250.00	52.16	-11.04	41.12	46.00	-4.88	QP	100	120

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 108 Mbps

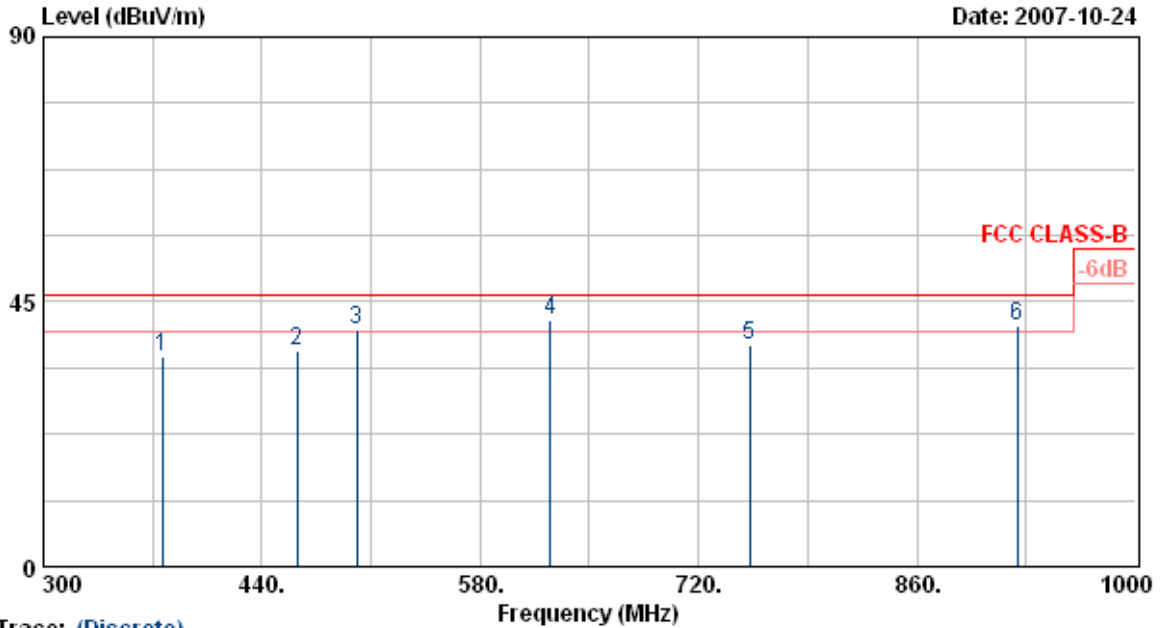


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	45.28	-9.67	35.61	46.00	-10.39	Peak	100	309
2	462.40	43.07	-6.57	36.50	46.00	-9.50	Peak	100	315
3	500.90	45.09	-4.71	40.38	46.00	-5.62	QP	100	311
4	624.83	47.26	-5.38	41.88	46.00	-4.12	QP	100	198
5	752.90	41.02	-3.25	37.77	46.00	-8.23	Peak	100	315
6	924.40	37.65	3.16	40.80	46.00	-5.20	QP	100	314

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 108 Mbps

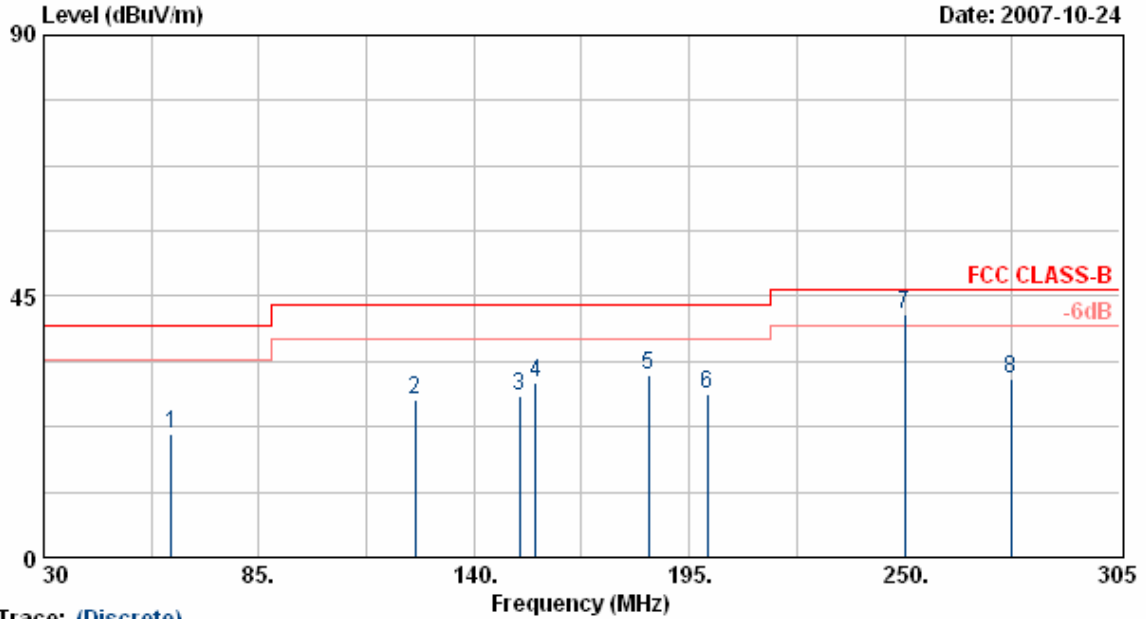


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	62.73	49.23	-27.86	21.37	40.00	-18.63	Peak	400	46
2	125.00	47.22	-20.04	27.18	43.50	-16.32	Peak	400	48
3	151.55	46.88	-19.23	27.65	43.50	-15.85	Peak	400	44
4	155.65	49.22	-19.04	30.18	43.50	-13.32	Peak	400	42
5	184.55	52.77	-21.37	31.40	43.50	-12.10	Peak	400	89
6	199.68	47.23	-19.04	28.19	43.50	-15.31	Peak	400	41
7	250.01	57.49	-15.68	41.81	46.00	-4.19	QP	400	44
8	277.23	44.25	-13.59	30.66	46.00	-15.34	Peak	400	93

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 108 Mbps

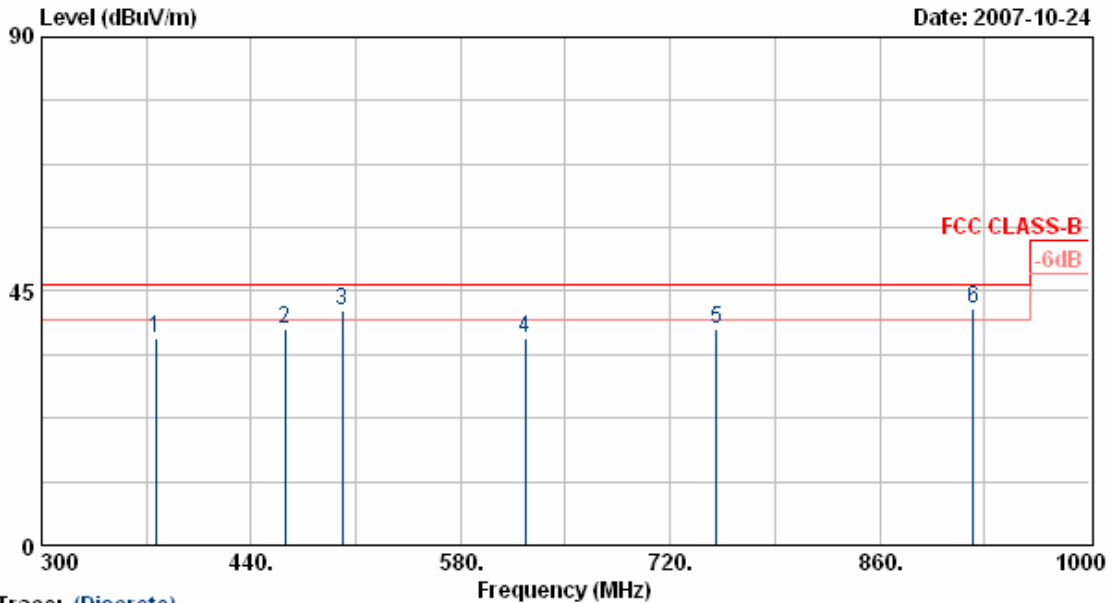


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	47.22	-10.46	36.76	46.00	-9.24	Peak	100	268
2	462.40	46.04	-7.63	38.41	46.00	-7.59	Peak	400	270
3	500.90	48.27	-6.57	41.70	46.00	-4.30	QP	100	268
4	623.40	41.43	-4.80	36.63	46.00	-9.37	Peak	100	273
5	750.80	43.44	-5.20	38.24	46.00	-7.76	Peak	100	279
6	922.30	39.24	2.78	42.02	46.00	-3.98	QP	100	158

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 108 Mbps

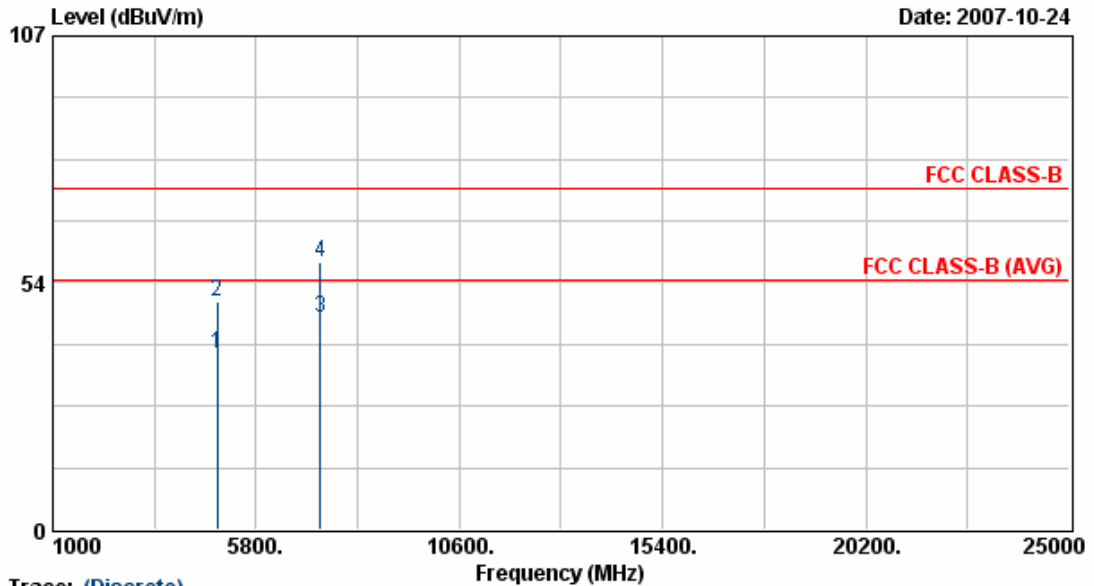


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.88	29.52	8.78	38.30	54.00	-15.70	Average	115	200
2	4873.88	40.74	8.78	49.52	74.00	-24.48	Peak	115	200
3	7309.75	31.33	14.59	45.92	54.00	-8.08	Average	115	200
4	7309.75	43.47	14.59	58.06	74.00	-15.94	Peak	115	200

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 4	Rate	: 108 Mbps

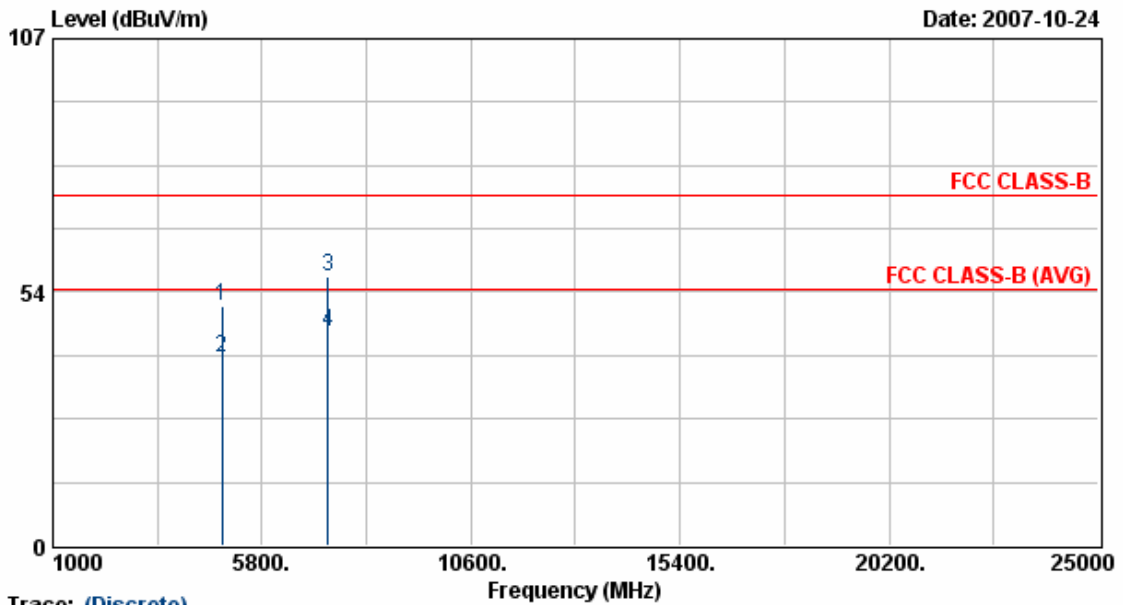


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.88	41.82	8.78	50.60	74.00	-23.40	Peak	114	210
2	4873.88	30.87	8.78	39.65	54.00	-14.35	Average	114	210
3	7311.38	42.21	14.60	56.81	74.00	-17.19	Peak	114	210
4	7311.38	30.42	14.60	45.02	54.00	-8.98	Average	114	210

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 54 Mbps

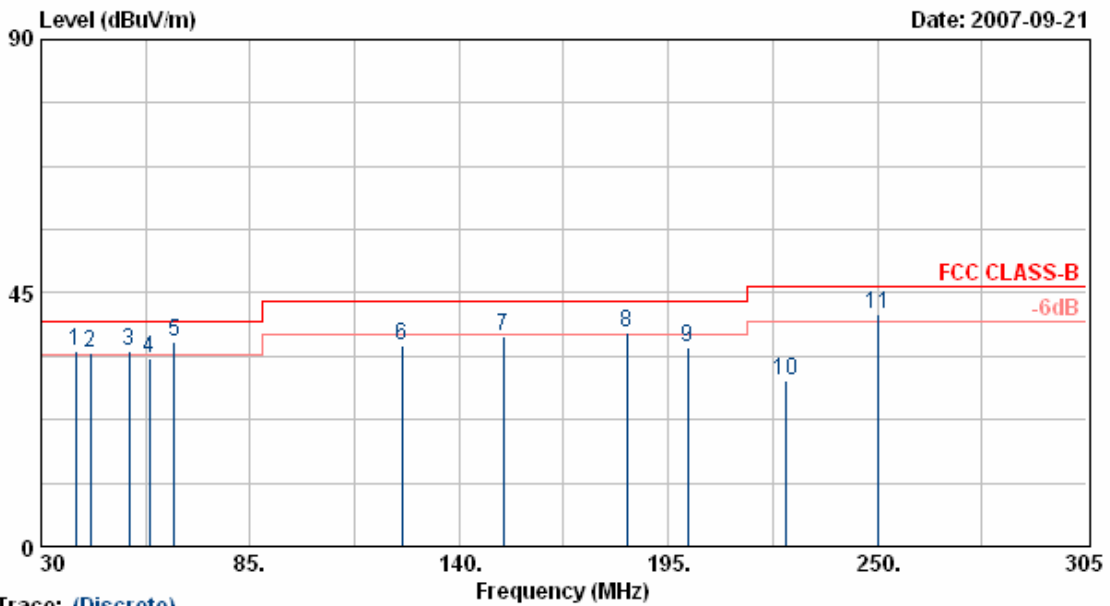


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV/m	dB		cm	Deg
1	39.08	49.12	-14.58	34.54	40.00	-5.46	QP	300	76
2	42.95	50.22	-15.94	34.28	40.00	-5.72	QP	100	71
3	53.10	54.15	-19.52	34.63	40.00	-5.37	QP	100	69
4	58.60	51.22	-17.85	33.37	40.00	-6.63	Peak	100	72
5	64.93	58.93	-22.74	36.19	40.00	-3.81	QP	100	75
6	124.99	46.88	-11.29	35.59	43.50	-7.91	Peak	100	66
7	151.55	50.12	-12.85	37.27	43.50	-6.23	Peak	100	189
8	184.00	49.32	-11.49	37.83	43.50	-5.67	QP	100	73
9	200.23	48.10	-12.76	35.34	43.50	-8.16	Peak	100	75
10	225.80	44.33	-14.73	29.60	46.00	-16.40	Peak	100	70
11	250.00	52.13	-11.04	41.09	46.00	-4.91	QP	100	73

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 54 Mbps

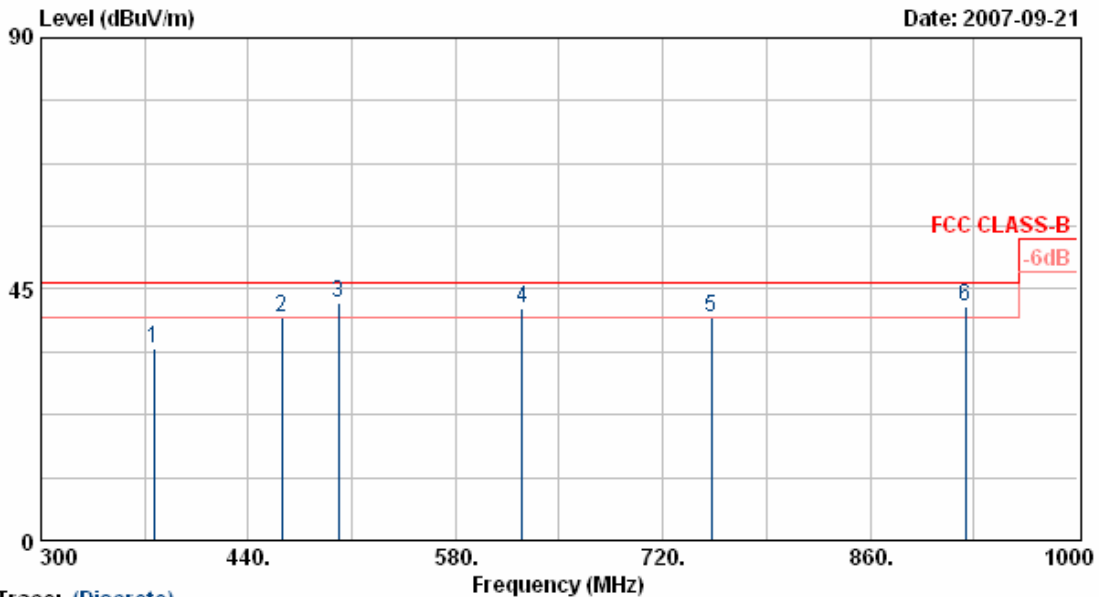


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	44.12	-9.67	34.45	46.00	-11.55	Peak	100	322
2	462.40	46.35	-6.57	39.78	46.00	-6.22	Peak	100	315
3	500.90	47.33	-4.71	42.62	46.00	-3.38	QP	100	311
4	624.83	46.93	-5.38	41.55	46.00	-4.45	QP	100	319
5	752.90	43.15	-3.25	39.90	46.00	-6.10	Peak	100	311
6	924.40	38.59	3.16	41.75	46.00	-4.25	QP	100	49

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 54 Mbps

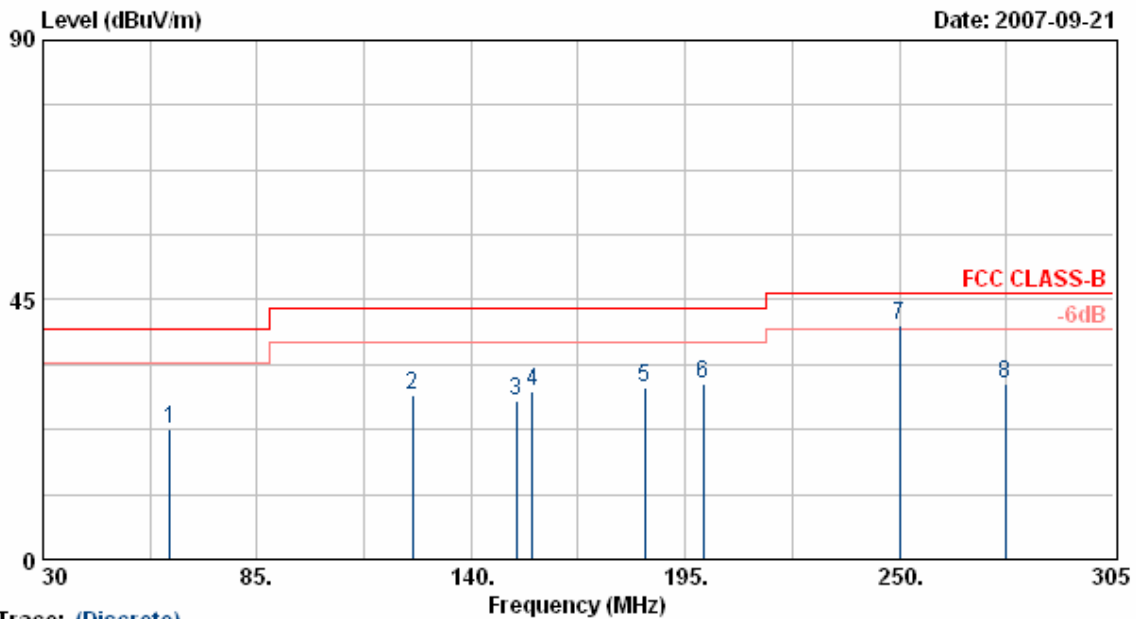


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	62.73	50.33	-27.86	22.47	40.00	-17.53	Peak	400	52
2	125.00	48.35	-20.04	28.31	43.50	-15.19	Peak	400	49
3	151.55	46.66	-19.23	27.43	43.50	-16.07	Peak	400	51
4	155.65	48.22	-19.04	29.18	43.50	-14.32	Peak	400	56
5	184.55	51.22	-21.37	29.85	43.50	-13.65	Peak	400	53
6	199.68	49.38	-19.04	30.34	43.50	-13.16	Peak	400	109
7	250.01	56.19	-15.68	40.51	46.00	-5.49	QP	400	51
8	277.23	44.11	-13.59	30.52	46.00	-15.48	Peak	400	59

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 67 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 54 Mbps

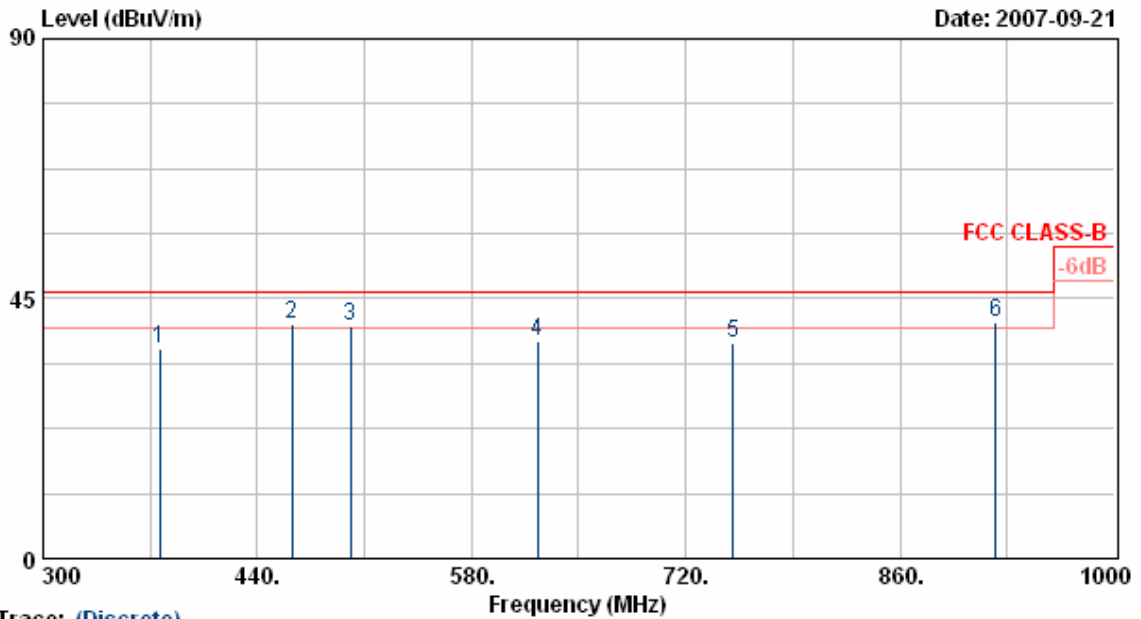


Trace: (Discrete)

Item	Freq MHz	Read Value dBuV/m	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Ant Pos cm	Tab Pos Deg
1	376.30	46.79	-10.46	36.33	46.00	-9.67	Peak	100	231
2	462.40	48.12	-7.63	40.49	46.00	-5.51	QP	400	243
3	500.90	46.99	-6.57	40.42	46.00	-5.58	QP	100	33
4	623.40	42.36	-4.80	37.55	46.00	-8.45	Peak	100	233
5	750.80	42.36	-5.20	37.16	46.00	-8.84	Peak	100	239
6	922.30	38.15	2.78	40.93	46.00	-5.07	QP	100	250

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 11 Mbps

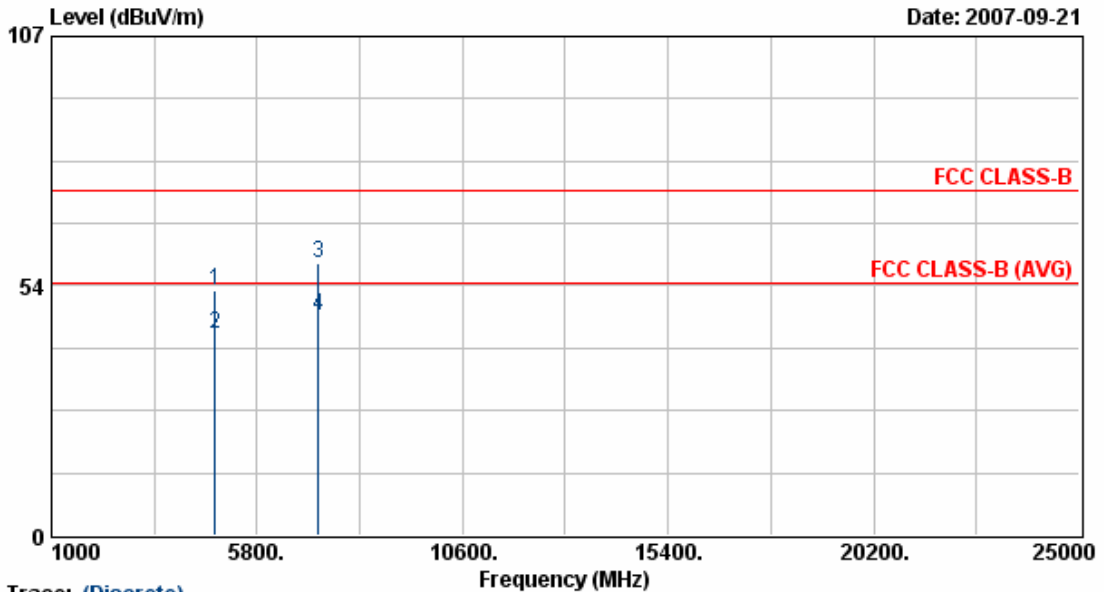


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.88	43.75	8.64	52.39	74.00	-21.61	Peak	137	14
2	4823.88	34.71	8.64	43.35	54.00	-10.65	Average	137	14
3	7236.25	43.95	14.36	58.30	74.00	-15.70	Peak	137	14
4	7236.25	32.65	14.36	47.01	54.00	-6.99	Average	137	14

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 11 Mbps

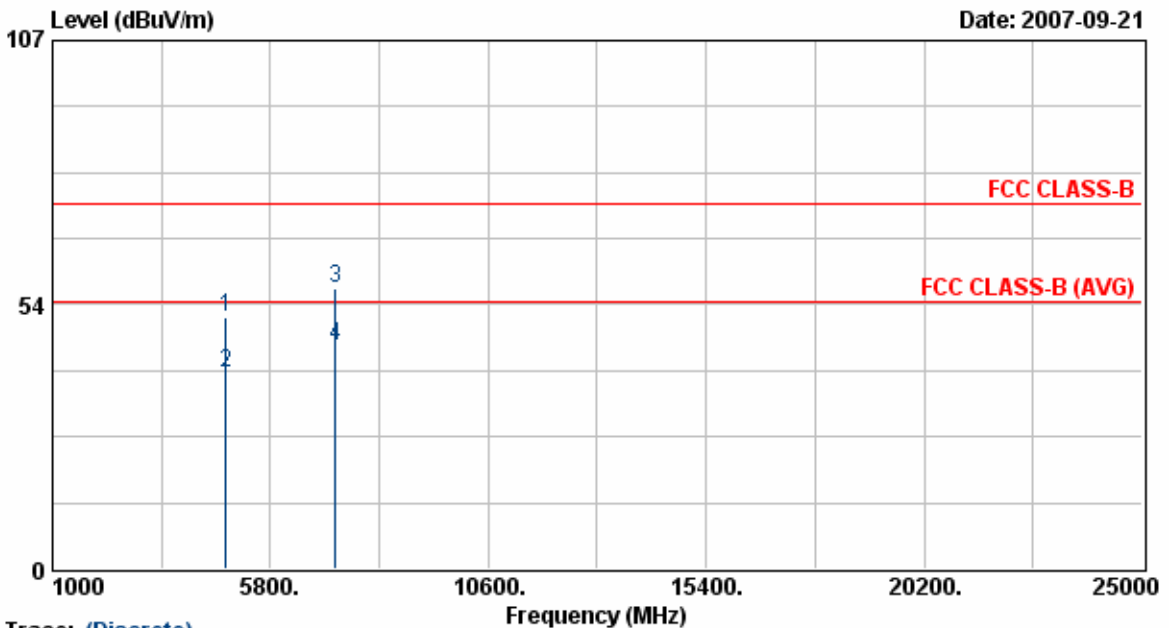


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.00	42.19	8.64	50.83	74.00	-23.17	Peak	136	171
2	4824.00	31.20	8.64	39.84	54.00	-14.16	Average	136	171
3	7236.75	42.51	14.36	56.87	74.00	-17.13	Peak	136	171
4	7236.75	30.69	14.36	45.04	54.00	-8.96	Average	136	171

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 11 Mbps

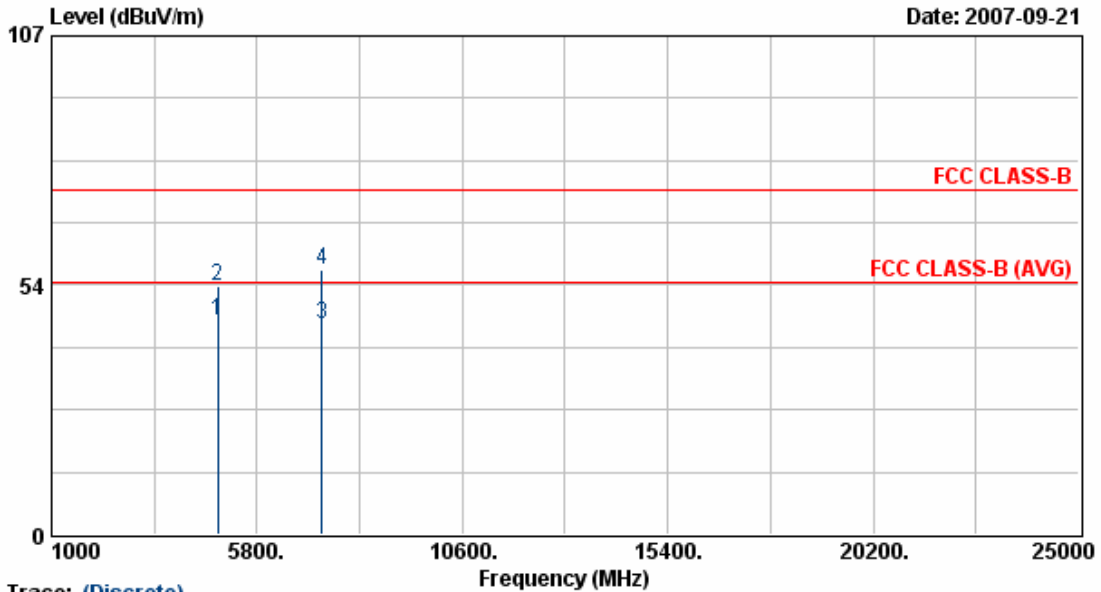


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.88	37.19	8.78	45.97	54.00	-8.03	Average	137	14
2	4873.88	44.61	8.78	53.39	74.00	-20.61	Peak	137	14
3	7310.38	30.60	14.60	45.20	54.00	-8.80	Average	137	14
4	7310.38	42.31	14.60	56.90	74.00	-17.10	Peak	137	14

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 11 Mbps

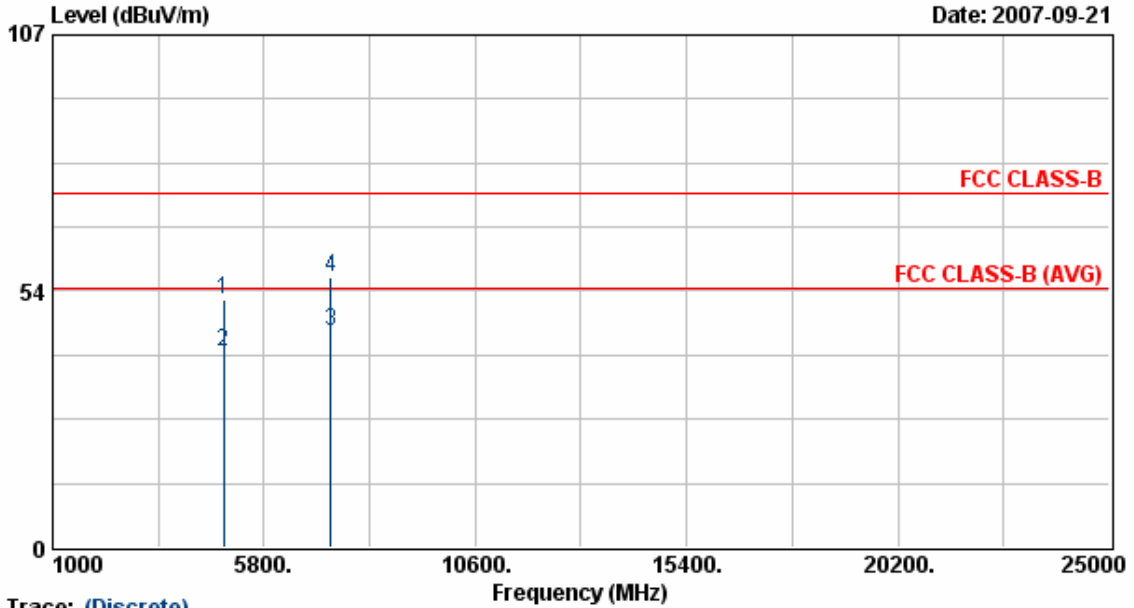


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.88	42.78	8.78	51.56	74.00	-22.44	Peak	136	171
2	4873.88	31.95	8.78	40.73	54.00	-13.27	Average	136	171
3	7310.75	30.50	14.60	45.10	54.00	-8.90	Average	136	171
4	7310.75	41.84	14.60	56.43	74.00	-17.57	Peak	136	171

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 11 Mbps

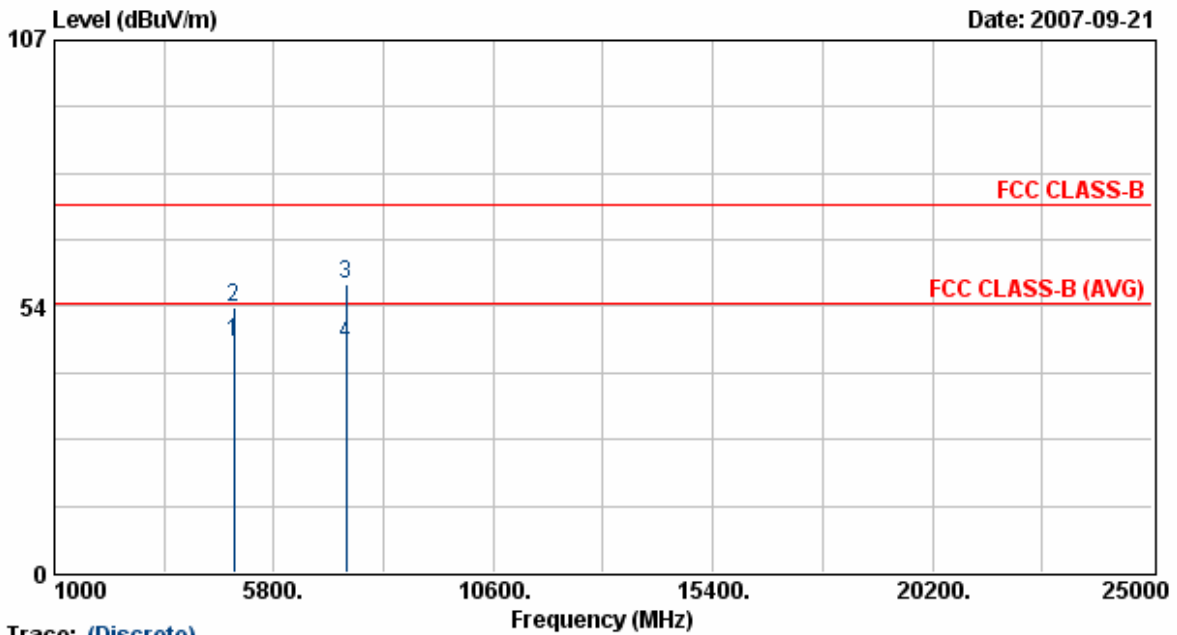


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.88	37.29	8.92	46.21	54.00	-7.79	Average	137	14
2	4923.88	44.35	8.92	53.27	74.00	-20.73	Peak	137	14
3	7385.13	43.20	14.84	58.04	74.00	-15.96	Peak	137	14
4	7385.13	31.27	14.84	46.10	54.00	-7.90	Average	137	14

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 11 Mbps

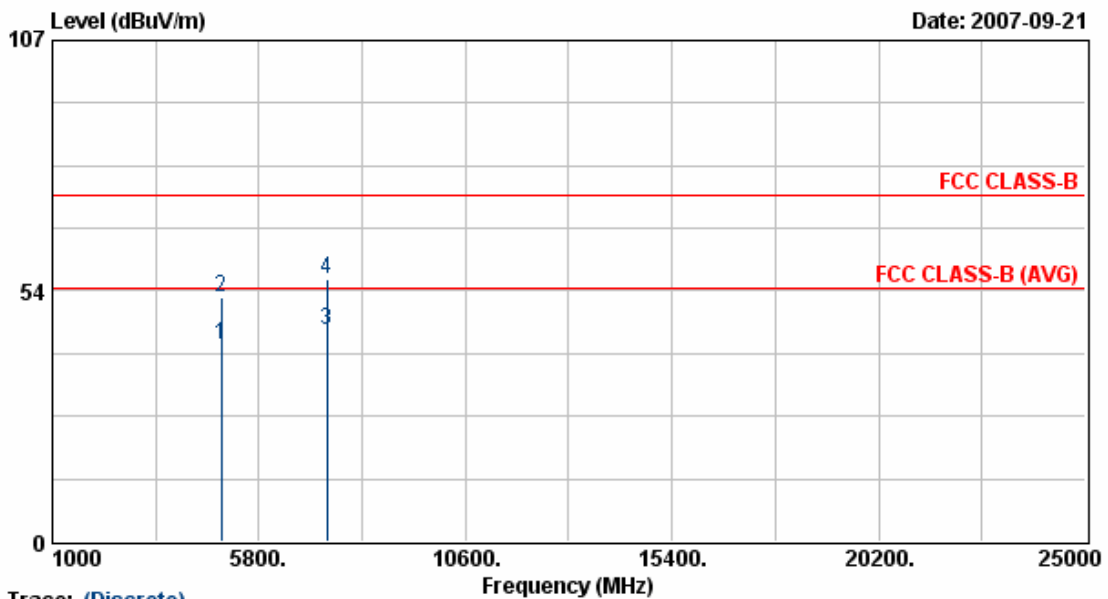


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.88	33.27	8.92	42.19	54.00	-11.81	Average	136	171
2	4923.88	43.40	8.92	52.32	74.00	-21.68	Peak	136	171
3	7384.75	30.17	14.84	45.01	54.00	-8.99	Average	136	171
4	7384.75	41.27	14.84	56.11	74.00	-17.89	Peak	136	171

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 54 Mbps

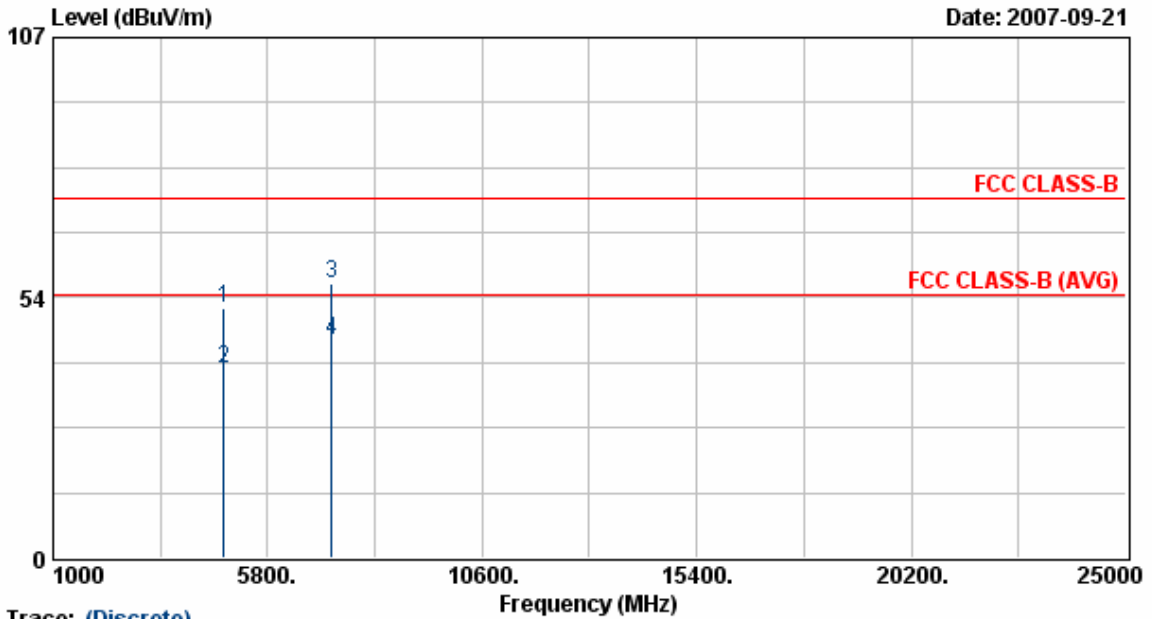


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.75	42.91	8.64	51.55	74.00	-22.45	Peak	137	14
2	4824.75	30.46	8.64	39.10	54.00	-14.90	Average	137	14
3	7236.63	41.97	14.36	56.33	74.00	-17.67	Peak	137	14
4	7236.63	30.57	14.36	44.92	54.00	-9.08	Average	137	14

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 1	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 54 Mbps

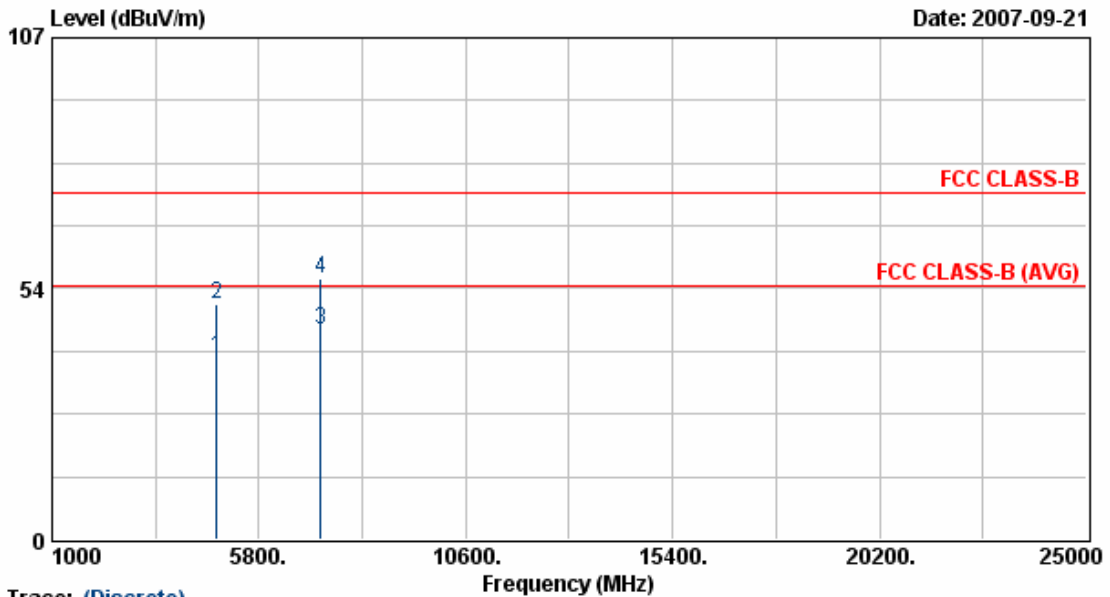


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.63	30.21	8.64	38.85	54.00	-15.15	Average	136	171
2	4823.63	41.40	8.64	50.04	74.00	-23.96	Peak	136	171
3	7235.63	30.33	14.35	44.68	54.00	-9.32	Average	136	171
4	7235.63	41.25	14.35	55.60	74.00	-18.40	Peak	136	171

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 54 Mbps

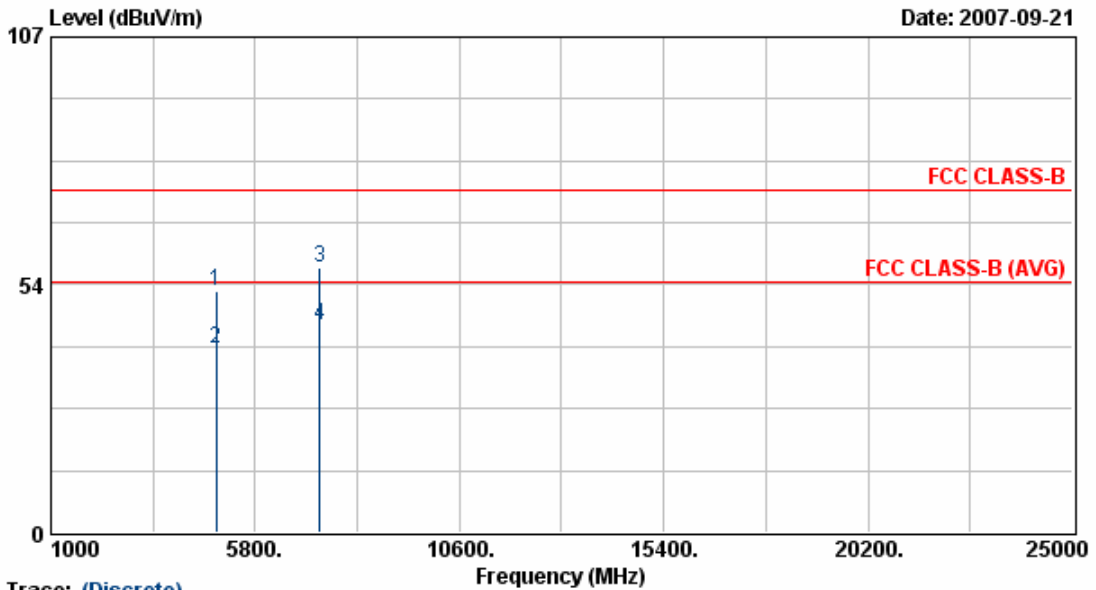


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.75	43.38	8.78	52.16	74.00	-21.84	Peak	137	14
2	4874.75	31.10	8.78	39.88	54.00	-14.12	Average	137	14
3	7310.75	42.63	14.60	57.23	74.00	-16.77	Peak	137	14
4	7310.75	30.26	14.60	44.86	54.00	-9.14	Average	137	14

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 54 Mbps

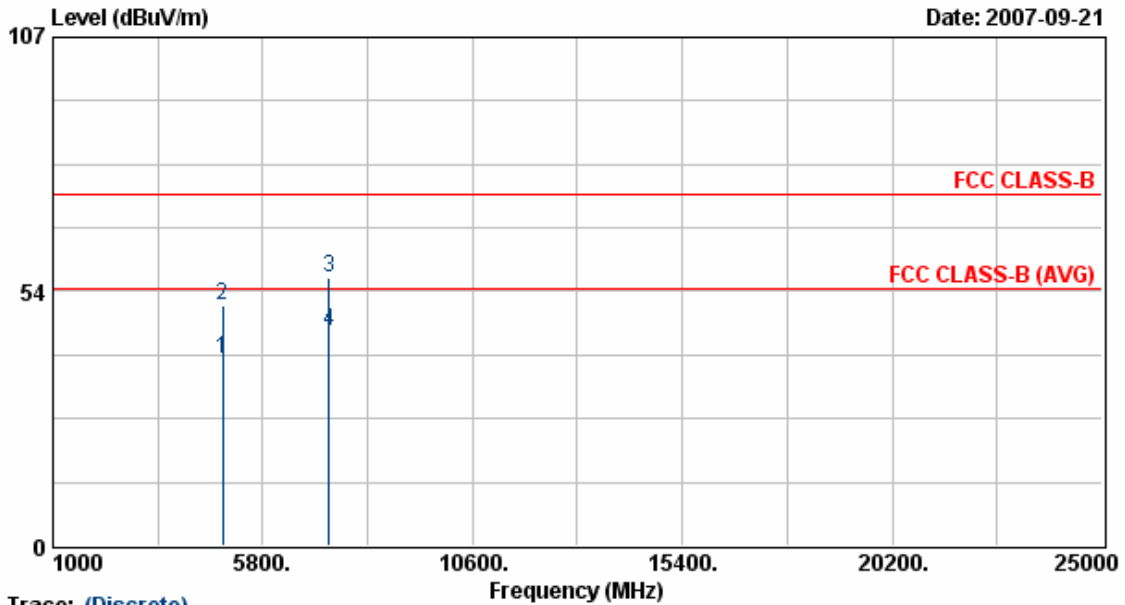


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.63	30.38	8.78	39.16	54.00	-14.84	Average	136	171
2	4873.63	41.65	8.78	50.43	74.00	-23.57	Peak	136	171
3	7310.88	41.74	14.60	56.33	74.00	-17.67	Peak	136	171
4	7310.88	30.38	14.60	44.97	54.00	-9.03	Average	136	171

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 54 Mbps

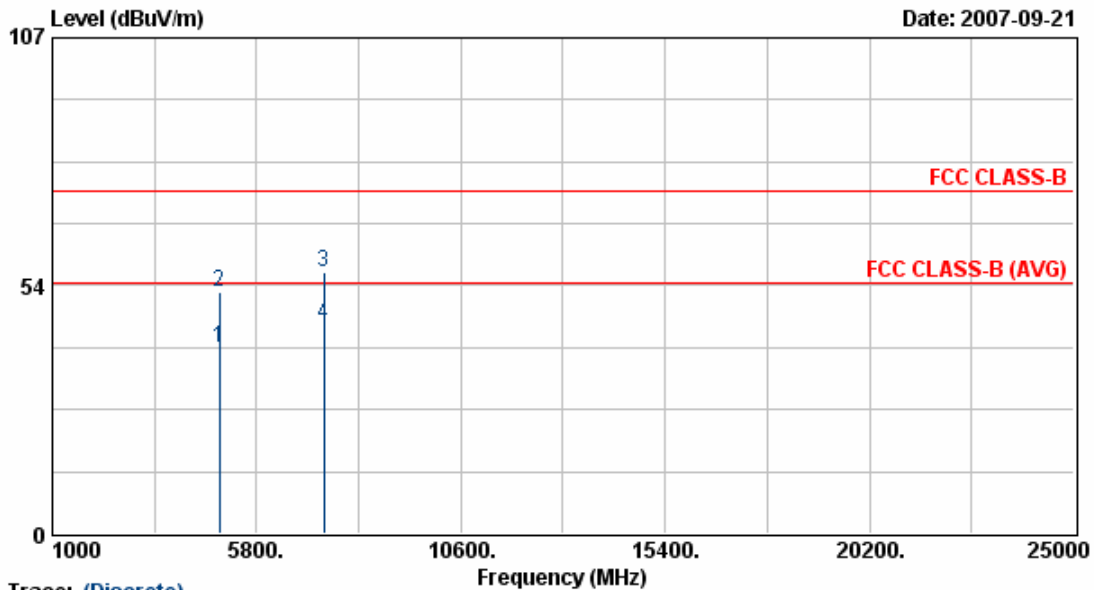


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.50	31.21	8.92	40.13	54.00	-13.87	Average	137	14
2	4923.50	43.03	8.92	51.95	74.00	-22.05	Peak	137	14
3	7386.38	41.39	14.84	56.23	74.00	-17.77	Peak	137	14
4	7386.38	30.42	14.84	45.26	54.00	-8.74	Average	137	14

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 11	Humidity	: 70 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 54 Mbps

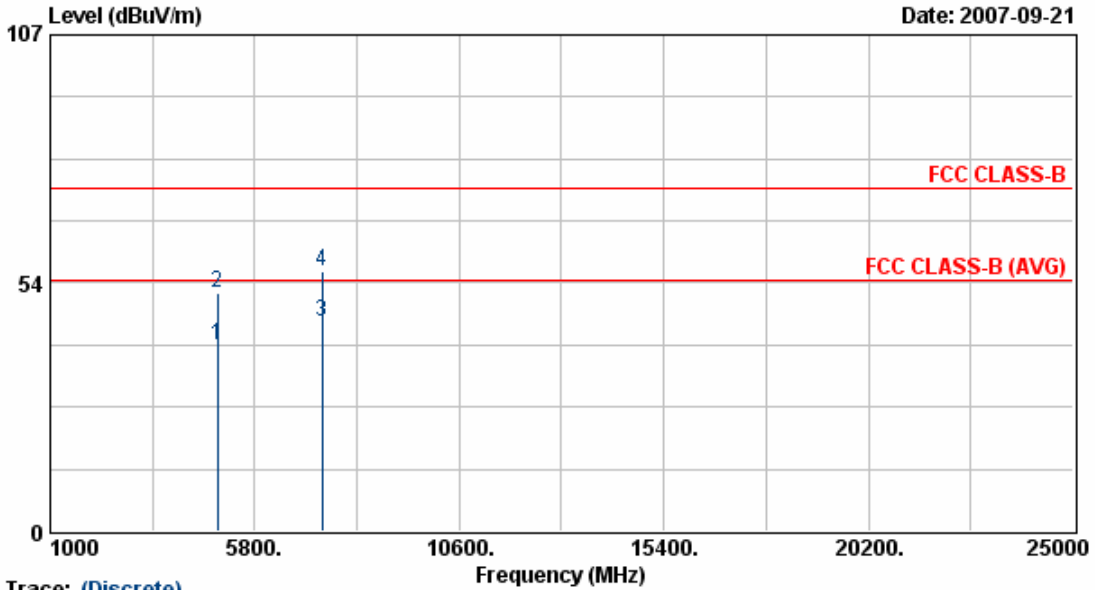


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.38	30.97	8.92	39.89	54.00	-14.11	Average	136	171
2	4923.38	42.44	8.92	51.37	74.00	-22.63	Peak	136	171
3	7385.75	30.30	14.84	45.14	54.00	-8.86	Average	136	171
4	7385.75	41.34	14.84	56.18	74.00	-17.82	Peak	136	171

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1antenna 5	Rate	: 108 Mbps

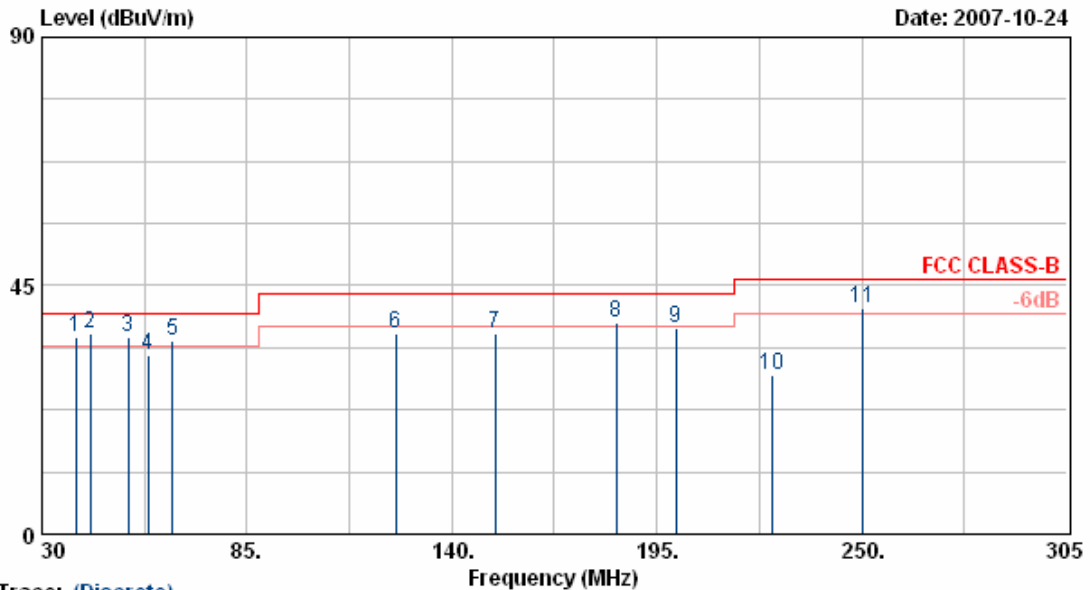


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	39.08	50.23	-14.58	35.65	40.00	-4.35	QP	300	76
2	42.95	52.21	-15.94	36.27	40.00	-3.73	QP	100	71
3	53.10	55.34	-19.52	35.82	40.00	-4.18	QP	100	69
4	58.60	50.11	-17.85	32.26	40.00	-7.74	Peak	100	72
5	64.93	57.82	-22.74	35.08	40.00	-4.92	QP	100	75
6	124.99	47.77	-11.29	36.48	43.50	-7.02	Peak	100	66
7	151.55	49.08	-12.85	36.23	43.50	-7.27	Peak	100	189
8	184.00	49.78	-11.49	38.29	43.50	-5.21	QP	100	73
9	200.23	49.93	-12.76	37.17	43.50	-6.33	Peak	100	75
10	225.80	43.44	-14.73	28.71	46.00	-17.29	Peak	100	70
11	250.00	52.02	-11.04	40.98	46.00	-5.02	QP	100	73

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 108 Mbps

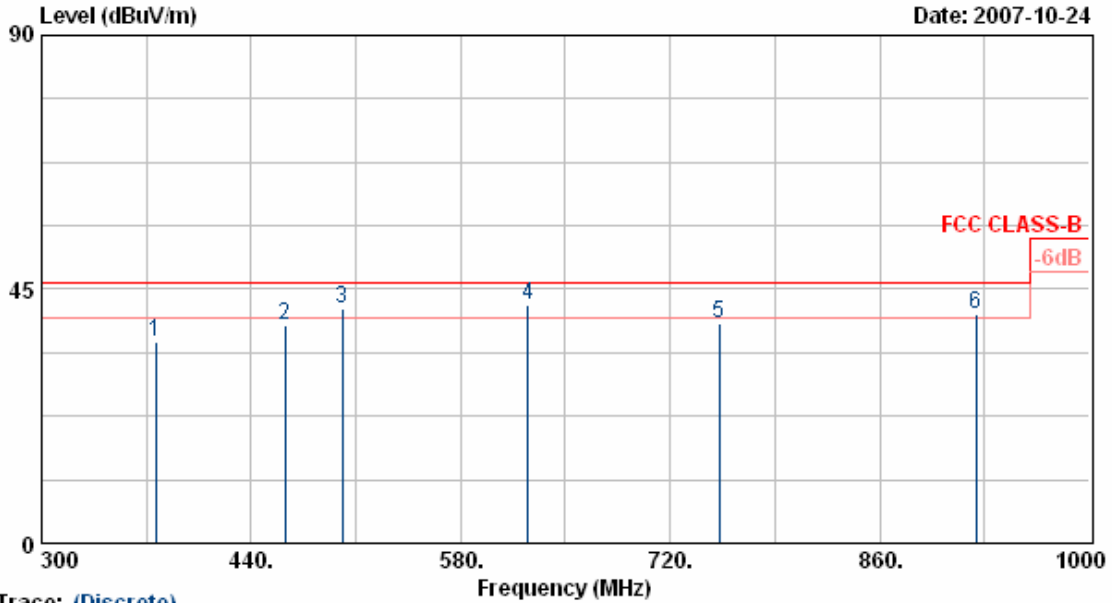


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	45.31	-9.67	35.64	46.00	-10.36	Peak	100	322
2	462.40	45.24	-6.57	38.67	46.00	-7.33	Peak	100	315
3	500.90	46.22	-4.71	41.51	46.00	-4.49	QP	100	311
4	624.83	47.56	-5.38	42.18	46.00	-3.82	QP	100	319
5	752.90	42.09	-3.25	38.84	46.00	-7.16	Peak	100	311
6	924.40	37.48	3.16	40.64	46.00	-5.36	QP	100	49

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 108 Mbps

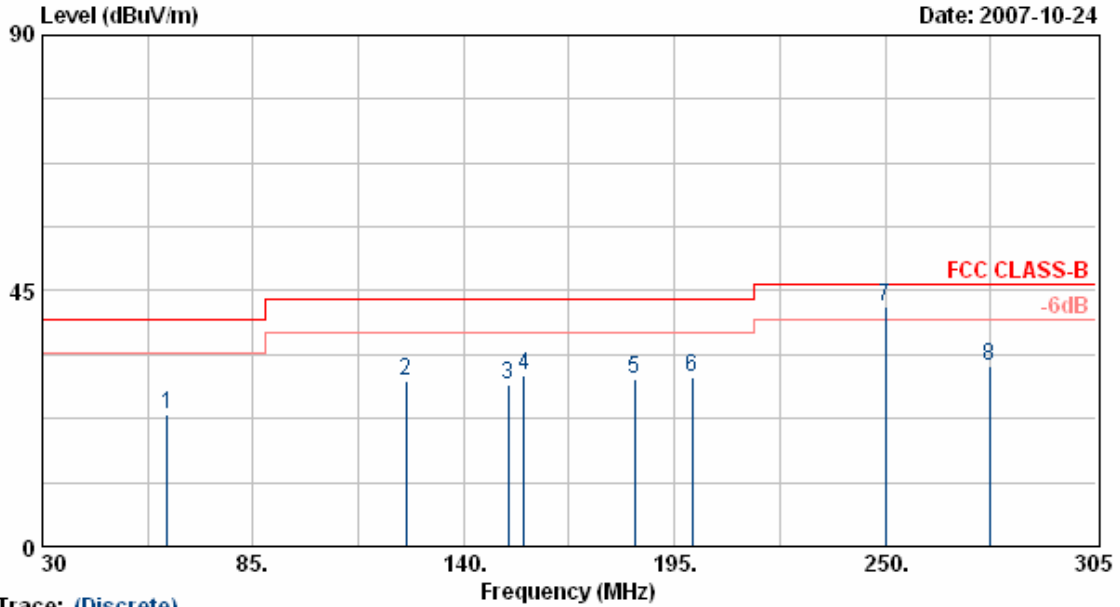


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	62.73	51.24	-27.86	23.38	40.00	-16.62	Peak	400	52
2	125.00	49.15	-20.04	29.11	43.50	-14.39	Peak	400	49
3	151.55	47.65	-19.23	28.42	43.50	-15.08	Peak	400	51
4	155.65	49.17	-19.04	30.13	43.50	-13.37	Peak	400	56
5	184.55	50.79	-21.37	29.42	43.50	-14.08	Peak	400	53
6	199.68	48.72	-19.04	29.68	43.50	-13.82	Peak	400	109
7	250.01	57.82	-15.68	42.14	46.00	-3.86	QP	400	51
8	277.23	45.39	-13.59	31.80	46.00	-14.20	Peak	400	59

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 6	Humidity	: 67 %
Modulation Type	: 802.11 Turbo G	Atmospheric Pressure	: 1010 hPa
Memo	: MT12-Y120100-A1 antenna 5	Rate	: 108 Mbps

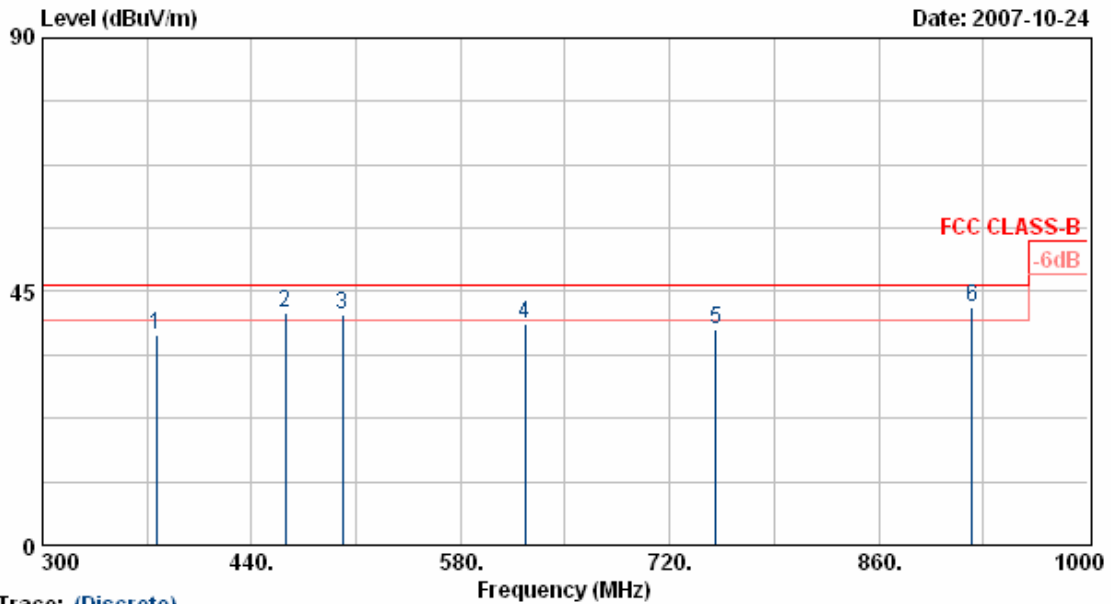

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	376.30	47.81	-10.46	37.35	46.00	-8.65	Peak	100	231
2	462.40	48.96	-7.63	41.33	46.00	-4.67	QP	400	243
3	500.90	47.34	-6.57	40.77	46.00	-5.23	QP	100	33
4	623.40	43.94	-4.80	39.14	46.00	-6.86	Peak	100	233
5	750.80	43.61	-5.20	38.41	46.00	-7.59	Peak	100	239
6	922.30	39.45	2.78	42.23	46.00	-3.77	QP	100	250

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.