

# FCC TEST REPORT

According to

## FCC Rules and Regulations

### Part 15 Subpart E

Applicant	:	Netgear Inc.
Address	:	4500 Great America Parkway, Santa Clara, CA 95054 U.S.A.
Equipment	:	ProSafe Wireless-N VPN Firewall
Model No.	:	SRXN3205
FCC ID	:	PY308200084
Trade Name	:	NETGEAR

Laboratory accreditation



- The test result refers exclusively to the test presented test model / sample.,
- The test result does not include DFS test for 5250 ~ 5350 MHz.
- Without written approval of **Exclusive Certification Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## CONTENTS

1.	Report of Measurements and Examinations.....	5
1.1.	List of Measurements and Examinations .....	5
2.	Test Configuration of Equipment under Test.....	6
2.1.	RF Specifications .....	6
2.2.	Feature of Equipment under Test.....	7
2.3.	Carrier Frequency of Channels .....	7
2.4.	Test Mode and Test Software.....	8
2.5.	Description of Test System.....	9
2.6.	Connection Diagram of Test System.....	10
2.7.	General Information of Test.....	11
2.8.	History of this test report .....	12
3.	Antenna Requirements .....	13
3.1.	Standard Applicable .....	13
3.2.	Antenna Construction and Directional Gain.....	13
4.	Test of Conducted Emission .....	14
4.1.	Test Procedures .....	14
4.2.	Typical Test Setup Layout of Conducted Emission.....	15
4.3.	Conducted Emission Requirement .....	15
4.4.	Measurement Equipment.....	15
4.5.	Test Result and Data.....	16
4.6.	Test Photographs .....	36
5.	Test of Radiated Emission .....	37
5.1.	Test Procedures .....	37
5.2.	Typical Test Setup Layout of Radiated Emission.....	38
5.3.	Measurement equipment .....	38
5.4.	Test Result of Radiated Emission .....	39
5.5.	Photographs of Radiated Emission Test.....	139
6.	Peak Transmit Power.....	140
6.1.	Test Procedure .....	140
6.2.	Test Setup Layout .....	140
6.3.	Measurement equipment .....	140
6.4.	Test Result and Data.....	140
7.	Peak Power Excursion.....	182
7.1.	Test Procedure .....	182
7.2.	Test Setup Layout .....	182
7.3.	Measurement equipment .....	182
7.4.	Test Result and Data.....	182
8.	Peak Power Spectral Density.....	204
8.1.	Test Procedure .....	204
8.2.	Test Setup Layout .....	204
8.3.	Measurement equipment .....	204
8.4.	Test Result and Data.....	204
9.	Frequency Stability.....	226
9.1.	Test Procedure .....	226
9.2.	Test Setup Layout .....	226
9.3.	Measurement equipment .....	226

9.4. Test Result and Data.....227

10. Band Edges Measurement ..... 228

    10.1. Test Procedure ..... 228

    10.2. Measurement equipment ..... 228

    10.3. Test Result and Data ..... 228

    10.4. Restrict Band Emission Measurement Data ..... 236

11. Restricted Bands of Operation..... 239

    11.1. Labeling Requirement..... 239

12. RF Exposure ..... 240

    12.1. Limit for Maximum Permissible Exposure (MPE) ..... 240

    12.2. MPE Calculations..... 241

    12.3. FCC Radiation Exposure Statement..... 241

Appendix A. Photographs of EUT.....A1 ~ A12

# CERTIFICATE OF COMPLIANCE

According to

## FCC Rules and Regulations

### Part 15 Subpart E


Applicant	:	Netgear Inc.
Address	:	4500 Great America Parkway, Santa Clara, CA 95054 U.S.A.
Equipment	:	ProSafe Wireless-N VPN Firewall
Model No.	:	SRXN3205
FCC ID	:	PY308200084

**I HEREBY CERTIFY THAT :**

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart E (2003)**.

The test was carried out on Jul. 31, 2008 at **Exclusive Certification Corp.**

Signature

  
Anson Chou / Manager

## 1. Report of Measurements and Examinations

### 1.1. List of Measurements and Examinations

For Frequency 5.15GHz ~ 5.25GHZ

Applied Standard : FCC Part 15, Subpart E (Section 15.407)		
FCC Rule	Description of Test	Result
15.407(b)(5)	. Conducted Emission	Pass
15.407(b/1/2/3)(b)(5)	. Radiated Emission	Pass
15.407(a/1/2/3)	. Peak Transmit Power	Pass
15.407(a)(6)	. Peak Power Excursion	Pass
15.407(a/1/2/3)	. Peak Power Spectral Density	Pass
15.407(g)	. Frequency Stability	Pass

## 2. Test Configuration of Equipment under Test

### 2.1. RF Specifications

Type of Modulation	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK) 802.11a: OFDM (64-QAM, 16-QAM, QPSK, BPSK) 802.11n draft 2.0: OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Data Rate	802.11b (11, 5.5, 2, 1 Mbps) 802.11g (54, 48, 36, 24, 18, 12, 9, 6 Mbps) 802.11a (54, 48, 36, 24, 18, 12, 9, 6 Mbps) 802.11n draft 2.0, 20MHz (130, 117, 104, 78, 58.5, 52, 39, 26, 19.5, 6.5 Mbps) 802.11n draft 2.0, 40MHz (270, 243, 216, 162, 135, 121.5, 108, 81, 54, 40, 27, 13.5 Mbps)
Number of Channels	802.11b/g/n draft 2.0, 20MHz: -USA, Canada and Taiwan: CH 1 ~ 11 (11channels) -Most European Countries: CH 1 ~ 13 (13channels) -France: CH 1 ~ 7 (7channels) 802.11n draft 2.0, 40MHz: -USA, Canada and Taiwan: CH 3 ~ 9 (7channels) -Most European Countries: CH 1 ~ 13 (13channels) -France: CH 3 ~ 5 (3channels) 802.11a/n draft 2.0, 20MHz: -USA, Canada and Taiwan: CH 36,44,48 (3channels) -Most European Countries: CH 36,44,48 (3channels) -France: CH 36,44,48 (3channels) 802.11a/n draft 2.0, 40MHz: -USA, Canada and Taiwan: CH 38,42,46 (3channels) -Most European Countries: CH 38,42,46 (3channels) -France: CH 38,42,46 (3channels)
Frequency Band	FCC/IC: 2412 ~ 2462 MHz, 5150 ~ 5250 MHz, 5725 ~ 5850 MHz EU: 2412 ~ 2472 MHz, 5150 ~ 5250 MHz
Output Power	FCC: 802.11b: 22 dBm, 802.11g: 22 dBm, 802.11gn: 26 dBm 802.11a: 17 dBm, 802.11an: 17 dBm. CE: 802.11b: 18 dBm, 802.11g: 18 dBm, 802.11gn: 18 dBm 802.11a: 18 dBm, 802.11an: 21 dBm.
Antenna Type and Gain	Antenna 1: Dipole antenna, 3 dBi (2.4GHz Band) 5 dBi (5GHz Band) Antenna 2: Patch antenna, 2 dBi (2.4GHz Band) 3 dBi (5GHz Band)

## 2.2. Feature of Equipment under Test

### Router Technical Specifications

Feature	Specifications
Network Protocol and Standards Compatibility	
Data and Routing Protocols	TCP/IP, RIP-1, RIP-2, DHCP PPP over Ethernet (PPPoE)
Power Adapter	
North America	120V, 60 Hz, input
United Kingdom, Australia	240V, 50 Hz, input
Europe	230V, 50 Hz, input
Japan	100V, 50/60 Hz, input
Physical Specifications	
Dimensions	1.7 x 10 x 7.2 in.
Weight	2 kg (4.5 lb)
Weight	2 kg (4.5 lb)
Environmental Specifications	
Operating temperature	0° to 40° C (32° to 104° F)
Operating humidity	90% maximum relative humidity, non-condensing
Interface Specifications	
LAN	10BASE-T or 100BASE-Tx 1000BASE-T, RJ-45
WAN	10BASE-T or 100BASE-Tx 1000BASE-T, RJ-45

### SSL VPN Technical Specifications

Parameter	Specification
Network Management	Web-based configuration and status monitoring
Concurrent Users Supported	10 tunnels
Encryption	DES, 3DES, AES, MD5, SHA-1
Authentication	Local User database, RADIUS, LDAP, MS Active Directory
Certificates supported	X.509, CRL
Environmental Specifications	Operating temperature: 0 to 50° C Operating humidity: 5-95%, non-condensing

## 2.3. Carrier Frequency of Channels

802.11a, 802.11Draft n, 20MHz (5150 ~ 5250MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	48	5240
40	5200	---	---
44	5220	---	---

802.11Draft n, 40MHz (5150 ~ 5250MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
38	5190	46	5230
42	5210	---	---

## 2.4. Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included remote workstation, PC, Monitor, PS2 Keyboard, USB Mouse, Modem, Printer, RJ45 Load and EUT for RF test. The remote workstation means Notebook, PC, Monitor, PS2 Keyboard and USB Mouse.
- c. An executive program, ping.exe under WIN XP, which transmits and receives data to the remote workstation through LAN(1000M) and Wireless (300M).
- d. The following test mode and test software was performed for conduction and radiation test:
  - 802.11a/an, HT20: CH 36: 5180MHz, CH 44: 5220MHz, CH 48: 5240MHz
  - 802.11an, HT40: CH 38: 5190MHz, CH 42: 5210MHz, CH 46: 5230MHz
- e. The following test mode included two kind of power adapter, two kind of antenna, and five kinds of modulation types:

Test Mode	Modulation Type	Antenna Number	Adapter Model
Test Mode 1	802.11a	R-Dipole ANT	DSA-20P-10 US 120180
Test Mode 2	802.11a	M-Patch ANT	DSA-20P-10 US 120180
Test Mode 3	802.11a	L-Dipole ANT	DSA-20P-10 US 120180
Test Mode 4	802.11an, HT20	R+L-Dipole ANT	DSA-20P-10 US 120180
Test Mode 5	802.11an, HT20	All ANT	DSA-20P-10 US 120180
Test Mode 6	802.11an, HT40	R+L-Dipole ANT	DSA-20P-10 US 120180
Test Mode 7	802.11an, HT40	All ANT	DSA-20P-10 US 120180
Test Mode 8	802.11a	R-Dipole ANT	MU18-2120150-A1
Test Mode 9	802.11a	M-Patch ANT	MU18-2120150-A1
Test Mode 10	802.11a	L-Dipole ANT	MU18-2120150-A1
Test Mode 11	802.11an, HT20	R+L-Dipole ANT	MU18-2120150-A1
Test Mode 12	802.11an, HT20	All ANT	MU18-2120150-A1
Test Mode 13	802.11an, HT40	R+L-Dipole ANT	MU18-2120150-A1
Test Mode 14	802.11an, HT40	All ANT	MU18-2120150-A1

- f. For Conducted and Radiated emission test, Test Mode 1, 4~7, 8, 11~14 would be chosen to do final test.

Notes: The device will automatically discontinue transmission, when the transmitting or operating stop.


## 2.5. Description of Test System

Device	Manufacturer	Model No.	Description
PC	IBM	IGV	Power Cable, Unshielding 1.8 m
Monitor	SlimAGE	510A	Power Cable, Adapter Unshielding 1.8 m Data Cable, VGA Shielding 1.35 m
PS2 Keyboard	IBM	KB-0225	Data Cable, PS2 Shielding 1.85 m
USB Mouse	IBM	MO28VO	Data Cable, USB Shielding 1.85 m
Modem	ACEXX	DM-1414	Power Cable, Adapter Unshielding 1.8 m Data Cable, RS232 Shielding 1.35 m
Printer	HP	Desk Jet 400	Power Cable, Adapter Unshielding 1.8 m Data Cable, Print Shielding 1.6 m
RJ45 Load	CAMEO	3702-EMC0002A1	N/A
PC (Remote Workstation)	DELL	DIMENSION-4600	Power Cable, Unshielding 1.8 m
Monitor (Remote Workstation)	ACER	AL701GP	Power Cable, Adapter Unshielding 1.8 m Data Cable, VGA Shielding 1.35 m
PS2 Keyboard (Remote Workstation)	DELL	SK-8100	Data Cable, PS2 Shielding 1.85 m
USB Mouse (Remote Workstation)	DELL	OF-2854	Data Cable, USB Shielding 1.85 m
Notebook (Remote Workstation)	TOSHIBA	PSA50T-05M00C	Power Cable, Adapter Unshielding 1.8 m

### Use Cable:

Cable	Quantity	Description
RJ45	4	Unshielding, 1.5m
RJ45	1	Unshielding, 3.0m

## 2.6. Connection Diagram of Test System

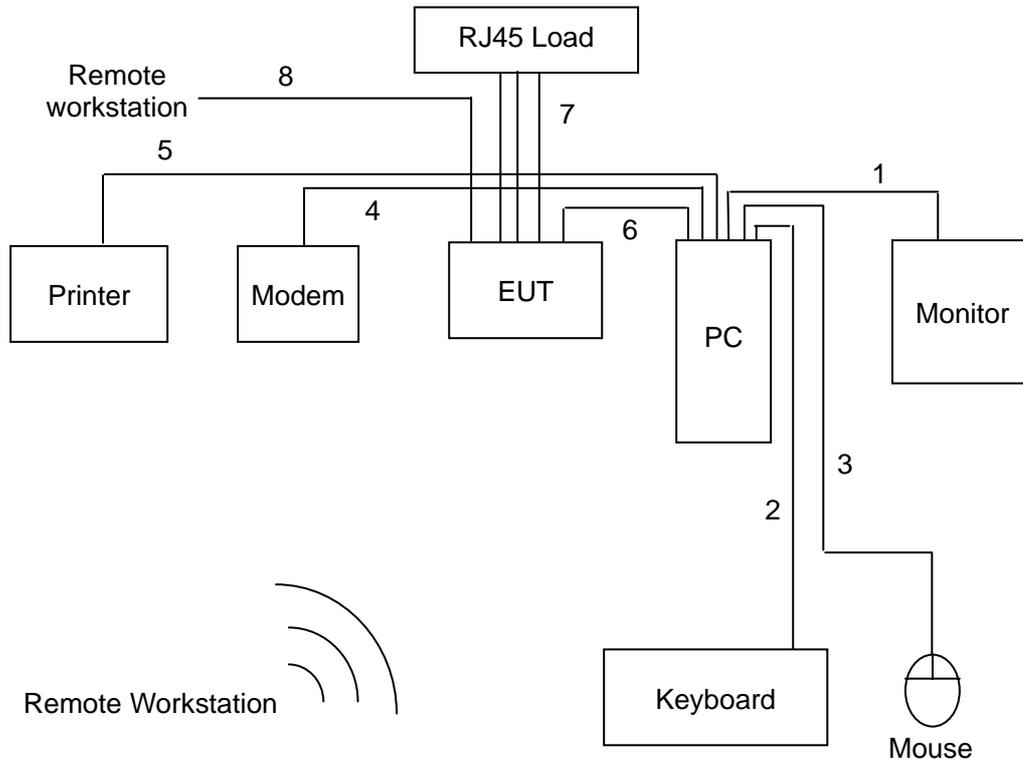

1. The VGA cable is connected from PC to the Monitor.
2. The PS2 cable is connected from PC to the PS2 Keyboard.
3. The USB cable is connected from PC to the USB Mouse.
4. The RS232 cable is connected from PC to the Modem.
5. The Print cable is connected from PC to the Printer.
6. The RJ45 cable is connected from PC to the EUT.
7. These RJ45 cables (\*3) are connected from EUT to the RJ45 Load.
8. The RJ45 cable is connected from EUT to the Remote workstation.

## 2.7. General Information of Test

Test Site:	Exclusive Certification Corp. 4F-2, No. 28, Lane 78, Xing-Ai Rd. Nei-hu, Taipei City 114 Taiwan R.O.C.
Test Site Location (OATS1-SD):	No.68-1, Shihbachongsi, shihding Township, Taipei City 223, Taiwan, R.O.C.
FCC Registration Number :	632249
IC Registration Number :	6597A-1
VCCI Registration Number :	T-182 for Telecommunication Test C-2188 for Conducted emission test R-1902 for Radiated emission test
Test Voltage:	AC 120V/ 60Hz
Test in Compliance with:	ANSI C63.4-2003 FCC Part 15 Subpart E
Frequency Range Investigated:	AC Power Conducted Emission : from 150kHz to 30 MHz Radiated and conducted Emission: from 30 MHz to 40 GHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.



### 3. Antenna Requirements

#### 3.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### 3.2. Antenna Construction and Directional Gain

ANT-L, R:

Antenna type: Dipole Antenna

Antenna Gain: 5 dBi

ANT-M:

Antenna type: Patch Antenna

Antenna Gain: 3 dBi


## 4. Test of Conducted Emission

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 1.3.1. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

### 4.1. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

### 4.2. Typical Test Setup Layout of Conducted Emission

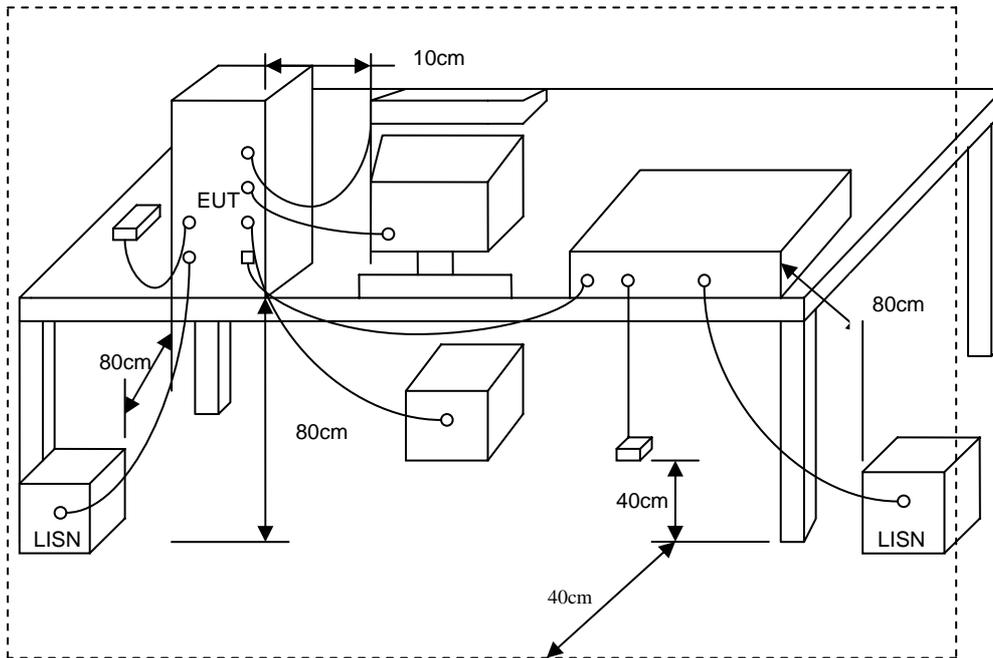

### 4.3. Conducted Emission Requirement

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 4.4. Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date.
Receiver	R&S	ESCI	100443	2007/09/27	2008/09/26
LISN	NNB-2/16Z	MESS TEC	02/10191	2008/06/03	2009/06/02
LISN	NNB-2/16Z	ROLF HEINE	03/10058	2008/04/19	2009/04/18

4.5. Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 1	: 802.11a CH36	Temperature	: 25 °C
Memo	: DSA-20P-10 US 120180	Humidity	: 50 %

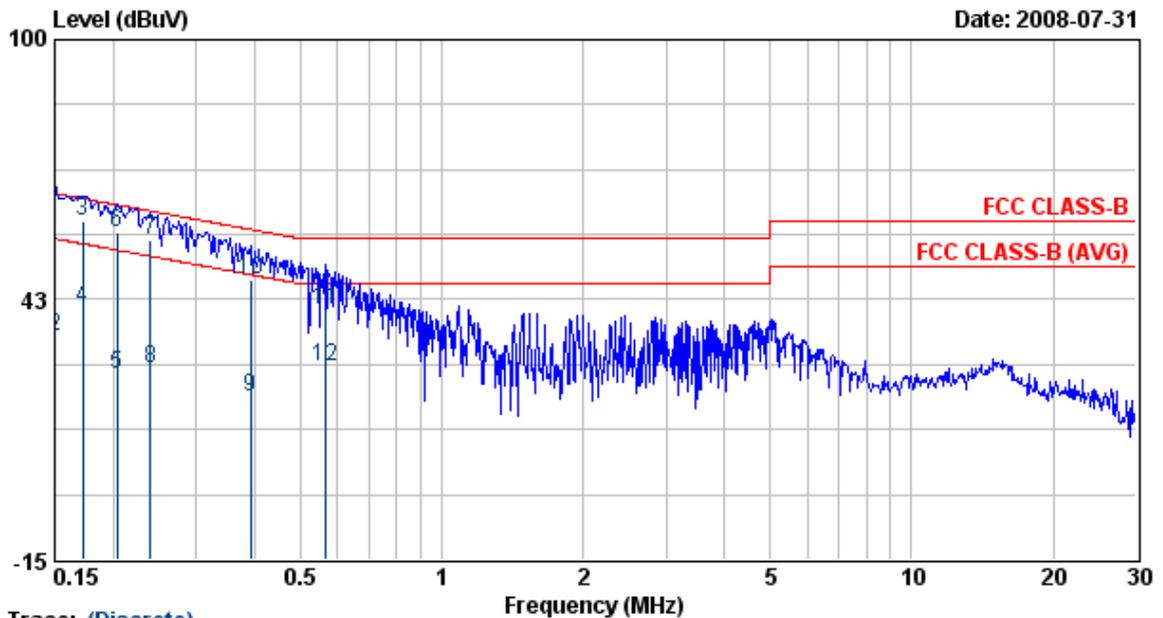


Trace: (Discrete)

Item	Freq MHz	Read Value dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dBuV	Remark
1	0.15	53.53	0.10	53.63	66.00	-12.37	QP
2	0.15	34.41	0.10	34.51	56.00	-21.49	AVERAGE
3	0.17	59.57	0.10	59.67	64.86	-5.18	QP
4	0.17	40.58	0.10	40.68	54.86	-14.18	AVERAGE
5	0.20	25.73	0.10	25.84	53.45	-27.61	AVERAGE
6	0.20	57.32	0.10	57.43	63.45	-6.02	QP
7	0.24	55.64	0.11	55.75	62.08	-6.33	QP
8	0.24	27.05	0.11	27.16	52.08	-24.92	AVERAGE
9	0.39	20.82	0.11	20.93	48.03	-27.11	AVERAGE
10	0.39	46.74	0.11	46.85	58.03	-11.18	QP
11	0.56	39.88	0.12	40.00	56.00	-16.00	QP
12	0.56	27.51	0.12	27.63	46.00	-18.37	AVERAGE

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 1	: 802.11a CH36	Temperature	: 25 °C
Memo	: DSA-20P-10 US 120180	Humidity	: 50 %

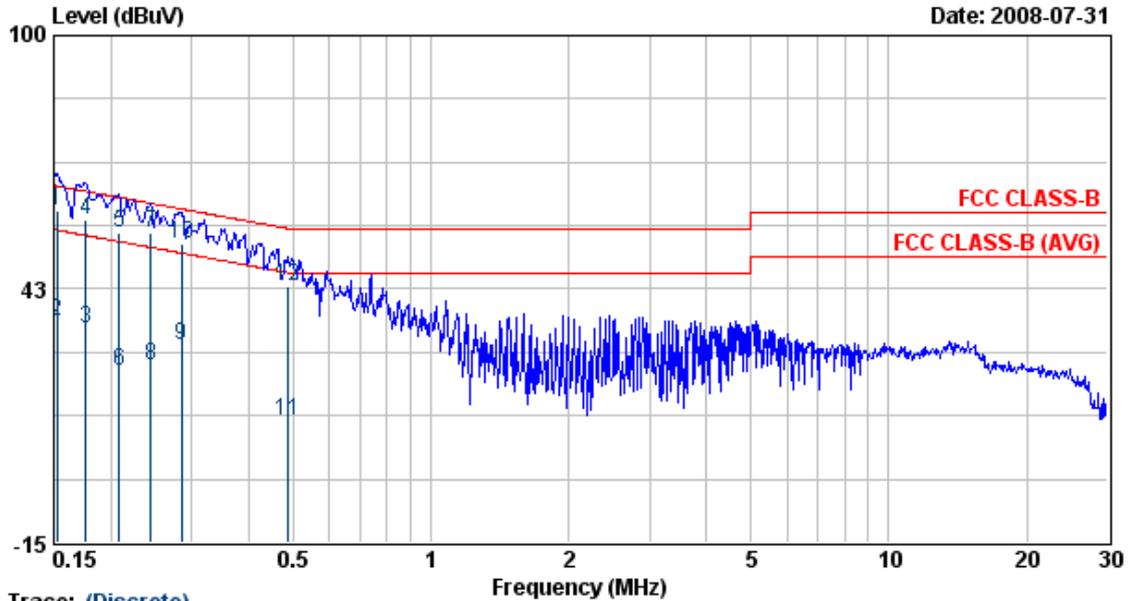


Trace: (Discrete)

Item	Freq MHz	Read Value dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dBuV	Remark
1	0.15	59.98	0.09	60.07	65.87	-5.80	QP
2	0.15	34.95	0.09	35.04	55.87	-20.83	AVERAGE
3	0.18	33.59	0.09	33.68	54.68	-21.00	AVERAGE
4	0.18	58.16	0.09	58.25	64.68	-6.43	QP
5	0.21	55.33	0.09	55.42	63.27	-7.85	QP
6	0.21	23.74	0.09	23.83	53.27	-29.44	AVERAGE
7	0.24	55.34	0.09	55.43	61.95	-6.52	QP
8	0.24	25.20	0.09	25.29	51.95	-26.66	AVERAGE
9	0.28	29.66	0.10	29.76	50.68	-20.92	AVERAGE
10	0.28	52.49	0.10	52.59	60.68	-8.09	QP
11	0.49	12.47	0.11	12.58	46.23	-33.65	AVERAGE
12	0.49	43.09	0.11	43.20	56.23	-13.04	QP

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 4	: 802.11an, HT20 CH36, R+L ANT	Temperature	: 25 °C
Memo	: DSA-20P-10 US 120180	Humidity	: 50 %

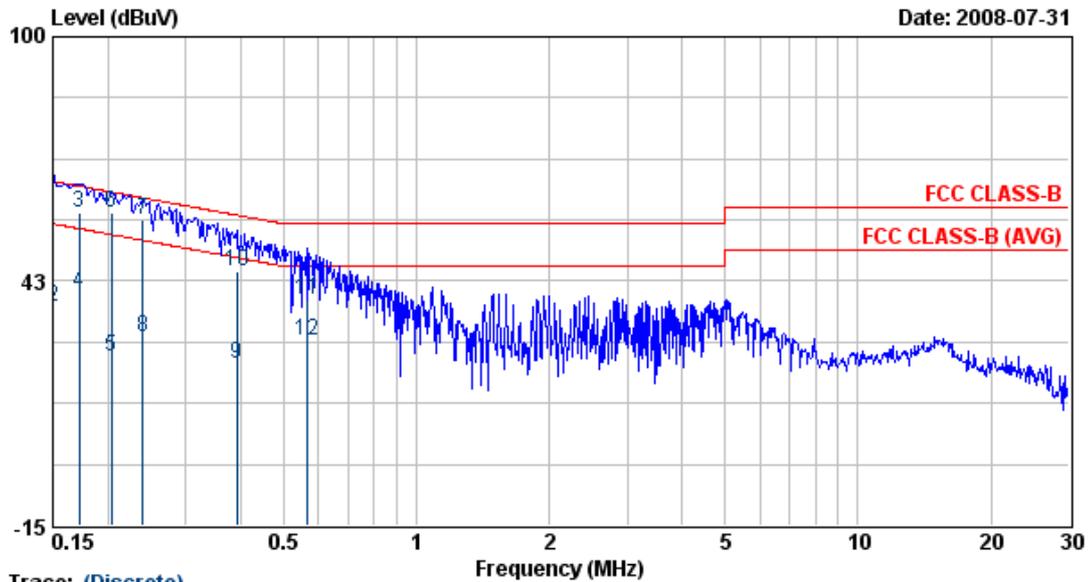


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.15	55.53	0.10	55.63	66.00	-10.37	QP
2	0.15	36.41	0.10	36.51	56.00	-19.49	AVERAGE
3	0.17	58.57	0.10	58.67	64.86	-6.18	QP
4	0.17	39.58	0.10	39.68	54.86	-15.18	AVERAGE
5	0.20	24.73	0.10	24.84	53.45	-28.61	AVERAGE
6	0.20	58.32	0.10	58.43	63.45	-5.02	QP
7	0.24	56.64	0.11	56.75	62.08	-5.33	QP
8	0.24	29.05	0.11	29.16	52.08	-22.92	AVERAGE
9	0.39	22.82	0.11	22.93	48.03	-25.11	AVERAGE
10	0.39	44.74	0.11	44.85	58.03	-13.18	QP
11	0.56	37.88	0.12	38.00	56.00	-18.00	QP
12	0.56	28.51	0.12	28.63	46.00	-17.37	AVERAGE

Remarks:

1. Level = Read Level + Factor
2. Factor = LISN(ISN) Factor + Cable Loss
3. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
4. The data is worse case.

Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 4	: 802.11an, HT20 CH36, R+L ANT	Temperature	: 25 °C
Memo	: DSA-20P-10 US 120180	Humidity	: 50 %

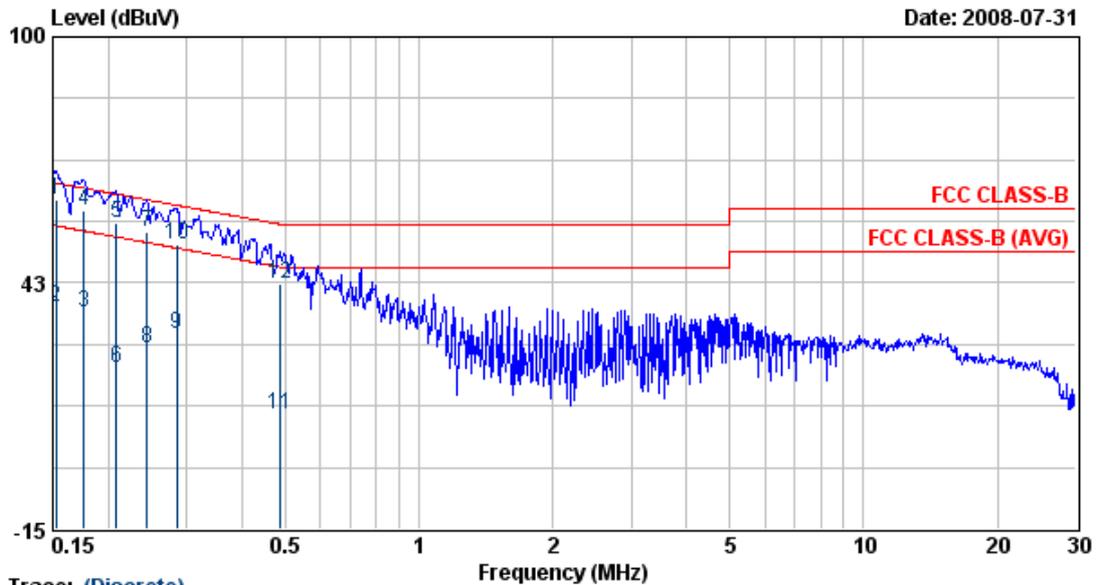


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.15	61.98	0.09	62.07	65.87	-3.80	QP
2	0.15	36.95	0.09	37.04	55.87	-18.83	AVERAGE
3	0.18	35.59	0.09	35.68	54.68	-19.00	AVERAGE
4	0.18	59.16	0.09	59.25	64.68	-5.43	QP
5	0.21	56.33	0.09	56.42	63.27	-6.85	QP
6	0.21	22.74	0.09	22.83	53.27	-30.44	AVERAGE
7	0.24	54.34	0.09	54.43	61.95	-7.52	QP
8	0.24	27.20	0.09	27.29	51.95	-24.66	AVERAGE
9	0.28	30.66	0.10	30.76	50.68	-19.92	AVERAGE
10	0.28	51.49	0.10	51.59	60.68	-9.09	QP
11	0.49	11.47	0.11	11.58	46.23	-34.65	AVERAGE
12	0.49	42.09	0.11	42.20	56.23	-14.04	QP

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 5	: 802.11an, HT20 CH36, All ANT	Temperature	: 25 °C
Memo	: DSA-20P-10 US 120180	Humidity	: 50 %

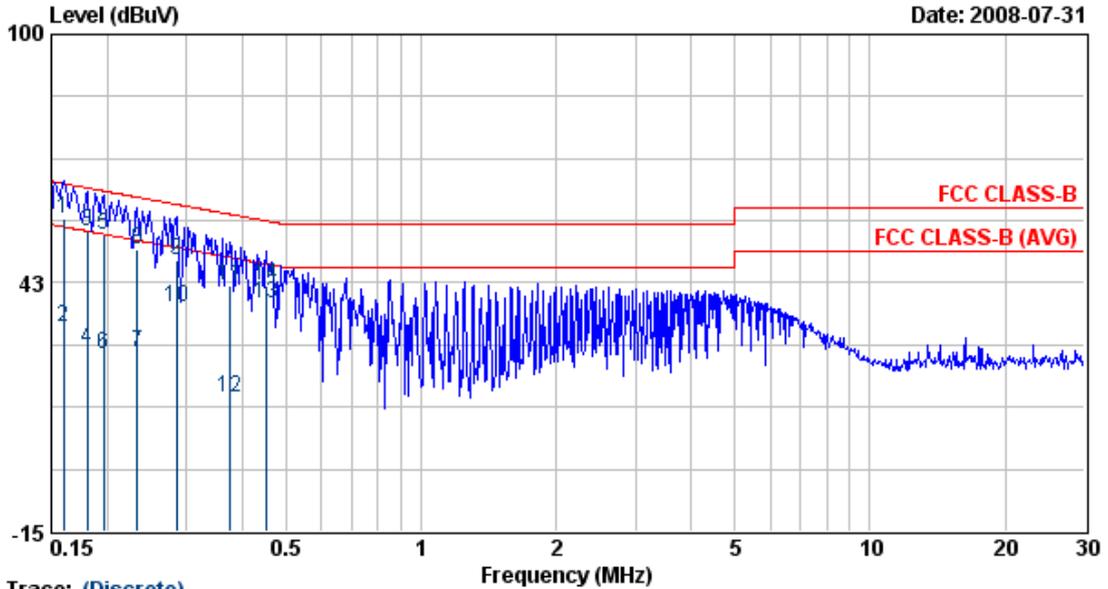


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.16	57.07	0.10	57.17	65.47	-8.30	QP
2	0.16	32.05	0.10	32.15	55.47	-23.32	AVERAGE
3	0.18	54.32	0.10	54.43	64.46	-10.03	QP
4	0.18	27.17	0.10	27.27	54.46	-27.18	AVERAGE
5	0.20	53.31	0.10	53.42	63.76	-10.34	QP
6	0.20	26.00	0.10	26.11	53.76	-27.65	AVERAGE
7	0.23	26.36	0.11	26.47	52.35	-25.88	AVERAGE
8	0.23	50.30	0.11	50.41	62.35	-11.94	QP
9	0.28	47.51	0.11	47.63	60.68	-13.05	QP
10	0.28	36.89	0.11	37.01	50.68	-13.67	AVERAGE
11	0.38	41.65	0.11	41.76	58.39	-16.62	QP
12	0.38	15.88	0.11	15.99	48.39	-32.39	AVERAGE
13	0.45	37.46	0.11	37.58	46.85	-9.27	AVERAGE
14	0.45	41.83	0.11	41.94	56.85	-14.91	QP

- Remarks:
- Level = Read Level + Factor
  - Factor = LISN(ISN) Factor + Cable Loss
  - According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 16Hz, so that the channel 36 was chosen as representative in final test.
  - The data is worse case.

Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 5	: 802.11an, HT20 CH36, All ANT	Temperature	: 25 °C
Memo	: DSA-20P-10 US 120180	Humidity	: 50 %

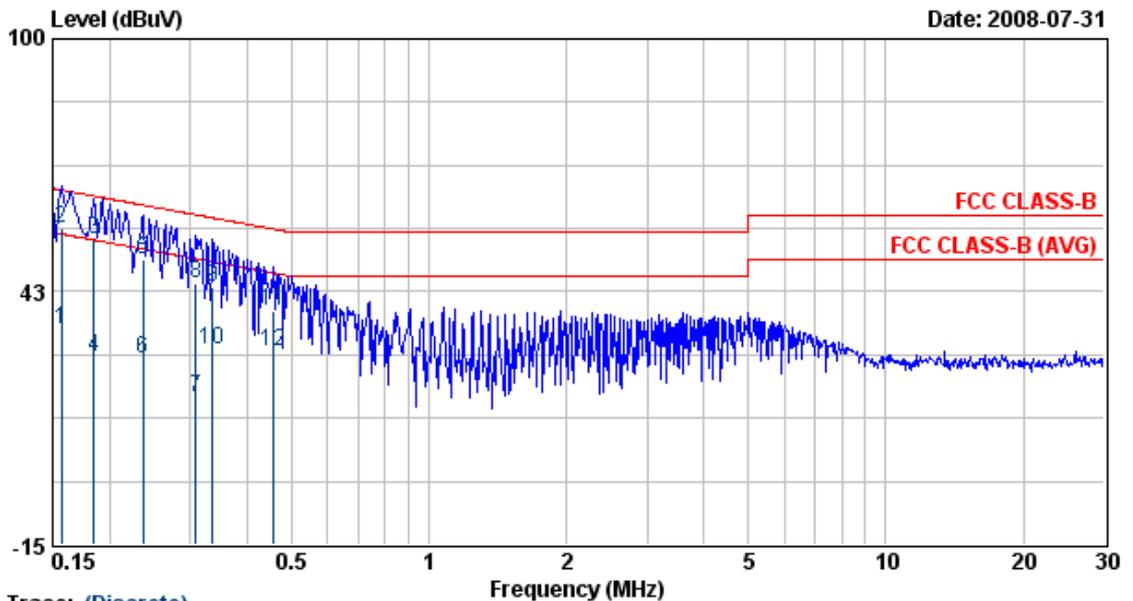


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.16	33.92	0.09	34.01	55.65	-21.63	AVERAGE
2	0.16	56.94	0.09	57.03	65.65	-8.62	QP
3	0.18	54.51	0.09	54.60	64.28	-9.69	QP
4	0.18	27.52	0.09	27.61	54.28	-26.68	AVERAGE
5	0.24	49.53	0.09	49.63	62.22	-12.59	QP
6	0.24	27.28	0.09	27.37	52.22	-24.85	AVERAGE
7	0.31	18.22	0.10	18.32	50.02	-31.70	AVERAGE
8	0.31	44.47	0.10	44.57	60.02	-15.45	QP
9	0.34	43.59	0.10	43.69	59.31	-15.62	QP
10	0.34	29.22	0.10	29.32	49.31	-19.99	AVERAGE
11	0.46	37.89	0.11	38.00	56.76	-18.76	QP
12	0.46	28.64	0.11	28.75	46.76	-18.01	AVERAGE

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 6	: 802.11an, HT40 CH38, R+L ANT	Temperature	: 25 °C
Memo	: DSA-20P-10 US 120180	Humidity	: 50 %

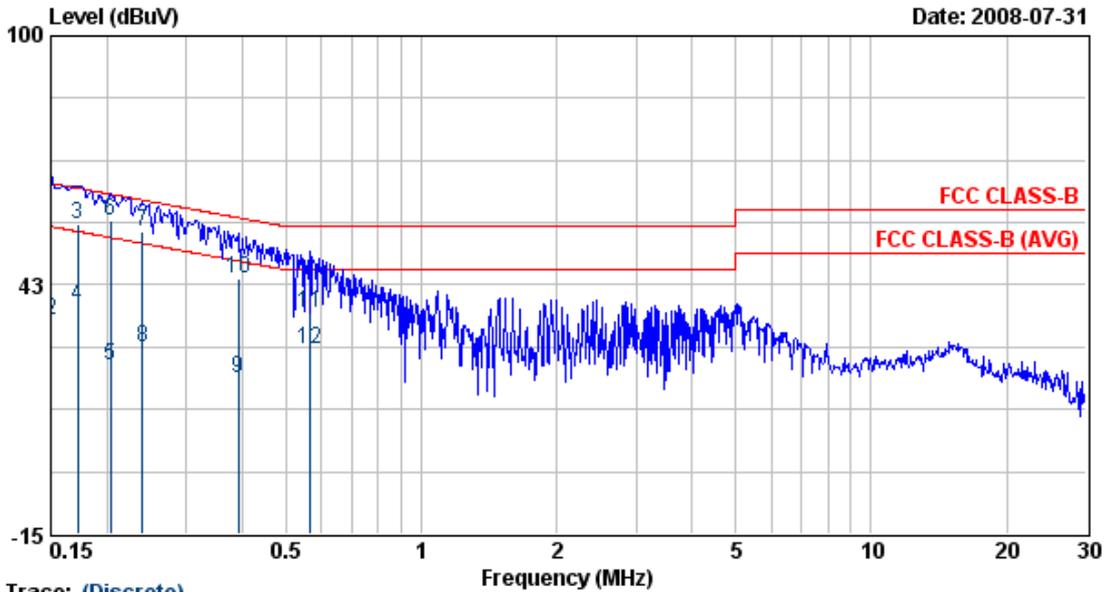


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.15	52.53	0.10	52.63	66.00	-13.37	QP
2	0.15	34.41	0.10	34.51	56.00	-21.49	AVERAGE
3	0.17	56.57	0.10	56.67	64.86	-8.18	QP
4	0.17	37.58	0.10	37.68	54.86	-17.18	AVERAGE
5	0.20	23.73	0.10	23.84	53.45	-29.61	AVERAGE
6	0.20	57.32	0.10	57.43	63.45	-6.02	QP
7	0.24	54.64	0.11	54.75	62.08	-7.33	QP
8	0.24	28.05	0.11	28.16	52.08	-23.92	AVERAGE
9	0.39	20.82	0.11	20.93	48.03	-27.11	AVERAGE
10	0.39	43.74	0.11	43.85	58.03	-14.18	QP
11	0.56	35.88	0.12	36.00	56.00	-20.00	QP
12	0.56	27.51	0.12	27.63	46.00	-18.37	AVERAGE

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 6	: 802.11an, HT40 CH38, R+L ANT	Temperature	: 25 °C
Memo	: DSA-20P-10 US 120180	Humidity	: 50 %

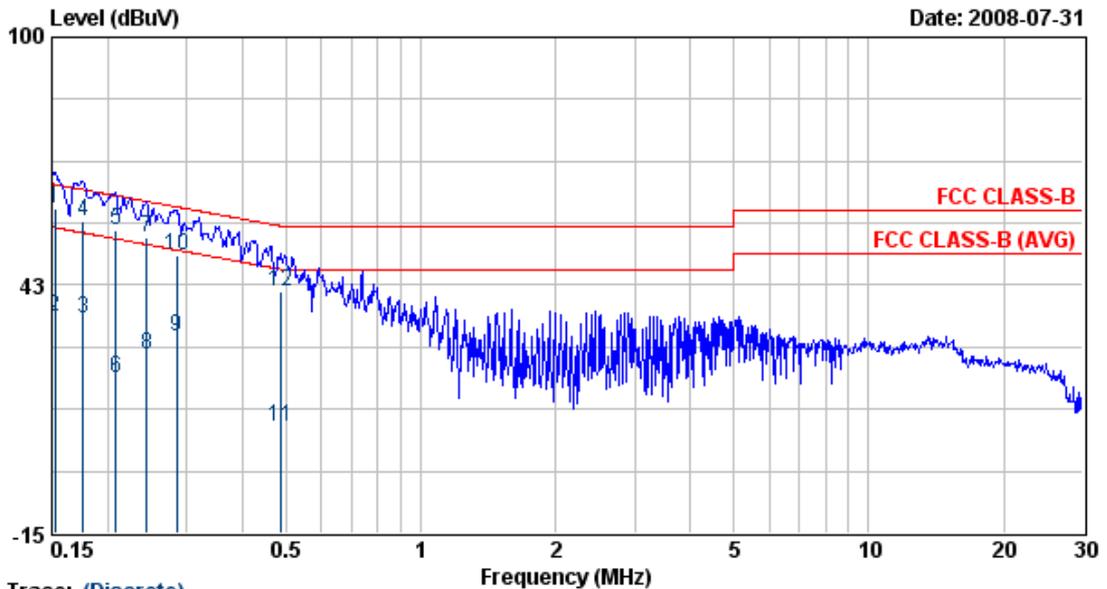


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.15	59.98	0.09	60.07	65.87	-5.80	QP
2	0.15	34.95	0.09	35.04	55.87	-20.83	AVERAGE
3	0.18	34.59	0.09	34.68	54.68	-20.00	AVERAGE
4	0.18	57.16	0.09	57.25	64.68	-7.43	QP
5	0.21	55.33	0.09	55.42	63.27	-7.85	QP
6	0.21	20.74	0.09	20.83	53.27	-32.44	AVERAGE
7	0.24	53.34	0.09	53.43	61.95	-8.52	QP
8	0.24	26.20	0.09	26.29	51.95	-25.66	AVERAGE
9	0.28	30.66	0.10	30.76	50.68	-19.92	AVERAGE
10	0.28	49.49	0.10	49.59	60.68	-11.09	QP
11	0.49	9.47	0.11	9.58	46.23	-36.65	AVERAGE
12	0.49	41.09	0.11	41.20	56.23	-15.04	QP

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 7	: 802.11an, HT40 CH151, All ANT	Temperature	: 25 °C
Memo	: DSA-20P-10 US 120180	Humidity	: 50 %

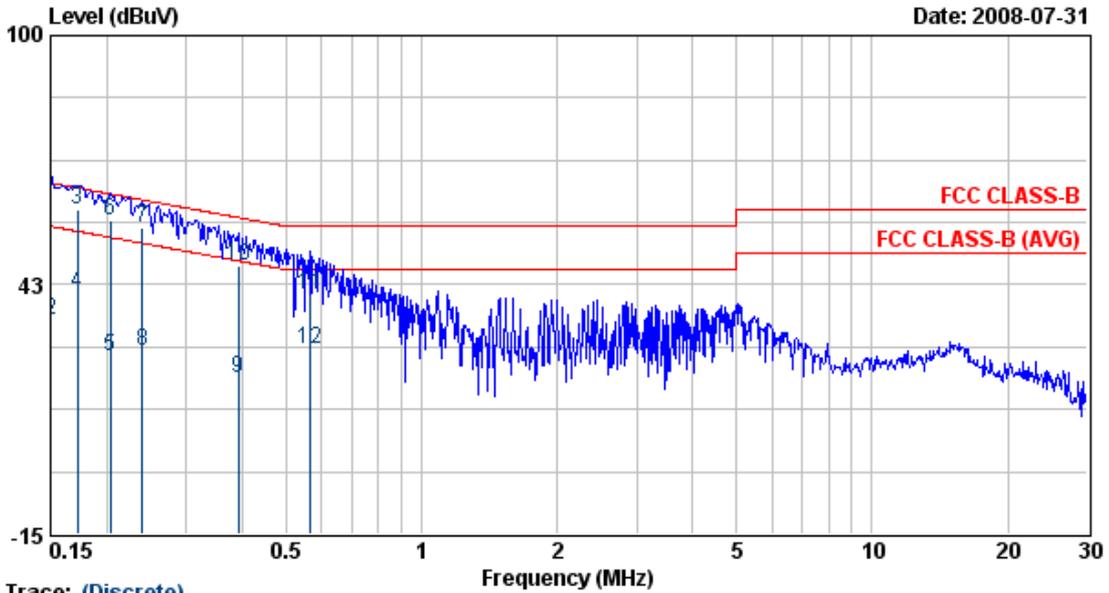


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.15	53.53	0.10	53.63	66.00	-12.37	QP
2	0.15	34.41	0.10	34.51	56.00	-21.49	AVERAGE
3	0.17	59.57	0.10	59.67	64.86	-5.18	QP
4	0.17	40.58	0.10	40.68	54.86	-14.18	AVERAGE
5	0.20	25.73	0.10	25.84	53.45	-27.61	AVERAGE
6	0.20	57.32	0.10	57.43	63.45	-6.02	QP
7	0.24	55.64	0.11	55.75	62.08	-6.33	QP
8	0.24	27.05	0.11	27.16	52.08	-24.92	AVERAGE
9	0.39	20.82	0.11	20.93	48.03	-27.11	AVERAGE
10	0.39	46.74	0.11	46.85	58.03	-11.18	QP
11	0.56	39.88	0.12	40.00	56.00	-16.00	QP
12	0.56	27.51	0.12	27.63	46.00	-18.37	AVERAGE

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 7	: 802.11an, HT40 CH38, All ANT	Temperature	: 25 °C
Memo	: DSA-20P-10 US 120180	Humidity	: 50 %

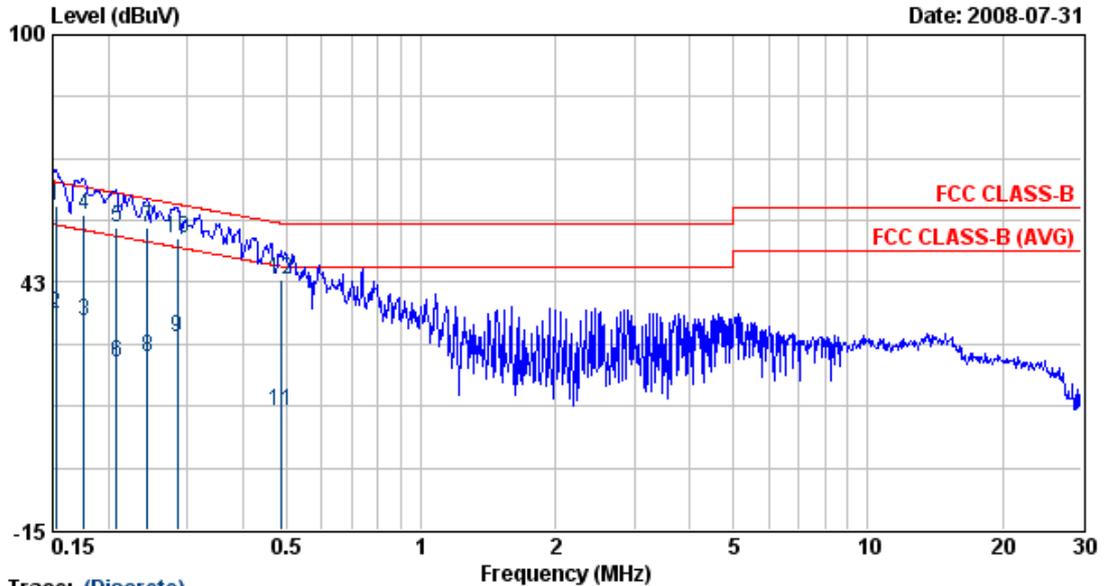


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.15	59.98	0.09	60.07	65.87	-5.80	QP
2	0.15	34.95	0.09	35.04	55.87	-20.83	AVERAGE
3	0.18	33.59	0.09	33.68	54.68	-21.00	AVERAGE
4	0.18	58.16	0.09	58.25	64.68	-6.43	QP
5	0.21	55.33	0.09	55.42	63.27	-7.85	QP
6	0.21	23.74	0.09	23.83	53.27	-29.44	AVERAGE
7	0.24	55.34	0.09	55.43	61.95	-6.52	QP
8	0.24	25.20	0.09	25.29	51.95	-26.66	AVERAGE
9	0.28	29.66	0.10	29.76	50.68	-20.92	AVERAGE
10	0.28	52.49	0.10	52.59	60.68	-8.09	QP
11	0.49	12.47	0.11	12.58	46.23	-33.65	AVERAGE
12	0.49	43.09	0.11	43.20	56.23	-13.04	QP

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38, 42, 46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 8	: 802.11a CH36	Temperature	: 25 °C
Memo	: MU18-2120150-A1	Humidity	: 50 %

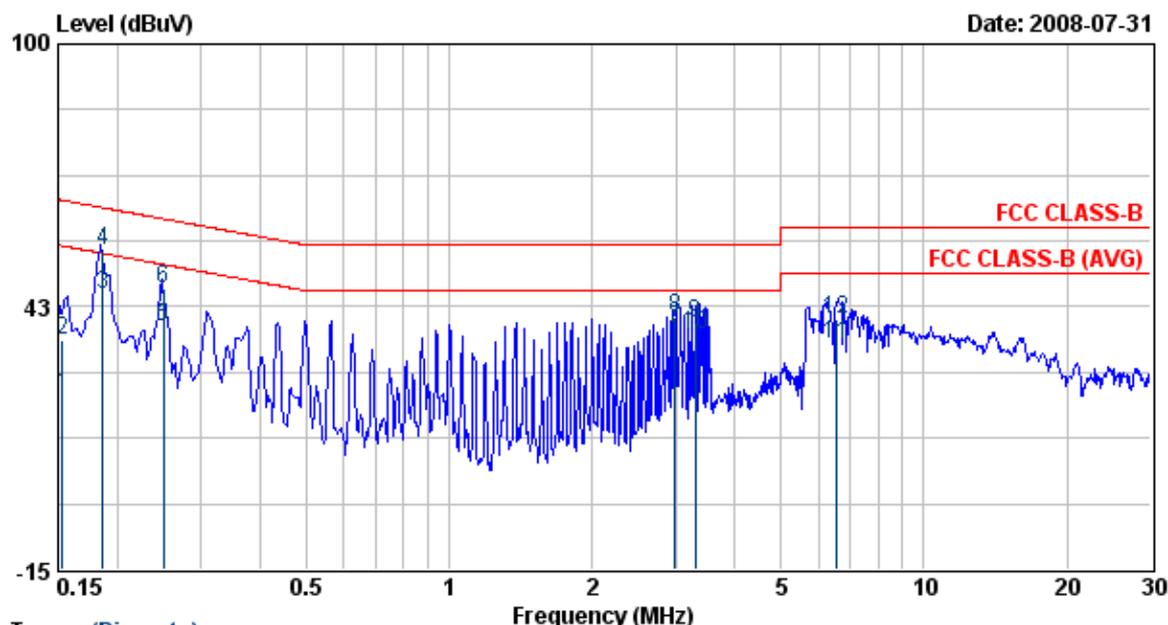


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.15	22.80	0.10	22.90	55.84	-32.94	AVERAGE
2	0.15	34.95	0.10	35.05	65.84	-30.79	QP
3	0.19	45.02	0.10	45.12	54.20	-9.08	AVERAGE
4	0.19	54.63	0.10	54.74	64.20	-9.46	QP
5	0.25	38.19	0.11	38.30	51.76	-13.46	AVERAGE
6	0.25	46.46	0.11	46.57	61.76	-15.20	QP
7	2.99	37.32	0.22	37.54	46.00	-8.46	AVERAGE
8	2.99	39.97	0.22	40.19	56.00	-15.81	QP
9	3.30	38.91	0.22	39.13	56.00	-16.87	QP
10	3.30	36.11	0.22	36.33	46.00	-9.67	AVERAGE
11	6.54	34.25	0.29	34.54	50.00	-15.46	AVERAGE
12	6.54	39.61	0.29	39.90	60.00	-20.10	QP

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 8	: 802.11a CH36	Temperature	: 25 °C
Memo	: MU18-2120150-A1	Humidity	: 50 %

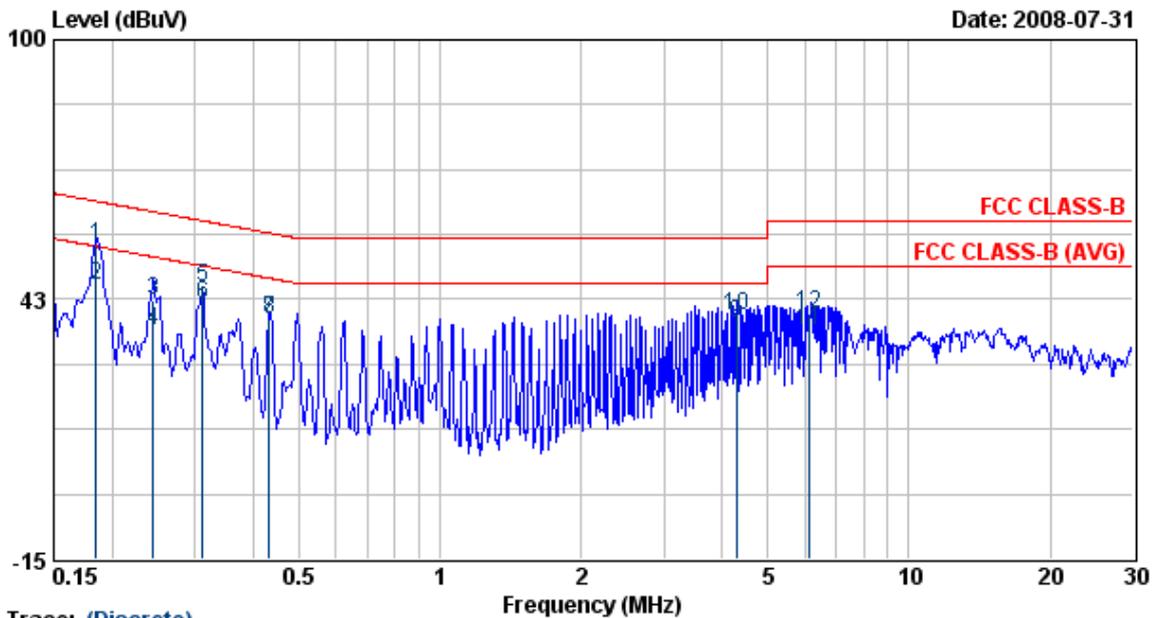


Trace: (Discrete)

Item	Freq MHz	Read Value dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dBuV	Remark
1	0.18	54.15	0.09	54.24	64.28	-10.05	QP
2	0.18	45.74	0.09	45.83	54.28	-8.45	AVERAGE
3	0.24	42.14	0.09	42.23	61.95	-19.72	QP
4	0.24	35.40	0.09	35.50	51.95	-16.45	AVERAGE
5	0.31	45.08	0.10	45.17	59.93	-14.75	QP
6	0.31	41.44	0.10	41.53	49.93	-8.39	AVERAGE
7	0.43	38.06	0.10	38.16	57.20	-19.04	QP
8	0.43	38.16	0.10	38.26	47.20	-8.93	AVERAGE
9	4.29	36.89	0.26	37.14	46.00	-8.86	AVERAGE
10	4.29	38.60	0.26	38.86	56.00	-17.14	QP
11	6.15	35.20	0.31	35.51	50.00	-14.49	AVERAGE
12	6.15	39.05	0.31	39.36	60.00	-20.64	QP

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 11	: 802.11an, HT20 CH36, R+L ANT	Temperature	: 25 °C
Memo	: MU18-2120150-A1	Humidity	: 50 %

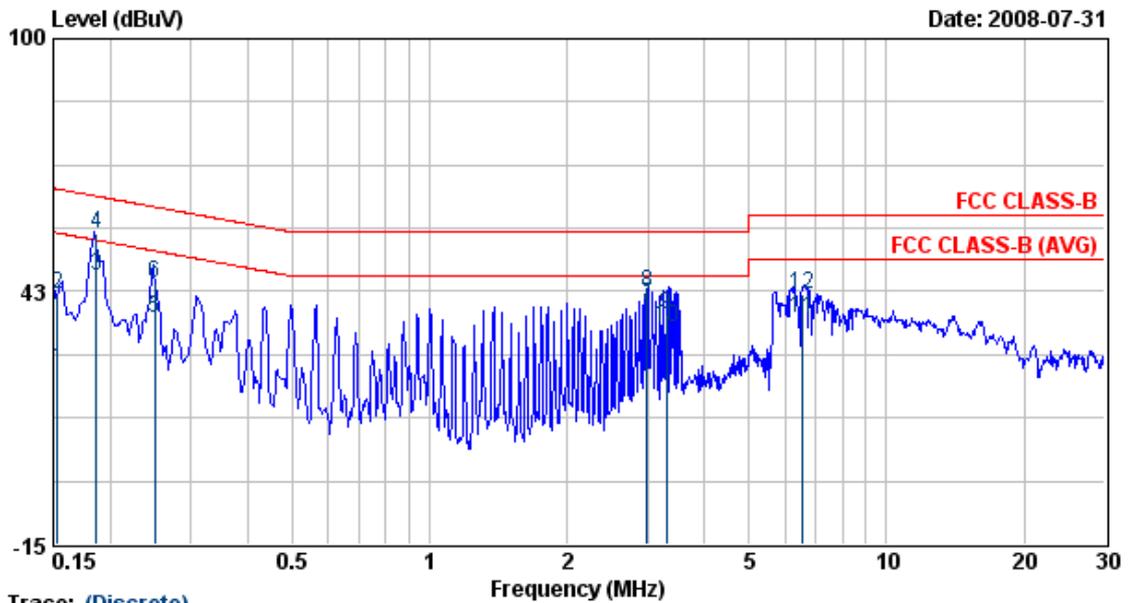


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.15	24.80	0.10	24.90	55.84	-30.94	AVERAGE
2	0.15	41.95	0.10	42.05	65.84	-23.79	QP
3	0.19	46.02	0.10	46.12	54.20	-8.08	AVERAGE
4	0.19	55.63	0.10	55.74	64.20	-8.46	QP
5	0.25	36.19	0.11	36.30	51.76	-15.46	AVERAGE
6	0.25	44.46	0.11	44.57	61.76	-17.20	QP
7	2.99	39.32	0.22	39.54	46.00	-6.46	AVERAGE
8	2.99	41.97	0.22	42.19	56.00	-13.81	QP
9	3.30	36.91	0.22	37.13	56.00	-18.87	QP
10	3.30	34.11	0.22	34.33	46.00	-11.67	AVERAGE
11	6.54	36.25	0.29	36.54	50.00	-13.46	AVERAGE
12	6.54	41.61	0.29	41.90	60.00	-18.10	QP

- Remarks:
- Level = Read Level + Factor
  - Factor = LISN(ISN) Factor + Cable Loss
  - According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
  - The data is worse case.

Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 11	: 802.11an, HT20 CH36, R+L ANT	Temperature	: 25 °C
Memo	: MU18-2120150-A1	Humidity	: 50 %

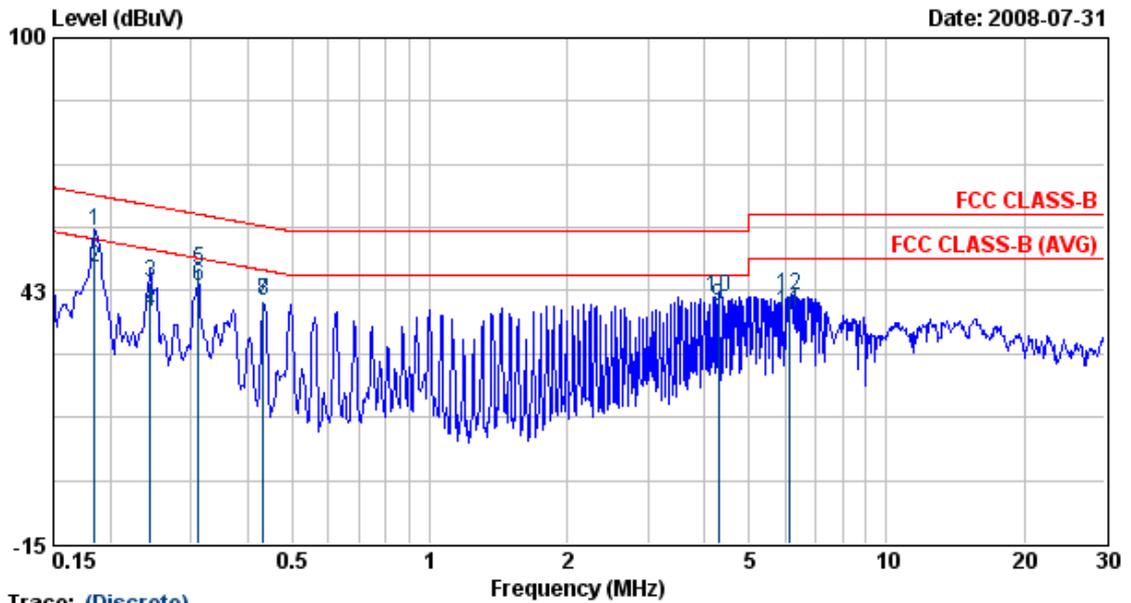


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.18	56.15	0.09	56.24	64.28	-8.05	QP
2	0.18	47.74	0.09	47.83	54.28	-6.45	AVERAGE
3	0.24	44.14	0.09	44.23	61.95	-17.72	QP
4	0.24	37.40	0.09	37.50	51.95	-14.45	AVERAGE
5	0.31	47.08	0.10	47.17	59.93	-12.75	QP
6	0.31	43.44	0.10	43.53	49.93	-6.39	AVERAGE
7	0.43	40.06	0.10	40.16	57.20	-17.04	QP
8	0.43	40.16	0.10	40.26	47.20	-6.93	AVERAGE
9	4.29	38.89	0.26	39.14	46.00	-6.86	AVERAGE
10	4.29	40.60	0.26	40.86	56.00	-15.14	QP
11	6.15	37.20	0.31	37.51	50.00	-12.49	AVERAGE
12	6.15	41.05	0.31	41.36	60.00	-18.64	QP

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 12	: 802.11an, HT20 CH36, All ANT	Temperature	: 25 °C
Memo	: MU18-2120150-A1	Humidity	: 50 %

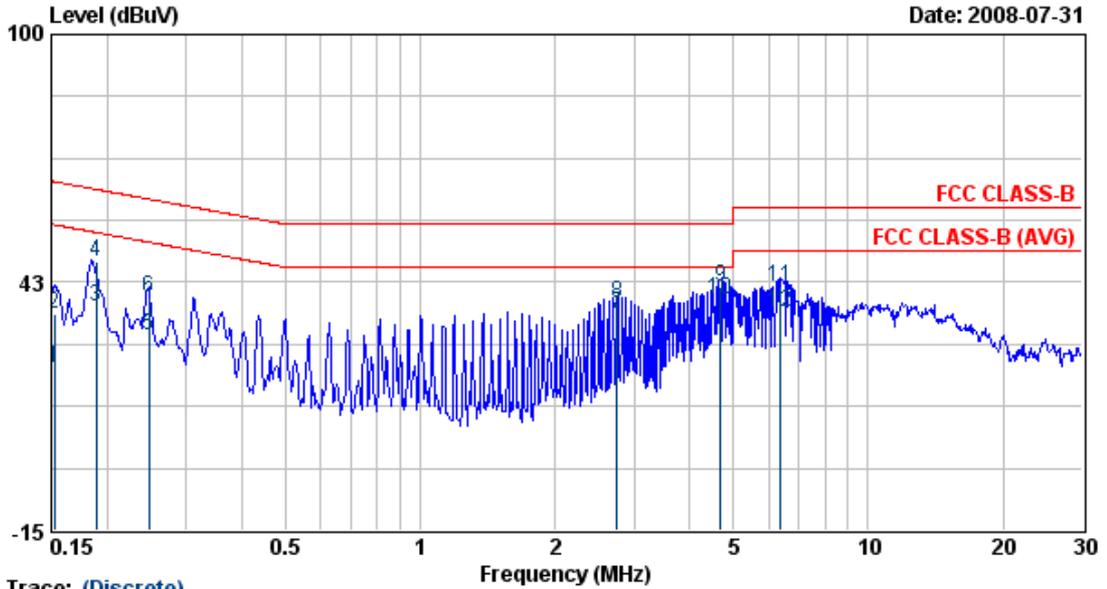


Trace: (Discrete)

Item	Freq MHz	Read Value dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dBuV	Remark
1	0.15	22.51	0.10	22.61	55.87	-33.25	AVERAGE
2	0.15	35.09	0.10	35.19	65.87	-30.68	QP
3	0.19	36.69	0.10	36.80	54.08	-17.28	AVERAGE
4	0.19	47.10	0.10	47.20	64.08	-16.88	QP
5	0.25	29.94	0.11	30.06	51.81	-21.76	AVERAGE
6	0.25	38.67	0.11	38.78	61.81	-23.03	QP
7	2.75	35.04	0.21	35.25	46.00	-10.75	AVERAGE
8	2.75	37.40	0.21	37.61	56.00	-18.39	QP
9	4.69	41.11	0.25	41.36	56.00	-14.64	QP
10	4.69	38.11	0.25	38.36	46.00	-7.64	AVERAGE
11	6.38	41.26	0.29	41.55	60.00	-18.45	QP
12	6.38	35.32	0.29	35.60	50.00	-14.40	AVERAGE

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN (ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36, 44, 48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 12	: 802.11an, HT20 CH36, All ANT	Temperature	: 25 °C
Memo	: MU18-2120150-A1	Humidity	: 50 %

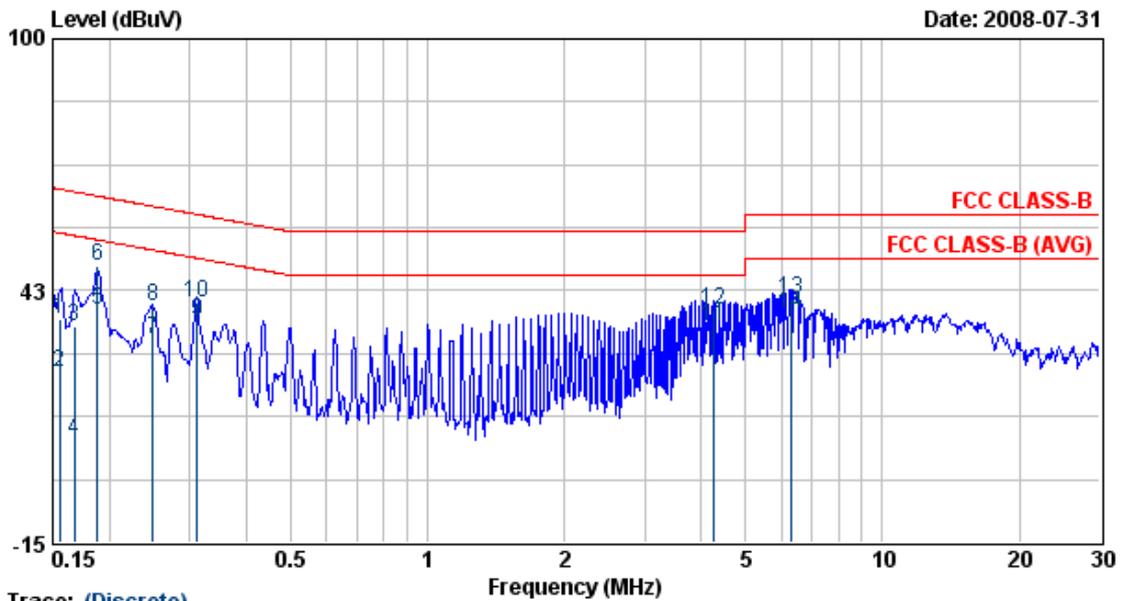


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.16	35.77	0.09	35.86	65.71	-29.85	QP
2	0.16	23.71	0.09	23.80	55.71	-31.92	AVERAGE
3	0.17	34.37	0.09	34.46	65.08	-30.62	QP
4	0.17	8.15	0.09	8.24	55.08	-46.84	AVERAGE
5	0.19	38.21	0.09	38.30	54.11	-15.81	AVERAGE
6	0.19	47.92	0.09	48.01	64.11	-16.10	QP
7	0.25	31.41	0.09	31.50	51.78	-20.28	AVERAGE
8	0.25	38.84	0.09	38.93	61.78	-22.85	QP
9	0.31	35.55	0.10	35.65	49.92	-14.28	AVERAGE
10	0.31	39.55	0.10	39.64	59.92	-20.28	QP
11	4.25	33.97	0.26	34.23	46.00	-11.77	AVERAGE
12	4.25	37.69	0.26	37.95	56.00	-18.05	QP
13	6.32	40.42	0.31	40.74	60.00	-19.26	QP
14	6.32	36.89	0.31	37.21	50.00	-12.79	AVERAGE

- Remarks:
- Level = Read Level + Factor
  - Factor = LISN(ISN) Factor + Cable Loss
  - According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
  - The data is worse case.

Power	: AC 120V	Pol/Phase	: LINE
Test Mode 13	: 802.11an, HT40 CH38, R+L ANT	Temperature	: 25 °C
Memo	: DSA-20P-10 US 120180	Humidity	: 50 %

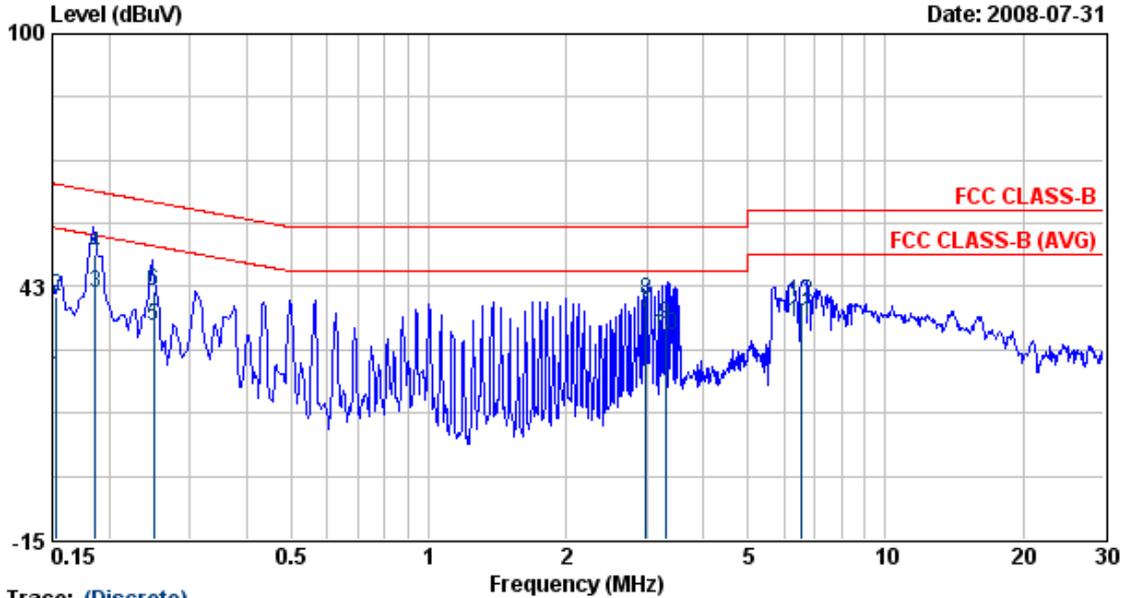


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.15	21.80	0.10	21.90	55.84	-33.94	AVERAGE
2	0.15	39.95	0.10	40.05	65.84	-25.79	QP
3	0.19	41.02	0.10	41.12	54.20	-13.08	AVERAGE
4	0.19	49.63	0.10	49.74	64.20	-14.46	QP
5	0.25	33.19	0.11	33.30	51.76	-18.46	AVERAGE
6	0.25	41.46	0.11	41.57	61.76	-20.20	QP
7	2.99	36.32	0.22	36.54	46.00	-9.46	AVERAGE
8	2.99	38.97	0.22	39.19	56.00	-16.81	QP
9	3.30	33.91	0.22	34.13	56.00	-21.87	QP
10	3.30	31.11	0.22	31.33	46.00	-14.67	AVERAGE
11	6.54	34.25	0.29	34.54	50.00	-15.46	AVERAGE
12	6.54	38.61	0.29	38.90	60.00	-21.10	QP

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 13	: 802.11an, HT40 CH38, R+L ANT	Temperature	: 25 °C
Memo	: MU18-2120150-A1	Humidity	: 50 %

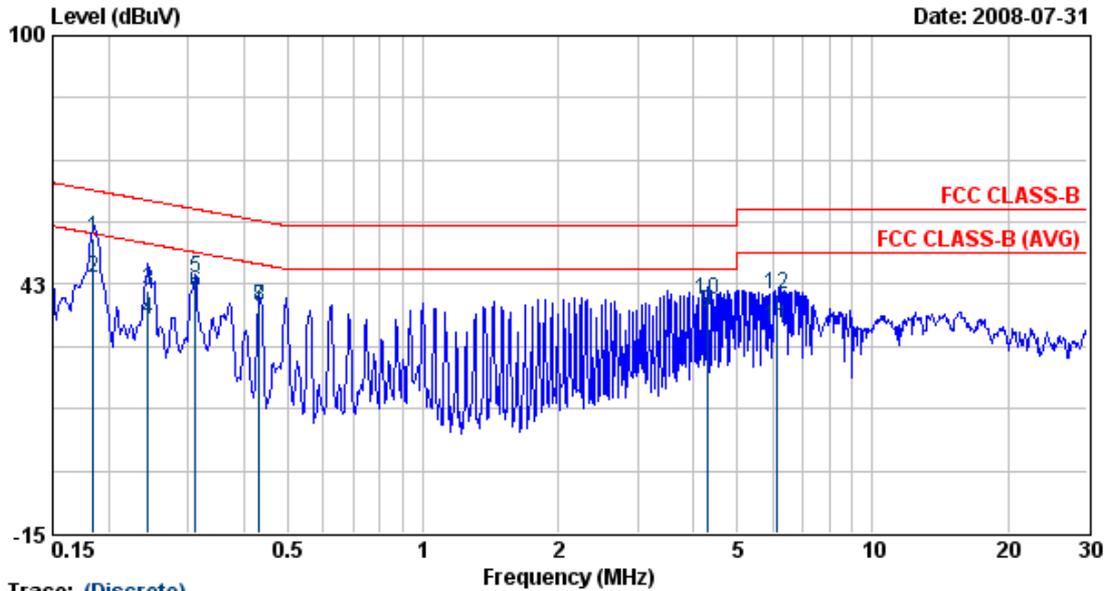


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.18	53.15	0.09	53.24	64.28	-11.05	QP
2	0.18	43.74	0.09	43.83	54.28	-10.45	AVERAGE
3	0.24	41.14	0.09	41.23	61.95	-20.72	QP
4	0.24	34.40	0.09	34.50	51.95	-17.45	AVERAGE
5	0.31	44.08	0.10	44.17	59.93	-15.75	QP
6	0.31	40.44	0.10	40.53	49.93	-9.39	AVERAGE
7	0.43	37.06	0.10	37.16	57.20	-20.04	QP
8	0.43	37.16	0.10	37.26	47.20	-9.93	AVERAGE
9	4.29	35.89	0.26	36.14	46.00	-9.86	AVERAGE
10	4.29	38.60	0.26	38.86	56.00	-17.14	QP
11	6.15	32.20	0.31	32.51	50.00	-17.49	AVERAGE
12	6.15	40.05	0.31	40.36	60.00	-19.64	QP

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss  
 3. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.  
 4. The data is worse case.


Power	: AC 120V	Pol/Phase	: LINE
Test Mode 14	: 802.11an, HT40 CH38, All ANT	Temperature	: 25 °C
Memo	: MU18-2120150-A1	Humidity	: 50 %

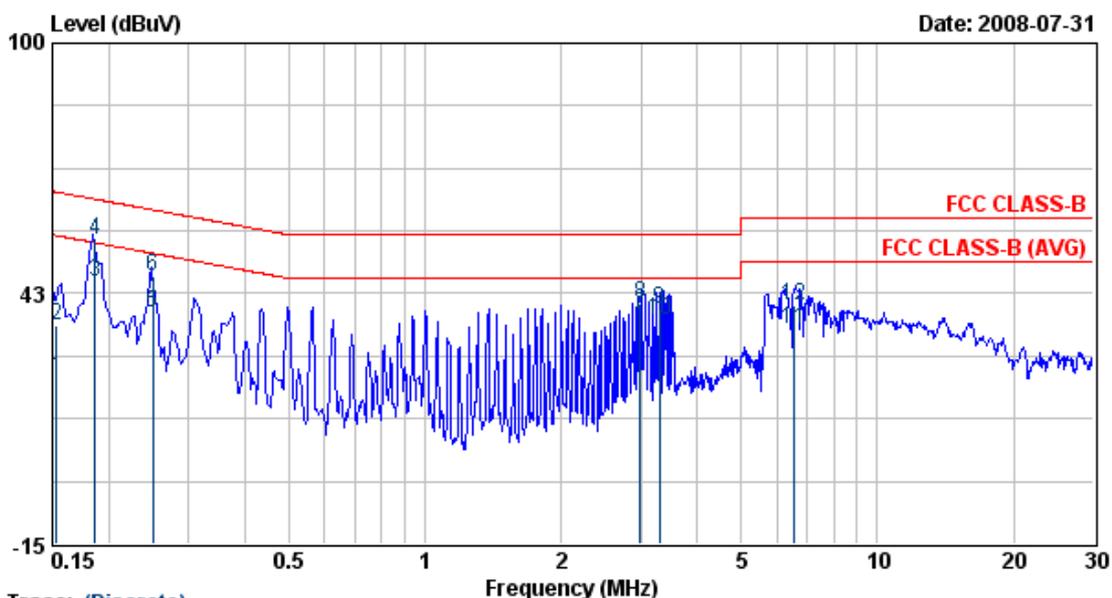

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.15	22.80	0.10	22.90	55.84	-32.94	AVERAGE
2	0.15	34.95	0.10	35.05	65.84	-30.79	QP
3	0.19	45.02	0.10	45.12	54.20	-9.08	AVERAGE
4	0.19	54.63	0.10	54.74	64.20	-9.46	QP
5	0.25	38.19	0.11	38.30	51.76	-13.46	AVERAGE
6	0.25	46.46	0.11	46.57	61.76	-15.20	QP
7	2.99	37.32	0.22	37.54	46.00	-8.46	AVERAGE
8	2.99	39.97	0.22	40.19	56.00	-15.81	QP
9	3.30	38.91	0.22	39.13	56.00	-16.87	QP
10	3.30	36.11	0.22	36.33	46.00	-9.67	AVERAGE
11	6.54	34.25	0.29	34.54	50.00	-15.46	AVERAGE
12	6.54	39.61	0.29	39.90	60.00	-20.10	QP

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISN) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38, 42, 46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
  4. The data is worse case.

Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode 14	: 802.11an, HT40 CH38, All ANT	Temperature	: 25 °C
Memo	: MU18-2120150-A1	Humidity	: 50 %

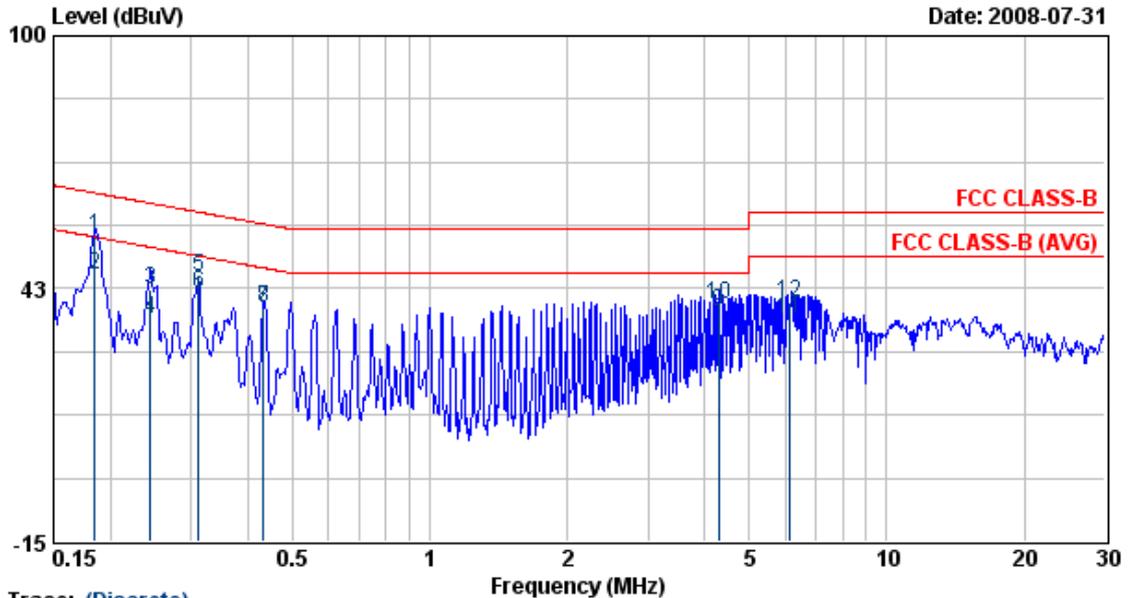

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.18	54.15	0.09	54.24	64.28	-10.05	QP
2	0.18	45.74	0.09	45.83	54.28	-8.45	AVERAGE
3	0.24	42.14	0.09	42.23	61.95	-19.72	QP
4	0.24	35.40	0.09	35.50	51.95	-16.45	AVERAGE
5	0.31	45.08	0.10	45.17	59.93	-14.75	QP
6	0.31	41.44	0.10	41.53	49.93	-8.39	AVERAGE
7	0.43	38.06	0.10	38.16	57.20	-19.04	QP
8	0.43	38.16	0.10	38.26	47.20	-8.93	AVERAGE
9	4.29	36.89	0.26	37.14	46.00	-8.86	AVERAGE
10	4.29	38.60	0.26	38.86	56.00	-17.14	QP
11	6.15	35.20	0.31	35.51	50.00	-14.49	AVERAGE
12	6.15	39.05	0.31	39.36	60.00	-20.64	QP

- Remarks:
1. Level = Read Level + Factor
  2. Factor = LISN(ISM) Factor + Cable Loss
  3. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38, 42, 46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
  4. The data is worse case.

Test engineer: Ben


## 5. Test of Radiated Emission

Radiated emissions from 30 MHz to 40 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 1.4.2. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

### 5.1. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 5.2. Typical Test Setup Layout of Radiated Emission

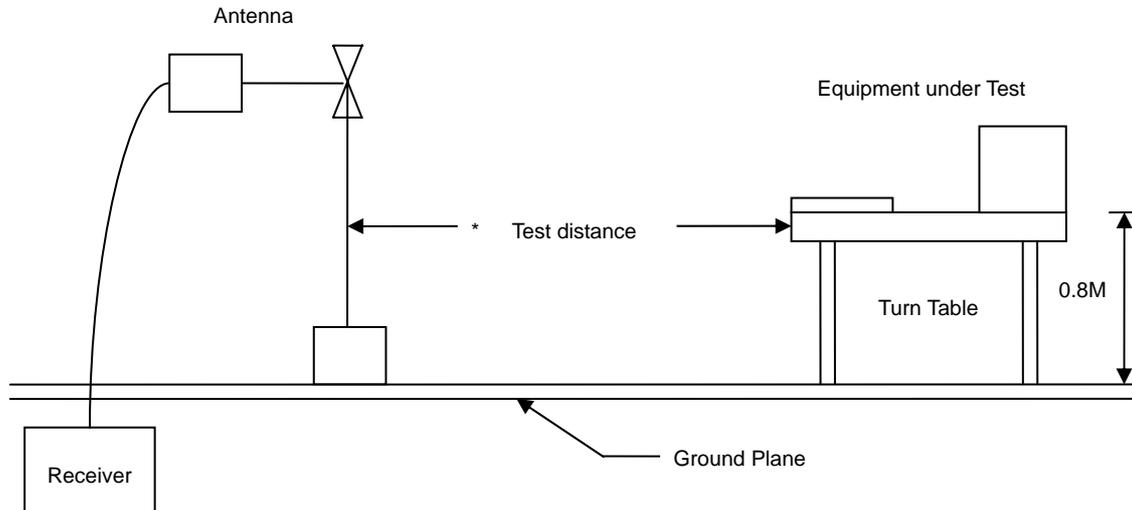


### 5.3. Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Bilog Antenna	CBL6112B	Schaffner	2840	2008/05/15	2009/05/14
Signal Generator	8648B	HP	3629U00612	2007/10/09	2008/10/08
Amplifier	8447D	Agilent	2944A10593	2008/05/26	2009/05/25
EMI Receiver	SCR-3501	SCHAFFNER	437	2007/11/26	2008/11/25
Spectrum	FSP40	R&S	100047	2008/02/22	2009/02/21
Horn Antenna	3115	EMCO	31589	2008/04/01	2009/03/30
Amplifier	8449B	Agilent	3008A01954	2008/01/24	2009/01/23

5.4. Test Result of Radiated Emission

Test Mode 1

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1020 hPa
Rate	: 54 Mbps		
Memo	: DSA-20P-10 US 120180		

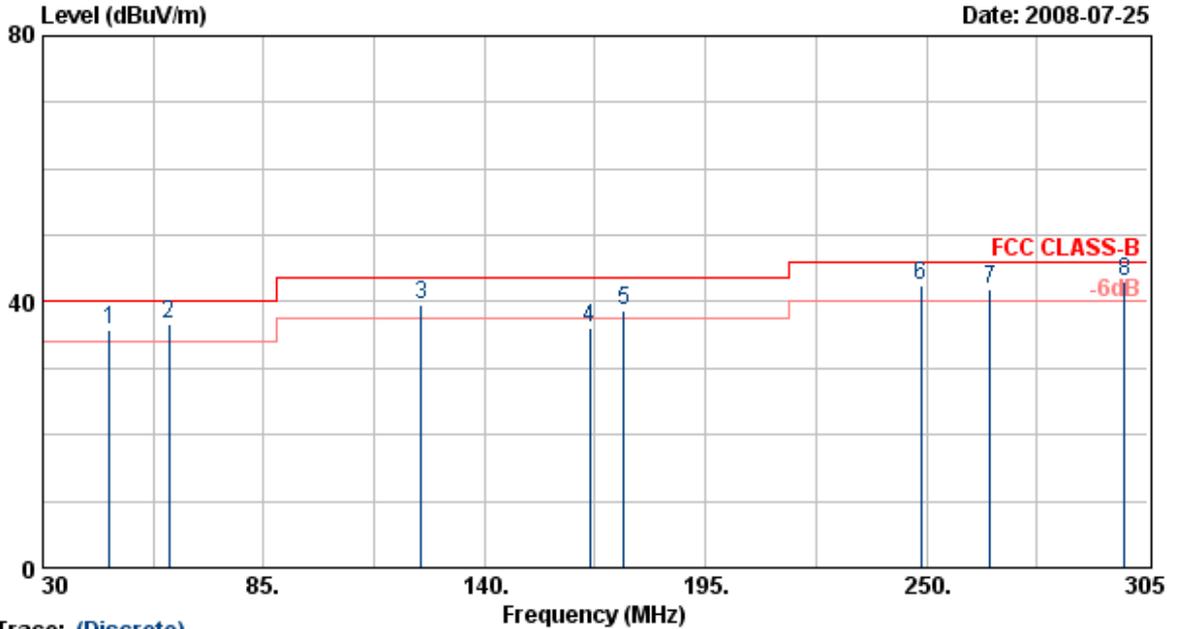


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	46.50	50.15	-14.46	35.69	40.00	-4.31	QP	100	46
2	61.35	53.98	-17.43	36.55	40.00	-3.45	QP	100	46
3	124.33	52.90	-13.34	39.56	43.50	-3.94	QP	100	88
4	166.13	48.92	-12.99	35.93	43.50	-7.57	Peak	100	88
5	174.65	48.55	-9.93	38.62	43.50	-4.88	QP	100	111
6	248.63	54.67	-12.25	42.42	46.00	-3.58	QP	100	111
7	265.95	50.33	-8.33	42.00	46.00	-4.00	QP	100	77
8	299.23	52.17	-9.25	42.92	46.00	-3.08	QP	100	77

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1020 hPa
Rate	: 54 Mbps		
Memo	: DSA-20P-10 US 120180		

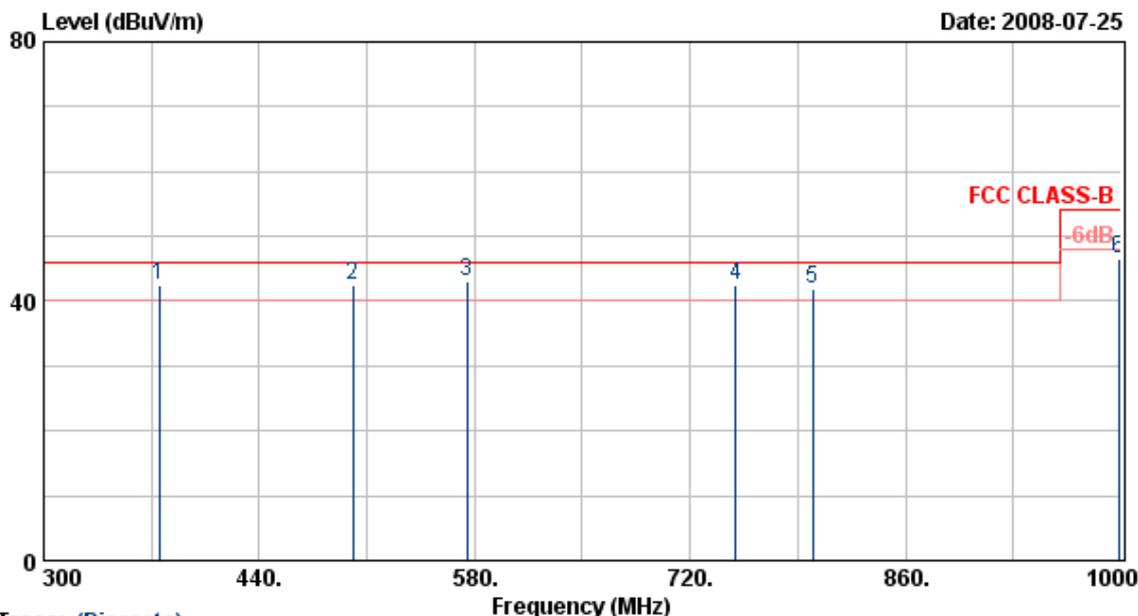


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.00	51.18	-8.84	42.34	46.00	-3.66	QP	100	98
2	500.90	47.26	-4.89	42.37	46.00	-3.63	QP	100	98
3	575.00	42.65	0.27	42.92	46.00	-3.08	QP	100	98
4	749.40	41.29	1.28	42.57	46.00	-3.43	QP	100	120
5	799.80	44.68	-2.83	41.85	46.00	-4.15	QP	100	103
6	998.60	43.87	2.53	46.40	54.00	-7.60	QP	100	100

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1020 hPa
Rate	: 54 Mbps		
Memo	: DSA-20P-10 US 120180		

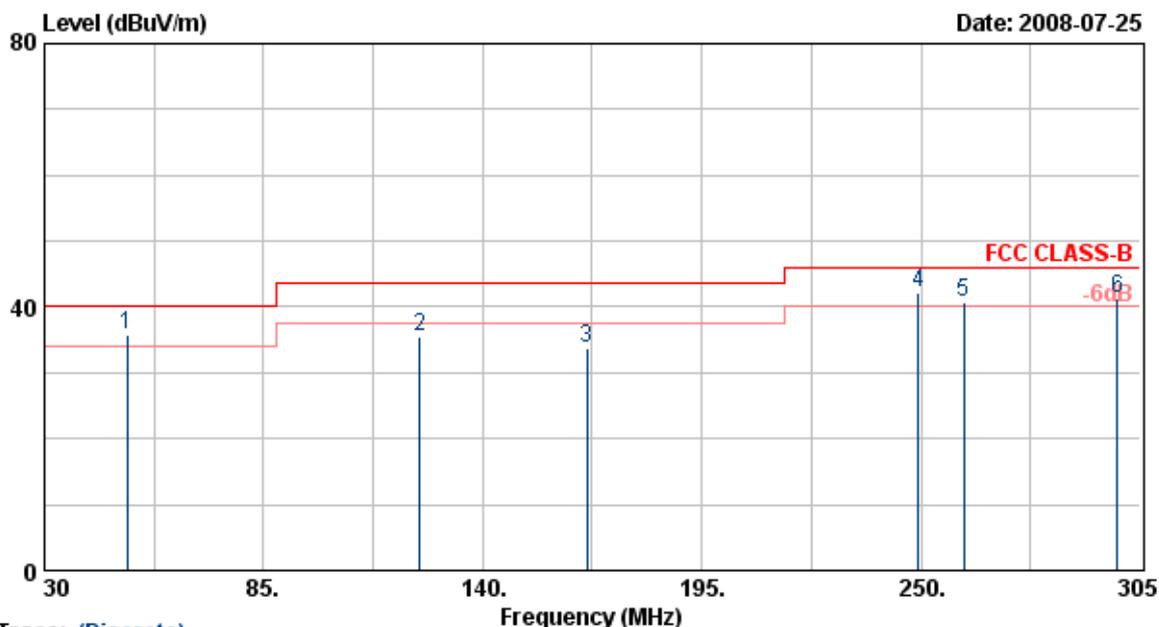


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	50.63	56.85	-21.19	35.66	40.00	-4.34	QP	100	77
2	124.33	54.95	-19.41	35.54	43.50	-7.96	Peak	100	98
3	166.13	52.49	-18.67	33.82	43.50	-9.68	Peak	100	98
4	249.45	59.88	-17.75	42.13	46.00	-3.87	QP	100	56
5	260.73	55.82	-15.04	40.78	46.00	-5.22	QP	100	56
6	299.23	55.66	-14.39	41.27	46.00	-4.73	QP	100	87

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1020 hPa
Rate	: 54 Mbps		
Memo	: DSA-20P-10 US 120180		

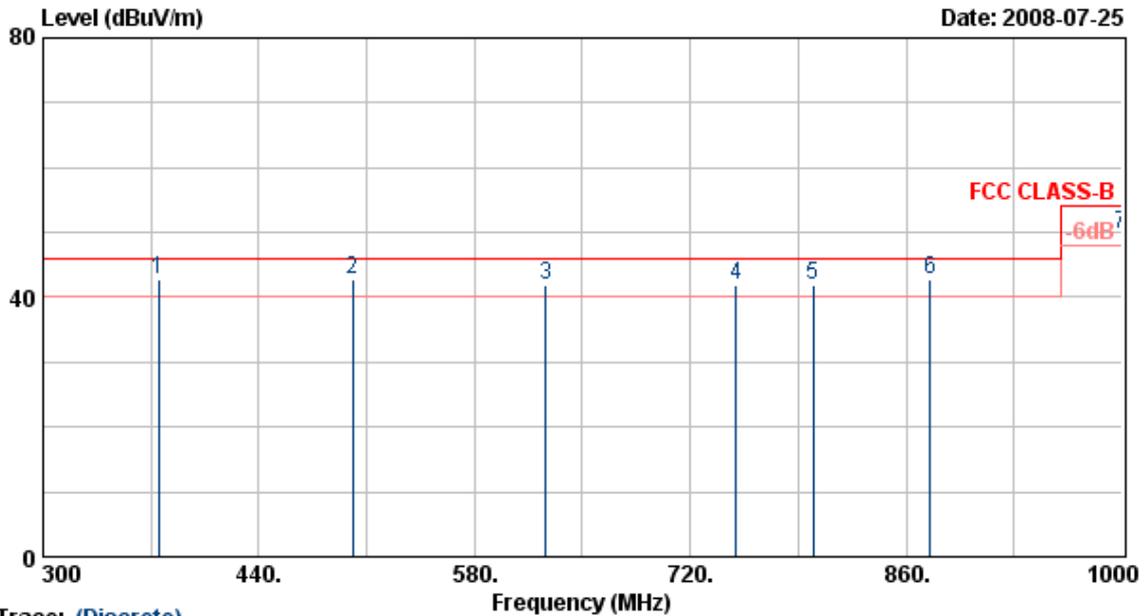


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.00	53.00	-10.15	42.85	46.00	-3.15	QP	100	99
2	500.90	47.32	-4.52	42.80	46.00	-3.20	QP	100	122
3	626.20	43.74	-1.89	41.85	46.00	-4.15	QP	100	177
4	749.40	41.52	0.34	41.86	46.00	-4.14	QP	100	147
5	799.80	42.59	-0.57	42.02	46.00	-3.98	QP	100	147
6	875.40	38.68	3.99	42.67	46.00	-3.33	QP	100	147
7	999.90	46.55	3.34	49.89	54.00	-4.11	QP	100	147

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 36	Humidity	: 70 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1000 hPa
Rate	: 54 Mbps		
Memo	: DSA-20P-10 US 120180		

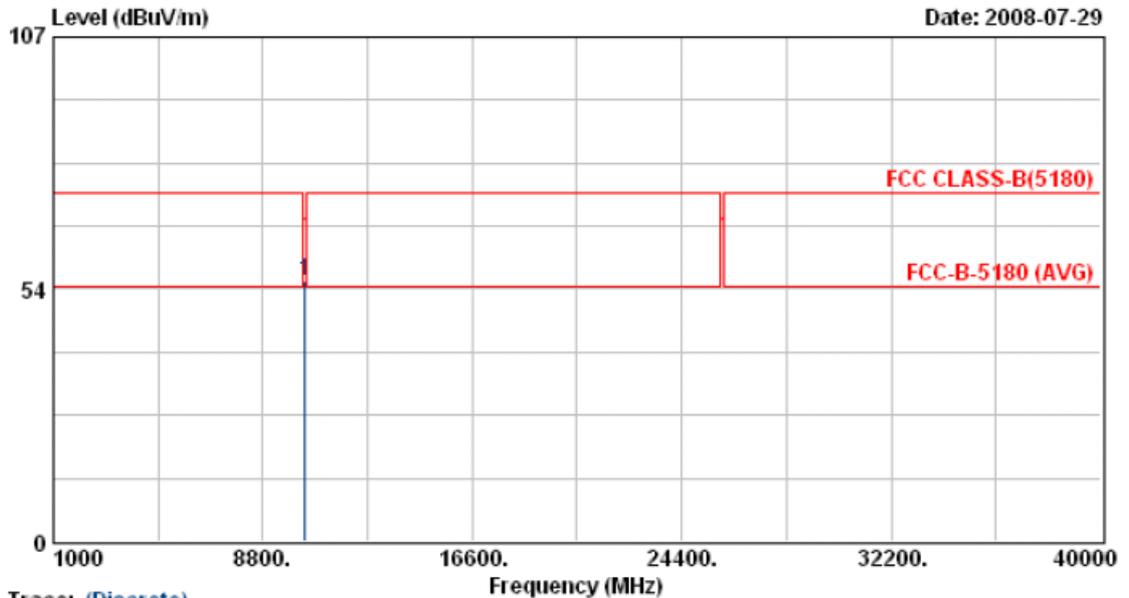


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10359.85	42.54	12.78	55.32	68.30	-12.98	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 36	Humidity	: 70 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1000 hPa
Rate	: 54 Mbps		
Memo	: DSA-20P-10 US 120180		

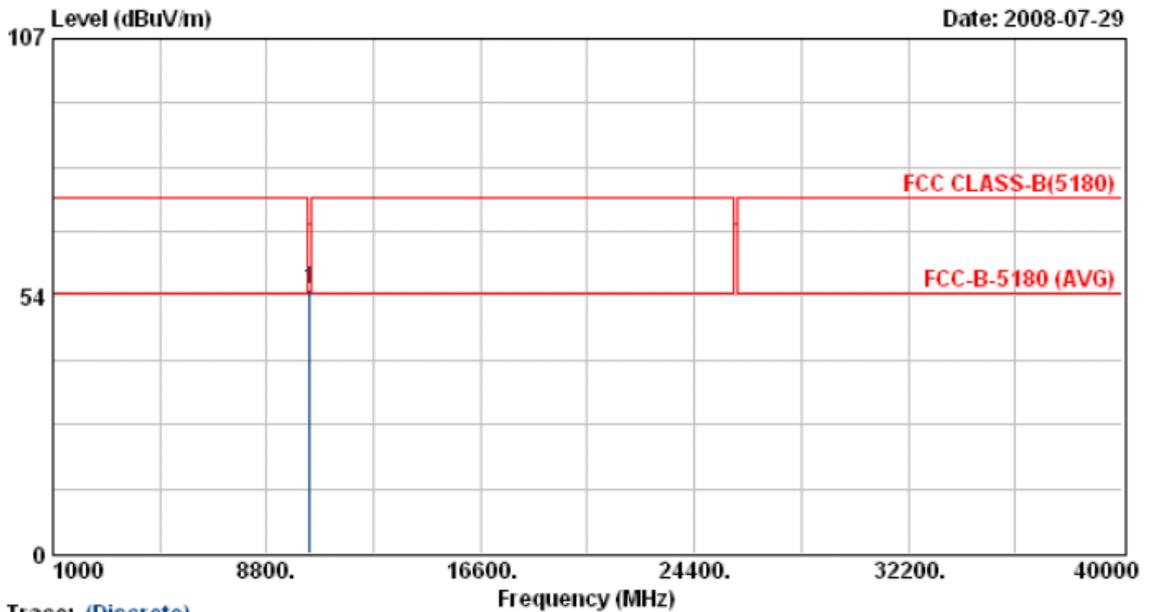

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10360.00	42.02	12.78	54.80	68.30	-13.50	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 44  
 Modulation Type : 802.11a  
 Rate : 54 Mbps  
 Memo : DSA-20P-10 US 120180

Pol/Phase : VERTICAL  
 Temperature : 27 °C  
 Humidity : 70 %  
 Atmospheric Pressure: 1000 hPa

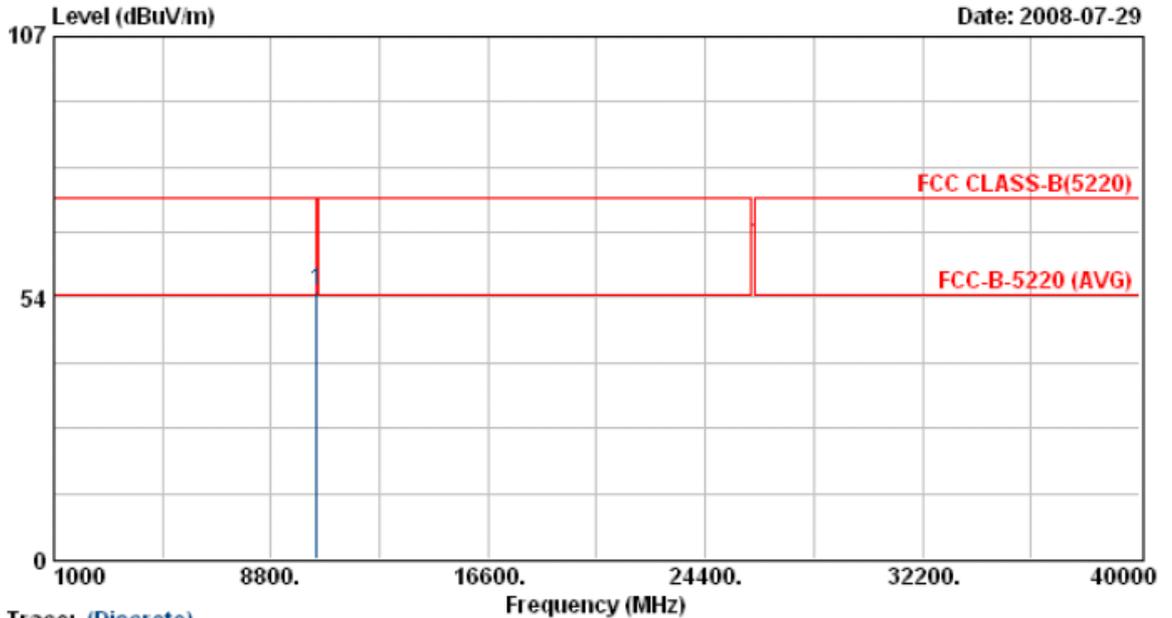


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10440.05	42.14	12.90	55.04	68.30	-13.26	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 44	Humidity	: 70 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1000 hPa
Rate	: 54 Mbps		
Memo	: DSA-20P-10 US 120180		

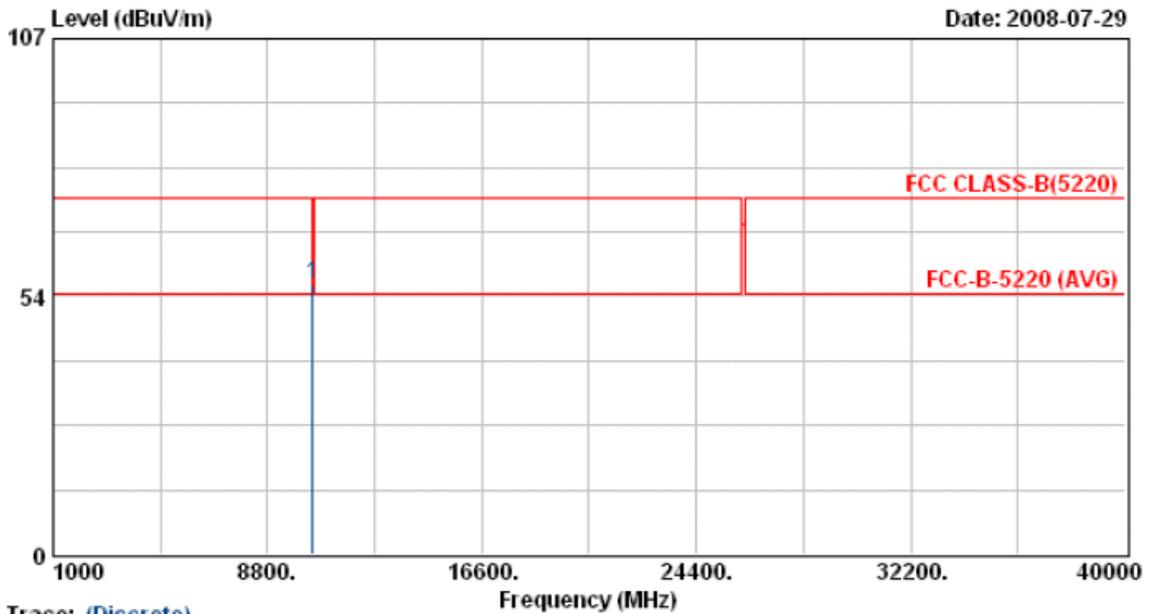


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10440.15	43.25	12.90	56.15	68.30	-12.15	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 48	Humidity	: 70 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1000 hPa
Rate	: 54 Mbps		
Memo	: DSA-20P-10 US 120180		

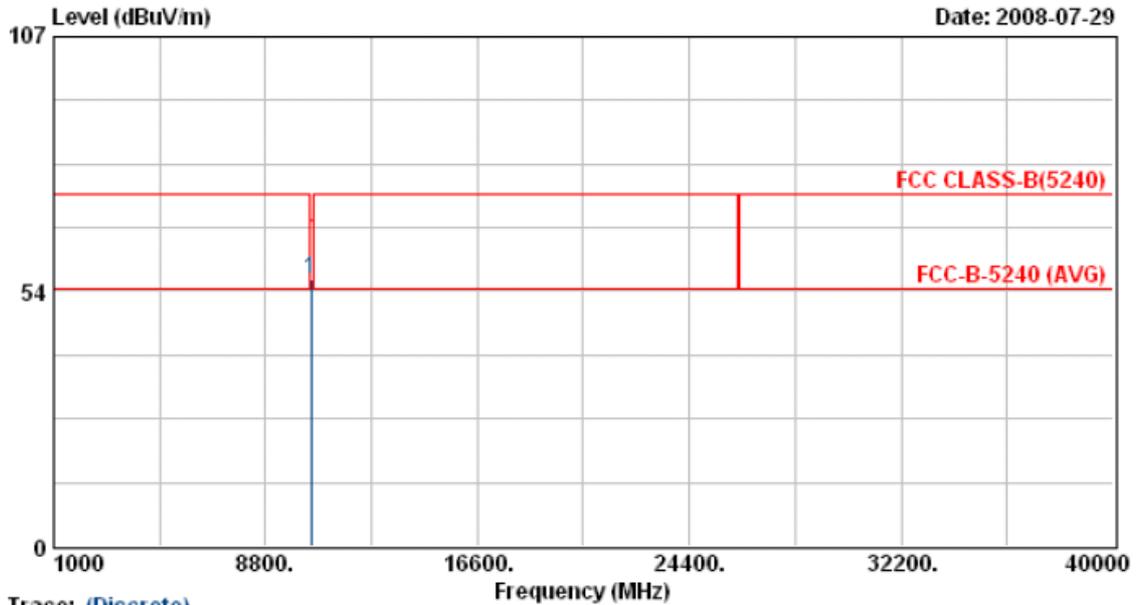

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.85	43.23	12.97	56.20	68.30	-12.10	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 48  
 Modulation Type : 802.11a  
 Rate : 54 Mbps  
 Memo : DSA-20P-10 US 120180

Pol/Phase : HORIZONTAL  
 Temperature : 27 °C  
 Humidity : 70 %  
 Atmospheric Pressure: 1000 hPa

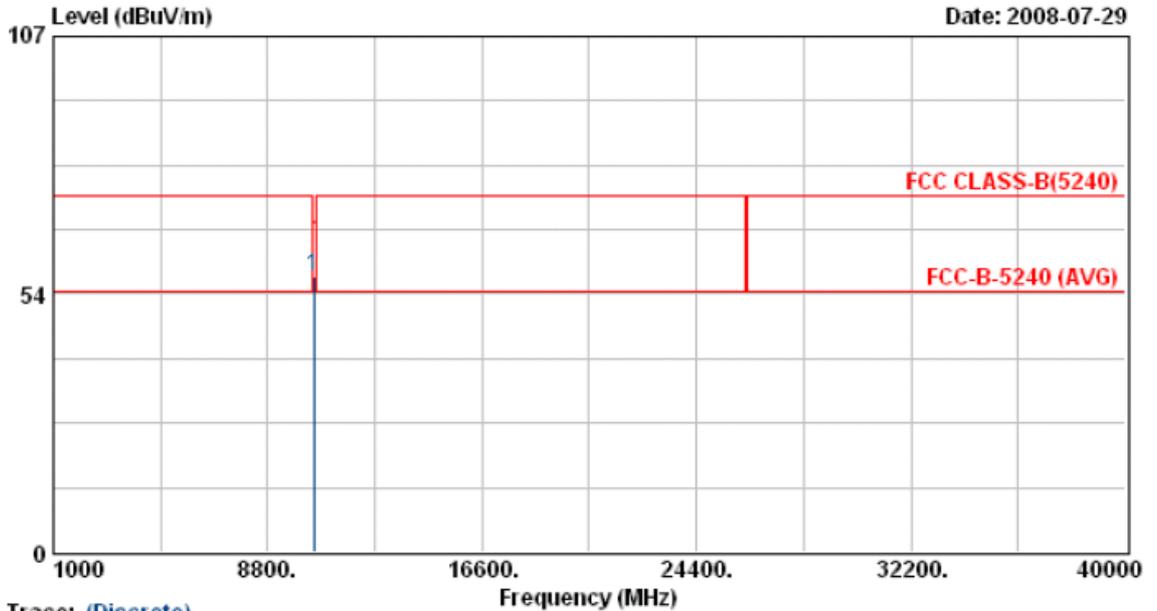

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.95	44.26	12.97	57.23	68.30	-11.07	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

**Test Mode 4**

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180		

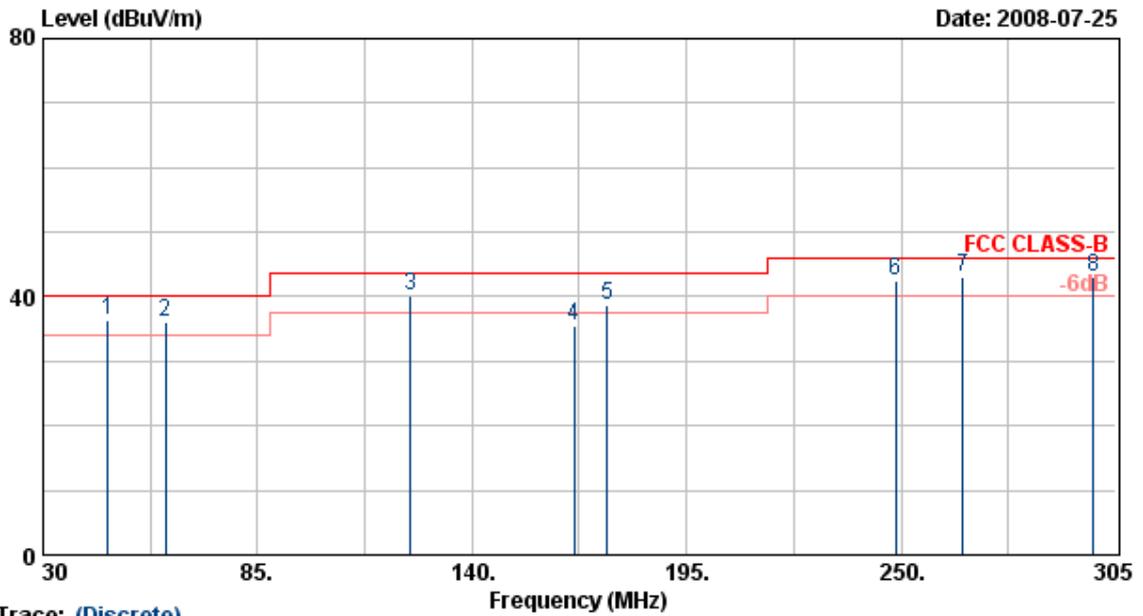


Trace: (Discrete)

Item	Freq MHz	Read Value dBuV/m	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Ant Pos cm	Tab Pos Deg
1	46.50	50.82	-14.46	36.36	40.00	-3.64	QP	100	46
2	61.35	53.61	-17.43	36.18	40.00	-3.82	QP	100	46
3	124.33	53.62	-13.34	40.28	43.50	-3.22	QP	100	88
4	166.13	48.59	-12.99	35.60	43.50	-7.90	Peak	100	88
5	174.65	48.62	-9.93	38.69	43.50	-4.81	QP	100	111
6	248.63	54.60	-12.25	42.35	46.00	-3.65	QP	100	111
7	265.95	51.26	-8.33	42.93	46.00	-3.07	QP	100	77
8	299.23	52.17	-9.25	42.92	46.00	-3.08	QP	100	77

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180		

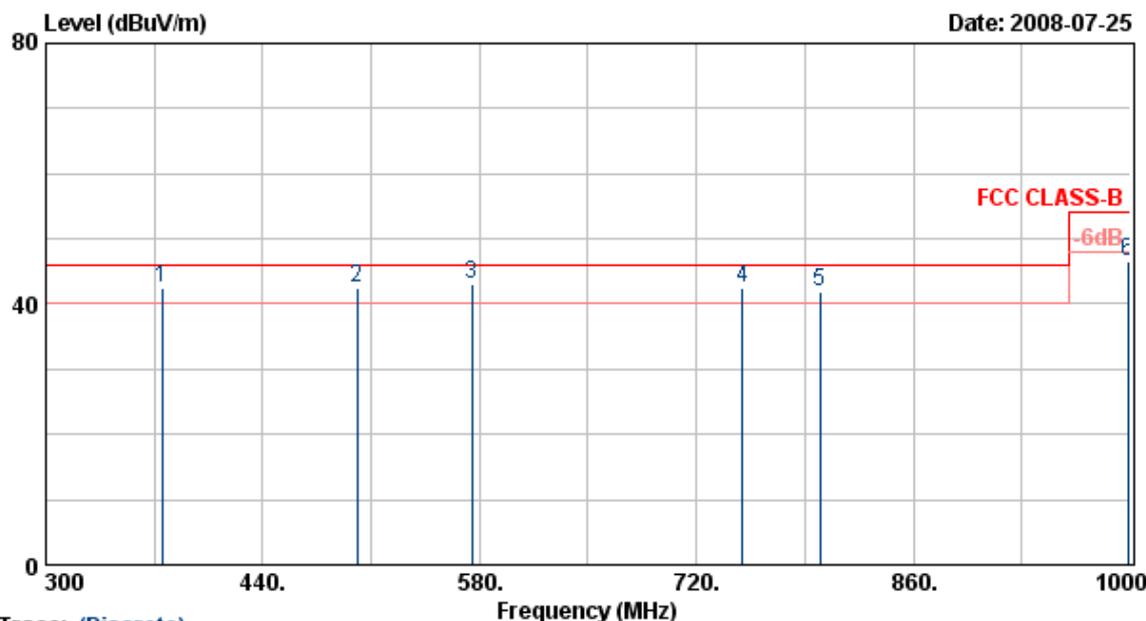


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.00	51.18	-8.84	42.34	46.00	-3.66	QP	100	98
2	500.90	47.26	-4.89	42.37	46.00	-3.63	QP	100	98
3	575.00	42.65	0.27	42.92	46.00	-3.08	QP	100	98
4	749.40	41.29	1.28	42.57	46.00	-3.43	QP	100	120
5	799.80	44.68	-2.83	41.85	46.00	-4.15	QP	100	103
6	998.60	43.87	2.53	46.40	54.00	-7.60	QP	100	100

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180		

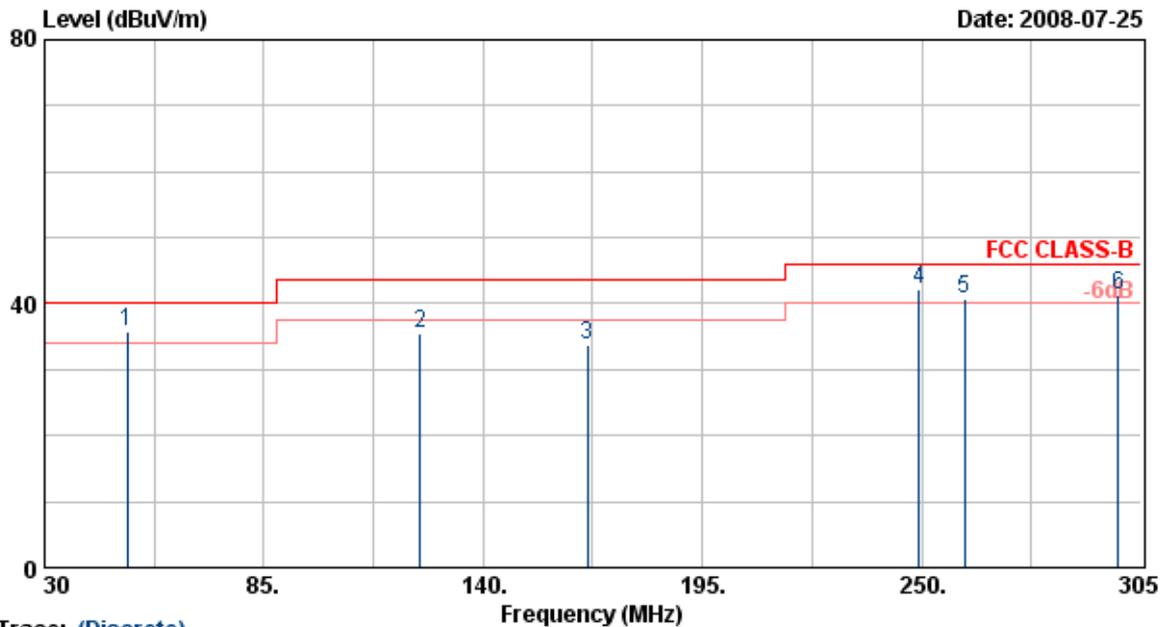


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	50.63	56.85	-21.19	35.66	40.00	-4.34	QP	100	77
2	124.33	54.95	-19.41	35.54	43.50	-7.96	Peak	100	98
3	166.13	52.49	-18.67	33.82	43.50	-9.68	Peak	100	98
4	249.45	59.88	-17.75	42.13	46.00	-3.87	QP	100	56
5	260.73	55.82	-15.04	40.78	46.00	-5.22	QP	100	56
6	299.23	55.66	-14.39	41.27	46.00	-4.73	QP	100	87

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power : AC 120V Pol/Phase : HORIZONTAL  
 Test Mode : Transmit/Receive Temperature : 30 °C  
 Operation Channel: 36 Humidity : 65 %  
 Modulation Type : 802.11an HT20 Atmospheric Pressure: 1020 hPa  
 Rate : 130 Mbps  
 Memo : DSA-20P-10 US 120180

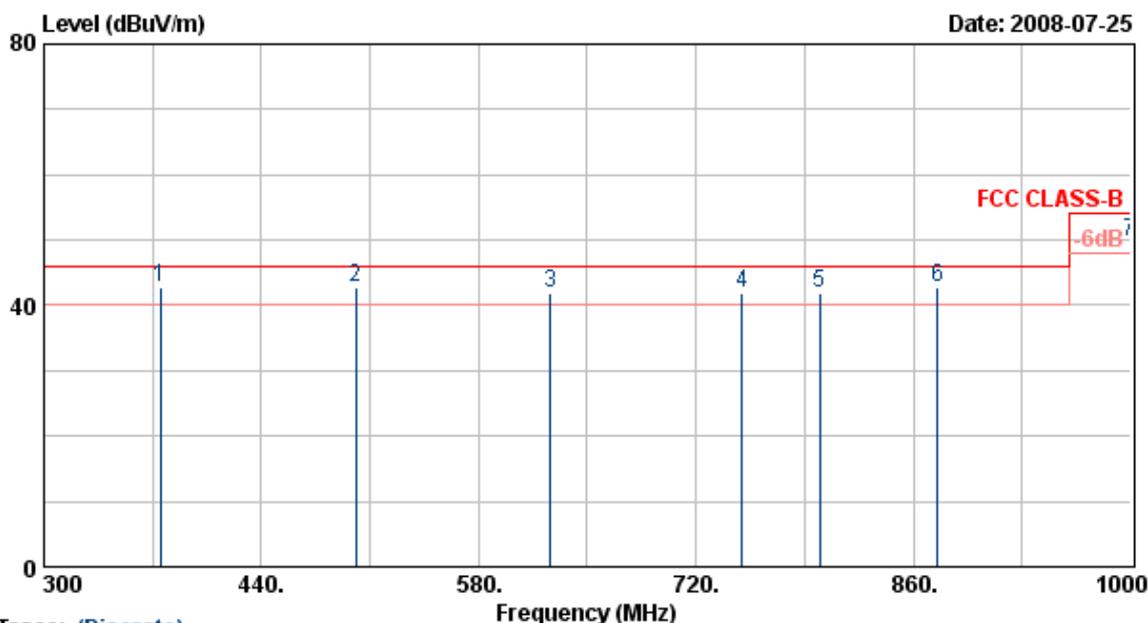


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.00	53.00	-10.15	42.85	46.00	-3.15	QP	100	99
2	500.90	47.32	-4.52	42.80	46.00	-3.20	QP	100	122
3	626.20	43.74	-1.89	41.85	46.00	-4.15	QP	100	177
4	749.40	41.52	0.34	41.86	46.00	-4.14	QP	100	147
5	799.80	42.59	-0.57	42.02	46.00	-3.98	QP	100	147
6	875.40	38.68	3.99	42.67	46.00	-3.33	QP	100	147
7	999.90	46.55	3.34	49.89	54.00	-4.11	QP	100	147

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 36	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180		

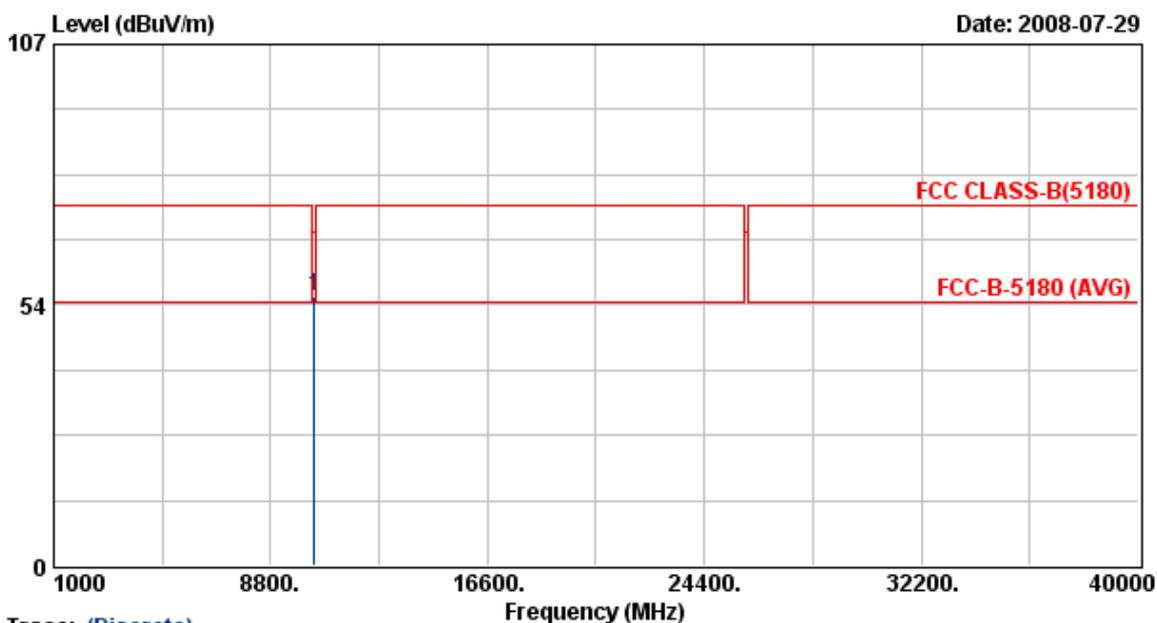


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10359.75	42.34	12.78	55.11	68.30	-13.19	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 36	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180		

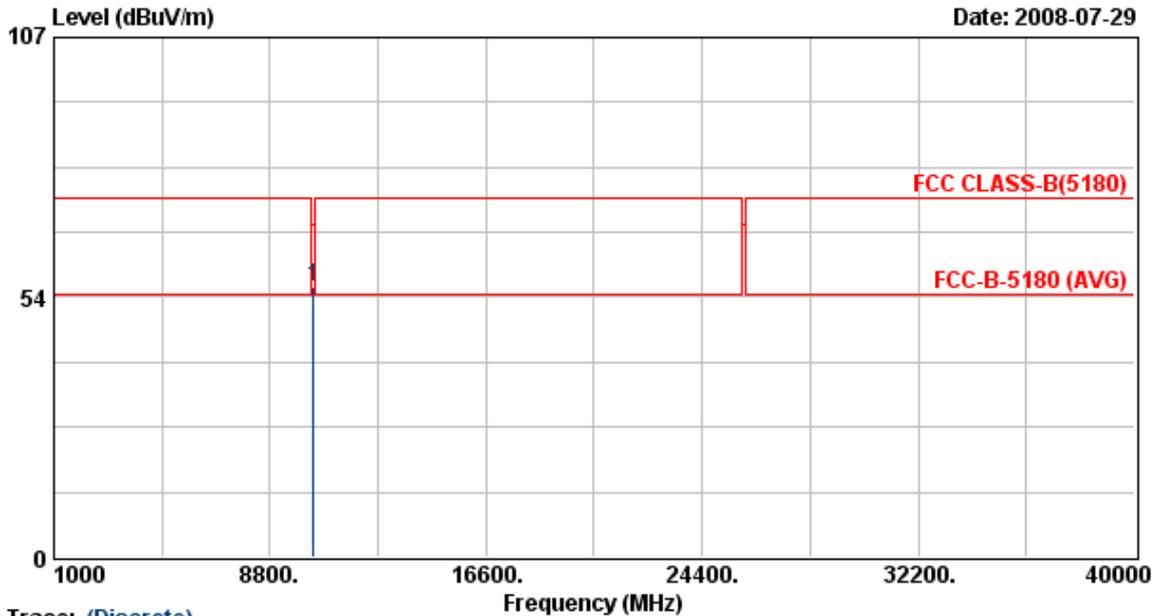


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10360.10	42.95	12.78	55.72	68.30	-12.58	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power : AC 120V Pol/Phase : VERTICAL  
 Test Mode : Transmit/Receive Temperature : 27 °C  
 Operation Channel: 44 Humidity : 70 %  
 Modulation Type : 802.11an HT20 Atmospheric Pressure: 1000 hPa  
 Rate : 130 Mbps  
 Memo : DSA-20P-10 US 120180

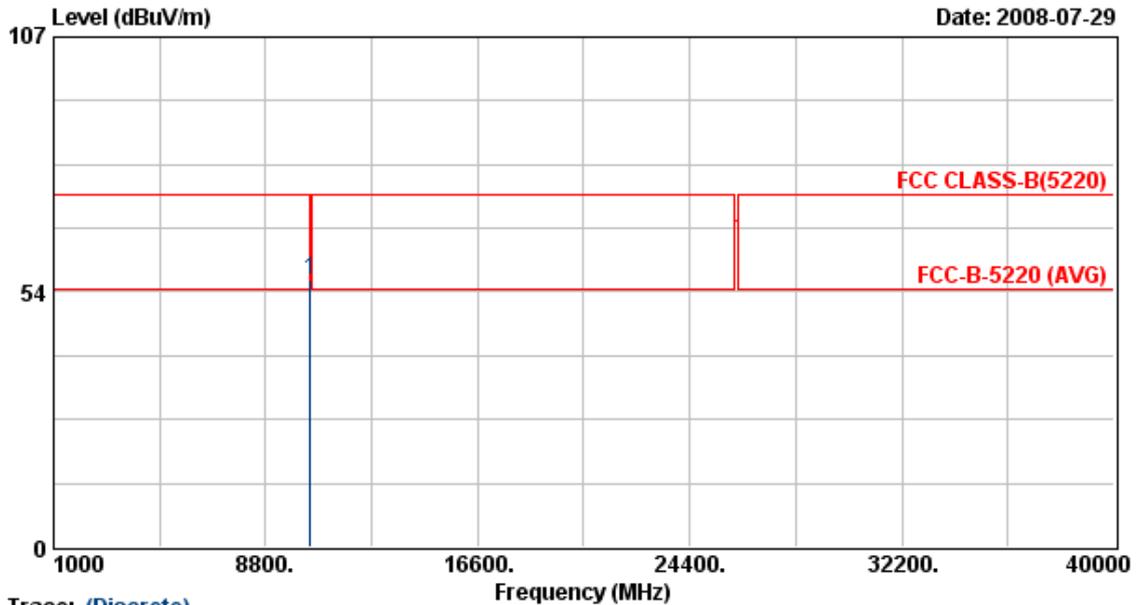


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10439.65	43.04	12.90	55.94	68.30	-12.36	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 44	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180		

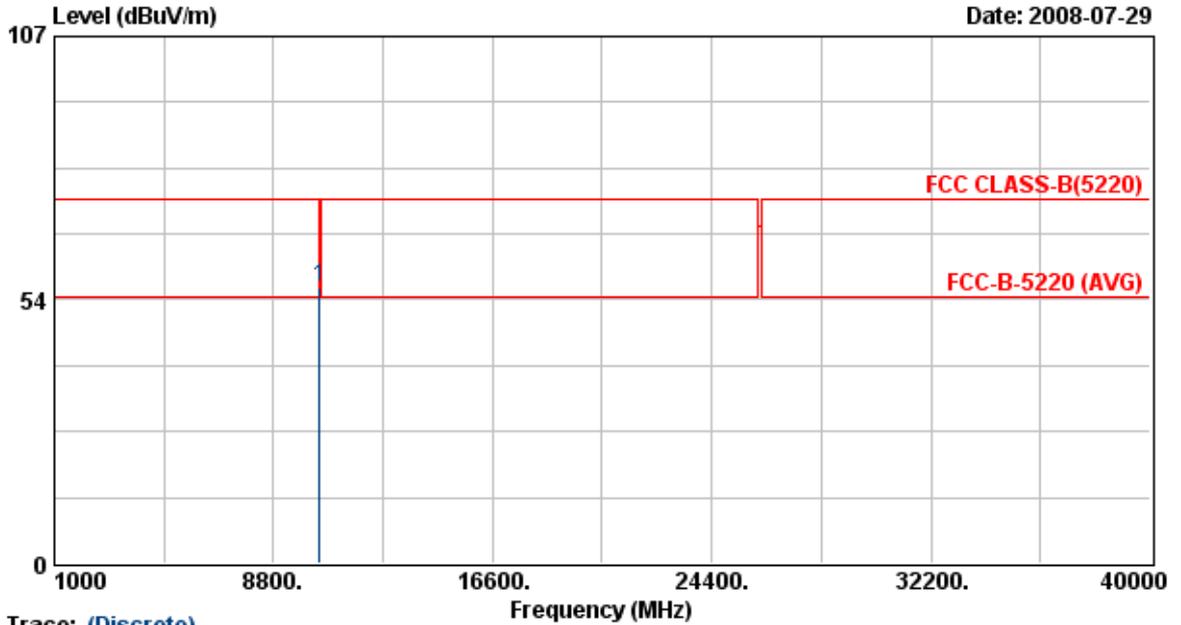

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10440.05	43.15	12.90	56.06	68.30	-12.24	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 48  
 Modulation Type : 802.11an HT20  
 Rate : 130 Mbps  
 Memo : DSA-20P-10 US 120180

Pol/Phase : VERTICAL  
 Temperature : 27 °C  
 Humidity : 70 %  
 Atmospheric Pressure: 1000 hPa

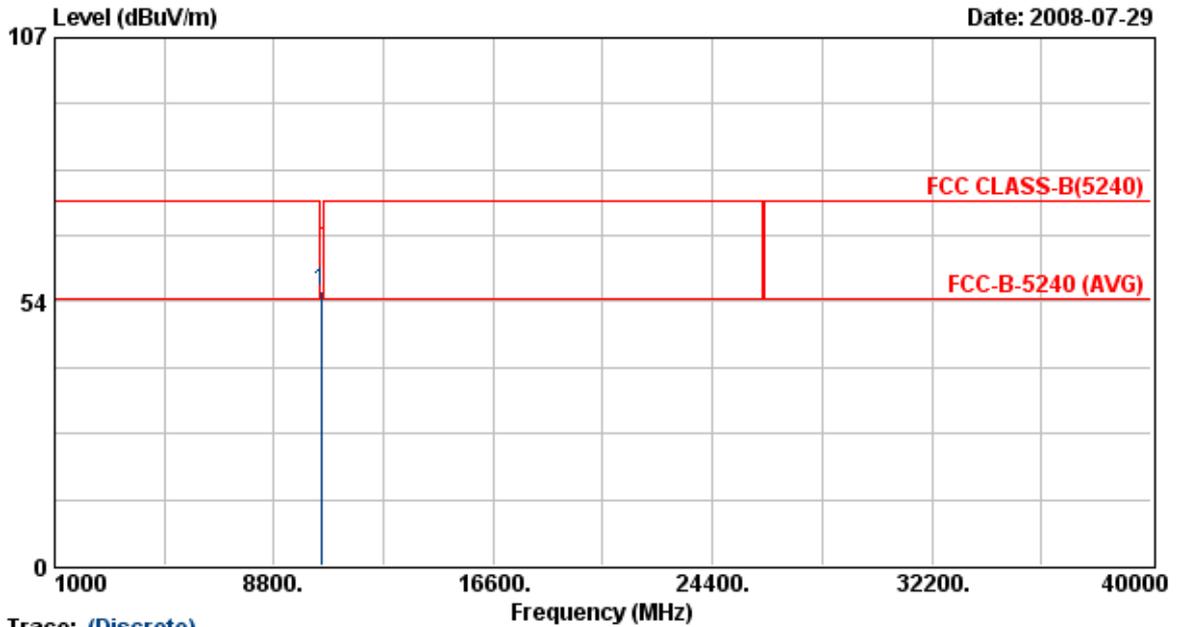


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.95	42.55	12.97	55.51	68.30	-12.79	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 48	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180		

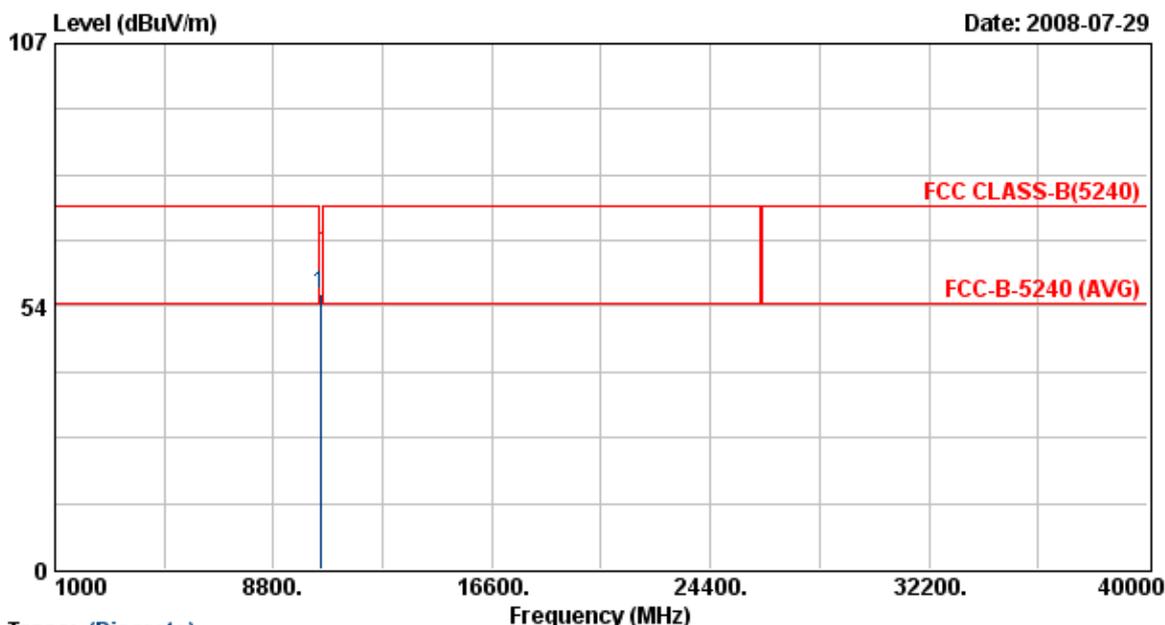

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.95	43.05	12.97	56.01	68.30	-12.29	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

**Test Mode 5**

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

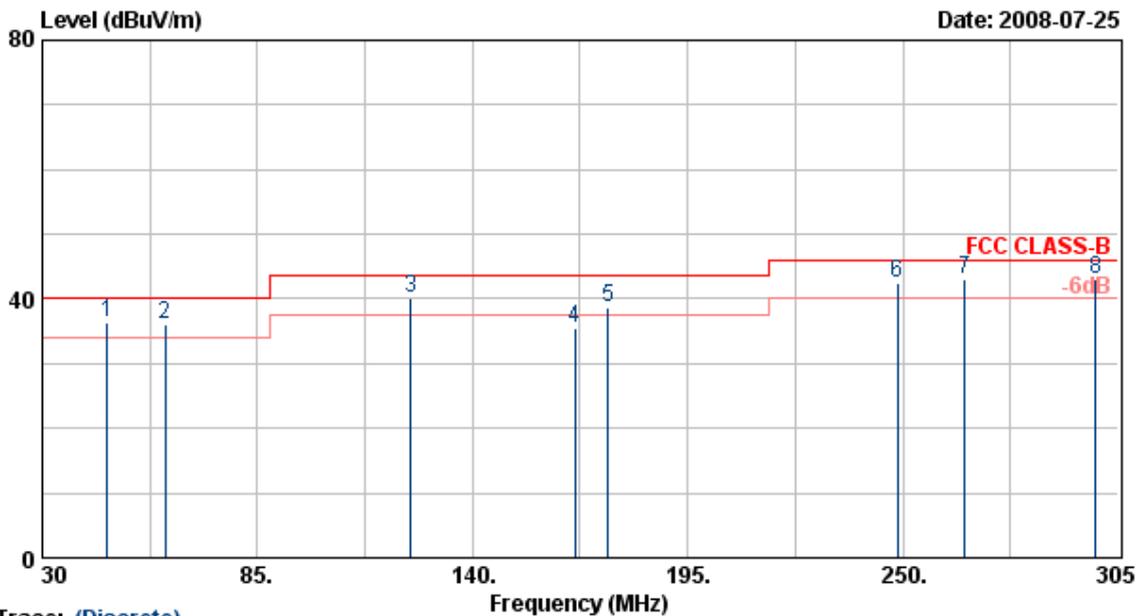


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	46.50	50.82	-14.46	36.36	40.00	-3.64	QP	100	46
2	61.35	53.61	-17.43	36.18	40.00	-3.82	QP	100	46
3	124.33	53.62	-13.34	40.28	43.50	-3.22	QP	100	88
4	166.13	48.59	-12.99	35.60	43.50	-7.90	Peak	100	88
5	174.65	48.62	-9.93	38.69	43.50	-4.81	QP	100	111
6	248.63	54.60	-12.25	42.35	46.00	-3.65	QP	100	111
7	265.95	51.26	-8.33	42.93	46.00	-3.07	QP	100	77
8	299.23	52.17	-9.25	42.92	46.00	-3.08	QP	100	77

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

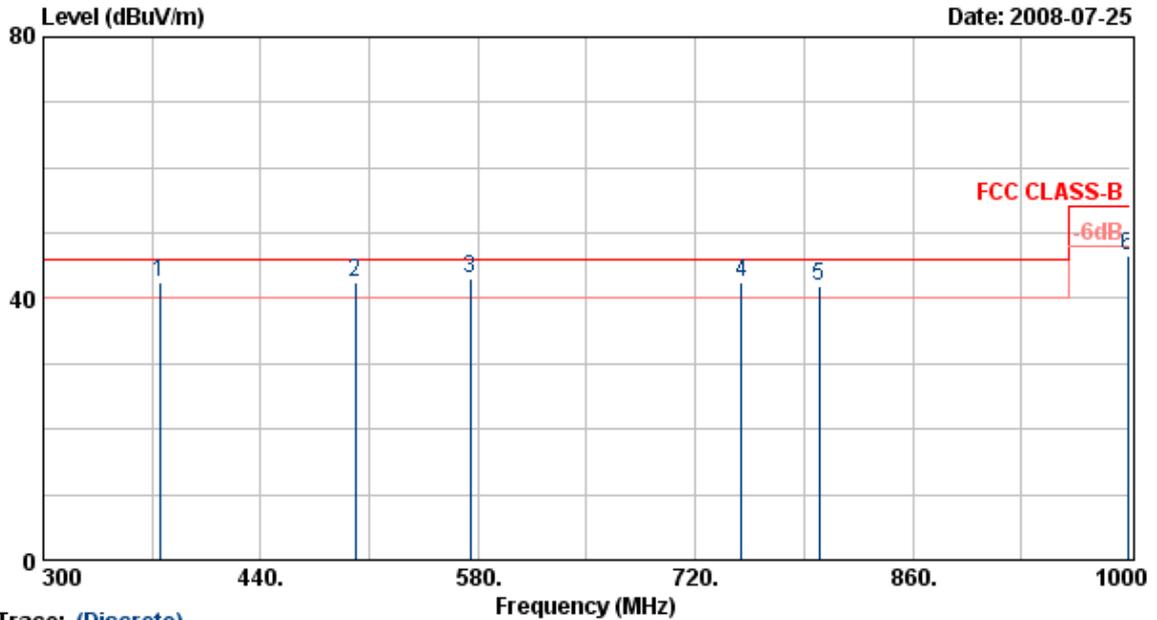


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.00	51.18	-8.84	42.34	46.00	-3.66	QP	100	98
2	500.90	47.26	-4.89	42.37	46.00	-3.63	QP	100	98
3	575.00	42.65	0.27	42.92	46.00	-3.08	QP	100	98
4	749.40	41.29	1.28	42.57	46.00	-3.43	QP	100	120
5	799.80	44.68	-2.83	41.85	46.00	-4.15	QP	100	103
6	998.60	43.87	2.53	46.40	54.00	-7.60	QP	100	100

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

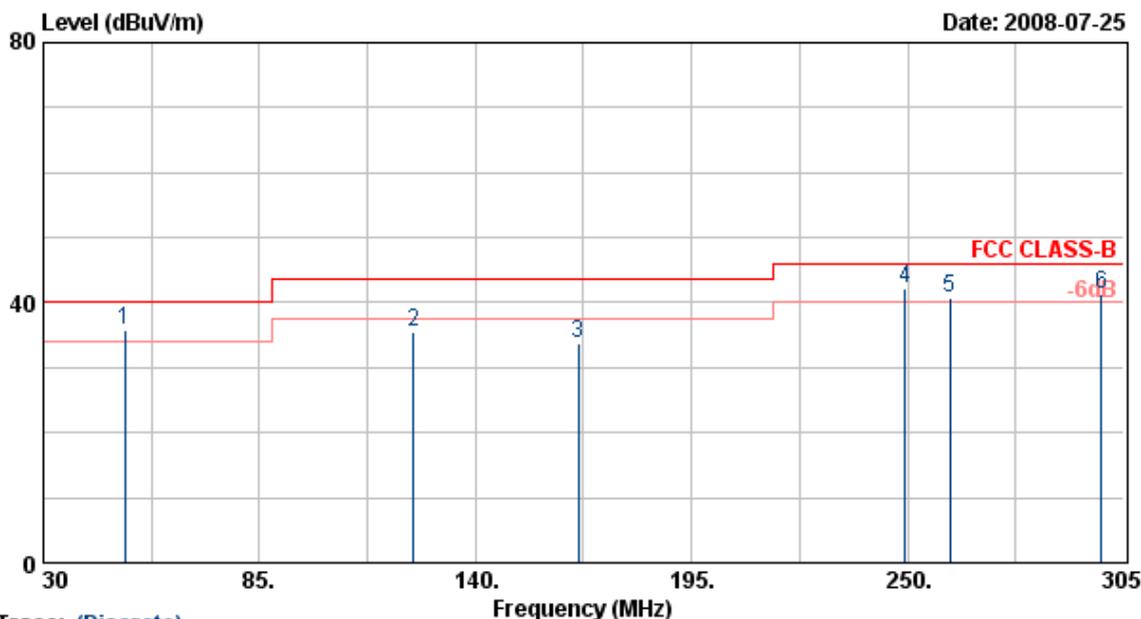


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	50.63	56.85	-21.19	35.66	40.00	-4.34	QP	100	77
2	124.33	54.95	-19.41	35.54	43.50	-7.96	Peak	100	98
3	166.13	52.49	-18.67	33.82	43.50	-9.68	Peak	100	98
4	249.45	59.88	-17.75	42.13	46.00	-3.87	QP	100	56
5	260.73	55.82	-15.04	40.78	46.00	-5.22	QP	100	56
6	299.23	55.66	-14.39	41.27	46.00	-4.73	QP	100	87

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

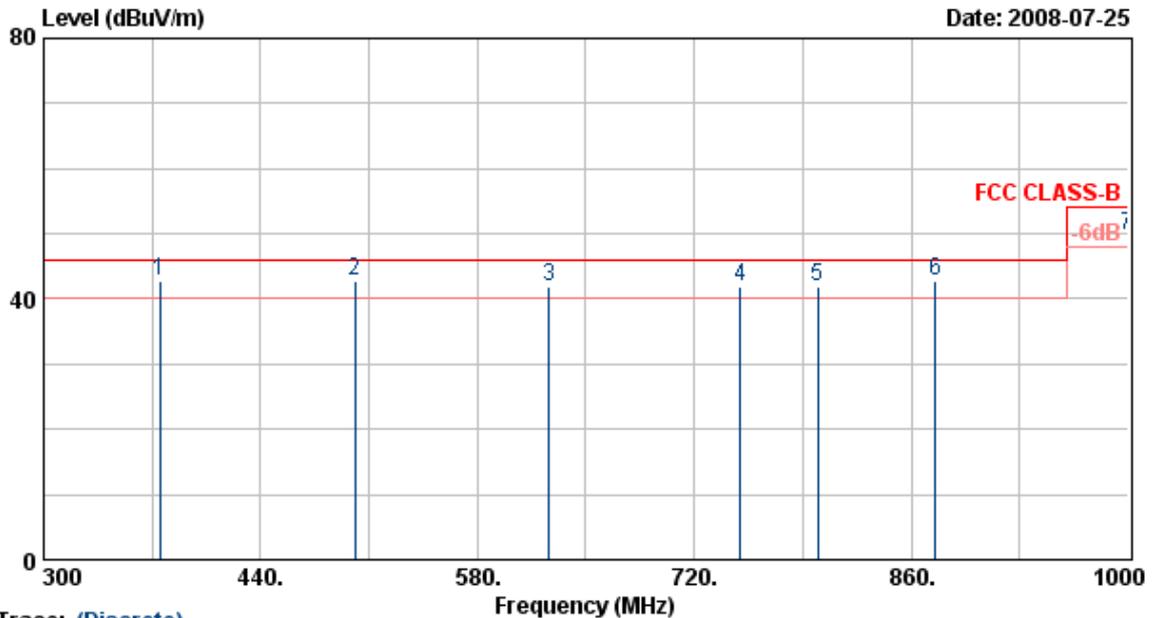


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.00	53.00	-10.15	42.85	46.00	-3.15	QP	100	99
2	500.90	47.32	-4.52	42.80	46.00	-3.20	QP	100	122
3	626.20	43.74	-1.89	41.85	46.00	-4.15	QP	100	177
4	749.40	41.52	0.34	41.86	46.00	-4.14	QP	100	147
5	799.80	42.59	-0.57	42.02	46.00	-3.98	QP	100	147
6	875.40	38.68	3.99	42.67	46.00	-3.33	QP	100	147
7	999.90	46.55	3.34	49.89	54.00	-4.11	QP	100	147

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 36	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

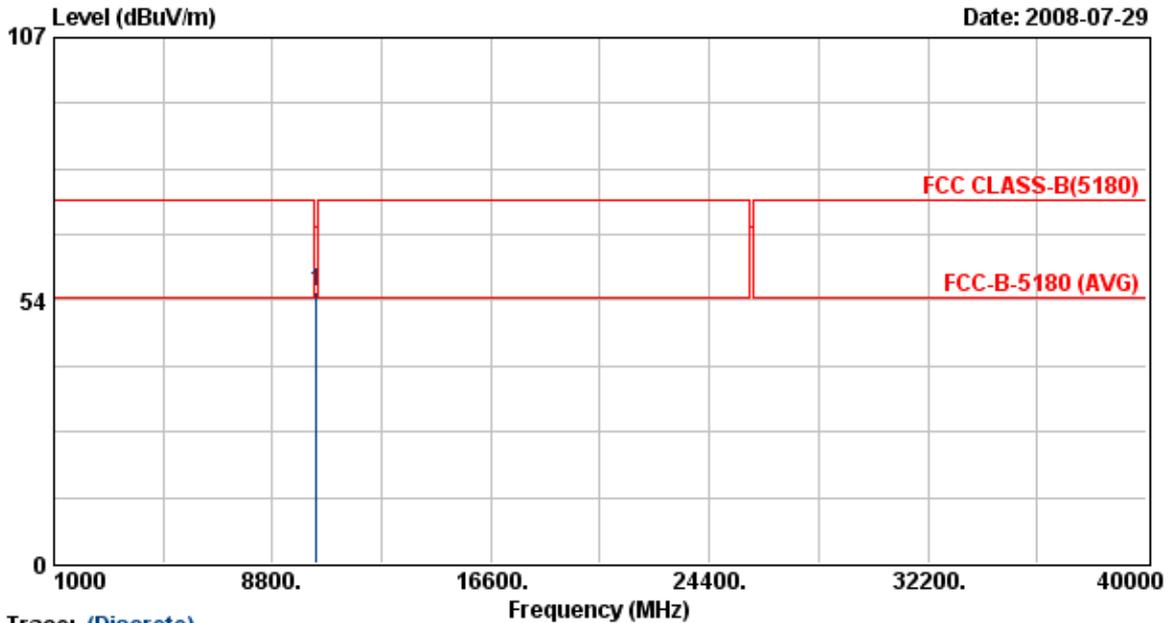


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10359.75	42.29	12.78	55.06	68.30	-13.24	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 36	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

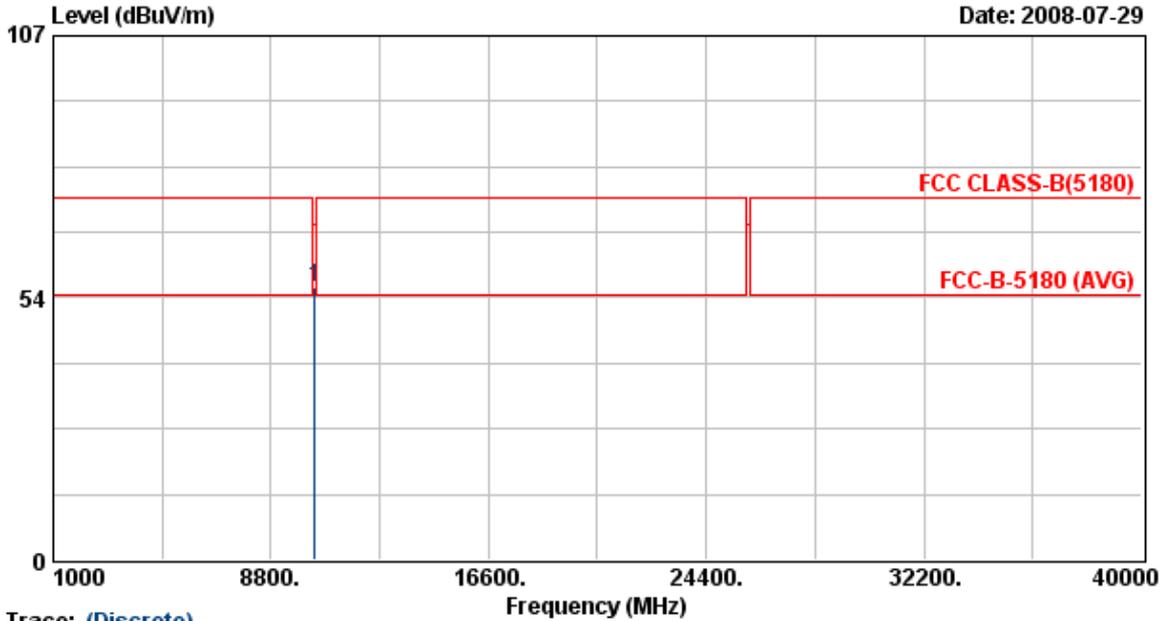


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10360.10	42.98	12.78	55.75	68.30	-12.55	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 44	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

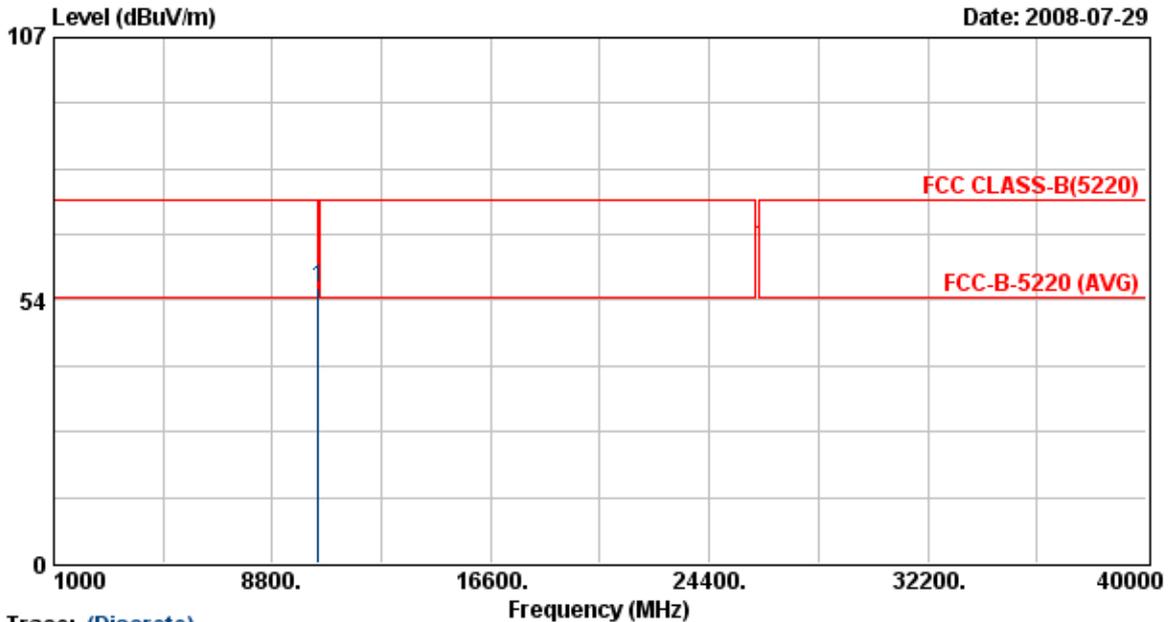

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10439.65	43.08	12.90	55.98	68.30	-12.32	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 44  
 Modulation Type : 802.11an HT20  
 Rate : 130 Mbps  
 Memo : DSA-20P-10 US 120180  
 3TX

Pol/Phase : HORIZONTAL  
 Temperature : 27 °C  
 Humidity : 70 %  
 Atmospheric Pressure: 1000 hPa

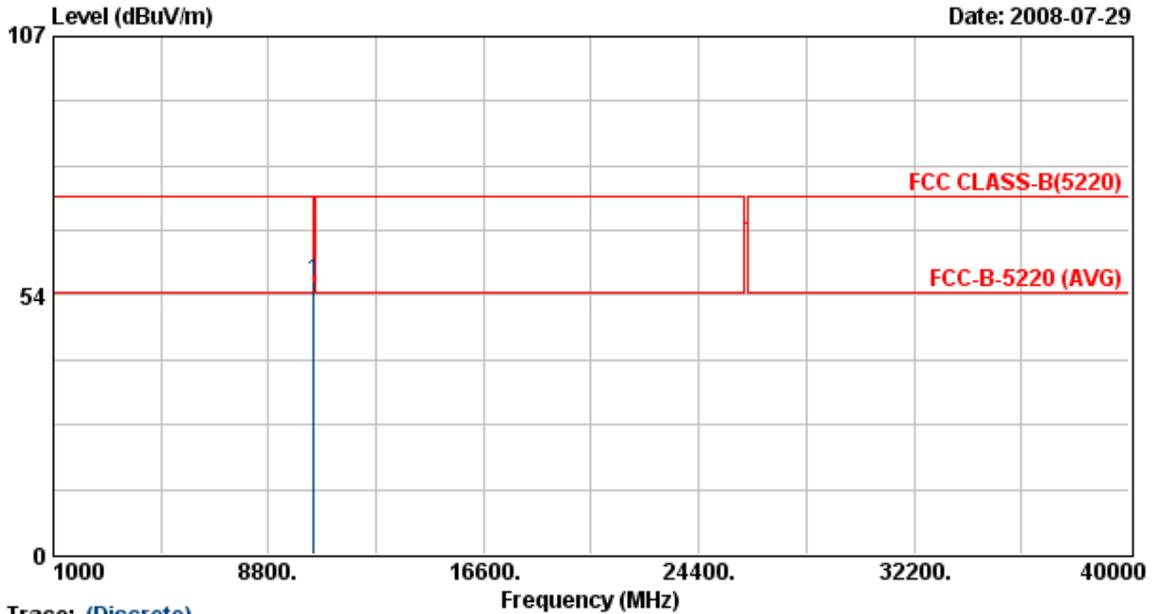

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10440.05	43.55	12.90	56.46	68.30	-11.84	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel : 48  
 Modulation Type : 802.11an HT20  
 Rate : 130 Mbps  
 Memo : DSA-20P-10 US 120180  
 3TX

Pol/Phase : VERTICAL  
 Temperature : 27 °C  
 Humidity : 70 %  
 Atmospheric Pressure: 1000 hPa

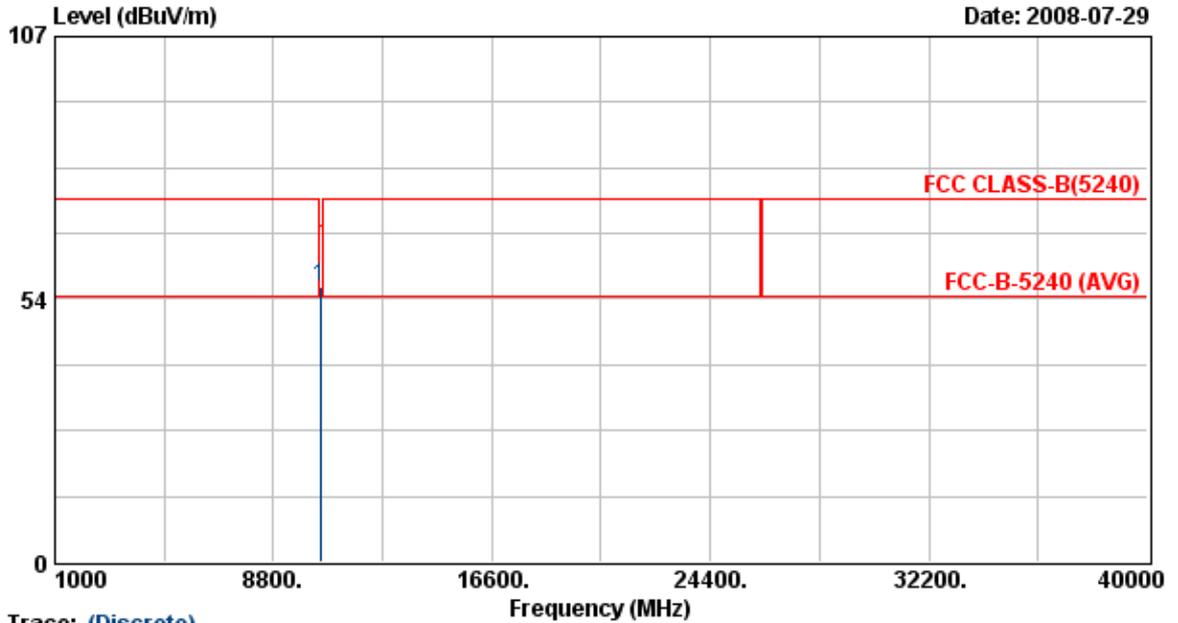


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.95	42.88	12.97	55.84	68.30	-12.46	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 48	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

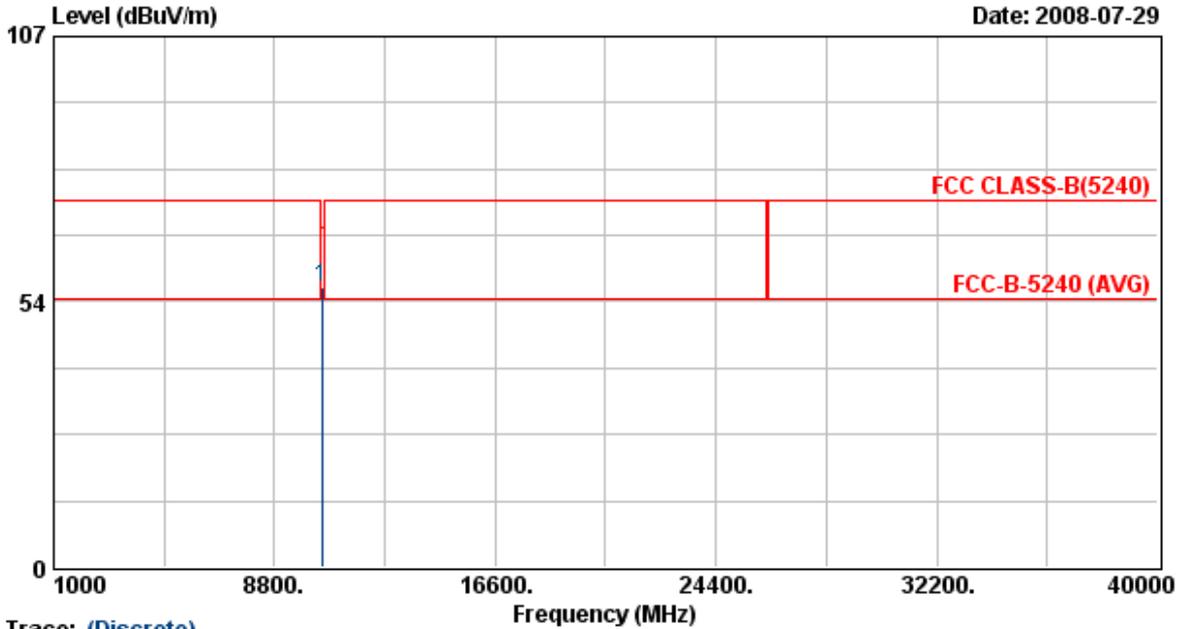

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.95	43.26	12.97	56.22	68.30	-12.08	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

## Test Mode 6

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 38	Humidity	: 65 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1020 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		

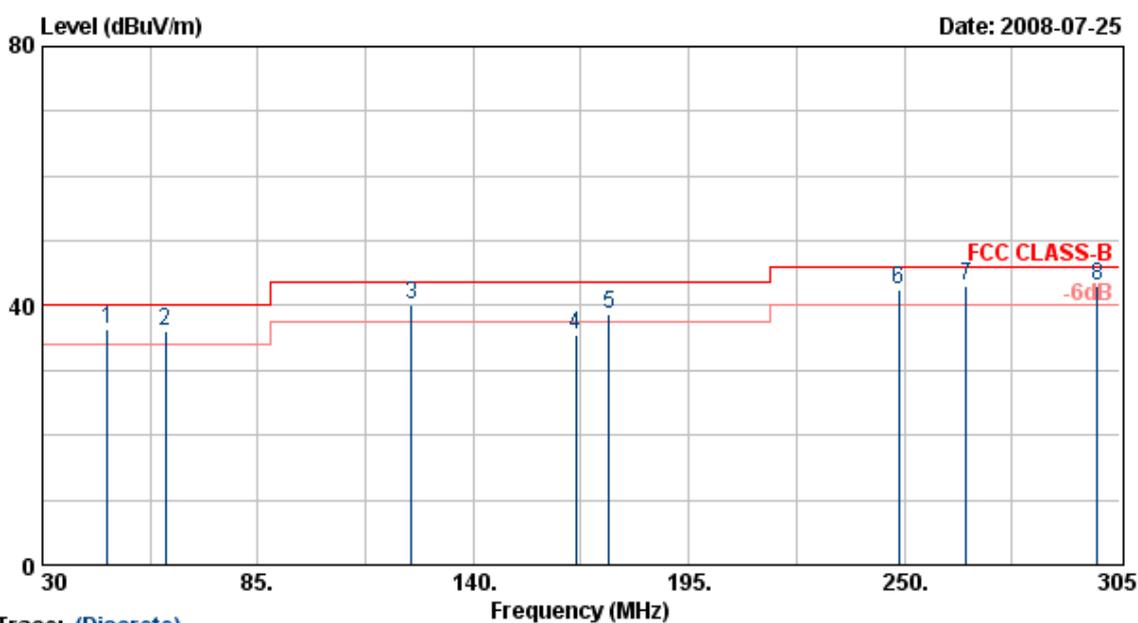


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	46.50	50.82	-14.46	36.36	40.00	-3.64	QP	100	46
2	61.35	53.61	-17.43	36.18	40.00	-3.82	QP	100	46
3	124.33	53.62	-13.34	40.28	43.50	-3.22	QP	100	88
4	166.13	48.59	-12.99	35.60	43.50	-7.90	Peak	100	88
5	174.65	48.62	-9.93	38.69	43.50	-4.81	QP	100	111
6	248.63	54.60	-12.25	42.35	46.00	-3.65	QP	100	111
7	265.95	51.26	-8.33	42.93	46.00	-3.07	QP	100	77
8	299.23	52.17	-9.25	42.92	46.00	-3.08	QP	100	77

## Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 38	Humidity	: 65 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1020 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		

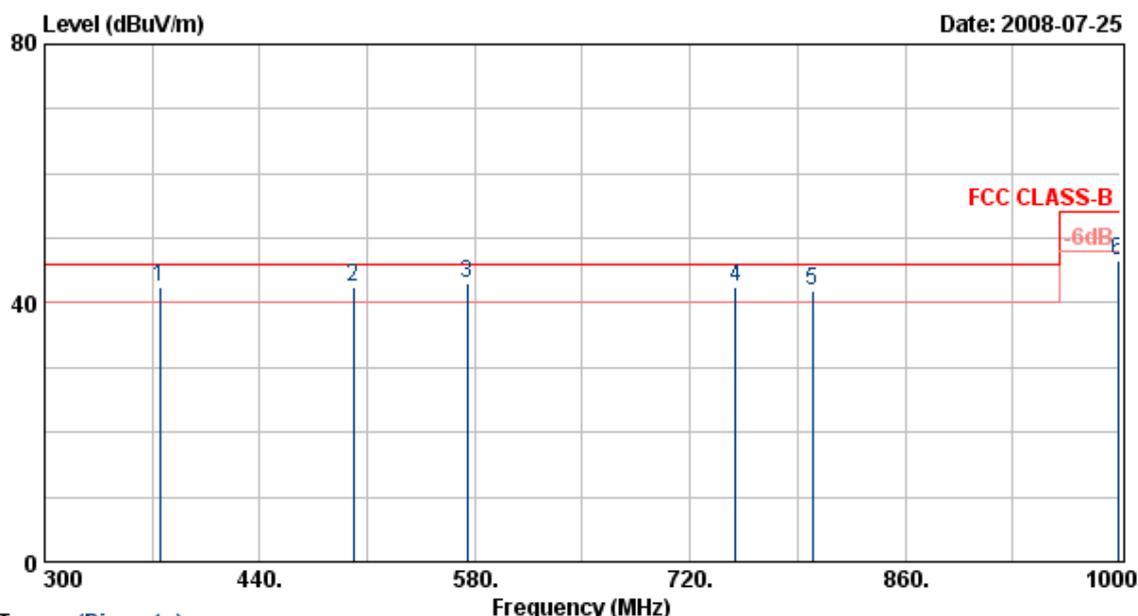


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.00	51.18	-8.84	42.34	46.00	-3.66	QP	100	98
2	500.90	47.26	-4.89	42.37	46.00	-3.63	QP	100	98
3	575.00	42.65	0.27	42.92	46.00	-3.08	QP	100	98
4	749.40	41.29	1.28	42.57	46.00	-3.43	QP	100	120
5	799.80	44.68	-2.83	41.85	46.00	-4.15	QP	100	103
6	998.60	43.87	2.53	46.40	54.00	-7.60	QP	100	100

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 38	Humidity	: 65 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1020 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		

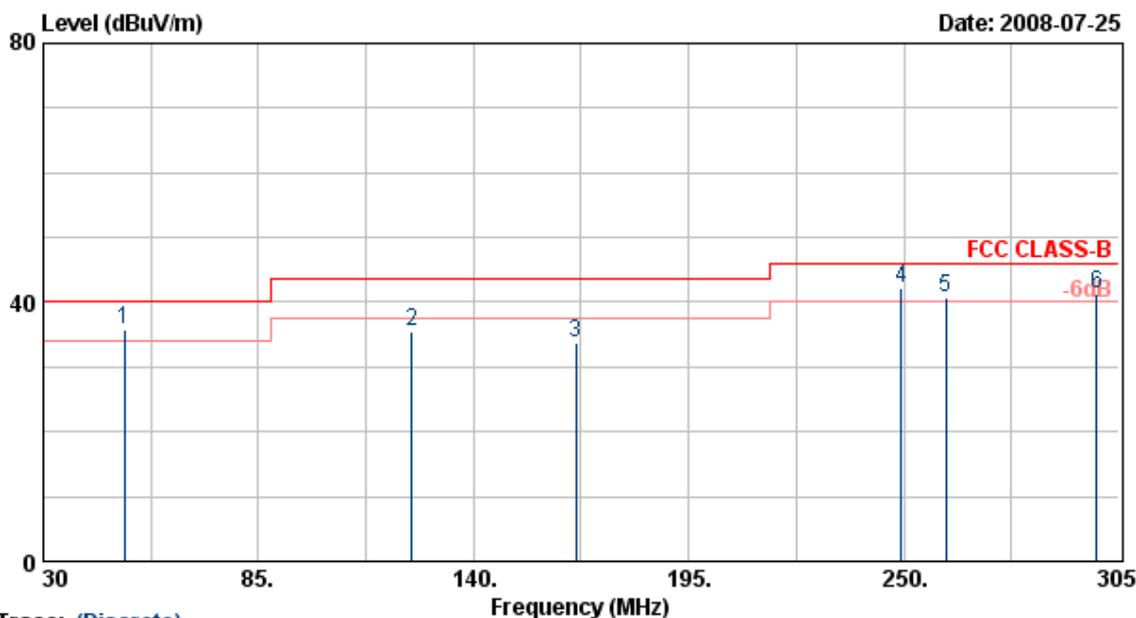


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	50.63	56.85	-21.19	35.66	40.00	-4.34	QP	100	77
2	124.33	54.95	-19.41	35.54	43.50	-7.96	Peak	100	98
3	166.13	52.49	-18.67	33.82	43.50	-9.68	Peak	100	98
4	249.45	59.88	-17.75	42.13	46.00	-3.87	QP	100	56
5	260.73	55.82	-15.04	40.78	46.00	-5.22	QP	100	56
6	299.23	55.66	-14.39	41.27	46.00	-4.73	QP	100	87

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 38	Humidity	: 65 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1020 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		

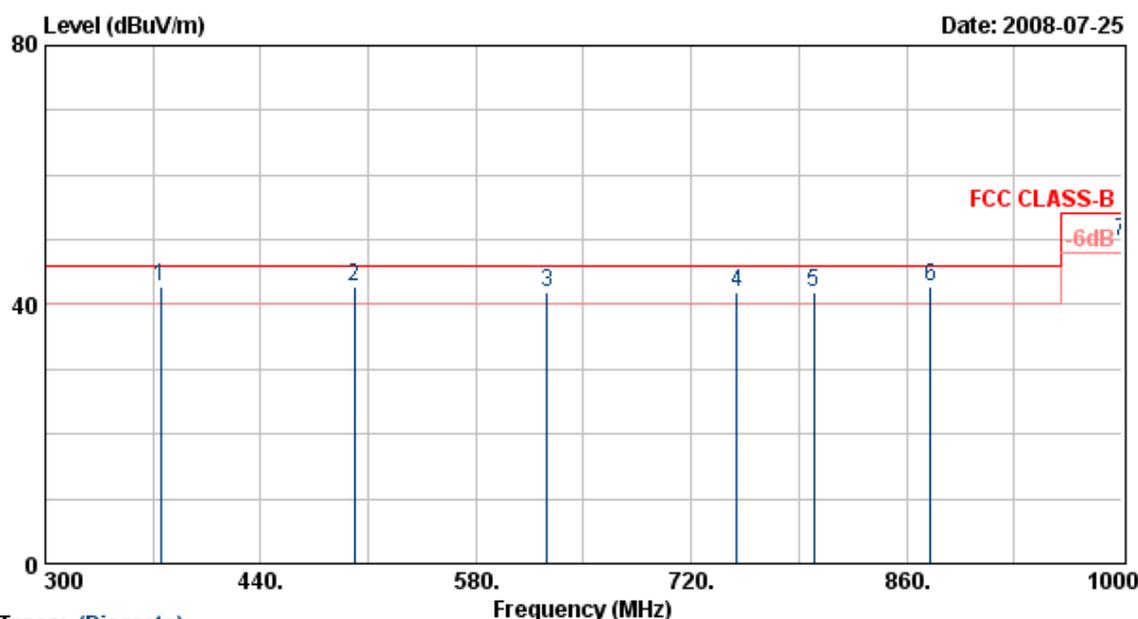


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.00	53.00	-10.15	42.85	46.00	-3.15	QP	100	99
2	500.90	47.32	-4.52	42.80	46.00	-3.20	QP	100	122
3	626.20	43.74	-1.89	41.85	46.00	-4.15	QP	100	177
4	749.40	41.52	0.34	41.86	46.00	-4.14	QP	100	147
5	799.80	42.59	-0.57	42.02	46.00	-3.98	QP	100	147
6	875.40	38.68	3.99	42.67	46.00	-3.33	QP	100	147
7	999.90	46.55	3.34	49.89	54.00	-4.11	QP	100	147

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 38	Humidity	: 70 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1000 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		

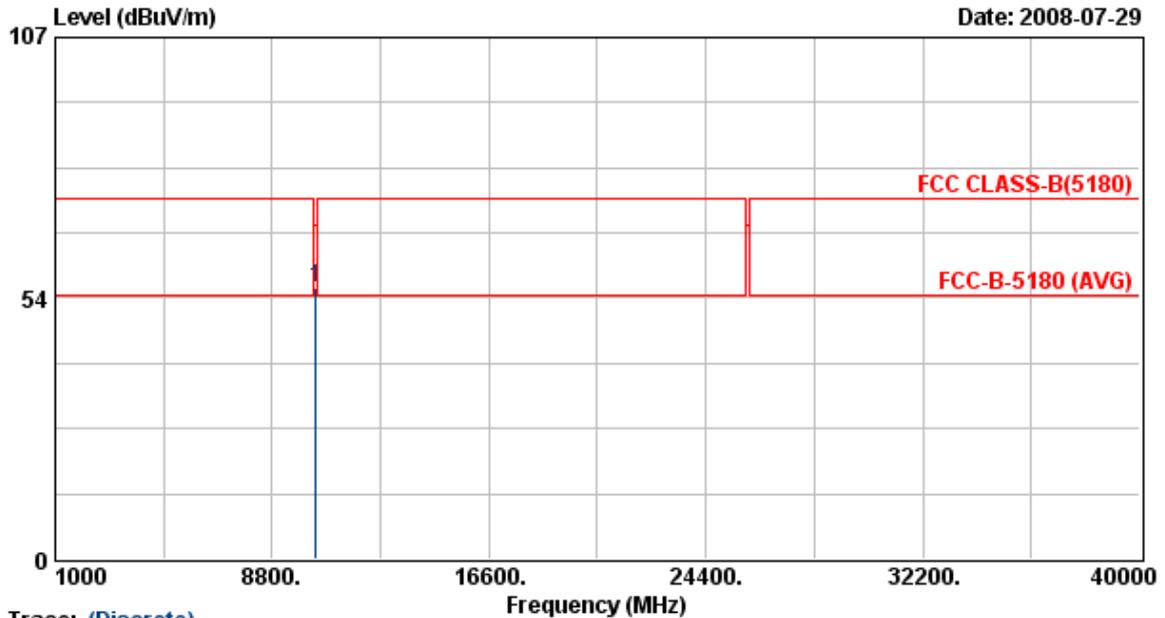


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10379.85	42.68	12.81	55.48	68.30	-12.82	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 38	Humidity	: 70 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1000 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		

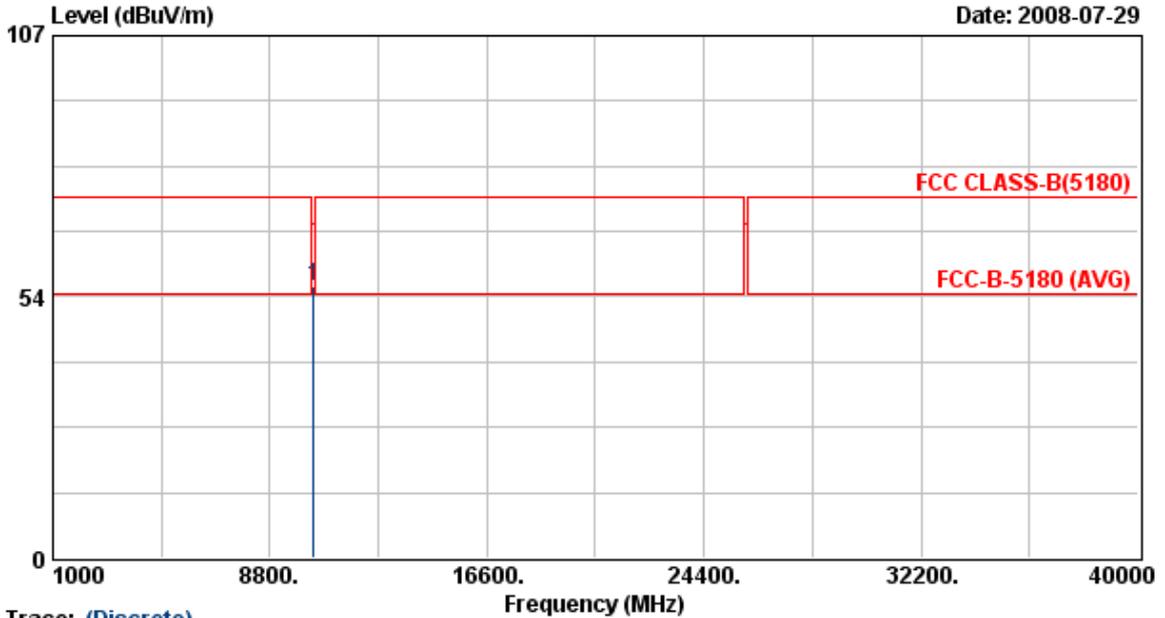


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10380.00	42.98	12.81	55.79	68.30	-12.51	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 42	Humidity	: 70 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1000 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		

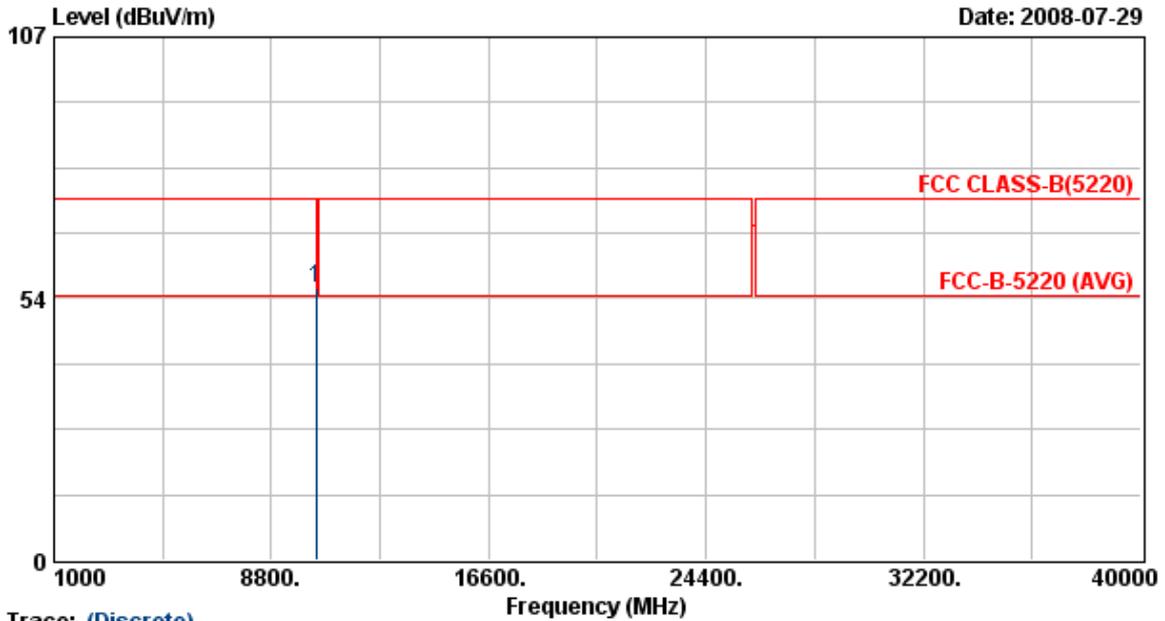


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10420.00	42.67	12.87	55.54	68.30	-12.76	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 42	Humidity	: 70 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1000 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		

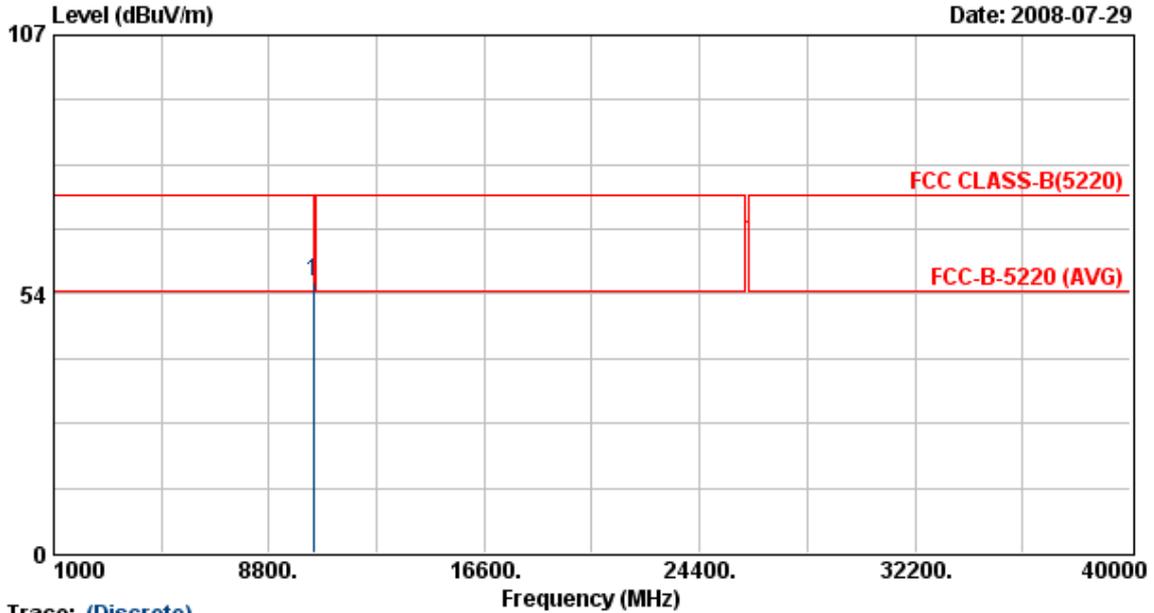


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10420.00	43.19	12.87	56.06	68.30	-12.24	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 46	Humidity	: 70 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1000 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		

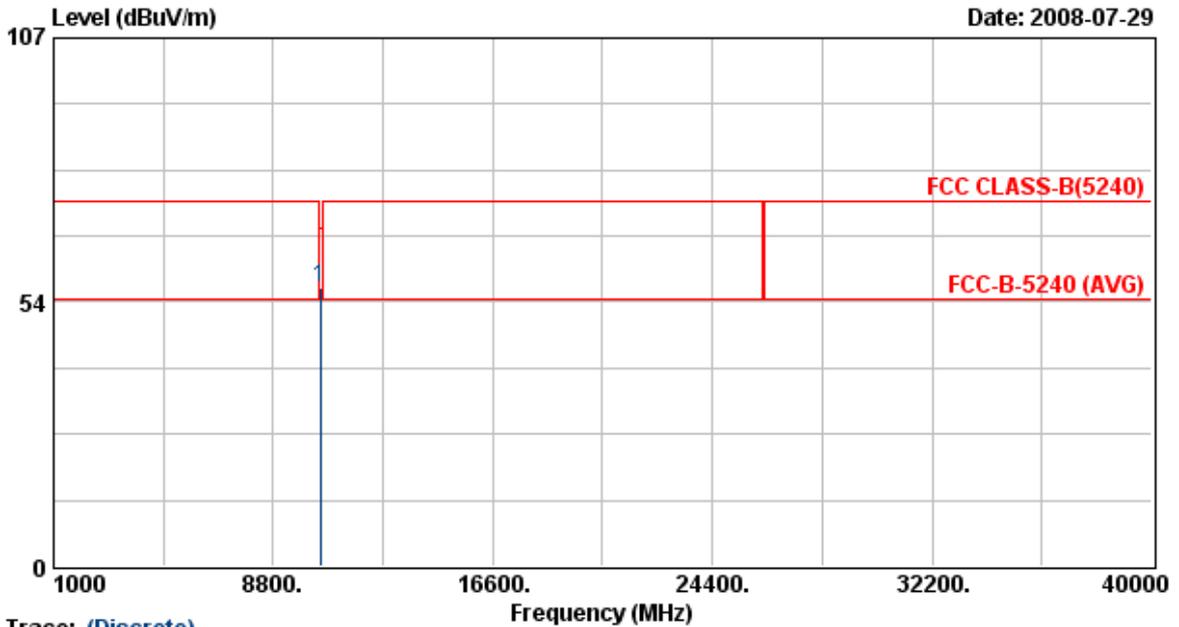


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10460.55	43.37	12.94	56.30	68.30	-12.00	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 46	Humidity	: 70 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1000 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		

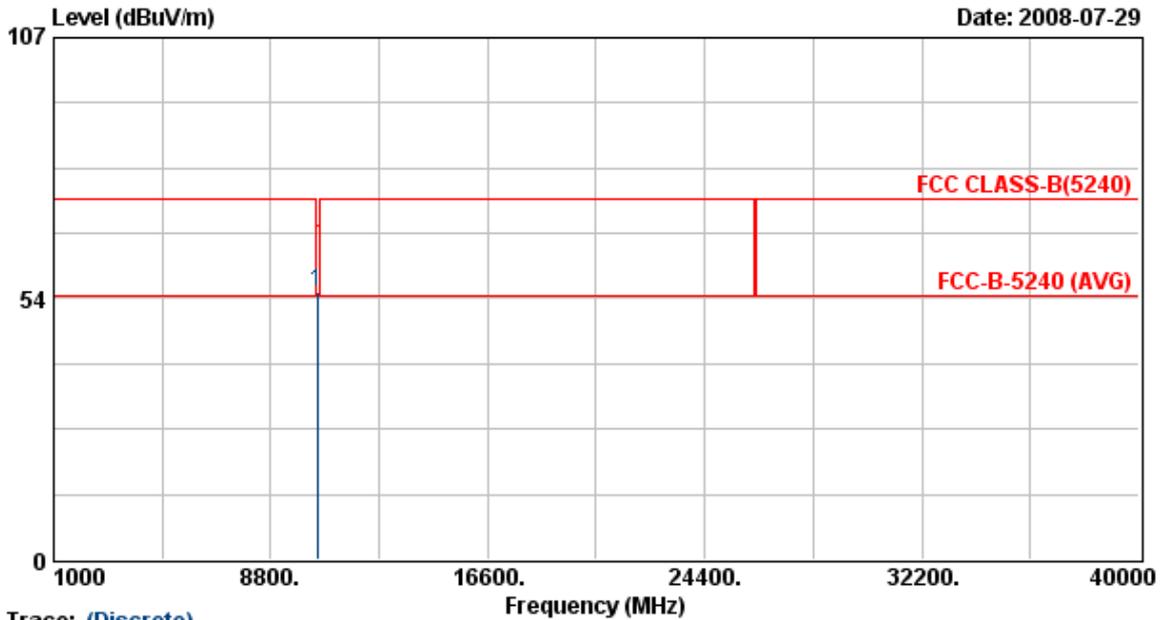

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10459.92	42.11	12.94	55.04	68.30	-13.26	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

**Test Mode 7**

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 38	Humidity	: 65 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1020 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

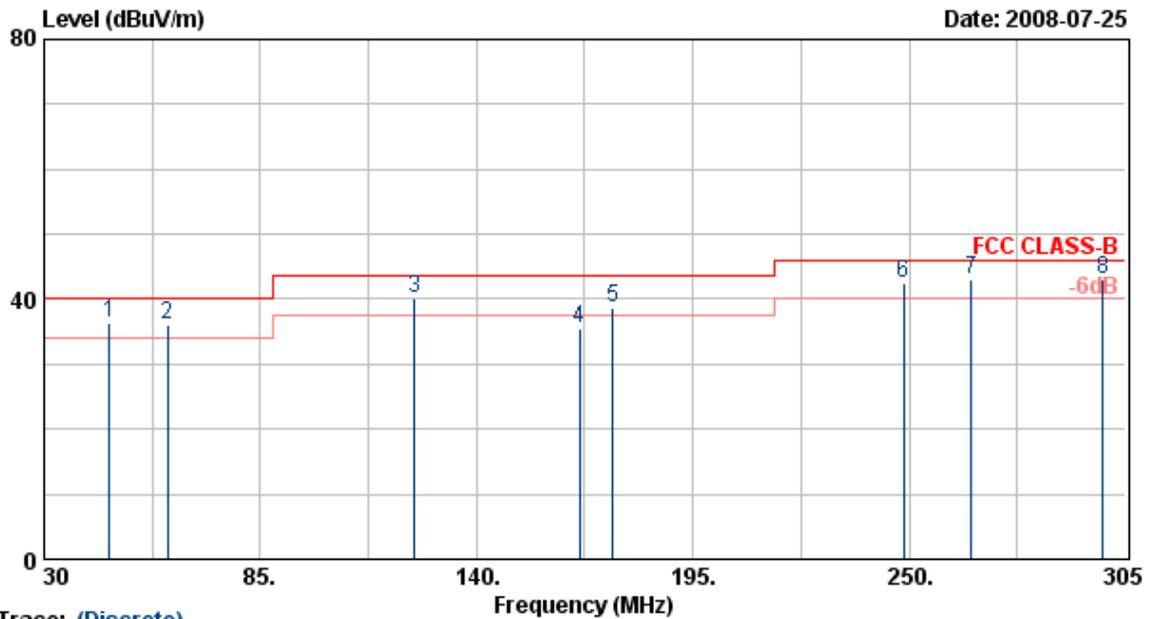

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	46.50	50.82	-14.46	36.36	40.00	-3.64	QP	100	46
2	61.35	53.61	-17.43	36.18	40.00	-3.82	QP	100	46
3	124.33	53.62	-13.34	40.28	43.50	-3.22	QP	100	88
4	166.13	48.59	-12.99	35.60	43.50	-7.90	Peak	100	88
5	174.65	48.62	-9.93	38.69	43.50	-4.81	QP	100	111
6	248.63	54.60	-12.25	42.35	46.00	-3.65	QP	100	111
7	265.95	51.26	-8.33	42.93	46.00	-3.07	QP	100	77
8	299.23	52.17	-9.25	42.92	46.00	-3.08	QP	100	77

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
5. The data is worse case.

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 38  
 Modulation Type : 802.11an HT40  
 Rate : 270 Mbps  
 Memo : DSA-20P-10 US 120180  
 3TX

Pol/Phase : VERTICAL  
 Temperature : 30 °C  
 Humidity : 65 %  
 Atmospheric Pressure: 1020 hPa

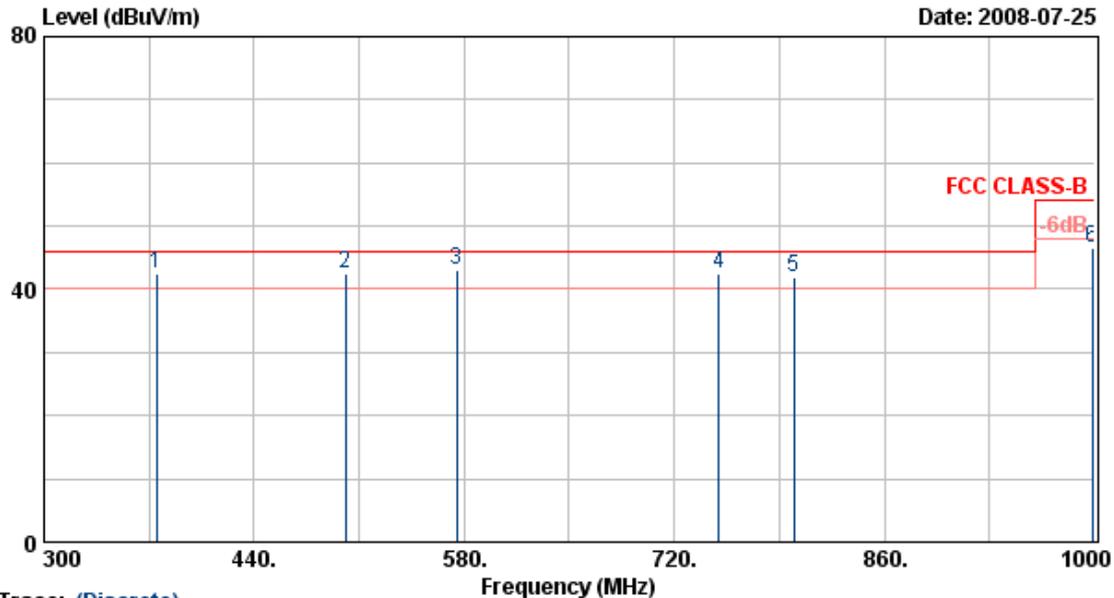

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.00	51.18	-8.84	42.34	46.00	-3.66	QP	100	98
2	500.90	47.26	-4.89	42.37	46.00	-3.63	QP	100	98
3	575.00	42.65	0.27	42.92	46.00	-3.08	QP	100	98
4	749.40	41.29	1.28	42.57	46.00	-3.43	QP	100	120
5	799.80	44.68	-2.83	41.85	46.00	-4.15	QP	100	103
6	998.60	43.87	2.53	46.40	54.00	-7.60	QP	100	100

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
5. The data is worse case.

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel : 38  
 Modulation Type : 802.11an HT40  
 Rate : 270 Mbps  
 Memo : DSA-20P-10 US 120180  
 3TX

Pol/Phase : HORIZONTAL  
 Temperature : 30 °C  
 Humidity : 65 %  
 Atmospheric Pressure : 1020 hPa

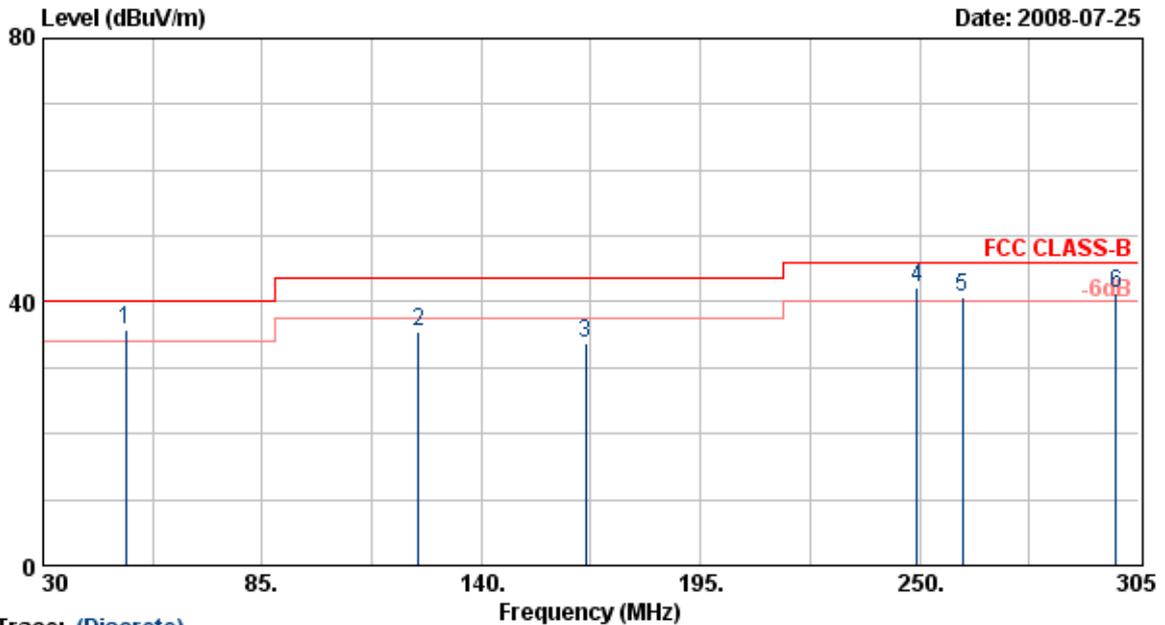


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	50.63	56.85	-21.19	35.66	40.00	-4.34	QP	100	77
2	124.33	54.95	-19.41	35.54	43.50	-7.96	Peak	100	98
3	166.13	52.49	-18.67	33.82	43.50	-9.68	Peak	100	98
4	249.45	59.88	-17.75	42.13	46.00	-3.87	QP	100	56
5	260.73	55.82	-15.04	40.78	46.00	-5.22	QP	100	56
6	299.23	55.66	-14.39	41.27	46.00	-4.73	QP	100	87

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
5. The data is worse case.

Power : AC 120V Pol/Phase : HORIZONTAL  
 Test Mode : Transmit/Receive Temperature : 30 °C  
 Operation Channel: 38 Humidity : 65 %  
 Modulation Type : 802.11an HT40 Atmospheric Pressure: 1020 hPa  
 Rate : 270 Mbps  
 Memo : DSA-20P-10 US 120180  
 3TX

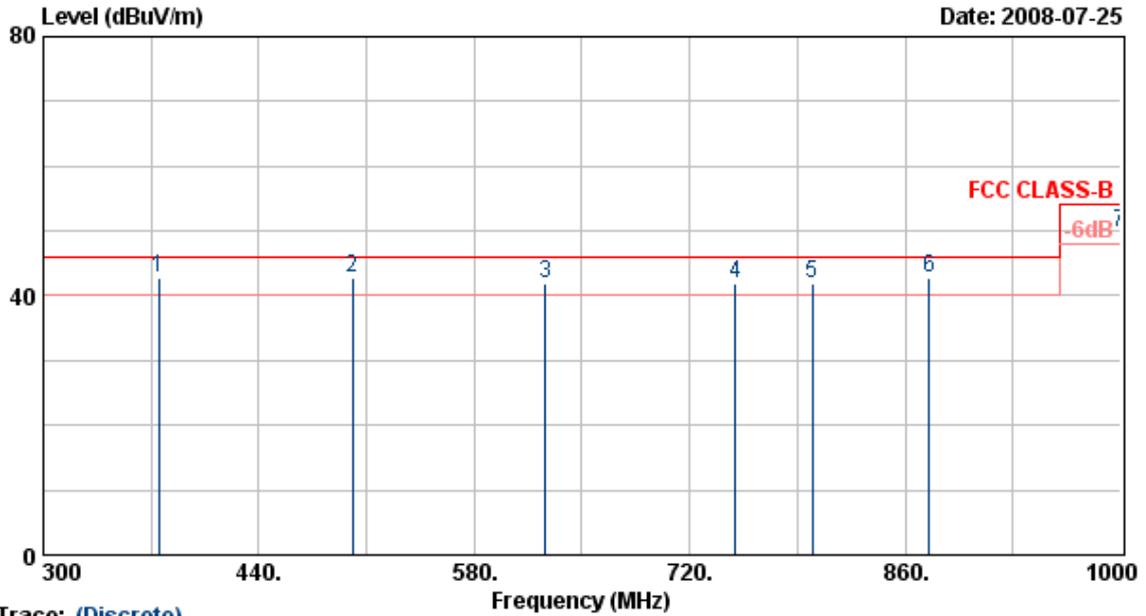


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.00	53.00	-10.15	42.85	46.00	-3.15	QP	100	99
2	500.90	47.32	-4.52	42.80	46.00	-3.20	QP	100	122
3	626.20	43.74	-1.89	41.85	46.00	-4.15	QP	100	177
4	749.40	41.52	0.34	41.86	46.00	-4.14	QP	100	147
5	799.80	42.59	-0.57	42.02	46.00	-3.98	QP	100	147
6	875.40	38.68	3.99	42.67	46.00	-3.33	QP	100	147
7	999.90	46.55	3.34	49.89	54.00	-4.11	QP	100	147

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 38	Humidity	: 70 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1000 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

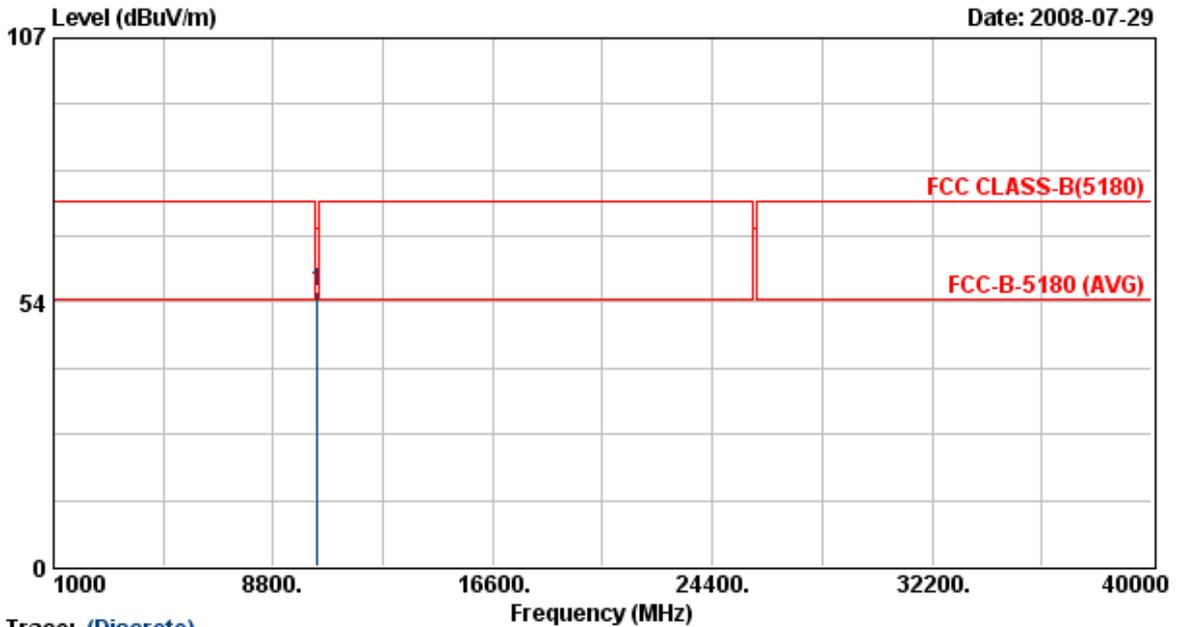

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10379.85	42.68	12.81	55.48	68.30	-12.82	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 38  
 Modulation Type : 802.11an HT40  
 Rate : 270 Mbps  
 Memo : DSA-20P-10 US 120180  
 3TX

Pol/Phase : HORIZONTAL  
 Temperature : 27 °C  
 Humidity : 70 %  
 Atmospheric Pressure: 1000 hPa

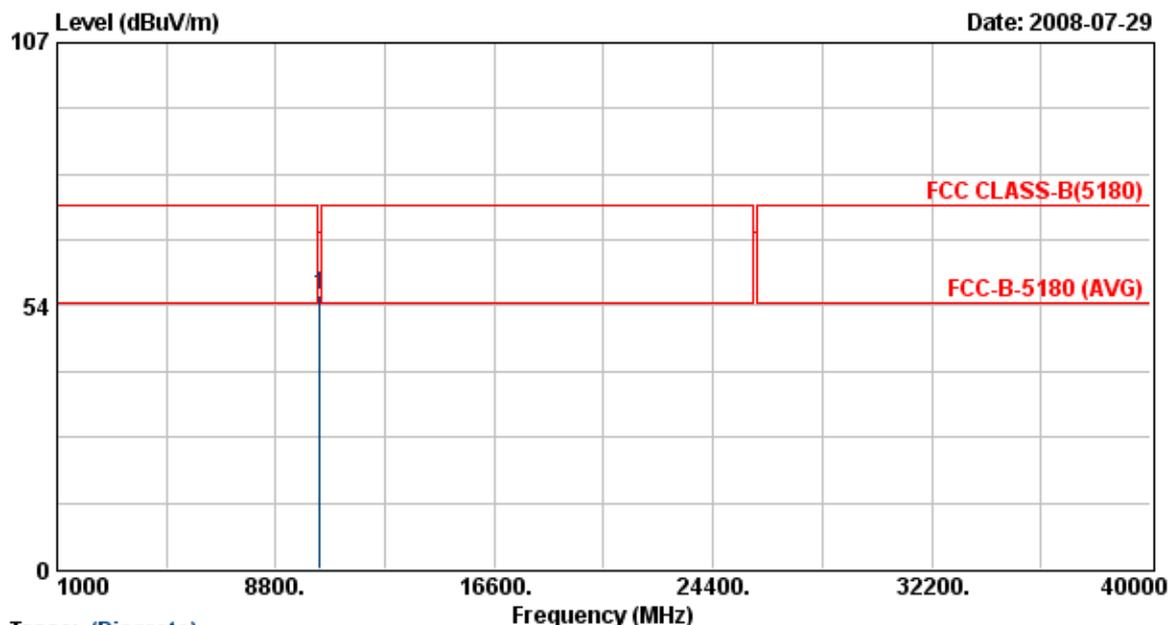


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10380.00	43.00	12.81	55.81	68.30	-12.50	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 42	Humidity	: 70 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1000 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		
	3TX		

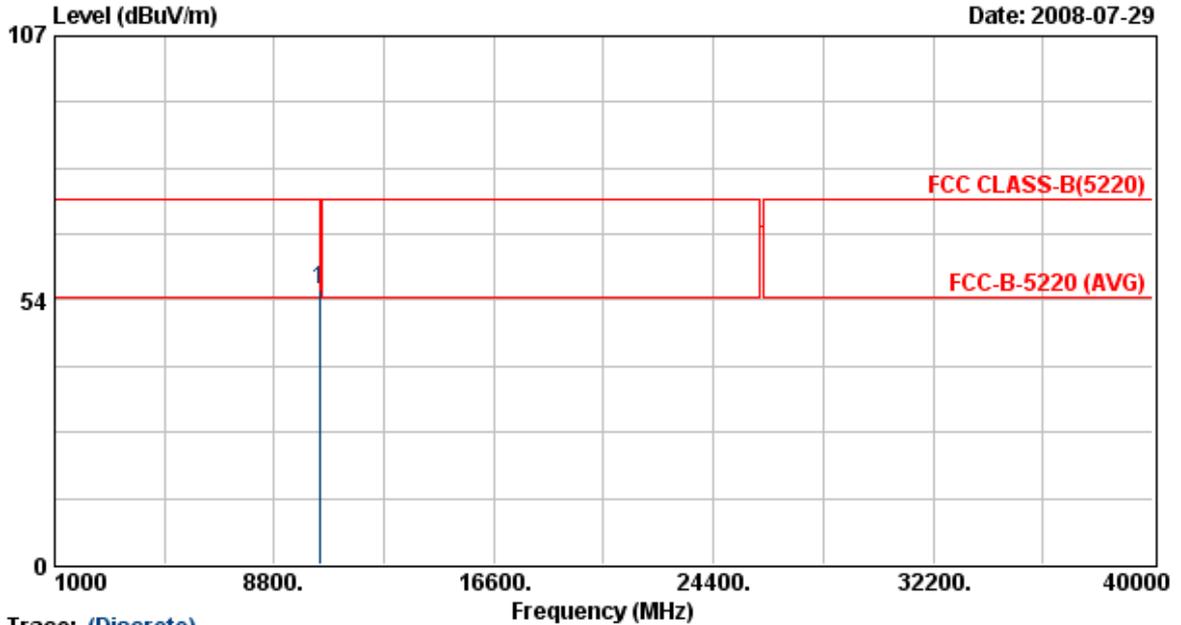


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10420.00	42.86	12.87	55.73	68.30	-12.57	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 42	Humidity	: 70 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1000 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

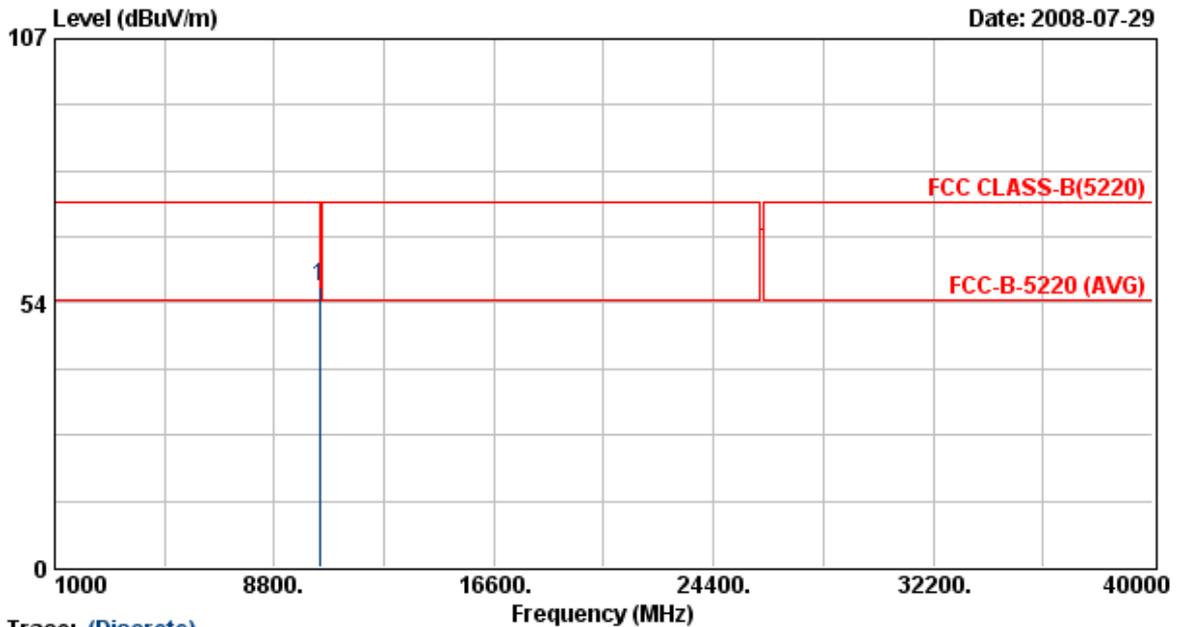


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10420.00	43.76	12.87	56.63	68.30	-11.67	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 46	Humidity	: 70 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1000 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180 3TX		

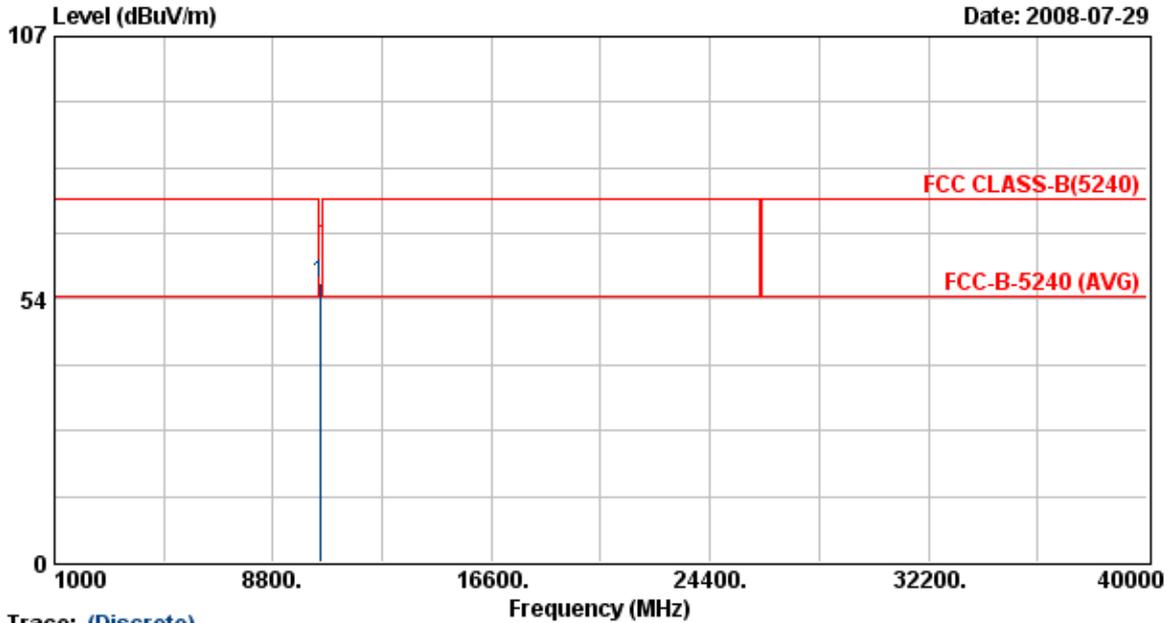


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10460.55	43.78	12.94	56.71	68.30	-11.59	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 46	Humidity	: 70 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1000 hPa
Rate	: 270 Mbps		
Memo	: DSA-20P-10 US 120180		
	3TX		

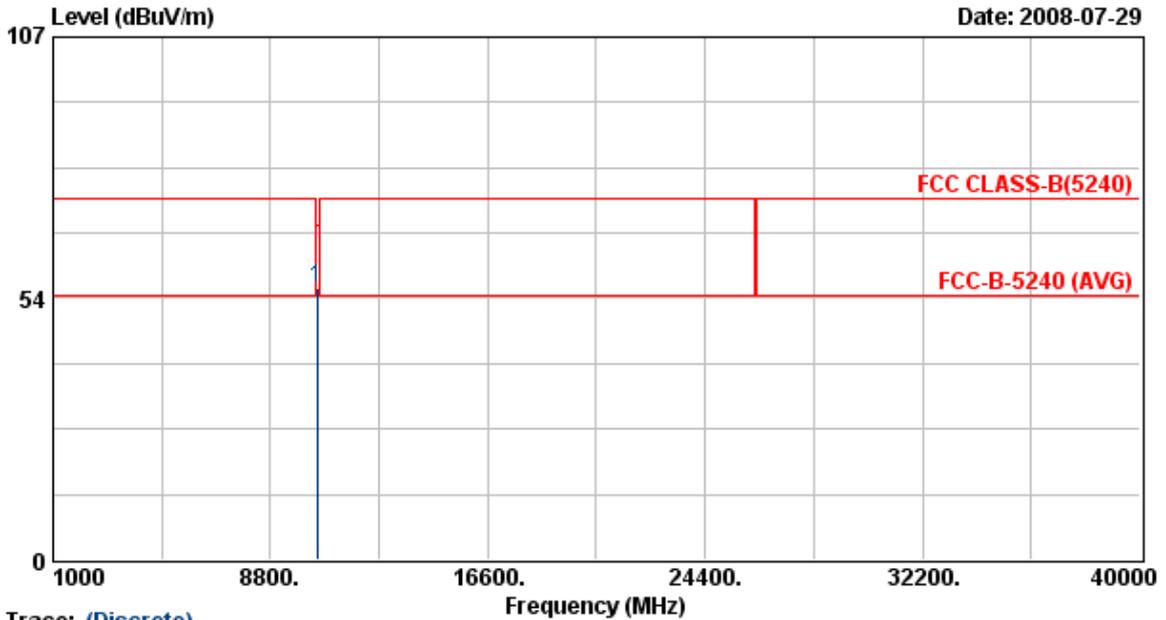

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10459.92	42.55	12.94	55.48	68.30	-12.82	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

**Test Mode 8**

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1020 hPa
Rate	: 54 Mbps		
Memo	: MU18-2120150-A1		

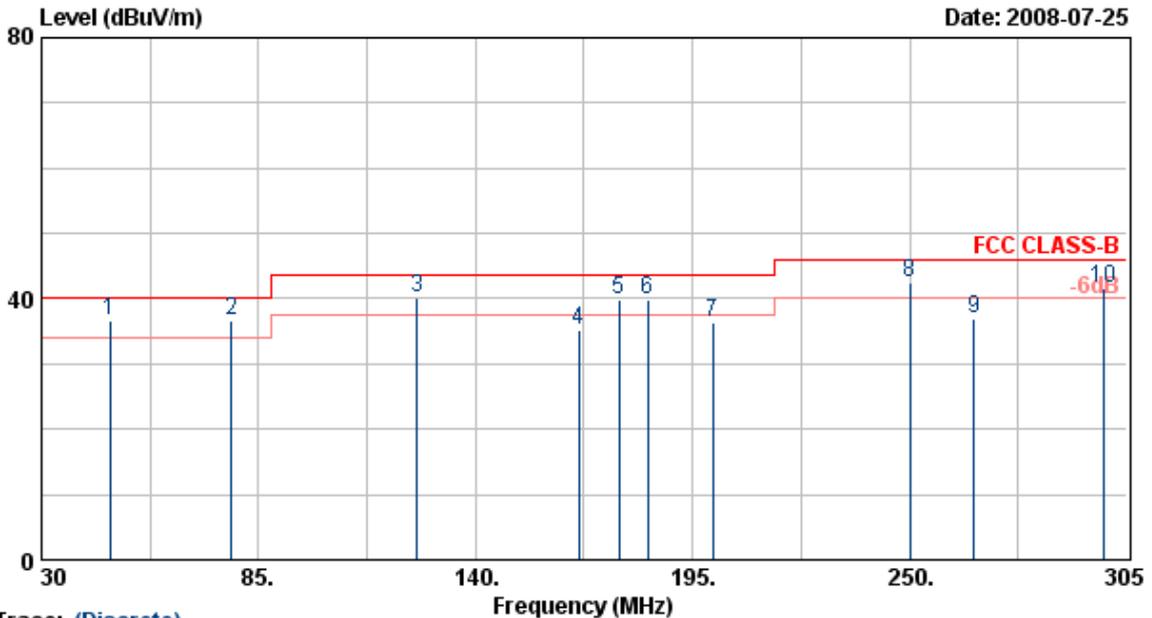


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	47.33	51.62	-14.87	36.75	40.00	-3.25	QP	100	74
2	78.13	53.28	-16.54	36.74	40.00	-3.26	QP	100	99
3	125.15	53.39	-13.34	40.05	43.50	-3.45	QP	100	77
4	166.13	48.20	-12.99	35.21	43.50	-8.29	Peak	100	77
5	176.30	49.60	-9.64	39.96	43.50	-3.54	QP	100	77
6	183.73	49.22	-9.47	39.75	43.50	-3.75	QP	100	85
7	200.23	47.98	-11.71	36.27	43.50	-7.23	Peak	100	50
8	250.00	55.57	-13.04	42.53	46.00	-3.47	QP	100	50
9	266.23	45.27	-8.37	36.90	46.00	-9.10	Peak	100	84
10	299.23	50.87	-9.25	41.62	46.00	-4.38	QP	100	84

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1020 hPa
Rate	: 54 Mbps		
Memo	: MU18-2120150-A1		

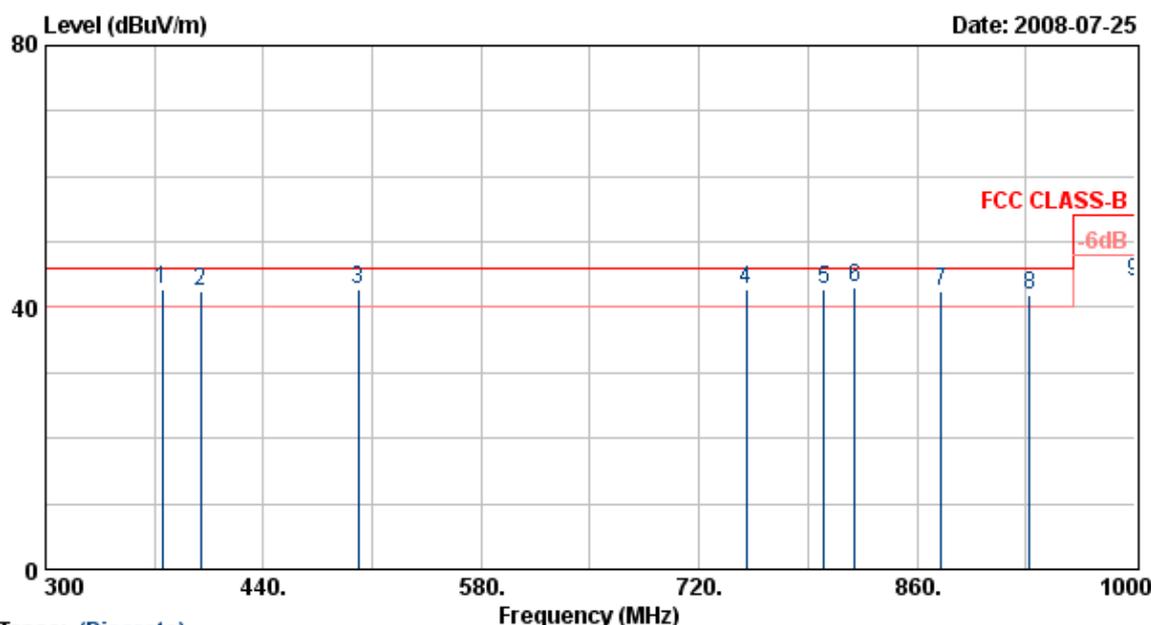

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.01	51.55	-8.84	42.71	46.00	-3.29	QP	100	95
2	399.40	50.95	-8.62	42.33	46.00	-3.67	QP	100	85
3	500.90	47.69	-4.89	42.80	46.00	-3.20	QP	100	85
4	750.10	41.49	1.26	42.75	46.00	-3.25	QP	100	85
5	800.50	45.62	-2.80	42.82	46.00	-3.18	QP	100	99
6	820.10	45.66	-2.67	42.99	46.00	-3.01	QP	100	48
7	875.40	40.80	1.75	42.55	46.00	-3.45	QP	100	48
8	932.10	42.88	-1.12	41.76	46.00	-4.24	QP	100	48
9	999.90	42.55	1.49	44.04	54.00	-9.96	Peak	100	48

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 36  
 Modulation Type : 802.11a  
 Rate : 54 Mbps  
 Memo : MU18-2120150-A1

Pol/Phase : HORIZONTAL  
 Temperature : 30 °C  
 Humidity : 65 %  
 Atmospheric Pressure: 1020 hPa

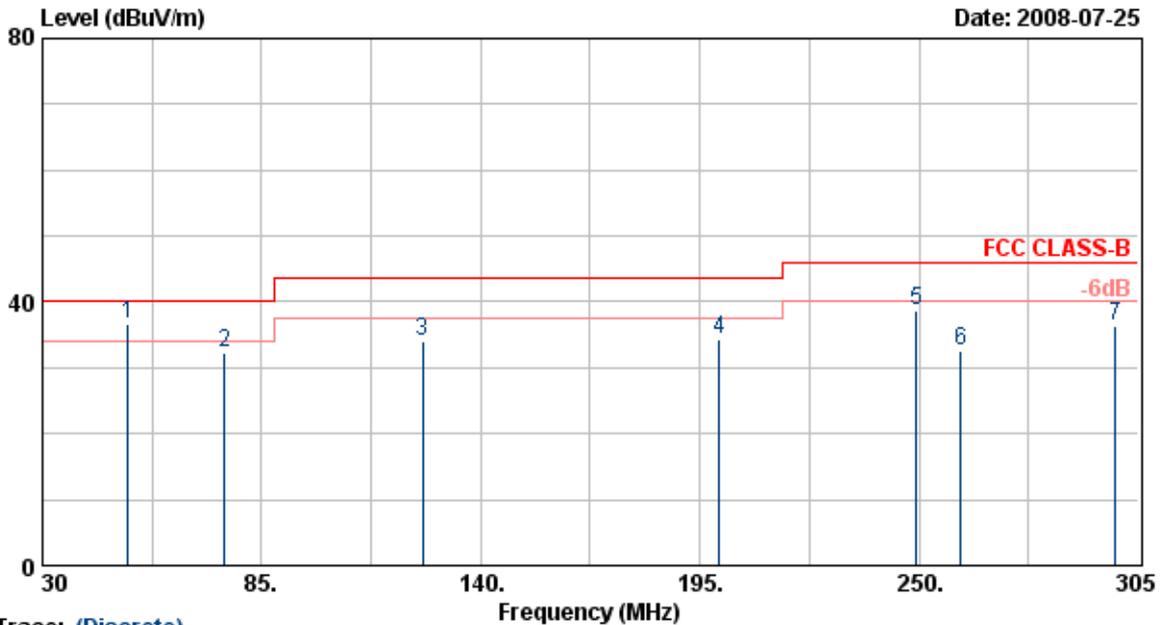


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	51.45	57.88	-21.31	36.57	40.00	-3.43	QP	100	99
2	75.65	54.29	-21.94	32.35	40.00	-7.65	Peak	100	188
3	125.43	53.65	-19.57	34.08	43.50	-9.42	Peak	100	188
4	199.95	48.80	-14.51	34.29	43.50	-9.21	Peak	100	95
5	249.45	56.58	-17.75	38.83	46.00	-7.17	Peak	100	95
6	260.45	47.58	-15.01	32.57	46.00	-13.43	Peak	100	95
7	299.23	50.70	-14.39	36.31	46.00	-9.69	Peak	100	95

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1020 hPa
Rate	: 54 Mbps		
Memo	: MU18-2120150-A1		

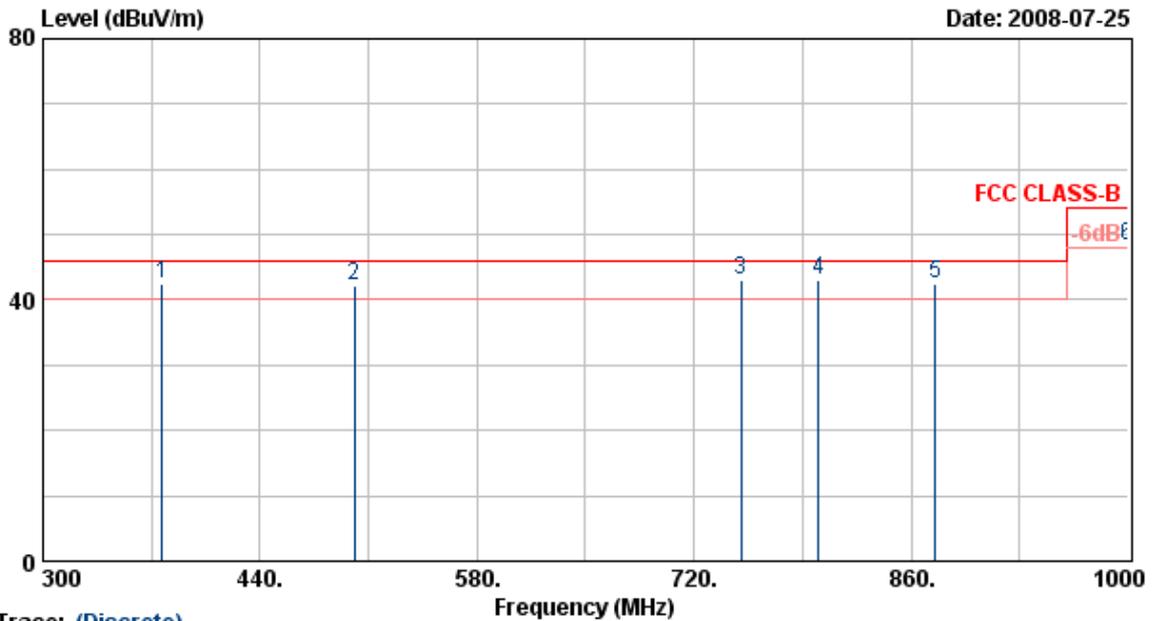

Trace: (Discrete)


Item	Freq MHz	Read Value dBuV/m	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Ant Pos cm	Tab Pos Deg
1	377.00	53.85	-11.25	42.60	46.00	-3.40	QP	100	88
2	500.90	46.68	-4.52	42.16	46.00	-3.84	QP	100	111
3	750.10	42.63	0.31	42.94	46.00	-3.06	QP	100	111
4	800.50	43.48	-0.50	42.98	46.00	-3.02	QP	100	111
5	875.40	38.50	3.99	42.49	46.00	-3.51	QP	100	111
6	999.90	44.90	3.34	48.24	54.00	-5.76	QP	100	82

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 36  
 Modulation Type : 802.11a  
 Rate : 54 Mbps  
 Memo : MU18-2120150-A1

Pol/Phase : VERTICAL  
 Temperature : 27 °C  
 Humidity : 70 %  
 Atmospheric Pressure: 1000 hPa

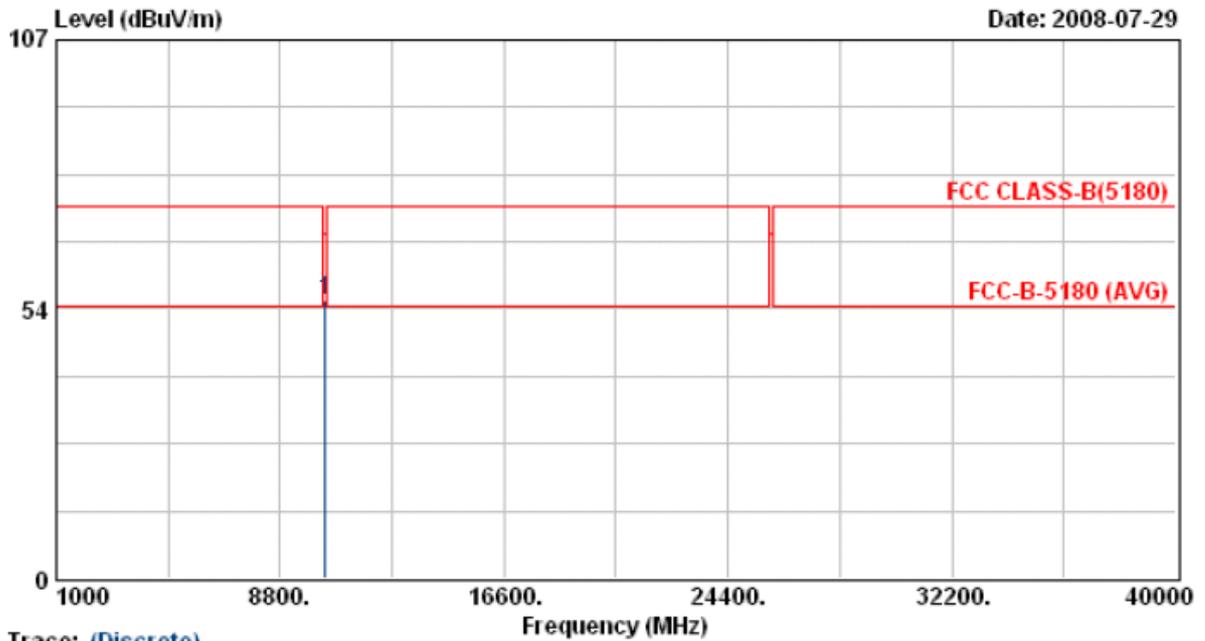


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10359.85	42.43	12.78	55.21	68.30	-13.09	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 36	Humidity	: 70 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1000 hPa
Rate	: 54 Mbps		
Memo	: MU18-2120150-A1		

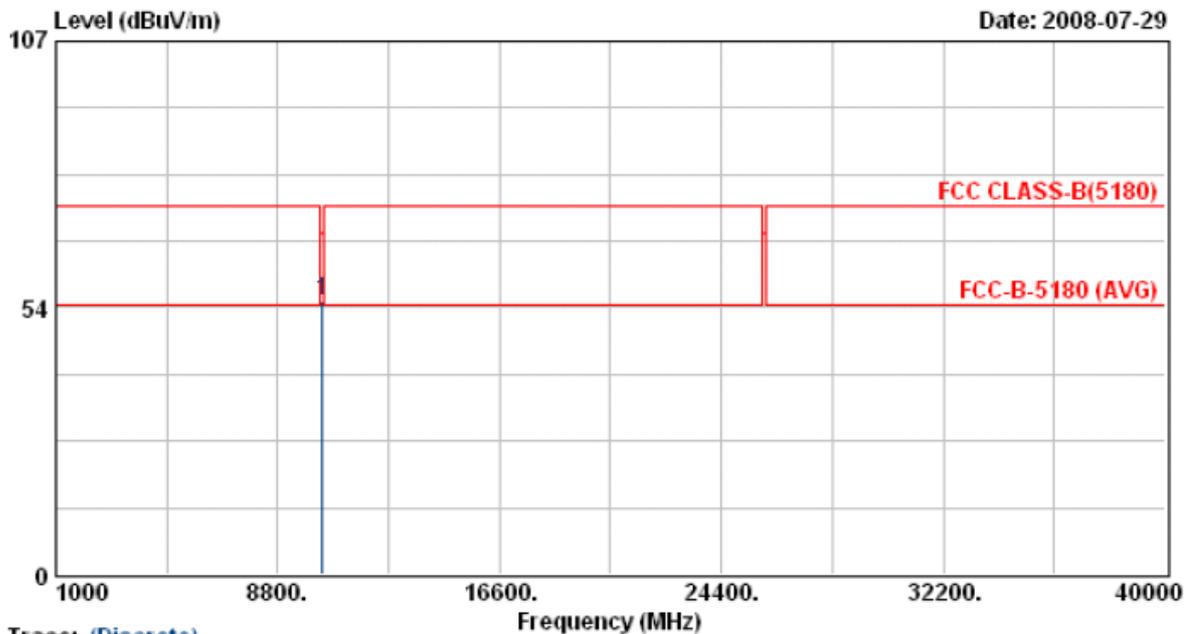

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10360.00	42.02	12.78	54.80	68.30	-13.50	Peak	100	150


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

```

Power          : AC 120V
Test Mode      : Transmit/Receive
Operation Channel: 44
Modulation Type : 802.11a
Rate           : 54 Mbps
Memo           : MU18-2120150-A1

Pol/Phase      : VERTICAL
Temperature    : 27 °C
Humidity       : 70 %
Atmospheric Pressure: 1000 hPa
    
```

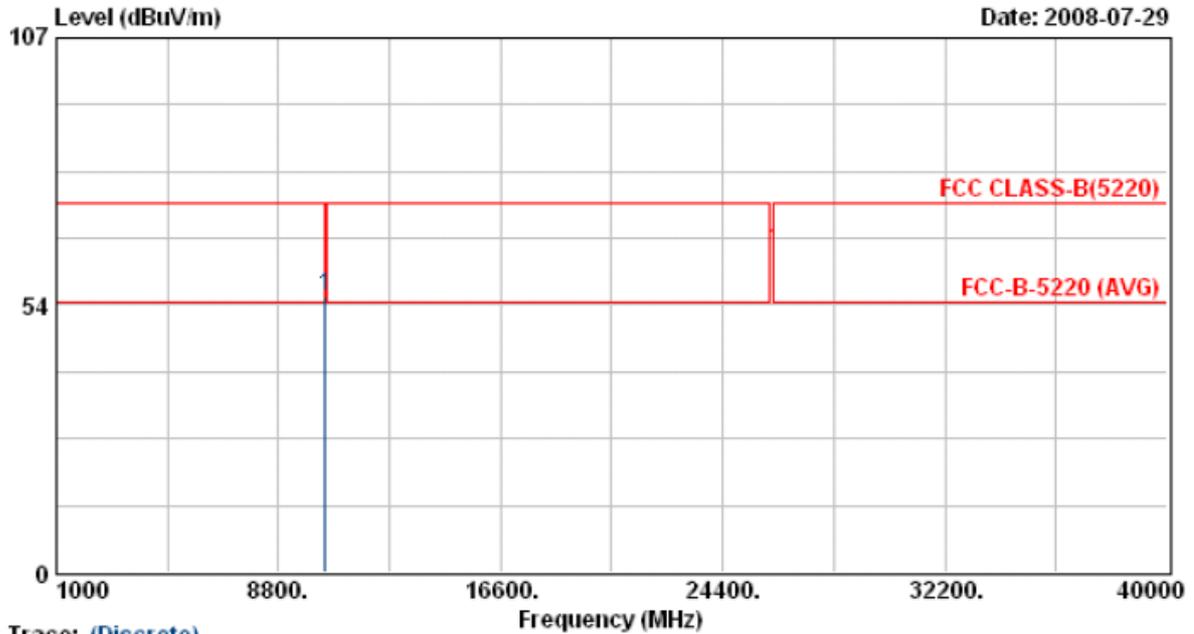


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10440.05	42.18	12.90	55.08	68.30	-13.22	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 44	Humidity	: 70 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1000 hPa
Rate	: 54 Mbps		
Memo	: MU18-2120150-A1		

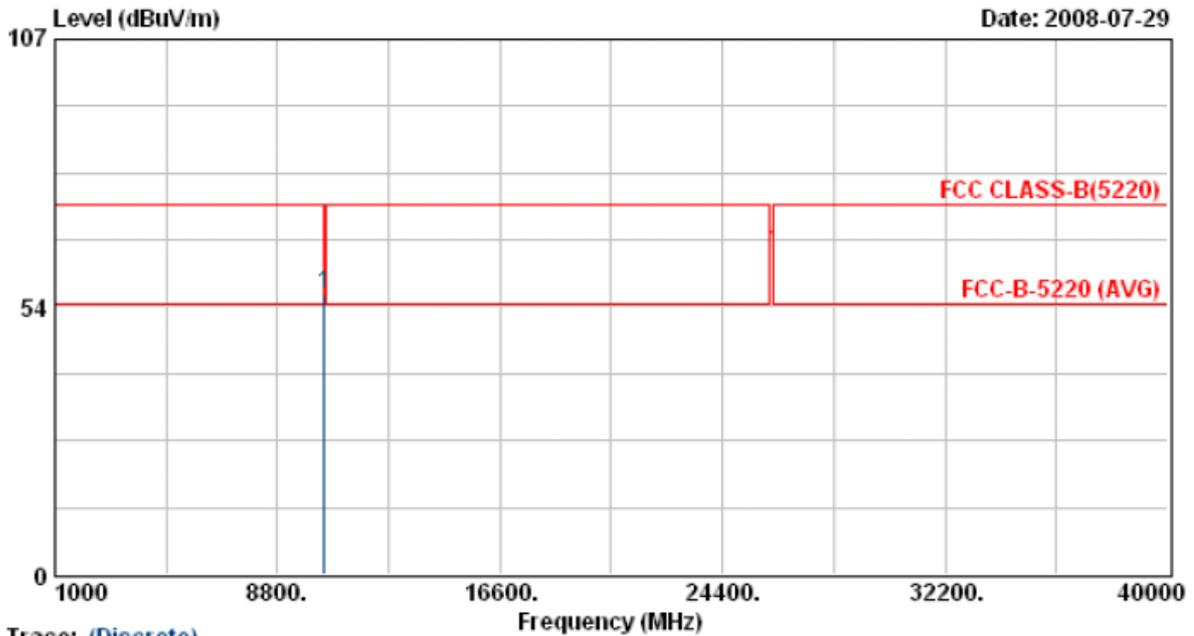

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10440.15	43.25	12.90	56.15	68.30	-12.15	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 48  
 Modulation Type : 802.11a  
 Rate : 54 Mbps  
 Memo : MU18-2120150-A1

Pol/Phase : VERTICAL  
 Temperature : 27 °C  
 Humidity : 70 %  
 Atmospheric Pressure: 1000 hPa

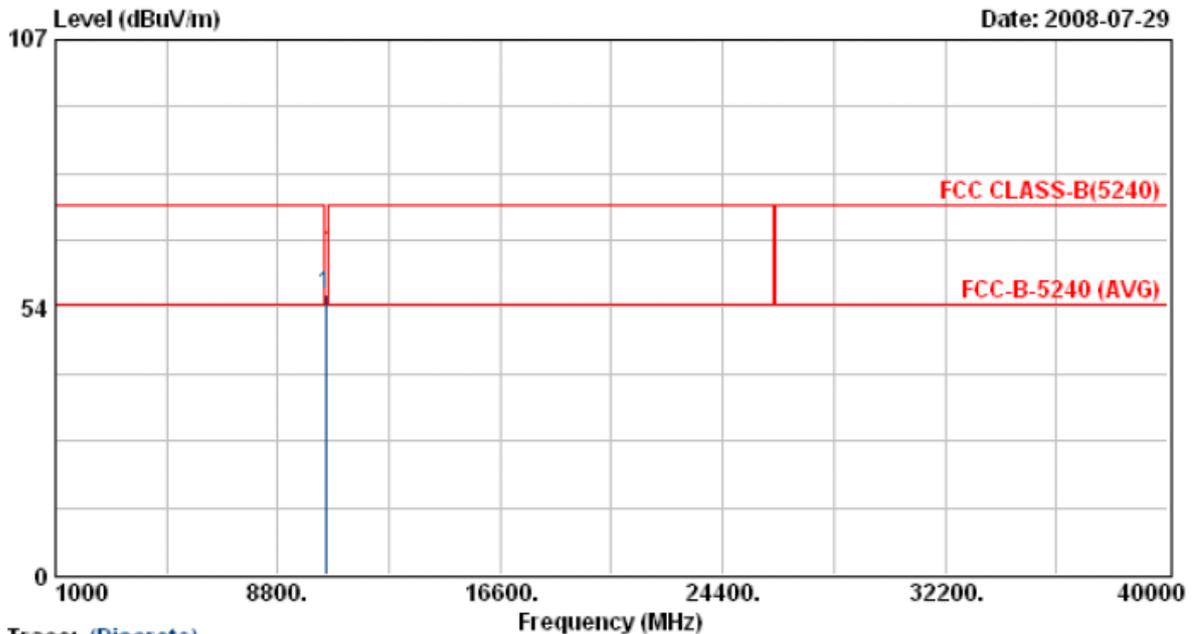


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.85	43.01	12.97	55.98	68.30	-12.32	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 48	Humidity	: 70 %
Modulation Type	: 802.11a	Atmospheric Pressure	: 1000 hPa
Rate	: 54 Mbps		
Memo	: MU18-2120150-A1		

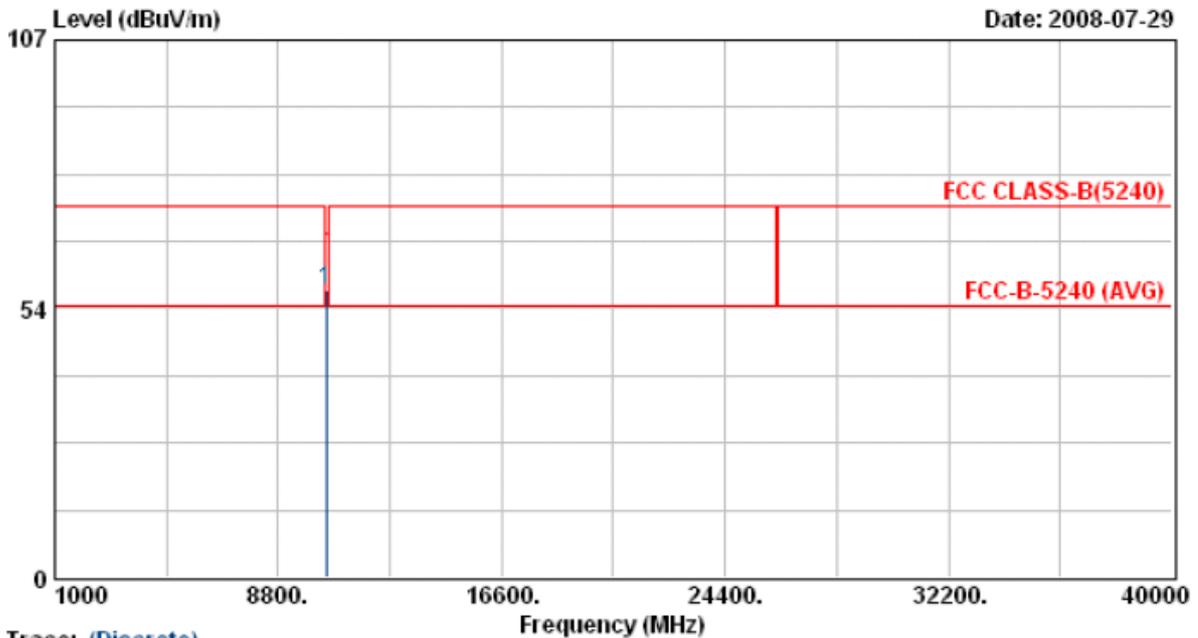

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.95	44.26	12.97	57.23	68.30	-11.07	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

**Test Mode 11**

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		

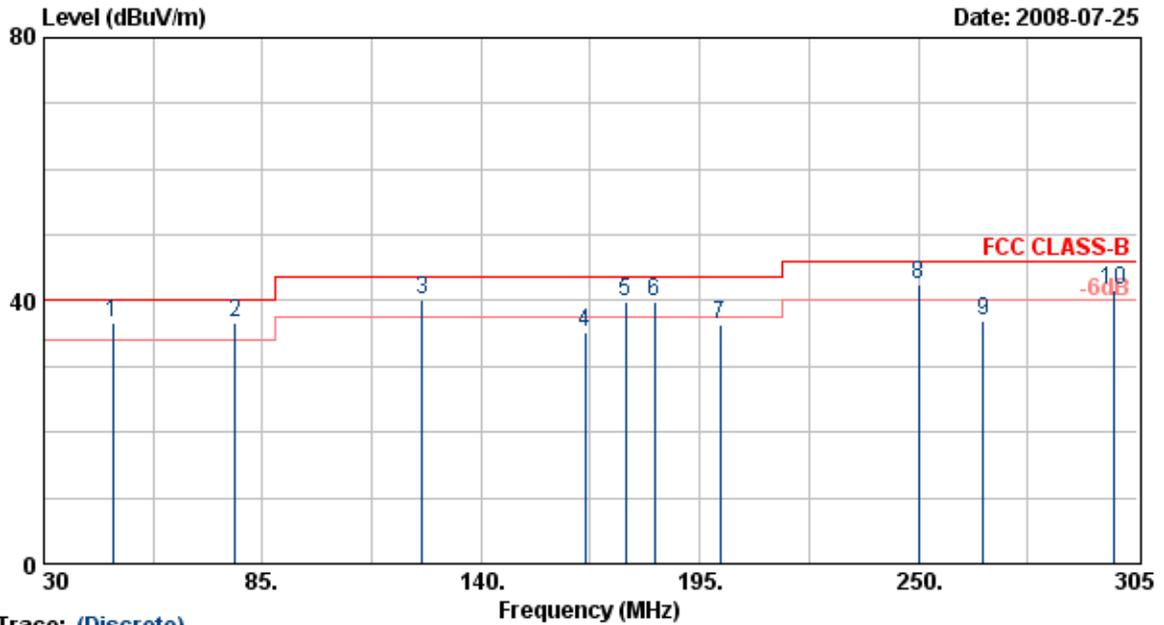


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	47.33	51.62	-14.87	36.75	40.00	-3.25	QP	100	74
2	78.13	53.28	-16.54	36.74	40.00	-3.26	QP	100	99
3	125.15	53.39	-13.34	40.05	43.50	-3.45	QP	100	77
4	166.13	48.20	-12.99	35.21	43.50	-8.29	Peak	100	77
5	176.30	49.60	-9.64	39.96	43.50	-3.54	QP	100	77
6	183.73	49.22	-9.47	39.75	43.50	-3.75	QP	100	85
7	200.23	47.98	-11.71	36.27	43.50	-7.23	Peak	100	50
8	250.00	55.57	-13.04	42.53	46.00	-3.47	QP	100	50
9	266.23	45.27	-8.37	36.90	46.00	-9.10	Peak	100	84
10	299.23	50.87	-9.25	41.62	46.00	-4.38	QP	100	84

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		

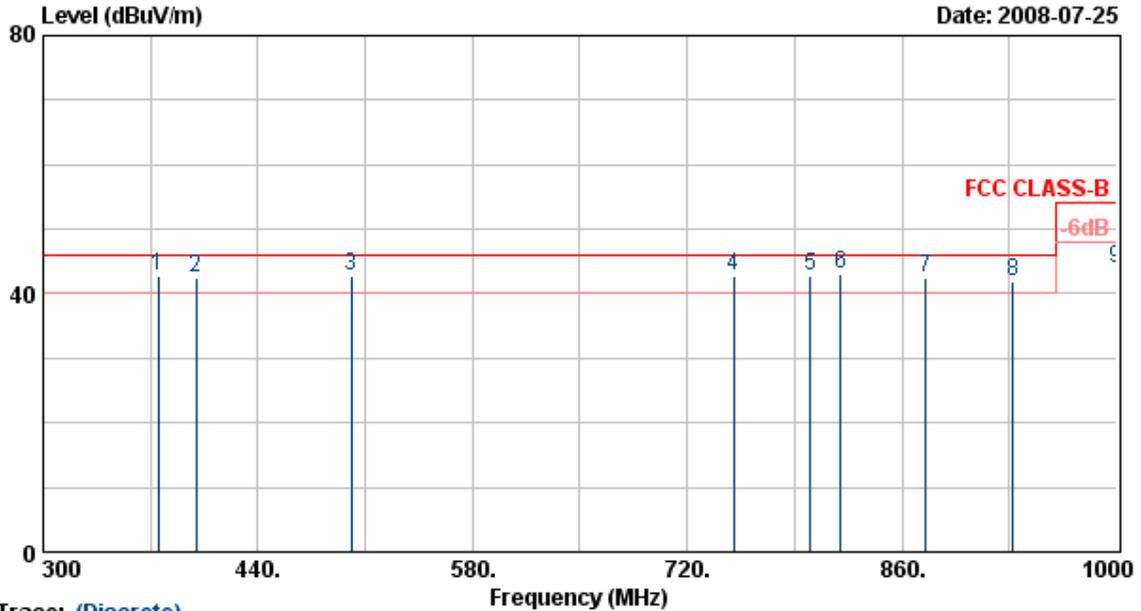


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	375.01	51.55	-8.84	42.71	46.00	-3.29	QP	100	95
2	399.40	50.95	-8.62	42.33	46.00	-3.67	QP	100	85
3	500.90	47.69	-4.89	42.80	46.00	-3.20	QP	100	85
4	750.10	41.49	1.26	42.75	46.00	-3.25	QP	100	85
5	800.50	45.62	-2.80	42.82	46.00	-3.18	QP	100	99
6	820.10	45.66	-2.67	42.99	46.00	-3.01	QP	100	48
7	875.40	40.80	1.75	42.55	46.00	-3.45	QP	100	48
8	932.10	42.88	-1.12	41.76	46.00	-4.24	QP	100	48
9	999.90	42.55	1.49	44.04	54.00	-9.96	Peak	100	48

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		

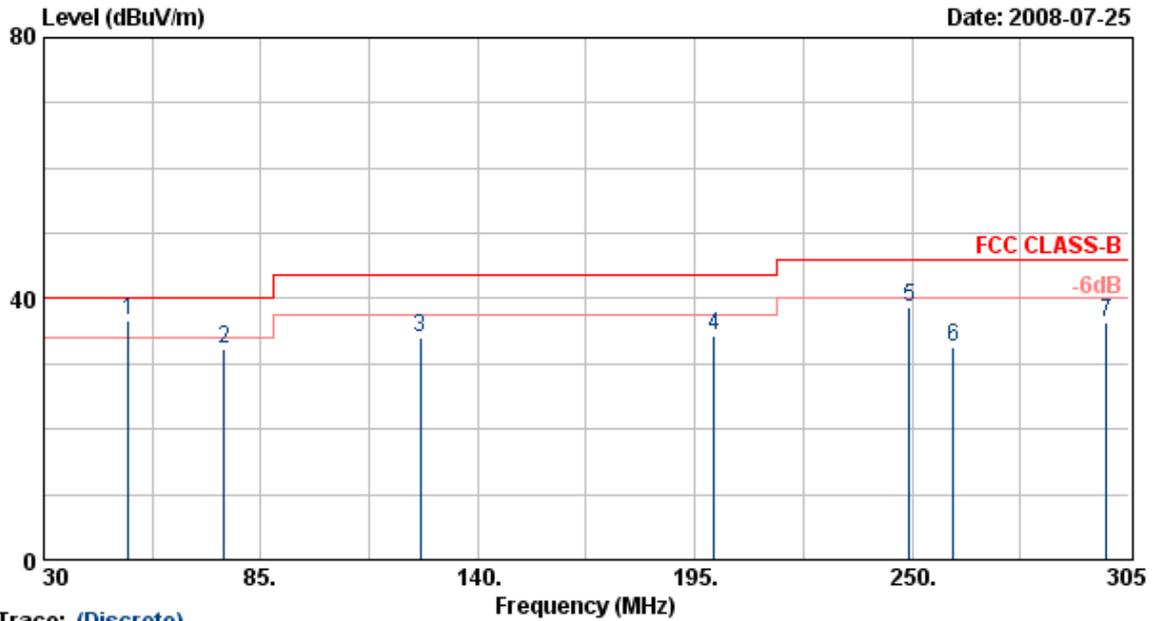


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	51.45	57.88	-21.31	36.57	40.00	-3.43	QP	100	99
2	75.65	54.29	-21.94	32.35	40.00	-7.65	Peak	100	188
3	125.43	53.65	-19.57	34.08	43.50	-9.42	Peak	100	188
4	199.95	48.80	-14.51	34.29	43.50	-9.21	Peak	100	95
5	249.45	56.58	-17.75	38.83	46.00	-7.17	Peak	100	95
6	260.45	47.58	-15.01	32.57	46.00	-13.43	Peak	100	95
7	299.23	50.70	-14.39	36.31	46.00	-9.69	Peak	100	95

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		

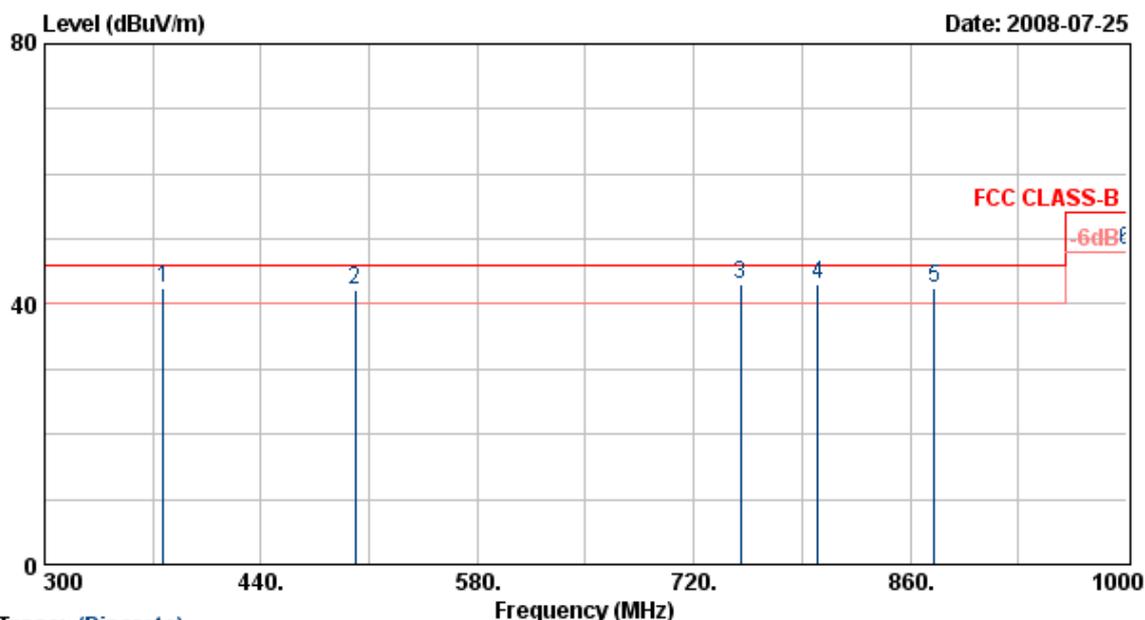


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	377.00	53.85	-11.25	42.60	46.00	-3.40	QP	100	88
2	500.90	46.68	-4.52	42.16	46.00	-3.84	QP	100	111
3	750.10	42.63	0.31	42.94	46.00	-3.06	QP	100	111
4	800.50	43.48	-0.50	42.98	46.00	-3.02	QP	100	111
5	875.40	38.50	3.99	42.49	46.00	-3.51	QP	100	111
6	999.90	44.90	3.34	48.24	54.00	-5.76	QP	100	82

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 36	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		

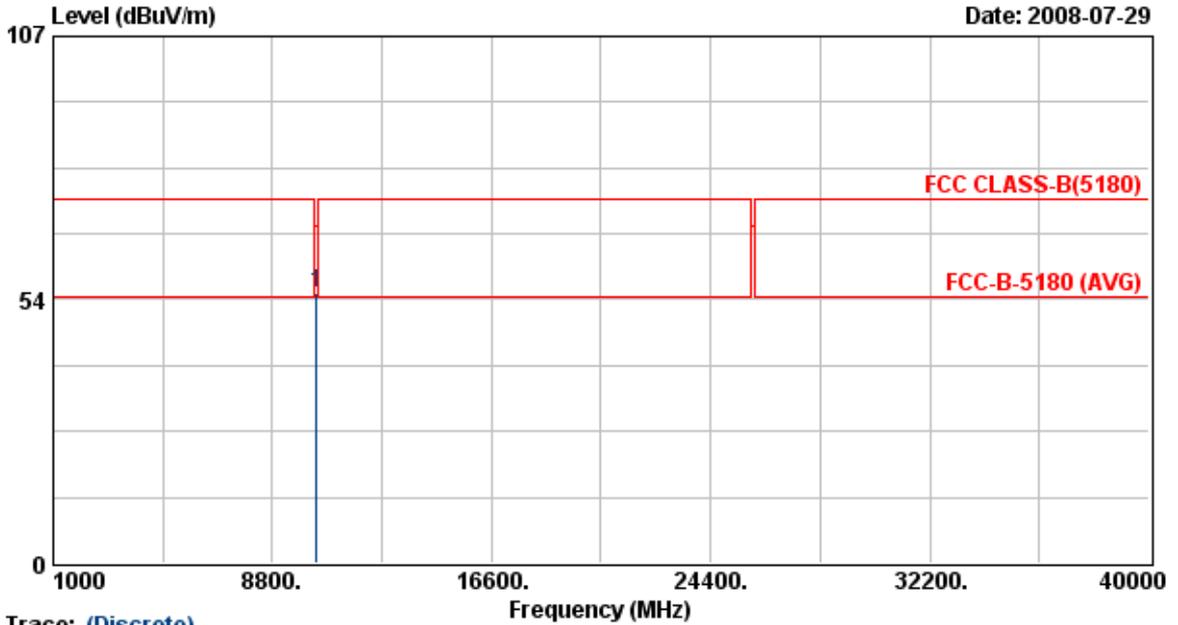


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10359.75	42.28	12.78	55.05	68.30	-13.25	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 36	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		

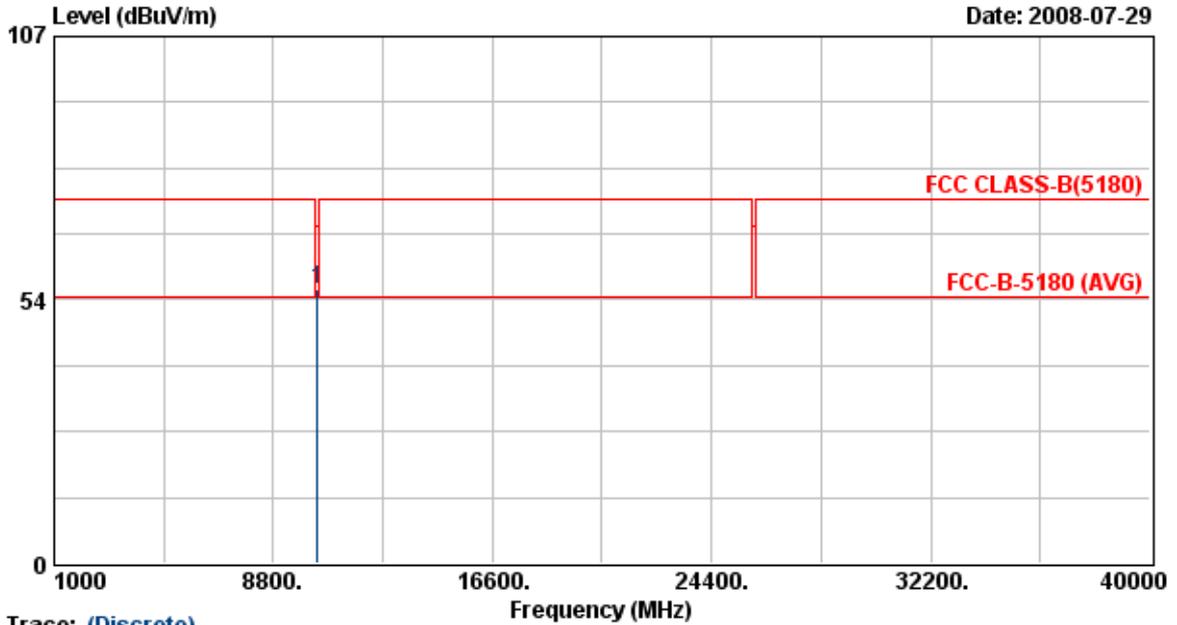


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10360.10	42.95	12.78	55.72	68.30	-12.58	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 44	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		

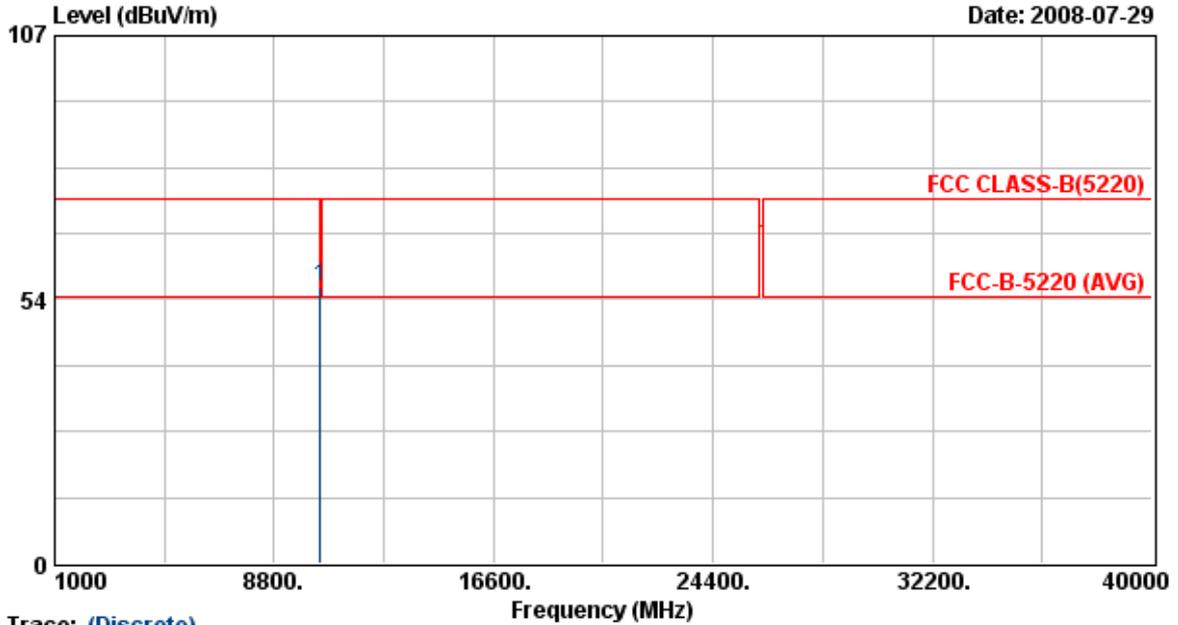


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10439.65	43.10	12.90	56.00	68.30	-12.30	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 44	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		

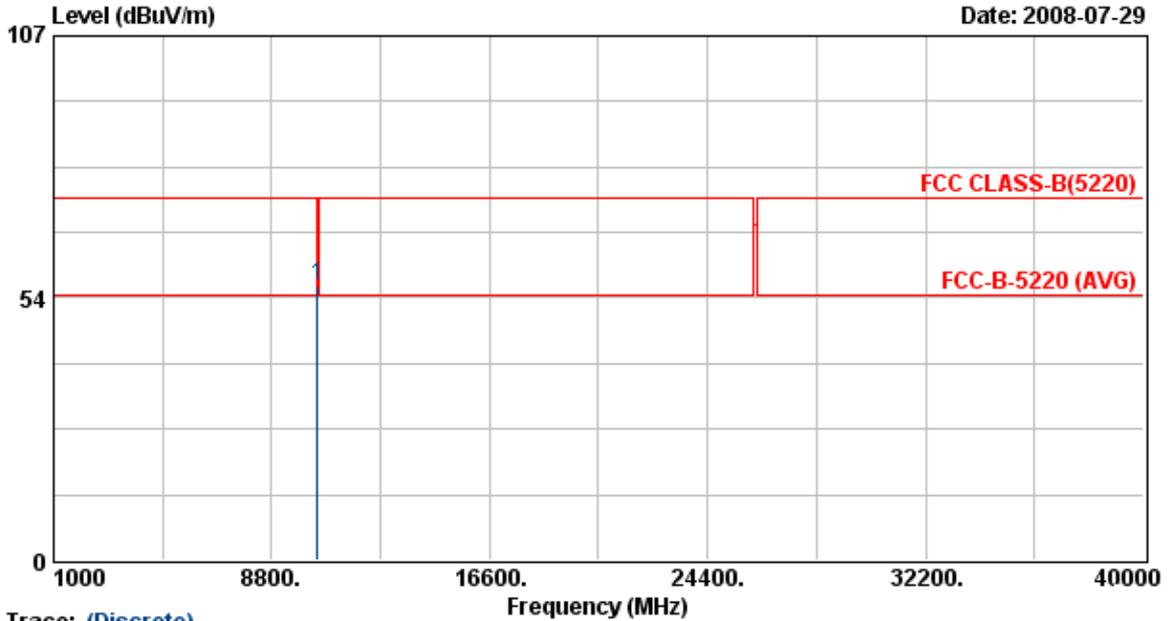


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10440.05	43.15	12.90	56.06	68.30	-12.24	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 48	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		

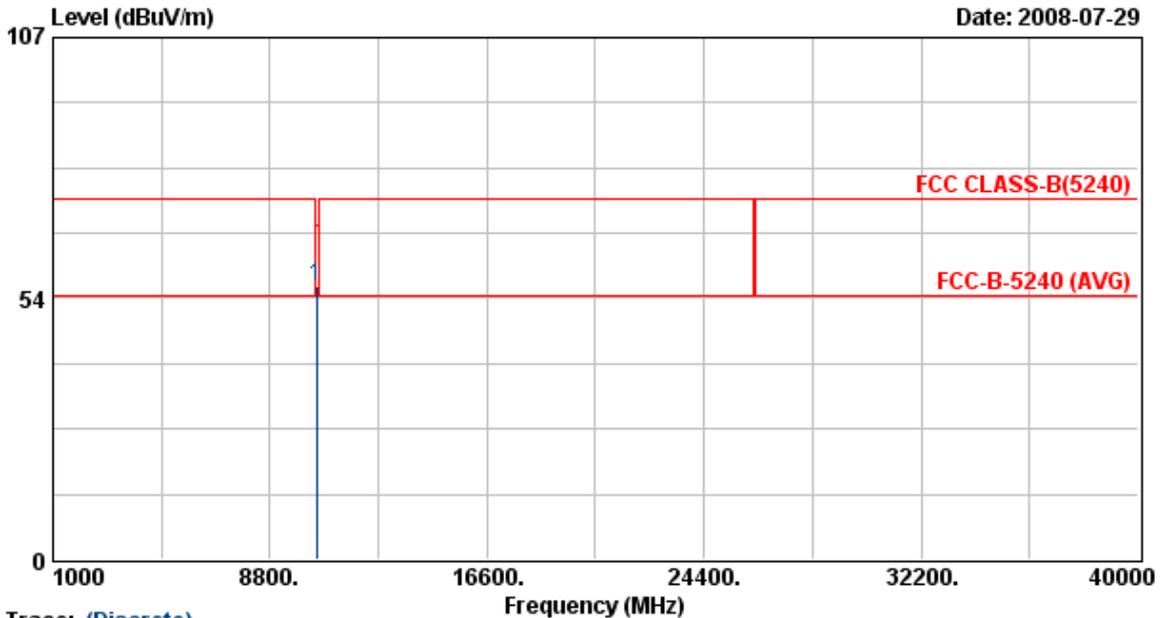


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.95	42.95	12.97	55.91	68.30	-12.39	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 48	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		

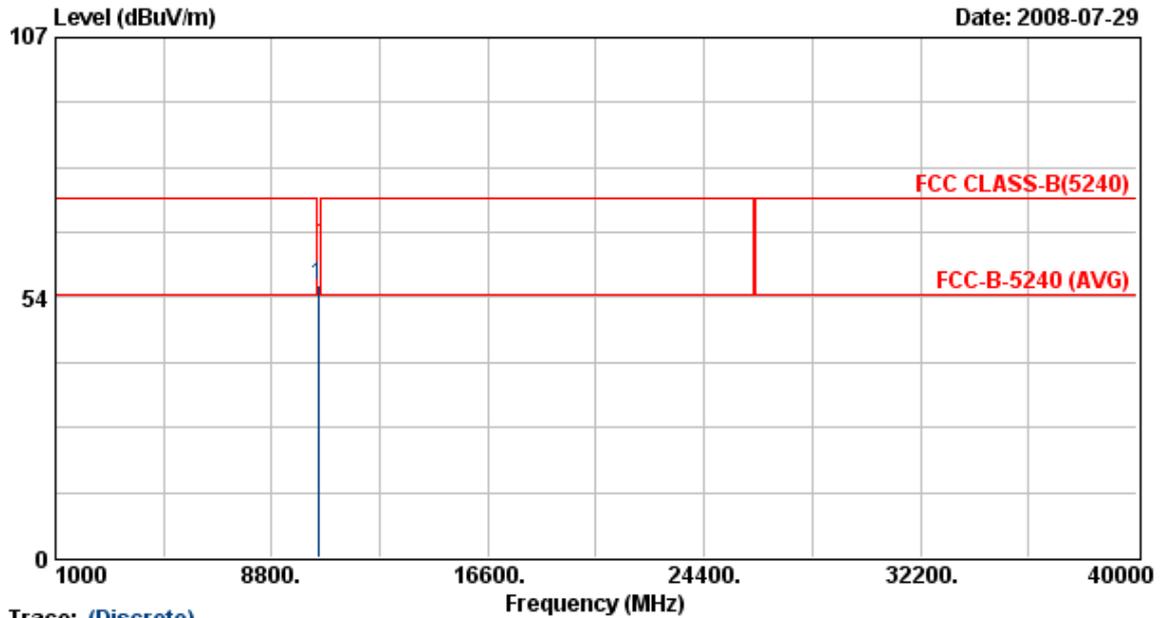


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.95	43.05	12.97	56.01	68.30	-12.29	Peak	100	150

- Notes:
1. Result = Read Value + Factor
  2. Factor = Antenna Factor + Cable Loss - Amplifier
  3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
  4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
  5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
  6. The other emissions is too low to be measured.

**Test Mode 12**

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1 3TX		

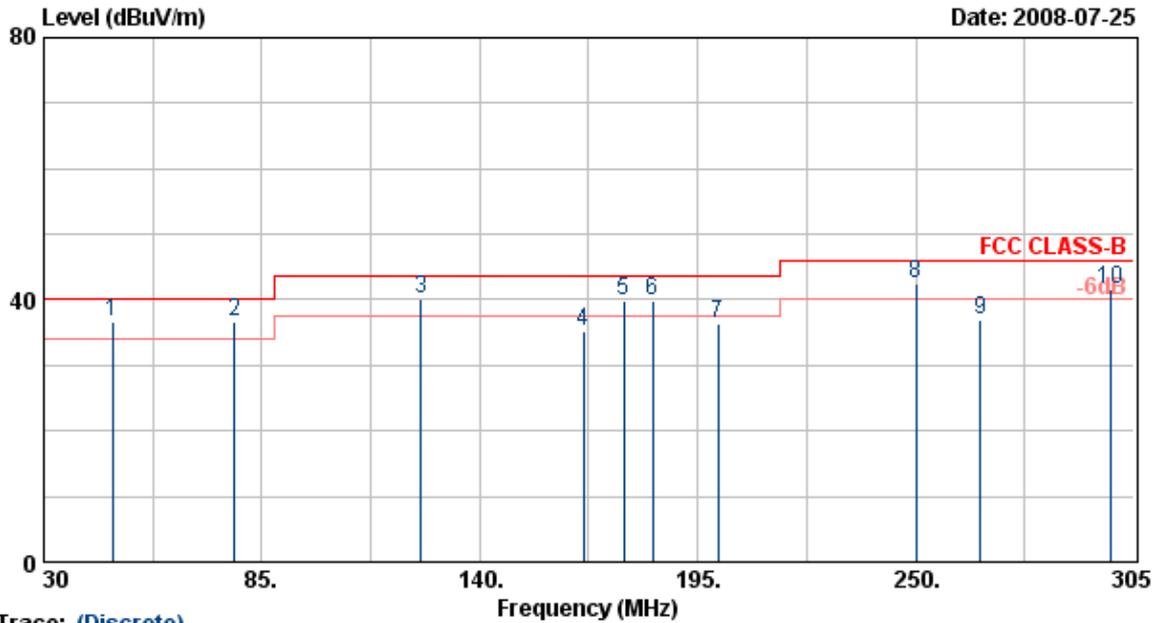


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	47.33	51.62	-14.87	36.75	40.00	-3.25	QP	100	74
2	78.13	53.28	-16.54	36.74	40.00	-3.26	QP	100	99
3	125.15	53.39	-13.34	40.05	43.50	-3.45	QP	100	77
4	166.13	48.20	-12.99	35.21	43.50	-8.29	Peak	100	77
5	176.30	49.60	-9.64	39.96	43.50	-3.54	QP	100	77
6	183.73	49.22	-9.47	39.75	43.50	-3.75	QP	100	85
7	200.23	47.98	-11.71	36.27	43.50	-7.23	Peak	100	50
8	250.00	55.57	-13.04	42.53	46.00	-3.47	QP	100	50
9	266.23	45.27	-8.37	36.90	46.00	-9.10	Peak	100	84
10	299.23	50.87	-9.25	41.62	46.00	-4.38	QP	100	84

- Notes:
1. Result = Read Value + Factor
  2. Factor = Antenna Factor + Cable Loss - Amplifier
  3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
  4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
  5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1 3TX		

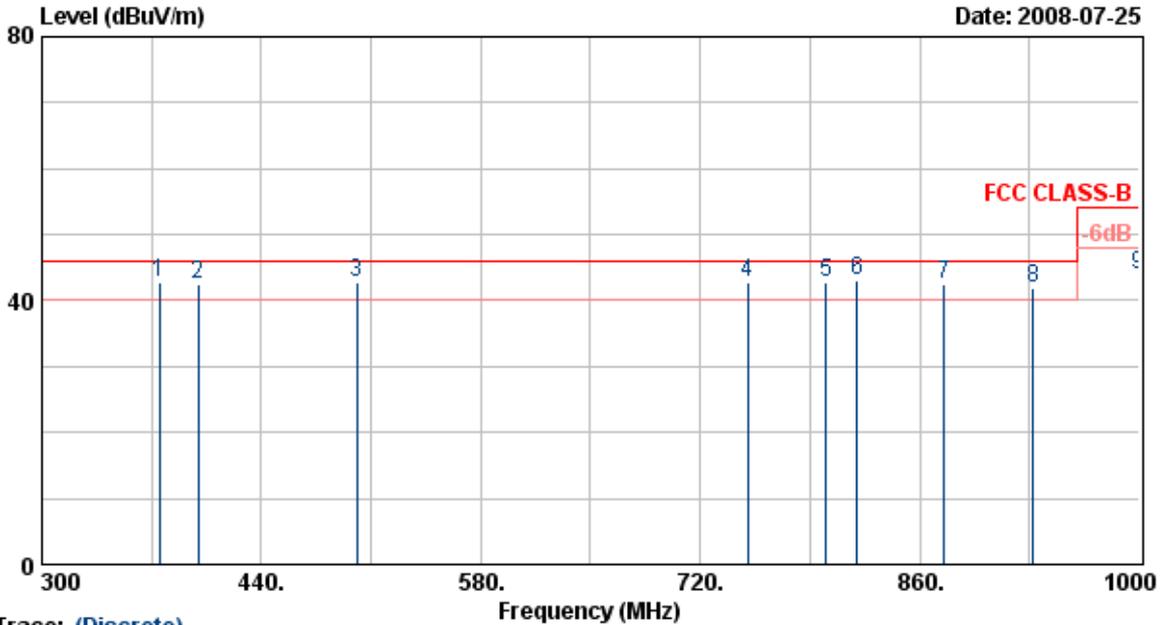


Trace: (Discrete)

Item	Freq MHz	Read Value dBuV/m	Factor dB	Result dBuV/m	Limit dBuV/m	Margin dB	Remark	Ant Pos cm	Tab Pos Deg
1	375.01	51.55	-8.84	42.71	46.00	-3.29	QP	100	95
2	399.40	50.95	-8.62	42.33	46.00	-3.67	QP	100	85
3	500.90	47.69	-4.89	42.80	46.00	-3.20	QP	100	85
4	750.10	41.49	1.26	42.75	46.00	-3.25	QP	100	85
5	800.50	45.62	-2.80	42.82	46.00	-3.18	QP	100	99
6	820.10	45.66	-2.67	42.99	46.00	-3.01	QP	100	48
7	875.40	40.80	1.75	42.55	46.00	-3.45	QP	100	48
8	932.10	42.88	-1.12	41.76	46.00	-4.24	QP	100	48
9	999.90	42.55	1.49	44.04	54.00	-9.96	Peak	100	48

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1 3TX		

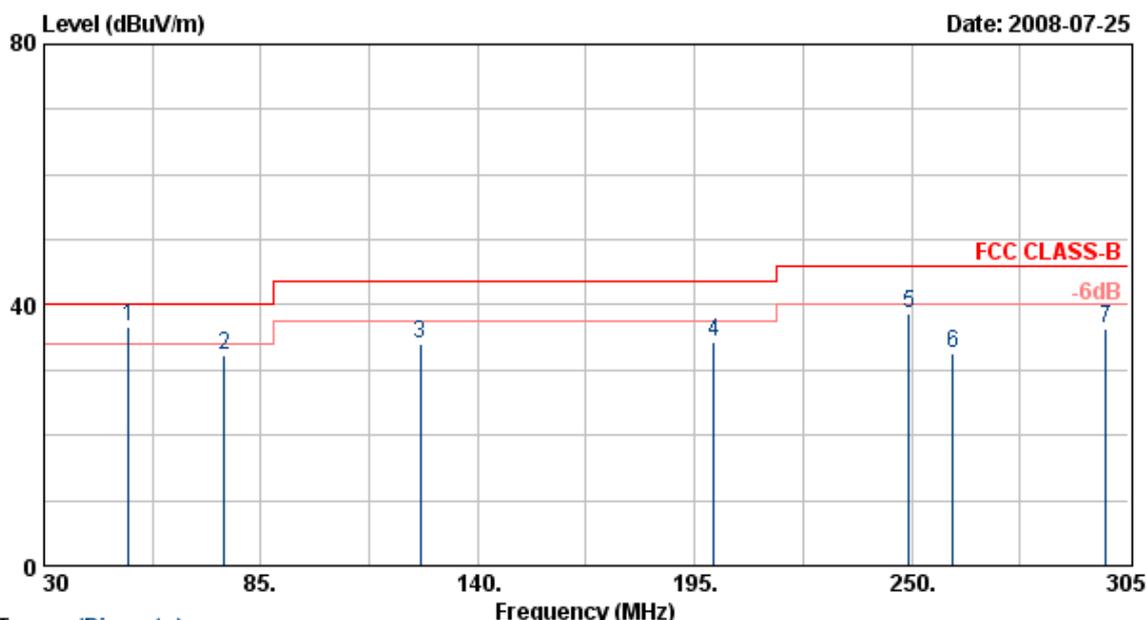


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	51.45	57.88	-21.31	36.57	40.00	-3.43	QP	100	99
2	75.65	54.29	-21.94	32.35	40.00	-7.65	Peak	100	188
3	125.43	53.65	-19.57	34.08	43.50	-9.42	Peak	100	188
4	199.95	48.80	-14.51	34.29	43.50	-9.21	Peak	100	95
5	249.45	56.58	-17.75	38.83	46.00	-7.17	Peak	100	95
6	260.45	47.58	-15.01	32.57	46.00	-13.43	Peak	100	95
7	299.23	50.70	-14.39	36.31	46.00	-9.69	Peak	100	95

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 36	Humidity	: 65 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1020 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		
	3TX		

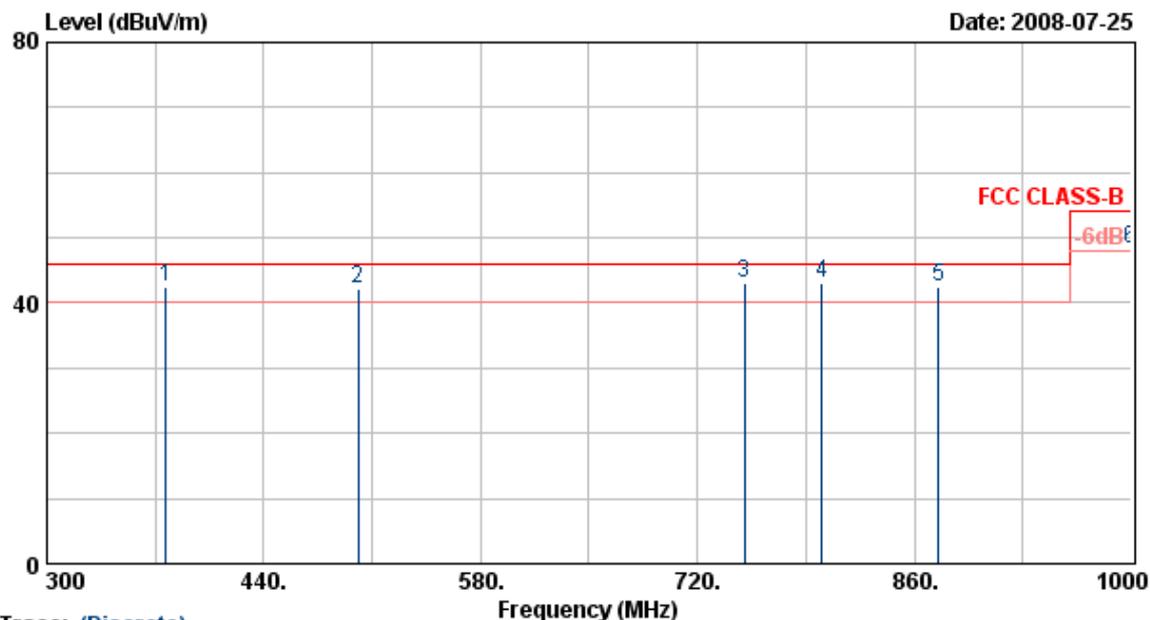


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	377.00	53.85	-11.25	42.60	46.00	-3.40	QP	100	88
2	500.90	46.68	-4.52	42.16	46.00	-3.84	QP	100	111
3	750.10	42.63	0.31	42.94	46.00	-3.06	QP	100	111
4	800.50	43.48	-0.50	42.98	46.00	-3.02	QP	100	111
5	875.40	38.50	3.99	42.49	46.00	-3.51	QP	100	111
6	999.90	44.90	3.34	48.24	54.00	-5.76	QP	100	82

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT20 mode at channel 36,44,48 are almost the same below 1GHz, so that the channel 36 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 36	Humidity	: 70 %
Modulation Type	: 802.11a HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1 3TX		

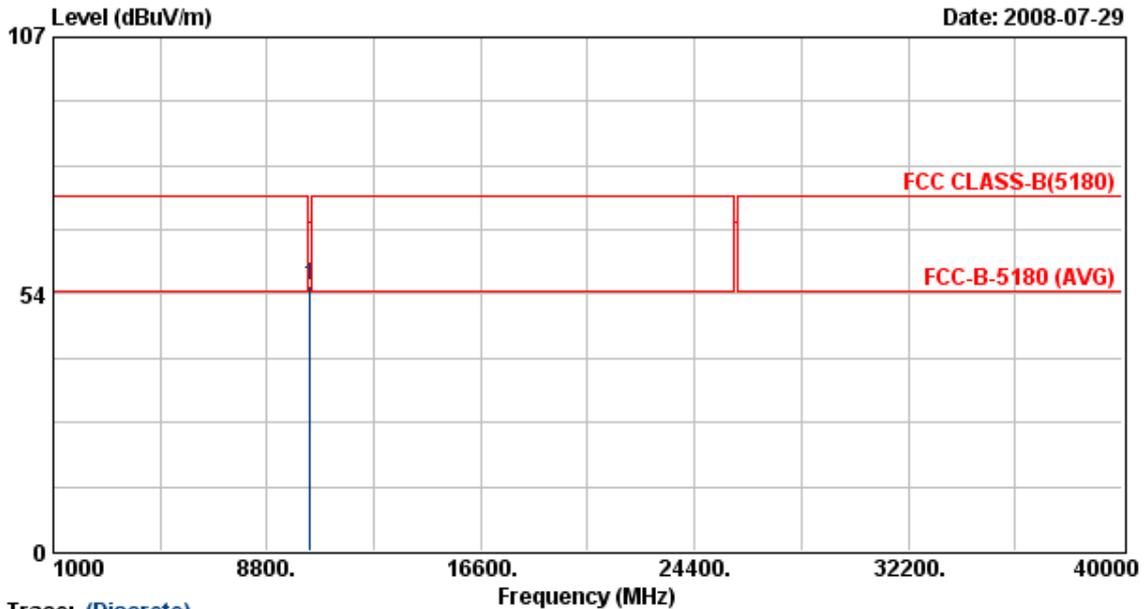


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10359.75	42.29	12.78	55.06	68.30	-13.24	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 36	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		
	3TX		

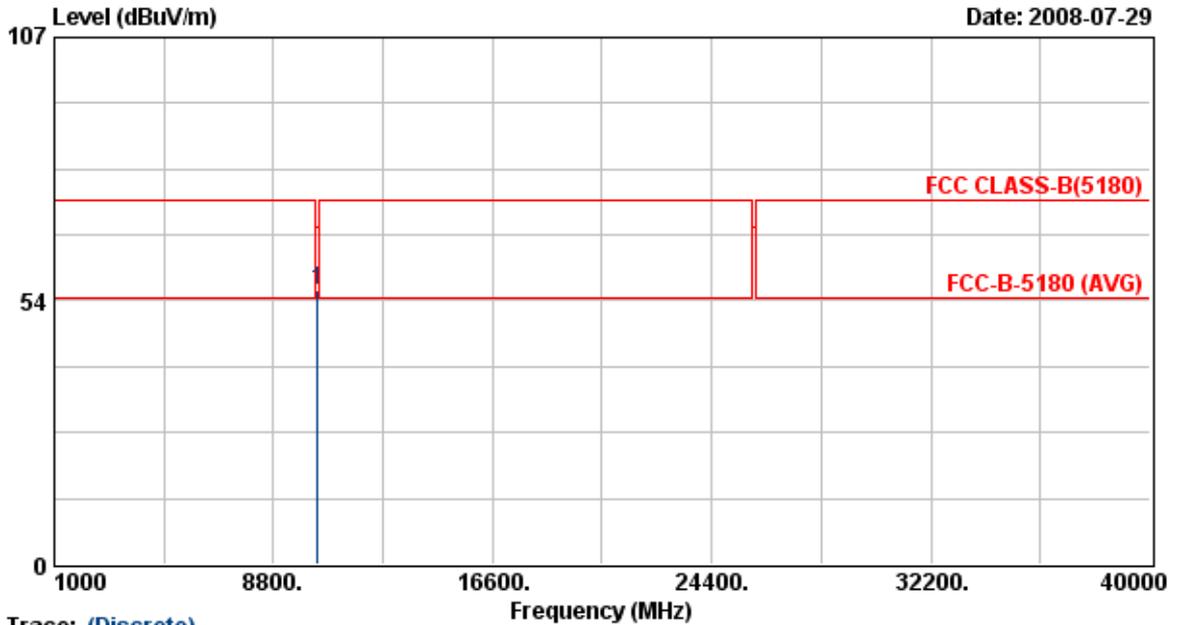


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10360.10	42.98	12.78	55.75	68.30	-12.55	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 44	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		
	3TX		

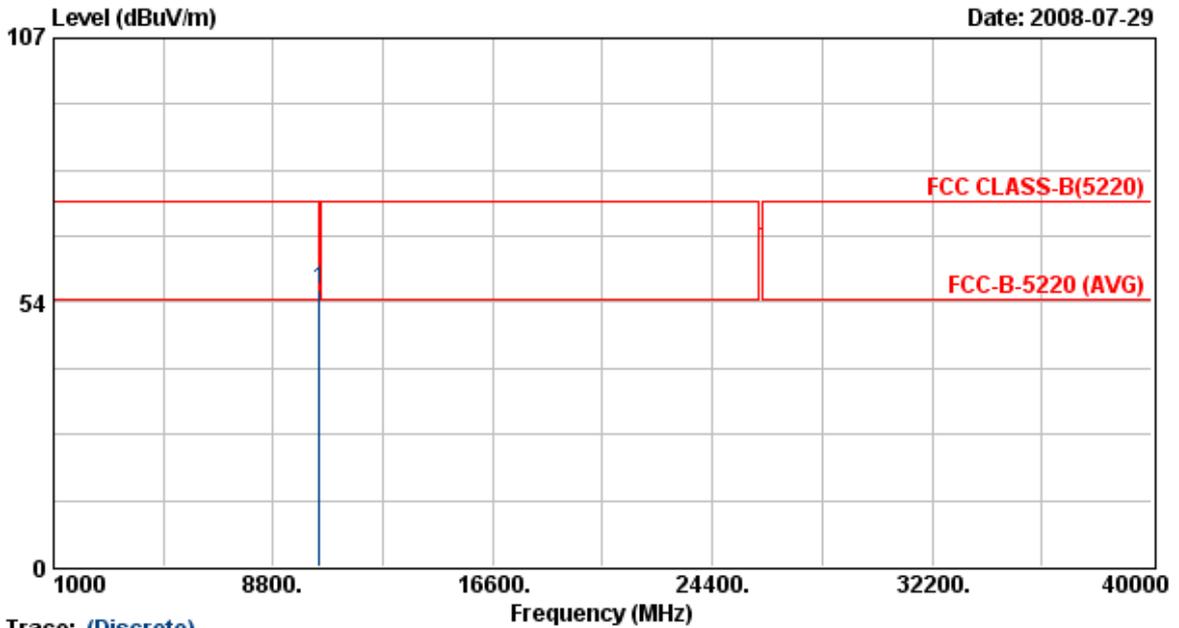


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10439.65	43.08	12.90	55.98	68.30	-12.32	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 44	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1 3TX		

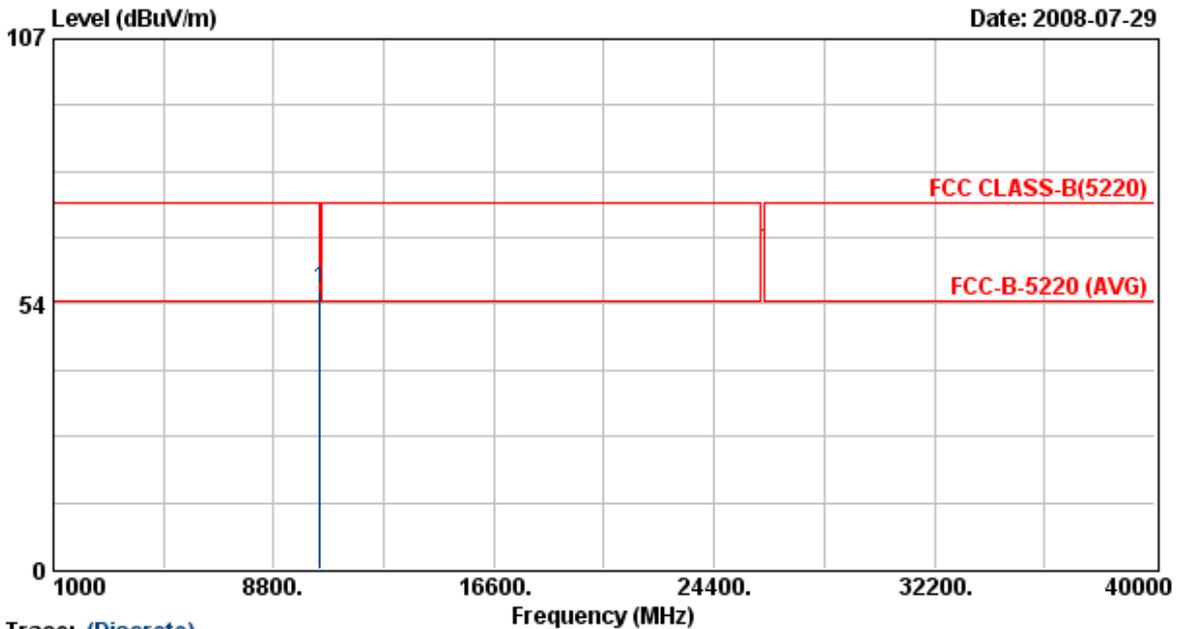


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10440.05	43.55	12.90	56.46	68.30	-11.84	Peak	100	150

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 48	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		
	3TX		

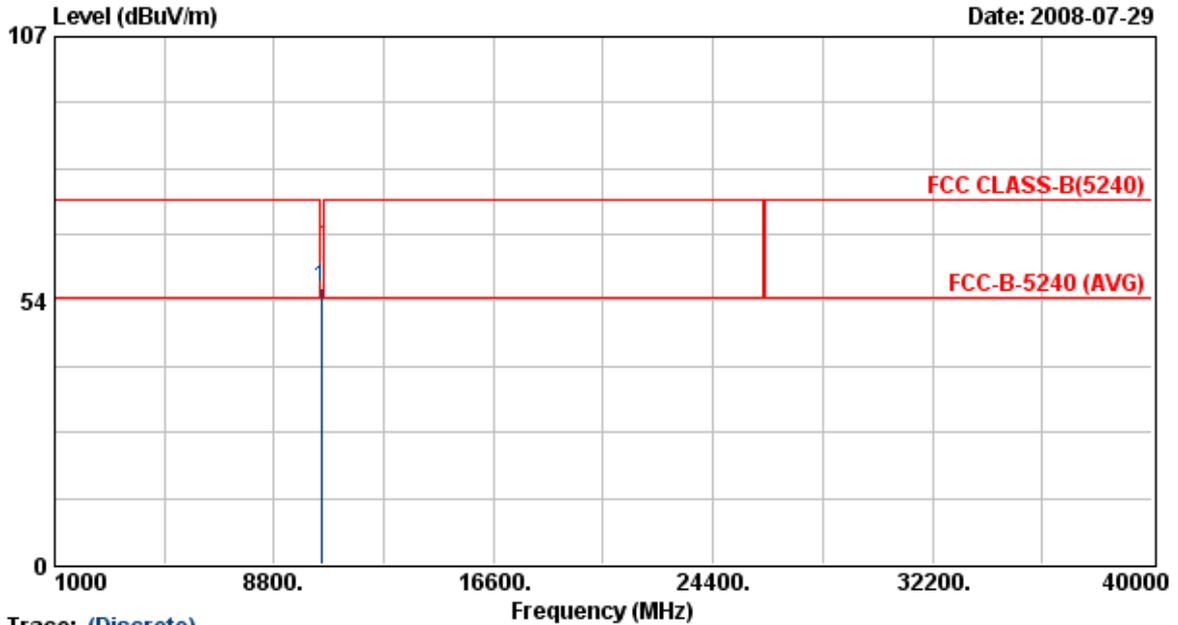


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.95	42.88	12.97	55.84	68.30	-12.46	Peak	100	257

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 27 °C
Operation Channel	: 48	Humidity	: 70 %
Modulation Type	: 802.11an HT20	Atmospheric Pressure	: 1000 hPa
Rate	: 130 Mbps		
Memo	: MU18-2120150-A1		
	3TX		

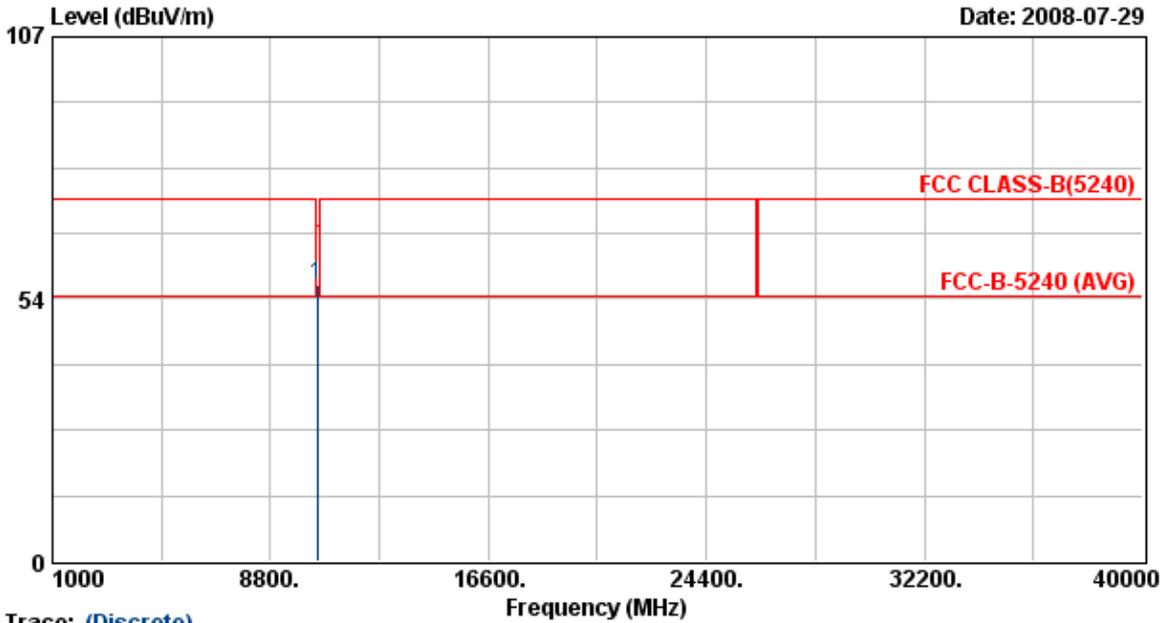

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	10479.95	43.26	12.97	56.22	68.30	-12.08	Peak	100	150


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

## Test Mode 13

Power : AC 120V  
 Test Mode : Transmit/Receive  
 Operation Channel: 38  
 Modulation Type : 802.11an HT40  
 Rate : 270 Mbps  
 Memo : MU18-2120150-A1

Pol/Phase : VERTICAL  
 Temperature : 30 °C  
 Humidity : 65 %  
 Atmospheric Pressure: 1020 hPa

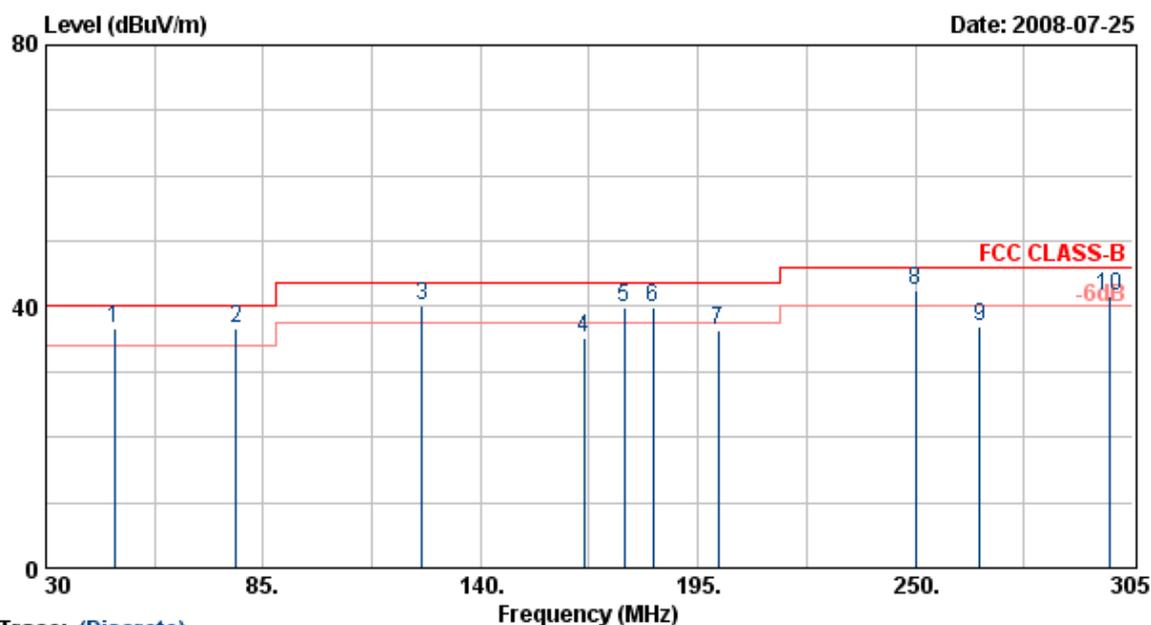


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	47.33	51.62	-14.87	36.75	40.00	-3.25	QP	100	74
2	78.13	53.28	-16.54	36.74	40.00	-3.26	QP	100	99
3	125.15	53.39	-13.34	40.05	43.50	-3.45	QP	100	77
4	166.13	48.20	-12.99	35.21	43.50	-8.29	Peak	100	77
5	176.30	49.60	-9.64	39.96	43.50	-3.54	QP	100	77
6	183.73	49.22	-9.47	39.75	43.50	-3.75	QP	100	85
7	200.23	47.98	-11.71	36.27	43.50	-7.23	Peak	100	50
8	250.00	55.57	-13.04	42.53	46.00	-3.47	QP	100	50
9	266.23	45.27	-8.37	36.90	46.00	-9.10	Peak	100	84
10	299.23	50.87	-9.25	41.62	46.00	-4.38	QP	100	84

## Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38, 42, 46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 38	Humidity	: 65 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1020 hPa
Rate	: 270 Mbps		
Memo	: MU18-2120150-A1		

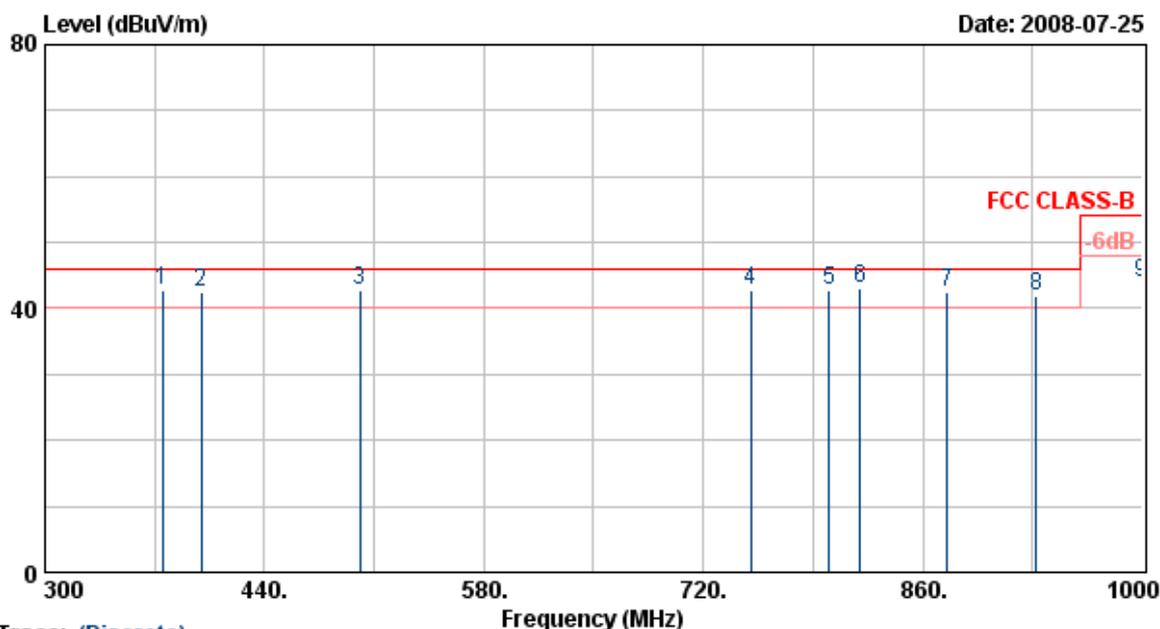


Trace: (Discrete)

Item	Freq MHz	Read Value dBUV/m	Factor dB	Result dBUV/m	Limit dBUV/m	Margin dB	Remark	Ant Pos cm	Tab Pos Deg
1	375.01	51.55	-8.84	42.71	46.00	-3.29	QP	100	95
2	399.40	50.95	-8.62	42.33	46.00	-3.67	QP	100	85
3	500.90	47.69	-4.89	42.80	46.00	-3.20	QP	100	85
4	750.10	41.49	1.26	42.75	46.00	-3.25	QP	100	85
5	800.50	45.62	-2.80	42.82	46.00	-3.18	QP	100	99
6	820.10	45.66	-2.67	42.99	46.00	-3.01	QP	100	48
7	875.40	40.80	1.75	42.55	46.00	-3.45	QP	100	48
8	932.10	42.88	-1.12	41.76	46.00	-4.24	QP	100	48
9	999.90	42.55	1.49	44.04	54.00	-9.96	Peak	100	48

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
5. The data is worse case.

Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit/Receive	Temperature	: 30 °C
Operation Channel	: 38	Humidity	: 65 %
Modulation Type	: 802.11an HT40	Atmospheric Pressure	: 1020 hPa
Rate	: 270 Mbps		
Memo	: MU18-2120150-A1		

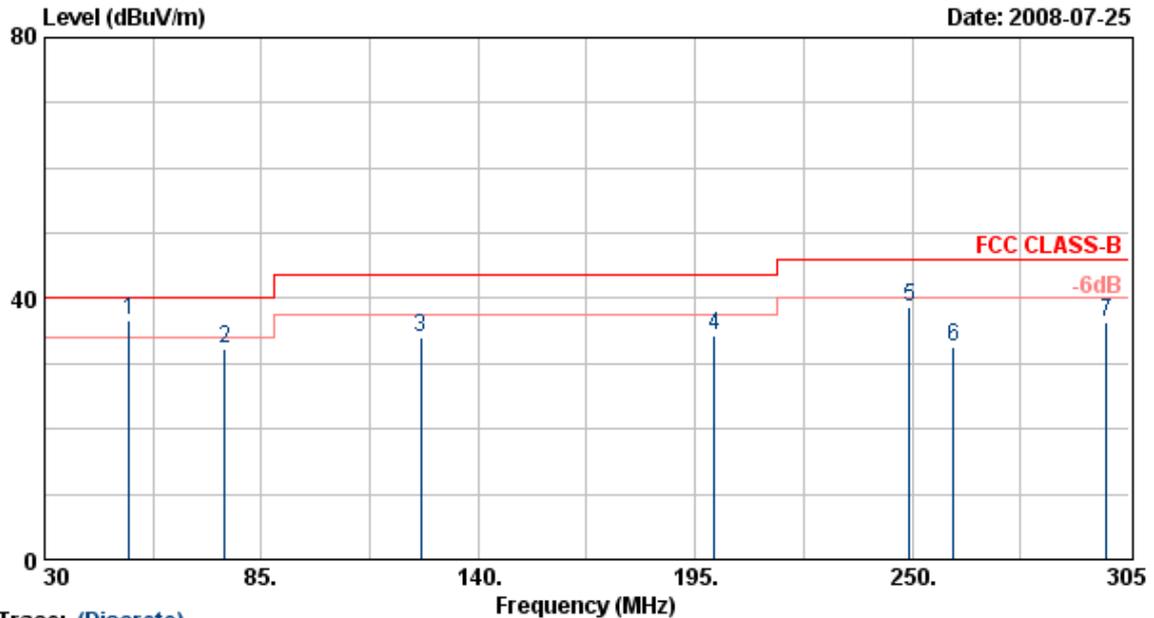

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	51.45	57.88	-21.31	36.57	40.00	-3.43	QP	100	99
2	75.65	54.29	-21.94	32.35	40.00	-7.65	Peak	100	188
3	125.43	53.65	-19.57	34.08	43.50	-9.42	Peak	100	188
4	199.95	48.80	-14.51	34.29	43.50	-9.21	Peak	100	95
5	249.45	56.58	-17.75	38.83	46.00	-7.17	Peak	100	95
6	260.45	47.58	-15.01	32.57	46.00	-13.43	Peak	100	95
7	299.23	50.70	-14.39	36.31	46.00	-9.69	Peak	100	95

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11an HT40 mode at channel 38,42,46 are almost the same below 1GHz, so that the channel 38 was chosen as representative in final test.
5. The data is worse case.