



# FCC TEST REPORT (15.407)

**REPORT NO.:** RF980618L05-1

**MODEL NO.:** WNDR3700

**RECEIVED:** Jun. 18, 2009

**TESTED:** Jul. 16 ~ Jul. 28, 2009

**ISSUED:** Jul. 30, 2009

**APPLICANT:** NETGEAR, INC.

**ADDRESS:** 350 East Plumeria Drive San Jose, CA 95134

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou  
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan,  
R.O.C.

This test report consists of 112 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





## TABLE OF CONTENTS

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS .....	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3.	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT .....	6
3.2	DESCRIPTION OF TEST MODES .....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	11
3.4	DESCRIPTION OF SUPPORT UNITS .....	11
4.	TEST TYPES AND RESULTS .....	12
4.1	RADIATED EMISSION MEASUREMENT .....	12
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	12
4.1.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	12
4.1.3	TEST INSTRUMENTS.....	13
4.1.4	TEST PROCEDURES .....	15
4.1.5	DEVIATION FROM TEST STANDARD.....	15
4.1.6	TEST SETUP.....	16
4.1.7	EUT OPERATING CONDITION.....	16
4.1.8	TEST RESULTS .....	17
4.2	CONDUCTED EMISSION MEASUREMENT .....	27
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	27
4.2.2	TEST INSTRUMENTS.....	27
4.2.3	TEST PROCEDURES .....	28
4.2.4	DEVIATION FROM TEST STANDARD.....	28
4.2.5	TEST SETUP.....	29
4.2.6	EUT OPERATING CONDITIONS .....	29
4.2.7	TEST RESULTS .....	30
4.3	PEAK TRANSMIT POWER MEASUREMENT .....	34
4.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT .....	34
4.3.2	TEST INSTRUMENTS.....	34
4.3.3	TEST PROCEDURE.....	34
4.3.4	DEVIATION FROM TEST STANDARD.....	35
4.3.5	TEST SETUP.....	35
4.3.6	EUT OPERATING CONDITIONS .....	35
4.3.7	TEST RESULTS .....	36
4.4	PEAK POWER EXCURSION MEASUREMENT .....	58
4.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT.....	58
4.4.2	TEST INSTRUMENTS.....	58
4.4.3	TEST PROCEDURE.....	58
4.4.4	DEVIATION FROM TEST STANDARD.....	59
4.4.5	TEST SETUP.....	59
4.4.6	EUT OPERATING CONDITIONS .....	59
4.4.7	TEST RESULTS .....	60
4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	79
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	79
4.5.2	TEST INSTRUMENTS.....	79
4.5.3	TEST PROCEDURES .....	79



4.5.4	DEVIATION FROM TEST STANDARD.....	80
4.5.5	TEST SETUP.....	80
4.5.6	EUT OPERATING CONDITIONS.....	80
4.5.7	TEST RESULTS.....	81
4.6	FREQUENCY STABILITY.....	92
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	92
4.6.2	TEST INSTRUMENTS.....	92
4.6.3	TEST PROCEDURE.....	92
4.6.4	DEVIATION FROM TEST STANDARD.....	93
4.6.5	TEST SETUP.....	93
4.6.6	EUT OPERATING CONDITION.....	93
4.6.7	TEST RESULTS.....	94
4.7	BAND EDGES MEASUREMENT.....	95
4.7.1	TEST INSTRUMENTS.....	95
4.7.2	TEST PROCEDURE.....	96
4.7.3	EUT OPERATING CONDITION.....	96
4.7.4	TEST RESULTS.....	97
4.8	ANTENNA REQUIREMENT.....	109
4.8.1	STANDARD APPLICABLE.....	109
4.8.2	ANTENNA CONNECTED CONSTRUCTION.....	109
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	110
6.	INFORMATION ON THE TESTING LABORATORIES.....	111
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	112



# 1. CERTIFICATION

**PRODUCT:** RangeMax Dual Band Wireless-N Gigabit Router

**MODEL:** WNDR3700

**BRAND:** NETGEAR

**APPLICANT:** NETGEAR, INC.

**TEST SAMPLE:** ENGINEERING SAMPLE

**TESTED:** Jul. 16 ~ Jul. 28, 2009

**STANDARDS:** FCC Part 15, Subpart E (Section 15.407)

ANSI C63.4-2003

The above equipment (Model: WNDR3700) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** : Andrea Hsia , **DATE** : Jul. 30, 2009  
Andrea Hsia / Specialist

**TECHNICAL ACCEPTANCE** : Long Chen , **DATE** : Jul. 30, 2009  
Responsible for RF Long Chen / Senior Engineer

**APPROVED BY** : Gary Chang , **DATE** : Jul. 30, 2009  
Gary Chang / Assistant Manager

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.02dB at 0.150MHz.
15.407(b/1/2/3)(b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -1.05dB at 5150.00MHz.
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44dB
Radiated emissions (10m)	30MHz ~ 200MHz	3.69dB
	200MHz ~1000MHz	3.84dB
Radiated emissions (3m)	1GHz ~ 18GHz	2.26dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	RangeMax Dual Band Wireless-N Gigabit Router
<b>MODEL NO.</b>	WNDR3700
<b>FCC ID</b>	PY308300092
<b>POWER SUPPLY</b>	12Vdc from AC adapter
<b>MODULATION TYPE</b>	64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	OFDM
<b>TRANSFER RATE</b>	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n: up to 300.0Mbps
<b>OPERATING FREQUENCY</b>	5180.0 ~ 5240.0MHz
<b>NUMBER OF CHANNEL</b>	4 for 802.11a, draft 802.11n (20MHz) 2 for draft 802.11n (40MHz)
<b>OUTPUT POWER</b>	49.264mW
<b>ANTENNA TYPE</b>	Refer to Note as below
<b>I/O PORTS</b>	1.5m shielded RJ45 cable without core
<b>DATA CABLE</b>	USB, RJ45
<b>ACCESSORY DEVICES</b>	Adapter

**NOTE:**

- The EUT is a RangeMax Dual Band Wireless-N Gigabit Router. The functions of EUT listed as below:

	TEST STANDARD	REFERENCE REPORT
<b>WLAN 802.11b/g, draft 802.11n</b>	FCC Part 15, Subpart C (Section 15.247)	RF980618L05
<b>WLAN 802.11a, draft 802.11n (5745~5825 MHz)</b>		
<b>WLAN 802.11a, draft 802.11n (5180~ 5240MHz)</b>	FCC Part 15, Subpart E (Section 15.407)	RF980618L05-1

- The frequency bands used in this EUT are listed as follows:

Frequency Band (MHz)	2412~2462	5180~5240	5745~5825
<b>802.11b</b>	√		
<b>802.11g</b>	√		
<b>802.11a</b>		√	√
<b>Draft 802.11n (20MHz)</b>	√	√	√
<b>Draft 802.11n (40MHz)</b>	√	√	√

- The EUT were powered by the following adapter:

ADAPTER 1	
<b>BRAND:</b>	NETGEAR
<b>MODEL:</b>	P030WF120B
<b>P/N:</b>	332-10100-01
<b>INPUT:</b>	100-240Vac, 1.0A, 50/60Hz
<b>OUTPUT:</b>	12Vdc, 2.5A
<b>POWER LINE:</b>	DC 1.8m non-shielded cable without core

ADAPTER 2	
<b>BRAND:</b>	NETGEAR
<b>MODEL:</b>	MU30-5120250-A1
<b>P/N:</b>	332-10100-01
<b>INPUT:</b>	100-240Vac, 0.8A, 50/60Hz
<b>OUTPUT:</b>	12Vdc, 2.5A
<b>POWER LINE:</b>	DC 1.8m non-shielded cable without core

4. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11a	2TX
Draft 802.11n (20MHz)	2TX
Draft 802.11n (40MHz)	2TX

5. The following antennas are used in this EUT.

Antenna Item	Type	Gain (dBi)
<b>2.4GHz</b>		
1	Printed	2.8
2	Printed	1.5
3	Printed	1.2
4	Printed	2.2
<b>5.0GHz</b>		
5	Printed	3.7
6	Printed	3.8
7	Printed	3.8
8	Printed	3.9

Antenna pair for transmission is defined by client

<b>2.4GHz</b>		
Antenna Pair	Antenna item	Antenna item
1	4	2
2	4	1
3	3	2
4	3	1
<b>5.0GHz</b>		
Antenna Pair	Antenna item	Antenna item
5	6	5
6	6	7
7	8	5
8	8	7

\*\*After pretesting of radiated power and emission, Antenna pair 2 is worst case of 2.4GHz and Antenna pair 8 is worst case of 5GHz.

6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 DESCRIPTION OF TEST MODES


4 channels are provided for 802.11a, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz

2 channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190MHz	46	5230MHz

#### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

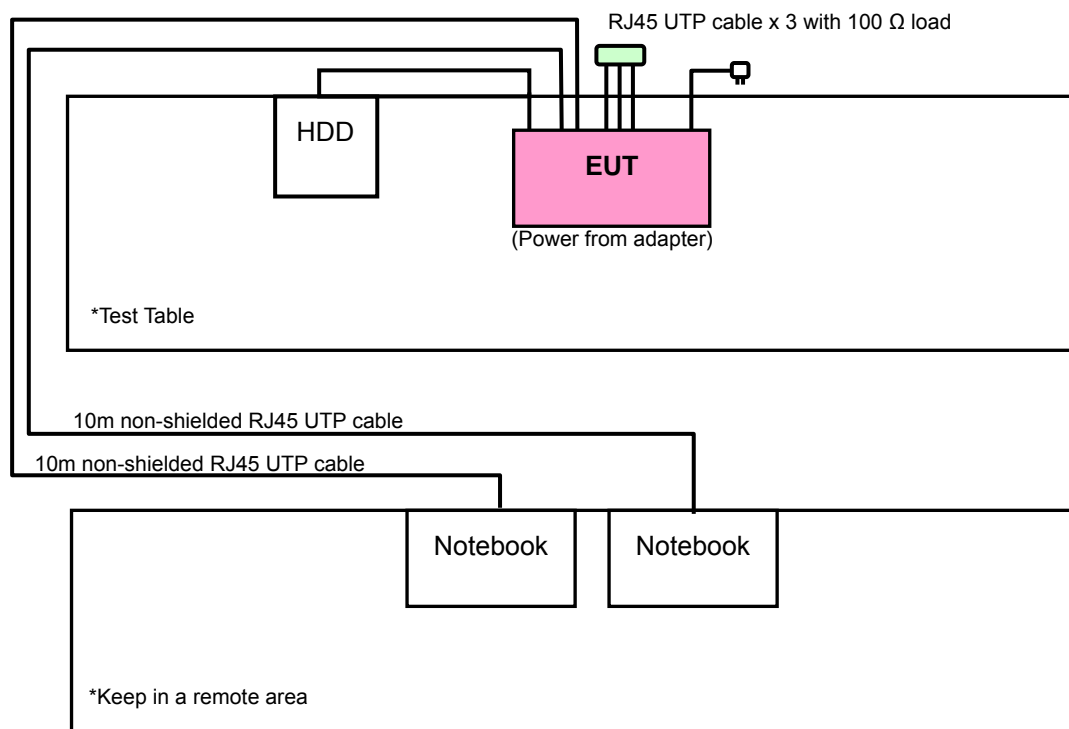



### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	-	√	√	-	Power from AC Adapter 1
B	√	√	√	√	Power from AC Adapter 2

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement  
**NOTE**: "-" means no effect.

#### RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
B	802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6.0	Z
B	Draft 802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	7.2	Z
B	Draft 802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	15.0	Z

#### RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	Draft 802.11n (20MHz)	36 to 48	36	OFDM	BPSK	7.2	Z
B	Draft 802.11n (20MHz)	36 to 48	36	OFDM	BPSK	7.2	Z

#### POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	Draft 802.11n (20MHz)	36 to 48	36	OFDM	BPSK	7.2
B	Draft 802.11n (20MHz)	36 to 48	36	OFDM	BPSK	7.2



**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11a	36 to 48	36, 48	OFDM	BPSK	6.0
B	Draft 802.11n (20MHz)	36 to 48	36, 48	OFDM	BPSK	7.2
B	Draft 802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	15.0

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6.0
B	Draft 802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	7.2
B	Draft 802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	15.0

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart E (15.407)**  
**ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	EXTERNAL HARD DISK	DELL	RD1000	HK-0XM763-72953-77P-000F	NA
2	NOTEBOOK	DELL	PP05L	12130898320	E2K24CLNS
3	NOTEBOOK	DELL	PP05L	25191592336	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	2 m shielded cable, terminated with USB connector, with core.
2	10m non-shielded RJ45 UTP cable
3	10m non-shielded RJ45 UTP cable

**NOTE:** 1. All power cords of the above support units are non shielded (1.8m).  
 2. Item 2 ~ 3 acted as communication partners to transfer data.

## 4. TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

FREQUENCIES (MHz)	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBµV/m) *NOTE 3
	PK	PK
5150 ~ 5250	-27	68.3

**NOTE:** The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

### 4.1.3 TEST INSTRUMENTS

#### Above 1GHz Test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 29, 2008	Dec. 28, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 08, 2008	Dec. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Apr. 30, 2009	Apr. 28, 2010
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-408	Dec. 29, 2008	Dec. 28, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01960	Nov. 03, 2008	Nov. 02, 2009
Preamplifier Agilent	8447D	2944A10631	Nov. 03, 2008	Nov. 02, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274041/4	Aug. 21, 2008	Aug. 20, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	283397/4	Aug. 21, 2008	Aug. 20, 2009
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table ADT.	TT100.	TT93021704	NA	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	07026401	Aug. 27, 2008	Aug. 26, 2009

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 4.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 988962.
  5. The IC Site Registration No. is IC7450F-4.

**Below 1GHz Test:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100186	Dec. 05, 2008	Dec. 04, 2009
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	Sep. 22, 2008	Sep. 21, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100025	Oct. 22, 2008	Oct. 21, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-148	Apr. 28, 2009	Apr. 27, 2010
BILOG Antenna SCHWARZBECK	VULB9168	9168-149	Apr. 28, 2009	Apr. 27, 2010
Preamplifier Agilent	8447D	2944A10637	Dec. 04, 2008	Dec. 03, 2009
Preamplifier Agilent	8447D	2944A10636	Dec. 04, 2008	Dec. 03, 2009
RF signal cable Woken	8D-FB	Cable-Hych1-01	Oct. 28, 2008	Oct. 27, 2009
RF signal cable Woken	8D-FB	Cable-Hych1-02	Oct. 28, 2008	Oct. 27, 2009
Software ADT	ADT_Radiated_ V 7.7.03.6	NA	NA	NA
Antenna Tower(V)	MFA-440	9707	NA	NA
Antenna Tower(H)	MFA-440	970705	NA	NA
Turn Table	DS430	50303	NA	NA
Controller	MF7802	074	NA	NA
Controller	MF7802	08093	NA	NA
RF signal cable EAST COST Microwave	HP 160S-29	NA	Feb. 17, 2009	Feb. 16, 2010

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 1.
  3. The FCC Site Registration No. is 477732.
  4. The IC Site Registration No. is IC 7450F-1.
  5. The VCCI Site Registration No. is R-1893.

#### 4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 & 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.6 TEST SETUP

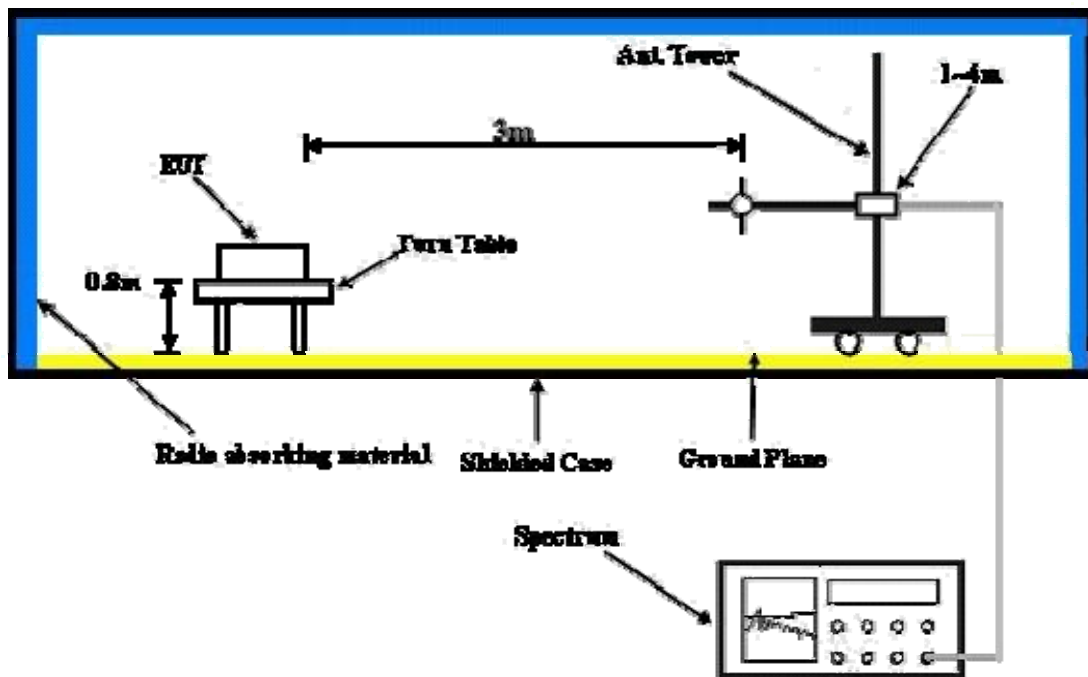

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.7 EUT OPERATING CONDITION

- a. Placed the EUT on the testing table.
- b. Prepared notebook system outside of testing area to act as a communication partners.
- c. The communication partner connected with EUT via a RJ45 UTP cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".



#### 4.1.8 TEST RESULTS

##### 802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1000 hPa	TEST MODE	B
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1133.00	43.07 PK	74.00	-30.93	1.52 H	318	14.75	28.33
2	1133.00	35.09 AV	54.00	-18.91	1.52 H	318	6.77	28.33
3	5150.00	60.08 PK	74.00	-13.92	1.04 H	333	20.94	39.14
4	5150.00	41.76 AV	54.00	-12.24	1.04 H	333	2.62	39.14
5	*5180.00	107.11 PK			1.04 H	335	67.93	39.18
6	*5180.00	97.05 AV			1.04 H	335	57.87	39.18
7	#10360.00	60.84 PK	68.30	-7.46	1.27 H	98	11.23	49.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1133.00	50.32 PK	74.00	-23.68	1.42 V	262	22.00	28.33
2	1133.00	43.78 AV	54.00	-10.22	1.42 V	262	15.46	28.33
3	5150.00	63.49 PK	74.00	-10.51	1.04 V	196	24.35	39.14
4	5150.00	45.13 AV	54.00	-8.87	1.04 V	196	5.99	39.14
5	*5180.00	110.85 PK			1.04 V	189	71.67	39.18
6	*5180.00	100.65 AV			1.04 V	189	61.47	39.18
7	#10360.00	62.50 PK	68.30	-5.80	1.00 V	47	12.89	49.61

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1000 hPa	TEST MODE	B
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1133.00	43.01 PK	74.00	-30.99	1.50 H	322	14.68	28.33
2	1133.00	35.03 AV	54.00	-18.97	1.50 H	322	6.70	28.33
3	*5200.00	107.10 PK			1.03 H	30	67.90	39.20
4	*5200.00	97.09 AV			1.03 H	30	57.89	39.20
5	#10400.00	60.12 PK	68.30	-8.18	1.31 H	103	10.41	49.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1133.00	50.36 PK	74.00	-23.64	1.45 V	265	22.03	28.33
2	1133.00	43.83 AV	54.00	-10.17	1.45 V	265	15.50	28.33
3	*5200.00	110.71 PK			1.02 V	192	71.51	39.20
4	*5200.00	100.37 AV			1.02 V	192	61.17	39.20
5	#10400.00	62.39 PK	68.30	-5.91	1.16 V	69	12.68	49.71

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1000 hPa	TEST MODE	B
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1133.00	43.06 PK	74.00	-30.94	1.54 H	332	14.74	28.33
2	1133.00	35.01 AV	54.00	-18.99	1.54 H	332	6.69	28.33
3	*5240.00	107.39 PK			1.51 H	69	68.14	39.25
4	*5240.00	97.49 AV			1.51 H	69	58.24	39.25
5	5350.00	54.03 PK	74.00	-19.97	1.49 H	66	14.63	39.40
6	5350.00	41.05 AV	54.00	-12.95	1.49 H	66	1.65	39.40
7	#10480.00	61.34 PK	68.30	-6.96	1.51 H	152	11.41	49.93
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1133.00	50.45 PK	74.00	-23.55	1.40 V	261	22.12	28.33
2	1133.00	43.83 AV	54.00	-10.17	1.40 V	261	15.50	28.33
3	*5240.00	110.77 PK			1.01 V	197	71.52	39.25
4	*5240.00	100.56 AV			1.01 V	197	61.31	39.25
5	5350.00	56.13 PK	74.00	-17.87	1.10 V	169	16.73	39.40
6	5350.00	43.28 AV	54.00	-10.72	1.10 V	169	3.88	39.40
7	#10480.00	63.06 PK	68.30	-5.24	1.22 V	59	13.13	49.93

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. “#”: The radiated frequency is out the restricted band.

### DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1000 hPa	TEST MODE	B
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1133.00	43.01 PK	74.00	-30.99	1.46 H	310	14.68	28.33
2	1133.00	35.07 AV	54.00	-18.93	1.46 H	310	6.74	28.33
3	5150.00	63.57 PK	74.00	-10.43	1.04 H	330	24.43	39.14
4	5150.00	43.29 AV	54.00	-10.71	1.04 H	330	4.15	39.14
5	*5180.00	107.78 PK			1.03 H	35	68.60	39.18
6	*5180.00	97.40 AV			1.03 H	35	58.22	39.18
7	#10360.00	61.71 PK	68.30	-6.59	1.09 H	277	12.10	49.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1133.00	50.27 PK	74.00	-23.73	1.35 V	254	21.94	28.33
2	1133.00	43.64 AV	54.00	-10.36	1.35 V	254	15.31	28.33
3	5150.00	67.05 PK	74.00	-6.95	1.04 V	189	27.91	39.14
4	5150.00	46.42 AV	54.00	-7.58	1.04 V	189	7.28	39.14
5	*5180.00	110.53 PK			1.03 V	188	71.35	39.18
6	*5180.00	100.57 AV			1.03 V	188	61.39	39.18
7	#10360.00	63.54 PK	68.30	-4.76	1.03 V	105	13.93	49.61

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. “#“: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1000 hPa	TEST MODE	B
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	107.25 PK			1.03 H	337	68.05	39.20
2	*5200.00	97.98 AV			1.03 H	337	58.78	39.20
3	#10400.00	61.38 PK	68.30	-6.92	1.12 H	3	11.67	49.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	110.92 PK			1.14 V	188	71.72	39.20
2	*5200.00	100.13 AV			1.14 V	188	60.93	39.20
3	#10400.00	62.46 PK	68.30	-5.84	1.20 V	98	12.75	49.71

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1000 hPa	TEST MODE	B
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	103.03 PK			1.03 H	336	63.78	39.25
2	*5240.00	97.21 AV			1.03 H	336	57.96	39.25
3	5350.00	55.43 PK	74.00	-18.57	1.03 H	336	16.03	39.40
4	5350.00	42.39 AV	54.00	-11.61	1.03 H	336	2.99	39.40
5	#10480.00	62.38 PK	68.30	-5.92	1.04 H	86	12.45	49.93
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	110.34 PK			1.13 V	186	71.09	39.25
2	*5240.00	100.21 AV			1.13 V	186	60.96	39.25
3	5350.00	55.74 PK	74.00	-18.26	1.12 V	186	16.34	39.40
4	5350.00	42.65 AV	54.00	-11.35	1.12 V	186	3.25	39.40
5	#10480.00	63.11 PK	68.30	-5.19	1.02 V	78	13.18	49.93

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. “#”:The radiated frequency is out the restricted band.



**DRAFT 802.11n (40MHz) OFDM MODULATION**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1000 hPa	TEST MODE	B
TESTED BY	Kevin Liang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.67 PK	74.00	-3.33	1.02 H	339	31.53	39.14
2	5150.00	46.67 AV	54.00	-7.33	1.02 H	339	7.53	39.14
3	*5190.00	105.79 PK			1.02 H	339	66.60	39.19
4	*5190.00	93.40 AV			1.02 H	339	54.21	39.19
5	#10380.00	59.07 PK	68.30	-9.23	1.14 H	23	9.41	49.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.95 PK	74.00	-1.05	1.13 V	186	33.81	39.14
2	5150.00	49.66 AV	54.00	-4.34	1.13 V	186	10.52	39.14
3	*5190.00	109.83 PK			1.13 V	186	70.64	39.19
4	*5190.00	95.49 AV			1.13 V	186	56.30	39.19
5	#10380.00	60.59 PK	68.30	-7.71	1.00 V	138	10.93	49.66

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. “#”: The radiated frequency is out the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1000 hPa	TEST MODE	B
TESTED BY	Kevin Liang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	105.22 PK			1.02 H	332	65.98	39.24
2	*5230.00	93.09 AV			1.02 H	332	53.85	39.24
3	5350.00	55.38 PK	74.00	-18.62	1.02 H	302	15.98	39.40
4	5350.00	42.26 AV	54.00	-11.74	1.02 H	302	2.86	39.40
5	#10460.00	59.92 PK	68.30	-8.38	1.18 H	165	10.05	49.87
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	109.26 PK			1.12 V	185	70.02	39.24
2	*5230.00	95.23 AV			1.12 V	185	55.99	39.24
3	5350.00	56.98 PK	74.00	-17.02	1.12 V	185	17.58	39.40
4	5350.00	43.19 AV	54.00	-10.81	1.12 V	185	3.79	39.40
5	#10460.00	60.91 PK	68.30	-7.39	1.04 V	117	11.04	49.87

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.
  6. “#”:The radiated frequency is out the restricted band.





A D T

**BELOW 1GHz WORST-CASE DATA : DRAFT 802.11n (20MHz) OFDM MODULATION**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH 1000 hPa	TEST MODE	A
TESTED BY	Peter Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.98	42.15 QP	46.00	-3.85	1.00 H	324	29.17	12.98
2	374.97	42.24 QP	46.00	-3.76	1.00 H	218	25.46	16.78
3	500.01	42.33 QP	46.00	-3.67	1.00 H	111	22.72	19.61
4	624.78	42.01 QP	46.00	-3.99	1.00 H	107	19.64	22.37
5	750.03	41.90 QP	46.00	-4.10	1.00 H	270	17.64	24.26
6	875.48	41.54 QP	46.00	-4.46	1.00 H	118	15.50	26.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	61.10	34.00 QP	40.00	-6.00	1.00 V	45	21.28	12.72
2	374.47	41.05 QP	46.00	-4.95	1.00 V	214	24.29	16.76
3	466.67	41.55 QP	46.00	-4.45	1.00 V	114	22.72	18.83
4	500.33	41.77 QP	46.00	-4.23	1.00 V	161	22.15	19.62
5	533.31	42.14 QP	46.00	-3.86	1.00 V	175	21.70	20.44
6	600.00	42.11 QP	46.00	-3.89	1.00 V	17	20.05	22.06
7	666.67	42.75 QP	46.00	-3.25	1.50 V	213	19.83	22.92

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH 1000 hPa	TEST MODE	B
TESTED BY	Peter Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.66	42.55 QP	46.00	-3.45	1.00 H	299	29.58	12.97
2	333.25	40.28 QP	46.00	-5.72	1.00 H	175	24.71	15.57
3	374.99	42.64 QP	46.00	-3.36	1.00 H	222	25.86	16.78
4	399.34	40.08 QP	46.00	-5.92	1.00 H	91	22.60	17.48
5	500.00	42.62 QP	46.00	-3.38	2.00 H	67	23.01	19.61
6	624.83	42.29 QP	46.00	-3.71	1.00 H	102	19.92	22.37
7	750.00	42.96 QP	46.00	-3.04	1.00 H	267	18.70	24.26
8	875.59	41.89 QP	46.00	-4.11	1.00 H	71	15.85	26.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.96	34.14 QP	40.00	-5.86	1.00 V	213	20.52	13.62
2	66.67	36.88 QP	40.00	-3.12	1.00 V	301	24.89	11.99
3	374.07	41.20 QP	46.00	-4.80	1.00 V	222	24.44	16.75
4	466.67	41.69 QP	46.00	-4.31	1.00 V	103	22.87	18.83
5	500.42	42.31 QP	46.00	-3.69	1.00 V	130	22.69	19.62
6	533.33	42.81 QP	46.00	-3.19	1.00 V	142	22.37	20.44
7	600.01	42.42 QP	46.00	-3.58	1.00 V	13	20.36	22.06
8	666.67	43.39 QP	46.00	-2.61	1.00 V	188	20.47	22.92
9	733.34	41.29 QP	46.00	-4.71	1.00 V	153	17.32	23.97

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

## 4.2 CONDUCTED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 22, 2008	Sep. 21, 2009
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 31, 2008	Dec. 30, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Dec. 29, 2008	Dec. 28, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Dec. 04, 2008	Dec. 03, 2009
Software ADT	ADT_Cond_ V7.3.7	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Shielded Room 2.
  3. The VCCI Site Registration No. is C-2047.


#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5 TEST SETUP

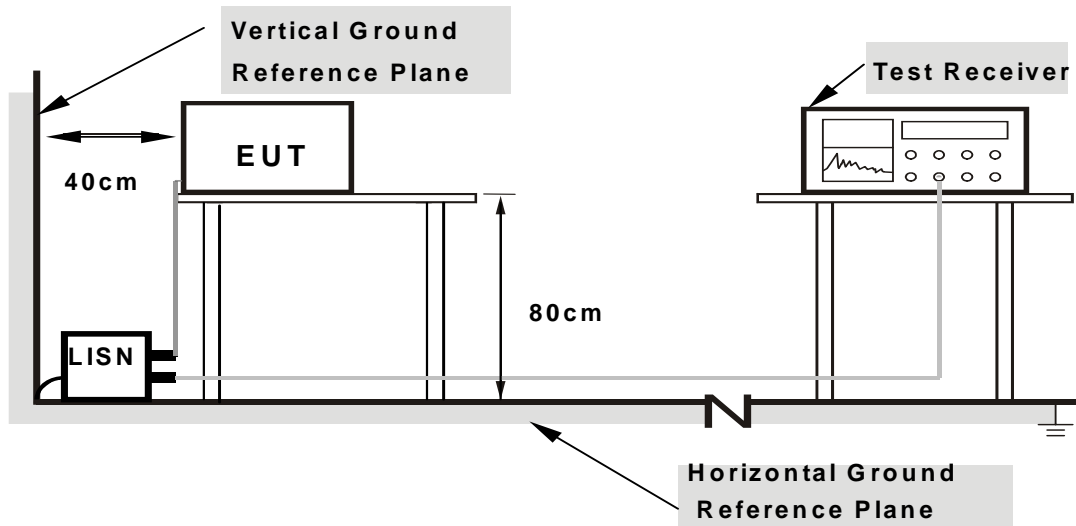

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


### 4.2.7 TEST RESULTS

#### CONDUCTED WORST-CASE DATA : DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	7.2Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1021hPa	TEST MODE	A
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	49.43	-	49.56	-	66.00	56.00	-16.44	-
2	0.369	0.14	26.02	-	26.16	-	58.53	48.53	-32.37	-
3	0.595	0.15	37.10	-	37.25	-	56.00	46.00	-18.75	-
4	2.762	0.22	26.33	-	26.55	-	56.00	46.00	-29.45	-
5	4.746	0.30	31.33	-	31.63	-	56.00	46.00	-24.37	-
6	20.516	0.67	30.91	-	31.58	-	60.00	50.00	-28.42	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

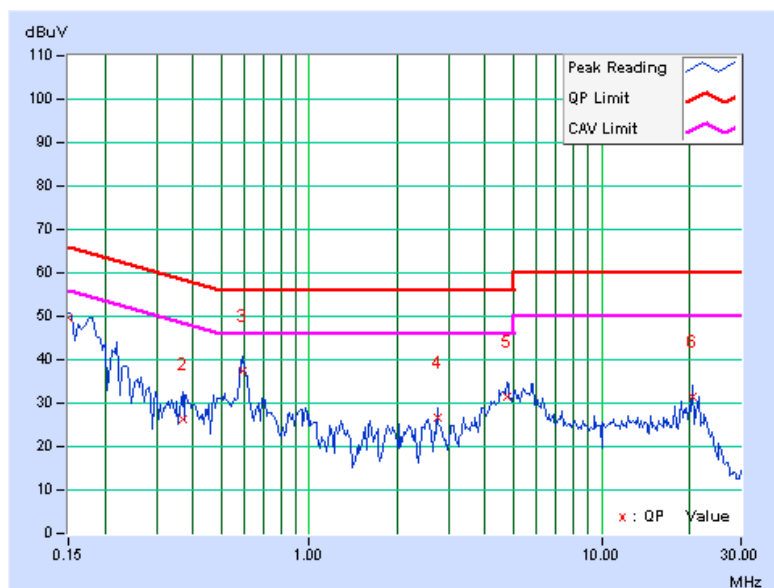




EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	7.2Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1021hPa	TEST MODE	A
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	49.97	-	50.10	-	66.00	56.00	-15.90	-
2	0.388	0.15	28.56	-	28.71	-	58.10	48.10	-29.39	-
3	0.584	0.16	35.66	-	35.82	-	56.00	46.00	-20.18	-
4	2.563	0.23	23.94	-	24.17	-	56.00	46.00	-31.83	-
5	4.789	0.33	33.82	-	34.15	-	56.00	46.00	-21.85	-
6	20.547	0.82	30.07	-	30.89	-	60.00	50.00	-29.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

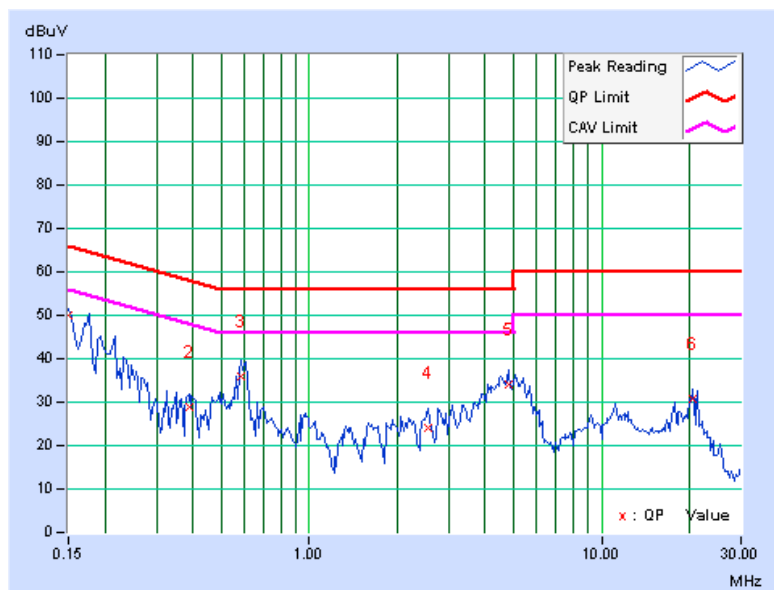

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	7.2Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1021hPa	TEST MODE	B
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	61.02	52.13	61.15	52.26	66.00	56.00	-4.85	-3.74
2	0.199	0.13	53.88	45.52	54.01	45.65	63.63	53.63	-9.62	-7.98
3	0.249	0.13	48.12	-	48.25	-	61.80	51.80	-13.54	-
4	0.603	0.15	46.68	40.08	46.83	40.23	56.00	46.00	-9.17	-5.77
5	2.238	0.20	36.14	-	36.34	-	56.00	46.00	-19.66	-
6	14.688	0.55	33.38	-	33.93	-	60.00	50.00	-26.07	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

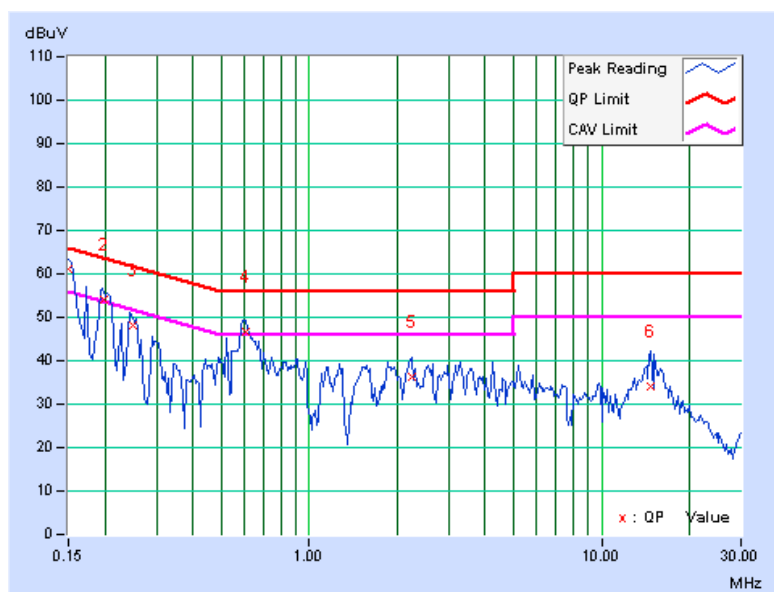




EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	7.2Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1021hPa	TEST MODE	B
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	62.63	52.85	62.76	52.98	66.00	56.00	-3.24	-3.02
2	0.201	0.13	55.35	46.01	55.48	46.14	63.59	53.59	-8.11	-7.45
3	0.252	0.14	49.79	-	49.93	-	61.71	51.71	-11.78	-
4	0.603	0.16	47.87	40.89	48.03	41.05	56.00	46.00	-7.97	-4.95
5	2.570	0.23	37.74	-	37.97	-	56.00	46.00	-18.03	-
6	14.969	0.66	30.51	-	31.17	-	60.00	50.00	-28.83	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

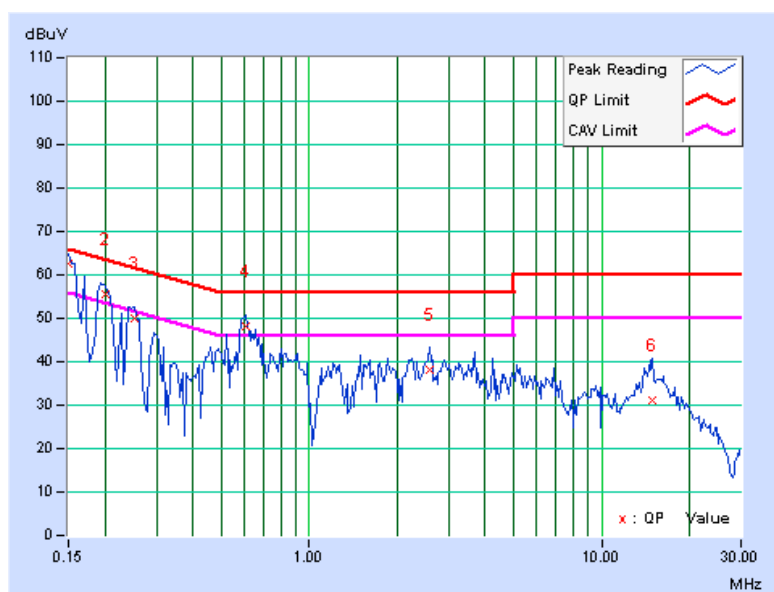



### 4.3 PEAK TRANSMIT POWER MEASUREMENT

#### 4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB

**NOTE:** Where B is the 26dB emission bandwidth in MHz.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY44360128	Dec. 12, 2008	Dec.11. 2009

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set span to encompass the entire emission bandwidth of the signal.
- c. Set RBW to 1MHz, VBW to 3MHz.
- d. Using the spectrum analyzer's channel power measurement function to measure the output power.


**NOTE:** The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP



#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

#### 4.3.7 TEST RESULTS

##### PEAK POWER OUTPUT: 802.11a OFDM MODULATION


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6.0Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	13.82	13.83	48.254	16.84	17	PASS
40	5200	13.55	14.07	48.173	16.83	17	PASS
48	5240	13.08	14.05	45.733	16.60	17	PASS




A D T

### FOR CHAIN 0: CH 36

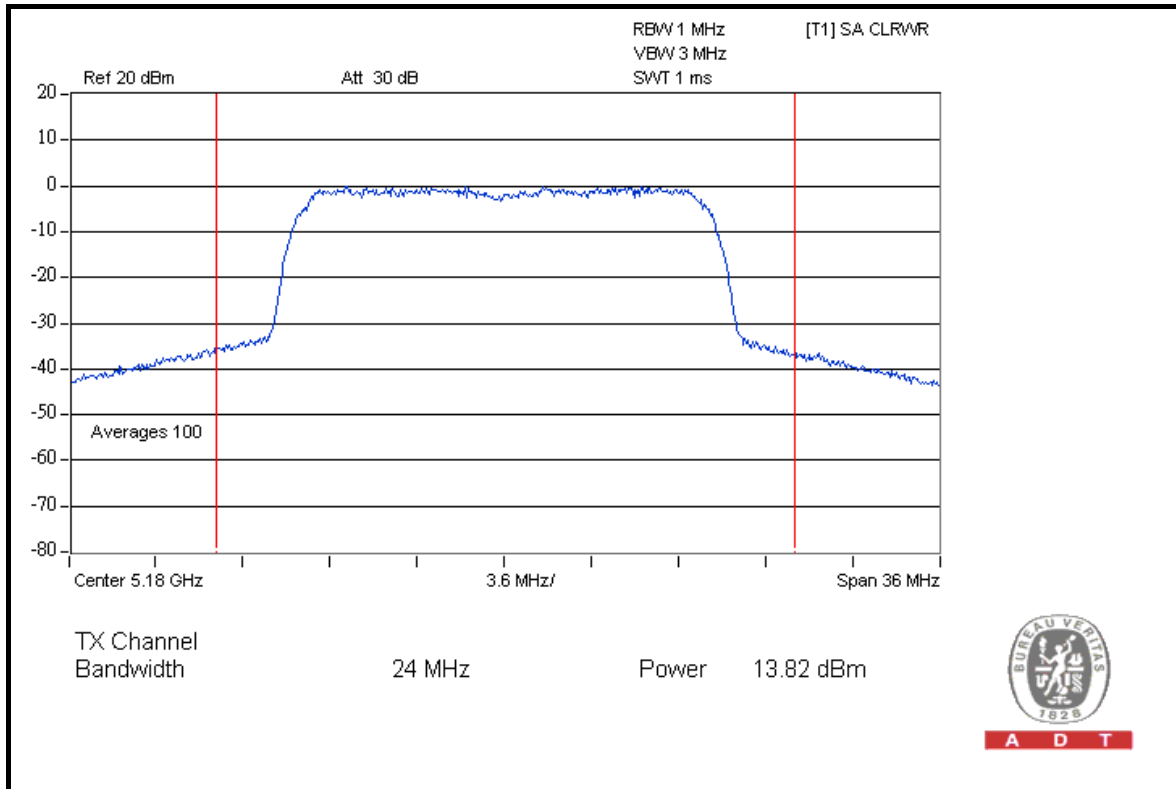


### CH 40

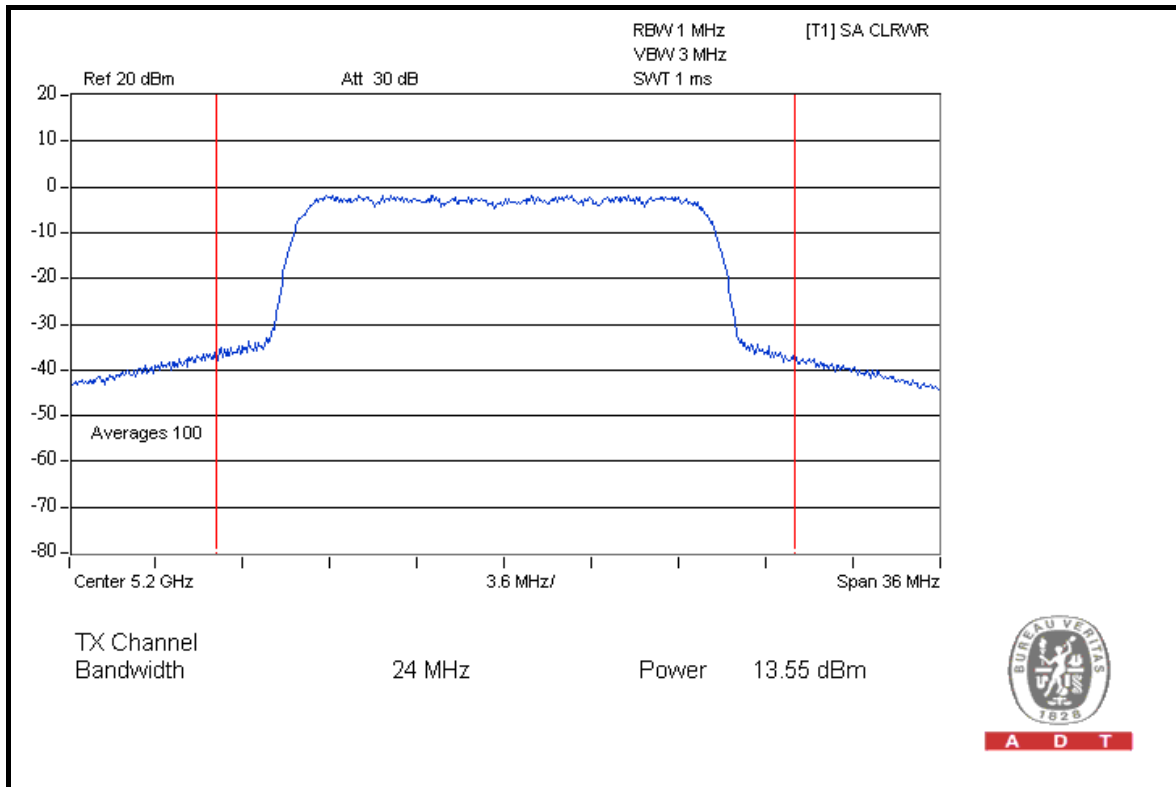




A D T

### CH 48

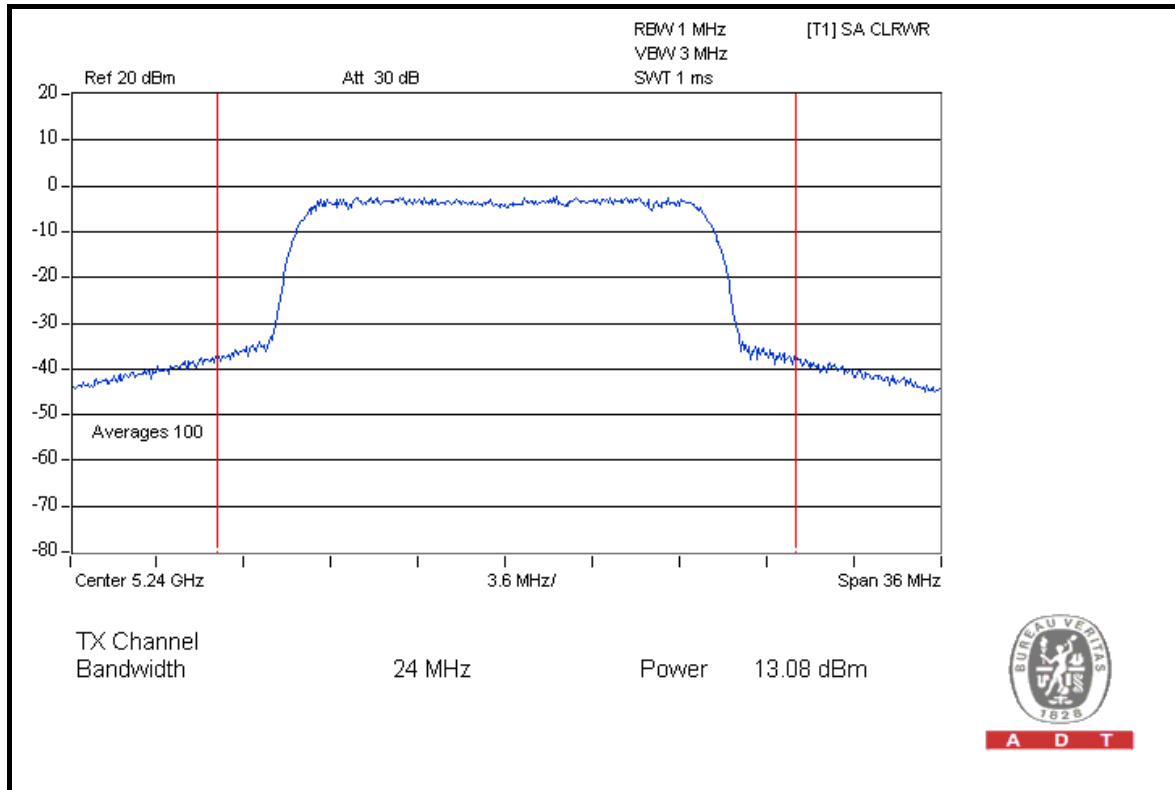


### FOR CHAIN 1: CH 36

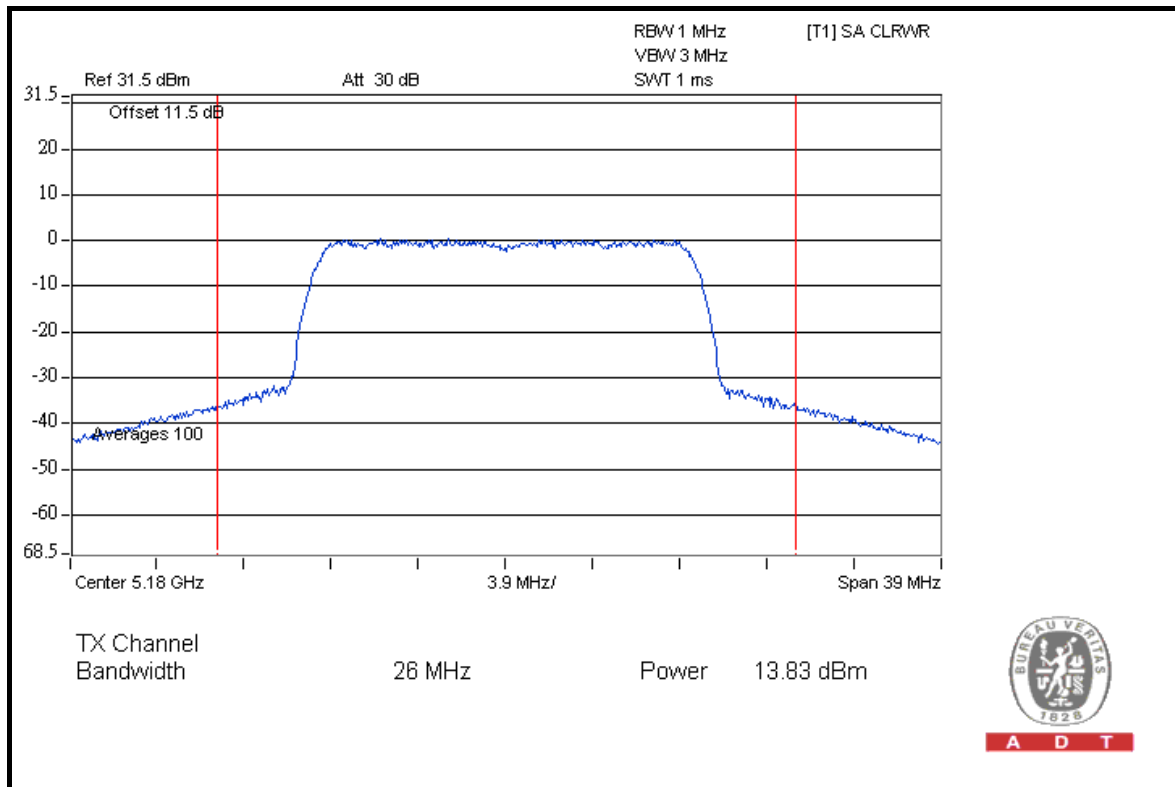




A D T

### CH 40

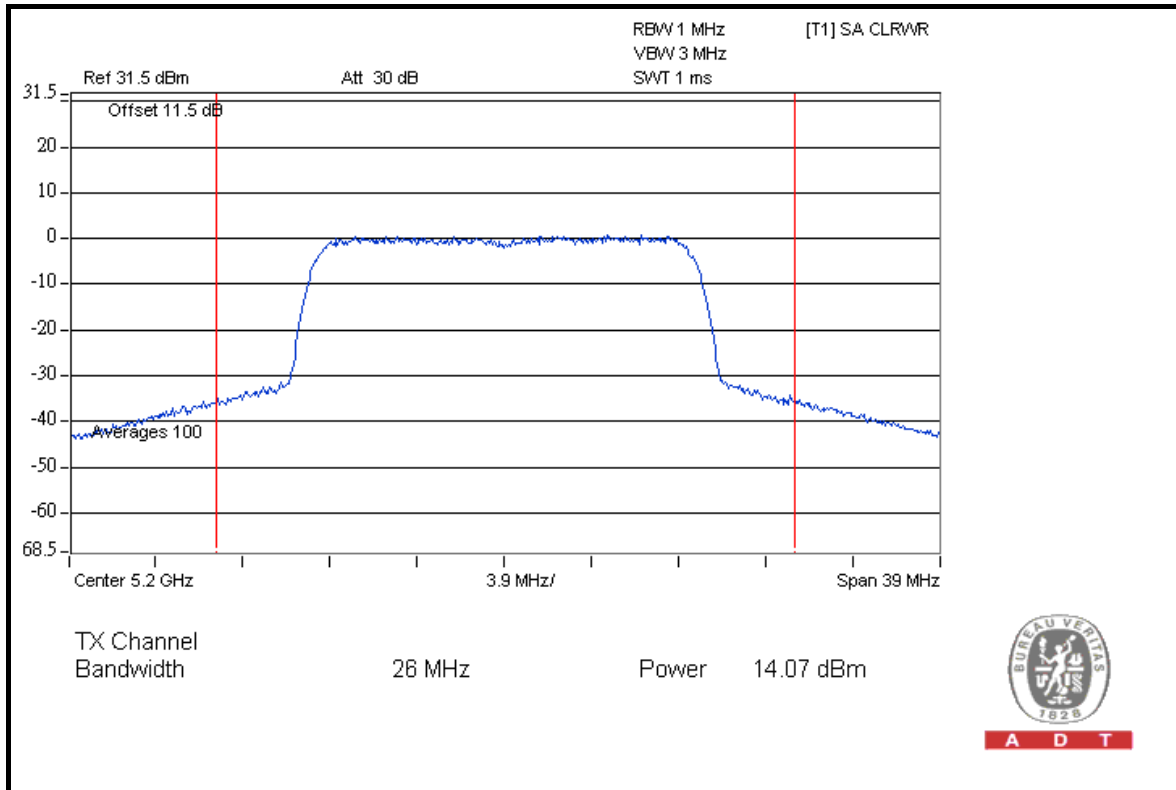

### CH 48

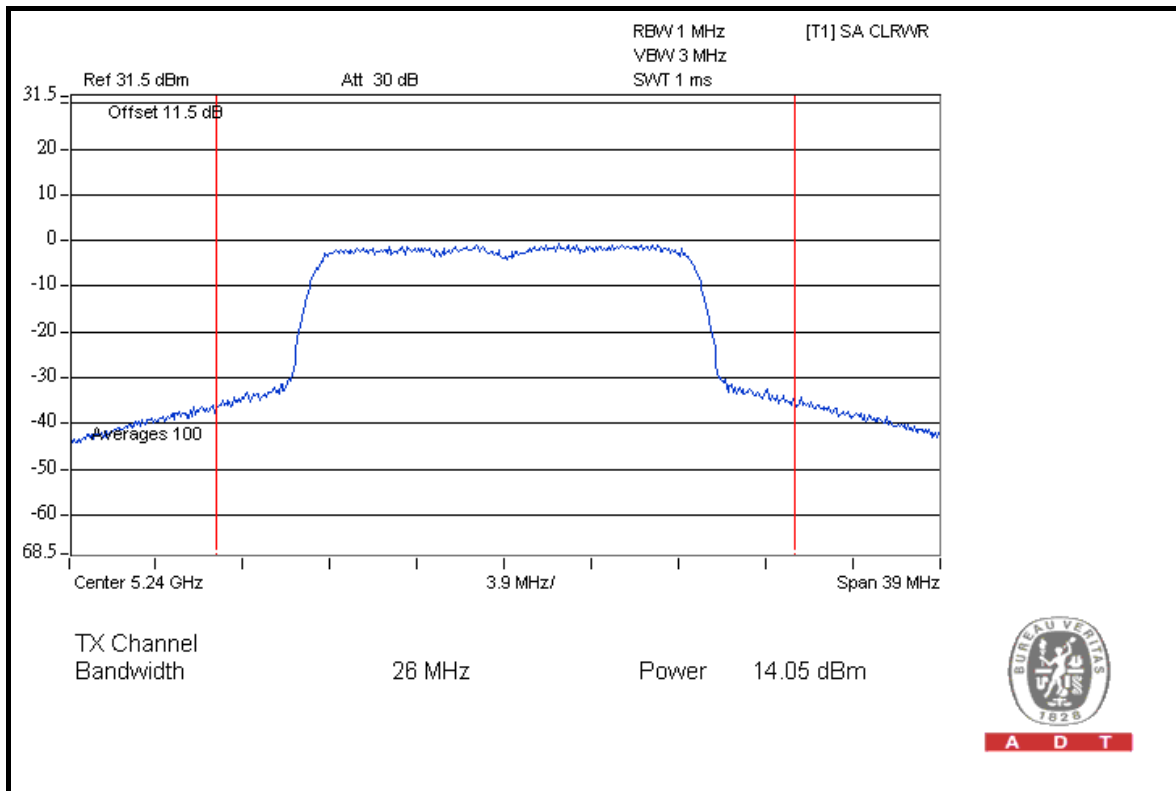



A D T

### DRAFT 802.11n (20MHz) OFDM MODULATION

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	7.2Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		


CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	13.90	13.93	49.264	16.93	17	PASS
40	5200	13.53	14.03	47.835	16.80	17	PASS
48	5240	13.07	14.10	45.981	16.63	17	PASS






A D T

### FOR CHAIN 0: CH 36

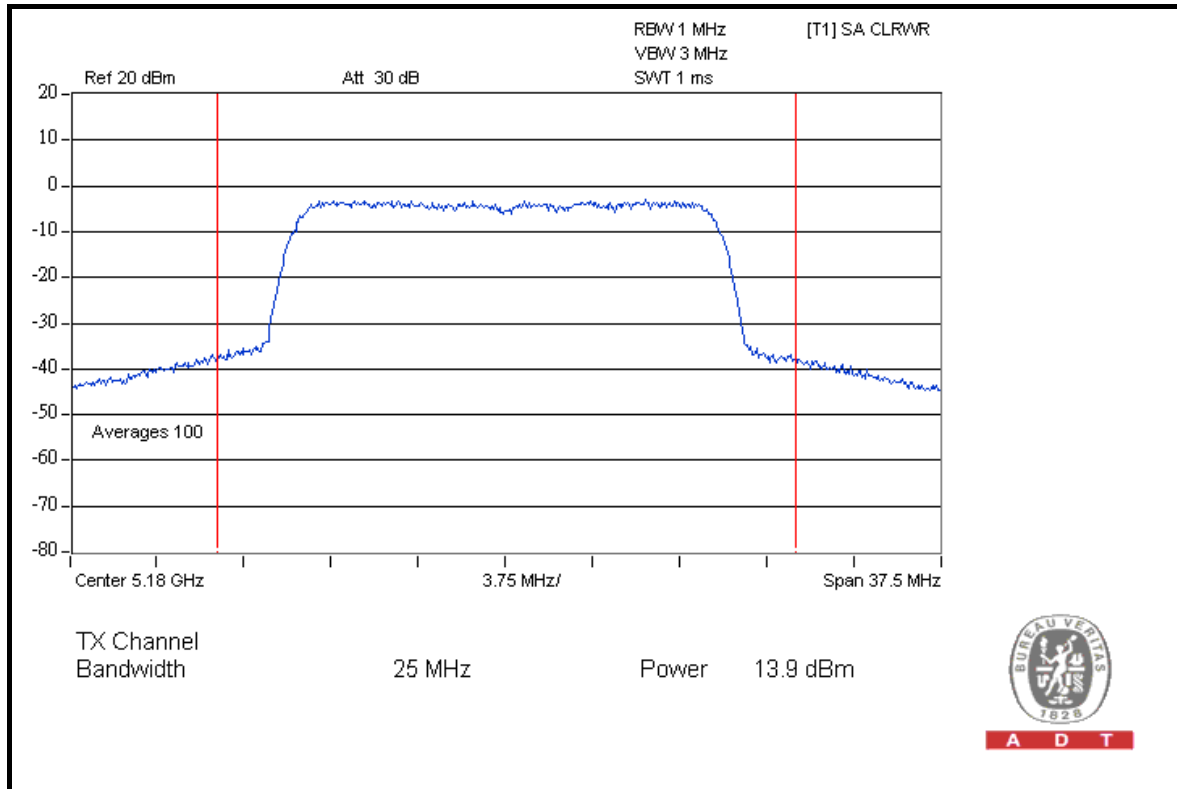


### CH 40

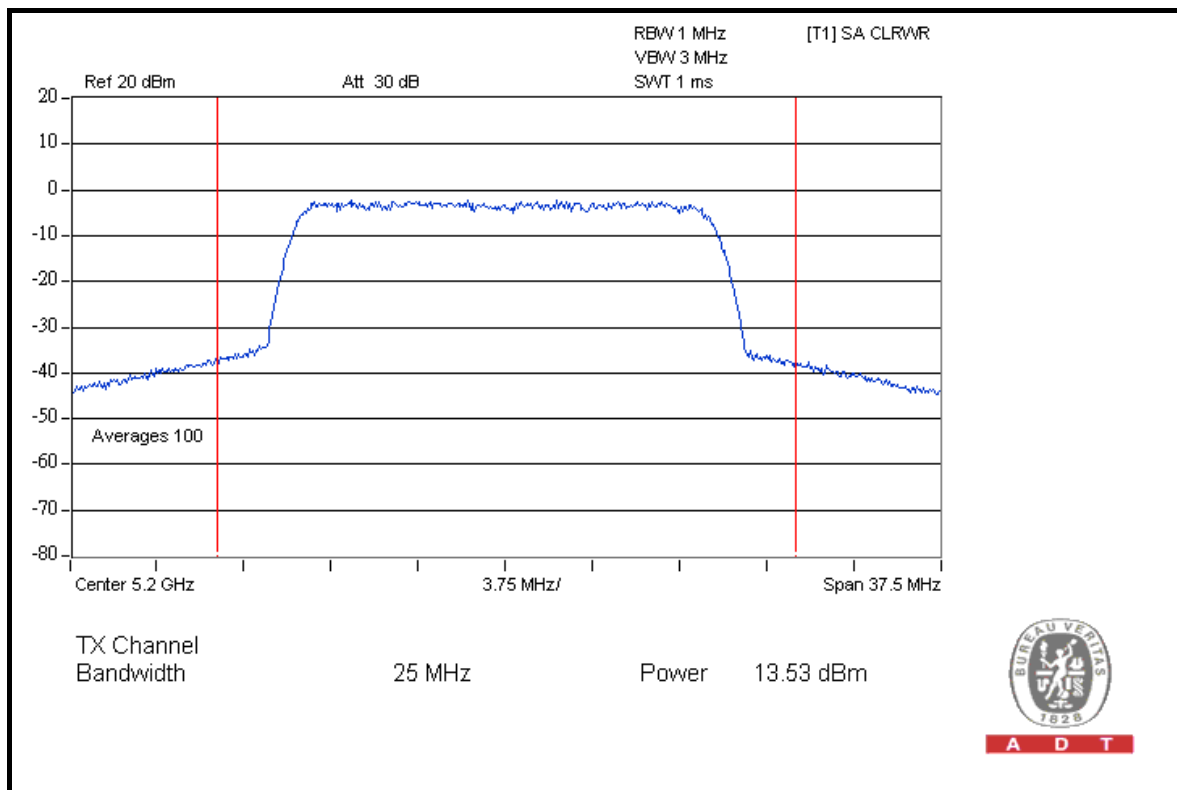




A D T

### CH 48

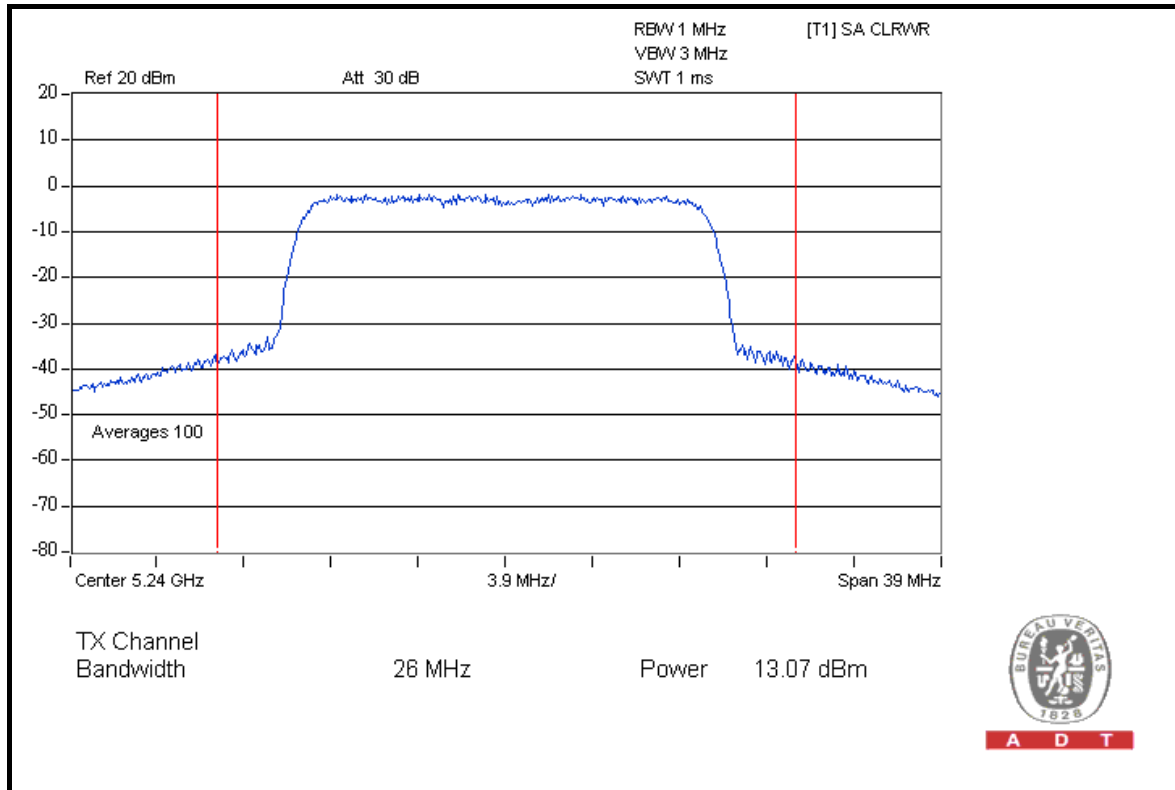


### FOR CHAIN 1: CH 36

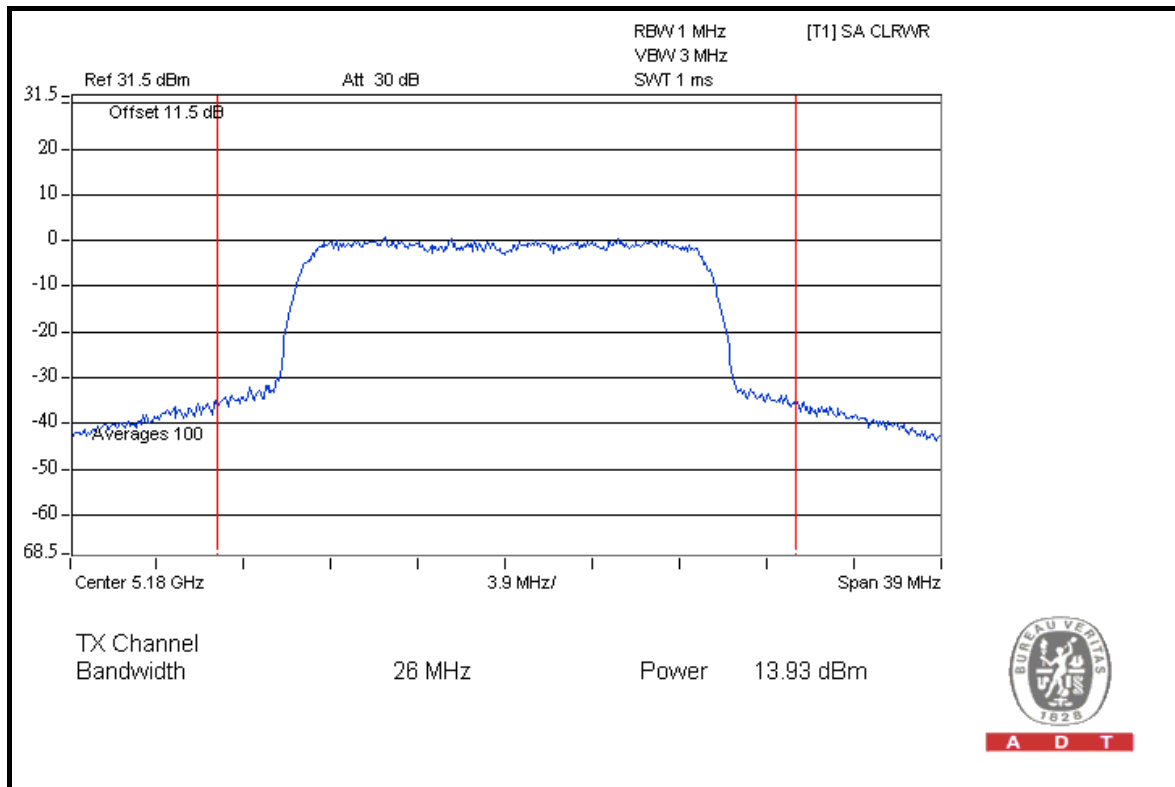




A D T

### CH 40

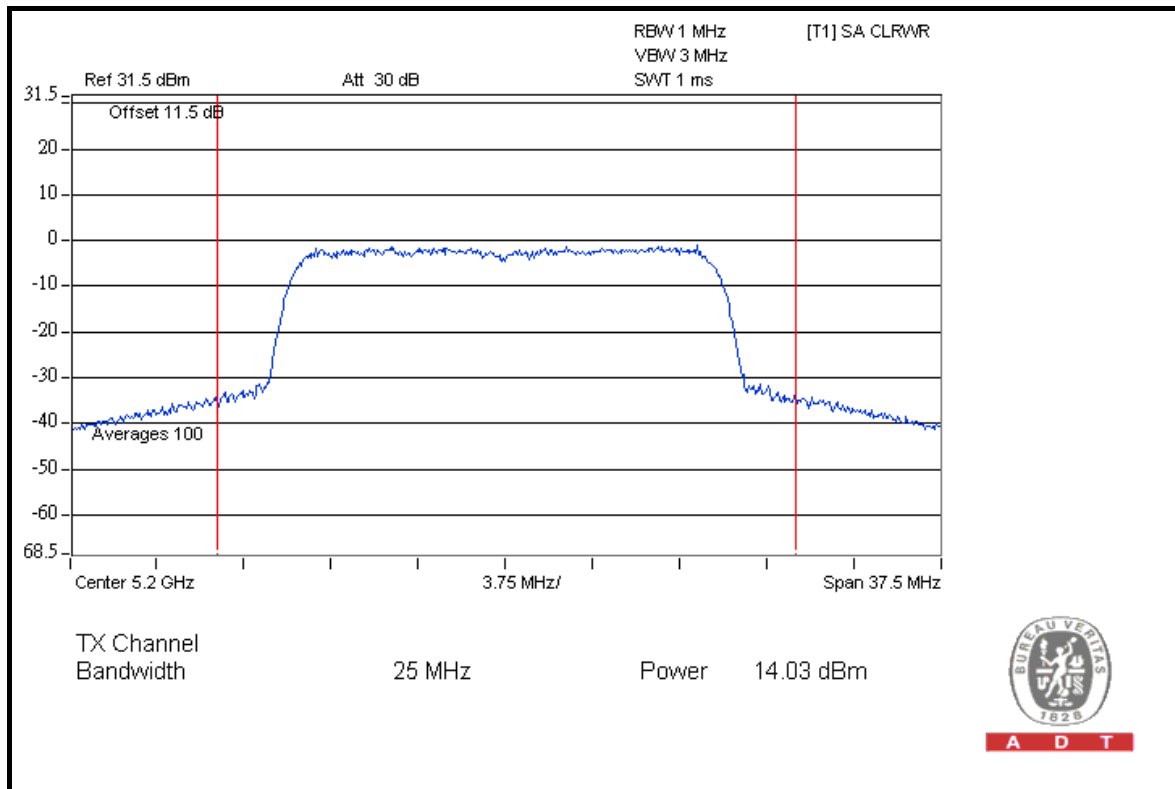

### CH 48

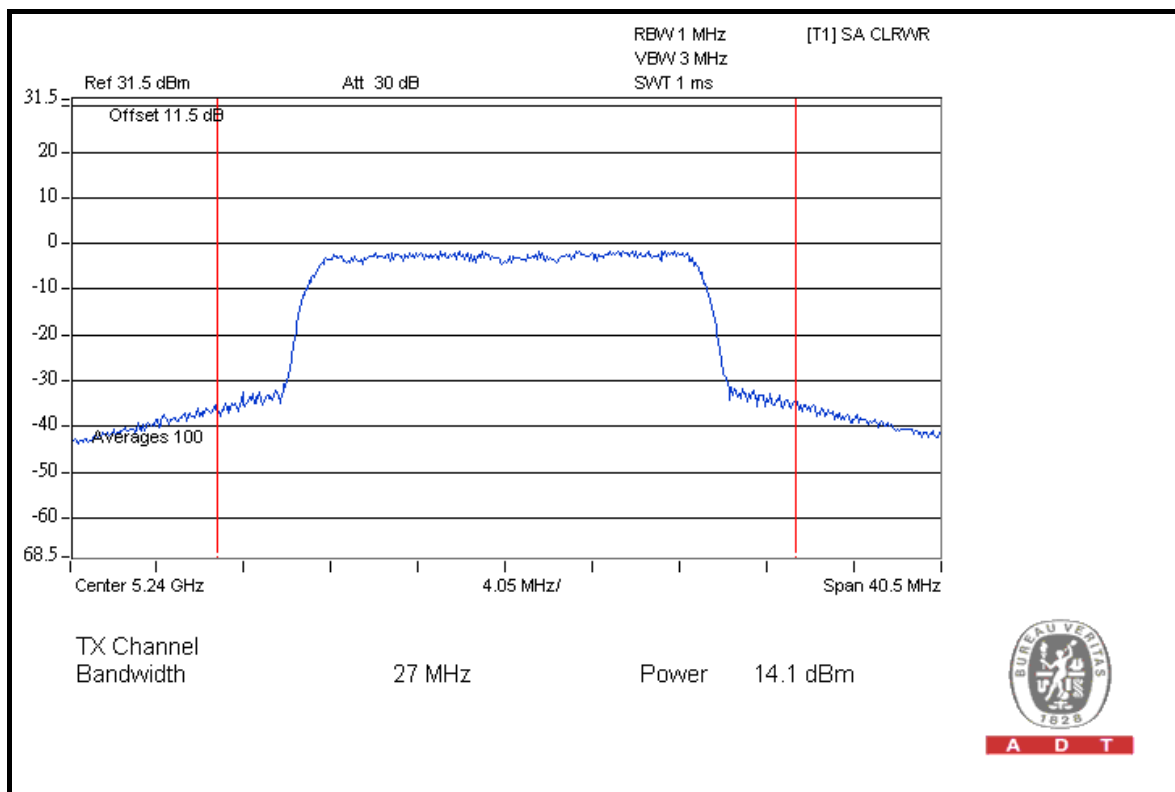



A D T

### DRAFT 802.11n (40MHz) OFDM MODULATION


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	15.0Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	13.82	13.83	48.254	16.84	17	PASS
46	5230	13.53	14.04	47.894	16.80	17	PASS




A D T

### FOR CHAIN 0: CH 38

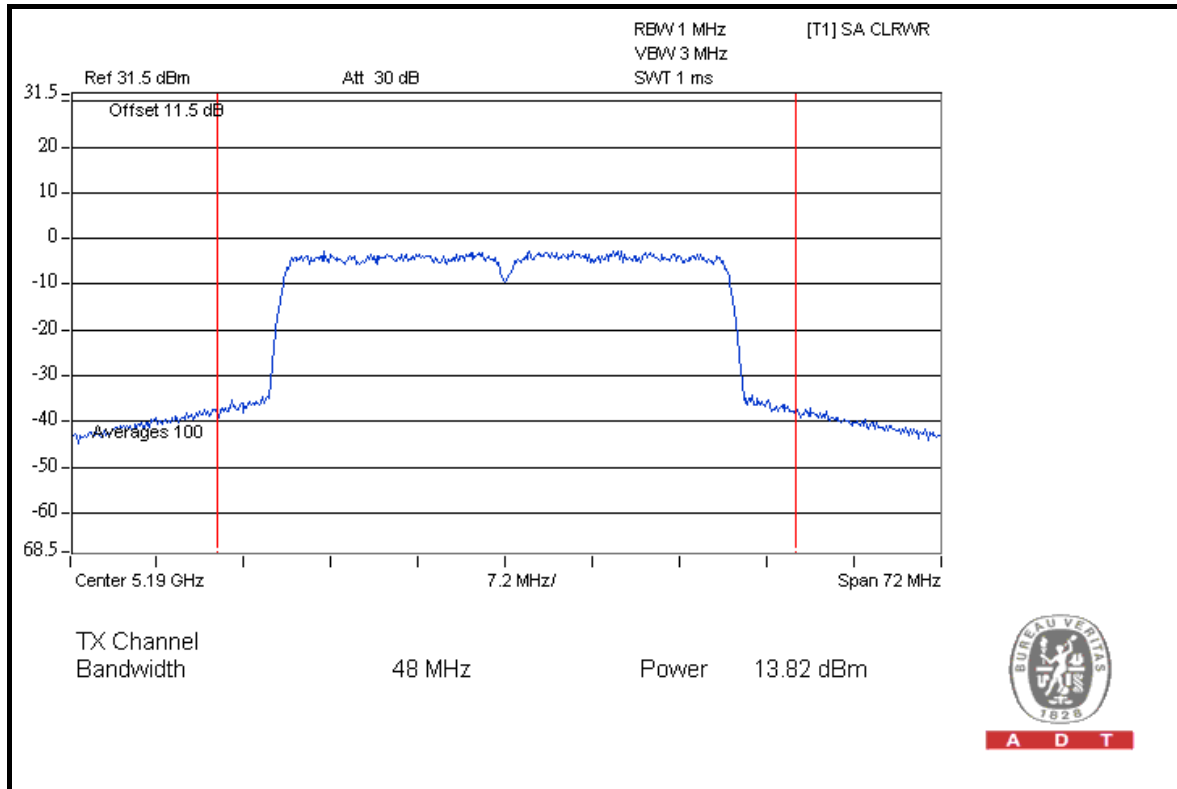


### CH 46

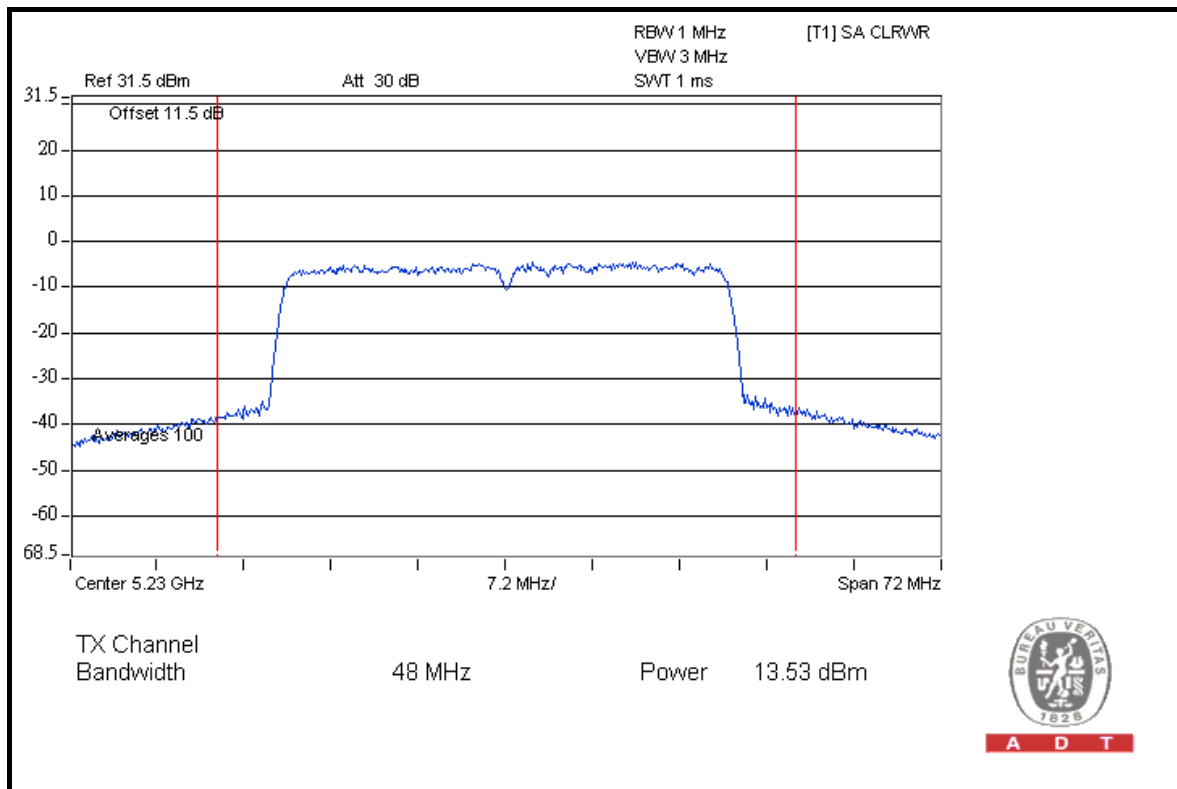




A D T

### FOR CHAIN 1: CH 38

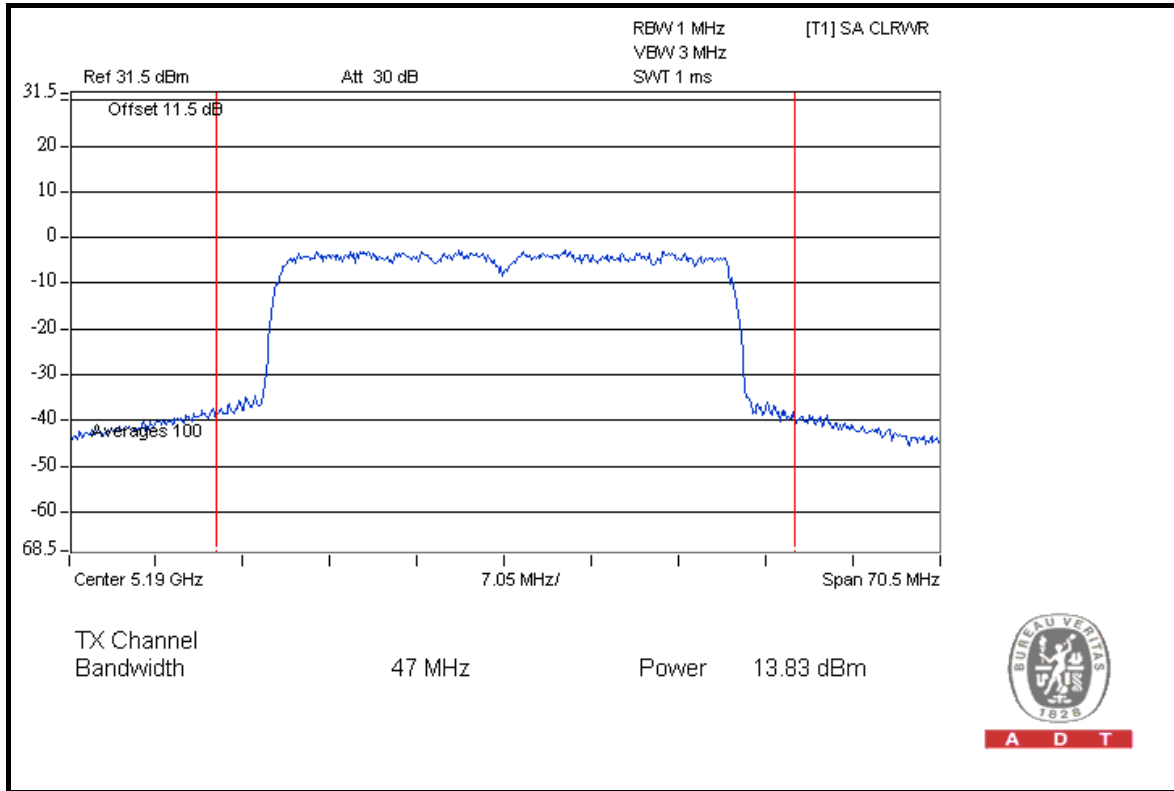

A D T

### CH 46

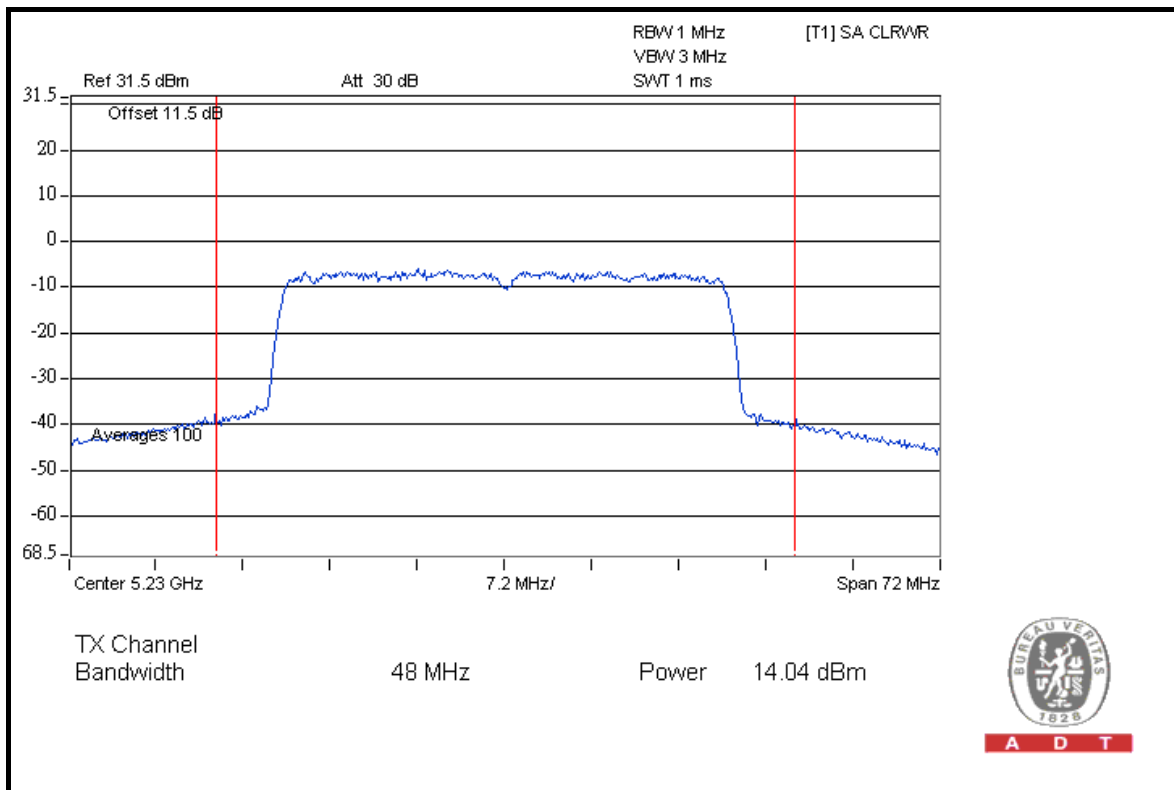

A D T



A D T

**26dB OCCUPIED BANDWIDTH: 802.11a OFDM MODULATION**


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6.0Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	23.18	25.29	PASS
40	5200	23.73	25.89	PASS
48	5240	23.54	25.94	PASS




A D T

### FOR CHAIN 0: CH 36

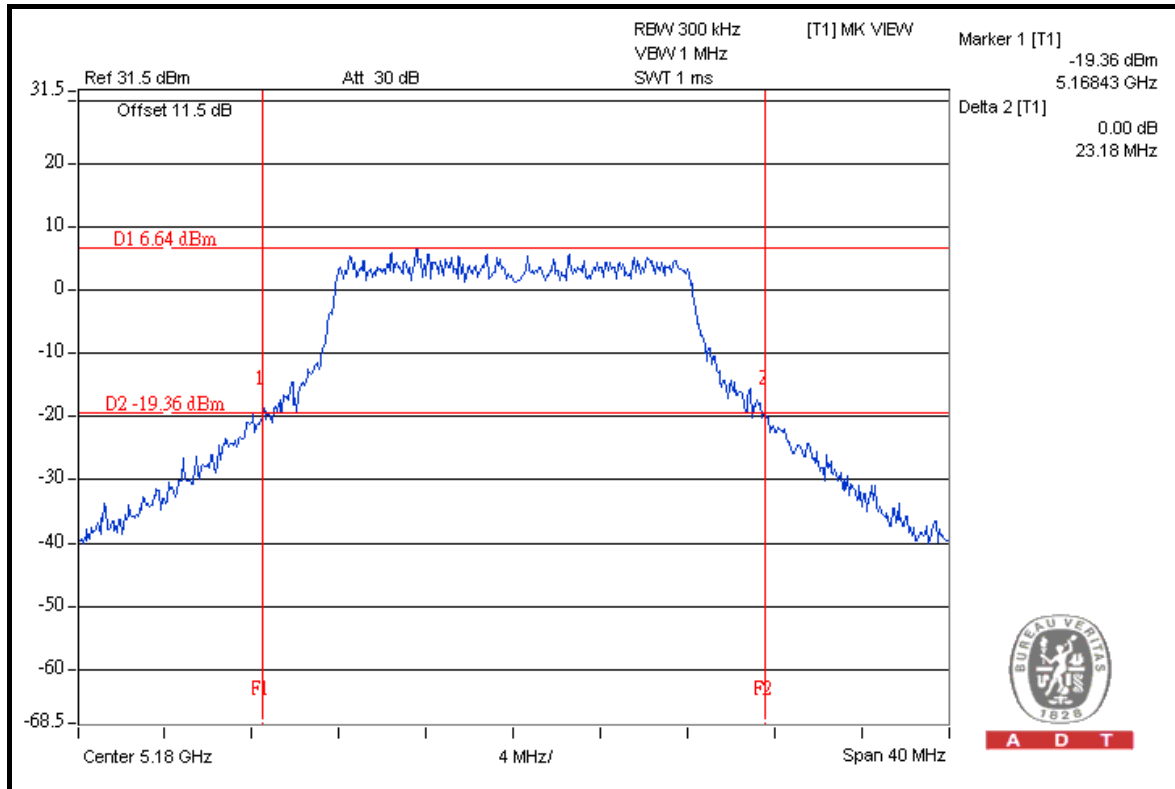

### CH 40

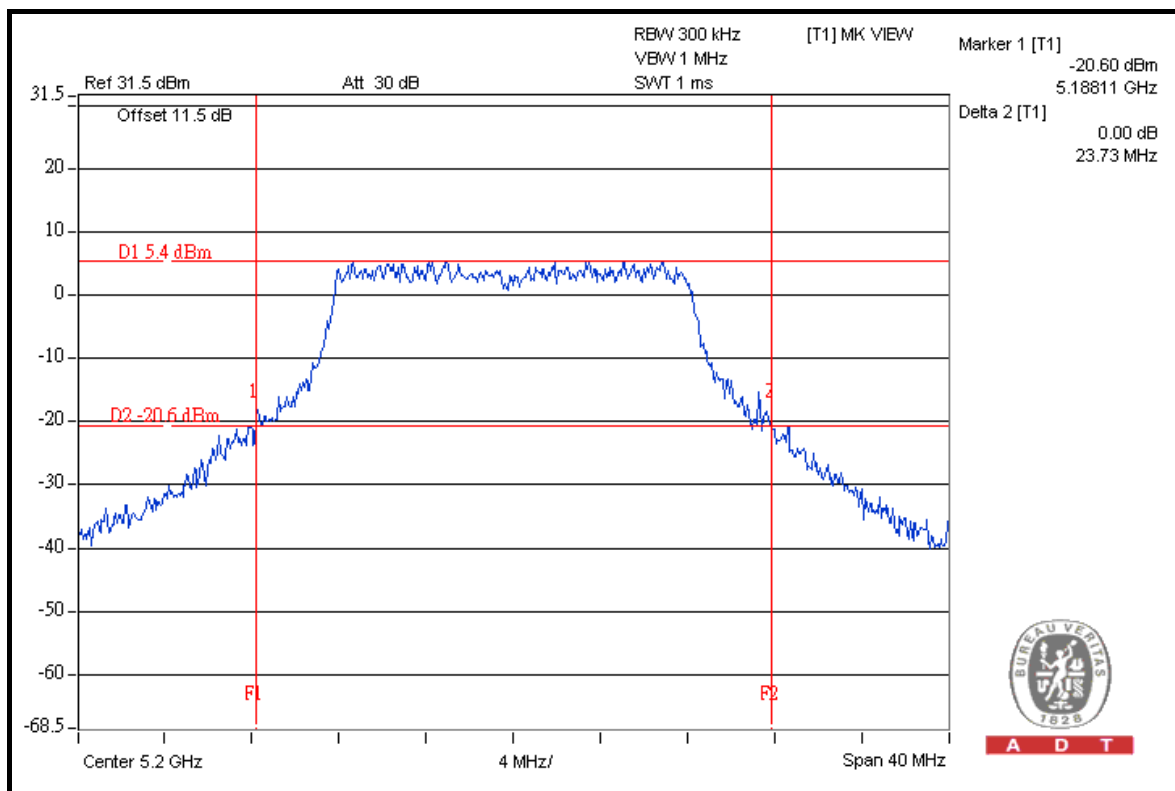







A D T

### CH 48

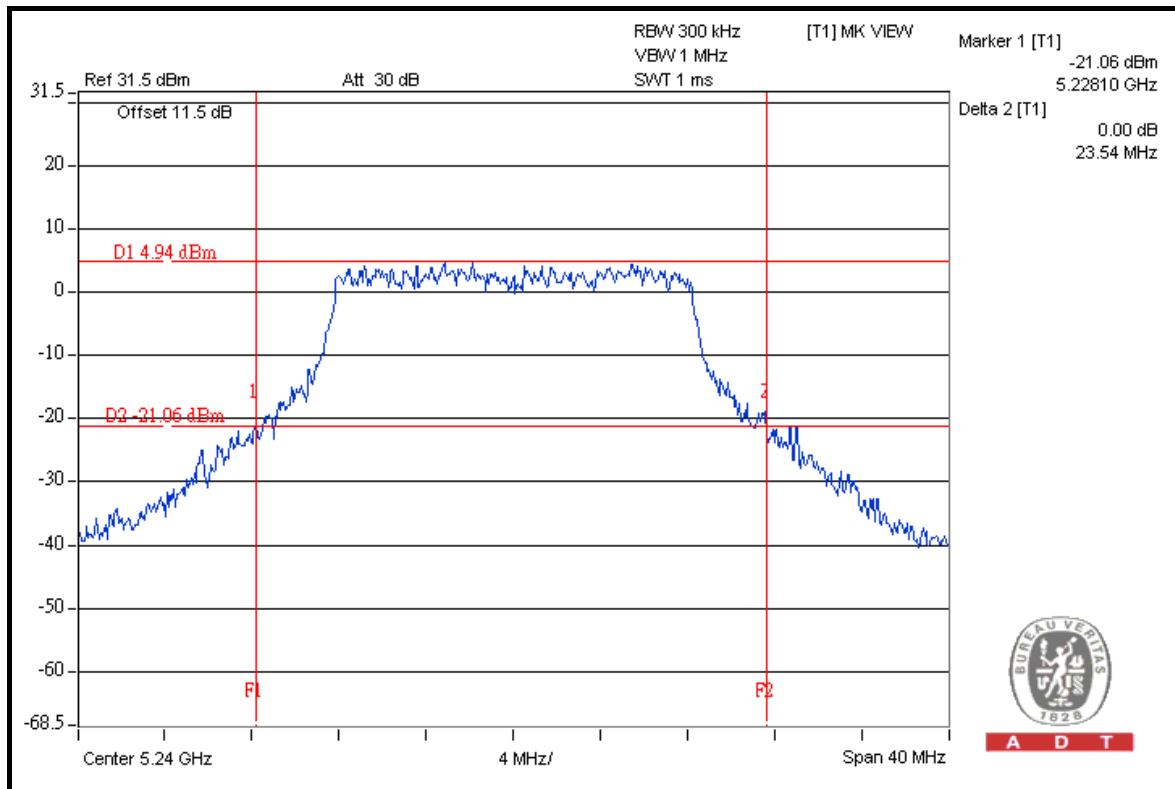


### FOR CHAIN 1: CH 36

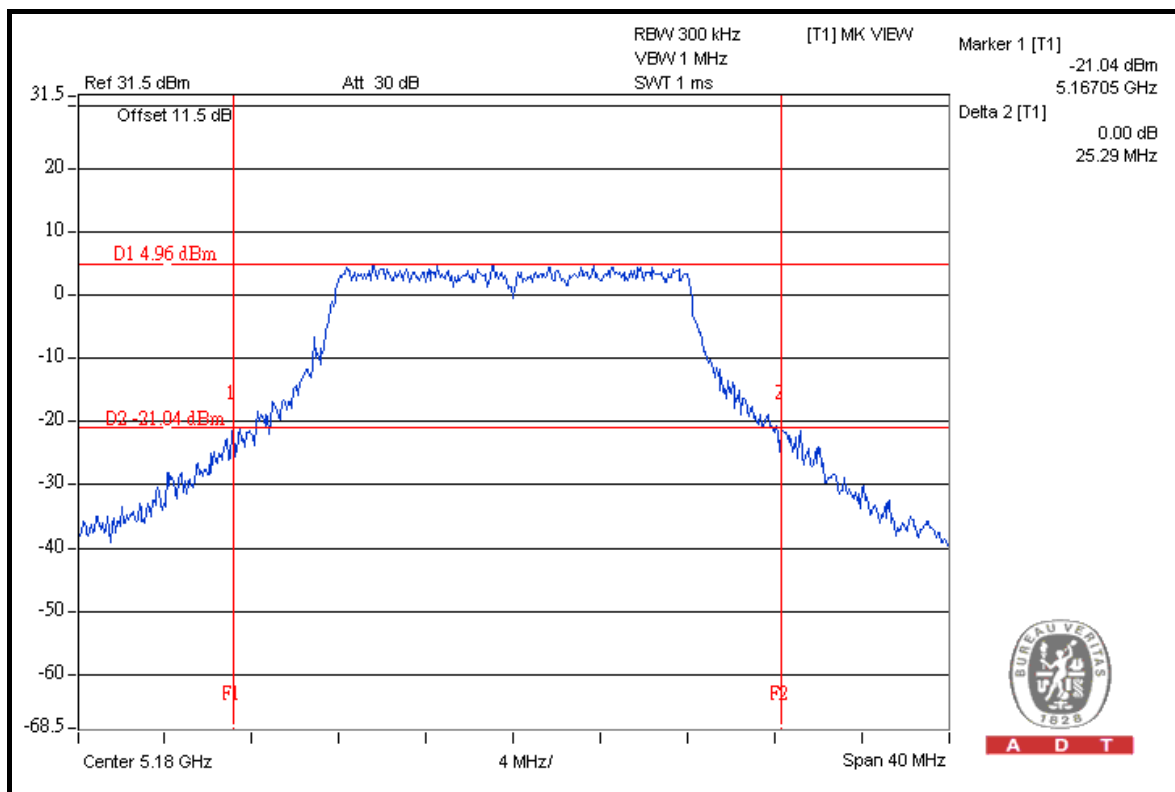




A D T

### CH 40

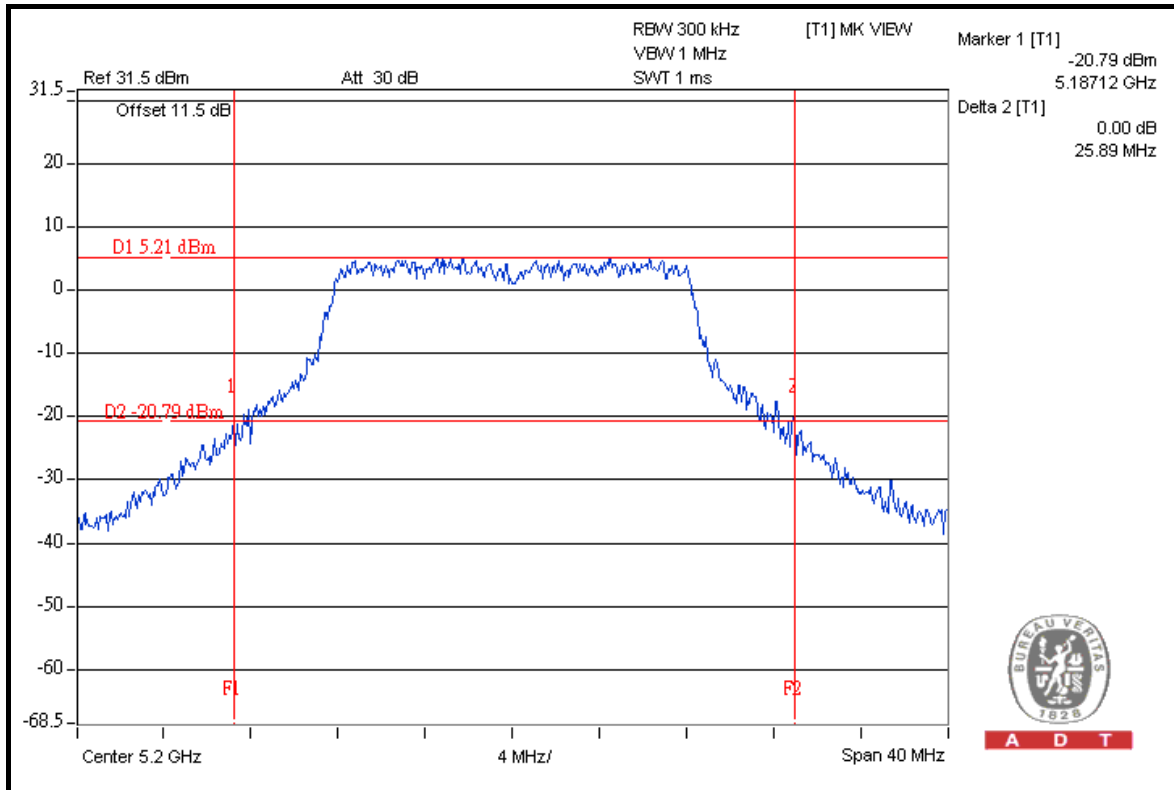

### CH 48

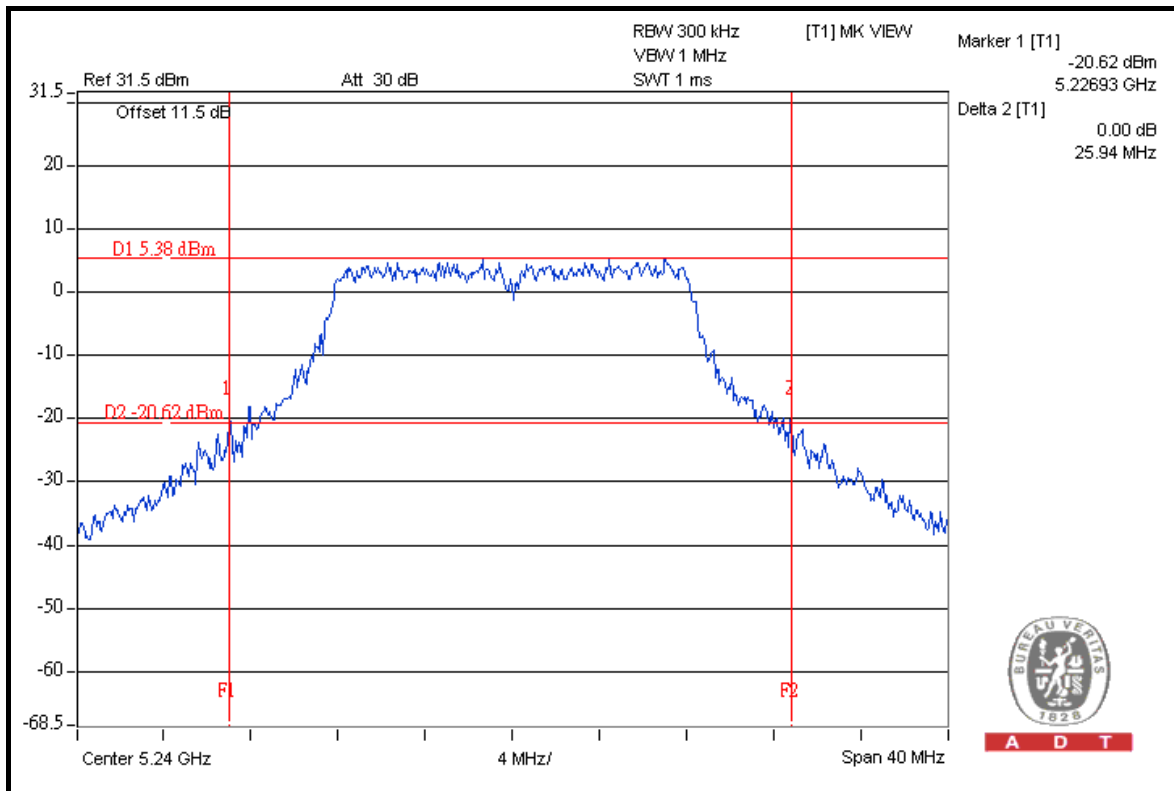



A D T

### DRAFT 802.11n (20MHz) OFDM MODULATION


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	7.2Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	25.34	25.96	PASS
40	5200	25.33	24.14	PASS
48	5240	25.01	26.02	PASS




A D T

### FOR CHAIN 0: CH 36

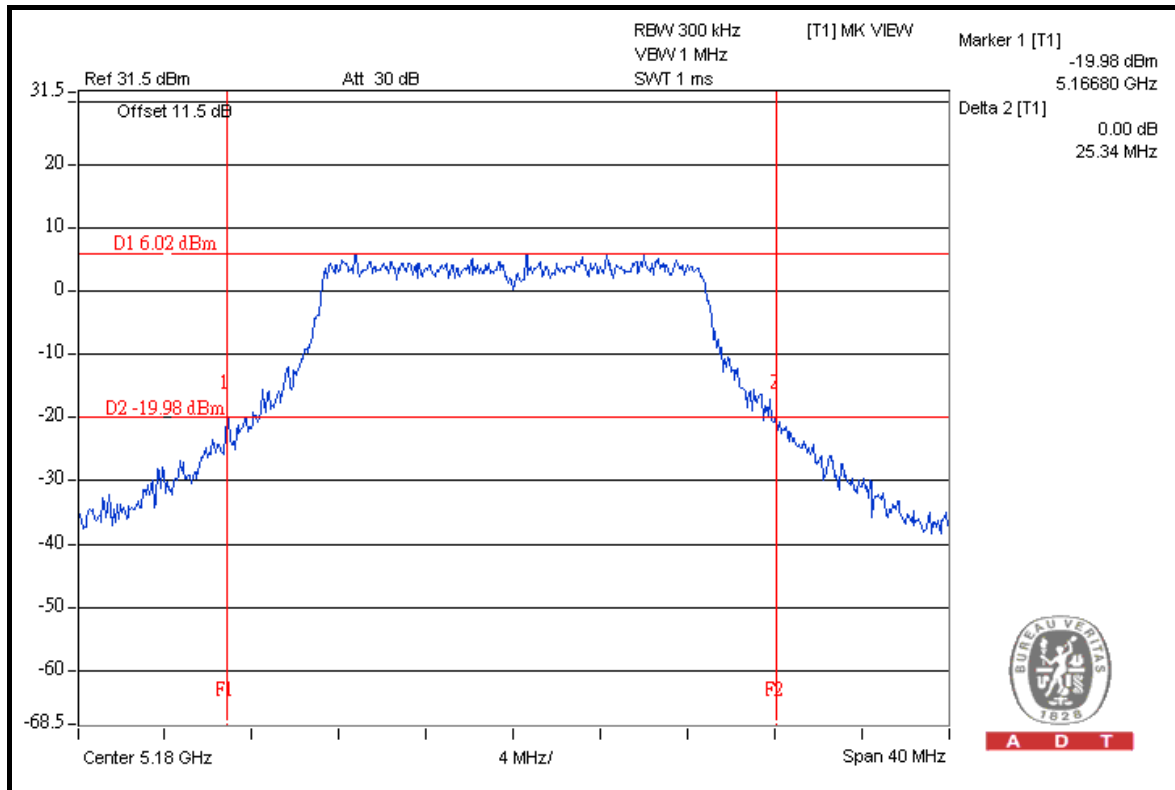


### CH 40

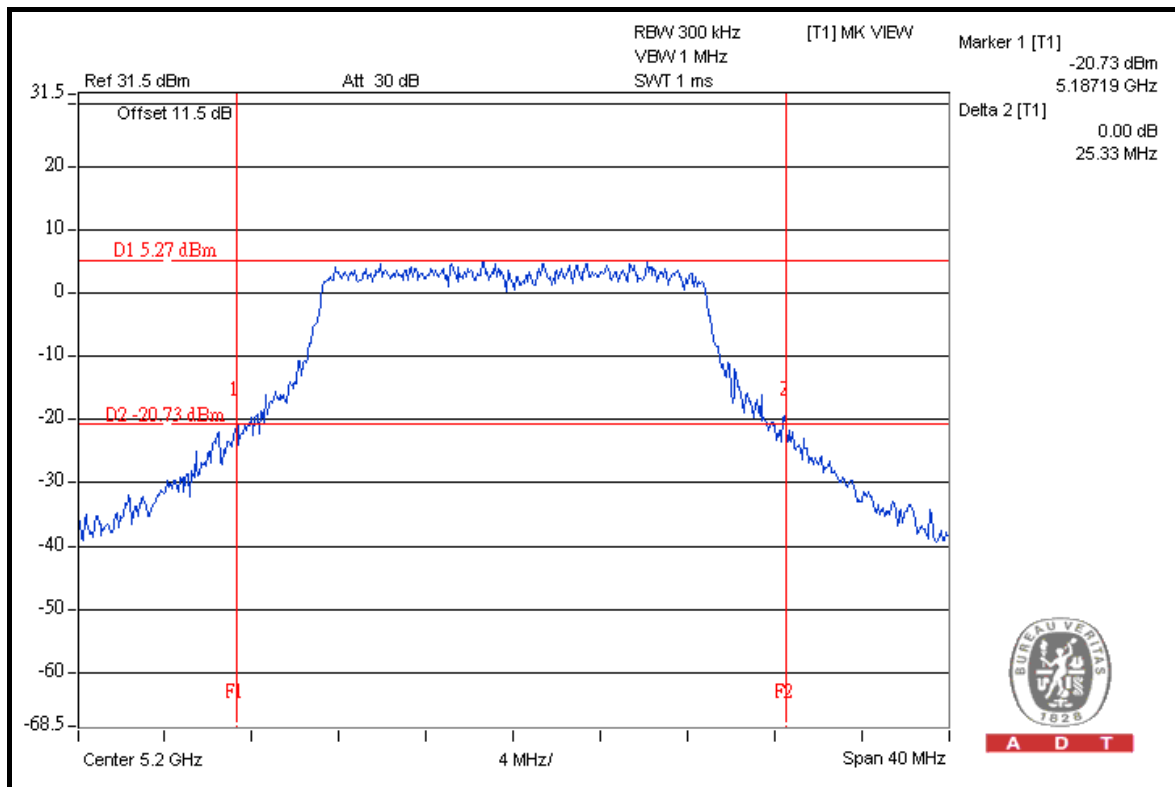




A D T

### CH 48

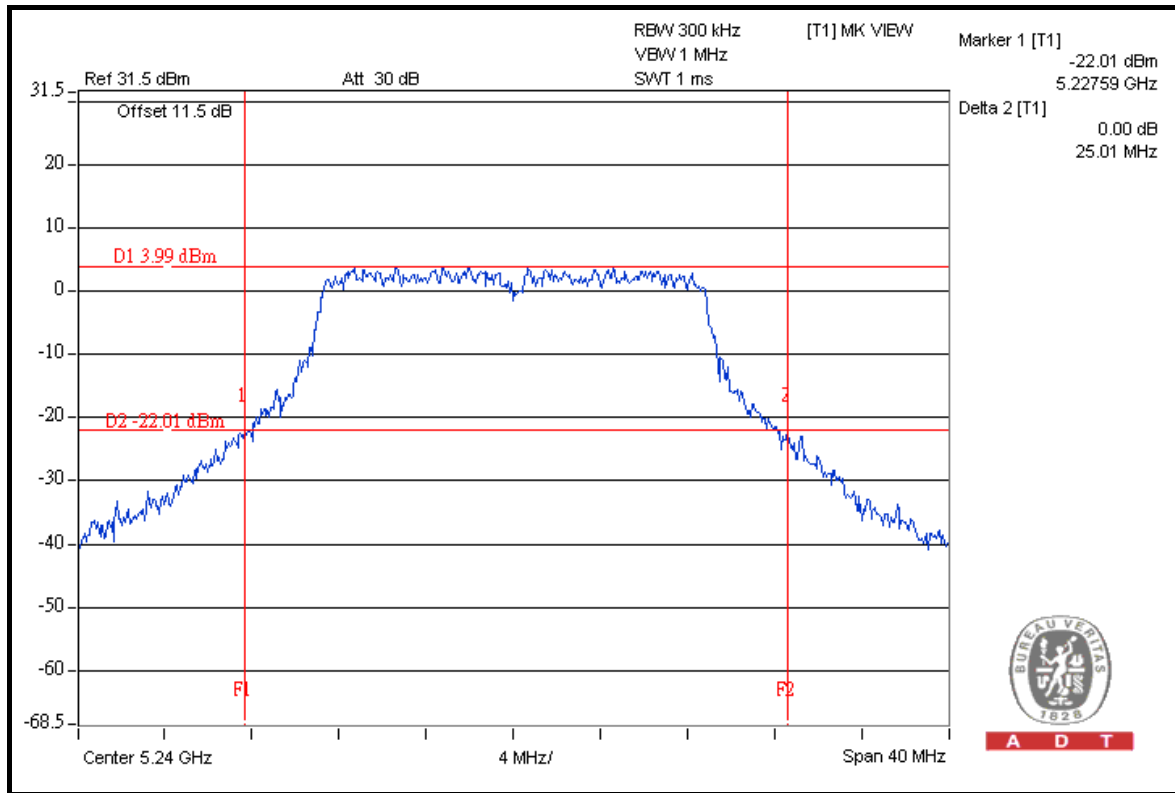


### FOR CHAIN 1: CH 36

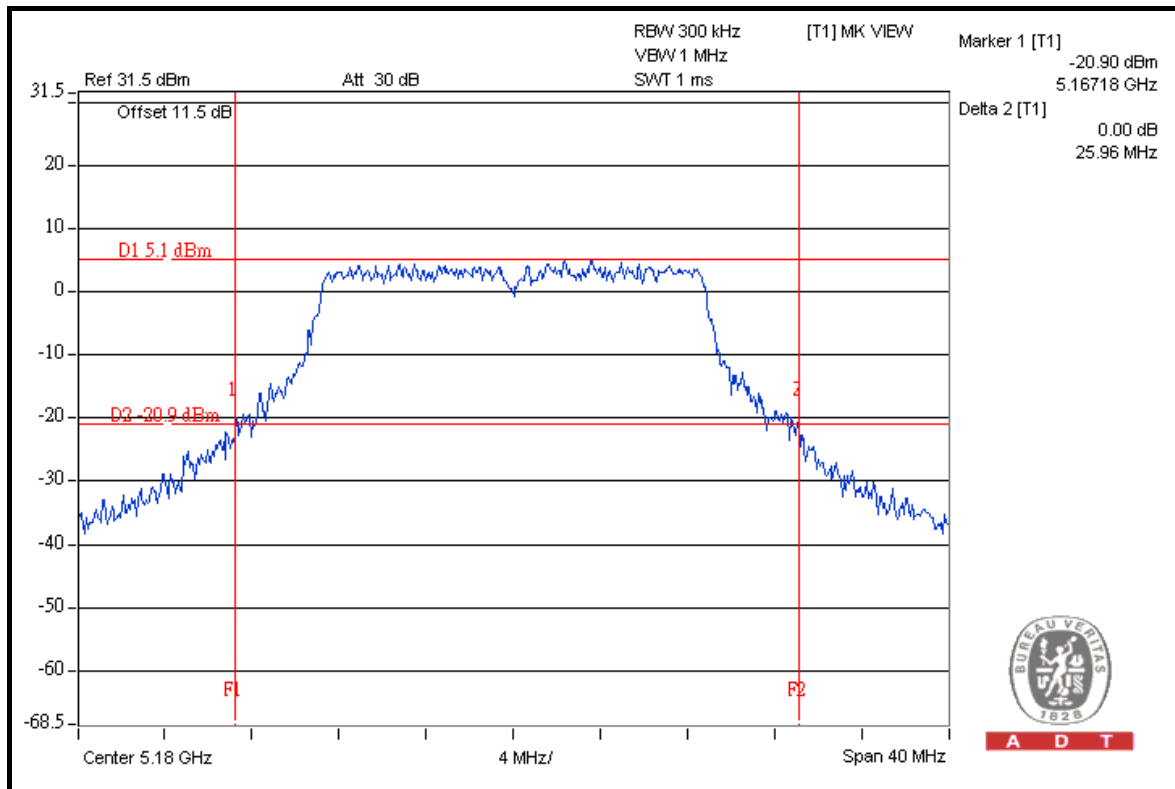




A D T

### CH 40

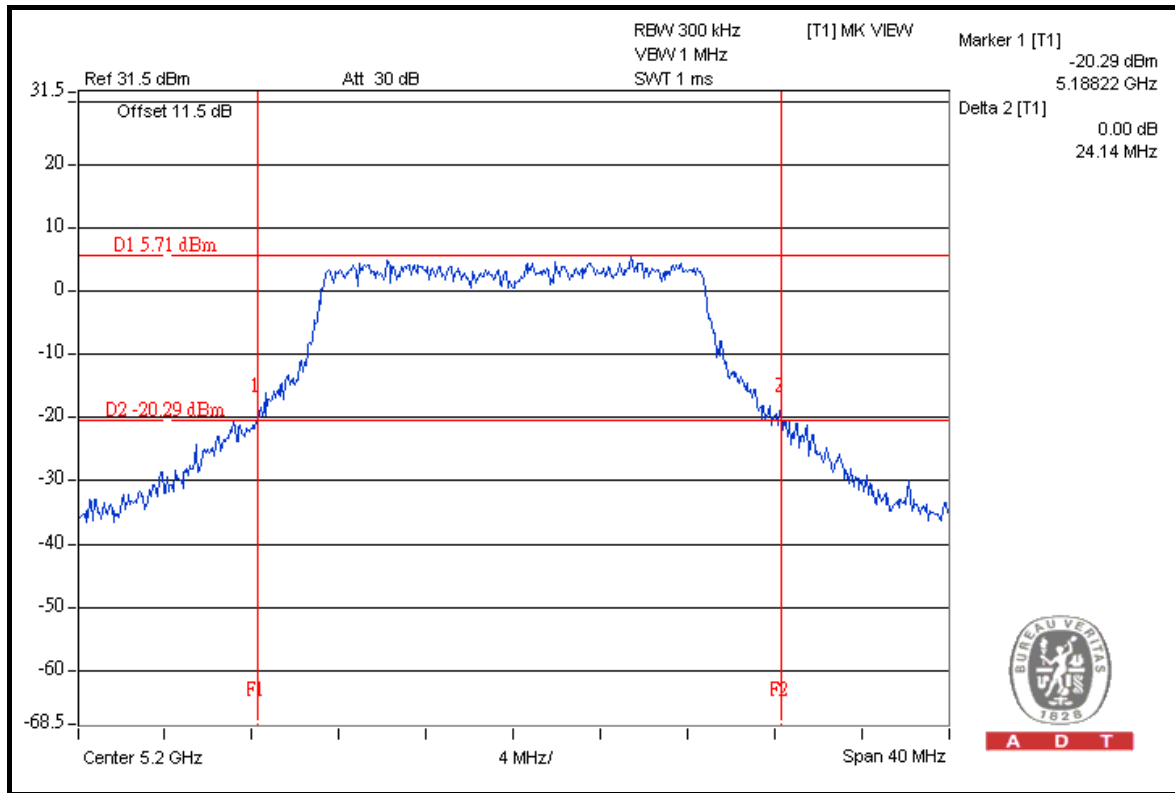

### CH 48

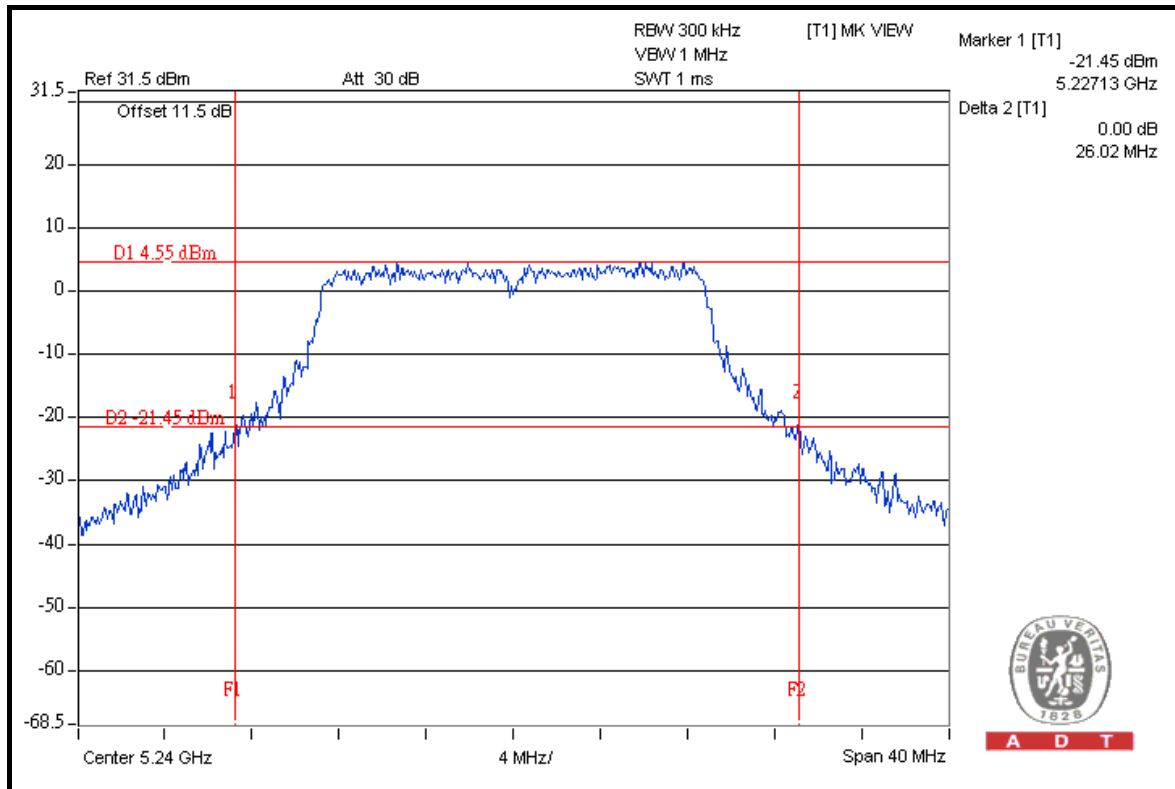



A D T

**DRAFT 802.11n (40MHz) OFDM MODULATION**


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	15.0Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
38	5190	47.94	46.56	PASS
46	5230	47.46	47.13	PASS




A D T

### FOR CHAIN 0: CH 38

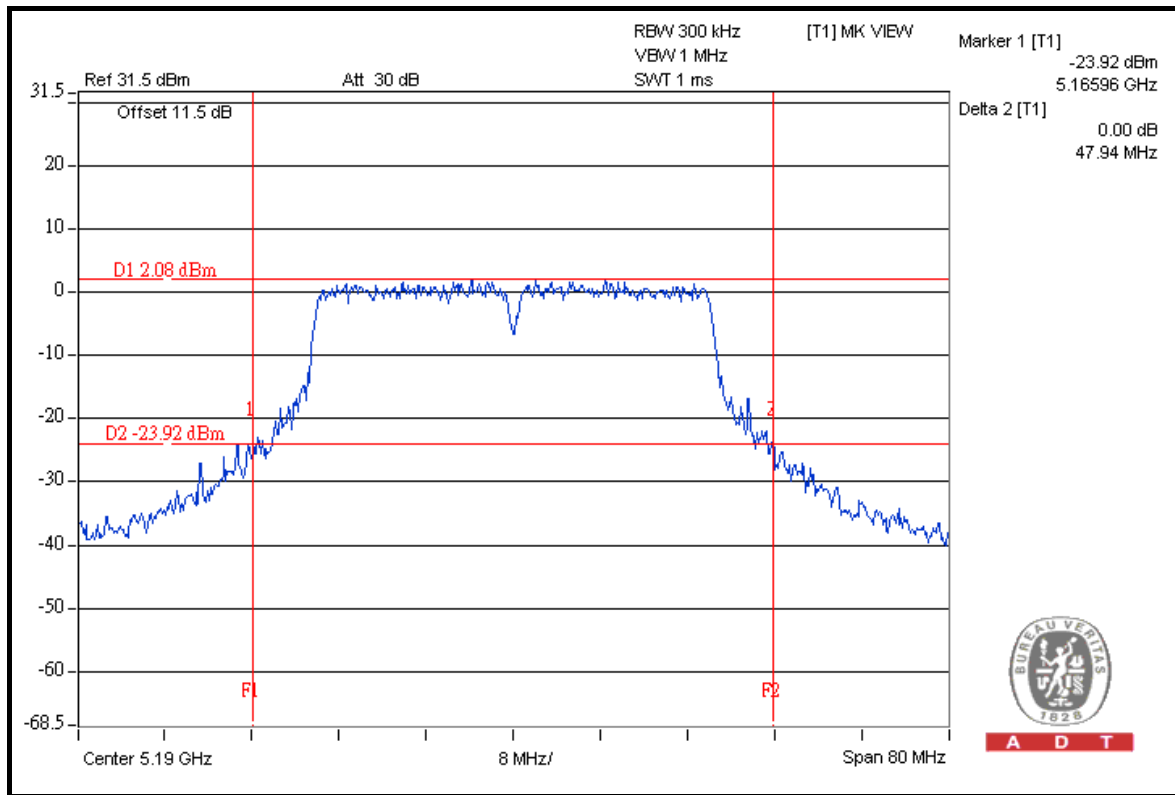

### CH 46

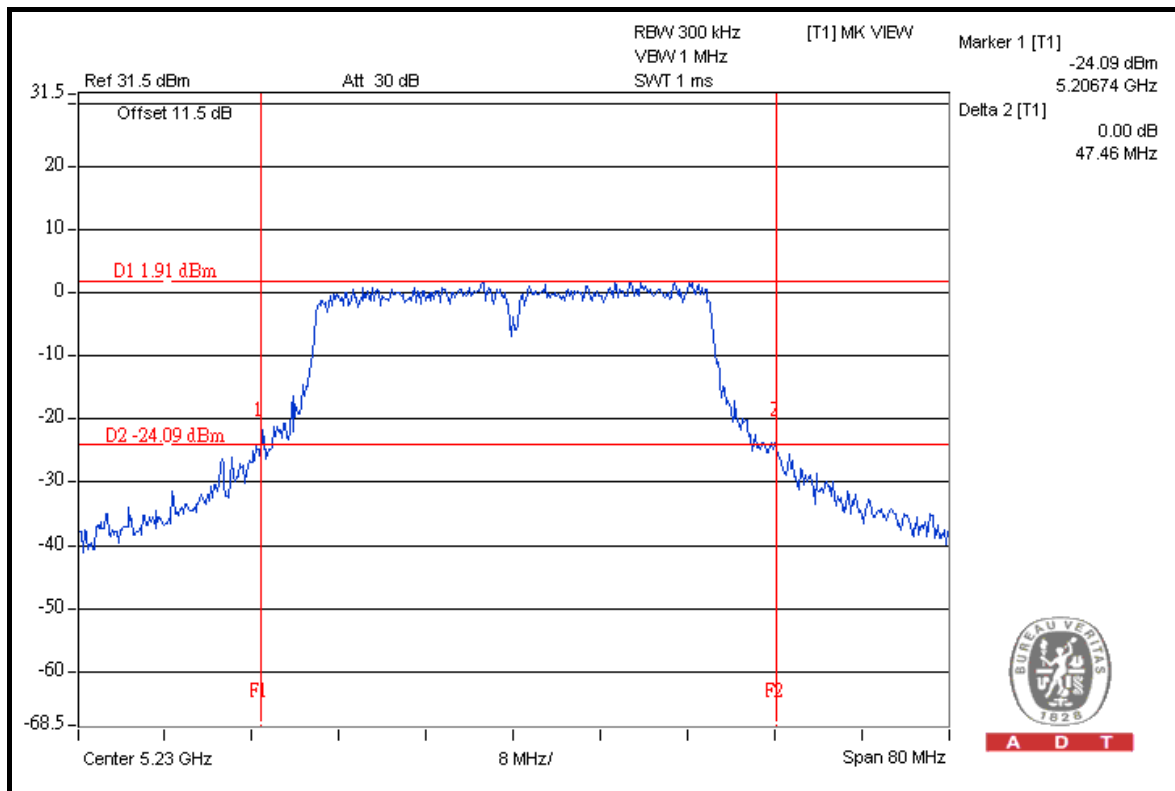







A D T

### FOR CHAIN 1: CH 38

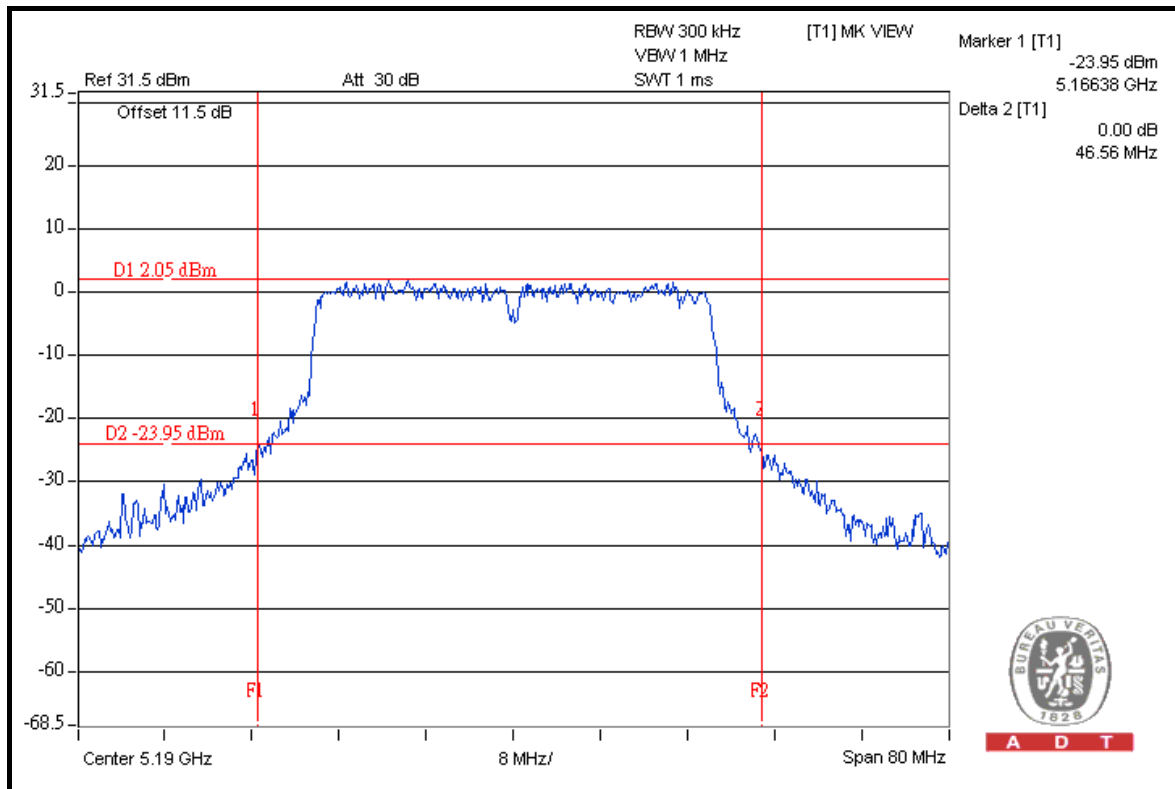

### CH 46

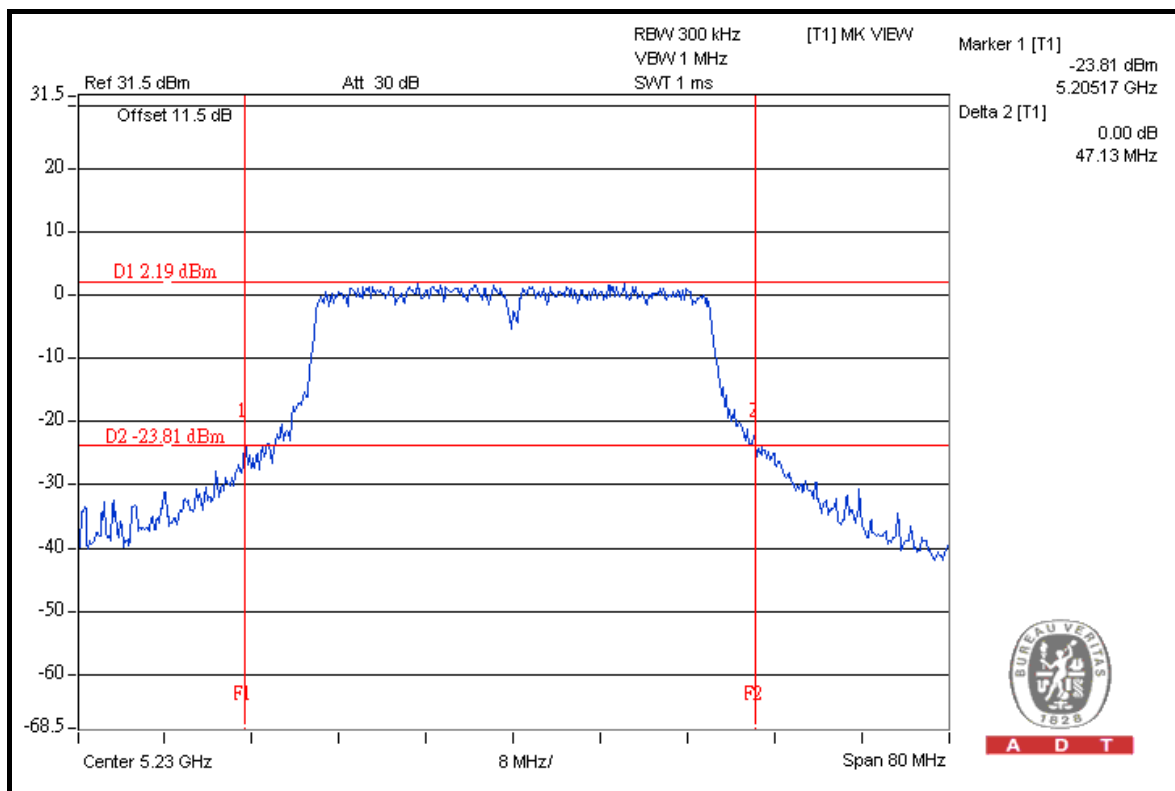

#### 4.4 PEAK POWER EXCURSION MEASUREMENT

##### 4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	13dB

##### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


##### 4.4.3 TEST PROCEDURE

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set the spectrum bandwidth span to view the entire spectrum.
- c. Using peak detector and Max-hold function for Trace 1 (RB = 1MHz, VB = 3MHz) and 2 (RB = 1MHz, VB = 300kHz).
- d. The differences between Trace1 and Trace 2 in any 1MHz band at f1 to f2 range were recorded and showed to another trace.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.5 TEST SETUP

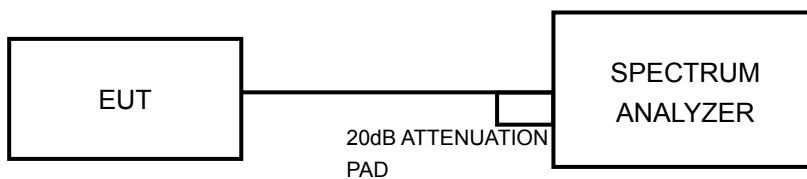

#### 4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

#### 4.4.7 TEST RESULTS

##### 802.11a OFDM MODULATION



<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6.0Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)		PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
		CHAIN 0	CHAIN 1		
36	5180	8.53	8.02	13	PASS
40	5200	8.73	9.81	13	PASS
48	5240	8.89	9.22	13	PASS



A D T



FOR CHAIN 0: CH 36

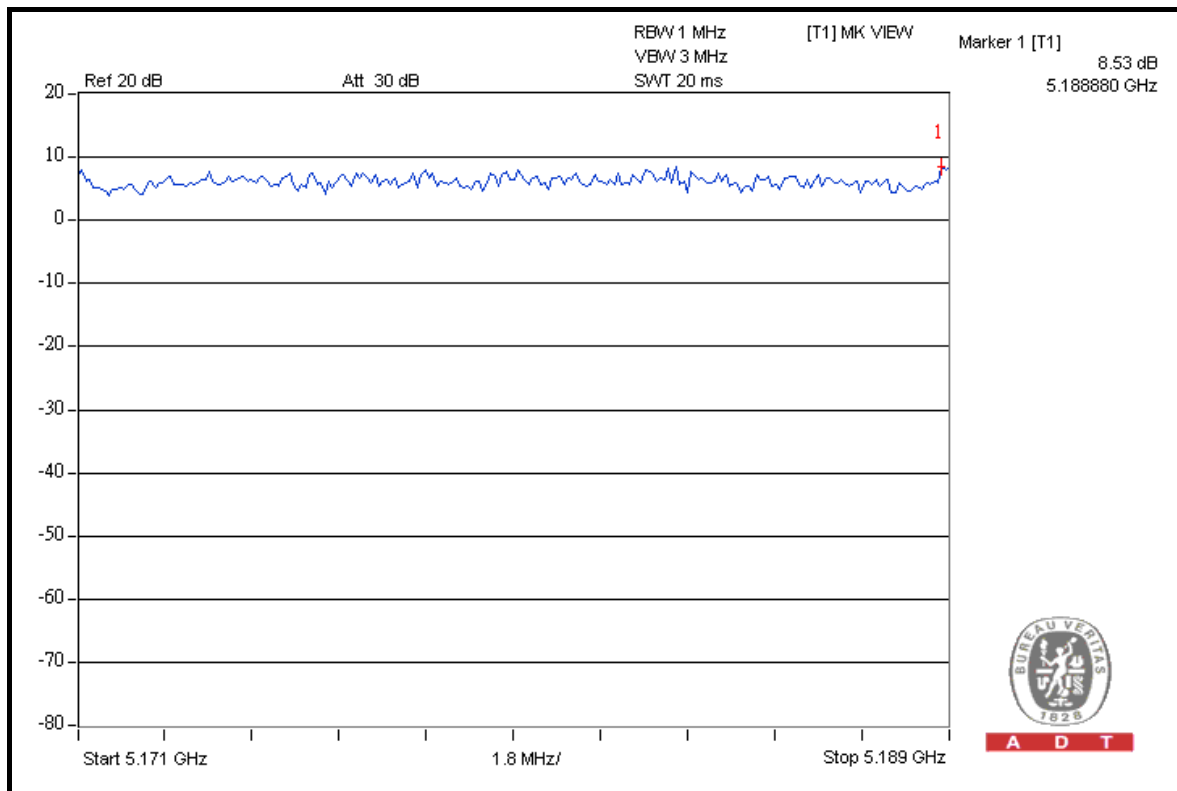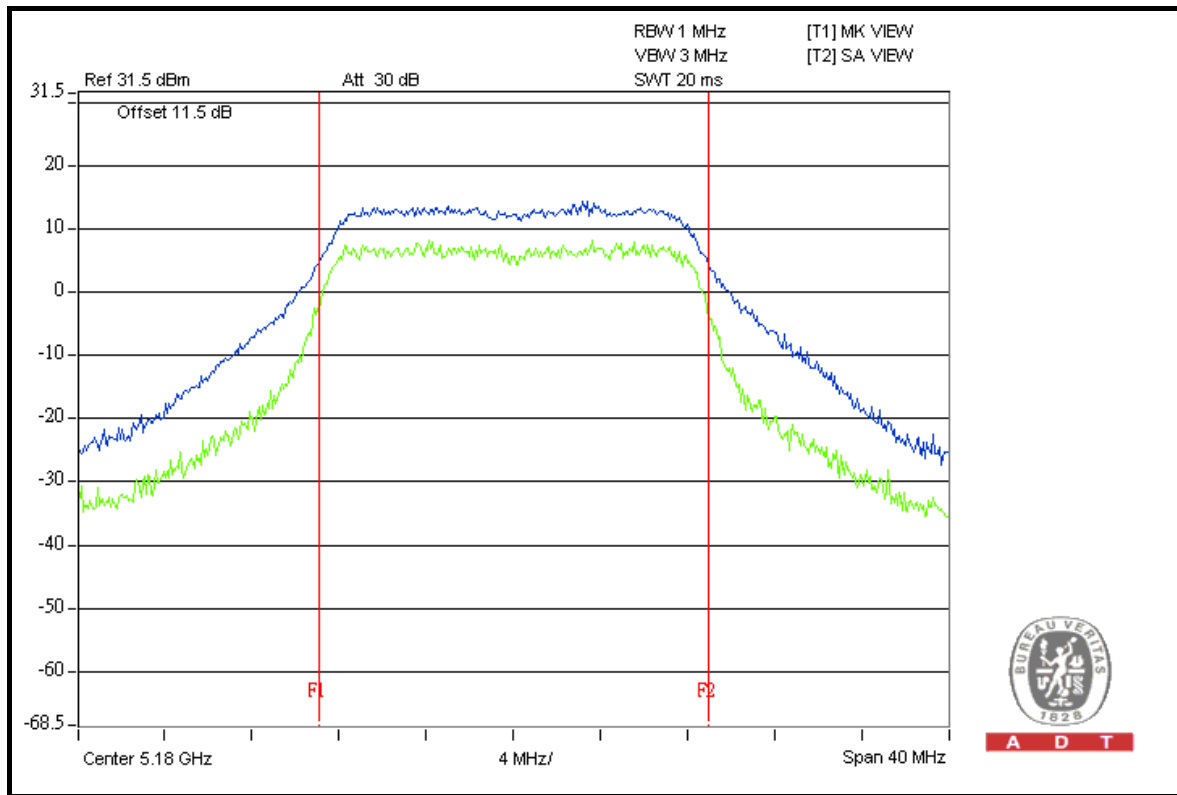



A D T



### CH 40

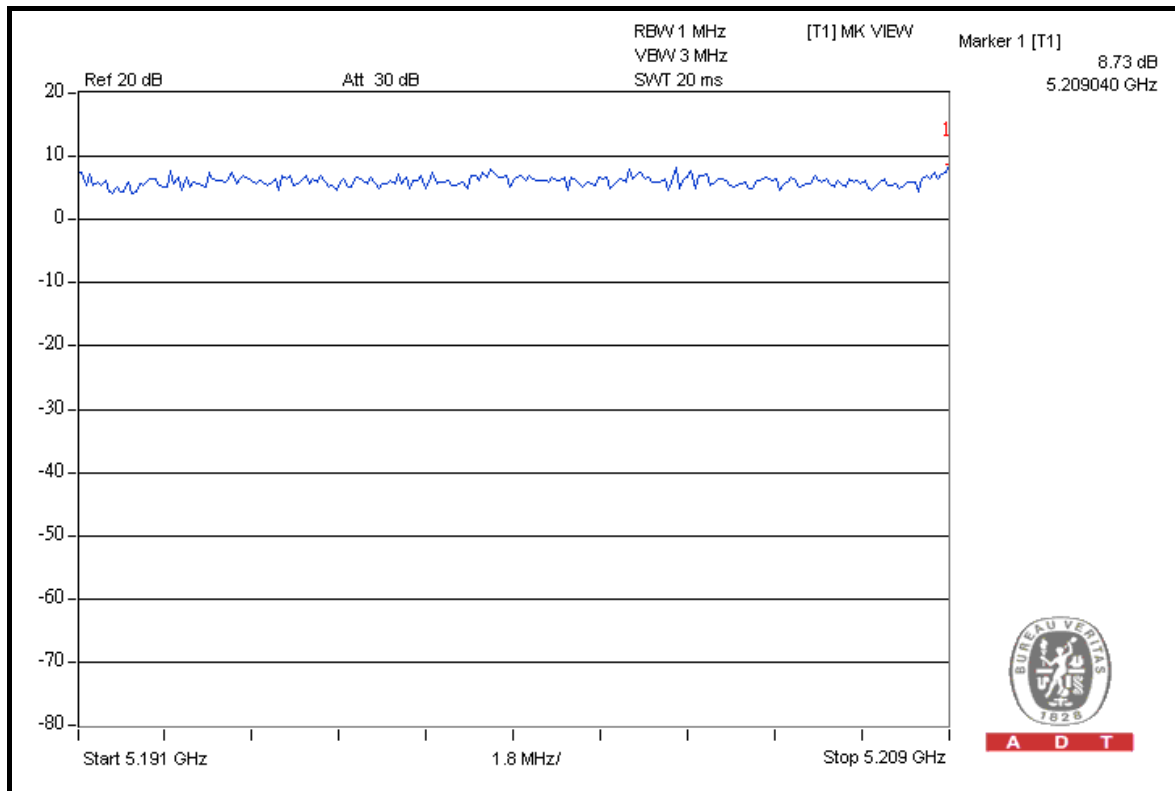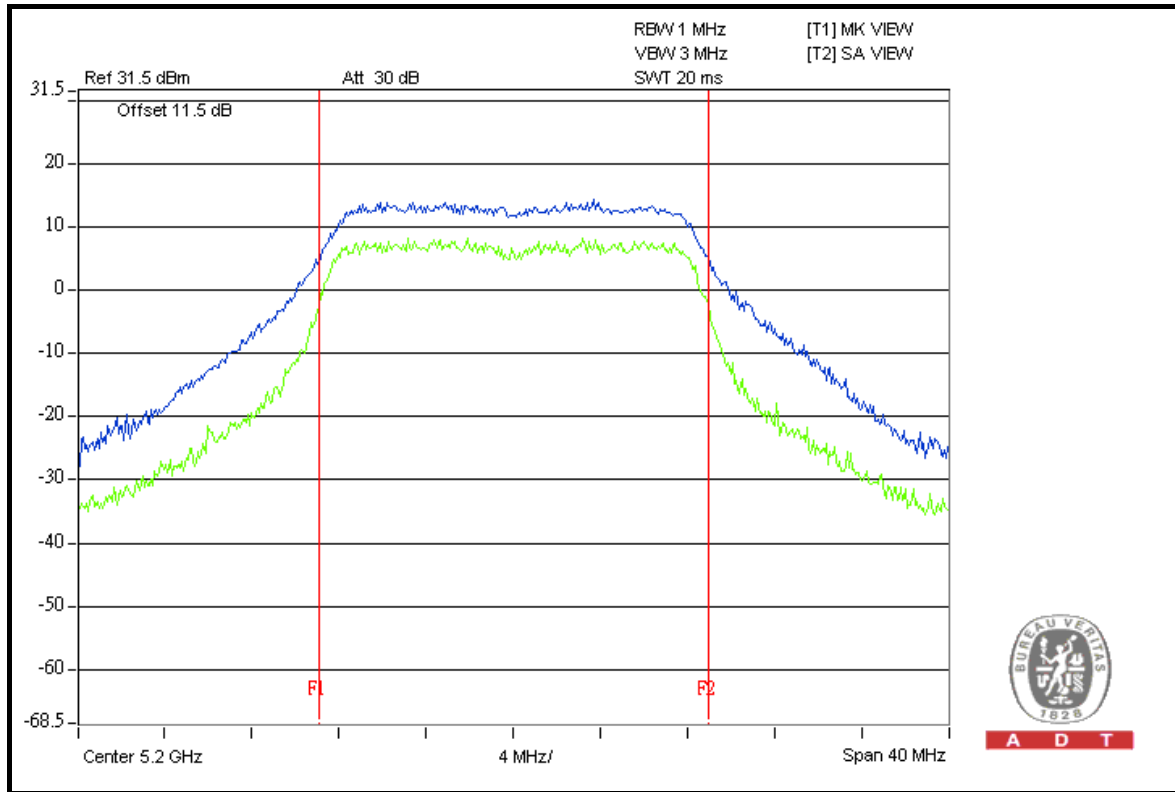



A D T


### CH 48

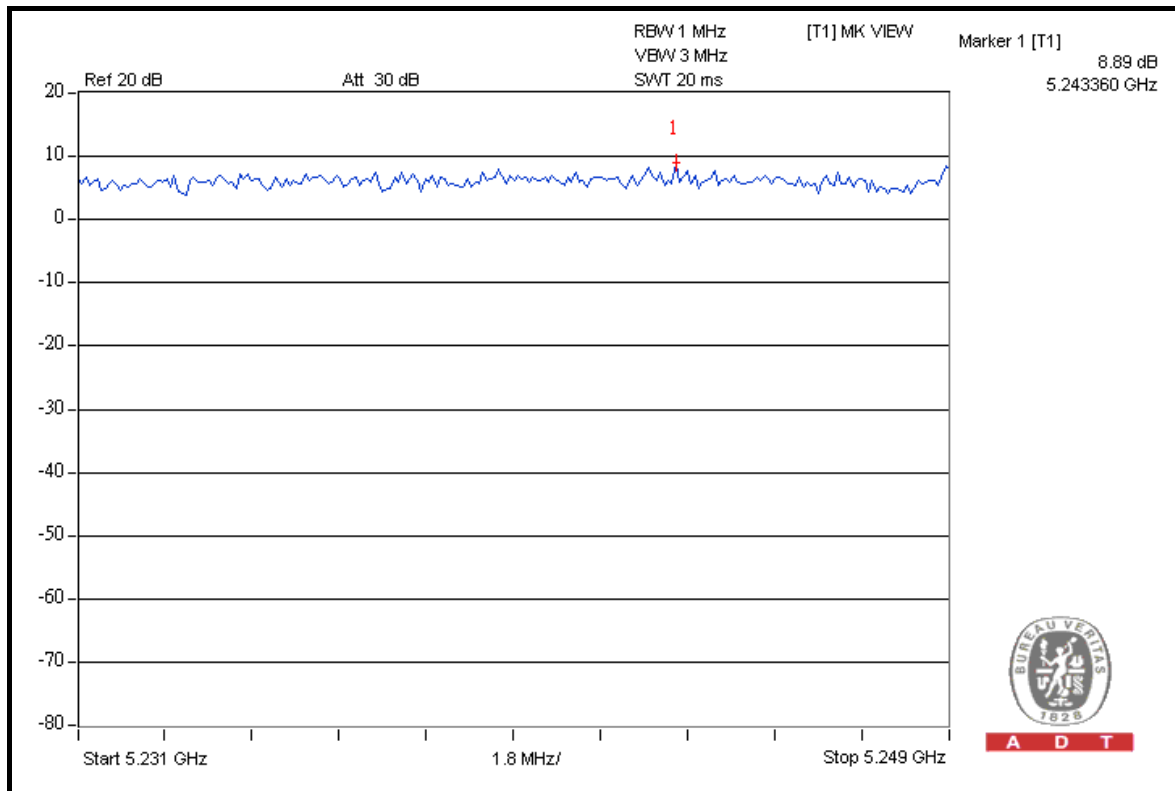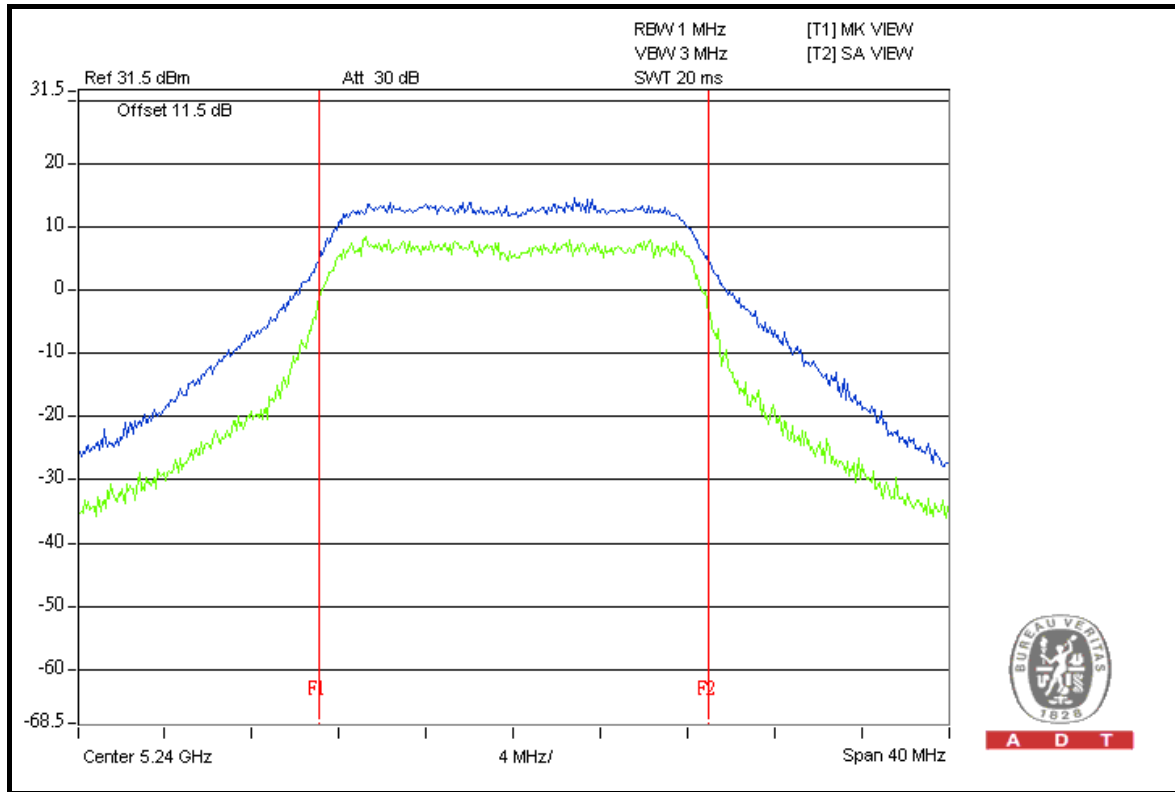




A D T

### FOR CHAIN 1: CH 36

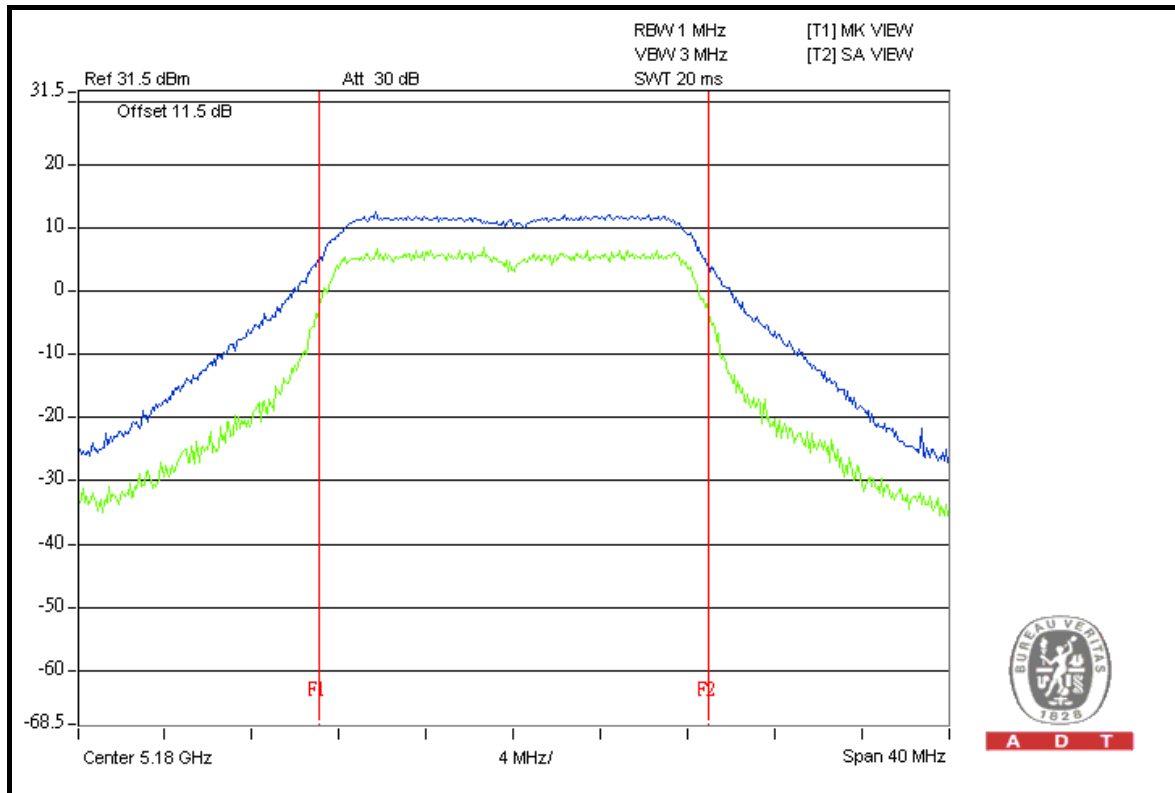

A D T

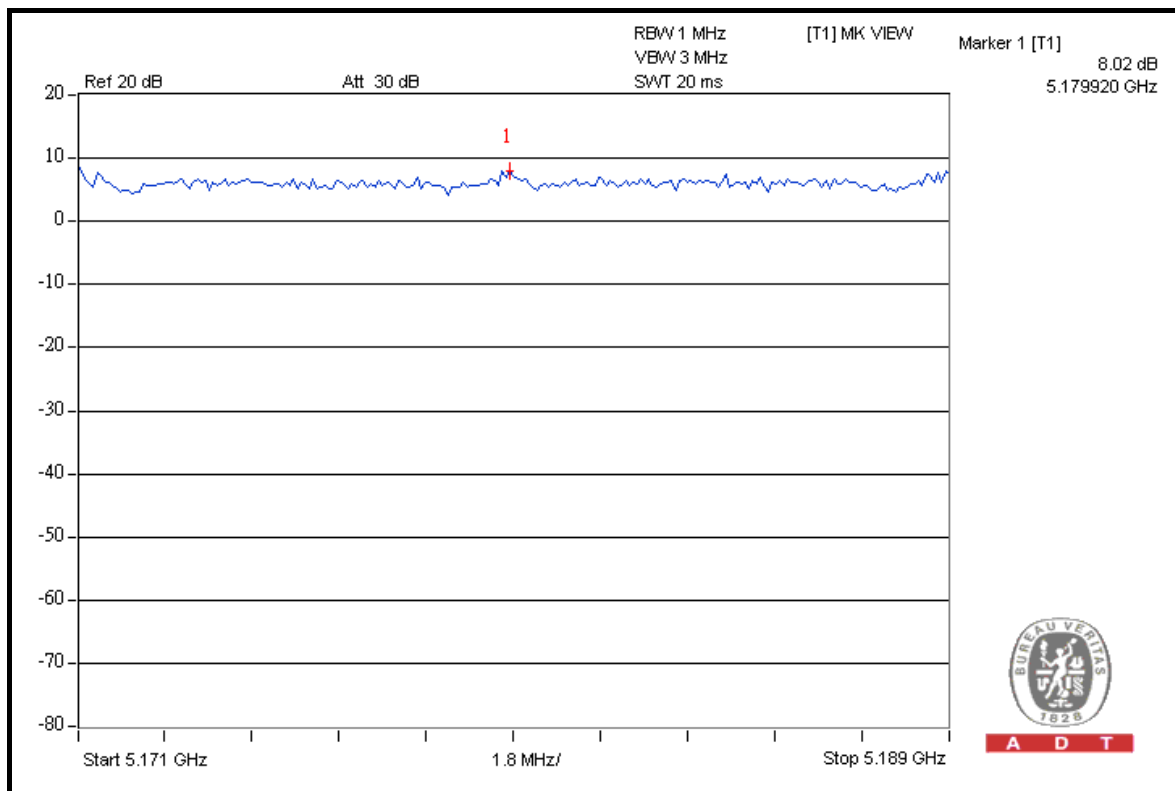


A D T






A D T

### CH 40

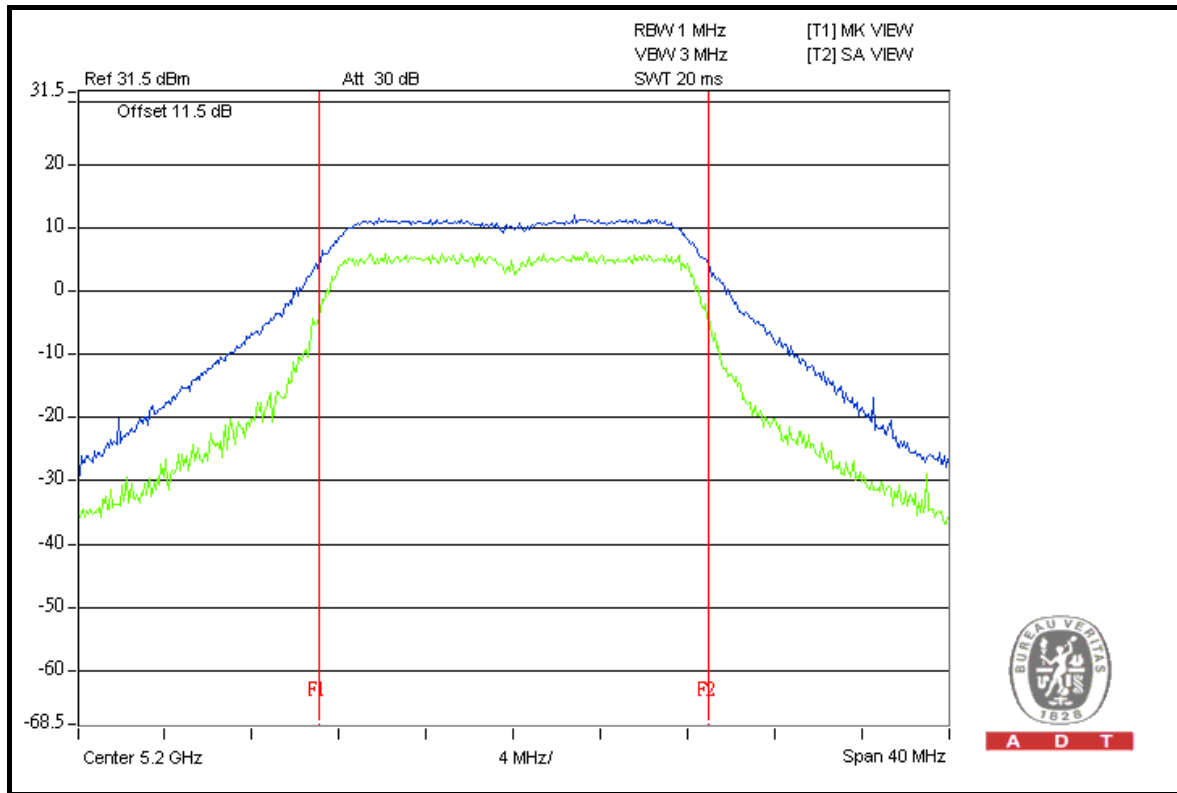

A D T


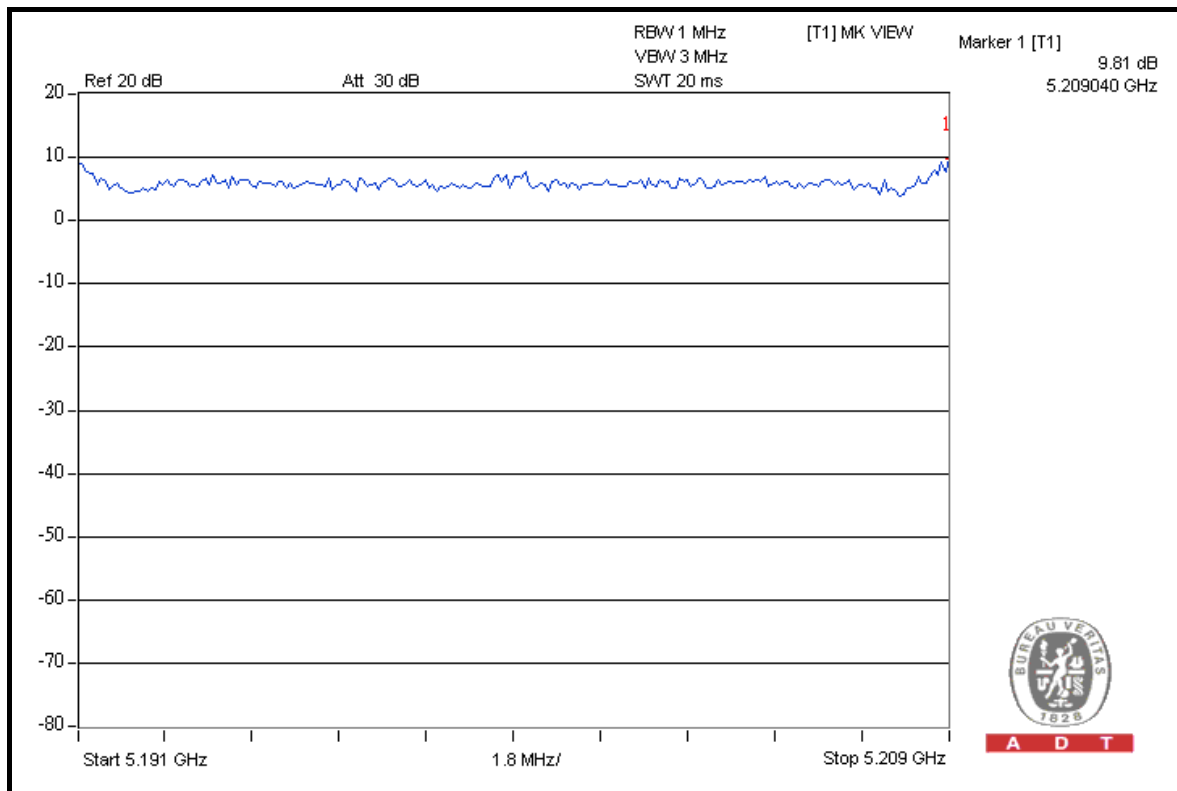


A D T



A D T

### CH 48

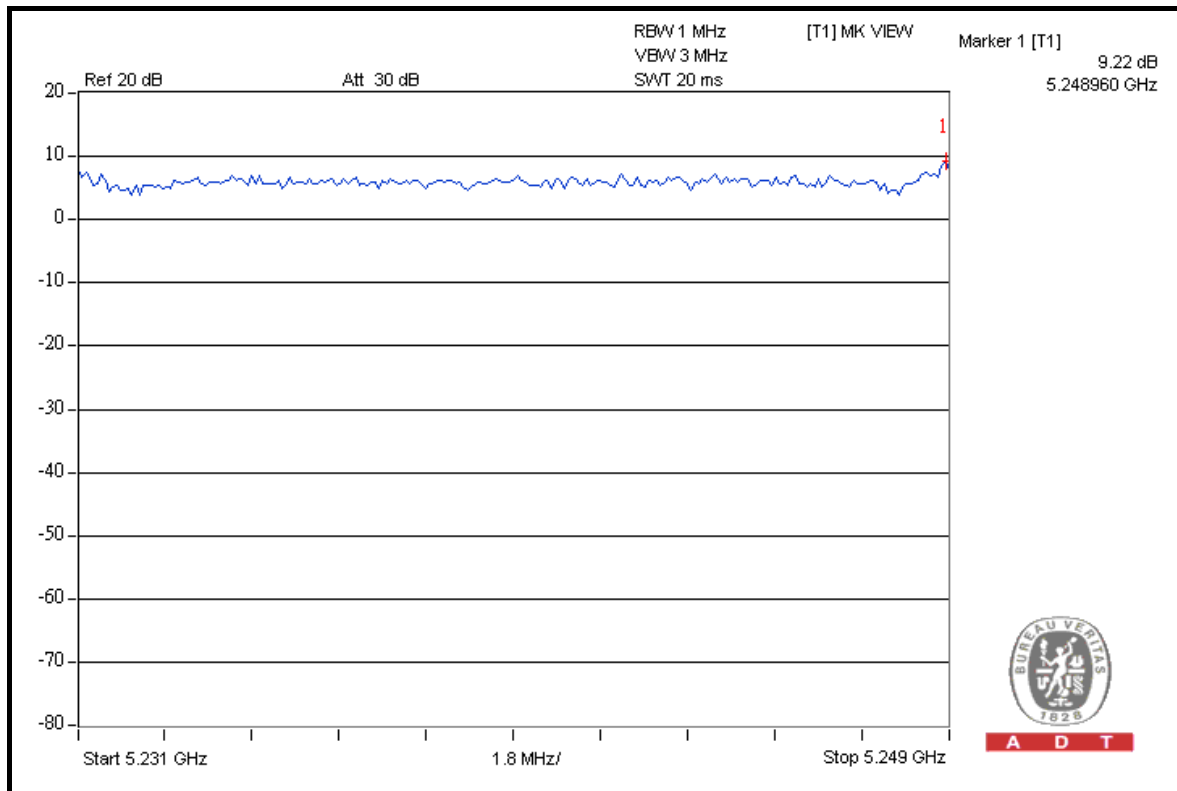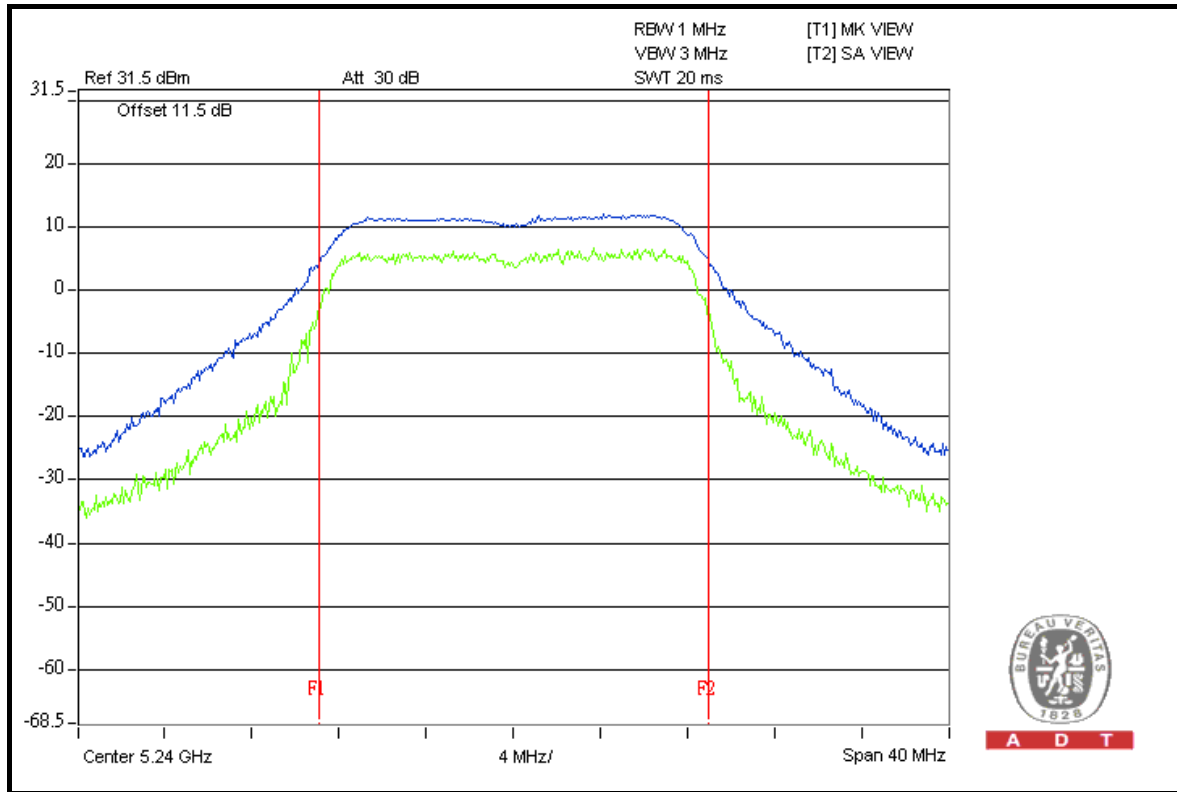



A D T

### DRAFT 802.11n (20MHz) OFDM MODULATION



<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	7.2Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)		PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
		CHAIN 0	CHAIN 1		
36	5180	7.85	8.12	13	PASS
40	5200	7.26	7.40	13	PASS
48	5240	8.44	8.10	13	PASS



A D T



FOR CHAIN 0: CH 36

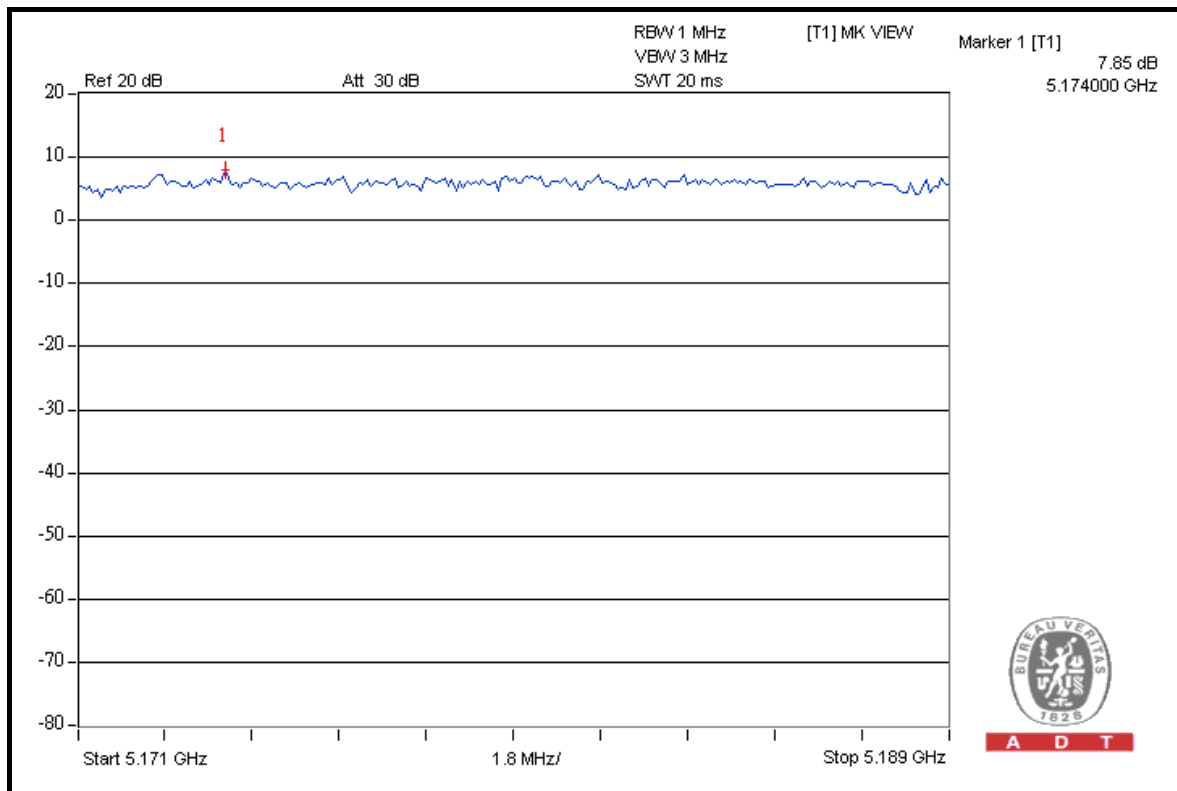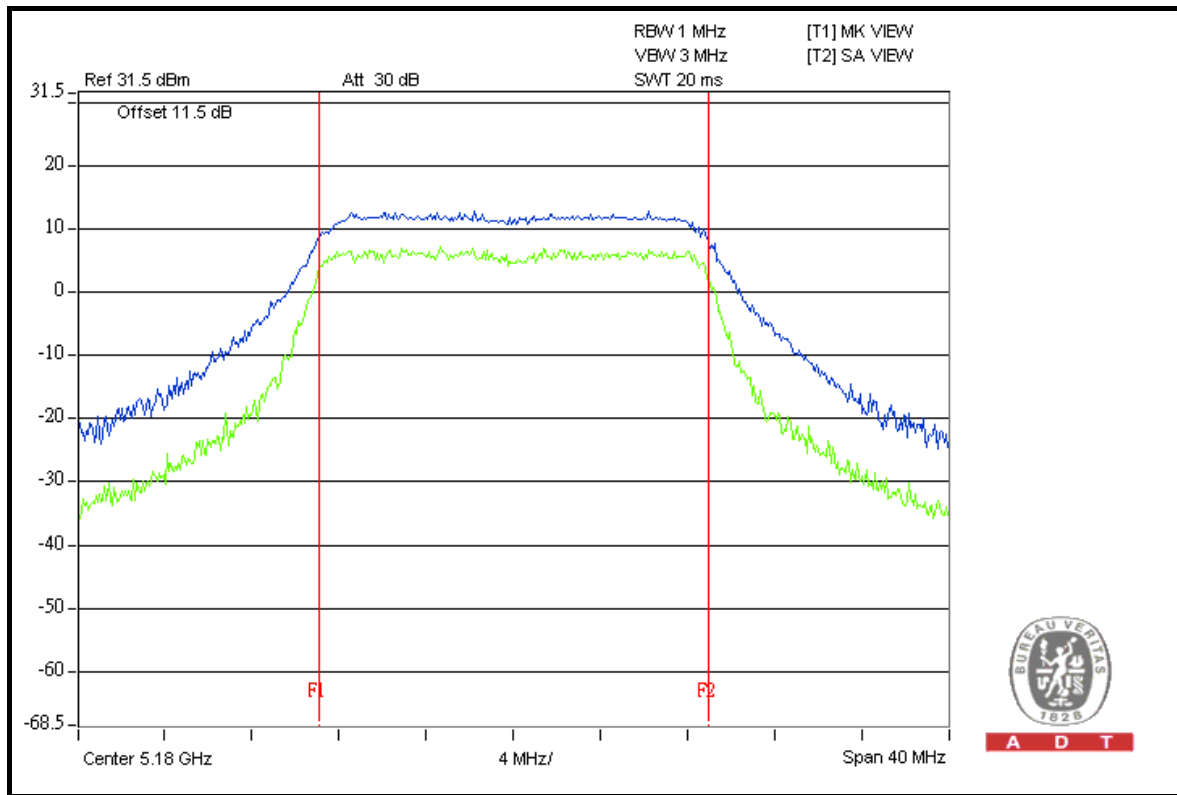



A D T


### CH 40

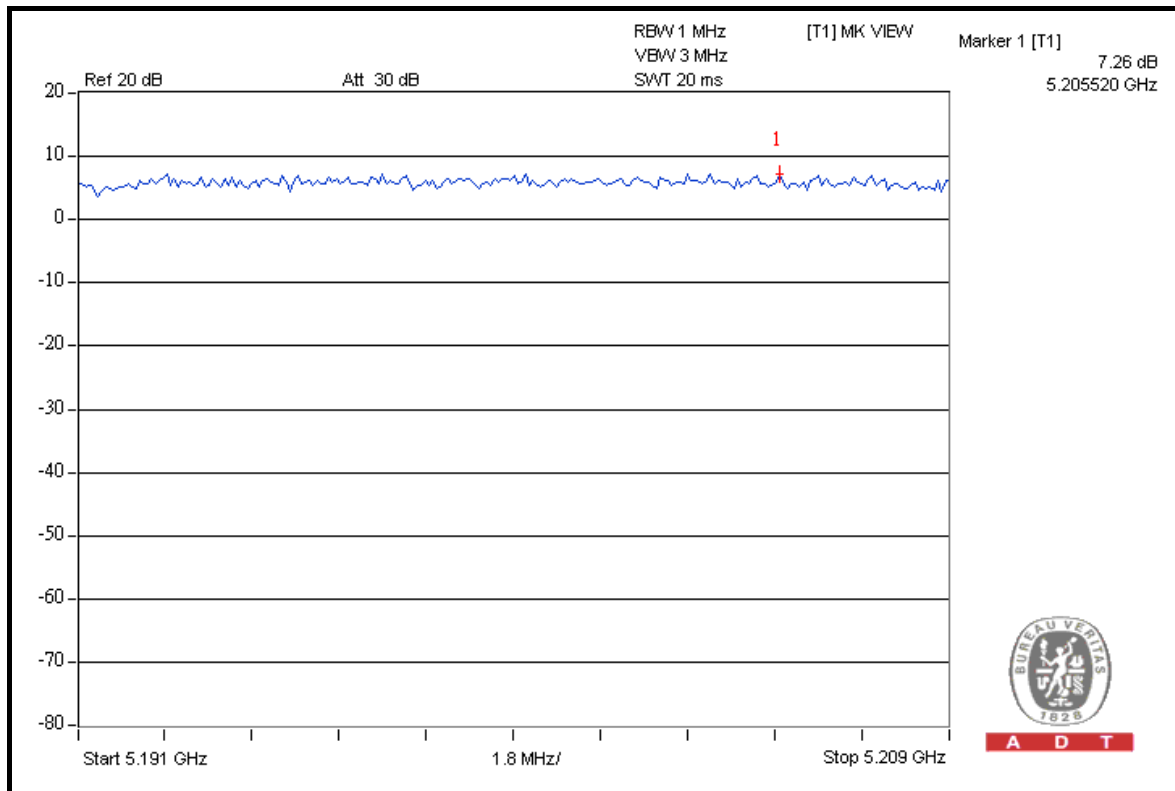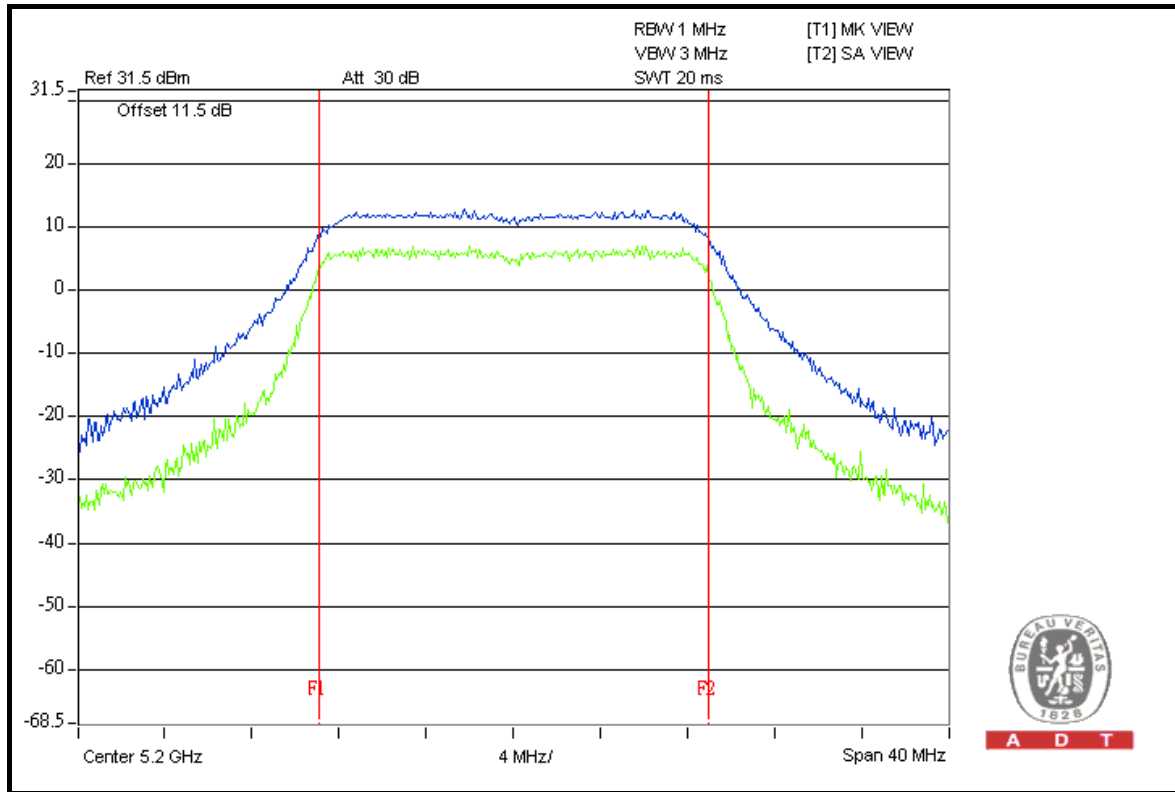




A D T

### CH 48

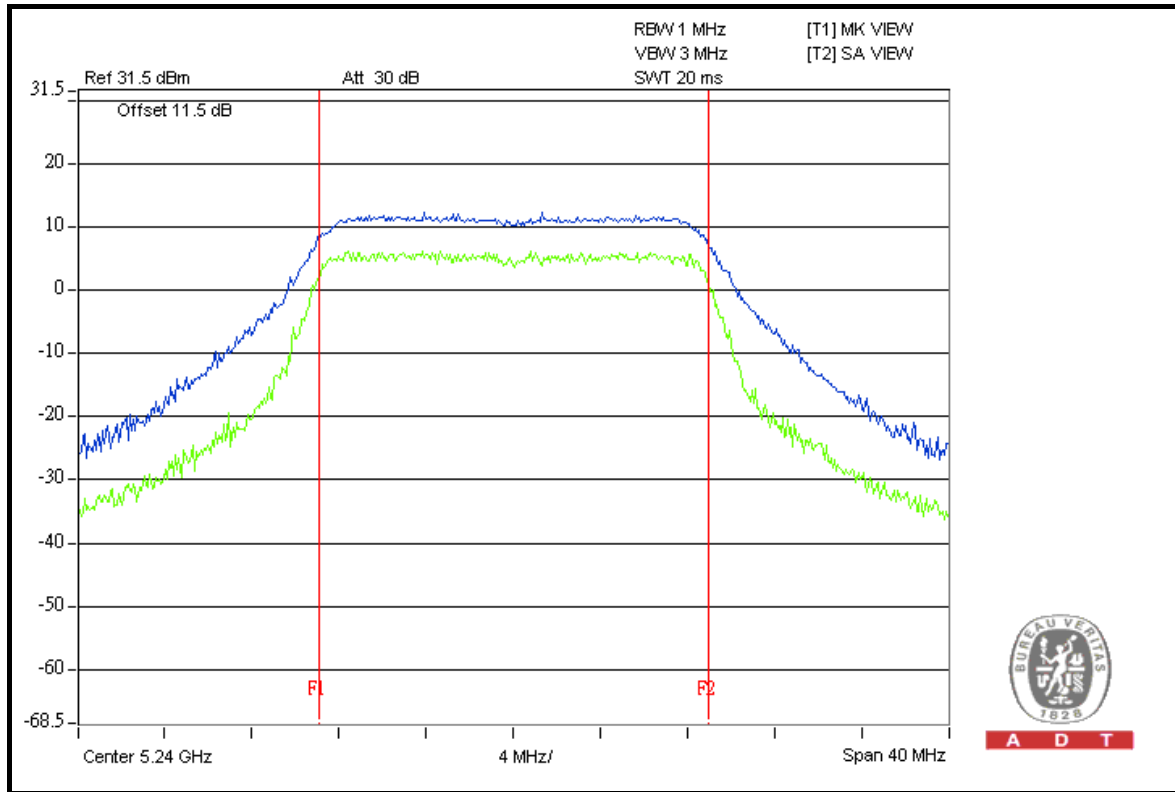

A D T

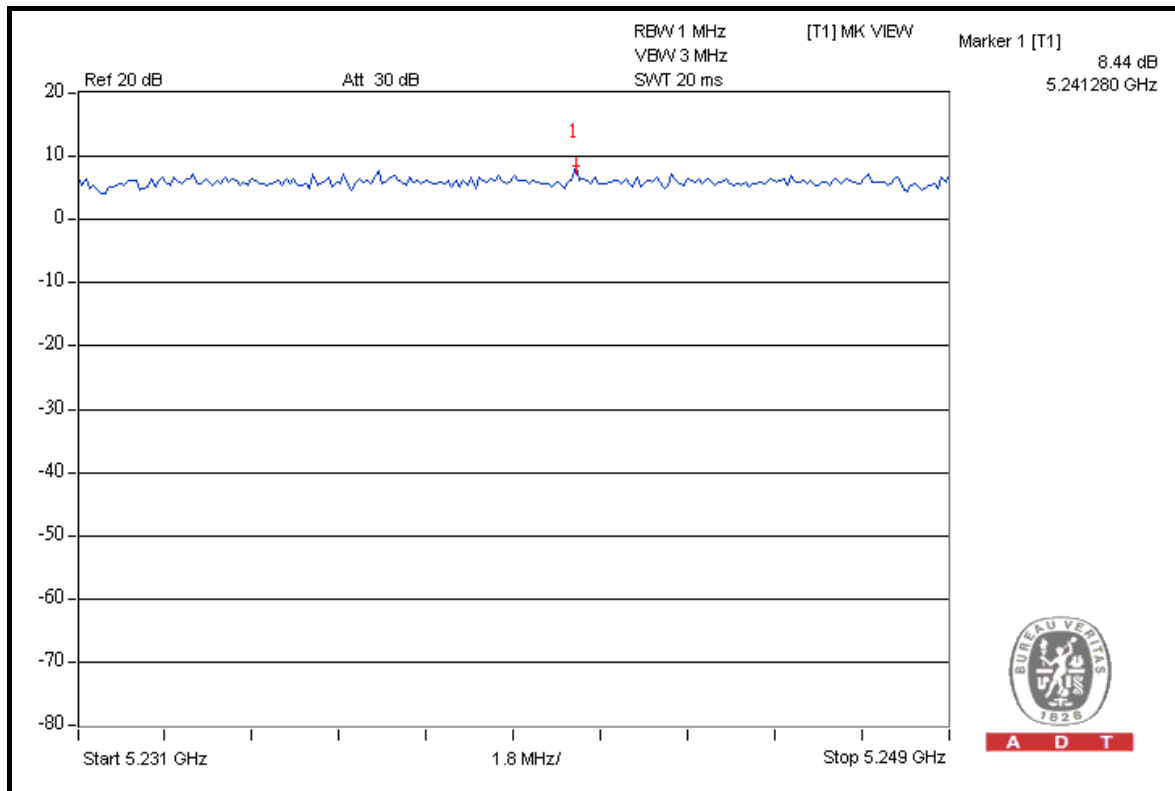


A D T




A D T

### FOR CHAIN 1: CH 36

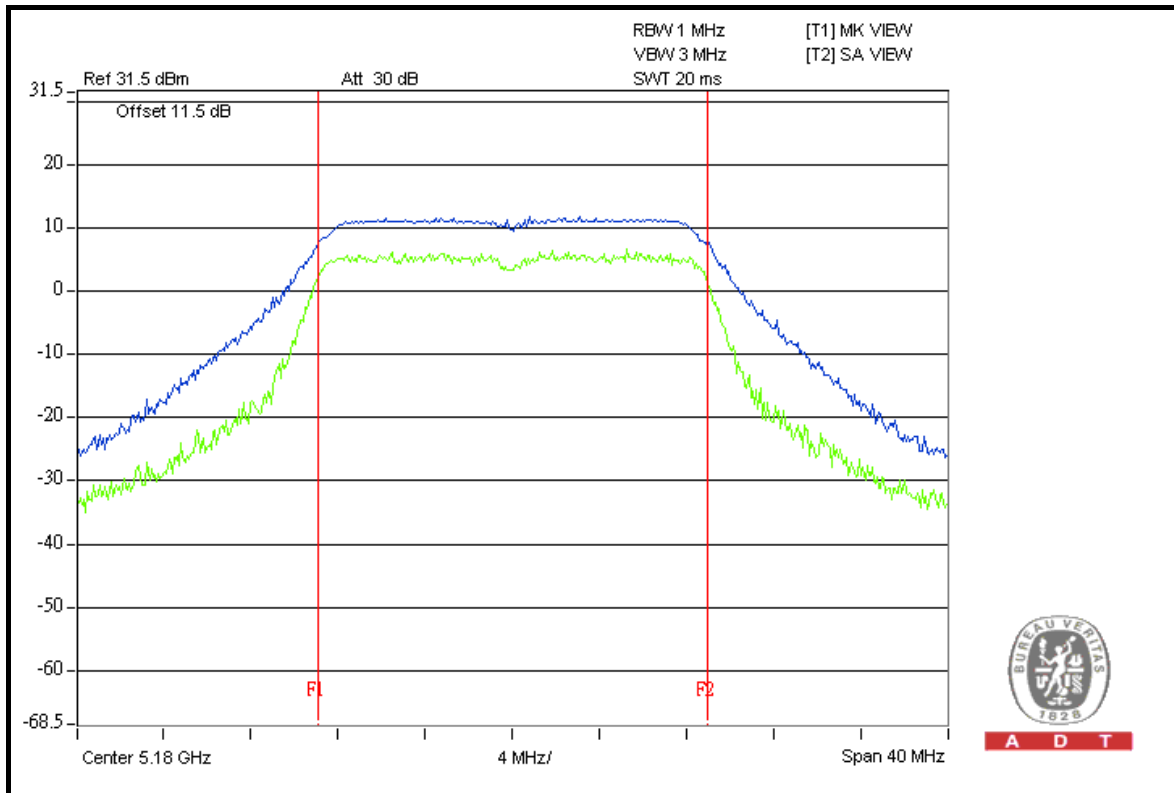

A D T


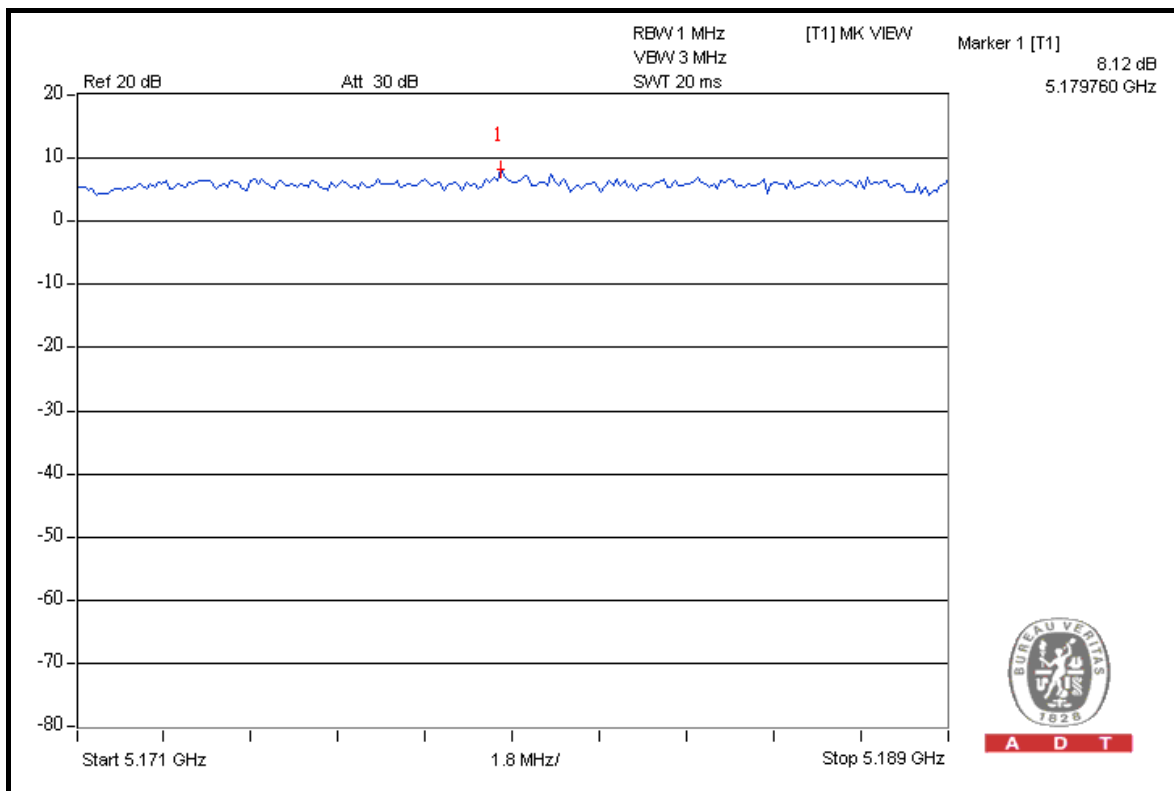


A D T



A D T

### CH 40

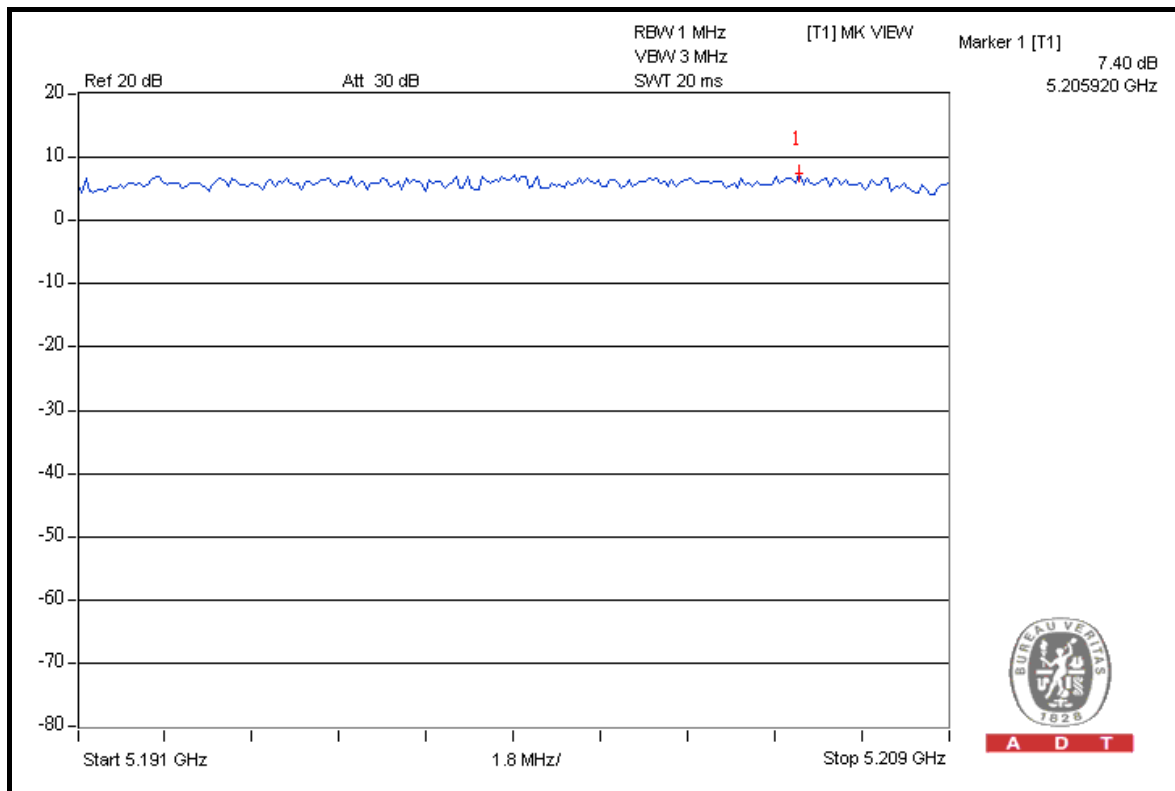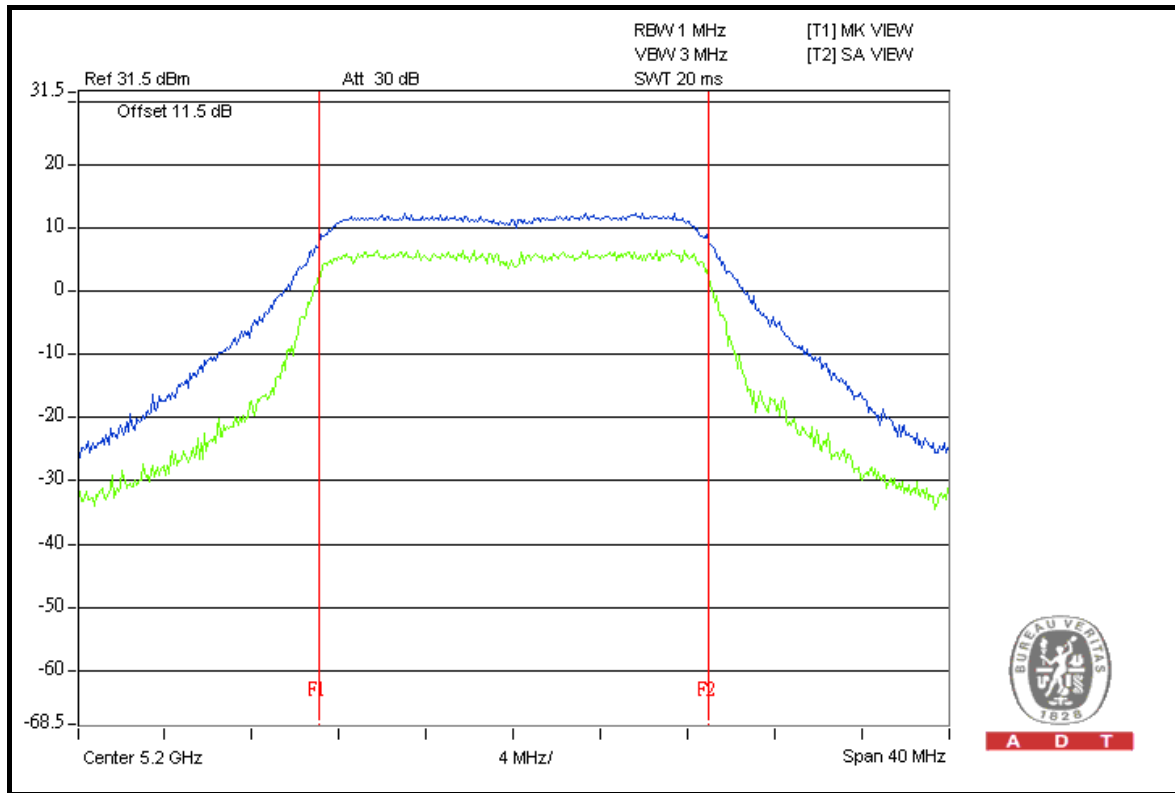







A D T

### CH 48

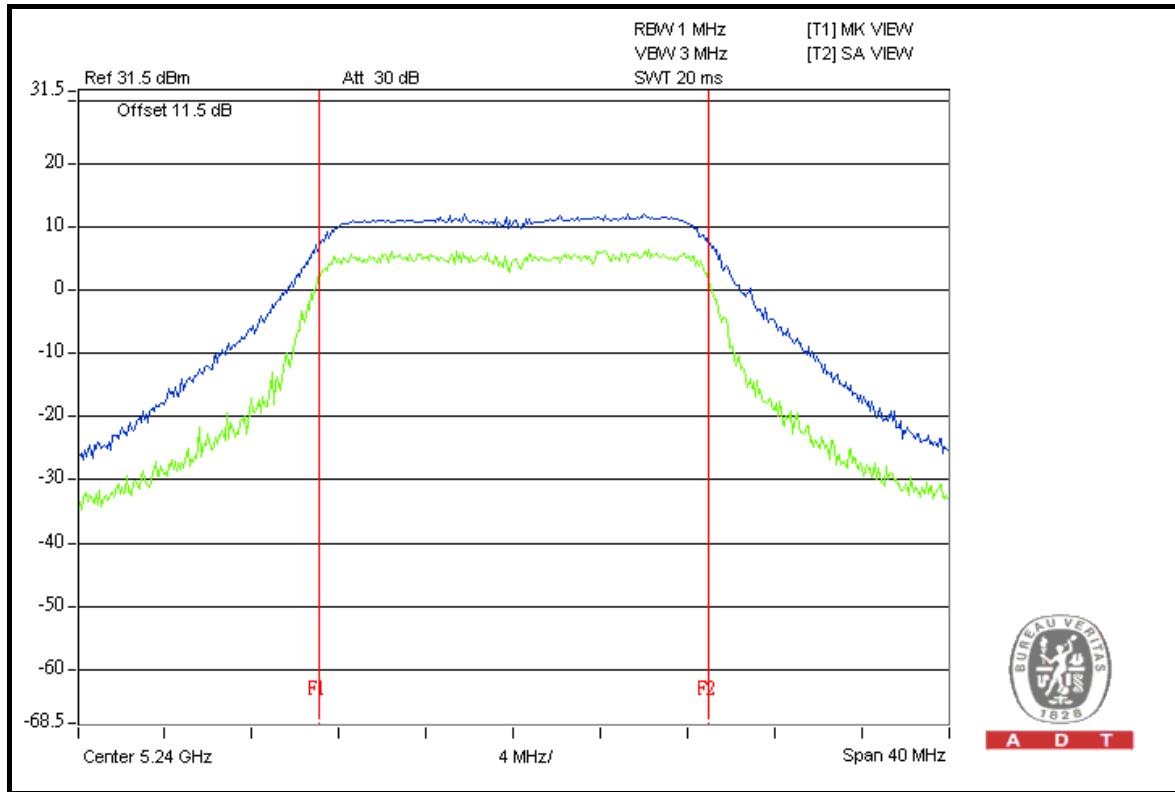

A D T

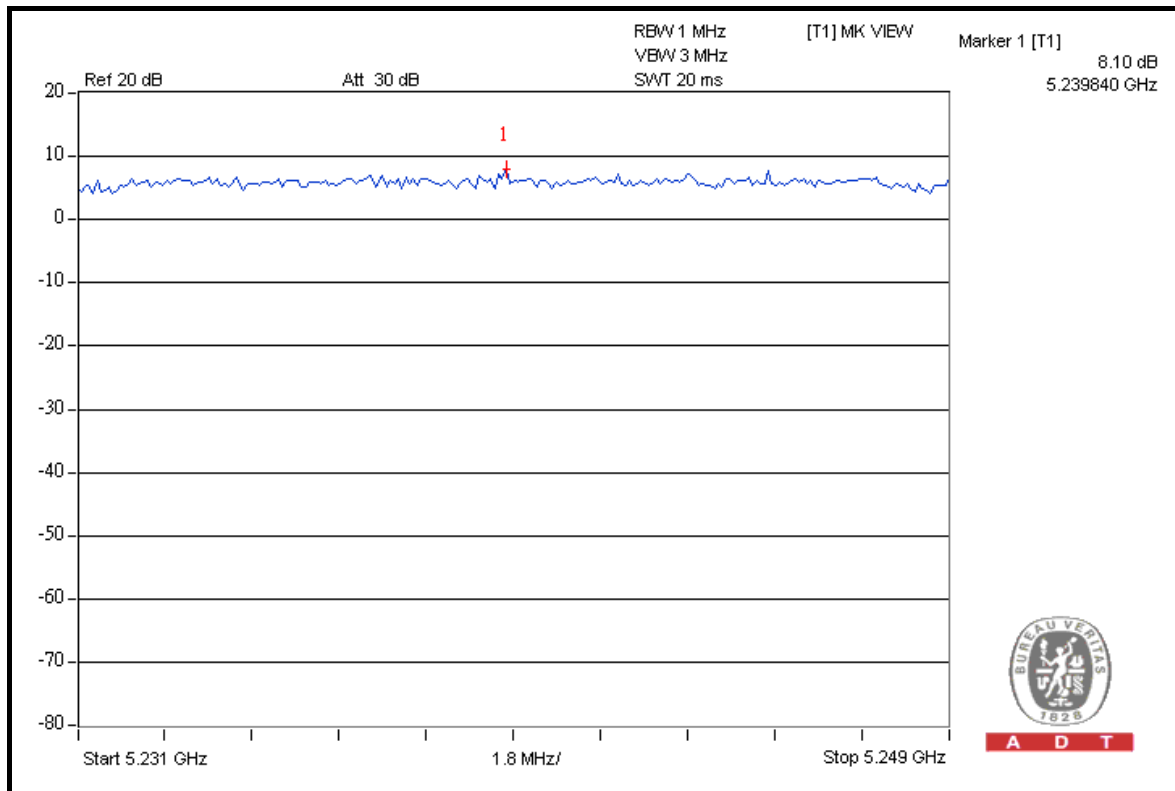

A D T



A D T

### DRAFT 802.11n (40MHz) OFDM MODULATION



<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	15.0Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)		PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
		CHAIN 0	CHAIN 1		
38	5190	8.07	8.20	13	PASS
46	5230	8.93	9.22	13	PASS



A D T


### FOR CHAIN 0: CH 38

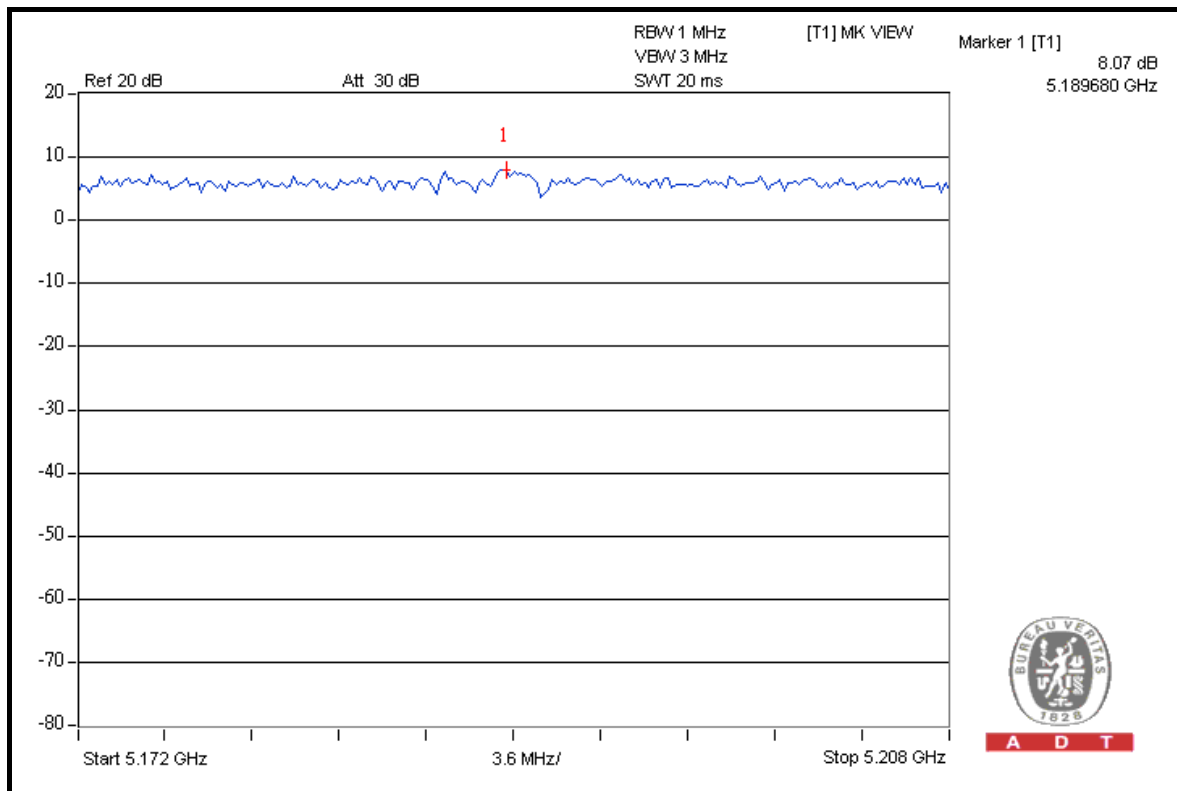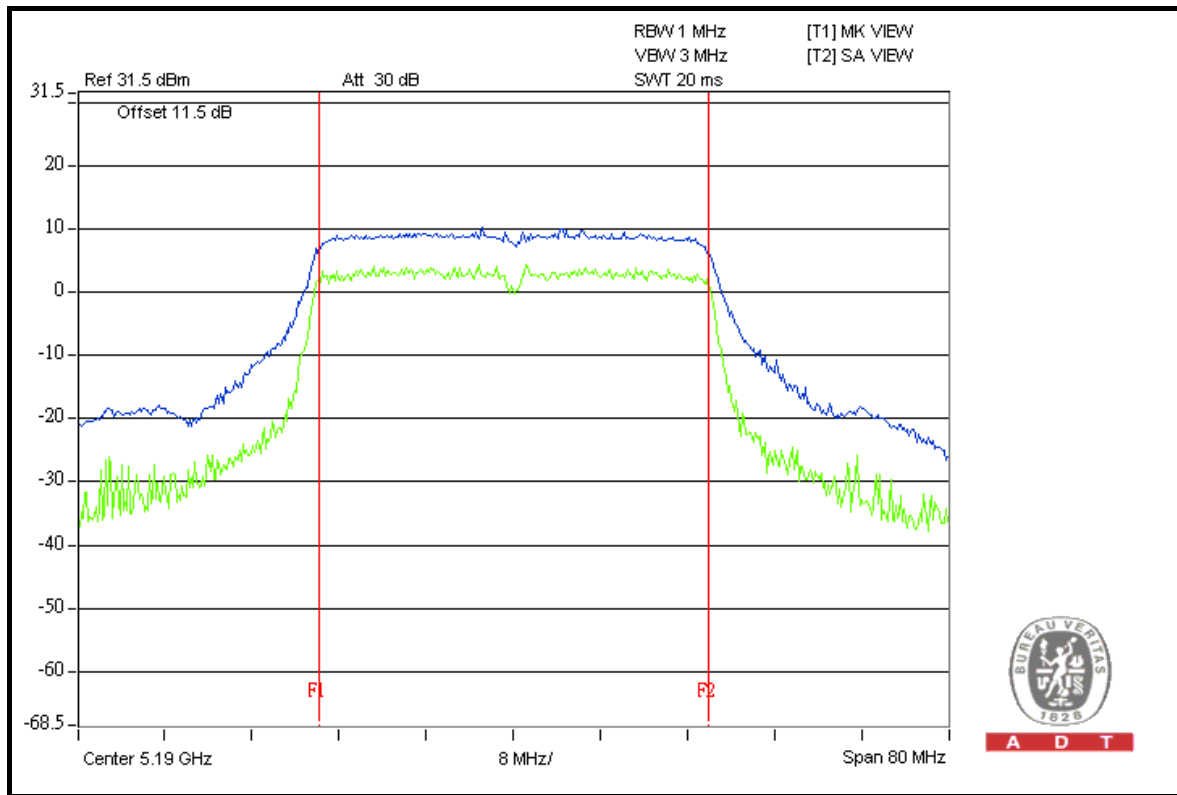




A D T

### CH 46

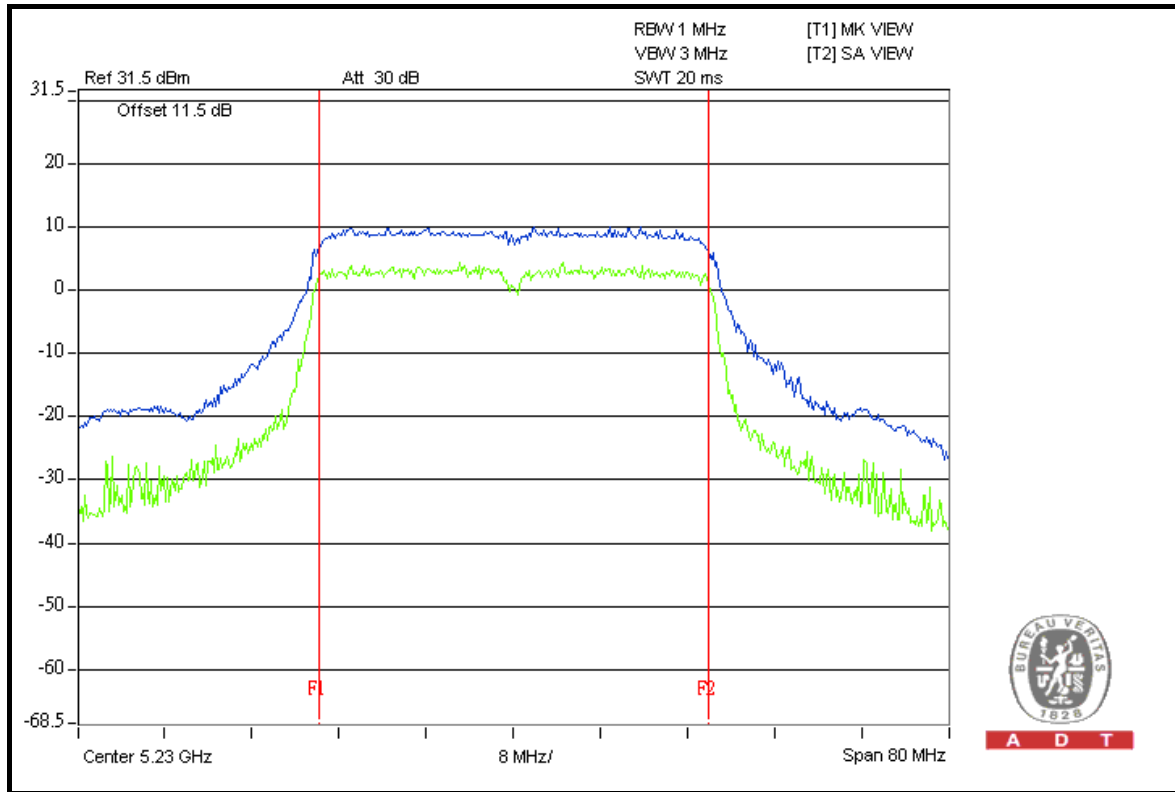

A D T

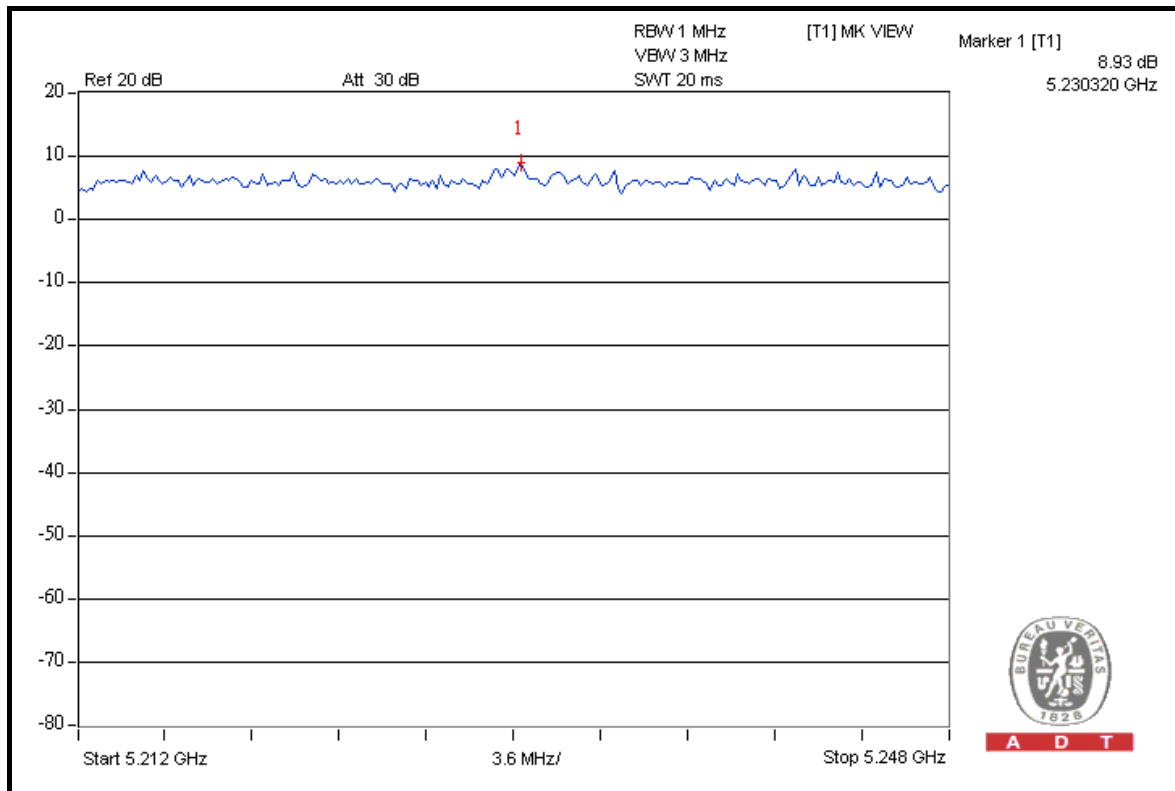


A D T




A D T

### FOR CHAIN 1: CH 38

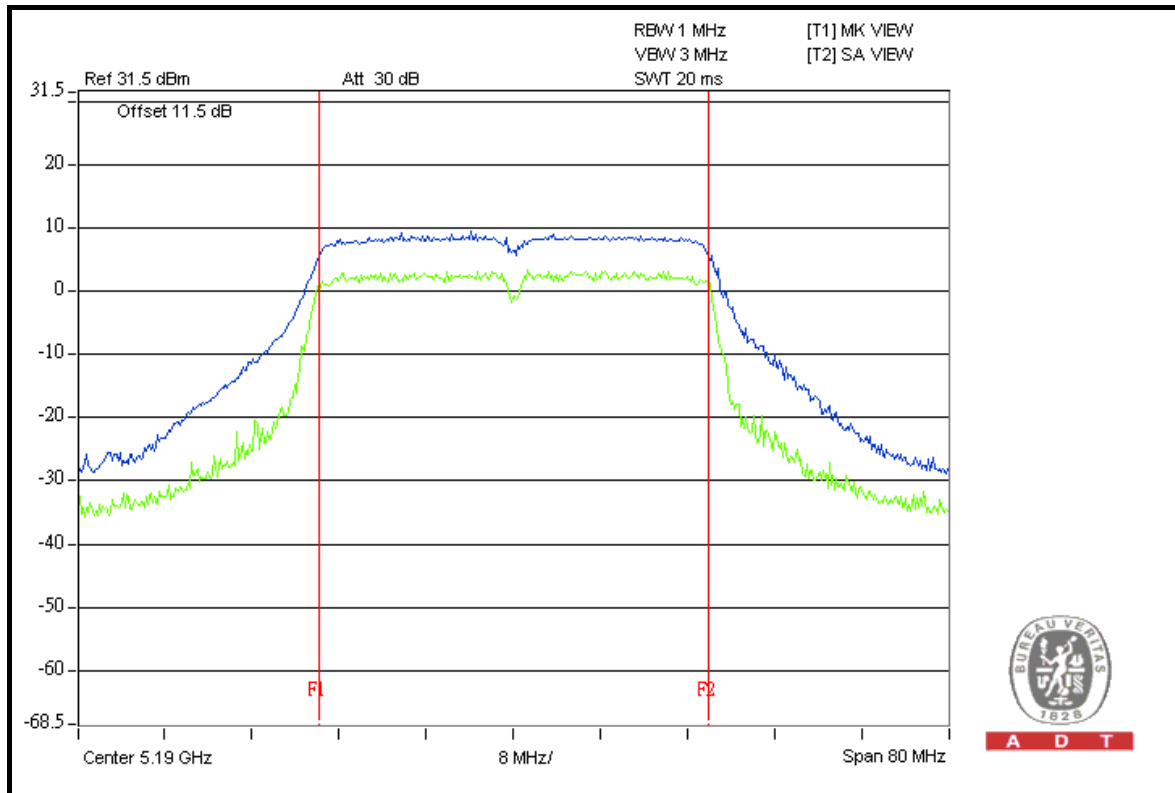

A D T


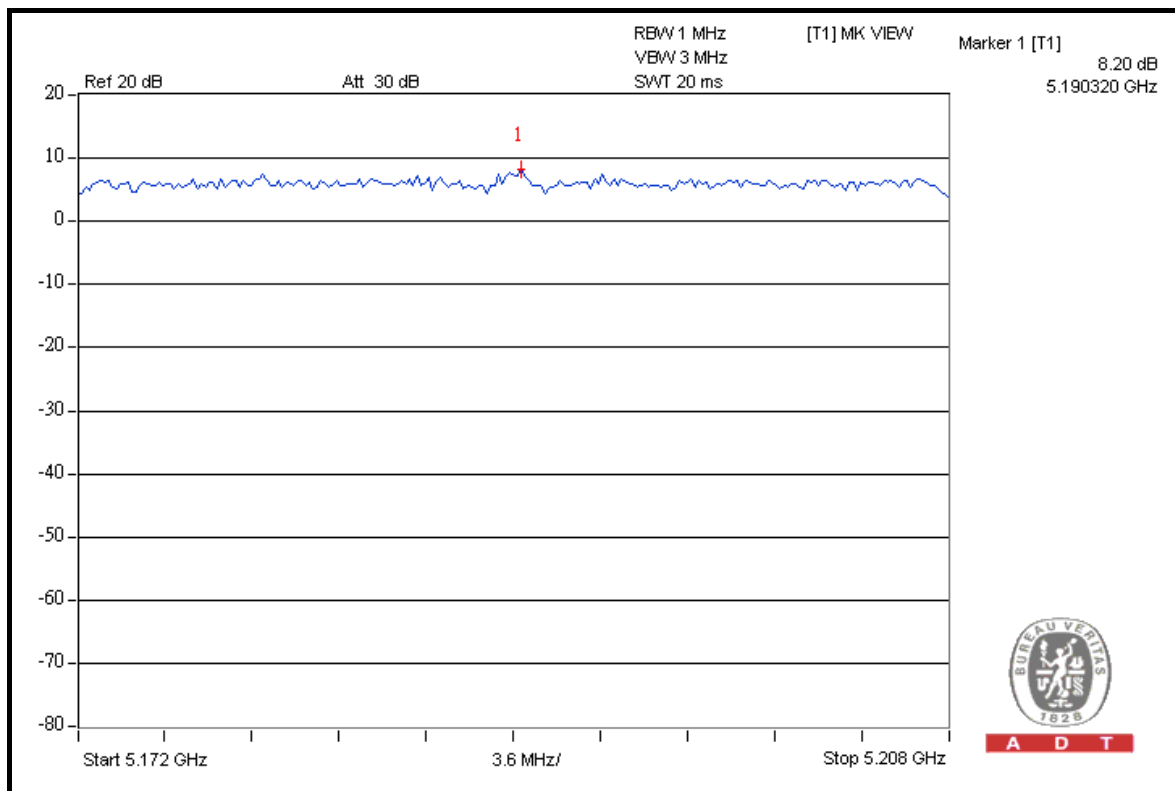


A D T



A D T

### CH 46

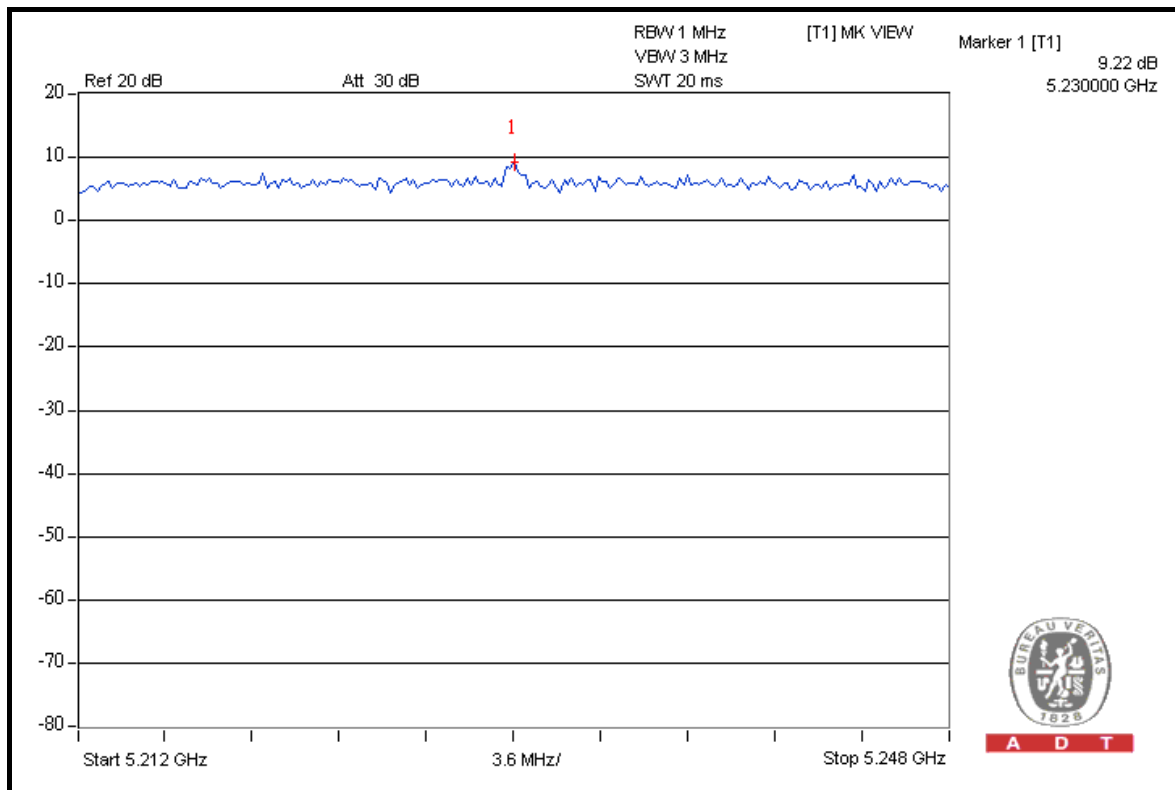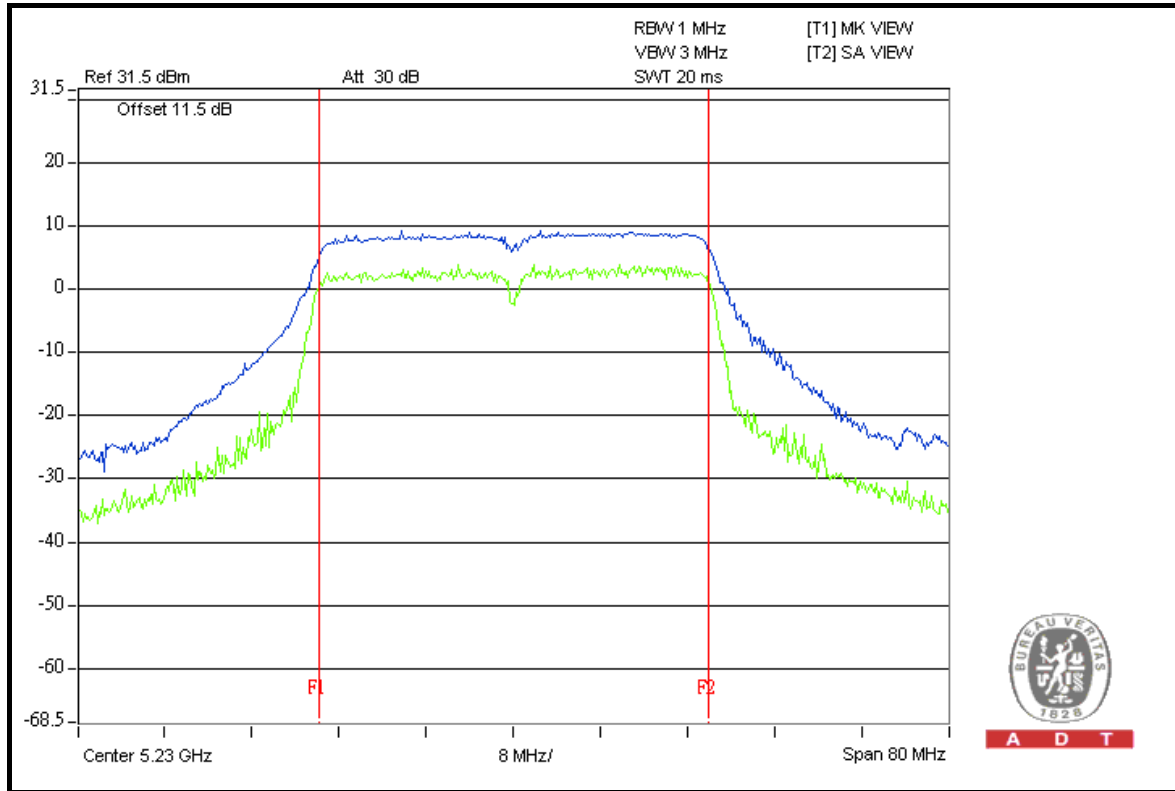

## 4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	4dBm

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.5.3 TEST PROCEDURES

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW = 1MHz, VBW = 3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.5.5 TEST SETUP

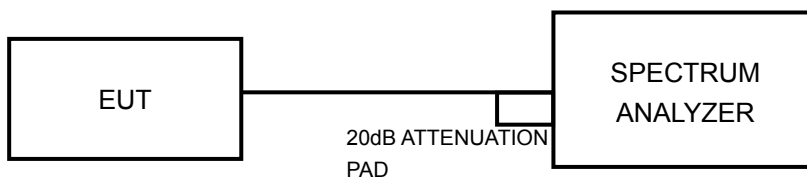

#### 4.5.6 EUT OPERATING CONDITIONS

Same as 4.4.6.



#### 4.5.7 TEST RESULTS

##### 802.11a OFDM MODULATION


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6.0Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	0.88	0.63	2.381	3.77	4	PASS
40	5200	0.67	0.80	2.369	3.75	4	PASS
48	5240	0.21	0.92	2.285	3.59	4	PASS




A D T

### FOR CHAIN 0: CH 36

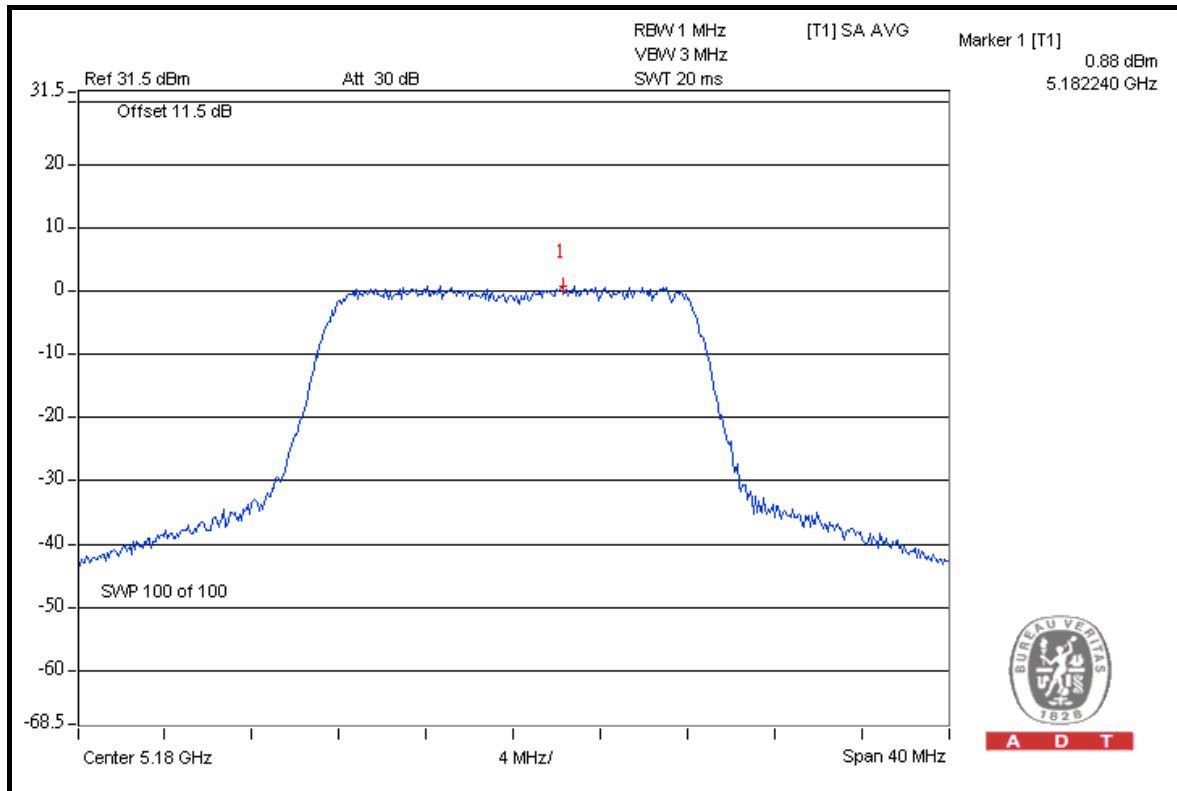


### CH 40

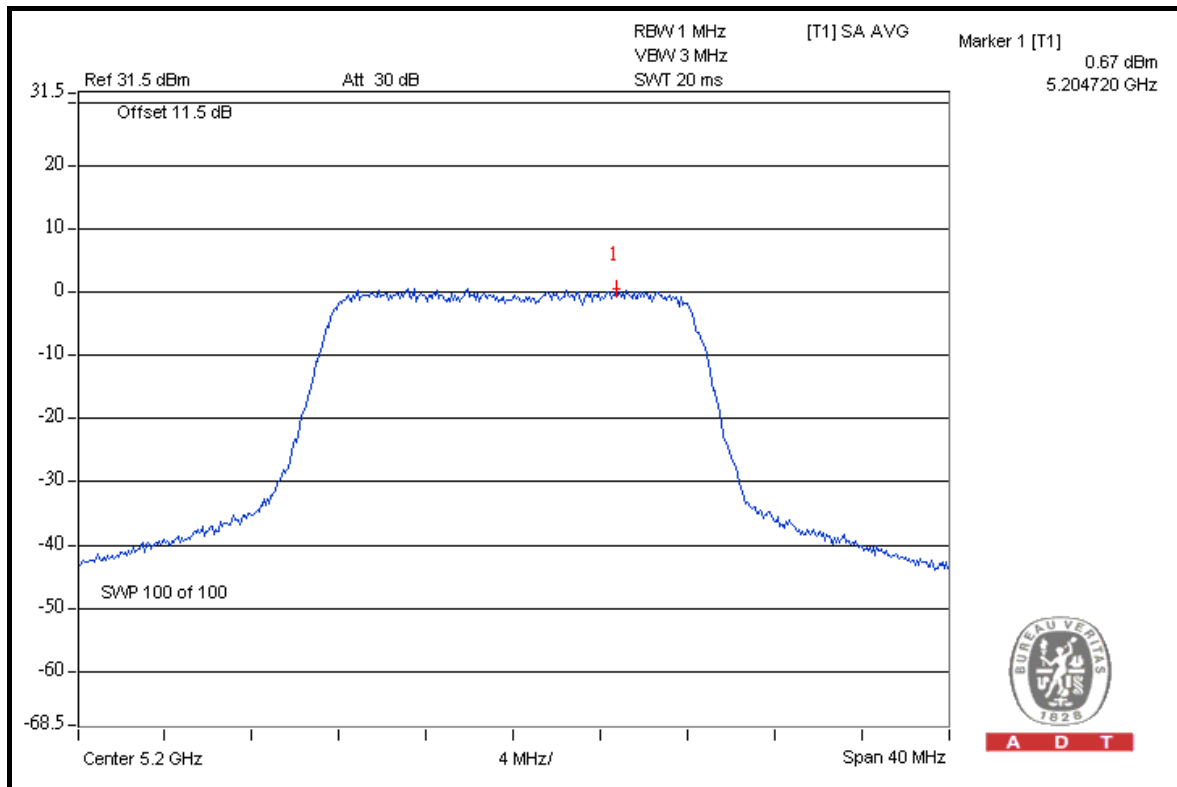




A D T

### CH 48

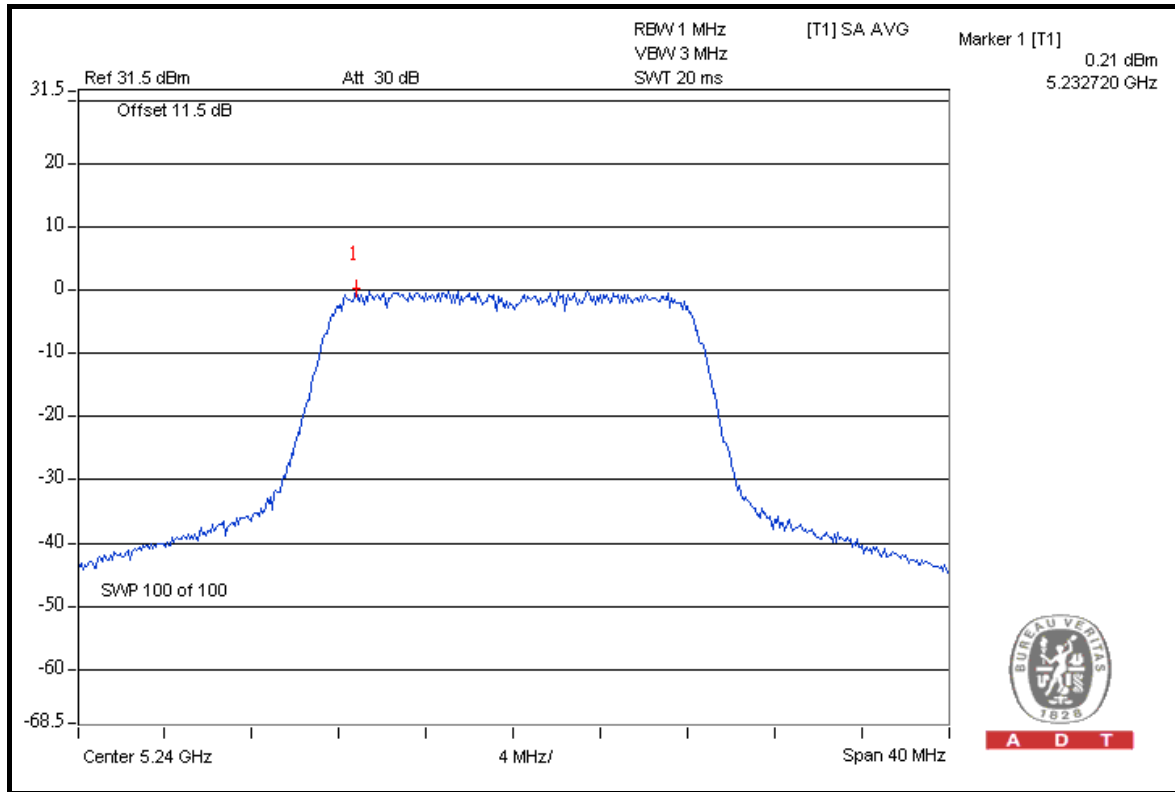


### FOR CHAIN 1: CH 36

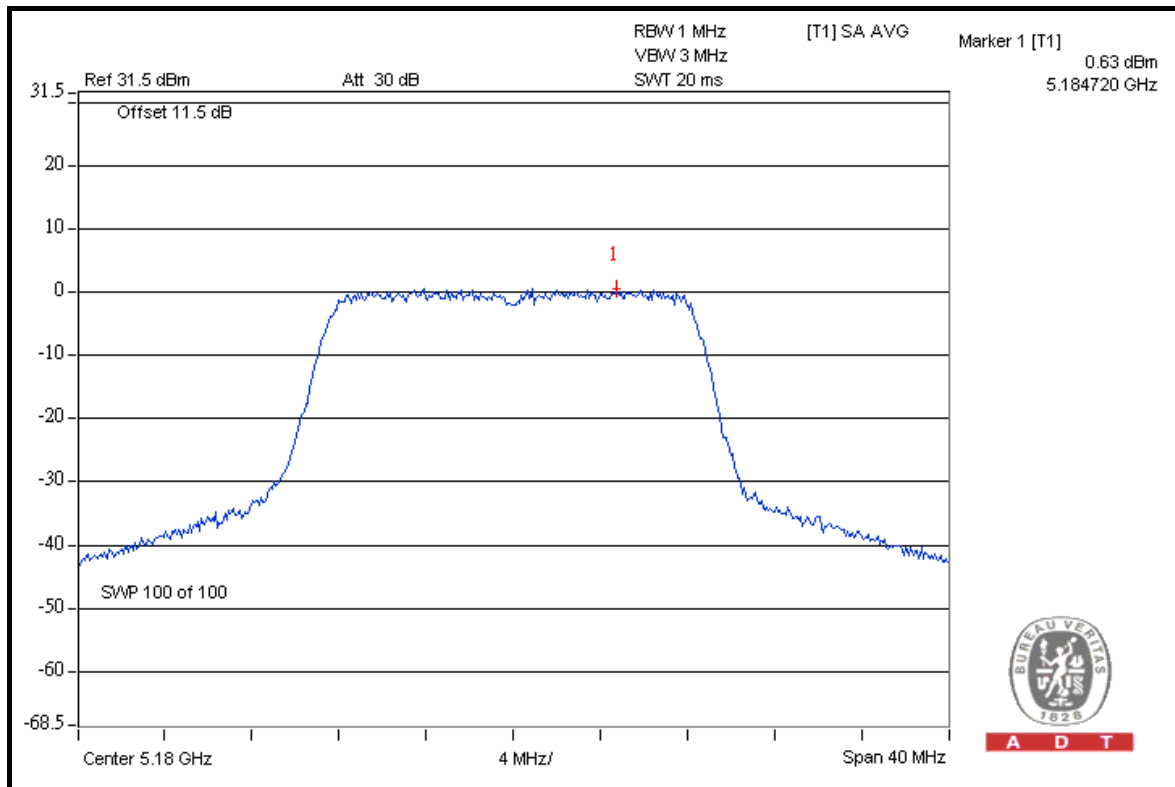




A D T

### CH 40

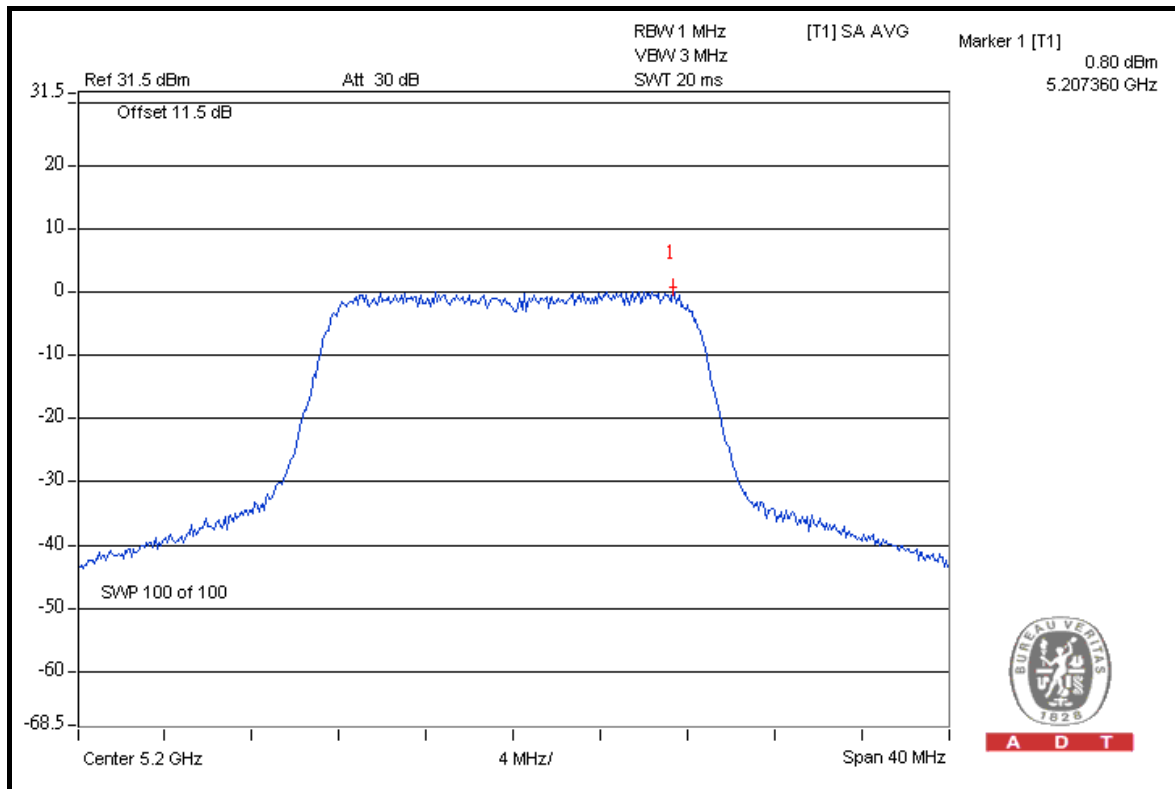

### CH 48

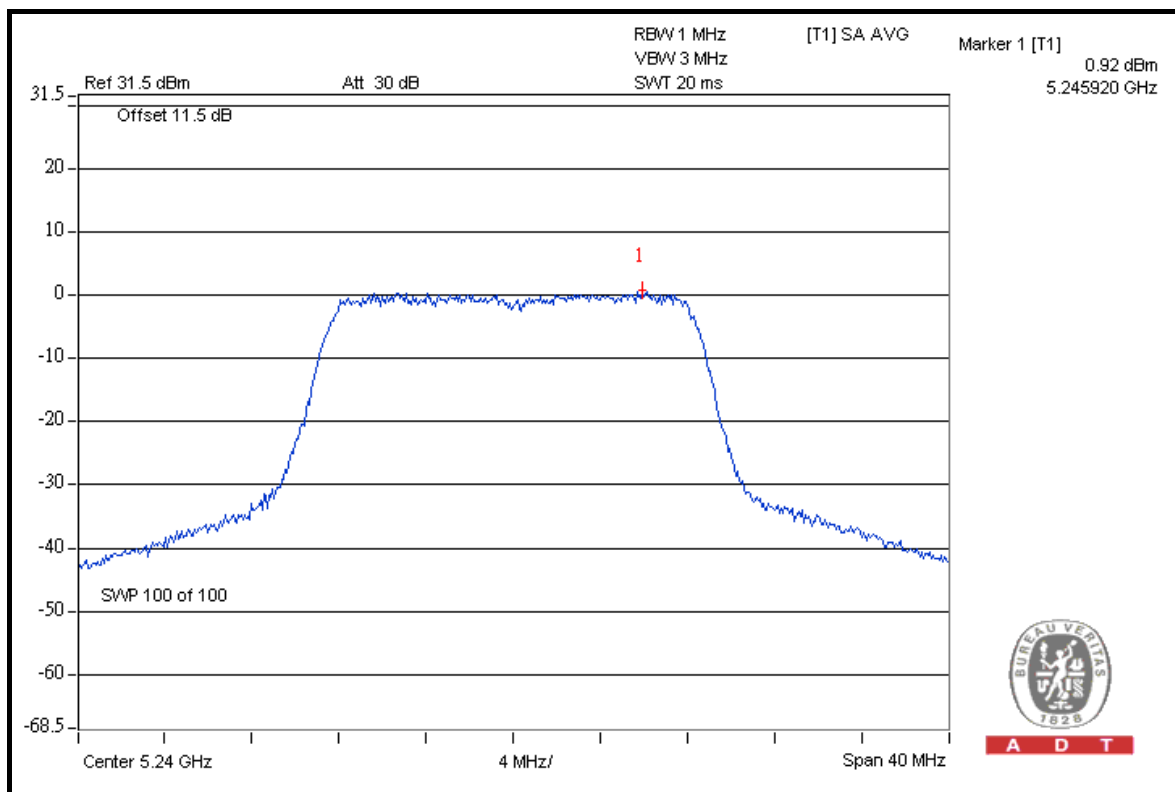



A D T

### DRAFT 802.11n (20MHz) OFDM MODULATION


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	7.2Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	0.97	0.50	2.372	3.75	4	PASS
40	5200	0.66	0.76	2.355	3.72	4	PASS
48	5240	0.43	0.72	2.284	3.59	4	PASS




A D T

### FOR CHAIN 0: CH 36

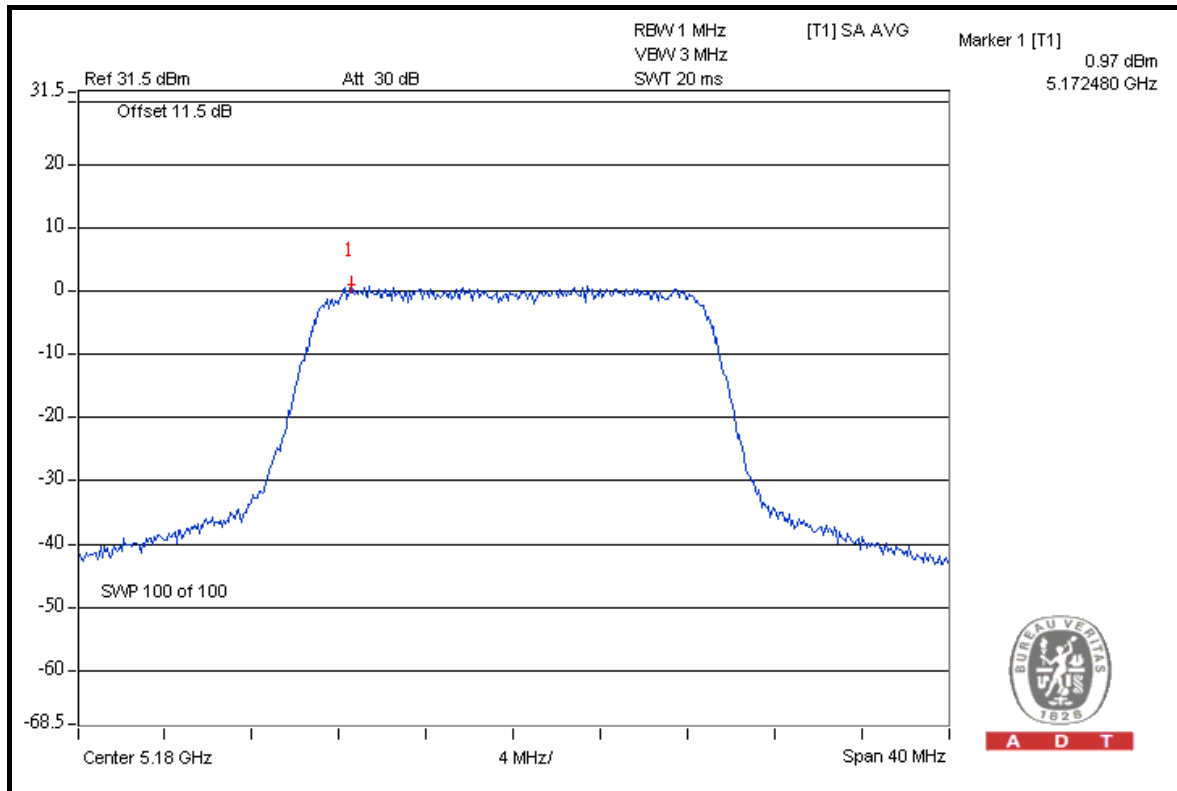


### CH 40

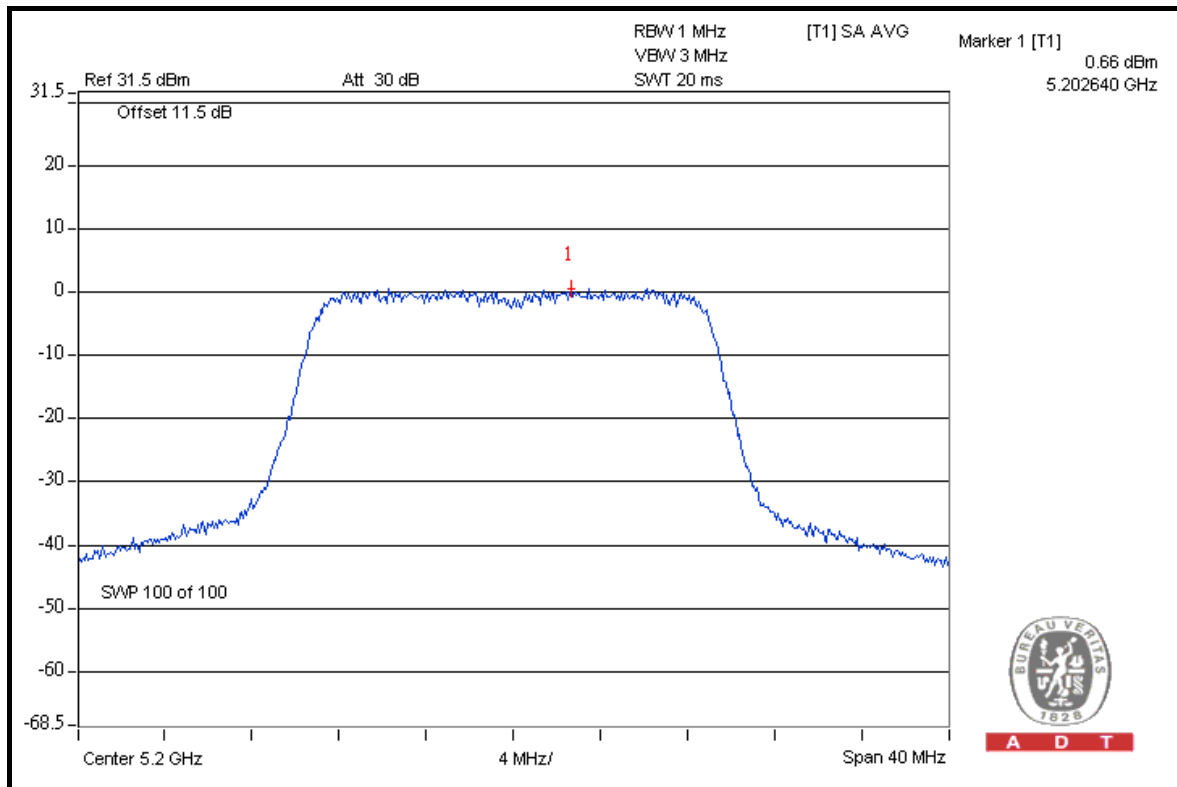




A D T

### CH 48

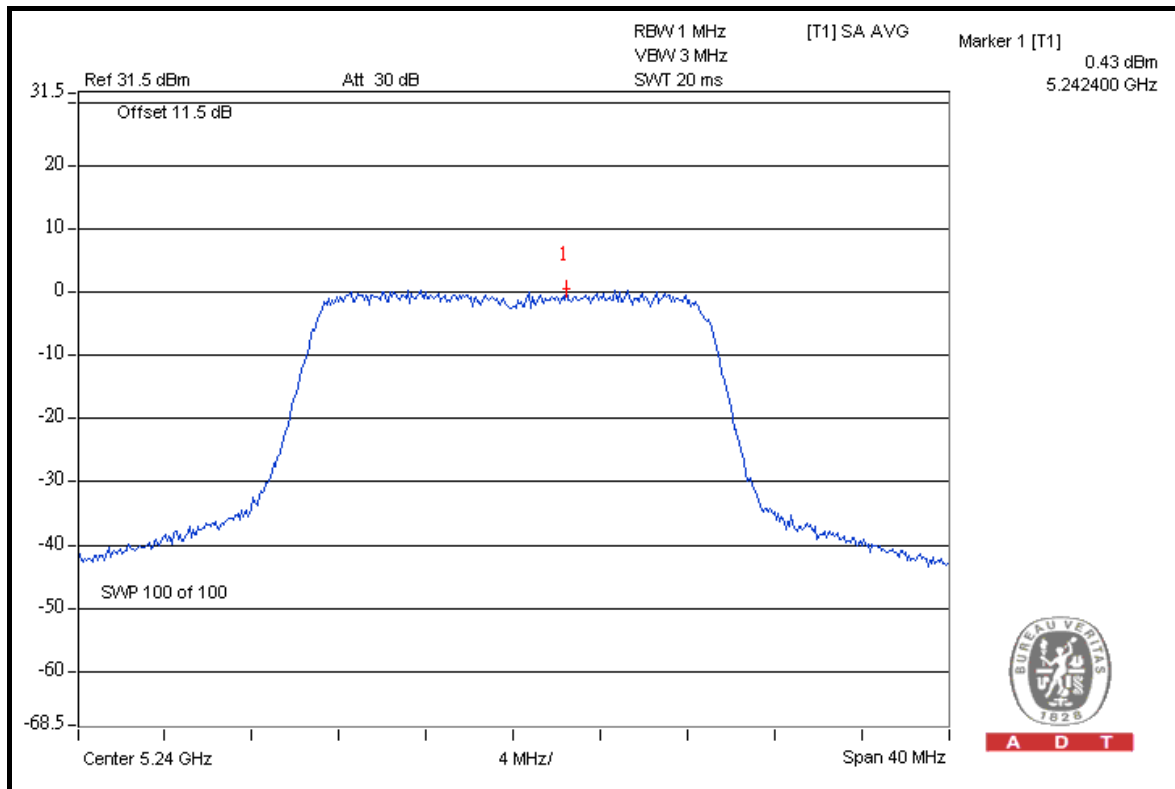

A D T

### FOR CHAIN 1: CH 36

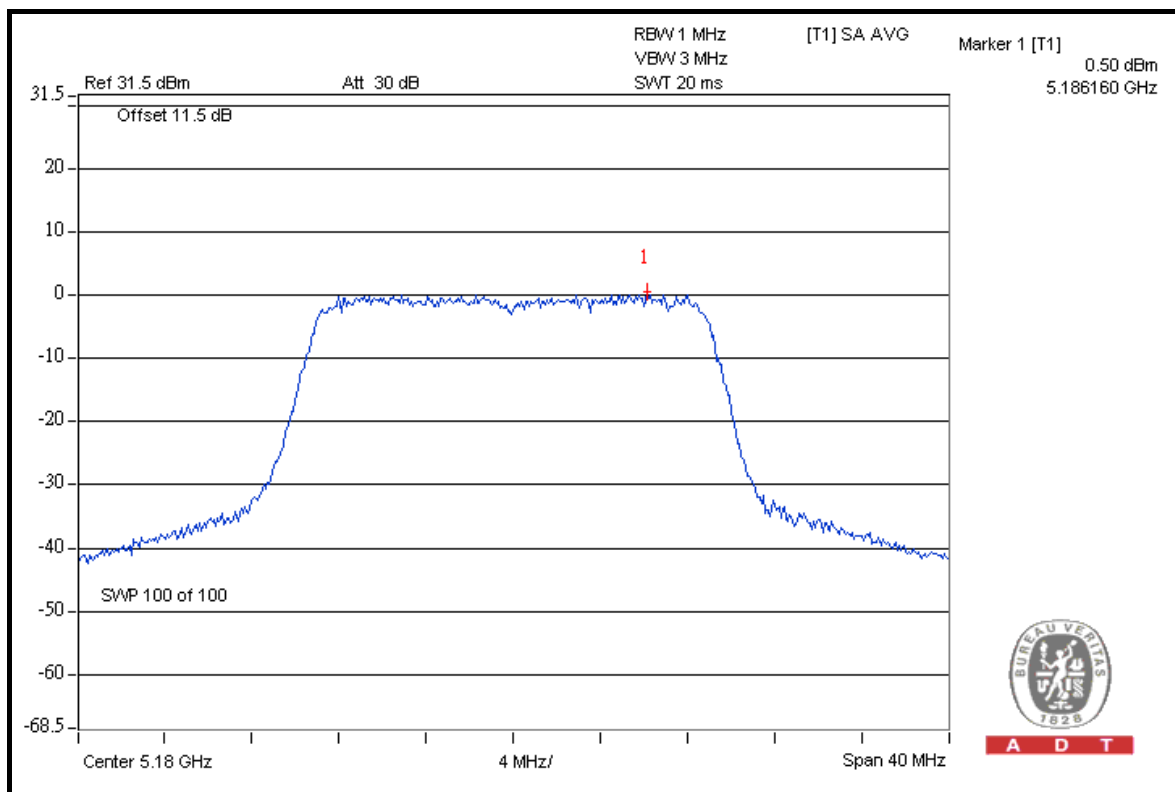


A D T




A D T

### CH 40

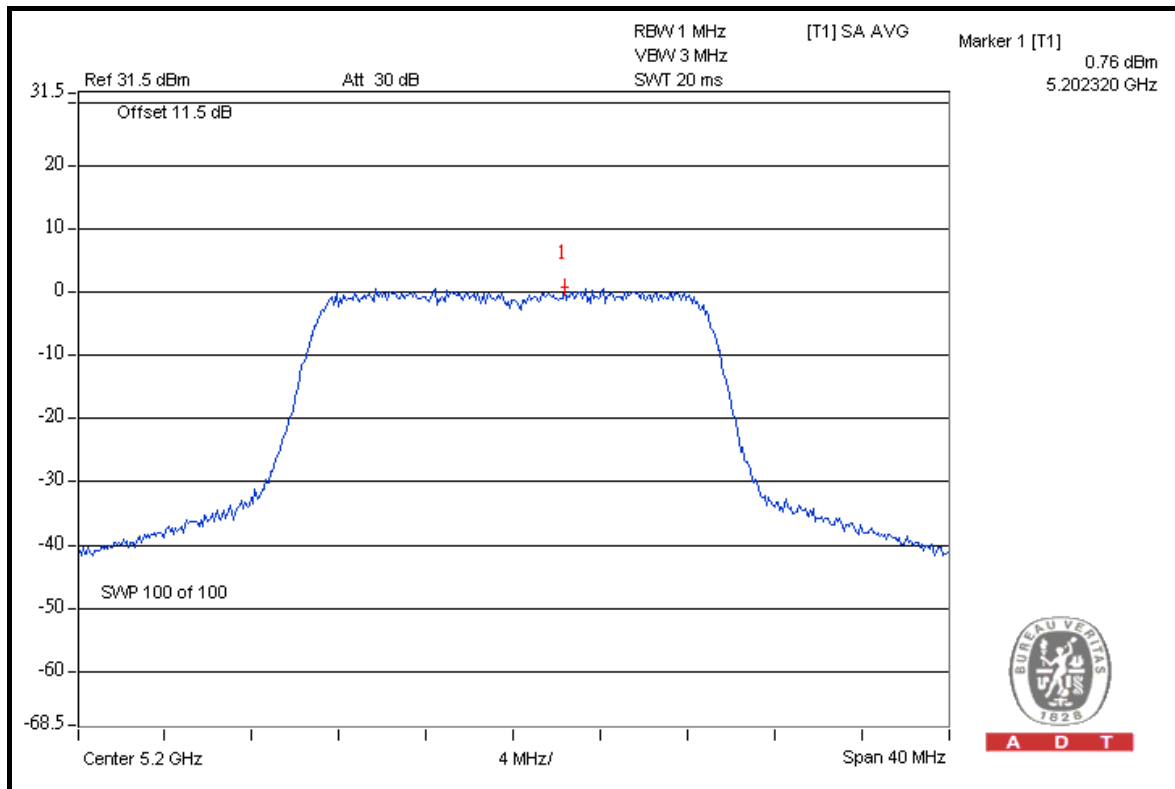

### CH 48

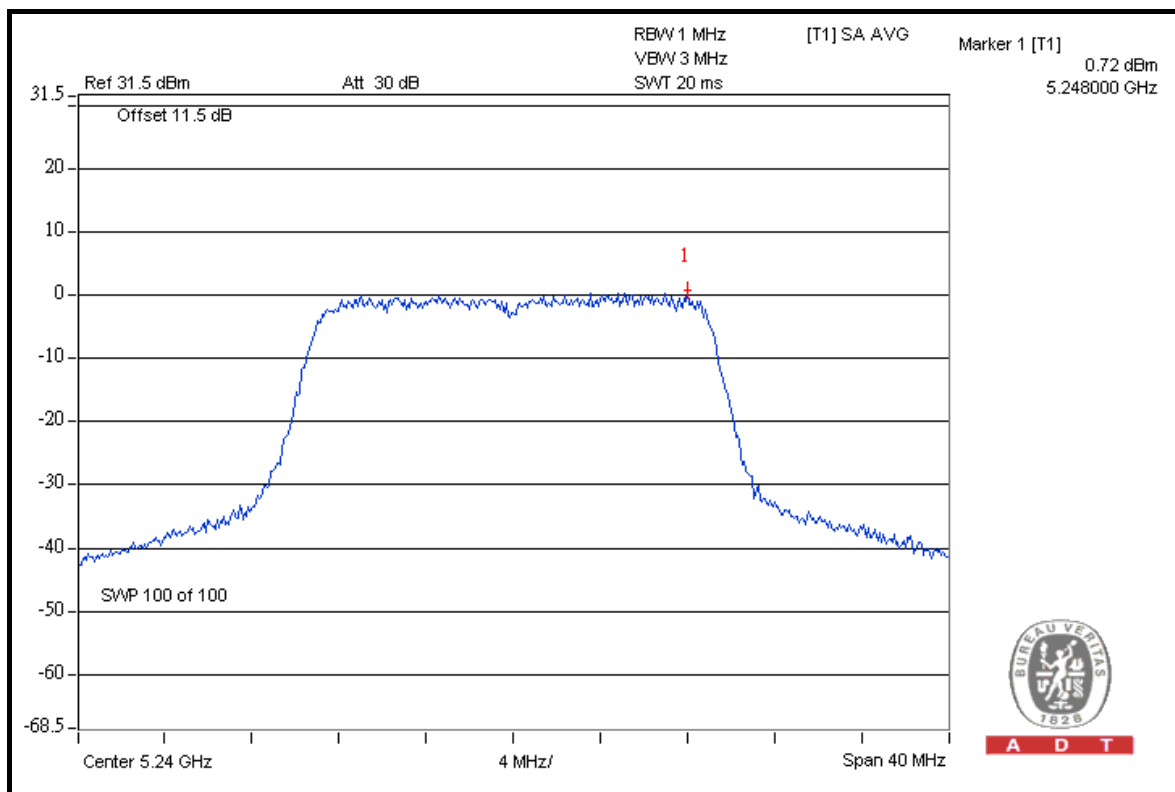





A D T

### DRAFT 802.11n (40MHz) OFDM MODULATION


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	15.0Mbps
<b>INPUT POWER</b>	120Vac, 60Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 65%RH, 1021hPa
<b>TESTED BY</b>	Mark Liao		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	-1.38	-1.71	1.402	1.47	4	PASS
46	5230	-1.56	-1.73	1.370	1.37	4	PASS




A D T

### FOR CHAIN 0: CH 38

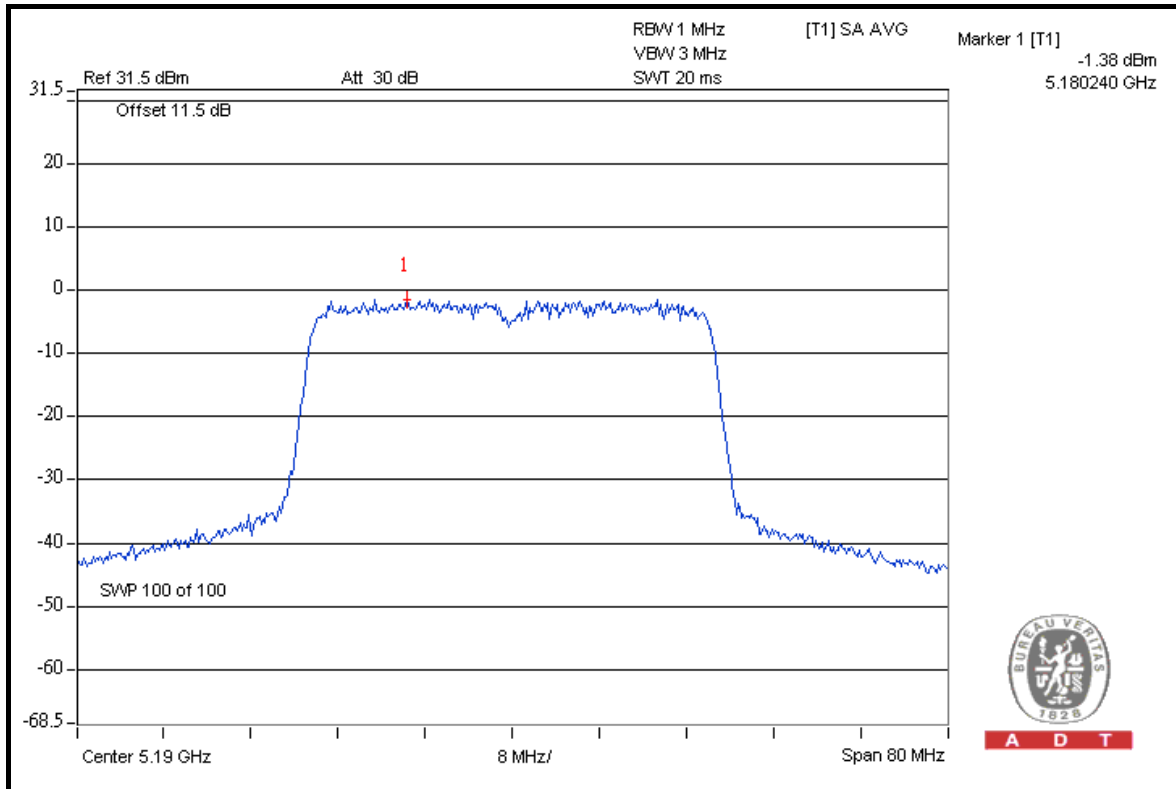


### CH 46

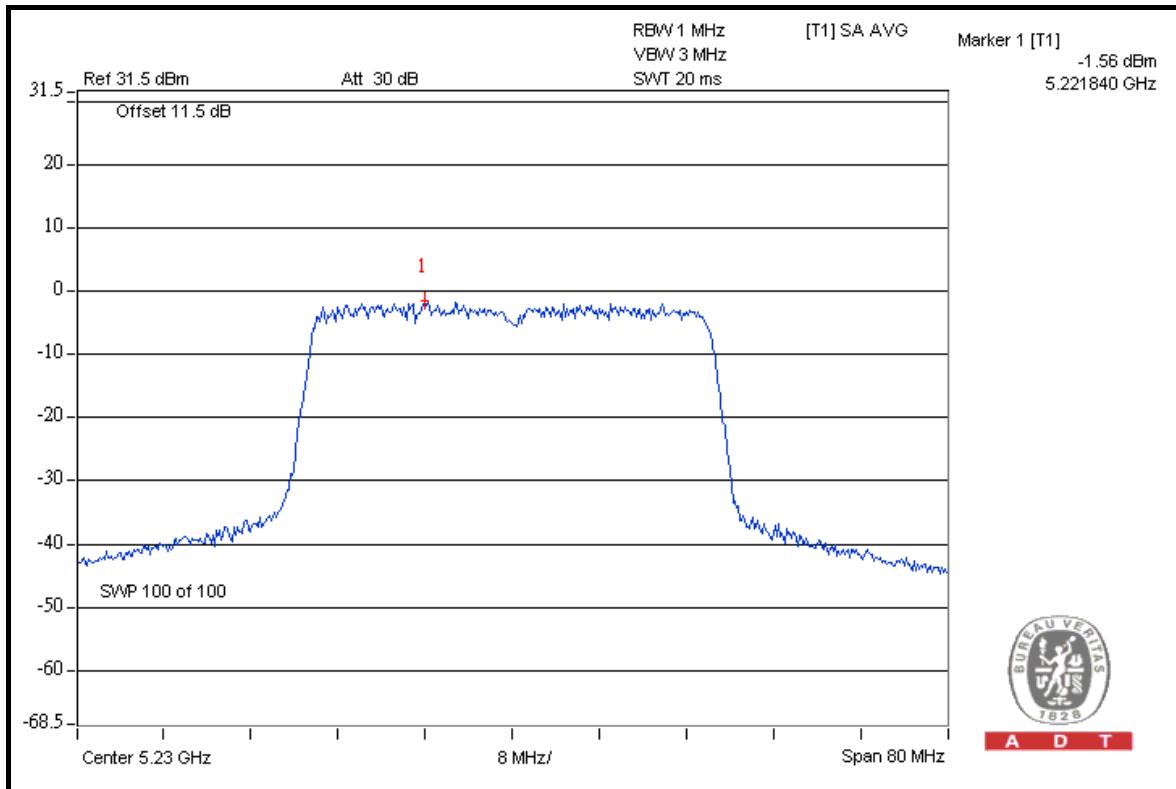




A D T

### FOR CHAIN 1: CH 38

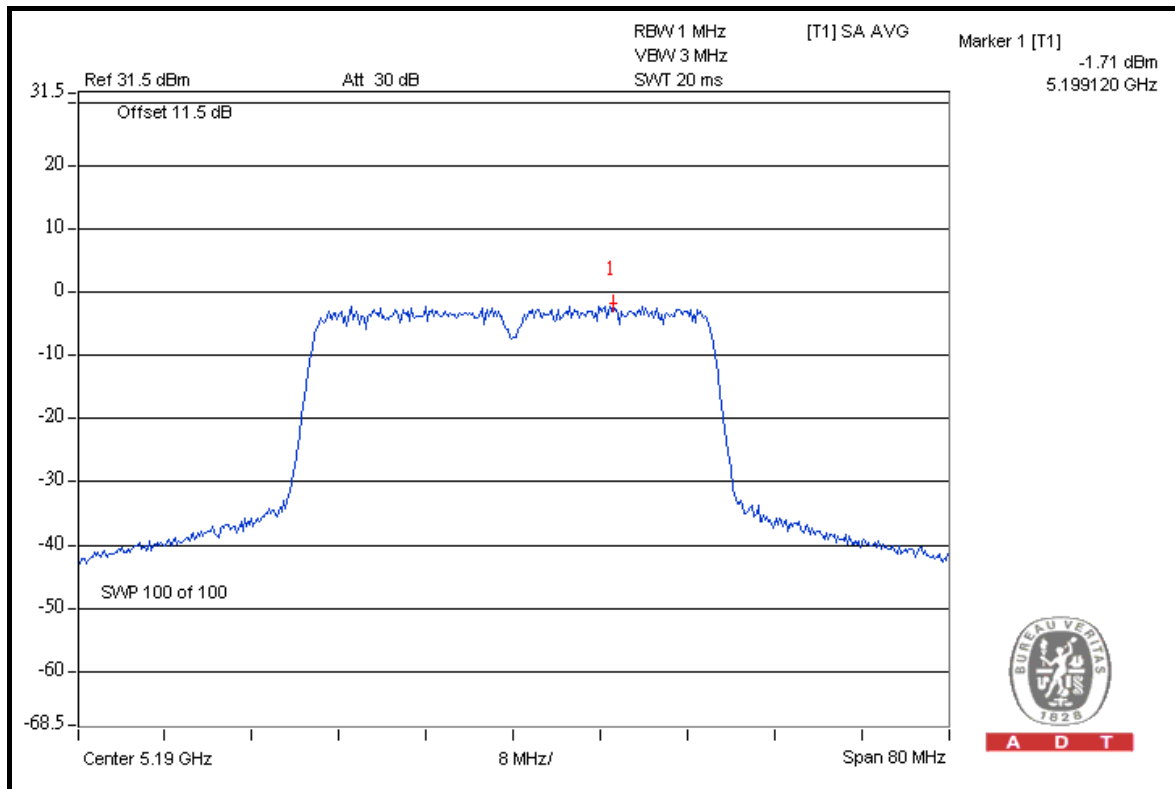

A D T

### CH 46

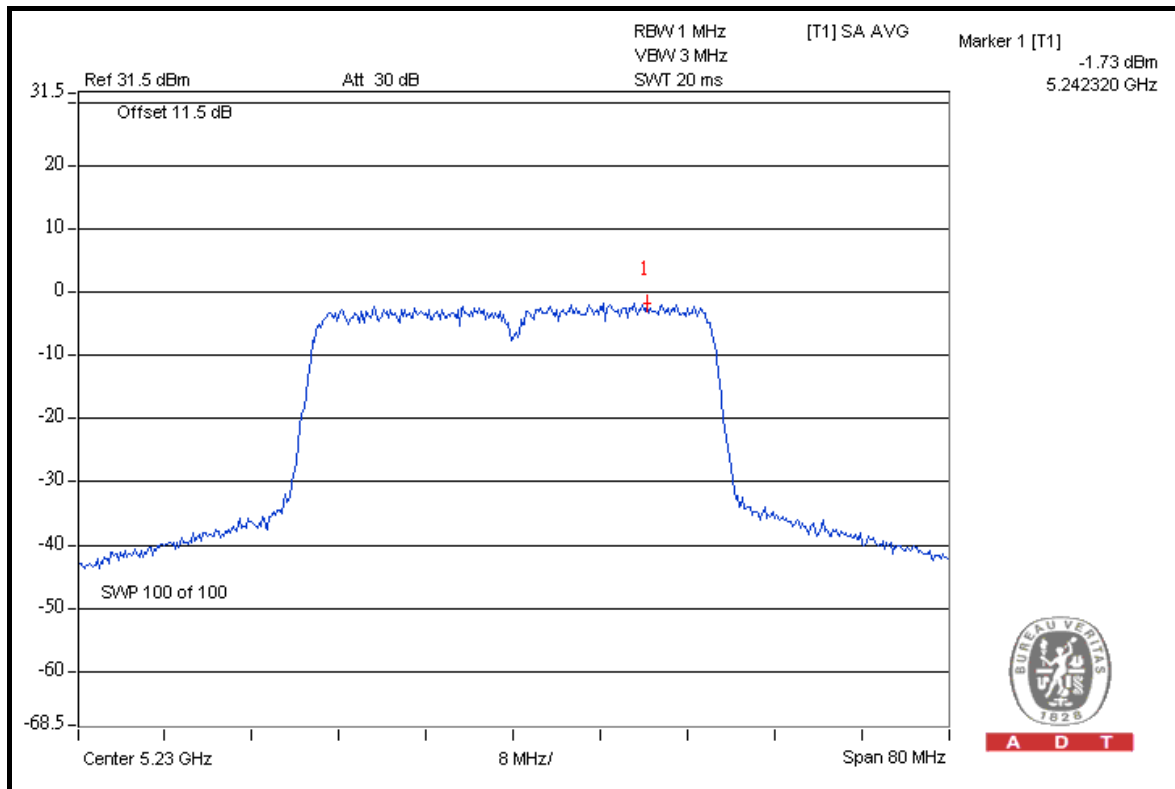

A D T

## 4.6 FREQUENCY STABILITY

### 4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within the band of operation frequency over a temperature variation of –30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jul. 07, 2009	Jul. 06, 2010
WIT STANDARD TEMPERATURE AND HUMIDITY CHAMBER	TH-4S-C	W981030	Jun. 24, 2009	Jun. 23, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 4.6.3 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.6.5 TEST SETUP

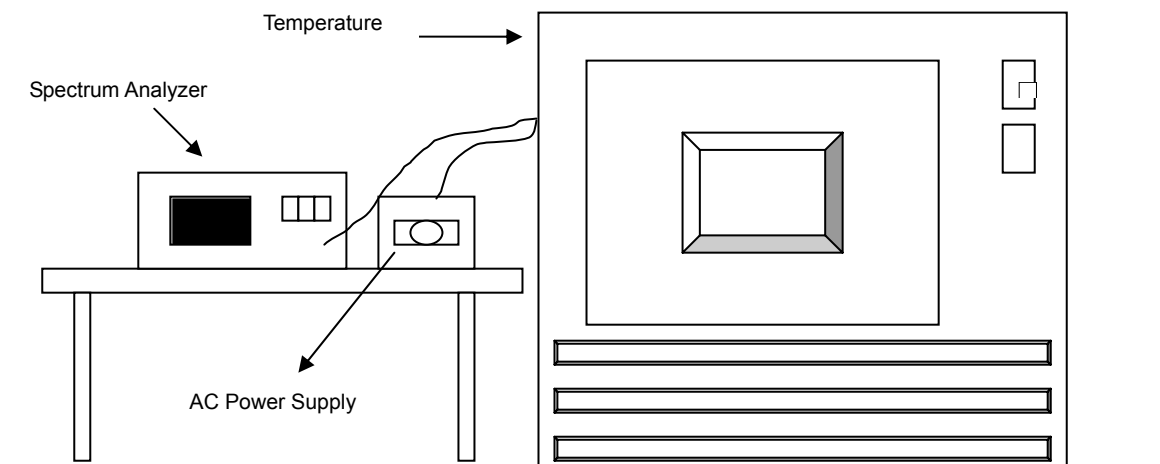

#### 4.6.6 EUT OPERATING CONDITION

Same as Item 4.1.6.

#### 4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5200MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
50	110.0	5199.996578	-0.658	5199.996892	-0.598	5199.996625	-0.649	5199.996766	-0.622
40	110.0	5199.996829	-0.610	5199.997122	-0.553	5199.996999	-0.577	5199.996846	-0.607
30	110.0	5199.996665	-0.641	5199.996957	-0.585	5199.996586	-0.657	5199.996842	-0.607
20	110.0	5199.997105	-0.557	5199.997397	-0.501	5199.997403	-0.499	5199.997253	-0.528
10	110.0	5199.996061	-0.757	5199.996102	-0.750	5199.996555	-0.662	5199.996169	-0.737
0	110.0	5199.996828	-0.610	5199.997062	-0.565	5199.996918	-0.593	5199.997315	-0.516
-10	110.0	5199.996482	-0.677	5199.996658	-0.643	5199.996848	-0.606	5199.996746	-0.626
-20	110.0	5199.997082	-0.561	5199.997442	-0.492	5199.997120	-0.554	5199.997355	-0.509
-30	110.0	5199.996647	-0.645	5199.996460	-0.681	5199.996456	-0.682	5199.996719	-0.631

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5200MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
20	93.5	5199.996578	-0.658	5199.996743	-0.626	5199.996674	-0.640	5199.997066	-0.564
	110.0	5199.997105	-0.557	5199.997397	-0.501	5199.997403	-0.499	5199.997253	-0.528
	126.5	5199.996665	-0.641	5199.996946	-0.587	5199.997091	-0.559	5199.997094	-0.559

## 4.7 BAND EDGES MEASUREMENT

### 4.7.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 29, 2008	Dec. 28, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 08, 2008	Dec. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Apr. 30, 2009	Apr. 28, 2010
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-408	Dec. 29, 2008	Dec. 28, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01960	Nov. 03, 2008	Nov. 02, 2009
Preamplifier Agilent	8447D	2944A10631	Nov. 03, 2008	Nov. 02, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274041/4	Aug. 21, 2008	Aug. 20, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	283397/4	Aug. 21, 2008	Aug. 20, 2009
Software ADT.	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table ADT.	TT100.	TT93021704	NA	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	07026401	Aug. 27, 2008	Aug. 26, 2009

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.7.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 1MHz and 3MHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

**NOTE:** The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz

#### 4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



#### 4.7.4 TEST RESULTS

For signals in the restricted bands above and below the 5.15 to 5.25GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW = 1MHz, VBW = 3MHz) are attached on the following pages.

#### 802.11a OFDM MODULATION

##### Channel 36 (5180MHz)

The band edge emission plot on the next page shows 47.73dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 36 is 110.85dBuV/m (Peak), so the maximum field strength in restrict band is  $110.85 - 47.73 = 63.12$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 51.05dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 36 is 100.65dBuV/m (Average), so the maximum field strength in restrict band is  $100.65 - 51.05 = 49.60$ dBuV/m which is under 54dBuV/m limit.



##### Channel 48 (5240MHz)

The band edge emission plot on the next second page shows 48.78dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 48 is 110.77dBuV/m (Peak), so the maximum field strength in restrict band is  $110.77 - 48.78 = 61.99$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 53.35dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 48 is 100.56dBuV/m (Average), so the maximum field strength in restrict band is  $100.56 - 50.35 = 50.21$ dBuV/m which is under 54dBuV/m limit.





A D T

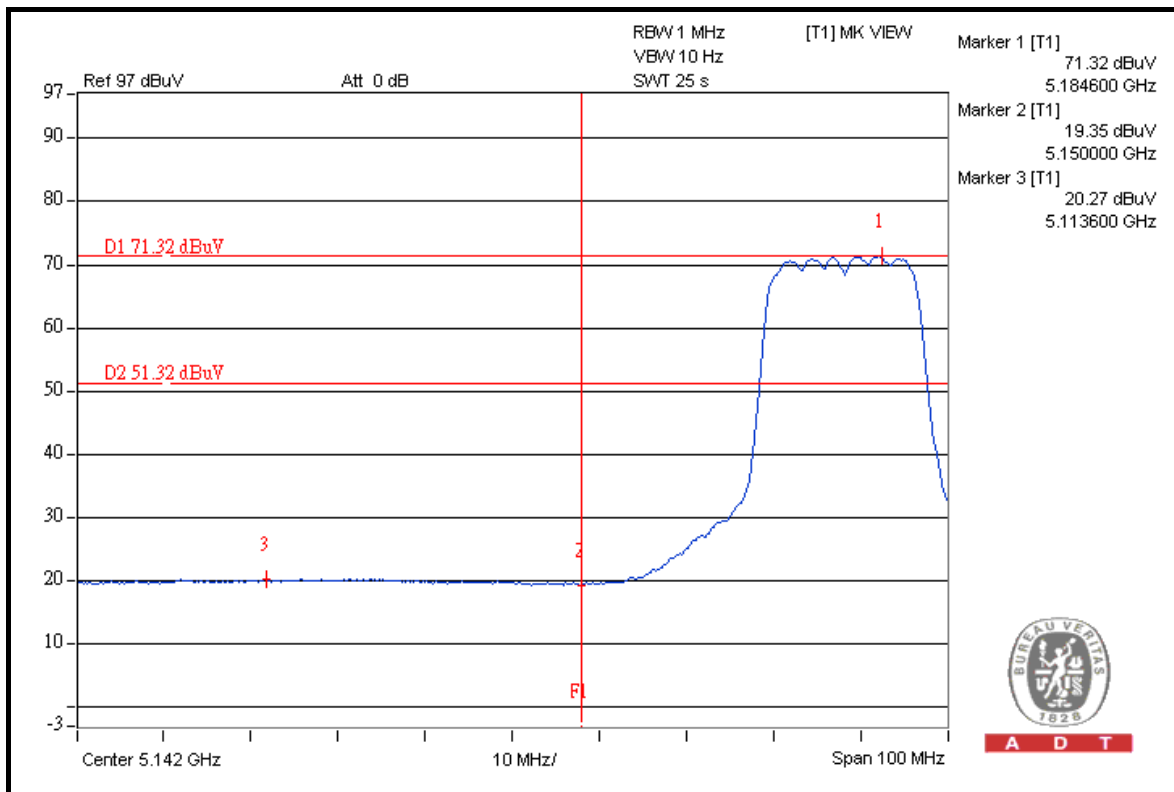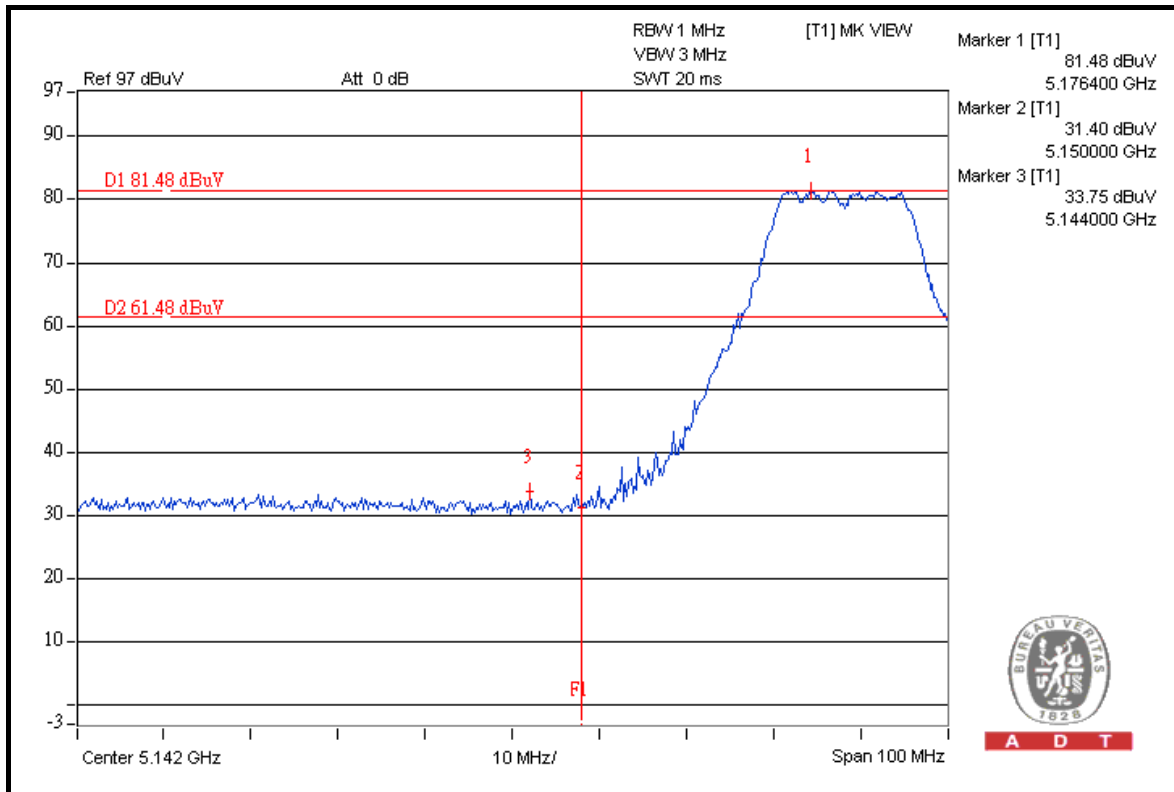





A D T

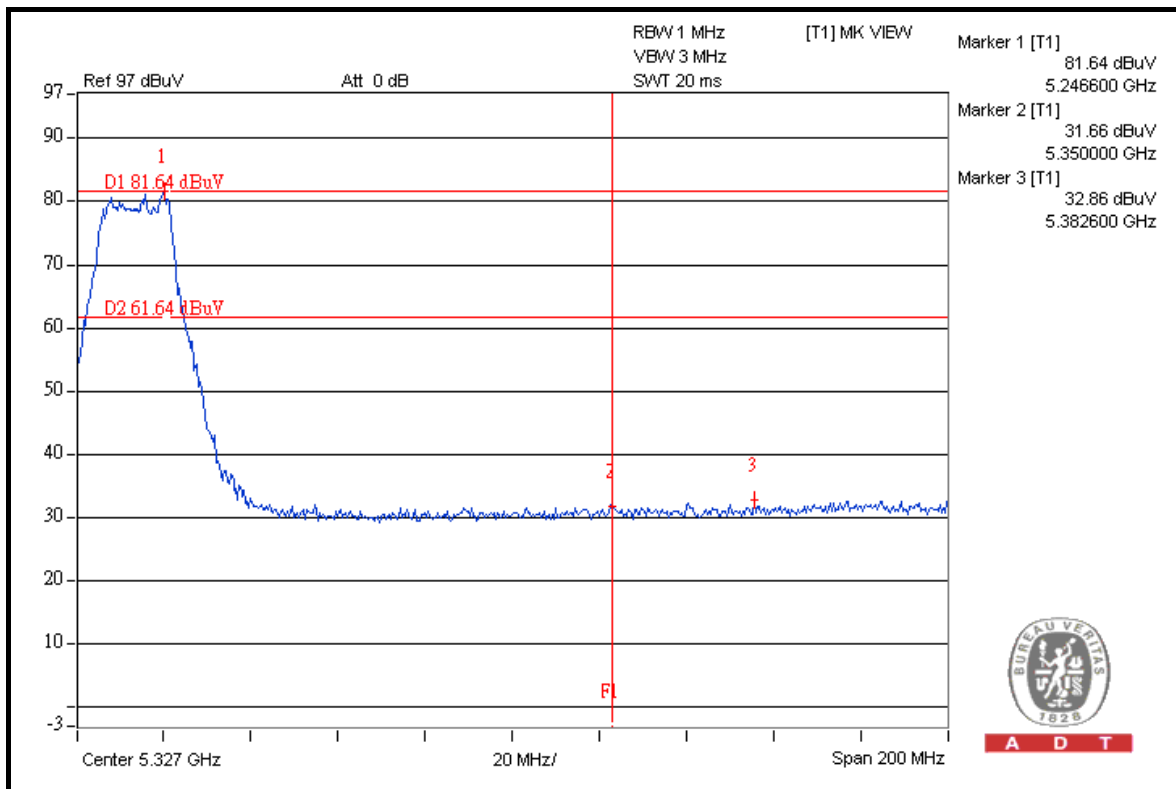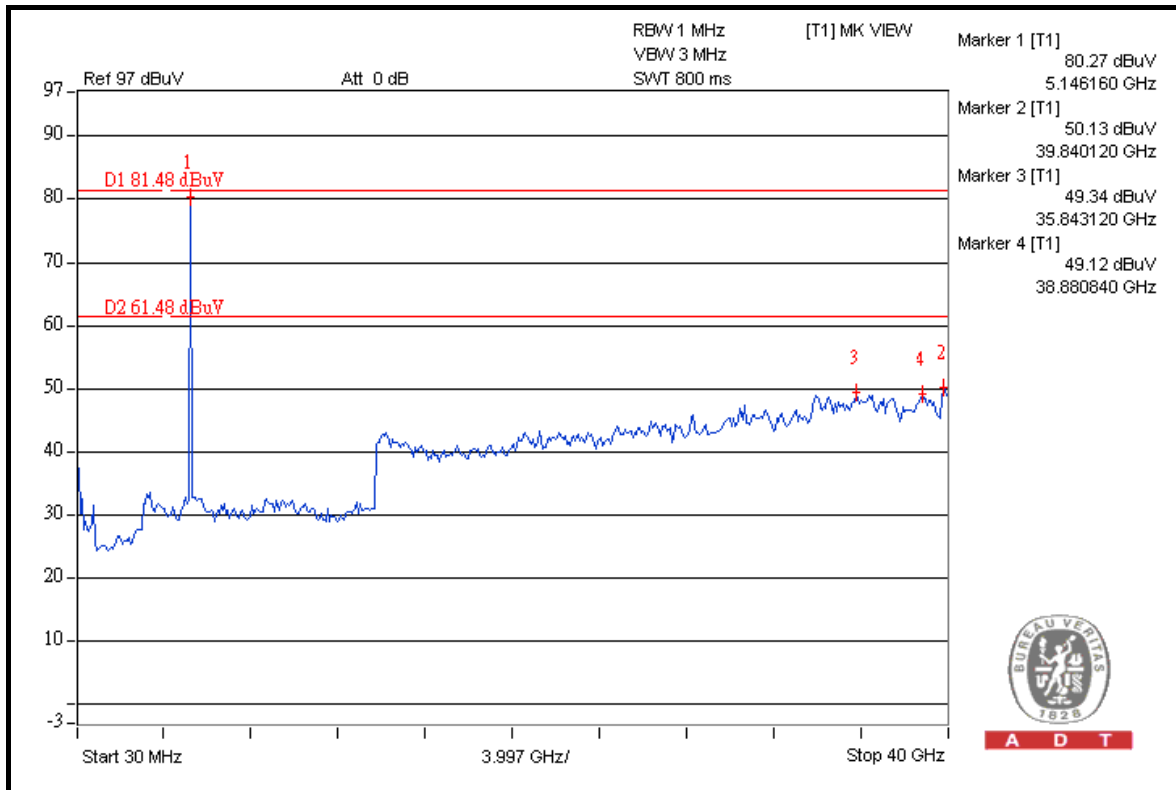



A D T

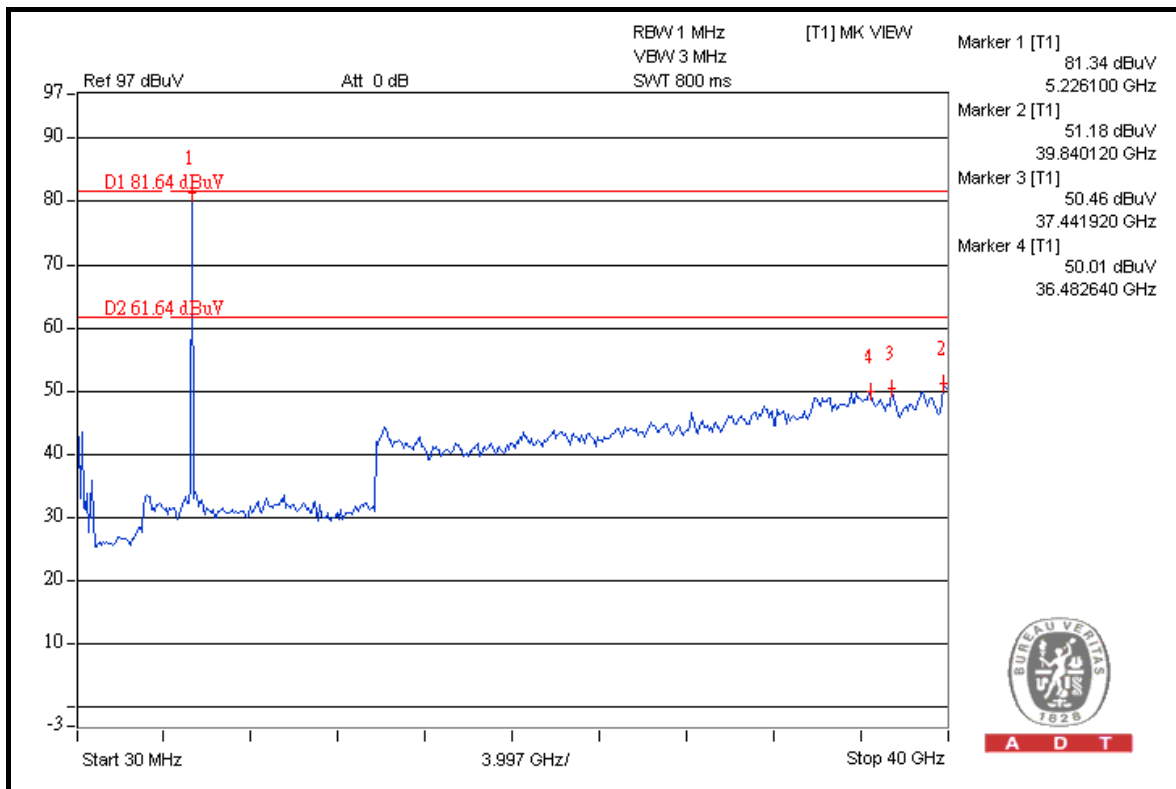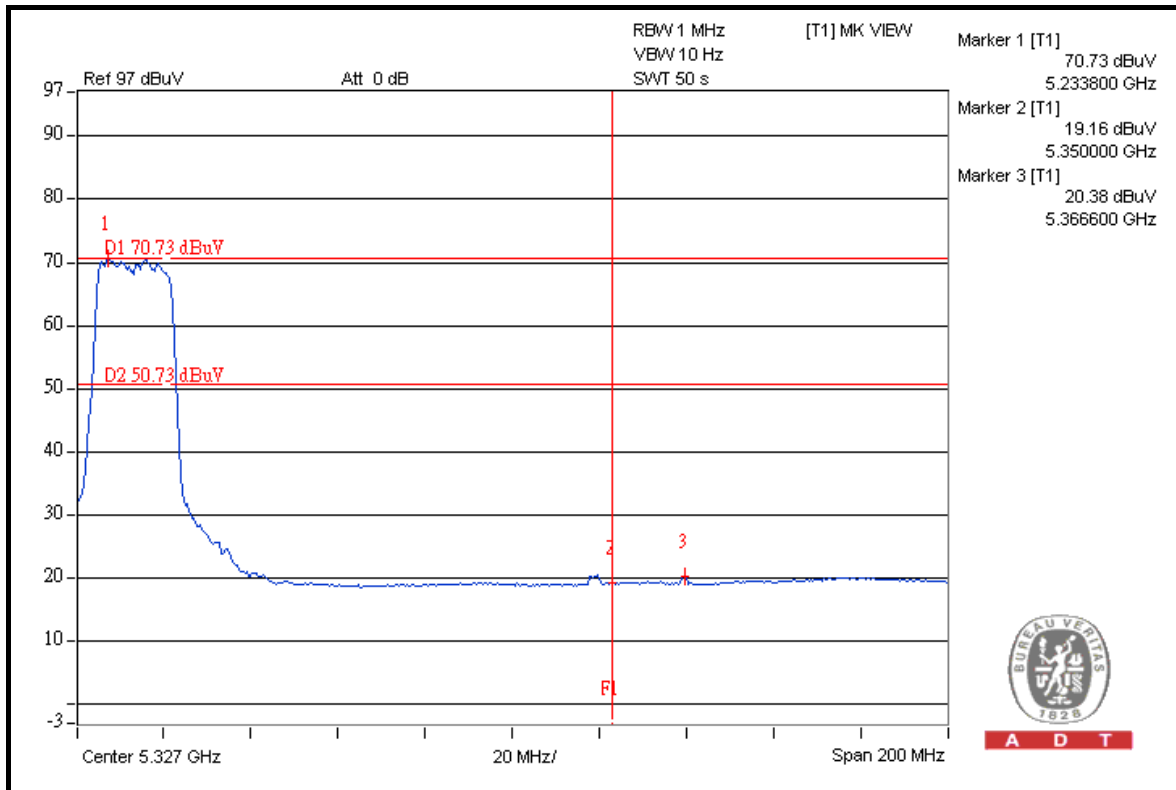

## DRAFT 802.11n (20MHz) OFDM MODULATION

### Channel 36 (5180MHz)

The band edge emission plot on the next page shows 48.91dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 36 is 110.53dBuV/m (Peak), so the maximum field strength in restrict band is  $110.53 - 48.91 = 61.62$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 50.37dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 36 is 100.57dBuV/m (Average), so the maximum field strength in restrict band is  $100.57 - 50.37 = 50.20$ dBuV/m which is under 54dBuV/m limit.



### Channel 48 (5240MHz)

The band edge emission plot on the next second page shows 48.59dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 48 is 110.34dBuV/m (Peak), so the maximum field strength in restrict band is  $110.34 - 48.59 = 61.75$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 49.11dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 48 is 100.21dBuV/m (Average), so the maximum field strength in restrict band is  $100.21 - 49.11 = 51.10$ dBuV/m which is under 54dBuV/m limit.




A D T

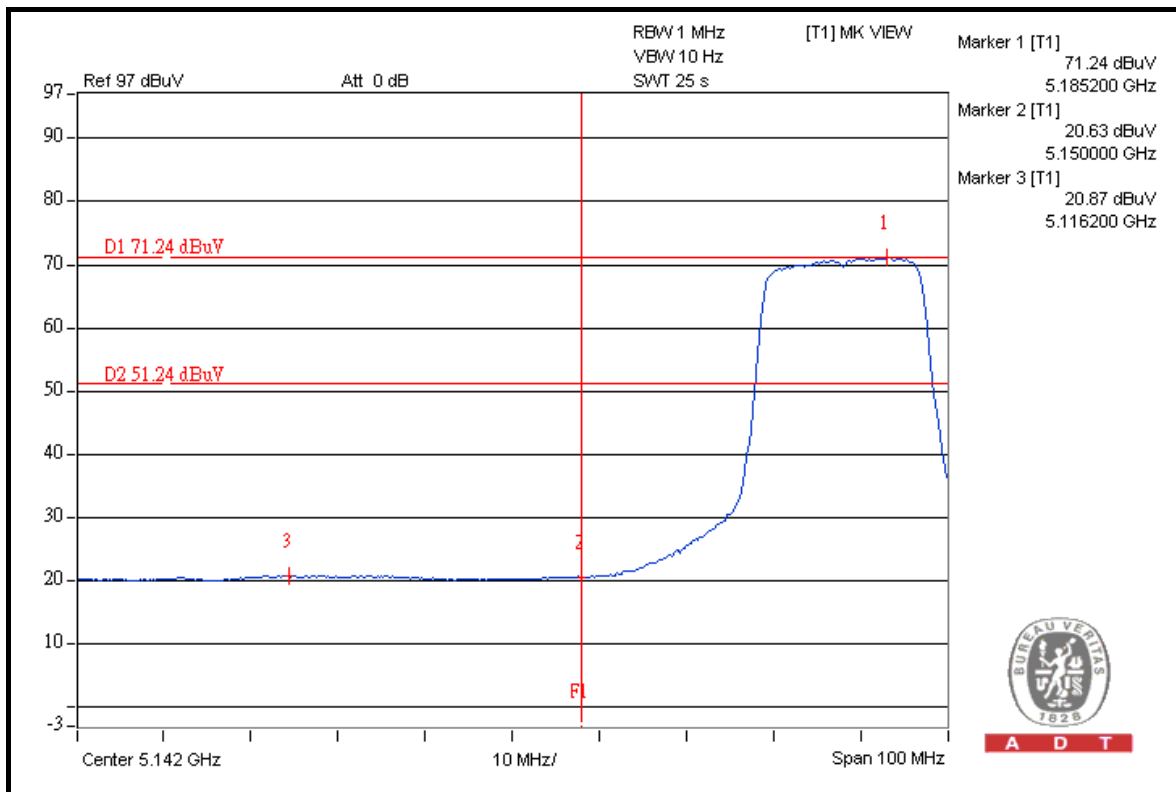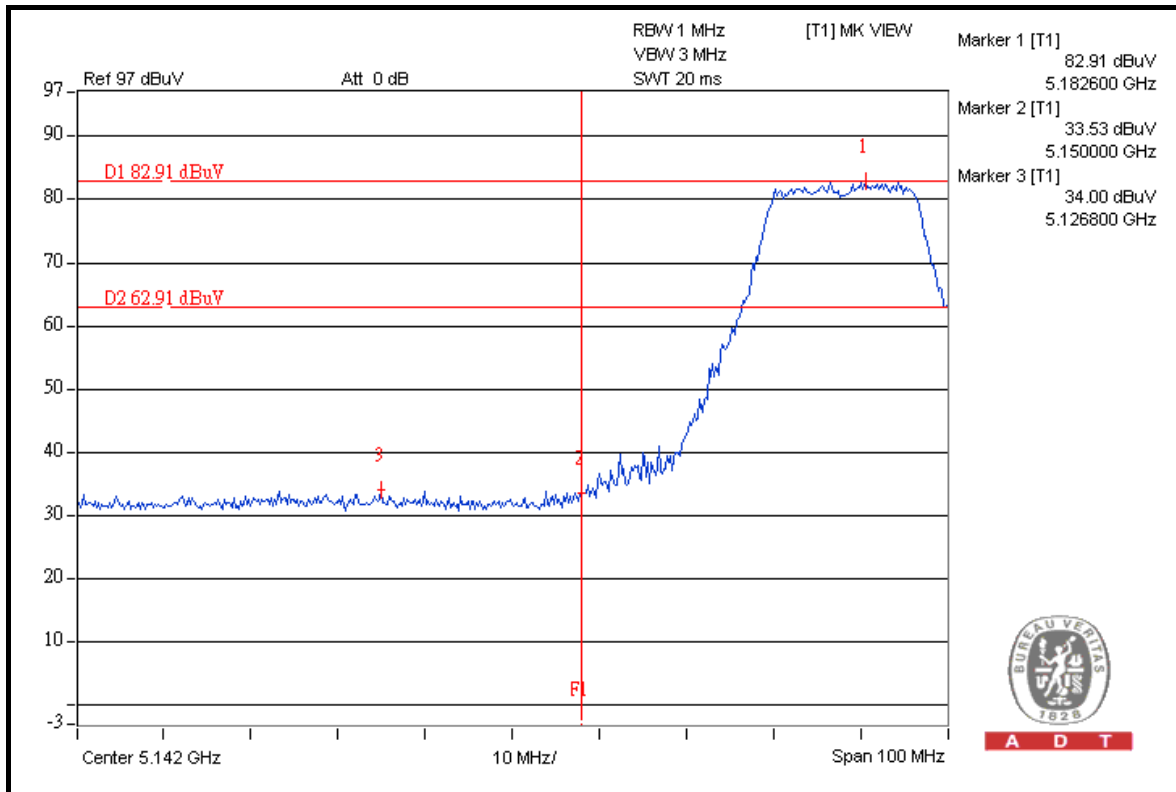




A D T

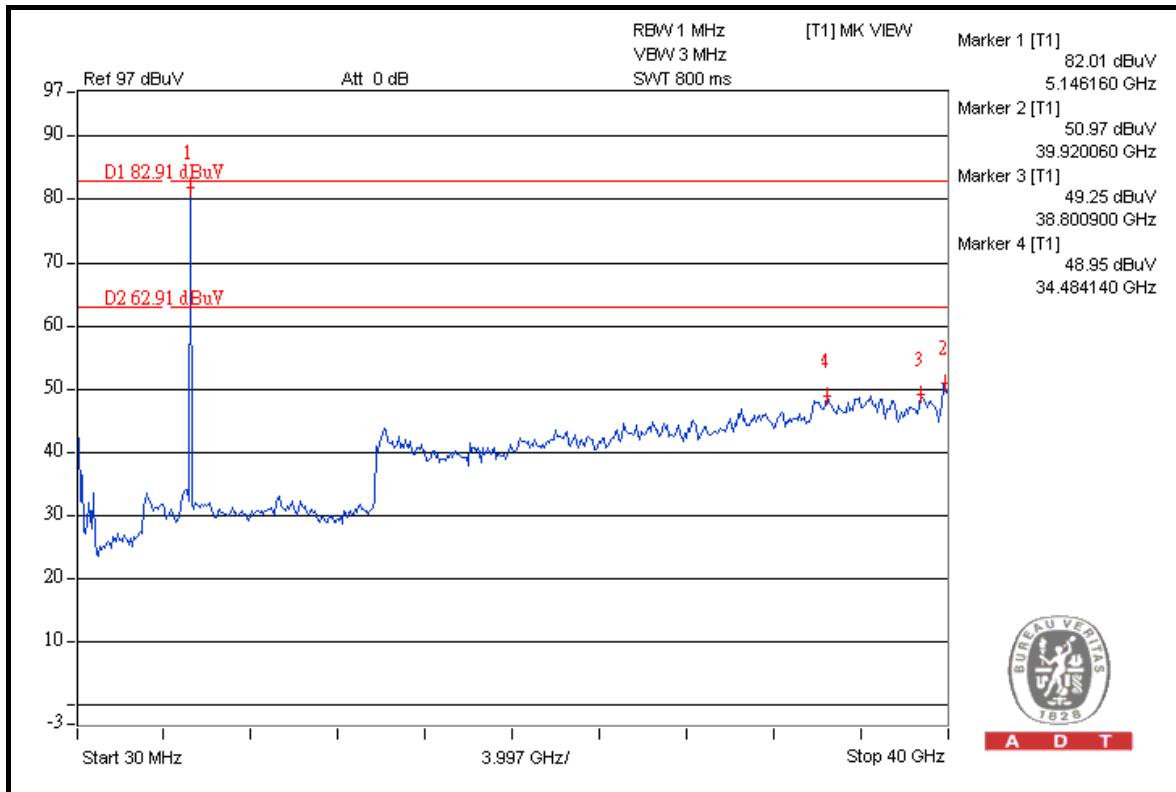



A D T

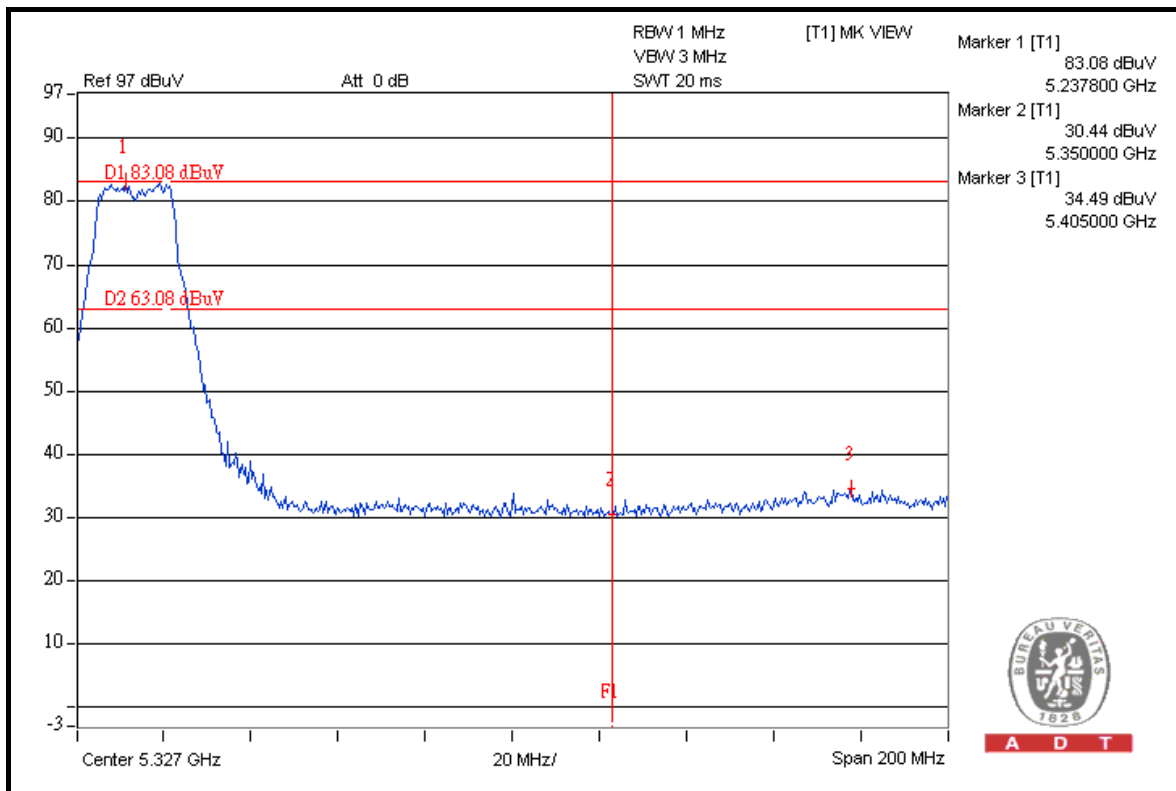

A D T



A D T

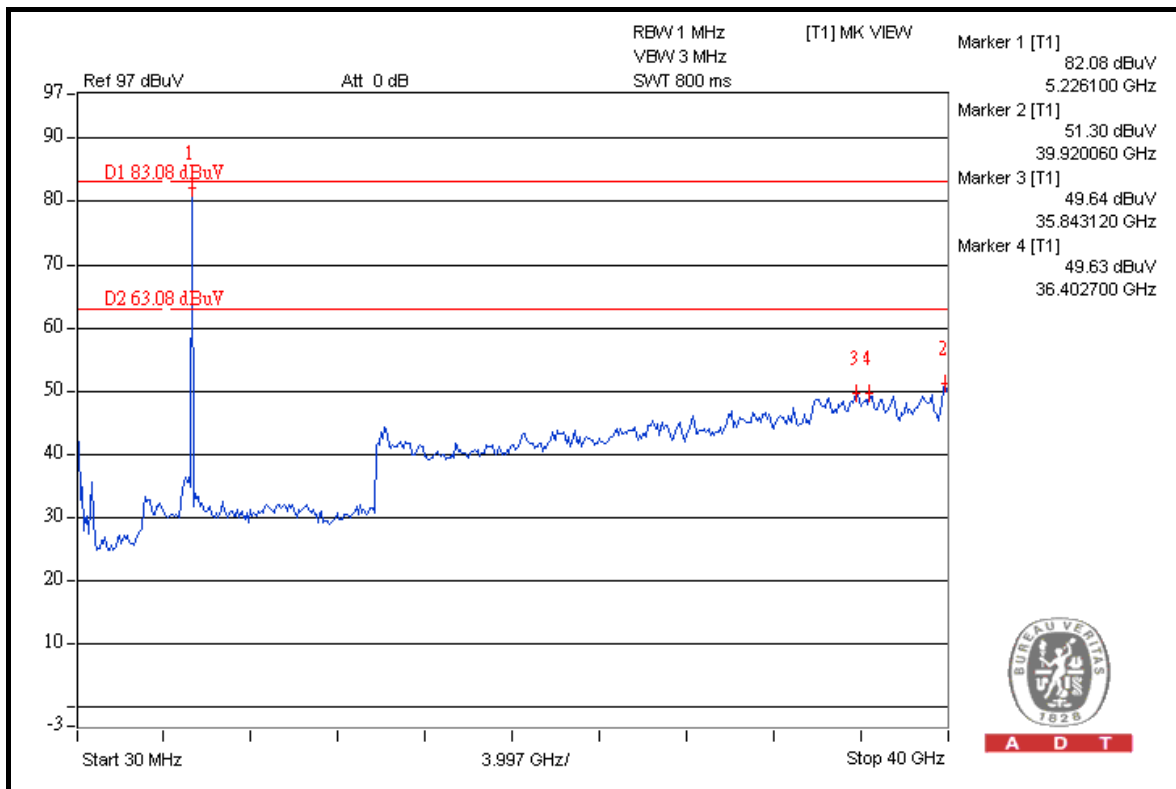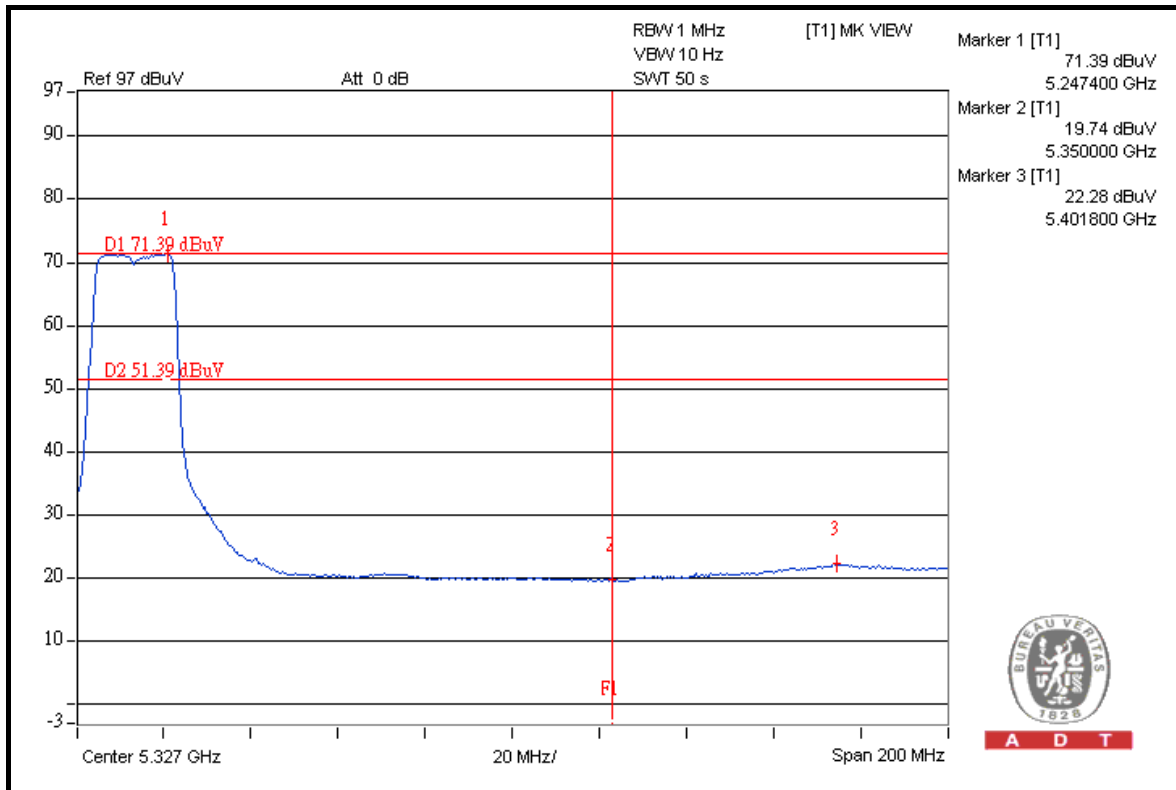



## DRAFT 802.11n (40MHz) OFDM MODULATION

### Channel 38 (5190MHz)

The band edge emission plot on the next page shows 42.32dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 38 is 109.83dBuV/m (Peak), so the maximum field strength in restrict band is  $109.83 - 42.32 = 67.51$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 45.62dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 38 is 95.49dBuV/m (Average), so the maximum field strength in restrict band is  $95.49 - 45.62 = 49.87$ dBuV/m which is under 54dBuV/m limit.



### Channel 46 (5230MHz)

The band edge emission plot on the next second page shows 44.10dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 46 is 109.26dBuV/m (Peak), so the maximum field strength in restrict band is  $109.26 - 44.10 = 65.16$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 45.25dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 46 is 95.23dBuV/m (Average), so the maximum field strength in restrict band is  $95.23 - 45.25 = 49.98$ dBuV/m which is under 54dBuV/m limit.





A D T

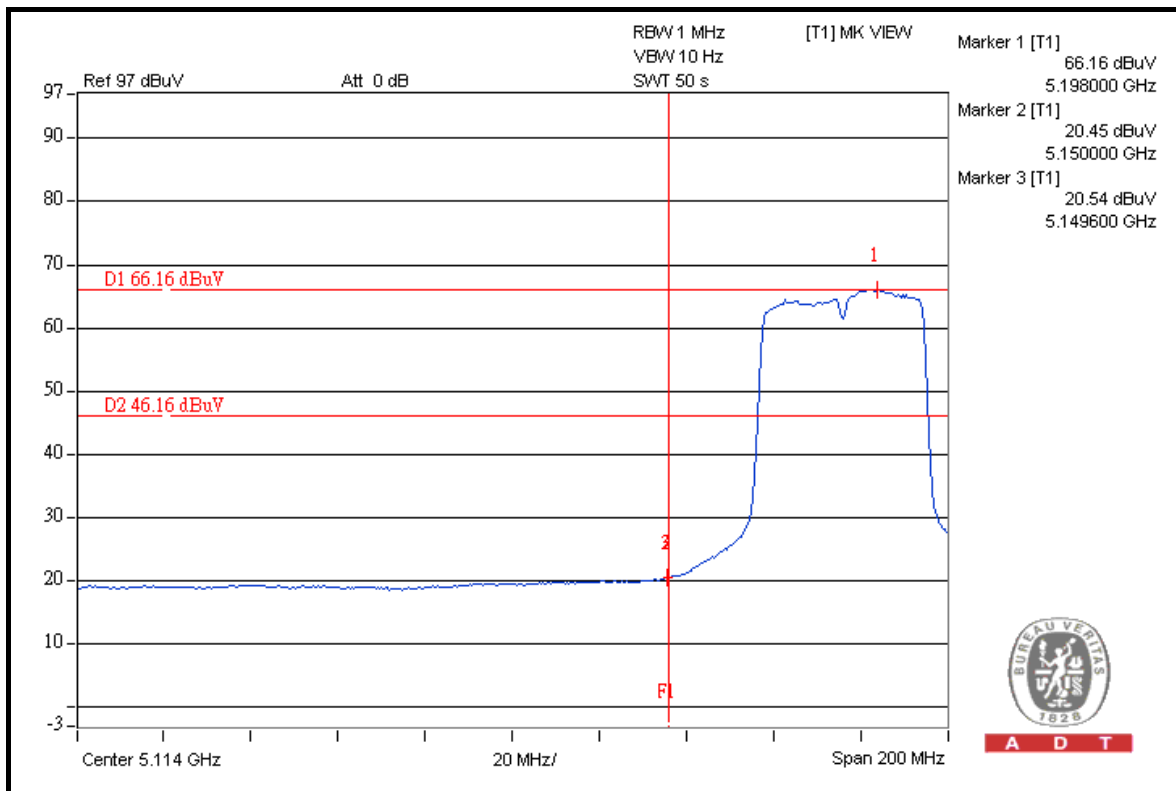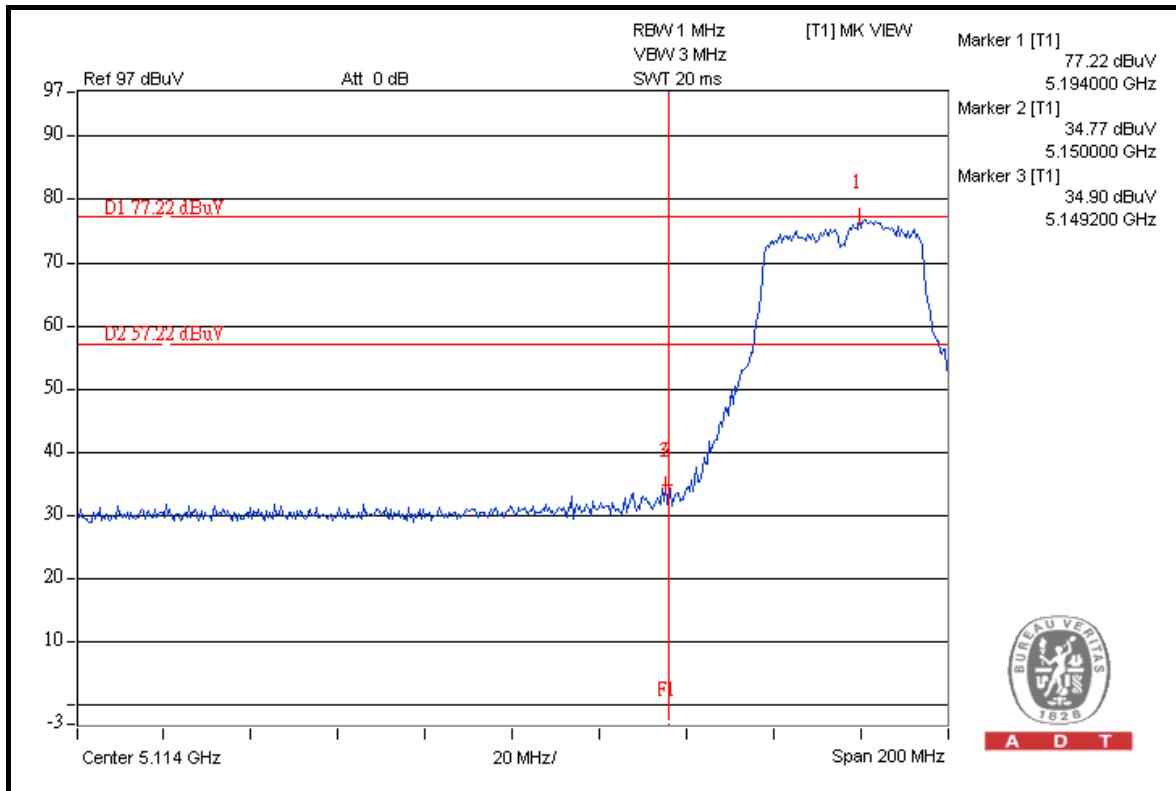





A D T

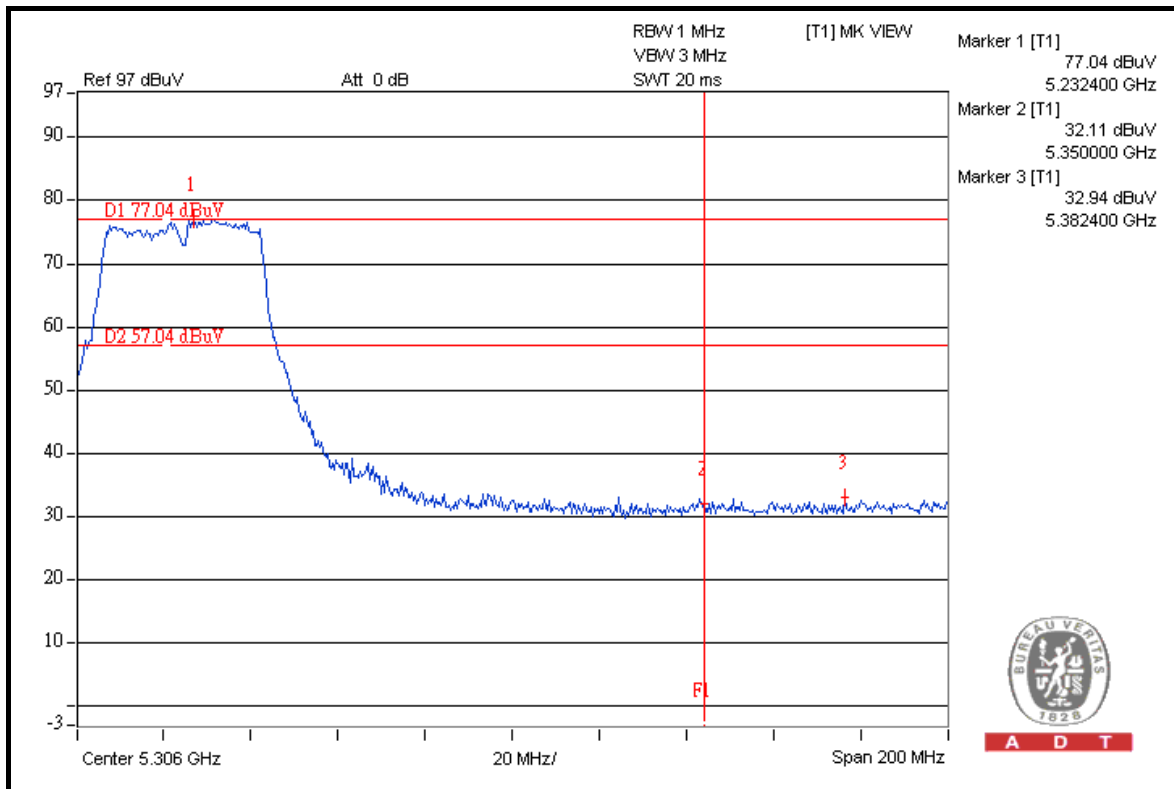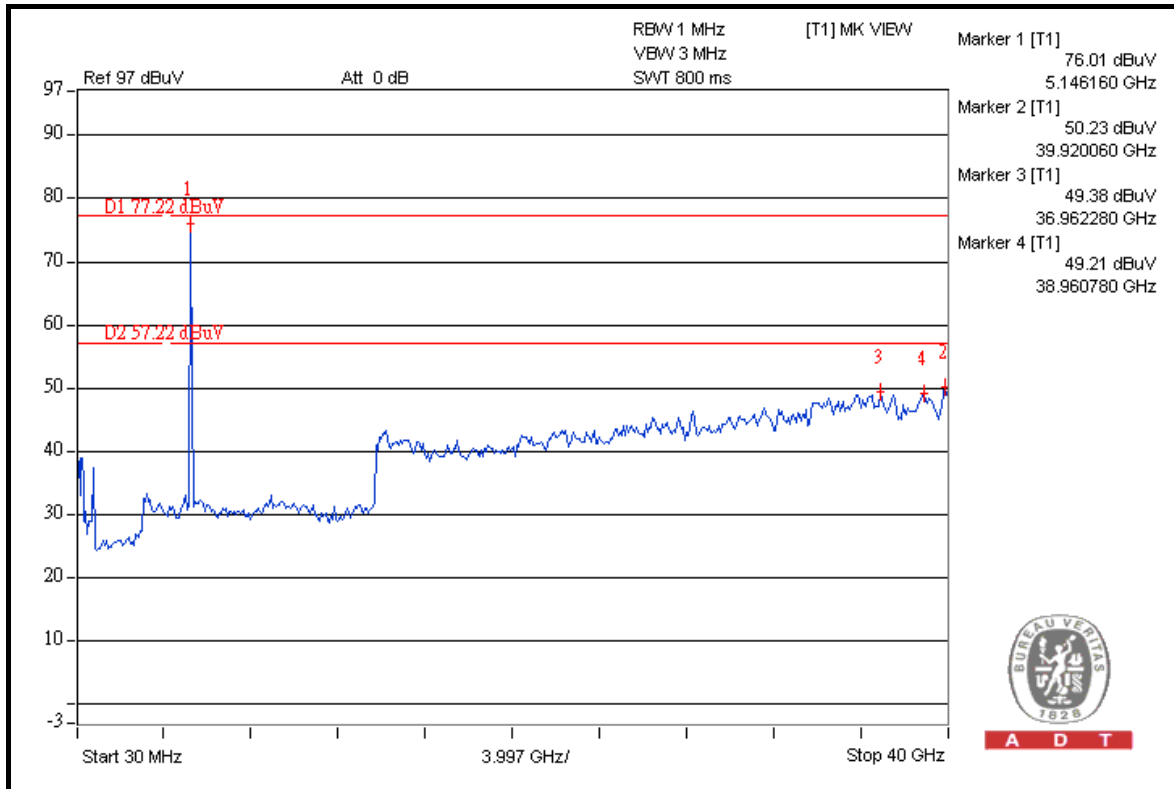



A D T

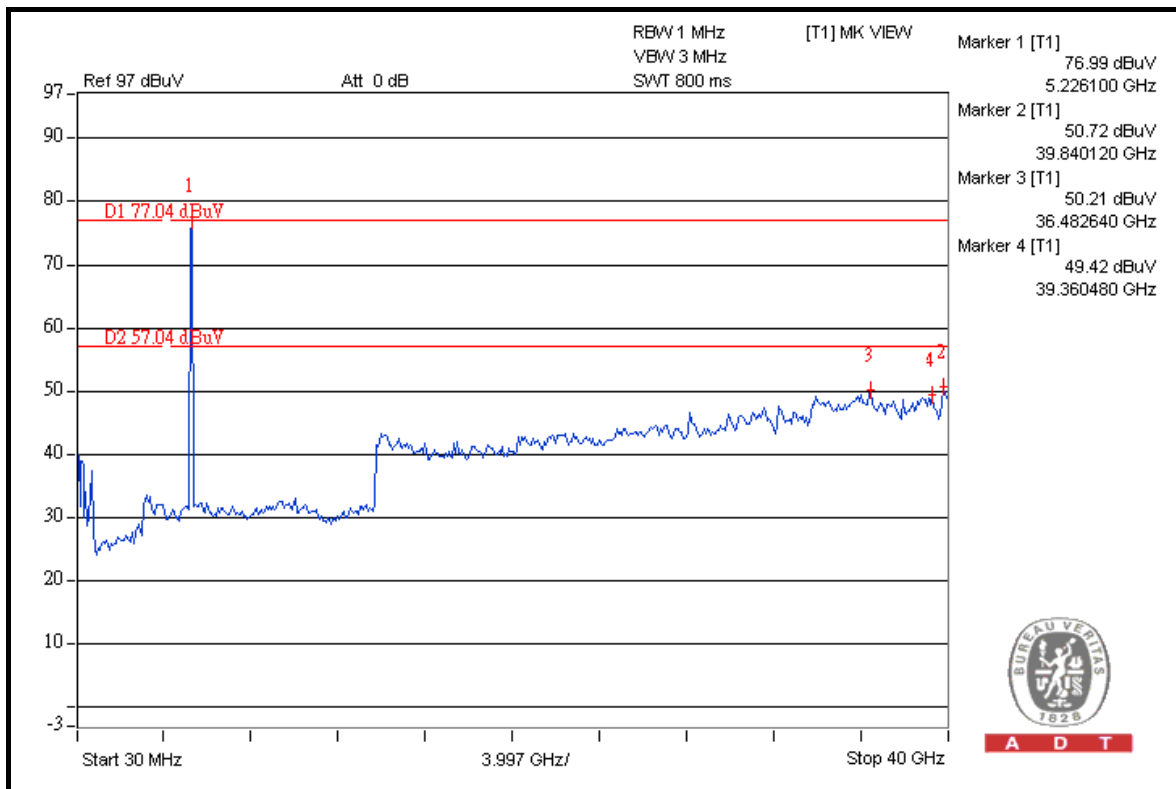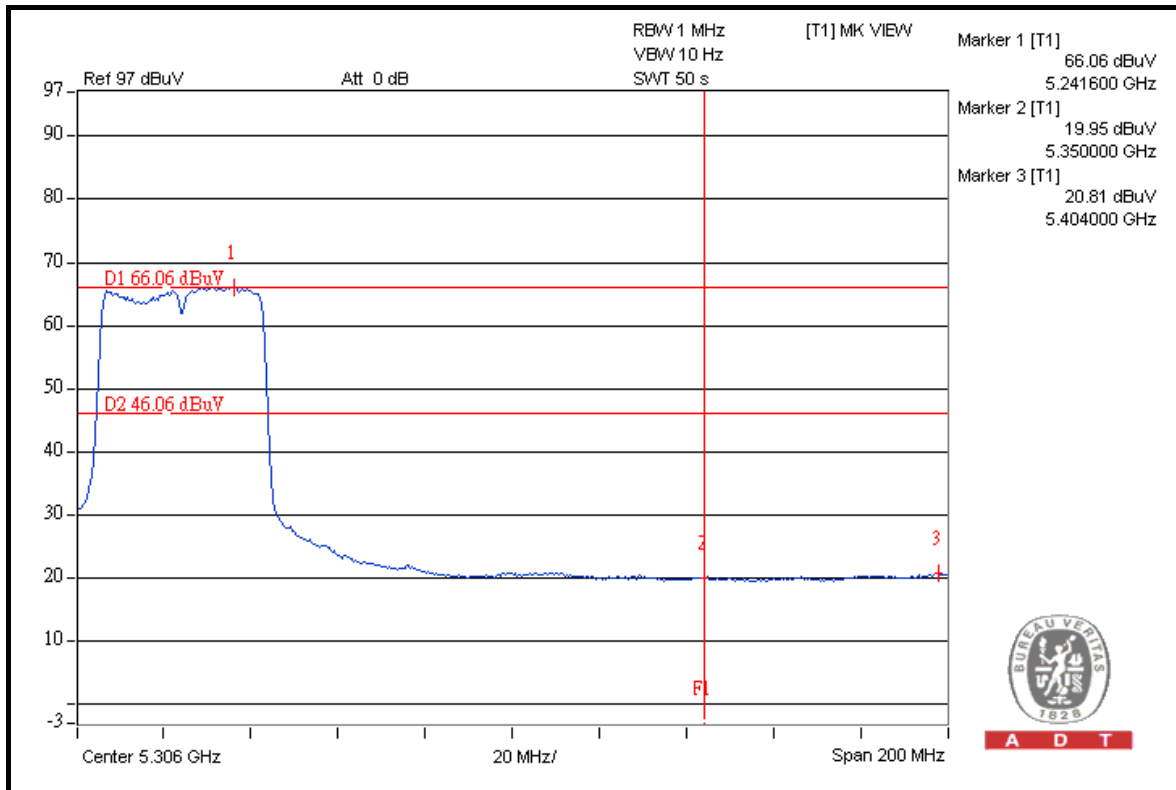

## **4.8 ANTENNA REQUIREMENT**

### **4.8.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.8.2 ANTENNA CONNECTED CONSTRUCTION**

The antennas used in this product are Printed antenna without connector. The maximum gain of the antenna is 3.9dBi.

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	TAF, BSMI, NCC
<b>Netherlands</b>	Telefication
<b>Singapore</b>	GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:  
[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**  
Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**  
Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**  
Tel: 886-3-3183232  
Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

## **7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**