



# FCC TEST REPORT

**REPORT NO.:** RF971203L02

**MODEL NO.:** WG103

**SERIES MODEL NO.:** WG102v2

**RECEIVED:** Dec. 02, 2008

**TESTED:** Dec. 19, 2008 ~ Jan. 07, 2009

**ISSUED:** Jan. 17, 2009

**APPLICANT :** NETGEAR, INC.

**ADDRESS :** 350 East Plumeria Drive San Jose, CA 95134

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou  
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 79 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



# Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS .....	5
2.1	MEASUREMENT UNCERTAINTY .....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	11
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	13
3.4	DESCRIPTION OF SUPPORT UNITS.....	13
4	TEST TYPES AND RESULTS .....	14
4.1	RADIATED EMISSION MEASUREMENT .....	14
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	14
4.1.2	TEST INSTRUMENTS .....	15
4.1.3	TEST PROCEDURES .....	16
4.1.4	DEVIATION FROM TEST STANDARD .....	16
4.1.5	TEST SETUP .....	17
4.1.6	EUT OPERATING CONDITIONS .....	17
4.1.7	TEST RESULTS .....	18
4.2	CONDUCTED EMISSION MEASUREMENT .....	31
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	31
4.2.2	TEST INSTRUMENTS .....	31
4.2.3	TEST PROCEDURES .....	32
4.2.4	DEVIATION FROM TEST STANDARD .....	32
4.2.5	TEST SETUP .....	33
4.2.6	EUT OPERATING CONDITIONS .....	33
4.2.7	TEST RESULTS .....	34
4.3	6dB BANDWIDTH MEASUREMENT .....	46
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	46
4.3.2	TEST INSTRUMENTS .....	46
4.3.3	TEST PROCEDURE .....	46
4.3.4	DEVIATION FROM TEST STANDARD .....	46
4.3.5	TEST SETUP .....	47
4.3.6	EUT OPERATING CONDITIONS .....	47
4.3.7	TEST RESULTS .....	48
4.4	MAXIMUM PEAK OUTPUT POWER .....	53
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	53
4.4.2	TEST INSTRUMENTS .....	53
4.4.3	TEST PROCEDURES .....	54
4.4.4	DEVIATION FROM TEST STANDARD .....	54
4.4.5	TEST SETUP .....	54
4.4.6	EUT OPERATING CONDITIONS .....	54
4.4.7	TEST RESULTS .....	55
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	57
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	57
4.5.2	TEST INSTRUMENTS .....	57
4.5.3	TEST PROCEDURE .....	57
4.5.4	DEVIATION FROM TEST STANDARD .....	57
4.5.5	TEST SETUP .....	57



A D T

4.5.6	EUT OPERATING CONDITIONS .....	57
4.5.7	TEST RESULTS .....	58
4.6	BAND EDGES MEASUREMENT .....	63
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	63
4.6.2	TEST INSTRUMENTS .....	63
4.6.3	TEST PROCEDURE .....	63
4.6.4	DEVIATION FROM TEST STANDARD .....	63
4.6.5	EUT OPERATING CONDITION .....	63
4.6.6	TEST RESULTS .....	64
4.7	ANTENNA REQUIREMENT .....	76
4.7.1	STANDARD APPLICABLE .....	76
4.7.2	ANTENNA CONNECTED CONSTRUCTION .....	76
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	77
6	INFORMATION ON THE TESTING LABORATORIES .....	78
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	79



A D T

## 1 CERTIFICATION

**PRODUCT:** ProSafe 802.11g Wireless Access Point  
**MODEL:** WG103  
**SERIES MODEL NO.:** WG102v2  
**BRAND:** NETGEAR  
**APPLICANT:** NETGEAR, INC.  
**TESTED:** Dec. 19, 2008 ~ Jan. 07, 2009  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**STANDARDS:** **FCC Part 15, Subpart C (Section 15.247)**  
ANSI C63.4-2003

The above equipment (model: WG103) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** : *Peggy Chen* , **DATE** : Jan. 17, 2009  
Peggy Chen / Specialist

**TECHNICAL ACCEPTANCE** : *Long Chen* , **DATE** : Jan. 17, 2009  
Responsible for RF Long Chen / Senior Engineer

**APPROVED BY** : *Gary Chang* , **DATE** : Jan. 17, 2009  
Gary Chang / Assistant Manager

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.72dB at 0.533MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -2.08dB at 2483.50MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44 dB
	30MHz ~ 200MHz	3.19 dB
Radiated emissions	200MHz ~ 1000MHz	3.21 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	ProSafe 802.11g Wireless Access Point
<b>MODEL NO.</b>	WG103
<b>SERIES MODEL NO.:</b>	WG102v2
<b>FCC ID</b>	PY308400097
<b>POWER SUPPLY</b>	12Vdc from Adapter 48Vdc from POE
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (*Turbo mode: up to 108Mbps)
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	802.11b & 802.11g: 11 802.11g: 1 for turbo mode
<b>MAXIMUM OUTPUT POWER</b>	357.273mW
<b>ANTENNA TYPE</b>	Dipole antenna with 5dBi gain
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	RJ45
<b>ACCESSORY DEVICES</b>	Adapter



**NOTE:**

1. The models as below are identical to each other, except for their model designation due to marketing requirement.

Brand	Model Name
NETGEAR	WG103
NETGEAR	WG102v2

2. The EUT was powered by the following adapters:

<b>BRAND:</b>	NETGEAR
<b>MODEL:</b>	MT12-Y120100-A1
<b>P/N:</b>	332-10066-01
<b>INPUT:</b>	100-120Vac, 60Hz, 0.3A
<b>OUTPUT:</b>	12Vdc, 1A
<b>POWER LINE:</b>	1.8m non-shielded cable without core

<b>BRAND:</b>	NETGEAR
<b>MODEL:</b>	T012LF1209 16100LF
<b>P/N:</b>	332-10066-01
<b>INPUT:</b>	100-120Vac, 50/60Hz, 0.5A
<b>OUTPUT:</b>	12Vdc, 1A
<b>POWER LINE:</b>	1.8m non-shielded cable without core

3. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.
4. This EUT is capable of providing data rates of up to 108Mbps in Turbo Mode depending upon reception quality.
5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		


1 channel is provided for turbo mode.

CHANNEL	FREQUENCY
6	2437 MHz




### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

#### TEST MODE A, B

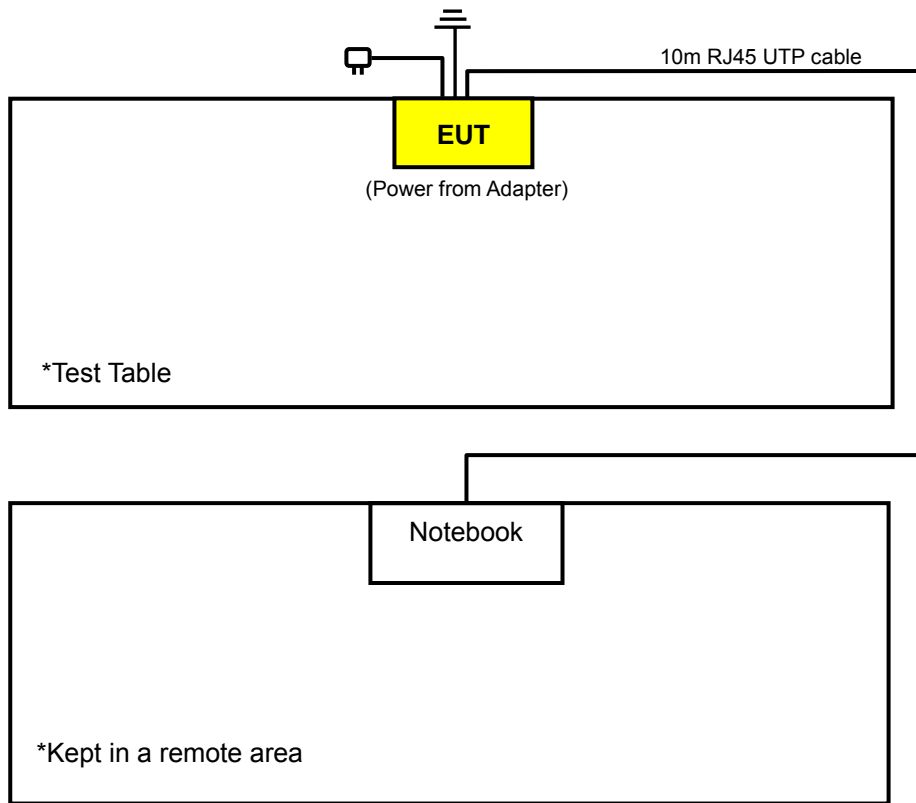

### TEST MODE C

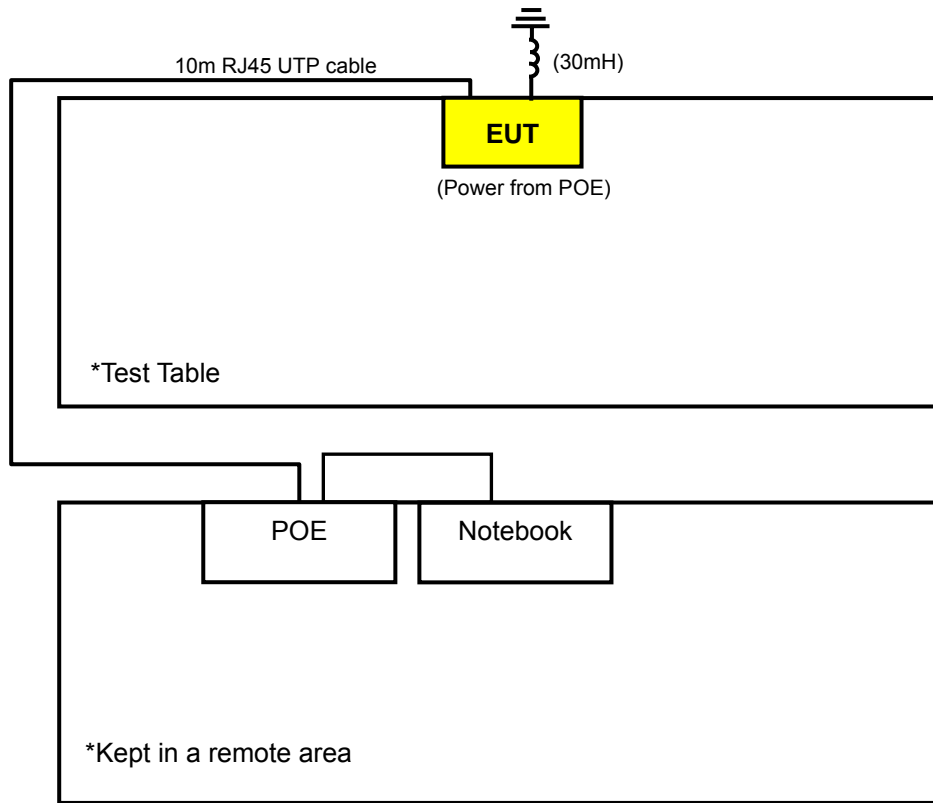

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from Adapter(Model: MT12-Y120100-A1)
B	-	√	√	-	Power from Adapter (Model: T012LF1209 16100LF)
C	-	√	√	-	Power from POE

Where **PLC**: Power Line Conducted Emission

**RE<1G**: Radiated Emission below 1GHz

**RE $\geq$ 1G**: Radiated Emission above 1GHz

**APCM**: Antenna Port Conducted Measurement

**NOTE**: "-" means no effect

#### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	6	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12
B	802.11g	1 to 11	6	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12
C	802.11g	1 to 11	6	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12

**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	6	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12
B	802.11g	1 to 11	6	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12
C	802.11g	1 to 11	6	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12

**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1
	802.11g	1 to 11	1, 11	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
	802.11g Turbo	6	6	OFDM	QPSK	12



### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### FCC Part 15, Subpart C (15.247)

#### ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook computer	DELL	PP05L	25191592336	E2K24CLNS
2	IEEE 802.3af Compliant	SONICWALL	PoE injector	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m UTP RJ45 cable
2	10m UTP RJ45 cable

**NOTE:**

- 1. All power cords of the above support units are non shielded (1.8m).
- 2. Item 1-2 acted as communication partners to transfer data.

## 4 TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 29, 2008	Dec. 28, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 08, 2008	Dec. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Apr. 30, 2008	Apr. 29, 2009
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-408	Dec. 29, 2008	Dec. 28, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 07, 2008	Jan. 06, 2009
Preamplifier Agilent	8449B	3008A01960	Nov. 03, 2008	Nov. 02, 2009
Preamplifier Agilent	8447D	2944A10631	Nov. 03, 2008	Nov. 02, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274041/4	Aug. 21, 2008	Aug. 20, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	283397/4	Aug. 21, 2008	Aug. 20, 2009
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table ADT.	TT100.	TT93021704	NA	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 988962.
5. The IC Site Registration No. is IC7450F-4.

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.1.5 TEST SETUP

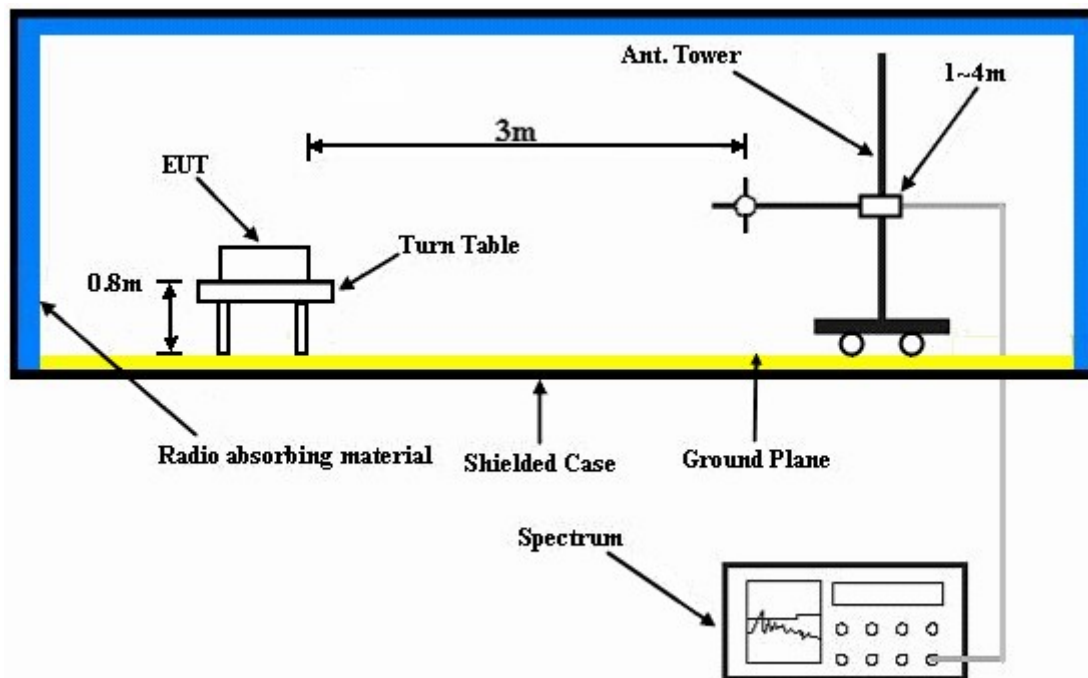

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared a notebook system to act as a communication partner and placed it outside of testing area.
- The communication partner run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency via a RJ45 cable.
- The communication partner sent data to EUT by command "PING".

#### 4.1.7 TEST RESULTS

##### 802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 998hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.77 PK	74.00	-16.23	1.32 H	260	26.08	31.69
2	2390.00	45.91 AV	54.00	-8.09	1.32 H	260	14.22	31.69
3	*2412.00	99.89 PK			1.32 H	260	68.11	31.78
4	*2412.00	95.73 AV			1.32 H	260	63.95	31.78
5	4824.00	51.72 PK	74.00	-22.28	1.18 H	26	13.66	38.06
6	4824.00	41.56 AV	54.00	-12.44	1.18 H	26	3.50	38.06
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.53 PK	74.00	-12.47	1.15 V	38	29.84	31.69
2	2390.00	51.33 AV	54.00	-2.67	1.15 V	38	19.64	31.69
3	*2412.00	110.78 PK			1.15 V	38	79.00	31.78
4	*2412.00	106.04 AV			1.15 V	38	74.26	31.78
5	4824.00	51.31 PK	74.00	-22.69	1.50 V	20	13.25	38.06
6	4824.00	41.43 AV	54.00	-12.57	1.50 V	20	3.37	38.06

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 998hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.82 PK			1.29 H	252	70.94	31.88
2	*2437.00	97.77 AV			1.29 H	252	65.89	31.88
3	4874.00	51.32 PK	74.00	-22.68	1.01 H	8	13.15	38.17
4	4874.00	41.58 AV	54.00	-12.42	1.01 H	8	3.41	38.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.13 PK			1.15 V	37	81.25	31.88
2	*2437.00	108.21 AV			1.15 V	37	76.33	31.88
3	4874.00	51.96 PK	74.00	-22.04	1.10 V	347	13.78	38.17
4	4874.00	42.11 AV	54.00	-11.89	1.10 V	347	3.93	38.17

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 998hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.67 PK			1.31 H	230	67.69	31.98
2	*2462.00	94.91 AV			1.31 H	230	62.93	31.98
3	2483.50	58.61 PK	74.00	-15.39	1.31 H	230	26.55	32.06
4	2483.50	47.40 AV	54.00	-6.60	1.31 H	230	15.34	32.06
5	4924.00	50.48 PK	74.00	-23.52	1.14 H	4	12.19	38.29
6	4924.00	37.02 AV	54.00	-16.98	1.14 H	4	-1.27	38.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	109.64 PK			1.22 V	108	77.86	31.78
2	*2412.00	105.12 AV			1.22 V	108	73.34	31.78
3	2488.00	62.17 PK	74.00	-11.83	1.38 V	208	30.09	32.08
4	2488.00	51.58 AV	54.00	-2.42	1.38 V	208	19.50	32.08
5	4924.00	50.60 PK	74.00	-23.40	1.22 V	333	12.31	38.29
6	4924.00	38.51 AV	54.00	-15.49	1.22 V	333	0.22	38.29

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.



A D T

## 802.11g OFDM MODULATION (NORMAL MODE)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 998hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.53 PK	74.00	-15.47	1.31 H	265	26.84	31.69
2	2390.00	46.03 AV	54.00	-7.97	1.31 H	265	14.34	31.69
3	*2412.00	100.84 PK			1.31 H	267	69.06	31.78
4	*2412.00	89.72 AV			1.31 H	267	57.94	31.78
5	4824.00	48.90 PK	74.00	-25.10	1.06 H	251	10.83	38.06
6	4824.00	36.22 AV	54.00	-17.78	1.06 H	251	-1.85	38.06
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.57 PK	74.00	-5.43	1.14 V	41	36.88	31.69
2	2390.00	51.33 AV	54.00	-2.67	1.14 V	41	19.64	31.69
3	*2412.00	111.94 PK			1.51 V	198	80.16	31.78
4	*2412.00	100.84 AV			1.51 V	198	69.06	31.78
5	4824.00	49.00 PK	74.00	-25.00	1.22 V	23	10.93	38.06
6	4824.00	36.13 AV	54.00	-17.87	1.22 V	23	-1.94	38.06

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 998hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.84 PK			1.30 H	255	72.96	31.88
2	*2437.00	93.30 AV			1.30 H	255	61.42	31.88
3	4874.00	49.23 PK	74.00	-24.77	1.03 H	77	11.05	38.17
4	4874.00	36.32 AV	54.00	-17.68	1.03 H	77	-1.86	38.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.50 PK			1.16 V	201	83.62	31.88
2	*2437.00	104.28 AV			1.16 V	201	72.40	31.88
3	4874.00	49.44 PK	74.00	-24.56	1.07 V	164	11.26	38.17
4	4874.00	36.43 AV	54.00	-17.57	1.07 V	164	-1.75	38.17

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 998hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.43 PK			1.27 H	255	67.45	31.98
2	*2462.00	88.17 AV			1.27 H	255	56.19	31.98
3	2483.50	59.39 PK	74.00	-14.61	1.27 H	257	27.33	32.06
4	2483.50	46.56 AV	54.00	-7.44	1.27 H	257	14.50	32.06
5	4924.00	48.69 PK	74.00	-25.31	1.19 H	87	10.40	38.29
6	4924.00	35.86 AV	54.00	-18.14	1.19 H	87	-2.43	38.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.93 PK			1.15 V	30	78.95	31.98
2	*2462.00	100.10 AV			1.15 V	30	68.12	31.98
3	2483.50	66.74 PK	74.00	-7.26	1.14 V	166	34.68	32.06
4	<b>2483.50</b>	<b>51.92 AV</b>	<b>54.00</b>	<b>-2.08</b>	<b>1.14 V</b>	<b>166</b>	<b>19.86</b>	<b>32.06</b>
5	4924.00	48.48 PK	74.00	-25.52	1.11 V	299	10.19	38.29
6	4924.00	35.83 AV	54.00	-18.17	1.11 V	299	-2.46	38.29

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.

### 802.11g OFDM MODULATION (TURBO MODE)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH 998hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.13 PK	74.00	-16.87	1.12 H	154	25.44	31.69
2	2390.00	46.33 AV	54.00	-7.67	1.12 H	154	14.64	31.69
3	*2437.00	99.32 PK			1.02 H	227	67.44	31.88
4	*2437.00	89.05 AV			1.02 H	227	57.17	31.88
5	2483.50	59.04 PK	74.00	-14.96	1.00 H	226	26.98	32.06
6	2483.50	46.63 AV	54.00	-7.37	1.00 H	226	14.57	32.06
7	4874.00	49.47 PK	74.00	-24.53	1.08 H	96	11.29	38.17
8	4874.00	36.42 AV	54.00	-17.58	1.08 H	96	-1.76	38.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.78 PK	74.00	-9.22	1.18 V	40	33.09	31.69
2	2390.00	50.92 AV	54.00	-3.08	1.18 V	40	19.23	31.69
3	*2437.00	110.65 PK			1.14 V	209	78.77	31.88
4	*2437.00	100.17 AV			1.14 V	209	68.29	31.88
5	2483.50	67.54 PK	74.00	-6.46	1.35 V	191	35.48	32.06
6	2483.50	51.91 AV	54.00	-2.09	1.35 V	191	19.85	32.06
7	4874.00	48.67 PK	74.00	-25.33	1.15 V	186	10.49	38.17
8	4874.00	36.29 AV	54.00	-17.71	1.15 V	186	-1.89	38.17

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “: Fundamental frequency.



**BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION (NORMAL MODE)**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1023hPa	TESTED BY	Mark Liao
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.60	39.05 QP	46.00	-6.95	1.00 H	295	25.37	13.68
2	500.42	36.33 QP	46.00	-9.67	2.00 H	43	15.83	20.50
3	700.68	41.73 QP	46.00	-4.27	1.00 H	34	16.49	25.24
4	725.96	40.47 QP	46.00	-5.53	1.25 H	331	14.91	25.56
5	875.67	40.16 QP	46.00	-5.84	1.00 H	319	12.46	27.71
6	1000.00	41.17 QP	54.00	-12.83	1.25 H	334	11.65	29.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.60	41.43 QP	46.00	-4.57	1.50 V	322	27.75	13.68
2	374.04	35.87 QP	46.00	-10.13	1.25 V	139	19.22	16.65
3	500.42	38.94 QP	46.00	-7.06	1.00 V	22	18.44	20.50
4	700.68	37.97 QP	46.00	-8.03	1.50 V	25	12.73	25.24
5	875.67	42.34 QP	46.00	-3.66	1.00 V	331	14.63	27.71
6	1000.00	40.67 QP	54.00	-13.33	1.25 V	352	11.15	29.52

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1023hPa	TESTED BY	Mark Liao
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	274.88	36.79 QP	46.00	-9.21	1.25 H	253	22.57	14.22
2	348.76	35.26 QP	46.00	-10.74	1.00 H	301	19.24	16.02
3	700.68	39.60 QP	46.00	-6.40	1.25 H	322	14.36	25.24
4	725.96	39.83 QP	46.00	-6.17	1.00 H	322	14.27	25.56
5	875.67	41.83 QP	46.00	-4.17	1.00 H	313	14.13	27.71
6	1000.00	40.52 QP	54.00	-13.48	1.25 H	331	11.00	29.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	34.48 QP	40.00	-5.52	1.50 V	268	21.96	12.52
2	249.60	36.94 QP	46.00	-9.06	1.50 V	334	23.26	13.68
3	374.04	35.89 QP	46.00	-10.11	1.00 V	10	19.23	16.65
4	700.68	37.92 QP	46.00	-8.08	1.25 V	34	12.68	25.24
5	875.67	39.71 QP	46.00	-6.29	1.00 V	334	12.00	27.71
6	1000.00	39.58 QP	54.00	-14.42	2.00 V	349	10.06	29.52

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1023hPa	TESTED BY	Mark Liao
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.60	39.28 QP	46.00	-6.72	1.00 H	67	25.60	13.68
2	374.04	38.59 QP	46.00	-7.41	1.00 H	307	21.93	16.65
3	700.68	37.51 QP	46.00	-8.49	1.00 H	334	12.27	25.24
4	751.23	38.34 QP	46.00	-7.66	1.00 H	331	12.47	25.87
5	875.67	42.10 QP	46.00	-3.90	1.00 H	322	14.39	27.71
6	1000.00	39.43 QP	54.00	-14.57	1.25 H	328	9.91	29.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	61.01	30.85 QP	40.00	-9.15	1.25 V	136	17.28	13.56
2	249.60	40.34 QP	46.00	-5.66	1.50 V	328	26.66	13.68
3	374.04	37.95 QP	46.00	-8.05	1.50 V	136	21.29	16.65
4	500.42	38.15 QP	46.00	-7.85	1.25 V	46	17.65	20.50
5	875.67	40.34 QP	46.00	-5.66	1.00 V	337	12.63	27.71
6	1000.00	39.24 QP	54.00	-14.76	2.00 V	349	9.72	29.52

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

**BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION (TURBO MODE)**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1023hPa	TESTED BY	Mark Liao
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.60	37.74 QP	46.00	-8.26	1.50 H	82	24.06	13.68
2	274.88	39.03 QP	46.00	-6.97	1.25 H	271	24.81	14.22
3	700.68	40.49 QP	46.00	-5.51	1.25 H	322	15.25	25.24
4	725.96	40.31 QP	46.00	-5.69	1.00 H	316	14.75	25.56
5	875.67	41.55 QP	46.00	-4.45	1.00 H	319	13.85	27.71
6	1000.00	42.56 QP	54.00	-11.44	1.25 H	346	13.04	29.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	35.18 QP	40.00	-4.82	1.00 V	10	22.61	12.57
2	249.60	40.92 QP	46.00	-5.08	1.50 V	325	27.24	13.68
3	500.42	38.40 QP	46.00	-7.60	1.00 V	10	17.90	20.50
4	700.68	39.55 QP	46.00	-6.45	1.50 V	40	14.31	25.24
5	875.01	42.68 QP	46.00	-3.32	1.07 V	359	14.98	27.70
6	1000.00	42.63 QP	54.00	-11.37	1.50 V	349	13.11	29.52

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1023hPa	TESTED BY	Mark Liao
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	300.16	35.30 QP	46.00	-10.70	1.00 H	298	20.52	14.78
2	368.21	36.63 QP	46.00	-9.37	1.00 H	316	20.12	16.51
3	675.40	38.79 QP	46.00	-7.21	1.25 H	34	14.08	24.71
4	700.68	40.17 QP	46.00	-5.83	1.00 H	334	14.93	25.24
5	875.67	39.42 QP	46.00	-6.58	1.00 H	46	11.72	27.71
6	1000.00	39.55 QP	54.00	-14.45	1.25 H	334	10.03	29.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.60	36.04 QP	46.00	-9.96	1.50 V	340	22.36	13.68
2	374.04	35.87 QP	46.00	-10.13	1.00 V	34	19.22	16.65
3	700.68	38.61 QP	46.00	-7.39	1.25 V	19	13.37	25.24
4	725.96	36.14 QP	46.00	-9.86	1.25 V	25	10.58	25.56
5	875.67	40.23 QP	46.00	-5.77	1.00 V	346	12.52	27.71
6	1000.00	39.07 QP	54.00	-14.93	1.50 V	7	9.55	29.52

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1023hPa	TESTED BY	Mark Liao
TEST MODE	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.60	39.01 QP	46.00	-6.99	1.25 H	52	25.34	13.68
2	274.88	36.86 QP	46.00	-9.14	1.25 H	268	22.64	14.22
3	374.04	37.92 QP	46.00	-8.08	1.00 H	301	21.27	16.65
4	751.23	38.85 QP	46.00	-7.15	1.00 H	331	12.98	25.87
5	875.67	41.70 QP	46.00	-4.30	1.00 H	316	13.99	27.71
6	1000.00	39.51 QP	54.00	-14.49	1.25 H	322	9.99	29.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.23	31.79 QP	40.00	-8.21	1.00 V	139	17.74	14.05
2	249.60	40.41 QP	46.00	-5.59	1.50 V	331	26.73	13.68
3	374.04	37.70 QP	46.00	-8.30	1.50 V	130	21.04	16.65
4	500.42	38.26 QP	46.00	-7.74	1.00 V	28	17.76	20.50
5	875.67	41.18 QP	46.00	-4.82	1.00 V	340	13.47	27.71
6	1000.00	39.31 QP	54.00	-14.69	1.50 V	7	9.79	29.52

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

## 4.2 CONDUCTED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 19, 2008	Nov. 18, 2009
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 31, 2008	Dec. 30, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Jun. 13, 2008	Jun. 12, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Dec. 04, 2008	Dec. 03, 2009
Software ADT	ADT_Cond_ V7.3.6	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Shielded Room 1.
  3. The VCCI Site Registration No. is C-2040.



A D T

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.2.5 TEST SETUP

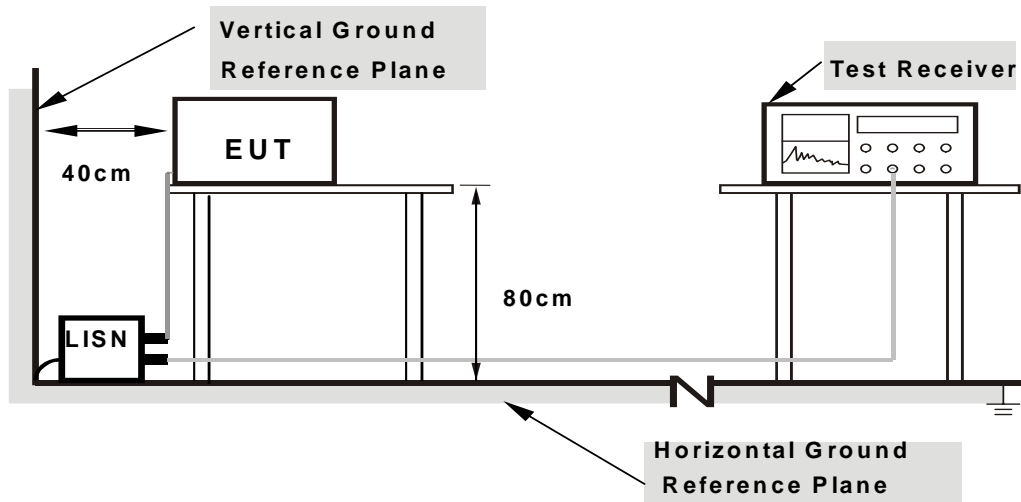

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


## 4.2.7 TEST RESULTS

### CONDUCTED WORST-CASE DATA : 802.11g OFDM MODULATION (NORMAL MODE)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Daniel Lin		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.177	0.13	58.33	44.80	58.46	44.93	64.61
2	0.236	0.13	58.03	45.77	58.16	45.90	62.24	52.24	-4.08	-6.34
3	0.416	0.14	52.95	39.14	53.09	39.28	57.54	47.54	-4.44	-8.25
4	<b>0.533</b>	<b>0.15</b>	<b>52.13</b>	<b>39.28</b>	<b>52.28</b>	<b>39.43</b>	<b>56.00</b>	<b>46.00</b>	<b>-3.72</b>	<b>-6.57</b>
5	0.651	0.16	51.64	39.19	51.80	39.35	56.00	46.00	-4.20	-6.65
6	4.490	0.39	46.23	34.04	46.62	34.43	56.00	46.00	-9.38	-11.57
7	14.185	0.87	43.50	-	44.37	-	60.00	50.00	-15.63	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

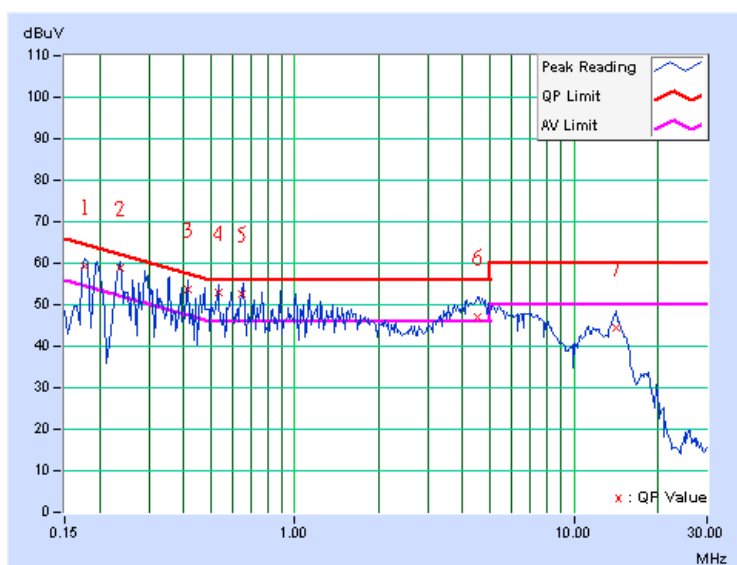




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Daniel Lin		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.176	0.15	57.10	43.17	57.25	43.32	64.67	54.67	-7.43	-11.36
2	0.199	0.15	55.79	43.66	55.94	43.81	63.67	53.67	-7.73	-9.86
3	0.296	0.15	53.14	40.24	53.29	40.39	60.36	50.36	-7.06	-9.96
4	0.357	0.16	52.64	39.66	52.80	39.82	58.81	48.81	-6.01	-8.99
5	0.475	0.16	50.17	37.03	50.33	37.19	56.43	46.43	-6.10	-9.24
6	0.651	0.18	51.53	38.53	51.71	38.71	56.00	46.00	-4.29	-7.29
7	4.009	0.39	45.53	-	45.92	-	56.00	46.00	-10.08	-
8	14.401	0.80	33.61	-	34.41	-	60.00	50.00	-25.59	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

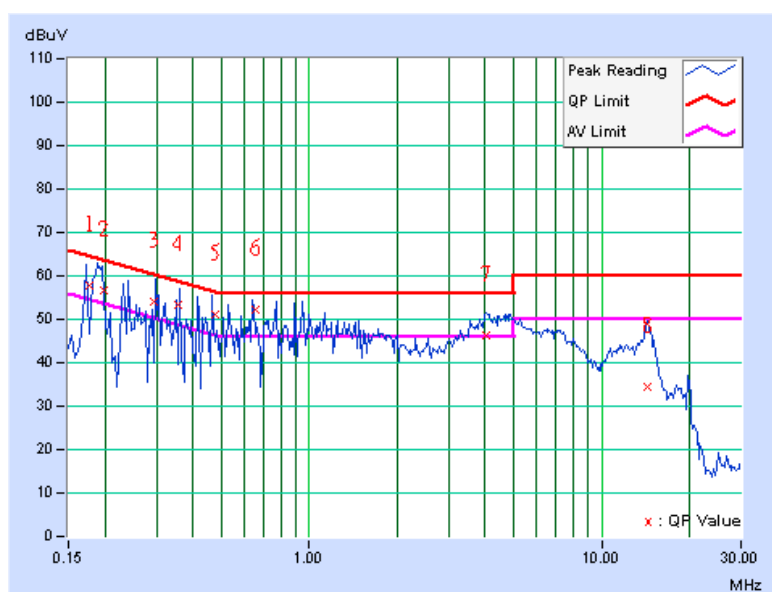

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.13	46.74	-	46.87	-	65.18	55.18	-18.31	-
2	0.326	0.14	36.14	-	36.28	-	59.56	49.56	-23.28	-
3	0.474	0.14	29.94	-	30.08	-	56.44	46.44	-26.35	-
4	0.670	0.16	23.58	-	23.74	-	56.00	46.00	-32.26	-
5	2.426	0.27	36.87	-	37.14	-	56.00	46.00	-18.86	-
6	16.168	0.97	36.58	-	37.55	-	60.00	50.00	-22.45	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

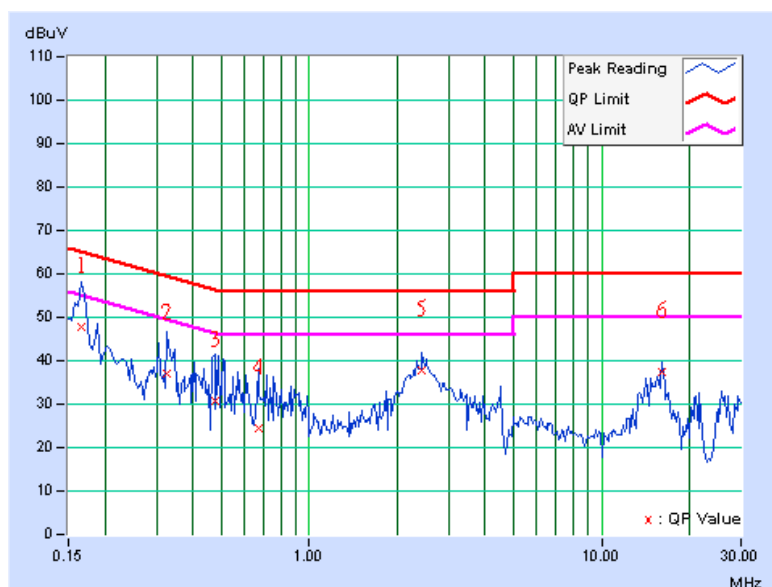




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.14	44.76	-	44.90	-	65.58	55.58	-20.68	-
2	0.318	0.16	35.20	-	35.36	-	59.76	49.76	-24.40	-
3	0.474	0.16	28.99	-	29.15	-	56.44	46.44	-27.28	-
4	1.063	0.20	19.65	-	19.85	-	56.00	46.00	-36.15	-
5	2.570	0.30	30.61	-	30.91	-	56.00	46.00	-25.09	-
6	16.230	0.87	35.36	-	36.23	-	60.00	50.00	-23.77	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

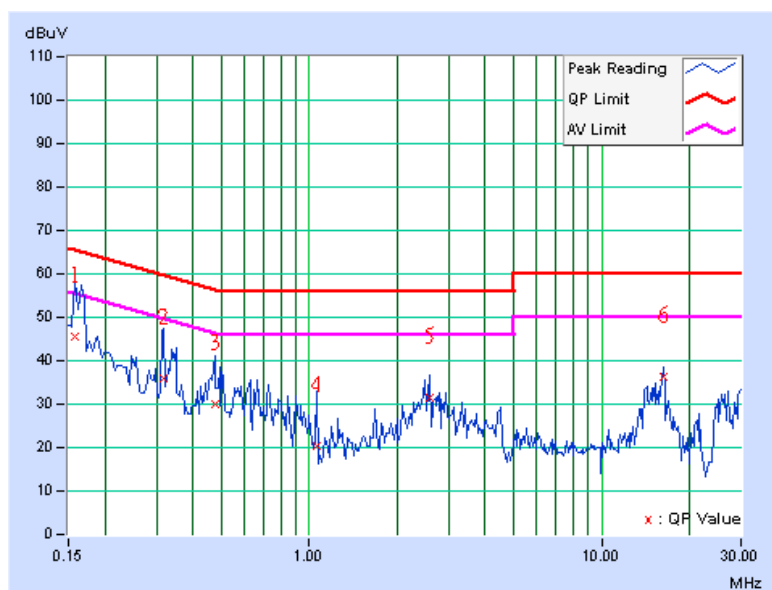




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	C
TESTED BY	Daniel Lin		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.262	0.13	40.40	-	40.53	-	61.37	51.37	-20.83	-
2	0.396	0.14	41.02	-	41.16	-	57.93	47.93	-16.78	-
3	0.908	0.17	45.20	-	45.37	-	56.00	46.00	-10.63	-
4	1.605	0.21	43.80	-	44.01	-	56.00	46.00	-11.99	-
5	1.939	0.23	45.59	-	45.82	-	56.00	46.00	-10.18	-
6	8.402	0.58	37.65	-	38.23	-	60.00	50.00	-21.77	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

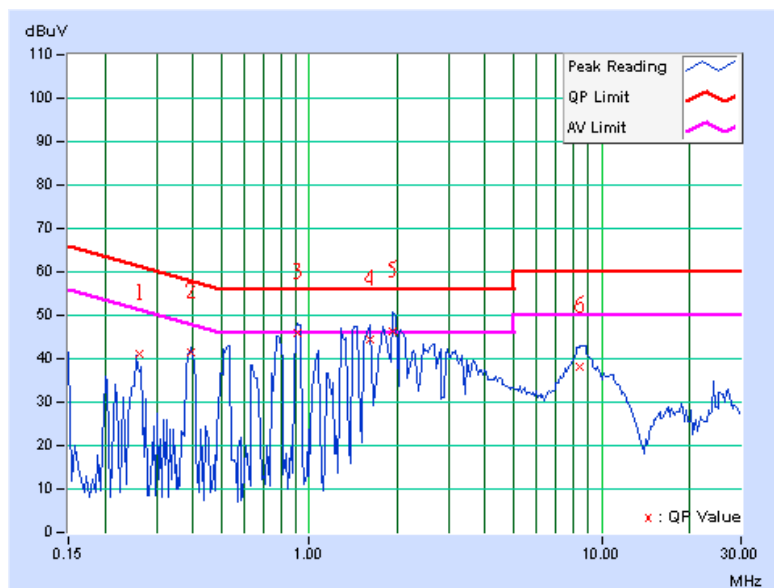




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	C
TESTED BY	Daniel Lin		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.263	0.15	44.95	-	45.10	-	61.33	51.33	-16.22	-
2	0.397	0.16	43.72	-	43.88	-	57.91	47.91	-14.03	-
3	0.912	0.19	45.68	-	45.87	-	56.00	46.00	-10.13	-
4	1.613	0.23	44.76	-	44.99	-	56.00	46.00	-11.01	-
5	1.941	0.25	46.22	26.00	46.47	26.25	56.00	46.00	-9.53	-19.75
6	8.684	0.60	39.12	-	39.72	-	60.00	50.00	-20.28	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

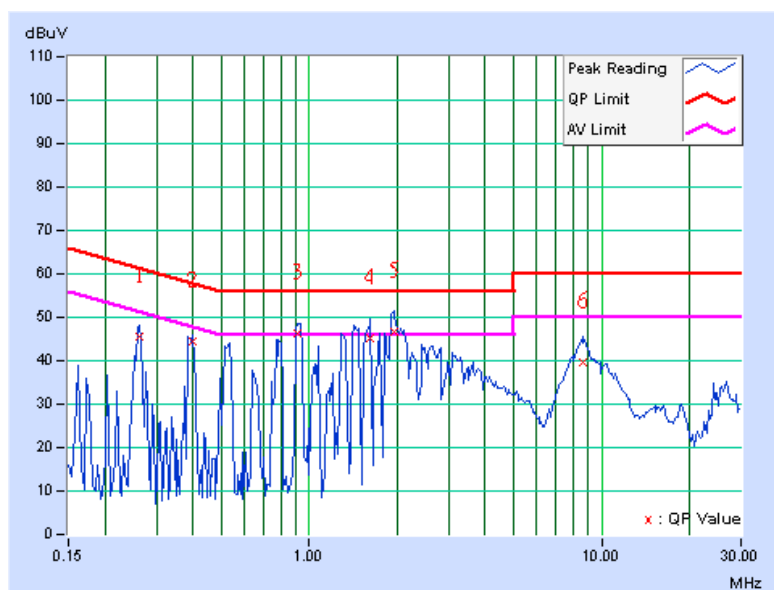


**CONDUCTED WORST-CASE DATA : 802.11g OFDM MODULATION (TURBO MODE)**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Daniel Lin		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.179	0.13	57.37	43.43	57.50	43.56	64.55	54.55	-7.05	-10.99
2	0.199	0.13	55.39	43.28	55.52	43.41	63.64	53.64	-8.12	-10.23
3	0.237	0.13	57.59	44.93	57.72	45.06	62.19	52.19	-4.47	-7.13
4	0.414	0.14	52.45	39.81	52.59	39.95	57.56	47.56	-4.97	-7.61
5	0.533	0.15	51.79	38.93	51.94	39.08	56.00	46.00	-4.06	-6.92
6	0.653	0.16	50.98	38.26	51.14	38.42	56.00	46.00	-4.86	-7.58
7	4.238	0.38	46.21	33.05	46.59	33.43	56.00	46.00	-9.41	-12.57
8	14.080	0.86	37.53	-	38.39	-	60.00	50.00	-21.61	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

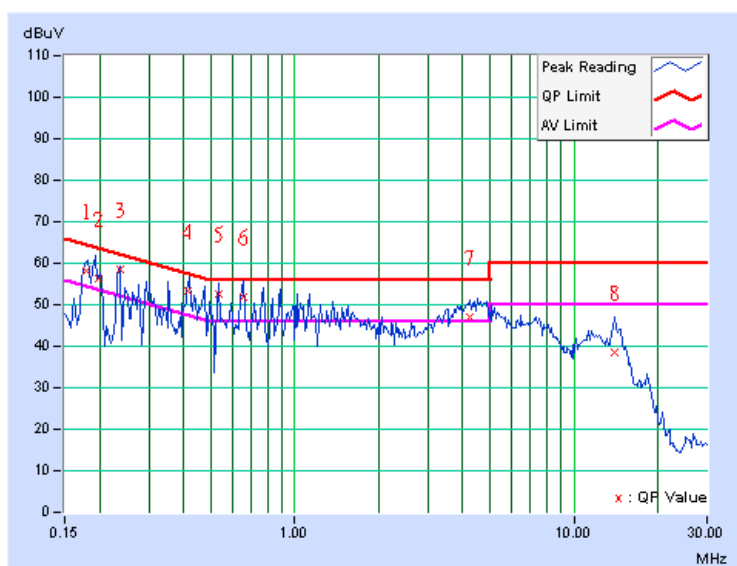




EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Daniel Lin		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.179	0.15	56.51	42.50	56.66	42.65	64.56	54.56	-7.90	-11.91
2	0.199	0.15	55.27	44.02	55.42	44.17	63.64	53.64	-8.22	-9.47
3	0.237	0.15	56.92	44.65	57.07	44.80	62.19	52.19	-5.12	-7.39
4	0.296	0.15	52.96	40.46	53.11	40.61	60.36	50.36	-7.25	-9.75
5	0.533	0.17	51.60	38.14	51.77	38.31	56.00	46.00	-4.23	-7.69
6	0.830	0.19	45.67	-	45.86	-	56.00	46.00	-10.14	-
7	4.363	0.41	44.27	-	44.68	-	56.00	46.00	-11.32	-
8	12.891	0.75	39.95	-	40.70	-	60.00	50.00	-19.30	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

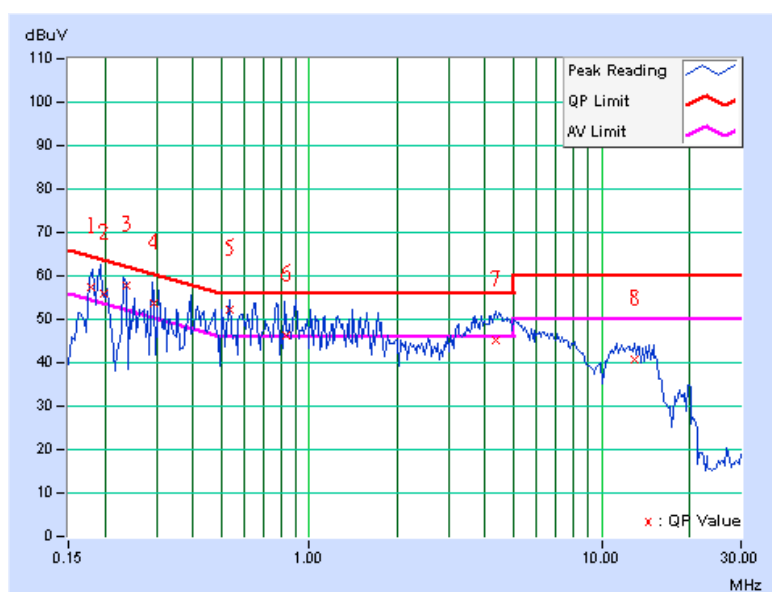

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.13	43.72	-	43.85	-	65.58	55.58	-21.73	-
2	0.326	0.14	33.74	-	33.88	-	59.56	49.56	-25.68	-
3	0.474	0.14	27.12	-	27.26	-	56.44	46.44	-29.17	-
4	0.654	0.16	22.25	-	22.41	-	56.00	46.00	-33.59	-
5	2.453	0.27	37.37	-	37.64	-	56.00	46.00	-18.36	-
6	16.230	0.98	37.25	-	38.23	-	60.00	50.00	-21.77	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

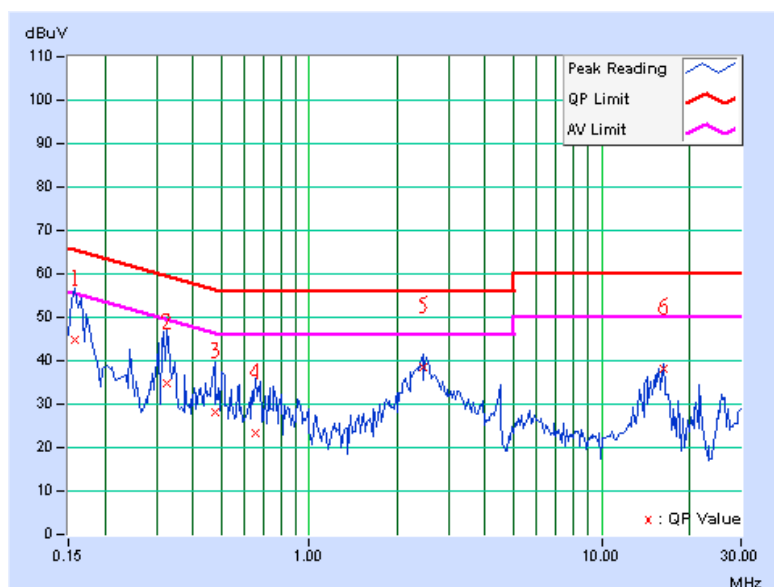




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.14	44.92	-	45.06	-	65.18	55.18	-20.11	-
2	0.318	0.16	33.77	-	33.93	-	59.76	49.76	-25.83	-
3	0.490	0.17	27.61	-	27.78	-	56.17	46.17	-28.39	-
4	0.619	0.17	23.63	-	23.80	-	56.00	46.00	-32.20	-
5	2.441	0.29	37.66	-	37.95	-	56.00	46.00	-18.05	-
6	16.168	0.87	36.80	-	37.67	-	60.00	50.00	-22.33	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

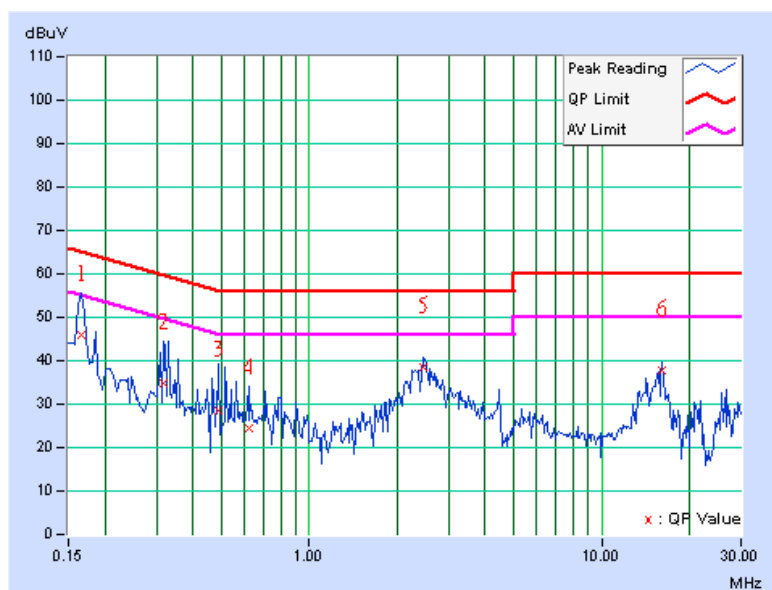




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	C
TESTED BY	Daniel Lin		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.262	0.13	39.41	-	39.54	-	61.37	51.37	-21.83	-
2	0.401	0.14	42.44	-	42.58	-	57.83	47.83	-15.25	-
3	0.923	0.17	46.17	33.10	46.34	33.27	56.00	46.00	-9.66	-12.73
4	1.422	0.20	43.72	-	43.92	-	56.00	46.00	-12.08	-
5	1.938	0.23	45.55	-	45.78	-	56.00	46.00	-10.22	-
6	8.645	0.59	38.80	-	39.39	-	60.00	50.00	-20.61	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

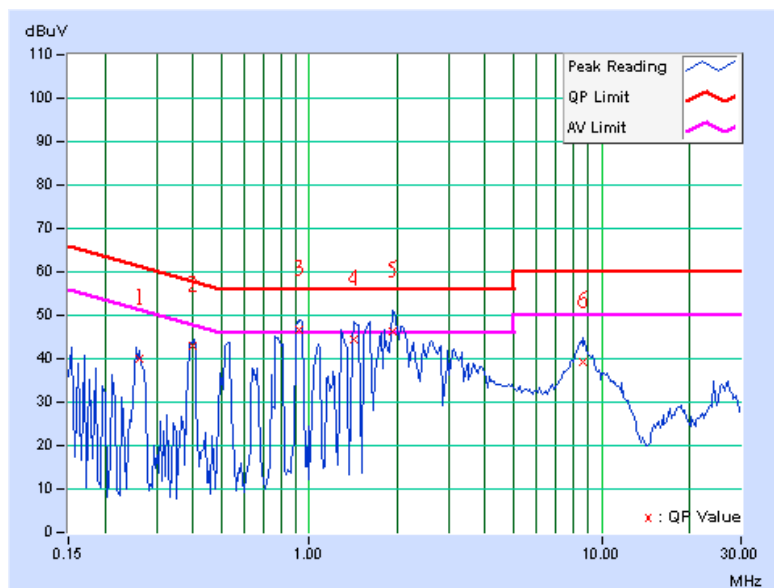




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	QPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	12Mbps	ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1013hPa
INPUT POWER	120Vac, 60 Hz	TEST MODE	C
TESTED BY	Daniel Lin		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.264	0.15	44.83	-	44.98	-	61.29	51.29	-16.31	-
2	0.396	0.16	44.17	-	44.33	-	57.94	47.94	-13.61	-
3	0.916	0.19	46.27	33.10	46.46	33.29	56.00	46.00	-9.54	-12.71
4	1.607	0.23	45.06	-	45.29	-	56.00	46.00	-10.71	-
5	1.930	0.25	46.61	26.36	46.86	26.61	56.00	46.00	-9.14	-19.39
6	8.645	0.60	39.93	-	40.53	-	60.00	50.00	-19.47	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

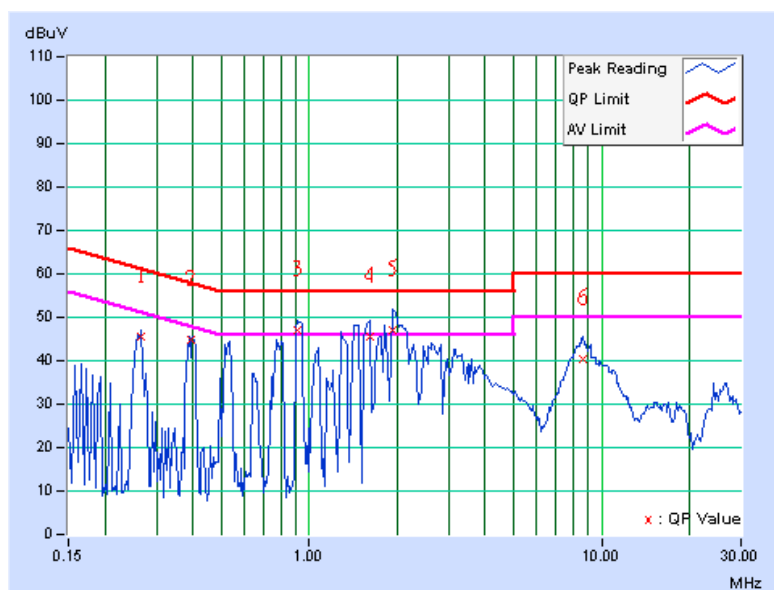



A D T

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER	FSP 40	100041	Apr. 22, 2008	Apr. 21, 2009

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP

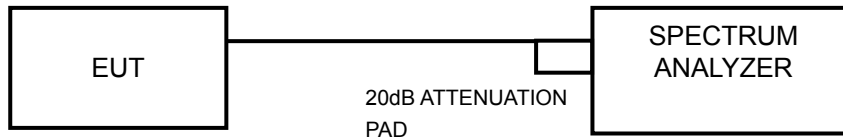

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T


### 4.3.7 TEST RESULTS

#### 802.11b DSSS MODULATION

<b>MODULATION TYPE</b>	DBPSK	<b>TRANSFER RATE</b>	1Mbps
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 67%RH, 1013hPa
<b>TESTED BY</b>	Mark Liao		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.07	0.5	PASS
6	2437	11.19	0.5	PASS
11	2462	12.10	0.5	PASS

#### CH 1

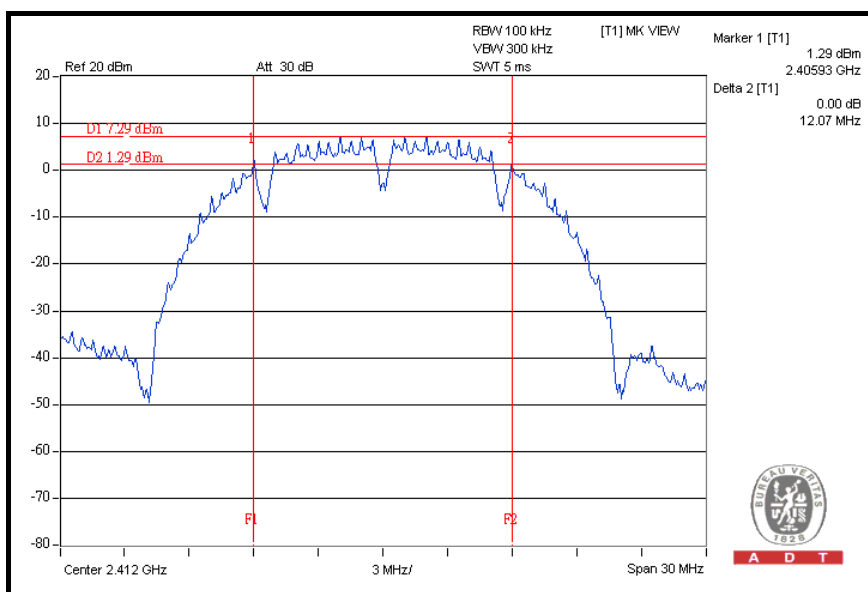




### CH 6

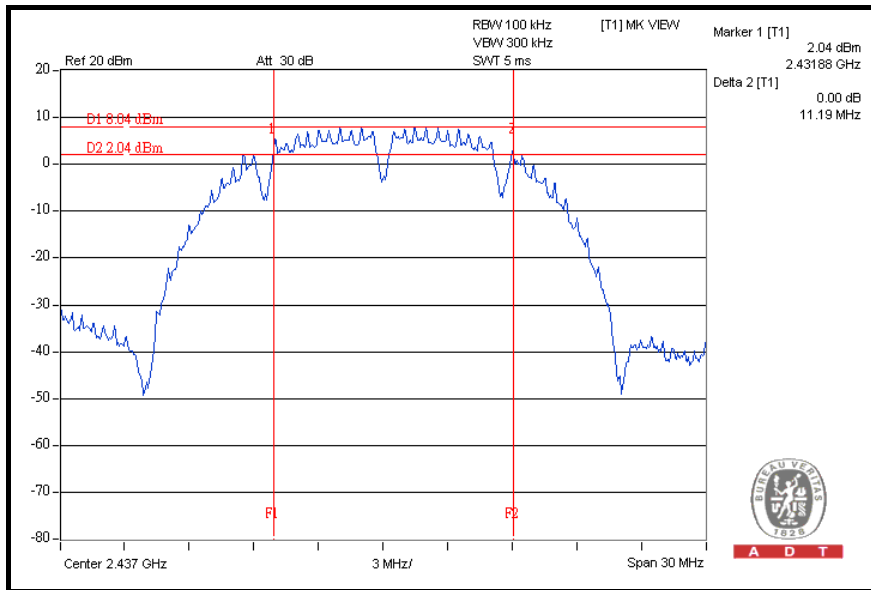

### CH 11

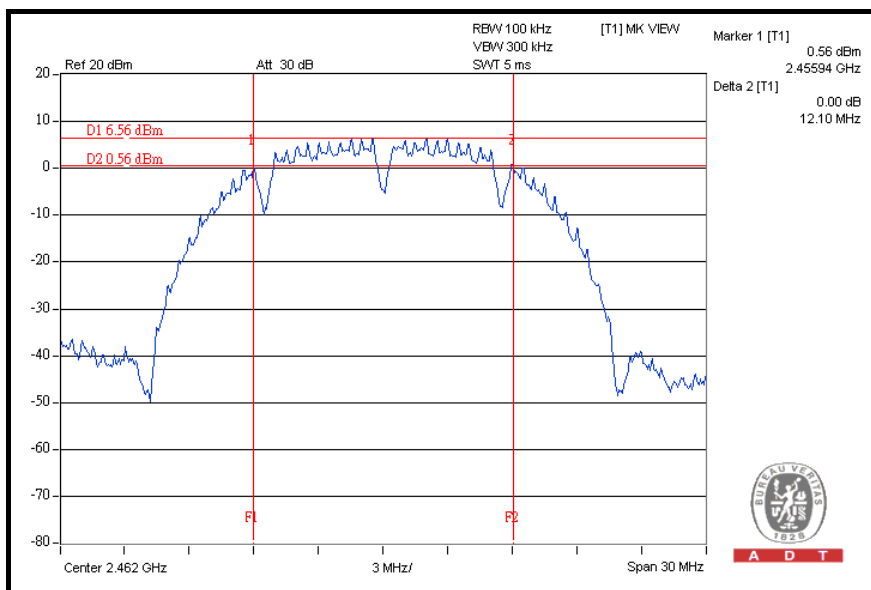




A D T

### 802.11g OFDM MODULATION (NORMAL MODE)

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 67%RH, 1013hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.41	0.5	PASS
6	2437	16.42	0.5	PASS
11	2462	16.37	0.5	PASS


### CH 1

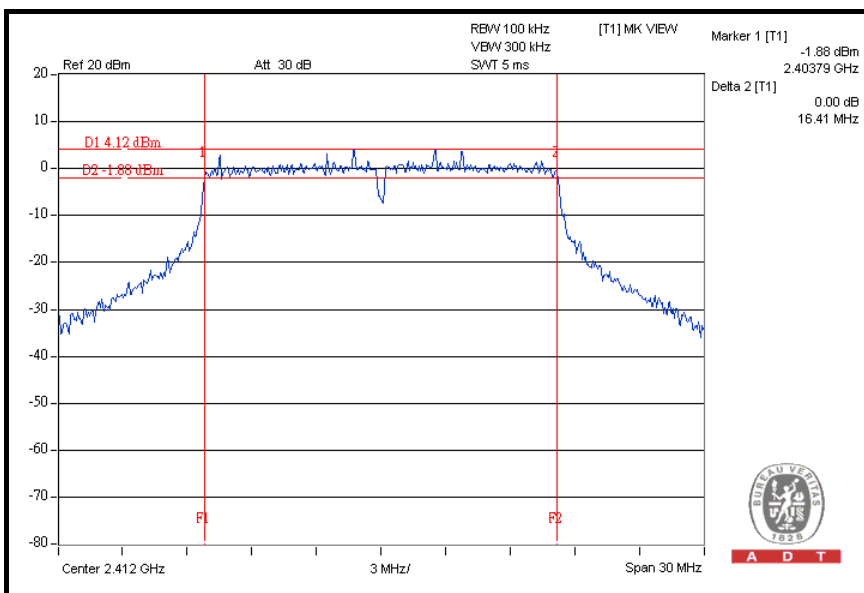




A D T

### CH 6

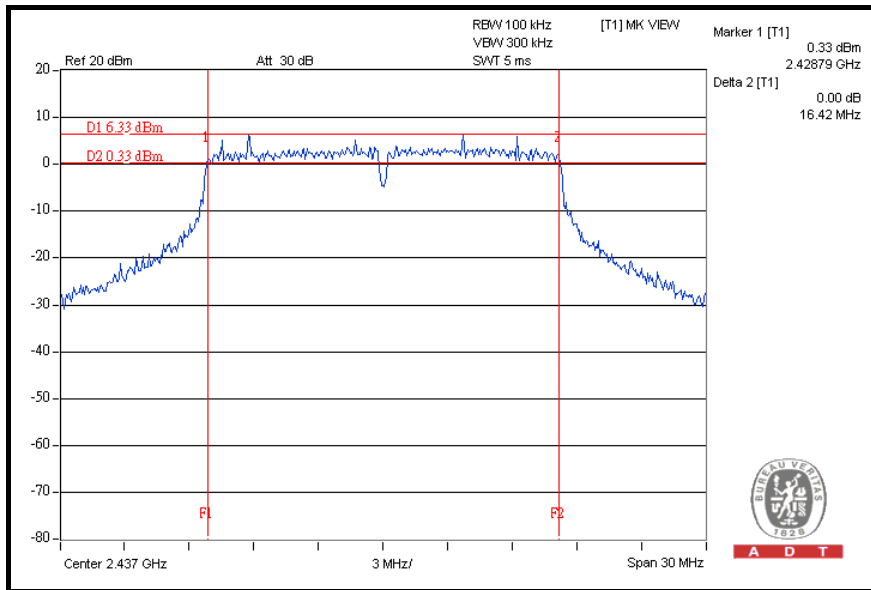

### CH 11

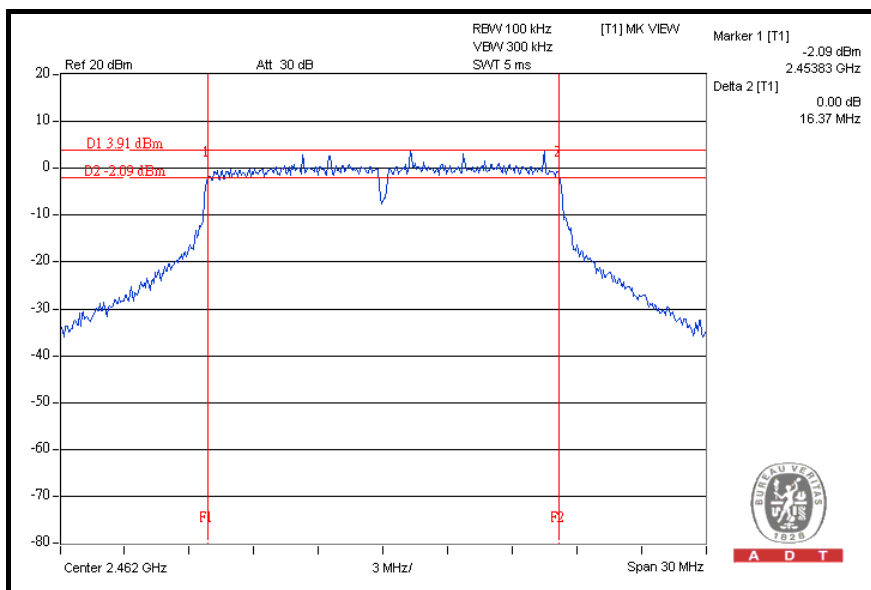




A D T

### 802.11g OFDM MODULATION (TURBO MODE)

<b>MODULATION TYPE</b>	QPSK	<b>TRANSFER RATE</b>	12Mbps
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 67%RH, 1013hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	32.65	0.5	PASS

### CH 6

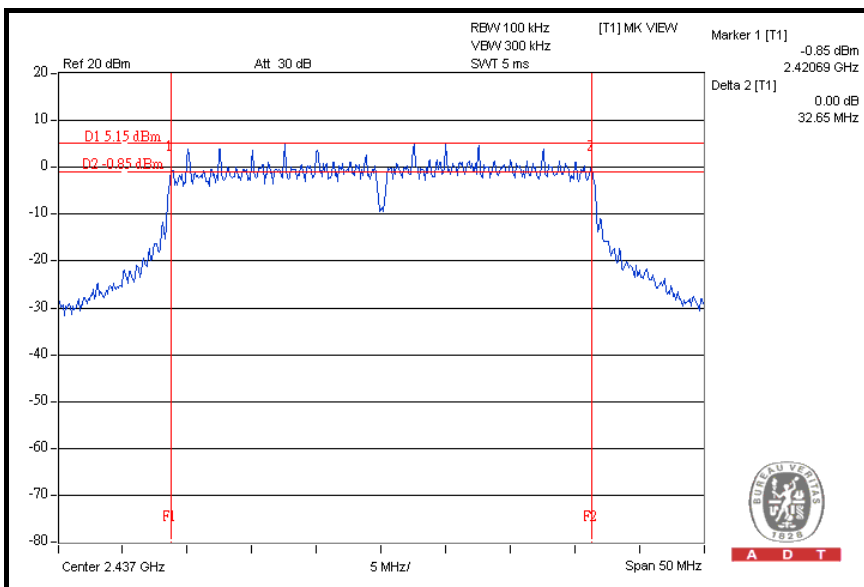

#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
HIGH SPEED PEAK POWER METER	ML2495A	0824012	Aug. 04, 2008	Aug. 03, 2009
POWER SENSOR	MA2444B	0738138	Aug. 04, 2008	Aug. 03, 2009

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


#### 4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.5 TEST SETUP

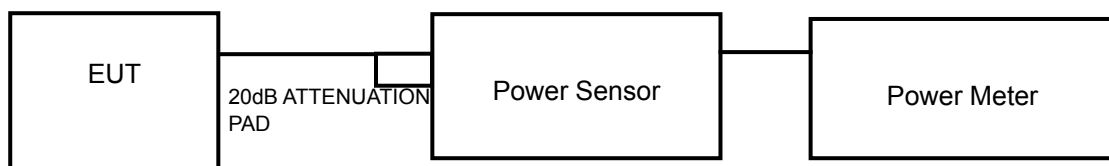

#### 4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6.



A D T

#### 4.4.7 TEST RESULTS

##### 802.11b DSSS MODULATION

<b>MODULATION TYPE</b>	DBPSK	<b>TRANSFER RATE</b>	1Mbps
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 67%RH, 1013hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	100.693	20.03	30	PASS
6	2437	127.057	21.04	30	PASS
11	2462	89.331	19.51	30	PASS

##### 802.11g OFDM MODULATION (NORMAL MODE)

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 67%RH, 1013hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	223.872	23.50	30	PASS
6	2437	<b>357.273</b>	25.53	30	PASS
11	2462	199.526	23.00	30	PASS



A D T

**802.11g OFDM MODULATION (TURBO MODE)**

<b>MODULATION TYPE</b>	QPSK	<b>TRANSFER RATE</b>	12Mbps
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 67%RH, 1013hPa
<b>TESTED BY</b>	Mark Liao		

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>PEAK POWER OUTPUT (mW)</b>	<b>PEAK POWER OUTPUT (dBm)</b>	<b>PEAK POWER LIMIT (dBm)</b>	<b>PASS/FAIL</b>
6	2437	316.957	25.01	30	PASS



## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP 40	100041	Apr. 22, 2008	Apr. 21, 2009

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.5.5 TEST SETUP

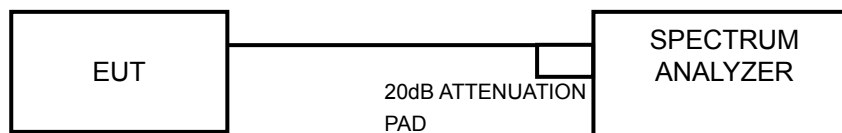

### 4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6.



A D T


### 4.5.7 TEST RESULTS

#### 802.11b DSSS MODULATION

<b>MODULATION TYPE</b>	DBPSK	<b>TRANSFER RATE</b>	1Mbps
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 67%RH, 1013hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-6.48	8	PASS
6	2437	-5.60	8	PASS
11	2462	-7.18	8	PASS


#### CH 1

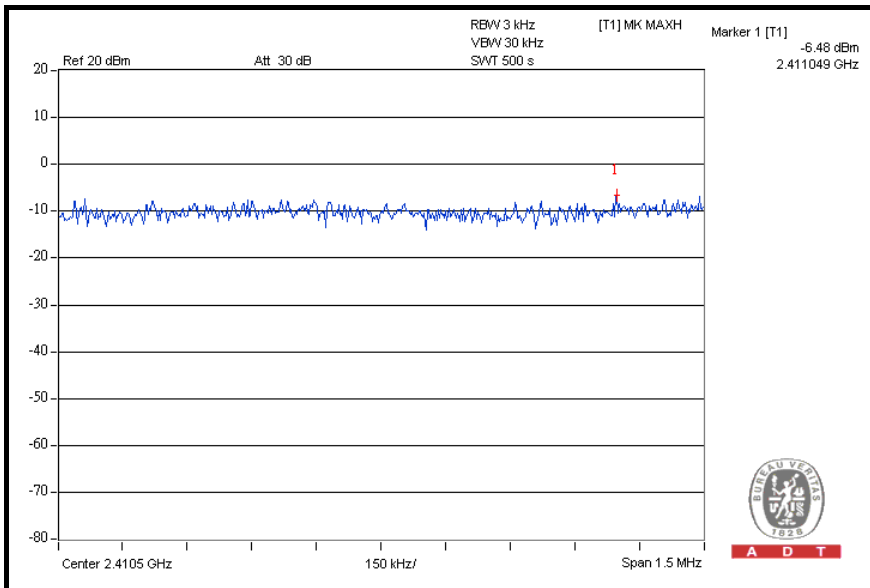




A D T

### CH 6

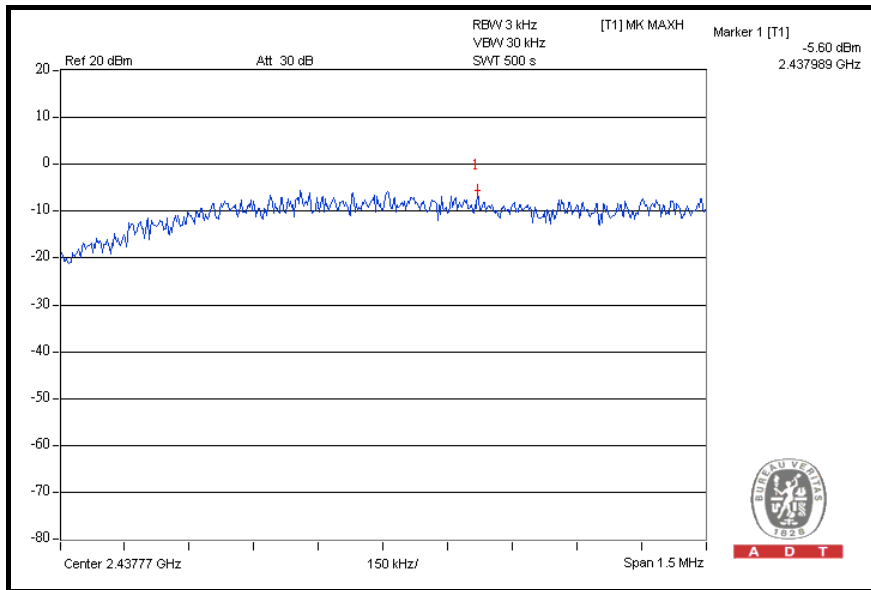

### CH 11

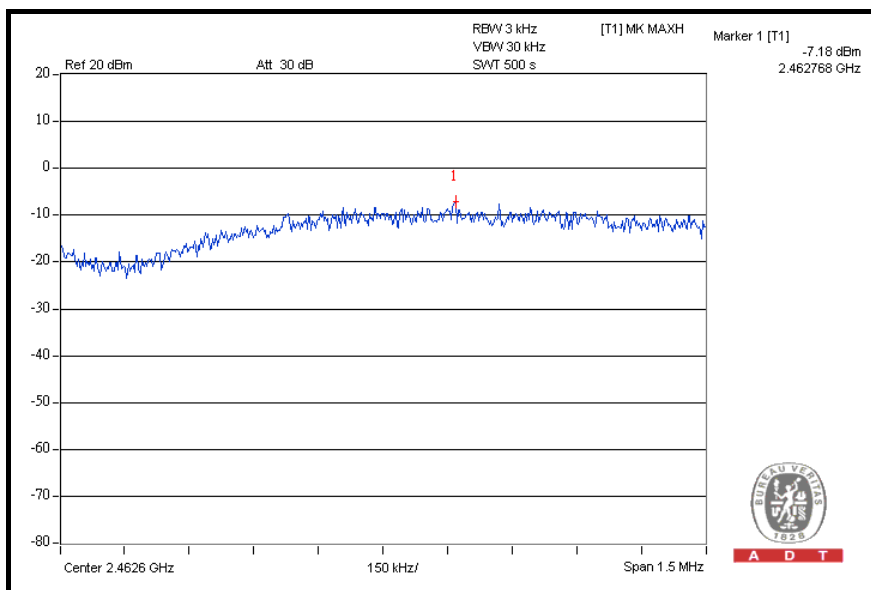




A D T

### 802.11g OFDM MODULATION (NORMAL MODE)

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 67%RH, 1013hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.66	8	PASS
6	2437	-7.56	8	PASS
11	2462	-10.35	8	PASS


### CH 1

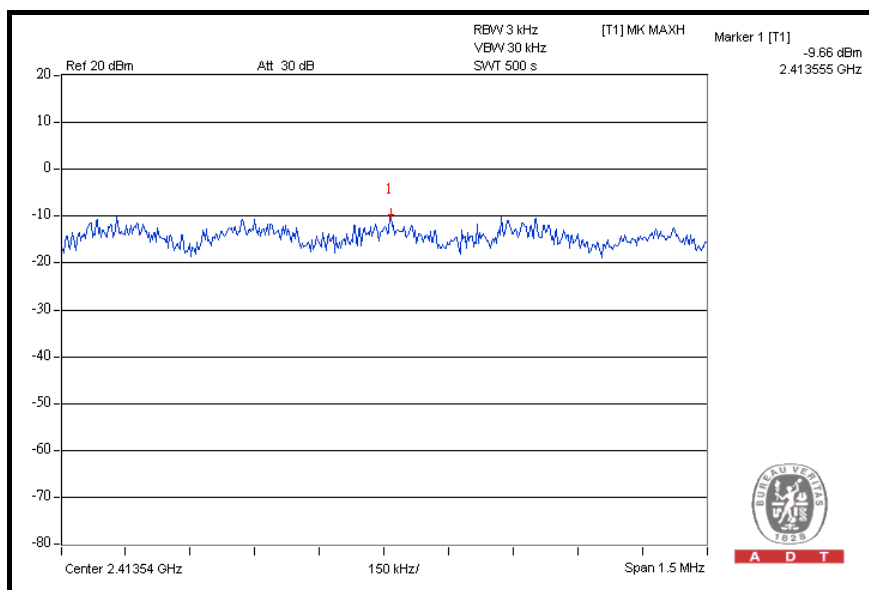




A D T

### CH 6

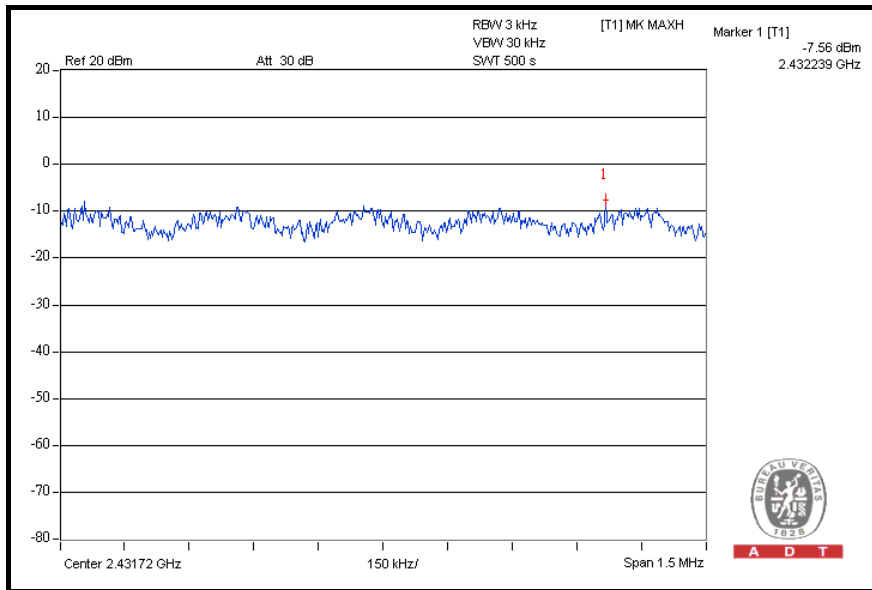

### CH 11

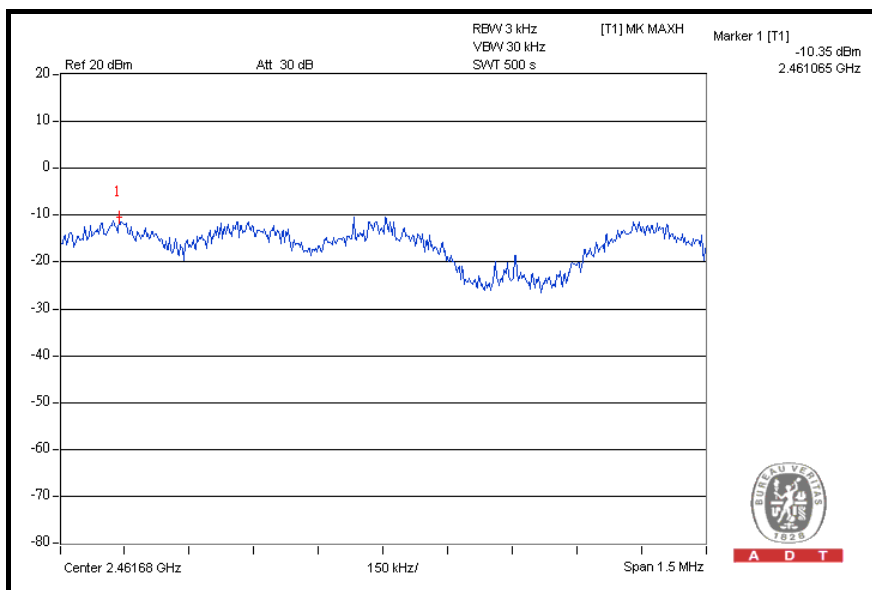




A D T

### 802.11g OFDM MODULATION (TURBO MODE)

<b>MODULATION TYPE</b>	QPSK	<b>TRANSFER RATE</b>	12Mbps
<b>INPUT POWER</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 67%RH, 1013hPa
<b>TESTED BY</b>	Mark Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-10.61	8	PASS

### CH 6

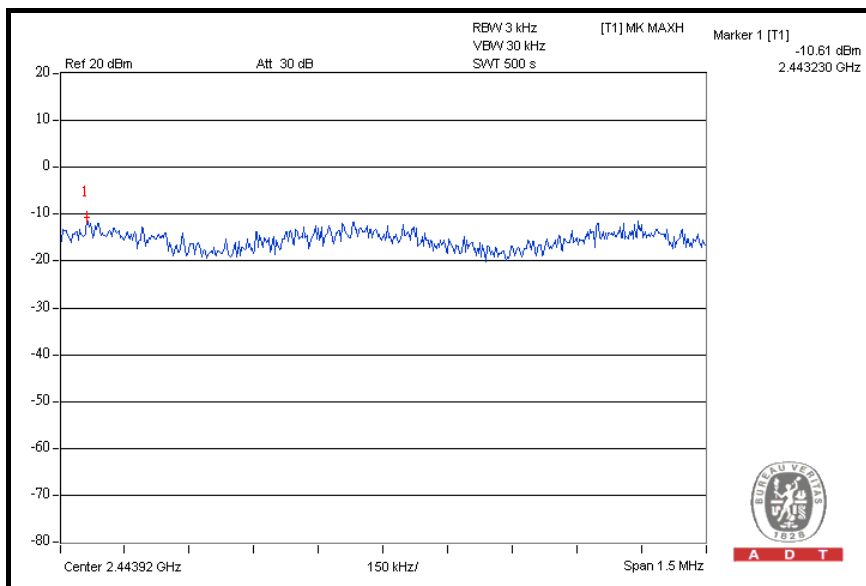

## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP 40	100041	Apr. 22, 2008	Apr. 21, 2009

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=100kHz, VBW=300kHz; Average RBW=1MHz, VBW= 10Hz are attached on the following pages.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.6.5 EUT OPERATING CONDITION

Same as 4.3.6.



#### 4.6.6 TEST RESULTS

The spectrum plots are attached on the following 24 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

#### 802.11b DSSS MODULATION

##### NOTE 1:

The band edge emission plot on the next page shows 52.43dBc between carrier maximum power and local maximum emission in restrict band (2.38700GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 110.78dBuV/m (Peak), so the maximum field strength in restrict band is  $110.78 - 52.43 = 58.35$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 56.13dBc between carrier maximum power and local maximum emission in restrict band (2.38620GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 106.04dBuV/m (Average), so the maximum field strength in restrict band is  $106.04 - 56.13 = 49.91$ dBuV/m which is under 54dBuV/m limit.

##### NOTE 2:

The band edge emission plot on the next second page shows 53.33dBc between carrier maximum power and local maximum emission in restrict band (2.48840GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 109.64dBuV/m (Peak), so the maximum field strength in restrict band is  $109.64 - 53.33 = 56.31$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next third page shows 58.54dBc between carrier maximum power and local maximum emission in restrict band (2.48820GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 105.12dBuV/m (Average), so the maximum field strength in restrict band is  $105.12 - 58.54 = 46.58$ dBuV/m which is under 54dBuV/m limit.



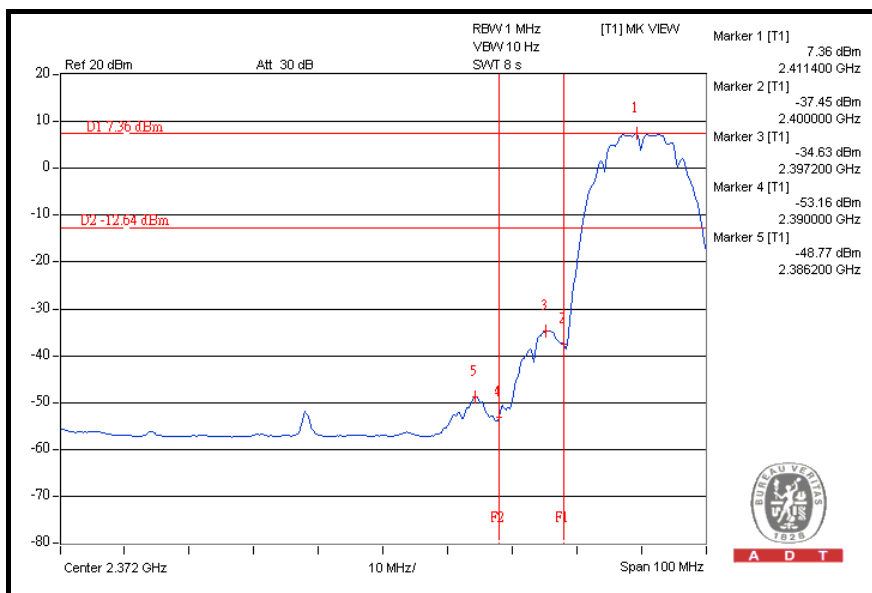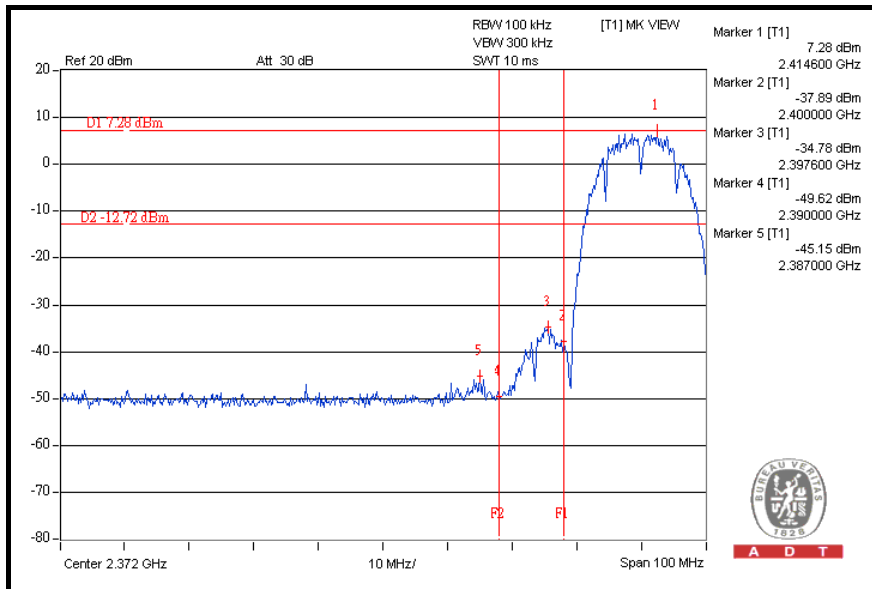





A D T

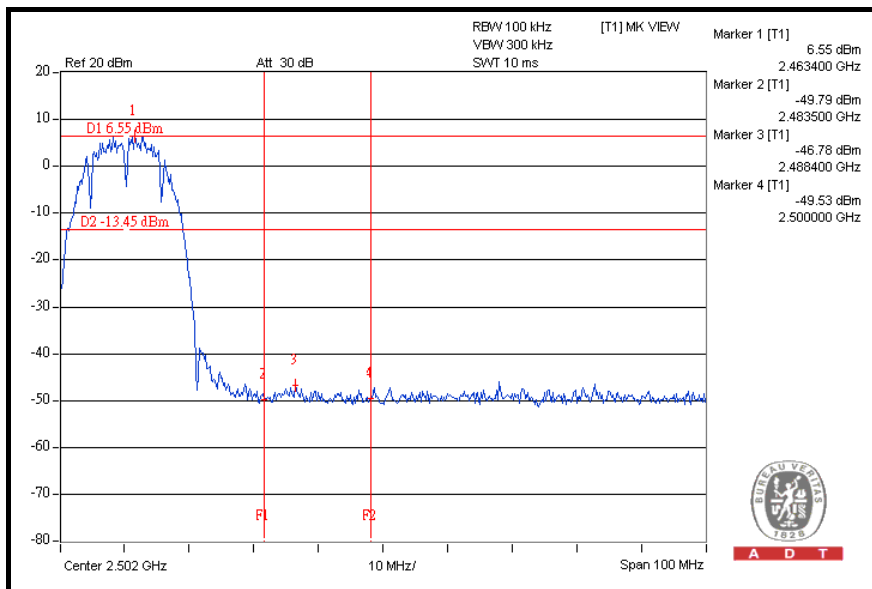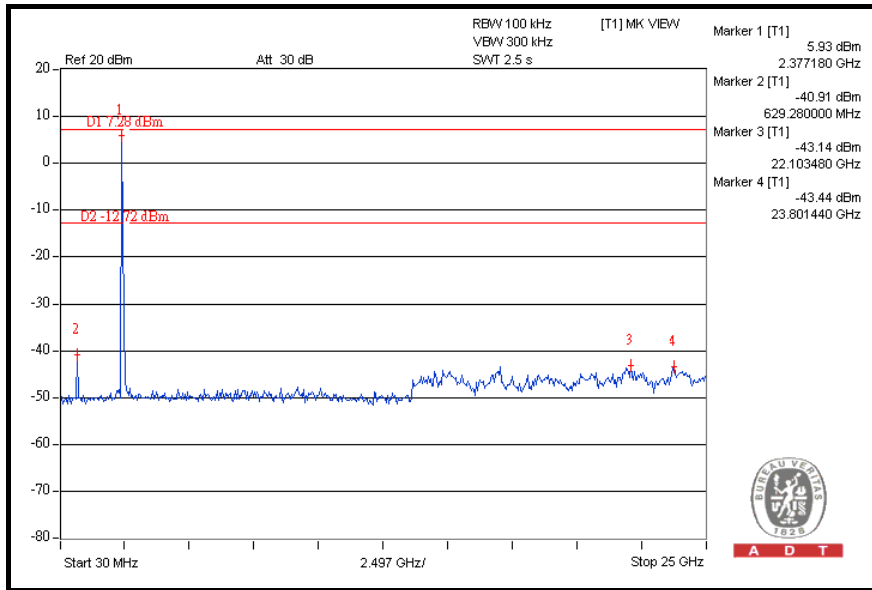



A D T

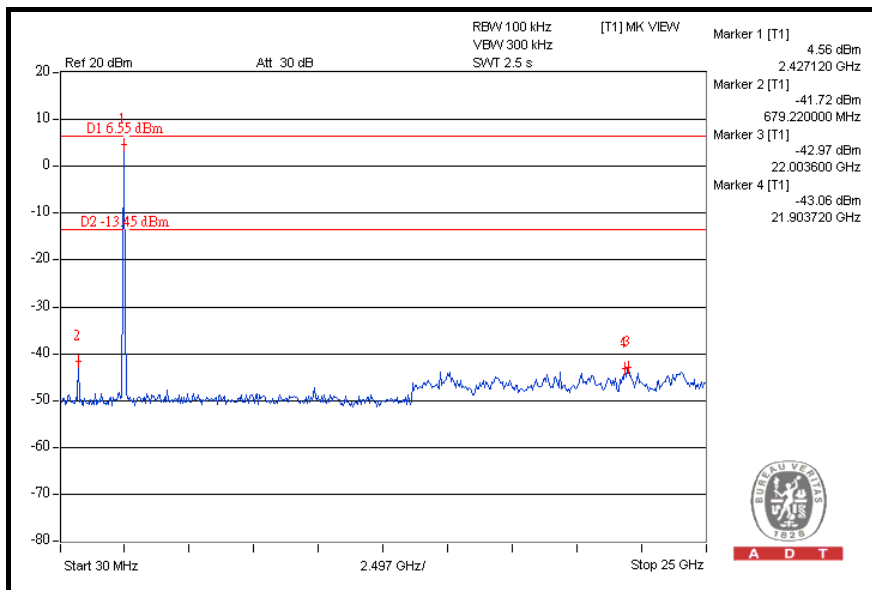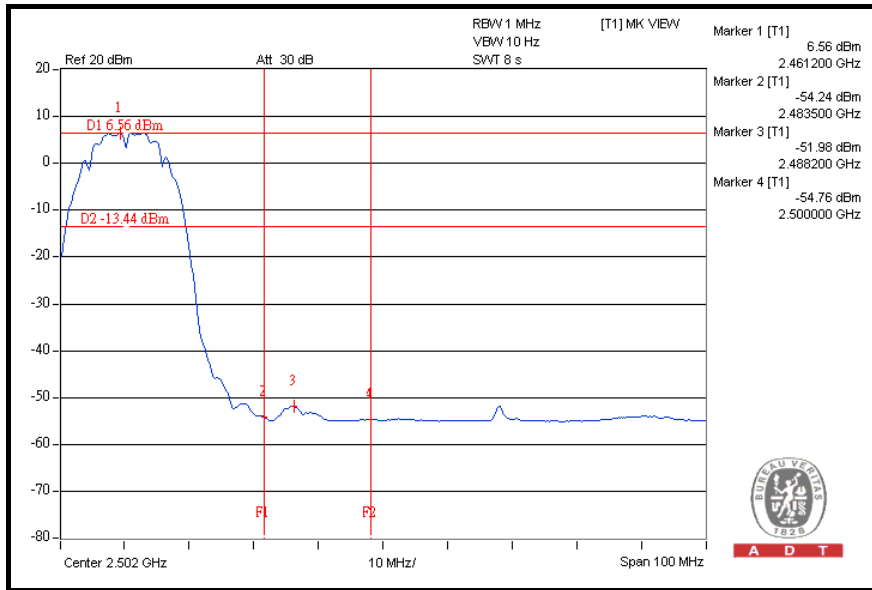



## 802.11g OFDM MODULATION (NORMAL MODE)

### NOTE 1:

The band edge emission plot on the next page shows 47.21dBc between carrier maximum power and local maximum emission in restrict band (2.38900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 111.94dBuV/m (Peak), so the maximum field strength in restrict band is  $111.94 - 47.21 = 64.73$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 50.13dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 100.84dBuV/m (Average), so the maximum field strength in restrict band is  $100.84 - 50.13 = 50.71$ dBuV/m which is under 54dBuV/m limit.



### NOTE 2:

The band edge emission plot on the next second page shows 48.68dBc between carrier maximum power and local maximum emission in restrict band (2.48440GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 110.93dBuV/m (Peak), so the maximum field strength in restrict band is  $110.93 - 48.68 = 62.25$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 50.04dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 100.10dBuV/m (Average), so the maximum field strength in restrict band is  $100.10 - 50.04 = 50.06$ dBuV/m which is under 54dBuV/m limit.





A D T

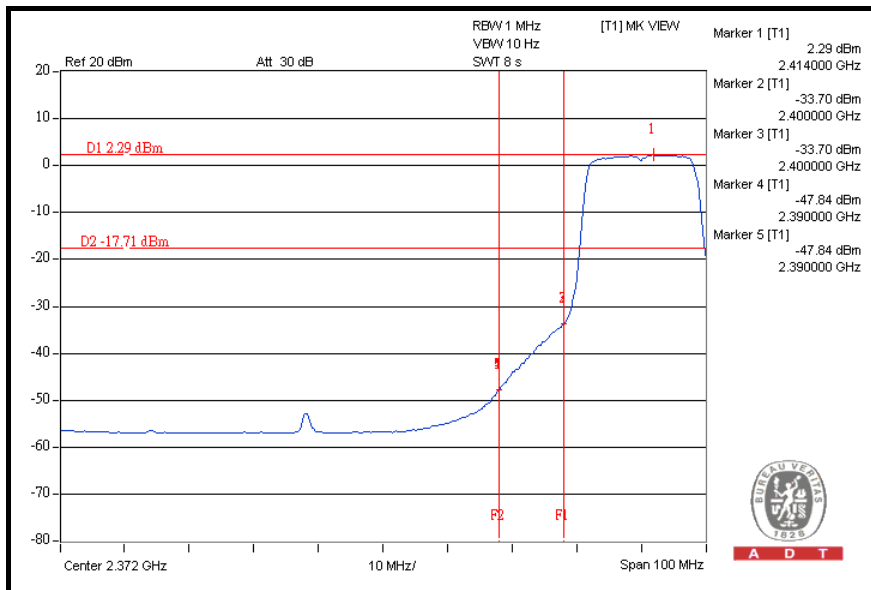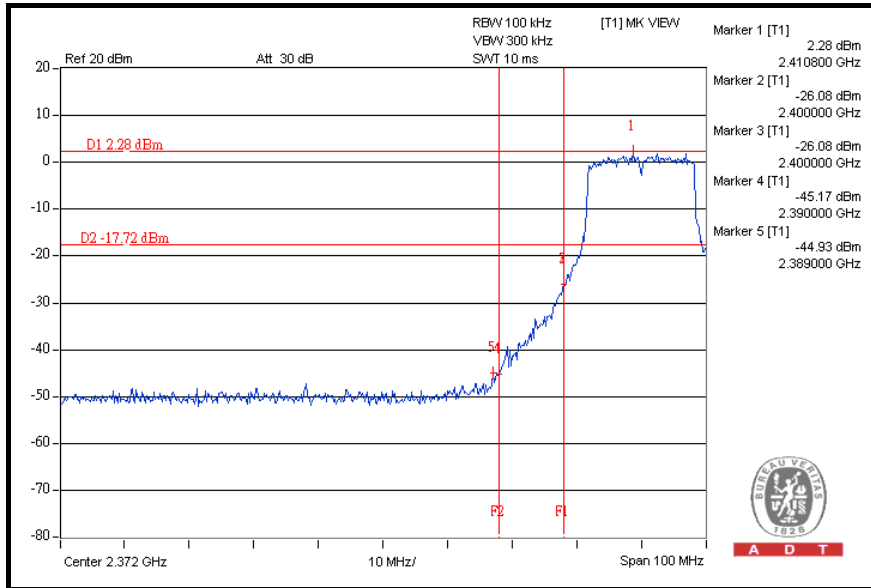





A D T

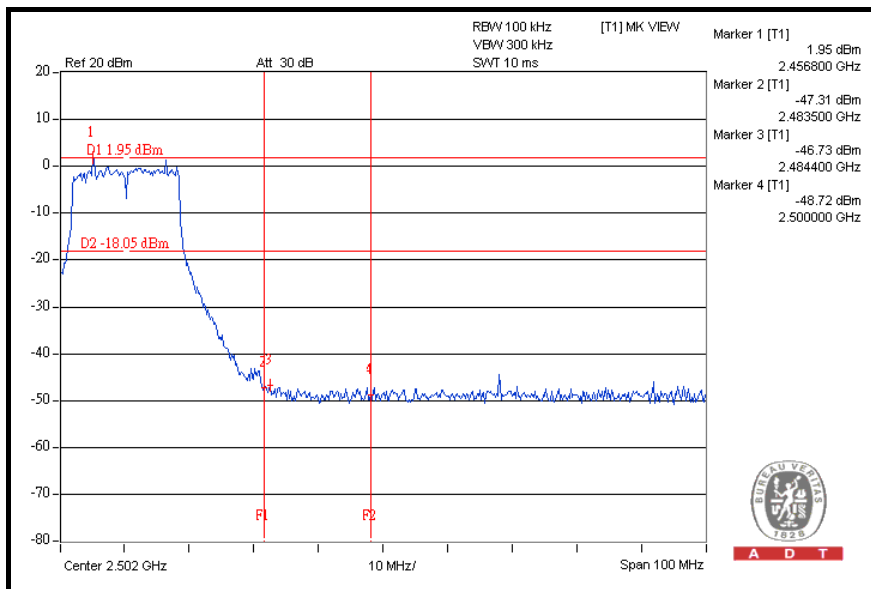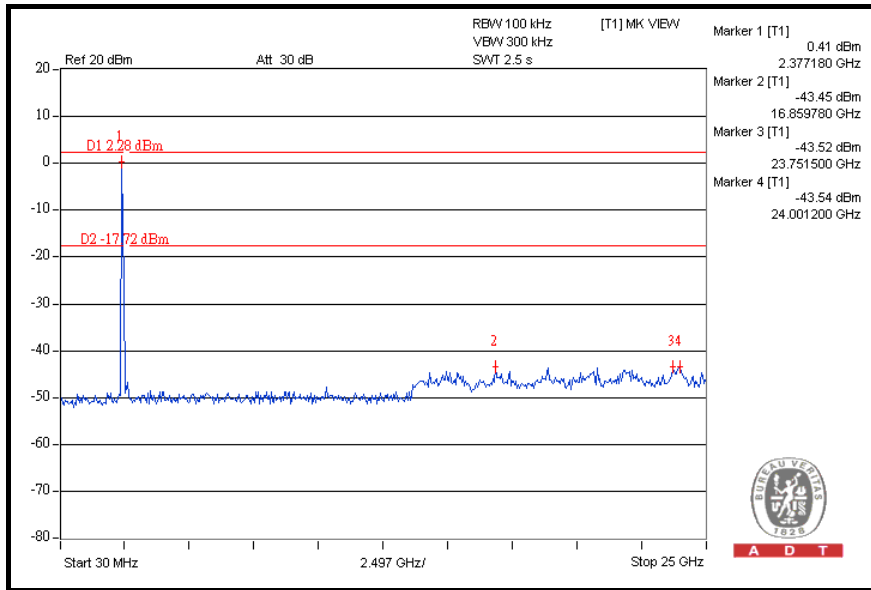



A D T

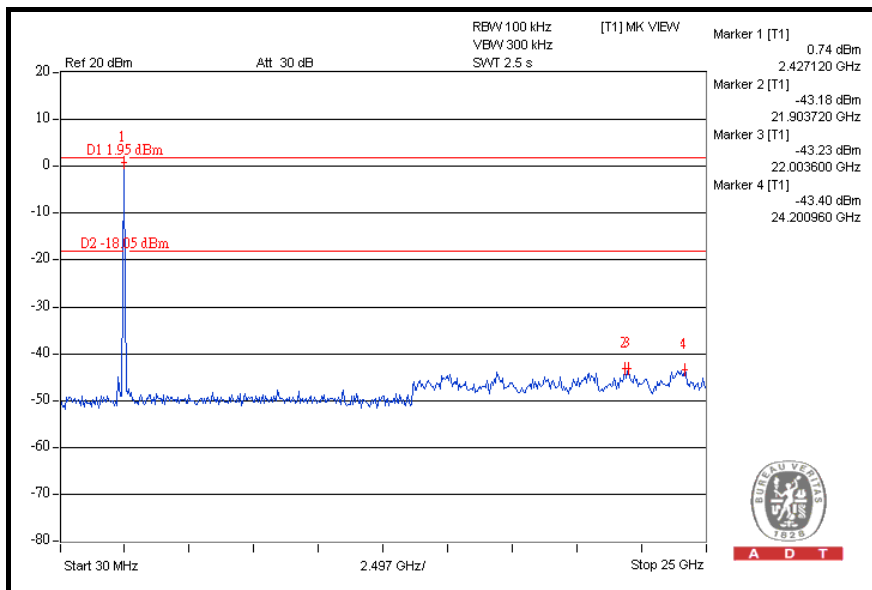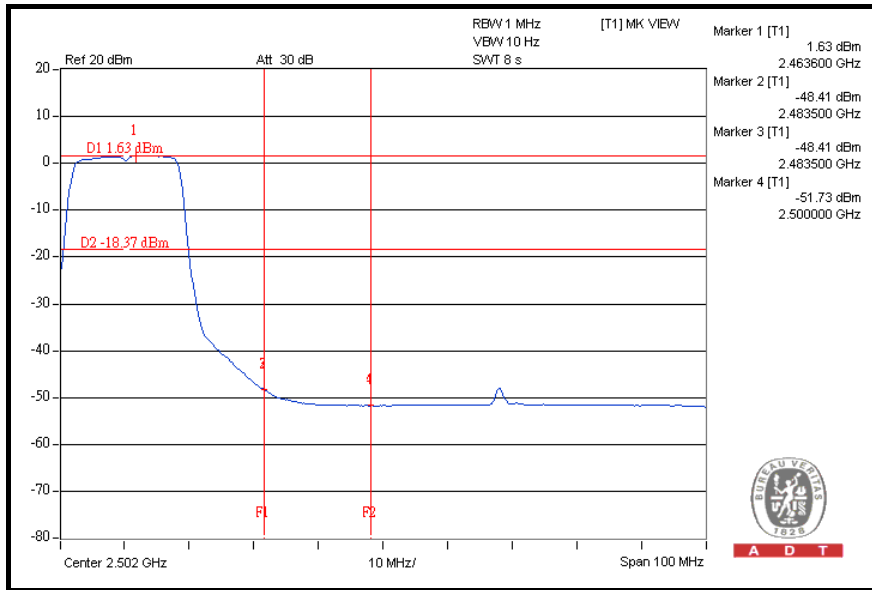

## 802.11g OFDM MODULATION (TURBO MODE)

### NOTE 1:

The band edge emission plot on the next page shows 51.20dBc between carrier maximum power and local maximum emission in restrict band (2.38940GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.1.7 is 110.65dBuV/m (Peak), so the maximum field strength in restrict band is  $110.65 - 51.20 = 59.45$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 49.93dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.1.7 is 100.17dBuV/m (Average), so the maximum field strength in restrict band is  $100.17 - 49.93 = 50.24$ dBuV/m which is under 54dBuV/m limit.

### NOTE 2:



The band edge emission plot on the next second page shows 50.79dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.1.7 is 110.65dBuV/m (Peak), so the maximum field strength in restrict band is  $110.65 - 50.79 = 59.86$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 49.37dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.1.7 is 100.17dBuV/m (Average), so the maximum field strength in restrict band is  $100.17 - 49.37 = 50.80$ dBuV/m which is under 54dBuV/m limit.







A D T

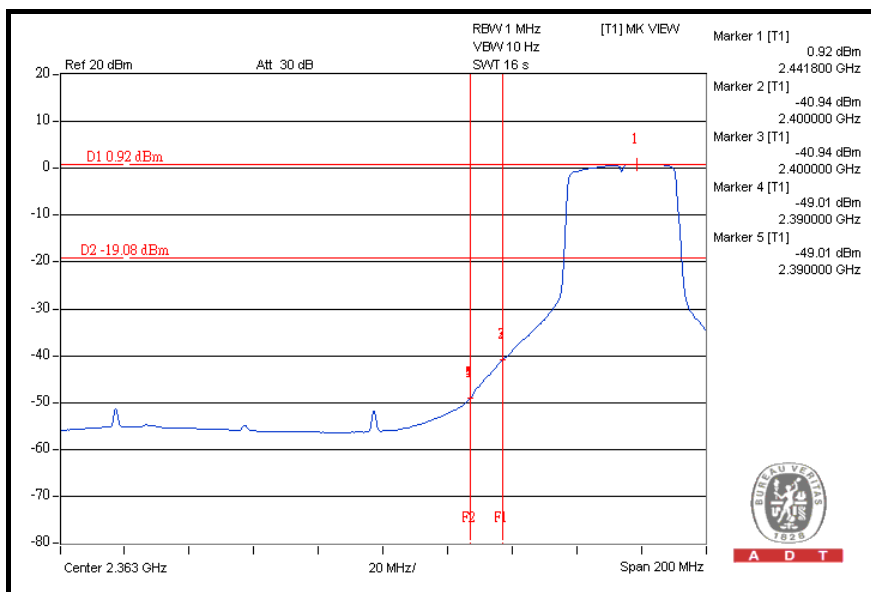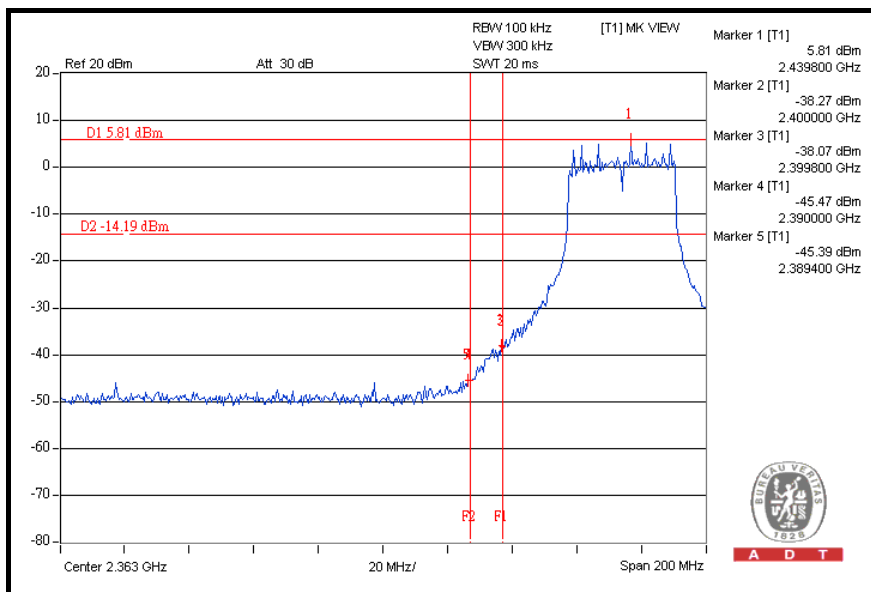





A D T

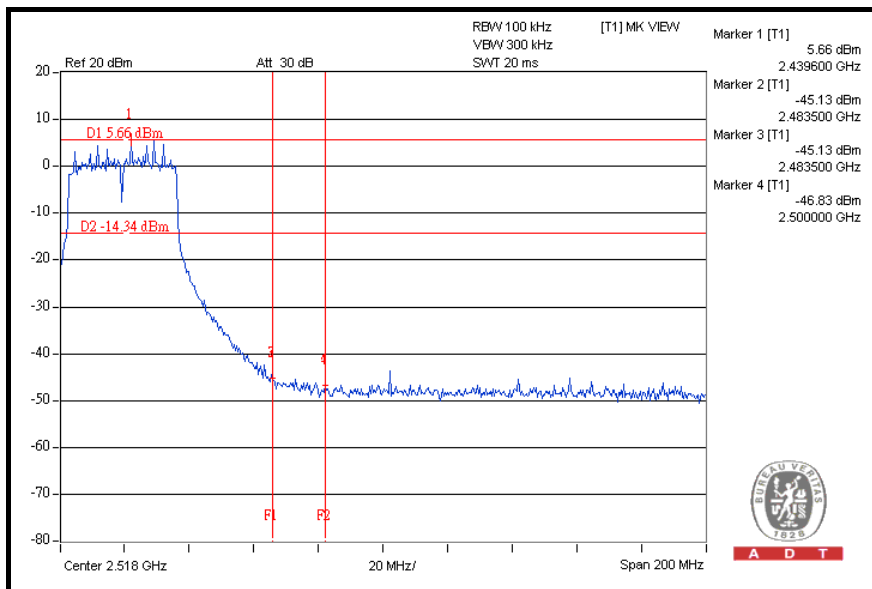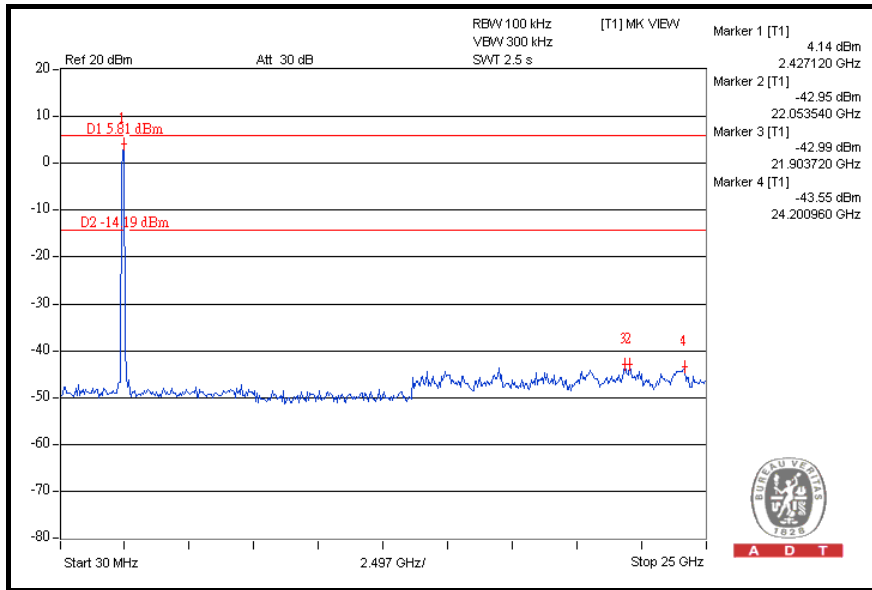



A D T

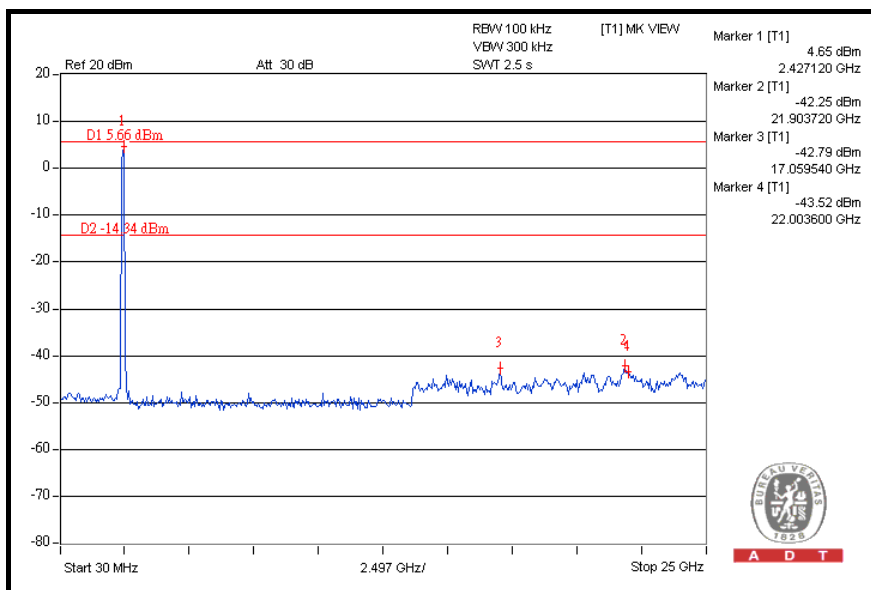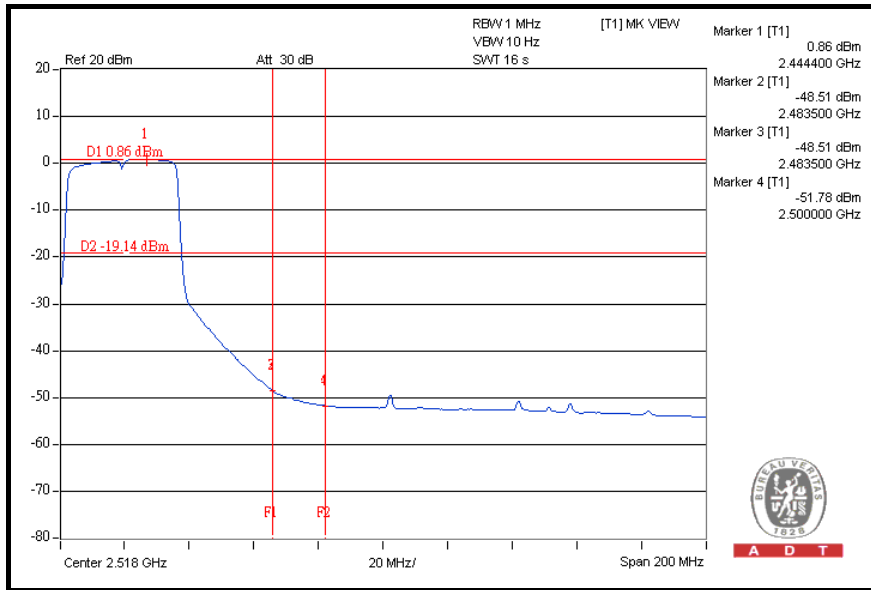



A D T

## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is dipole antenna with R-SMA antenna connector. The maximum Gain of the antenna is 5dBi.



A D T

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA, CSA
<b>R.O.C.</b>	TAF, BSMI, NCC
<b>Netherlands</b>	Telefication
<b>Singapore</b>	GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

### **Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

### **Hsin Chu EMC/RF Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

### **Hwa Ya EMC/RF/Safety/Telecom Lab**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



A D T

## **7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**