




Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6 Mbps

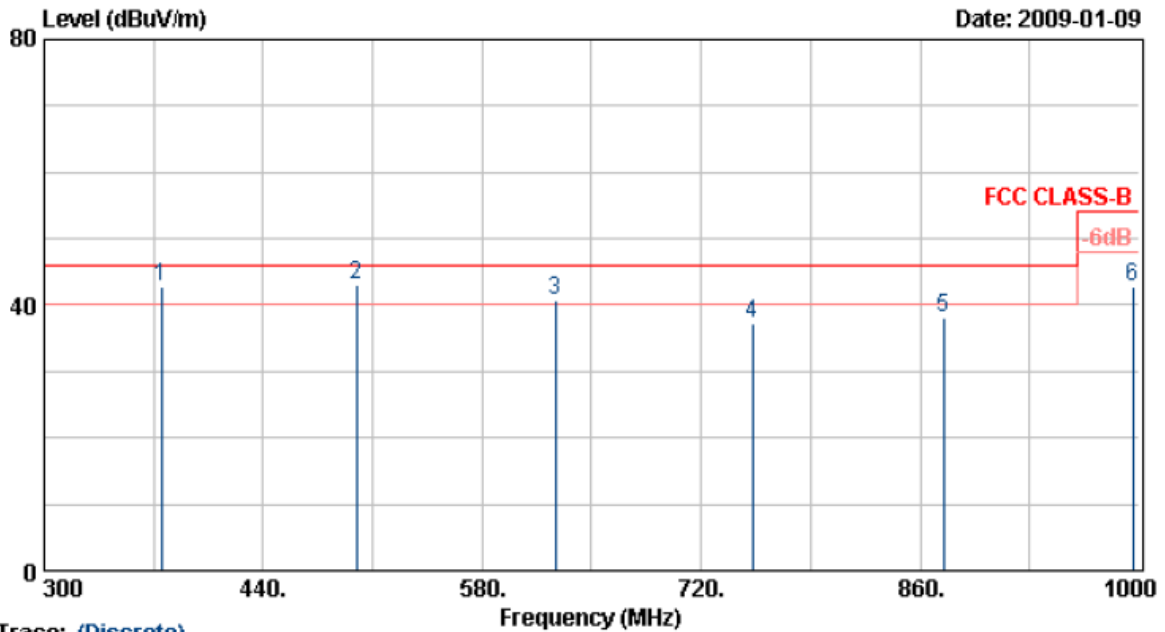

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	374.90	51.68	-8.87	42.81	46.00	-3.19	QP	100	108
2	499.90	47.79	-4.87	42.92	46.00	-3.08	QP	100	108
3	627.00	44.21	-3.57	40.64	46.00	-5.36	QP	100	100
4	752.90	36.90	0.38	37.28	46.00	-8.72	Peak	100	100
5	874.98	36.17	1.81	37.98	46.00	-8.02	Peak	100	99
6	995.80	38.00	4.78	42.78	54.00	-11.22	Peak	100	99

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6 Mbps

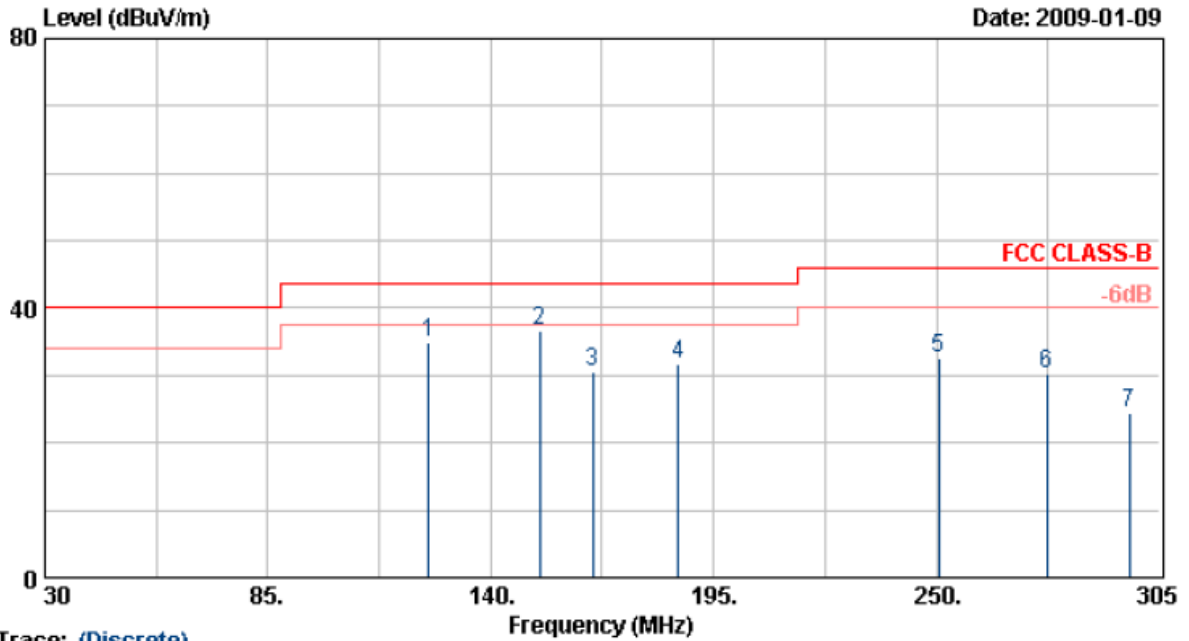

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	124.60	54.38	-19.46	34.92	43.50	-8.58	Peak	100	88
2	152.10	54.11	-17.55	36.56	43.50	-6.94	Peak	100	65
3	165.30	49.38	-18.88	30.50	43.50	-13.00	Peak	100	93
4	186.20	49.29	-17.53	31.76	43.50	-11.74	Peak	100	93
5	250.55	50.20	-17.50	32.70	46.00	-13.30	Peak	100	93
6	277.25	44.80	-14.48	30.32	46.00	-15.68	Peak	100	71
7	297.60	38.60	-14.15	24.45	46.00	-21.55	Peak	100	71

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6 Mbps

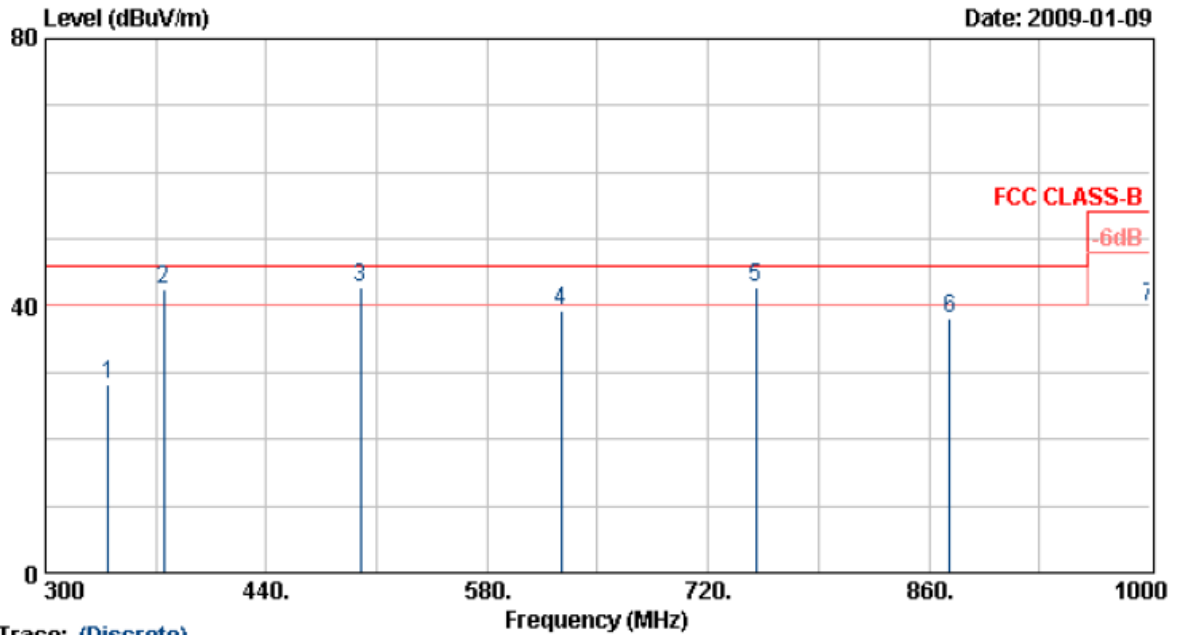

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	339.90	41.87	-13.56	28.31	46.00	-17.69	Peak	100	88
2	375.25	52.87	-10.29	42.58	46.00	-3.42	QP	100	88
3	499.98	46.99	-4.21	42.78	46.00	-3.22	QP	100	88
4	626.90	41.22	-1.84	39.38	46.00	-6.62	Peak	100	144
5	750.05	42.39	0.31	42.70	46.00	-3.30	QP	100	82
6	873.30	34.00	3.99	37.99	46.00	-8.01	Peak	100	82
7	999.93	36.66	3.32	39.98	54.00	-14.02	Peak	100	90

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 11 Mbps

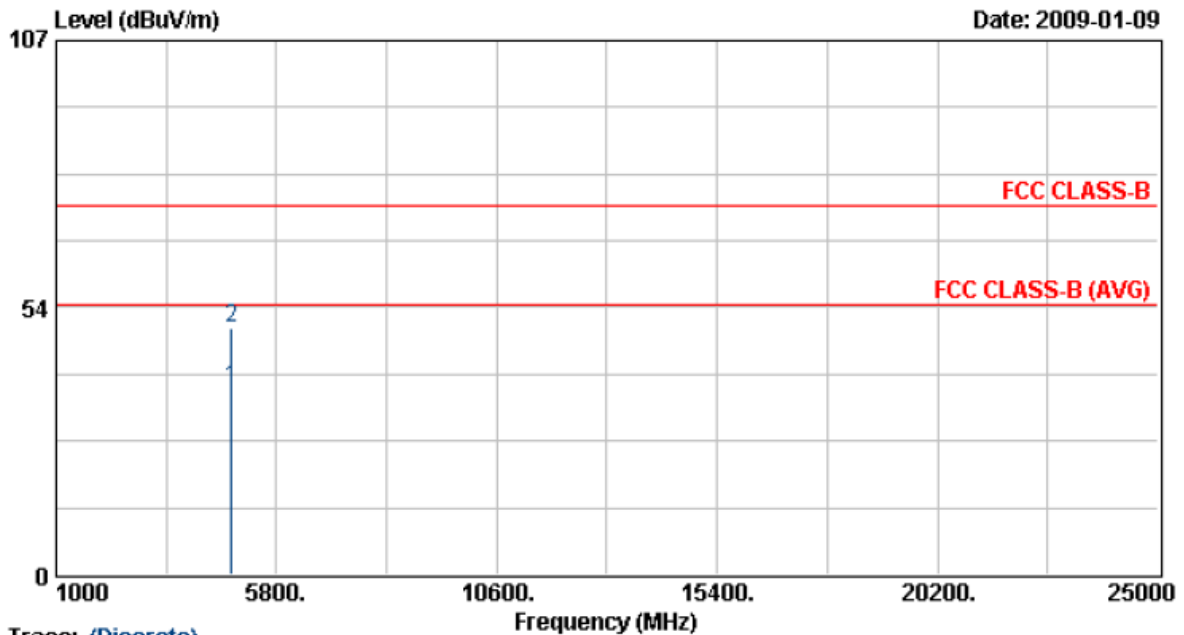

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.93	31.75	5.67	37.42	54.00	-16.58	Average	130	271
2	4823.93	43.57	5.67	49.24	74.00	-24.76	Peak	130	271

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 11 Mbps

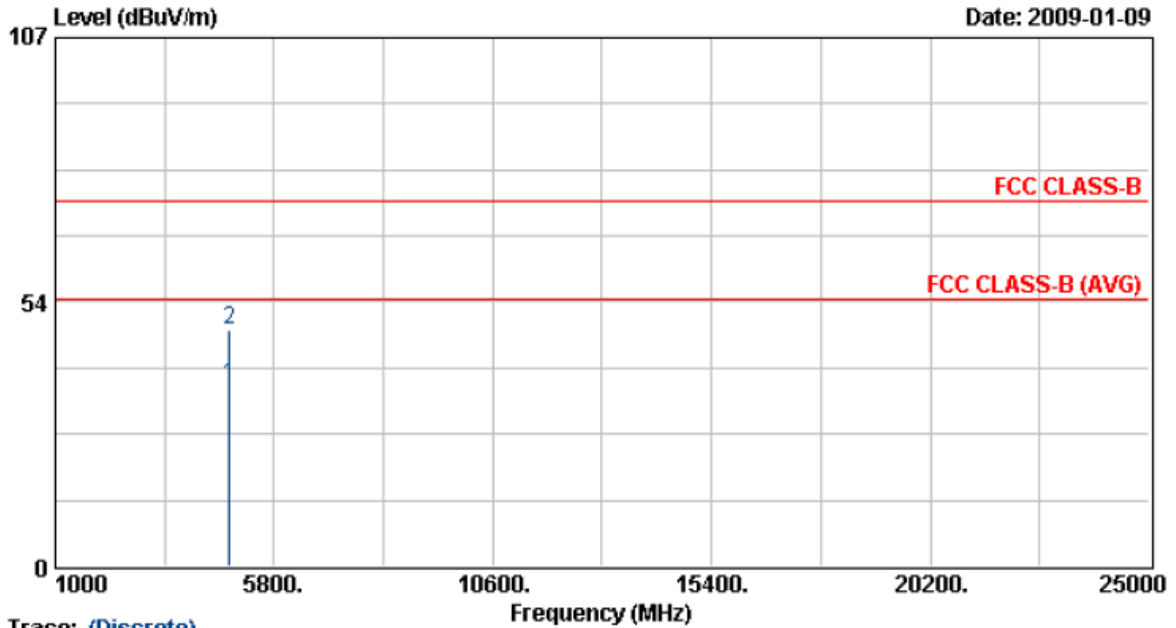

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.03	30.76	5.67	36.43	54.00	-17.57	Average	124	286
2	4824.03	42.06	5.67	47.73	74.00	-26.27	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 11 Mbps

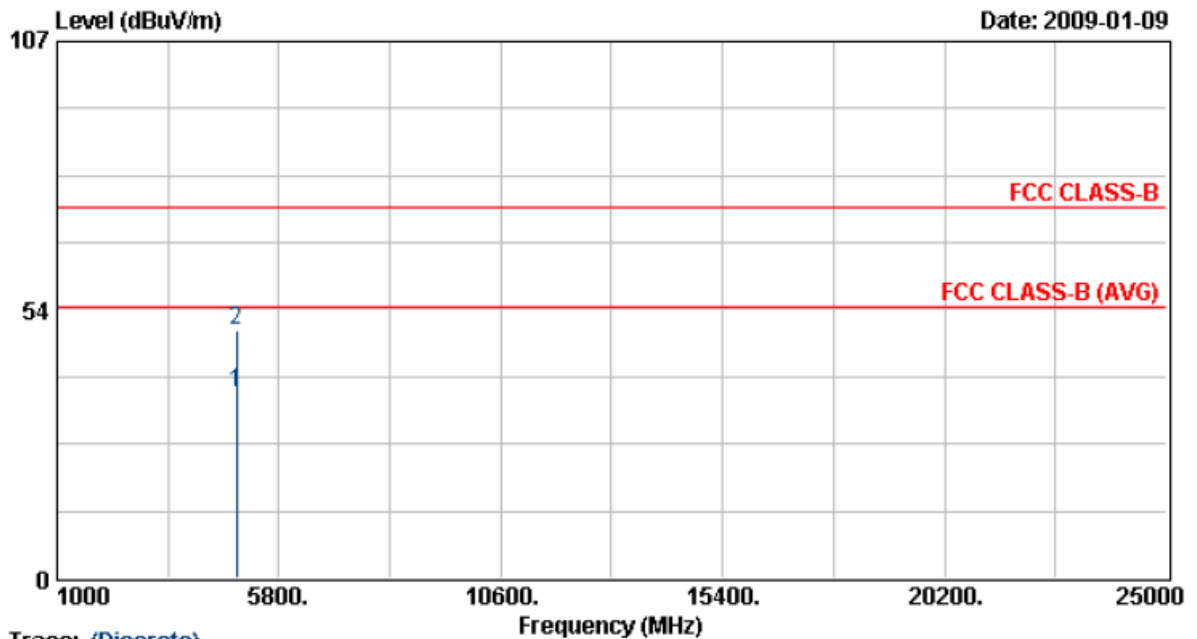

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.03	31.20	5.80	37.00	54.00	-17.00	Average	130	271
2	4874.03	43.56	5.80	49.36	74.00	-24.64	Peak	130	271

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 11 Mbps

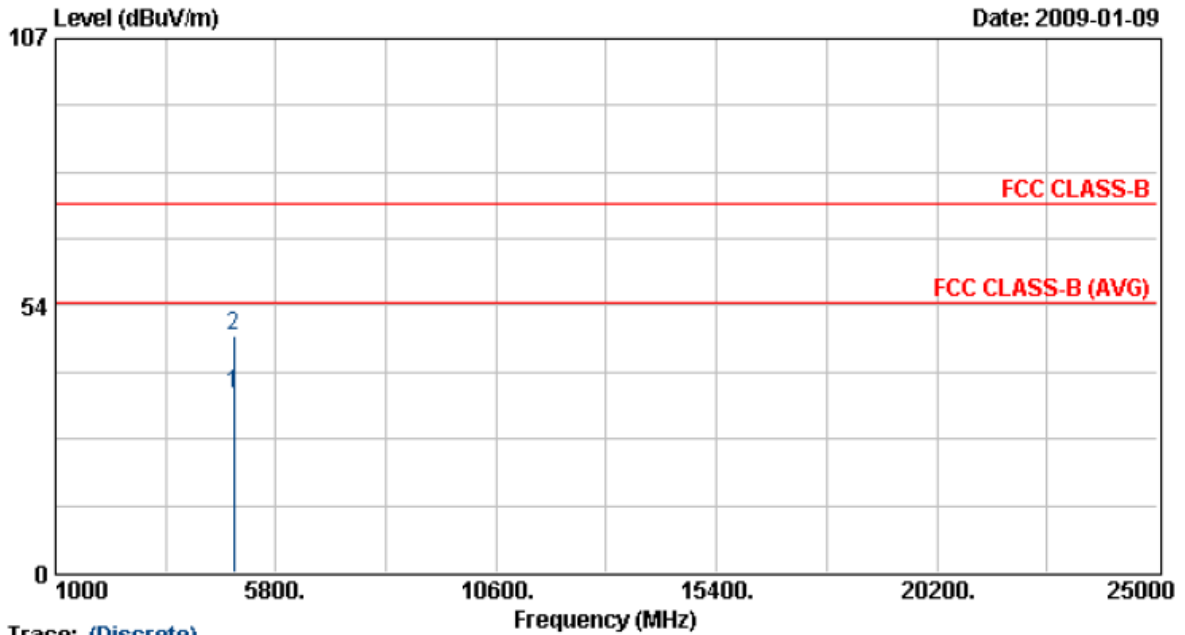

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.00	29.87	5.80	35.67	54.00	-18.33	Average	124	286
2	4874.00	41.57	5.80	47.37	74.00	-26.63	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 11 Mbps

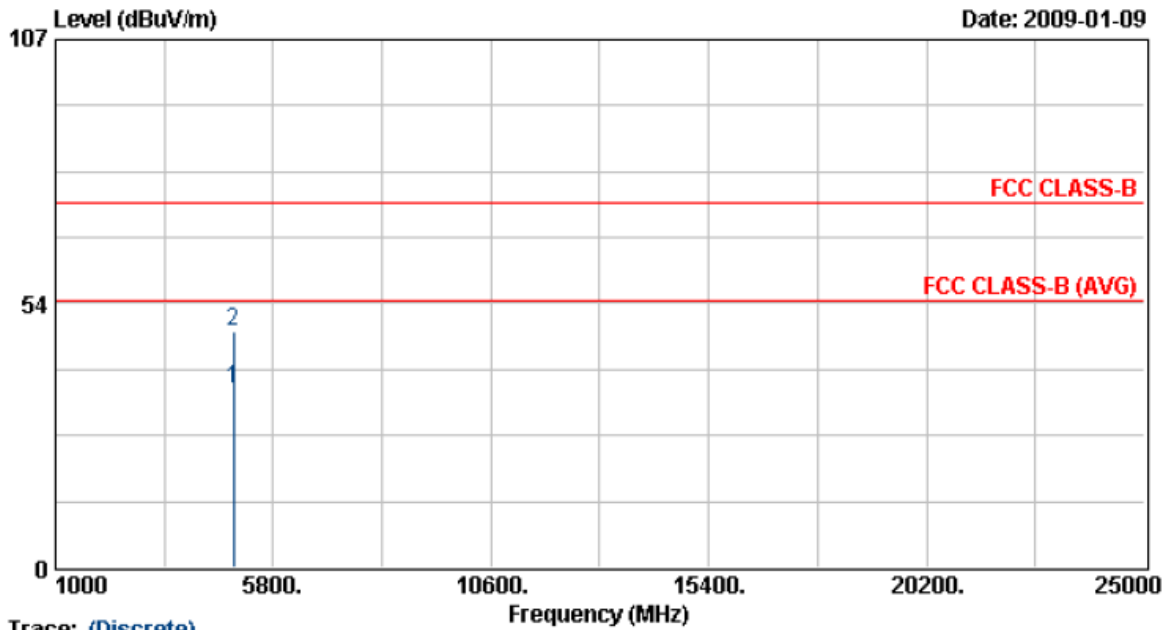

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV/m	dB		cm	Deg
1	4923.95	30.14	5.93	36.07	54.00	-17.93	Average	130	271
2	4923.95	41.84	5.93	47.77	74.00	-26.23	Peak	130	271


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.





Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 11 Mbps

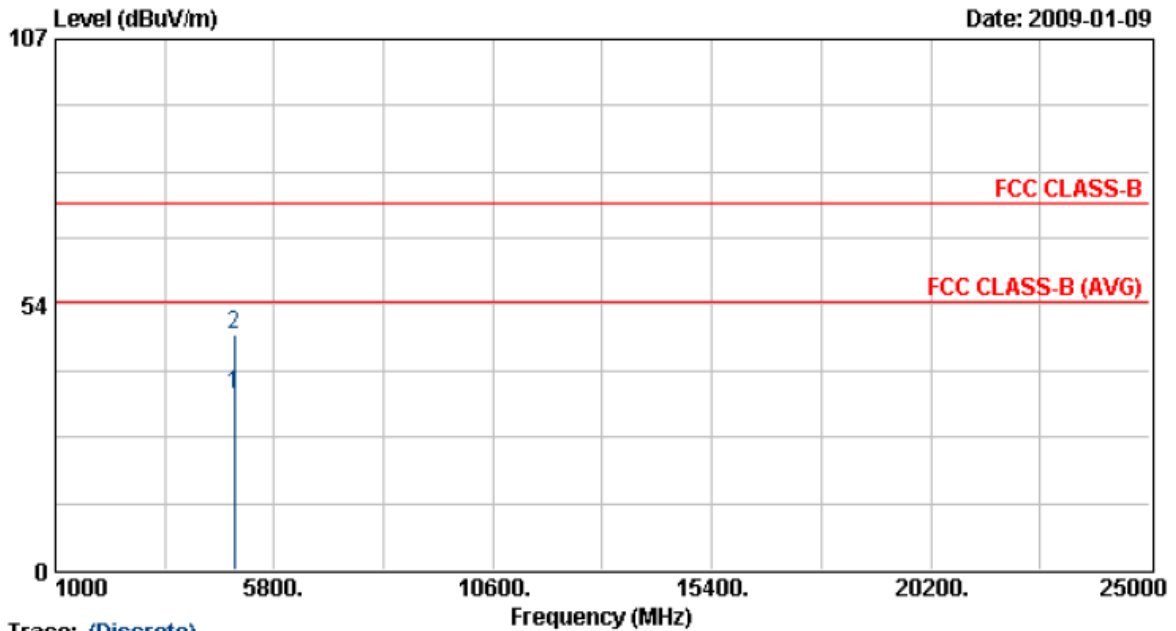

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.03	29.50	5.93	35.43	54.00	-18.57	Average	124	286
2	4924.03	41.47	5.93	47.40	74.00	-26.60	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6 Mbps

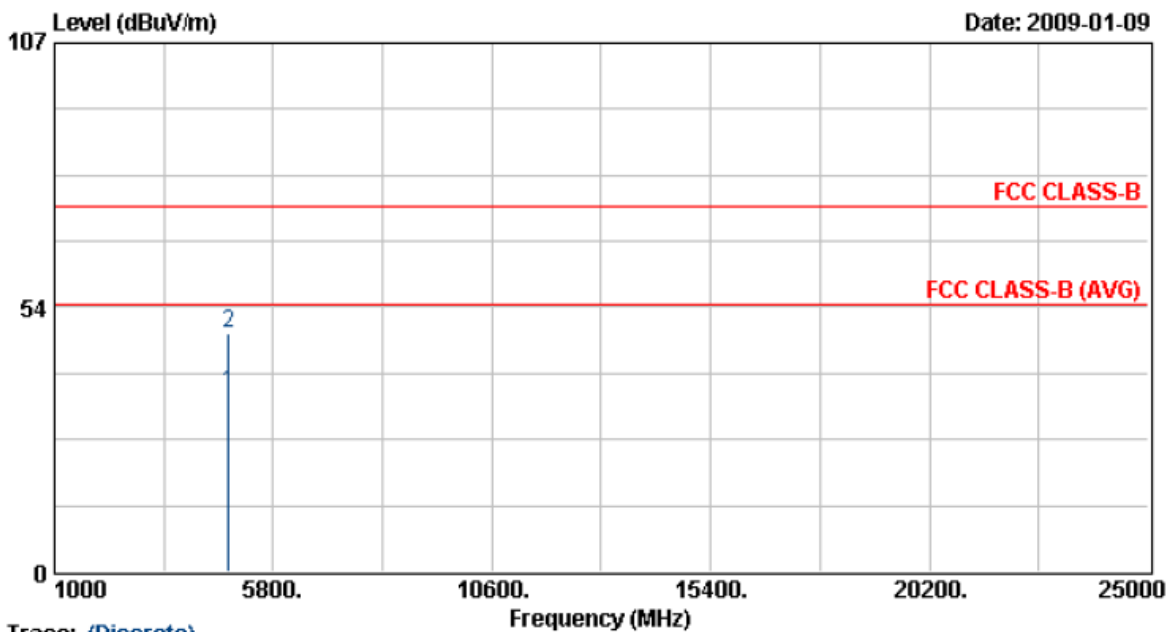

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.05	30.49	5.67	36.16	54.00	-17.84	Average	130	271
2	4824.05	42.60	5.67	48.27	74.00	-25.73	Peak	130	271

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6 Mbps

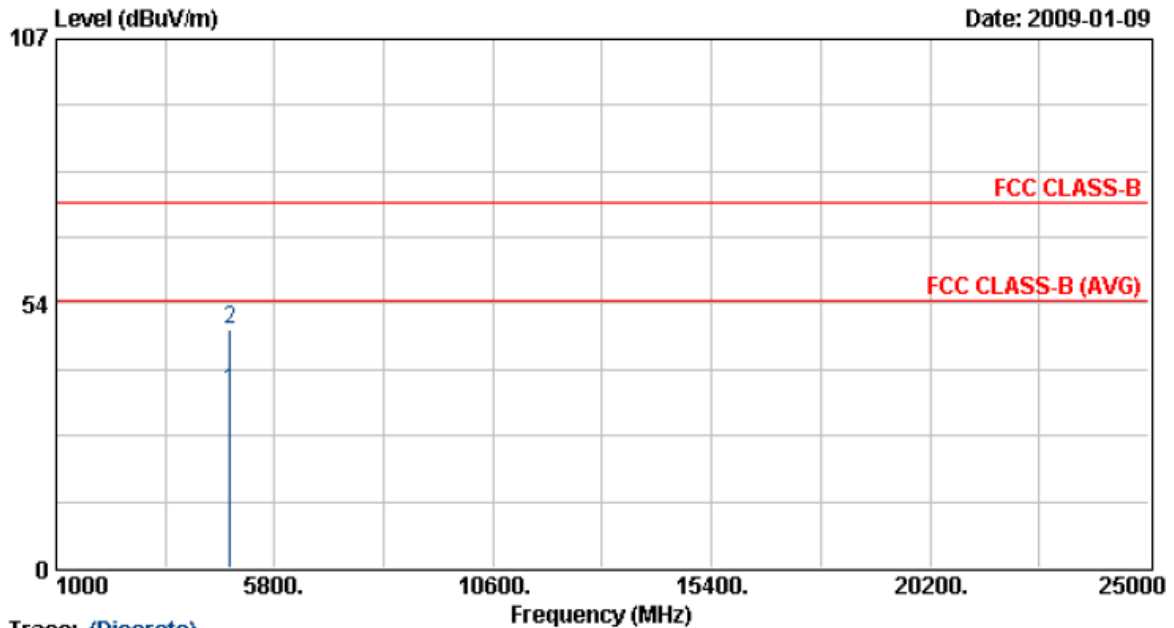

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.03	30.31	5.67	35.98	54.00	-18.02	Average	124	286
2	4824.03	42.42	5.67	48.09	74.00	-25.91	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6 Mbps

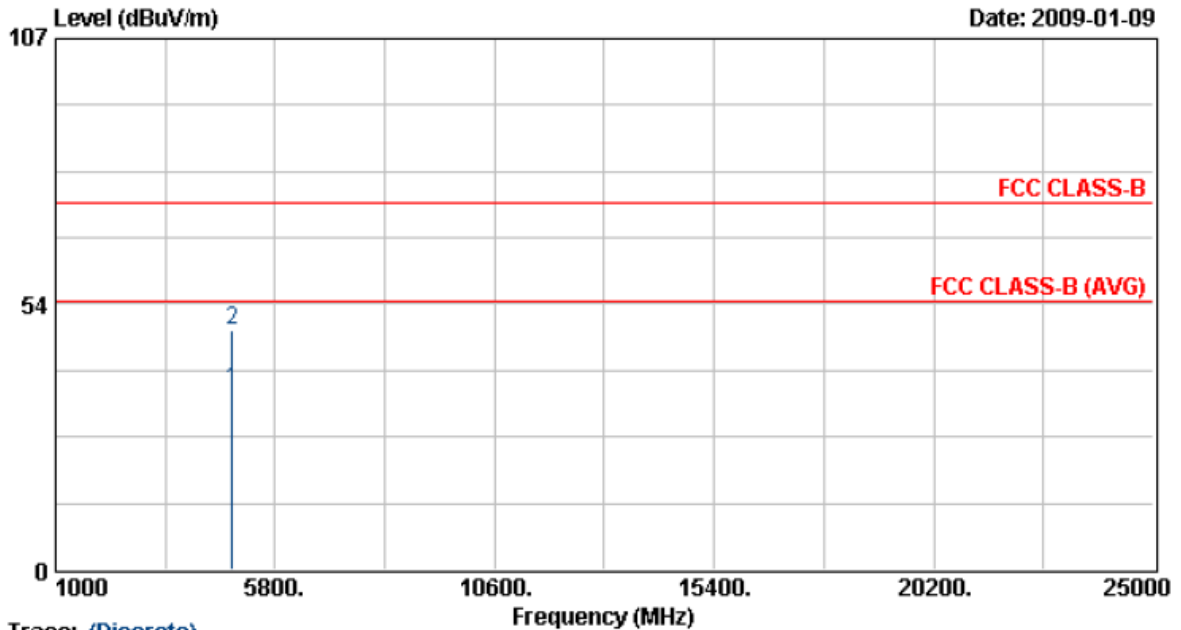

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4872.83	30.41	5.80	36.21	54.00	-17.79	Average	130	271
2	4872.83	42.37	5.80	48.17	74.00	-25.83	Peak	130	271

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6 Mbps

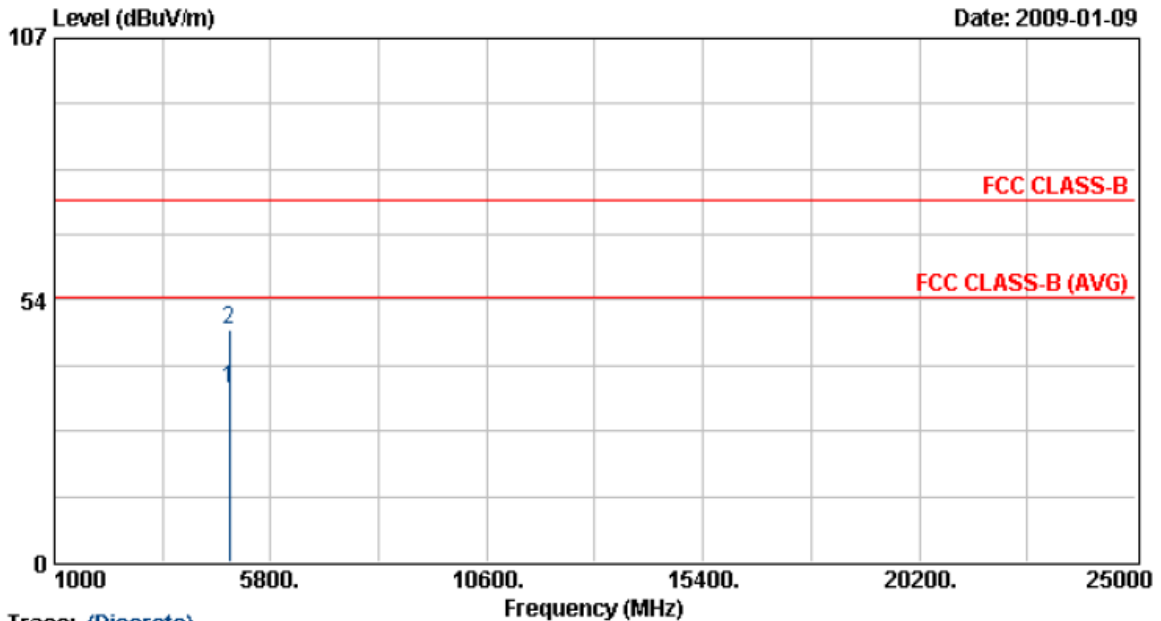

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.03	29.44	5.80	35.24	54.00	-18.76	Average	124	286
2	4873.03	41.64	5.80	47.44	74.00	-26.56	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6 Mbps

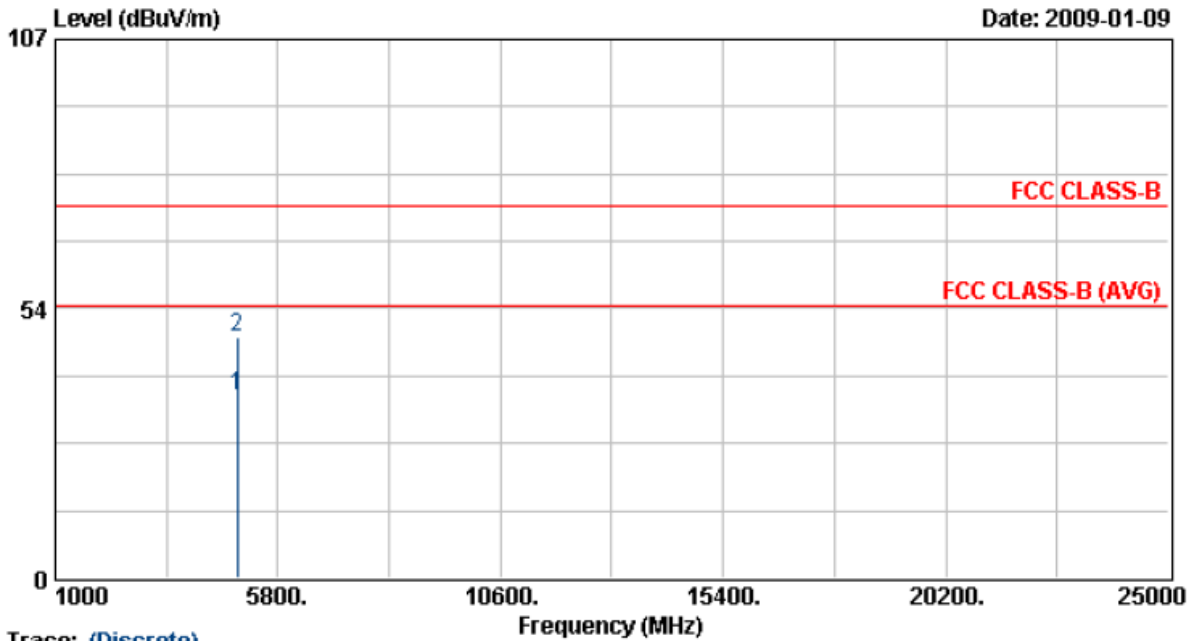

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4927.40	30.12	5.94	36.06	54.00	-17.94	Average	130	271
2	4927.40	41.77	5.94	47.71	74.00	-26.29	Peak	130	271

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 5	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6 Mbps

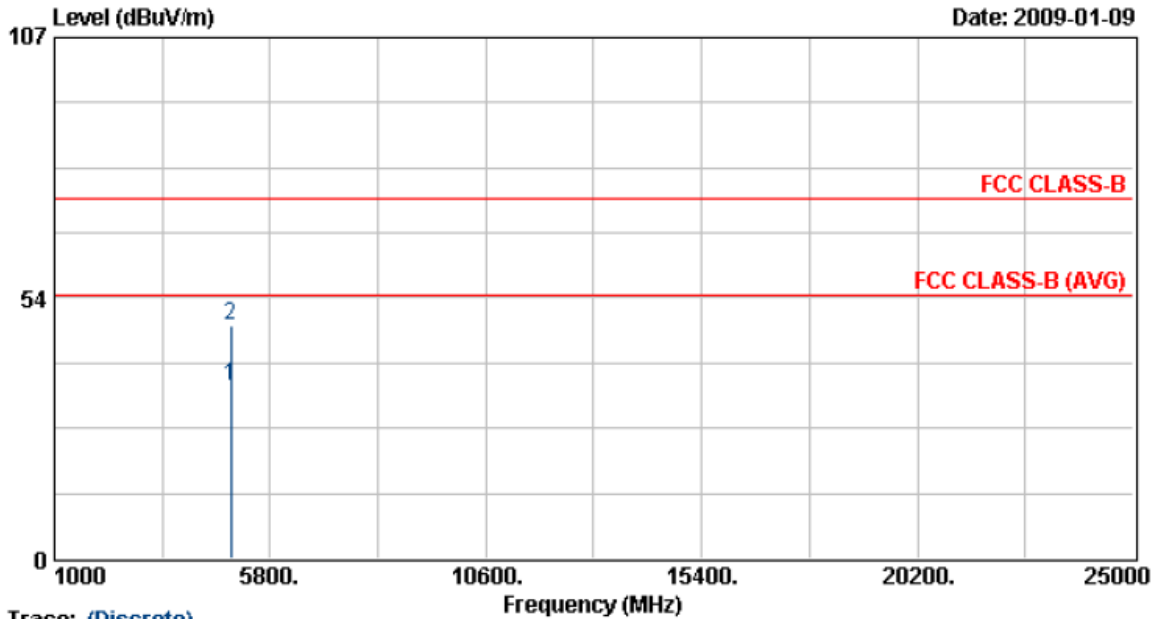

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.88	29.67	5.93	35.60	54.00	-18.40	Average	124	286
2	4923.88	41.86	5.93	47.79	74.00	-26.21	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6.5 Mbps

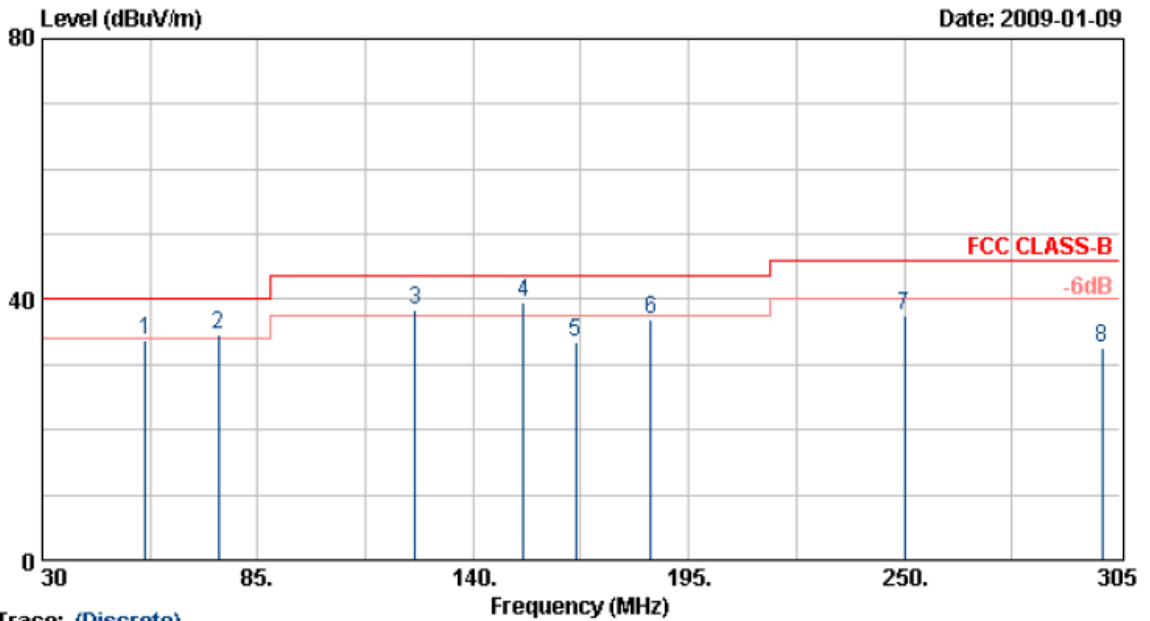

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	56.40	49.76	-16.10	33.66	40.00	-6.34	Peak	100	88
2	75.10	51.96	-17.32	34.64	40.00	-5.36	QP	100	90
3	125.15	51.69	-13.34	38.35	43.50	-5.15	QP	100	90
4	152.93	51.45	-11.90	39.55	43.50	-3.95	QP	100	90
5	166.13	46.32	-12.99	33.33	43.50	-10.17	Peak	100	87
6	185.38	46.47	-9.63	36.84	43.50	-6.66	Peak	100	102
7	250.00	50.69	-13.04	37.65	46.00	-8.35	Peak	100	102
8	300.60	41.79	-9.33	32.46	46.00	-13.54	Peak	100	77


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11MIMO mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
5. The data is worse case.





Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6.5 Mbps

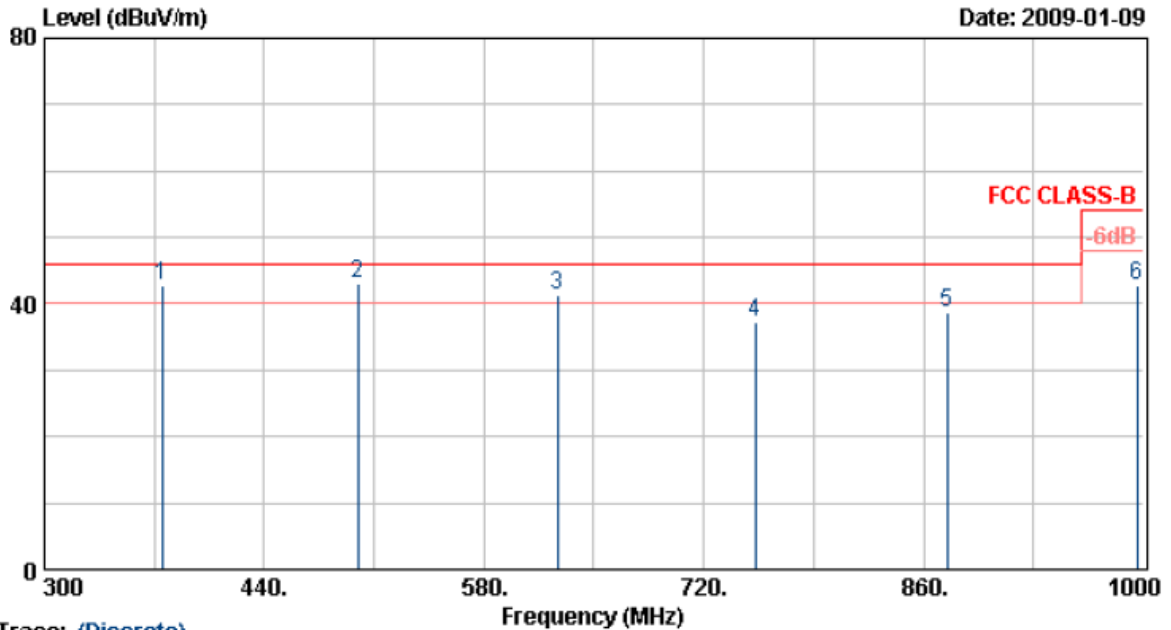

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	374.90	51.60	-8.87	42.73	46.00	-3.27	QP	100	108
2	499.90	47.79	-4.87	42.92	46.00	-3.08	QP	100	108
3	627.00	44.77	-3.57	41.20	46.00	-4.80	QP	100	100
4	752.90	36.90	0.38	37.28	46.00	-8.72	Peak	100	100
5	874.98	36.88	1.81	38.69	46.00	-7.31	Peak	100	99
6	995.80	38.00	4.78	42.78	54.00	-11.22	Peak	100	99

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11MIMO mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6.5 Mbps

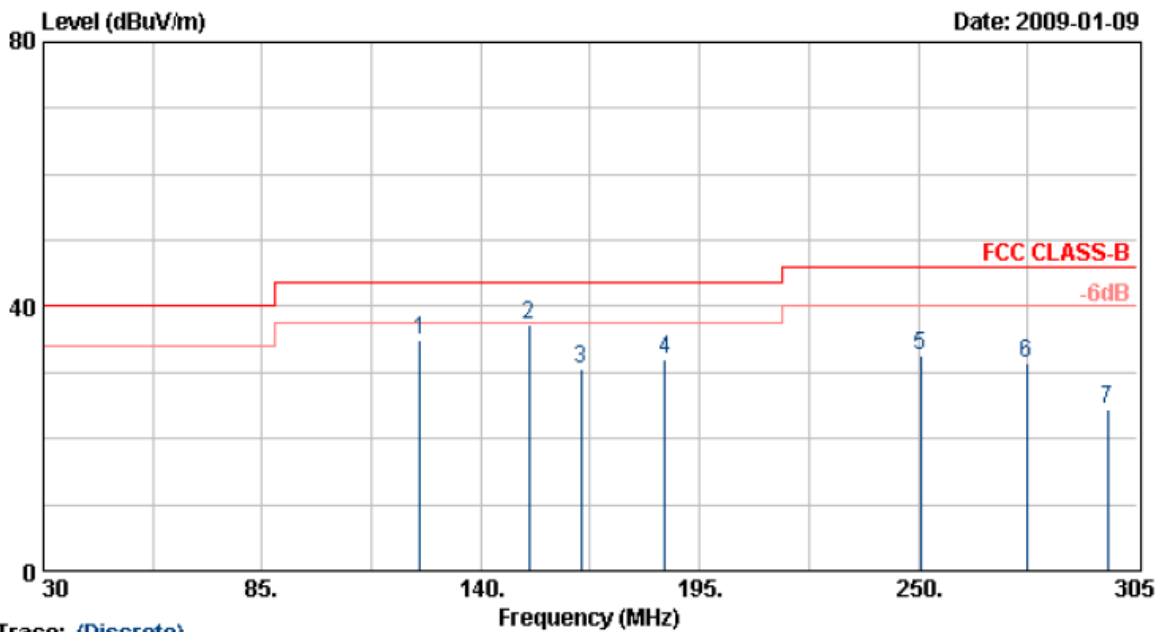

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	124.60	54.38	-19.46	34.92	43.50	-8.58	Peak	100	88
2	152.10	54.75	-17.55	37.20	43.50	-6.30	Peak	100	65
3	165.30	49.38	-18.88	30.50	43.50	-13.00	Peak	100	93
4	186.20	49.66	-17.53	32.13	43.50	-11.37	Peak	100	93
5	250.55	50.20	-17.50	32.70	46.00	-13.30	Peak	100	93
6	277.25	45.80	-14.48	31.32	46.00	-14.68	Peak	100	71
7	297.60	38.60	-14.15	24.45	46.00	-21.55	Peak	100	71

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11MIMO mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6.5 Mbps

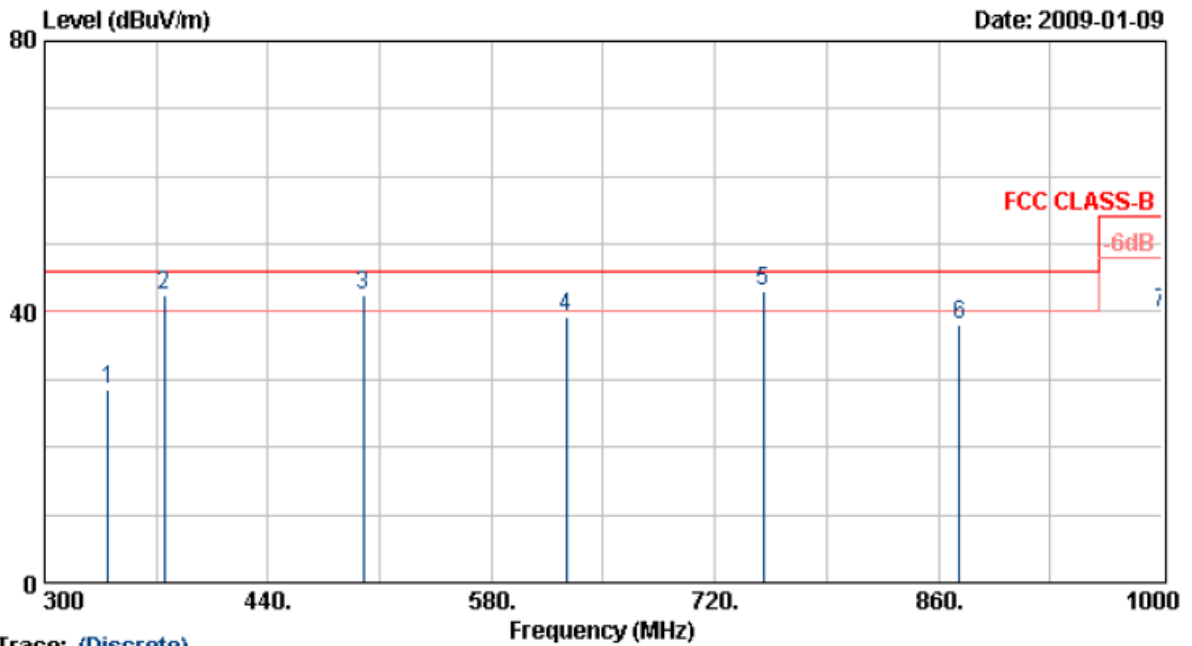

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	339.90	41.97	-13.56	28.41	46.00	-17.59	Peak	100	88
2	375.25	52.87	-10.29	42.58	46.00	-3.42	QP	100	88
3	499.98	46.76	-4.21	42.55	46.00	-3.45	QP	100	88
4	626.90	41.22	-1.84	39.38	46.00	-6.62	Peak	100	144
5	750.05	42.69	0.31	43.00	46.00	-3.00	QP	100	82
6	873.30	34.00	3.99	37.99	46.00	-8.01	Peak	100	82
7	999.93	36.66	3.32	39.98	54.00	-14.02	Peak	100	90

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11MIMO mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6.5 Mbps

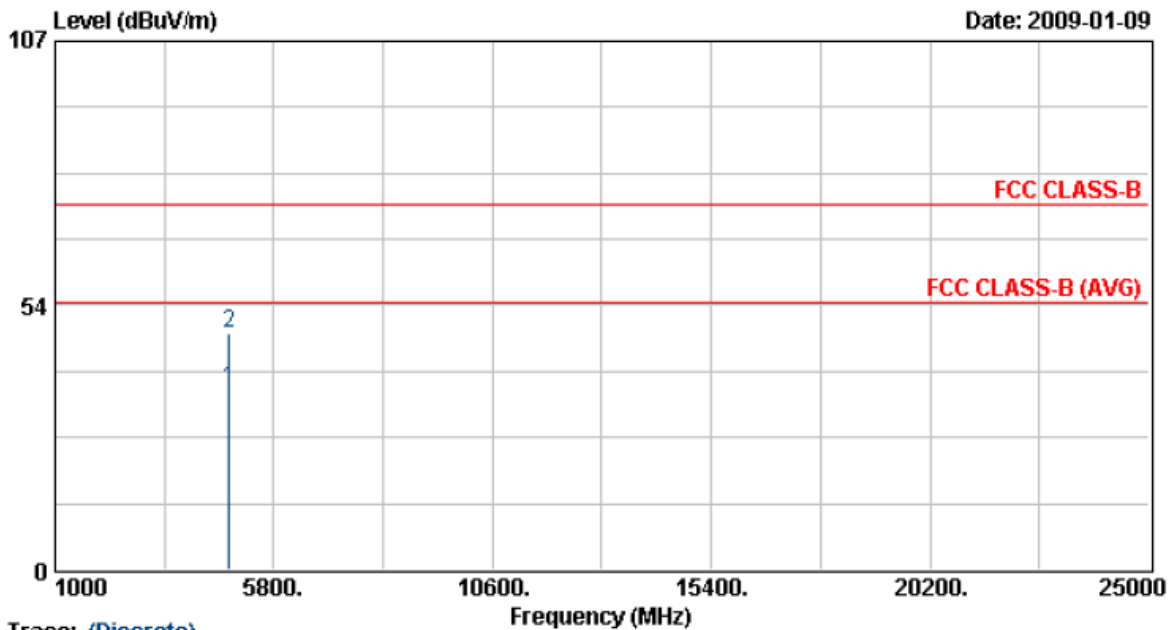

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.83	30.72	5.67	36.39	54.00	-17.61	Average	130	271
2	4824.83	42.27	5.67	47.94	74.00	-26.06	Peak	130	271

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6.5 Mbps

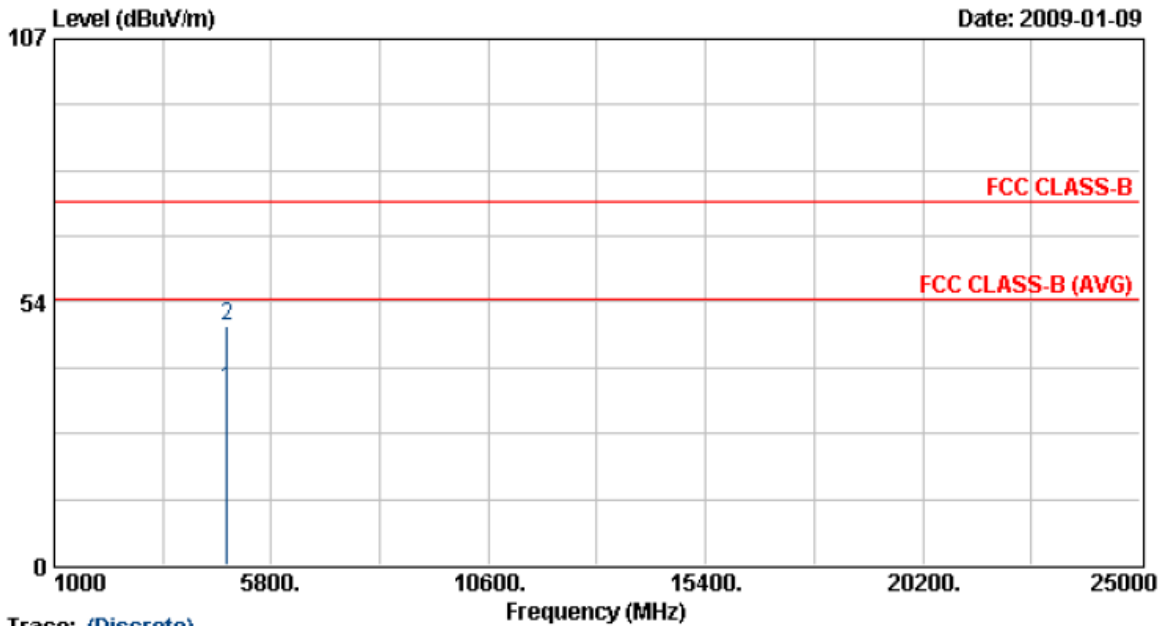

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.03	30.30	5.67	35.97	54.00	-18.03	Average	124	286
2	4824.03	42.97	5.67	48.64	74.00	-25.36	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6.5 Mbps

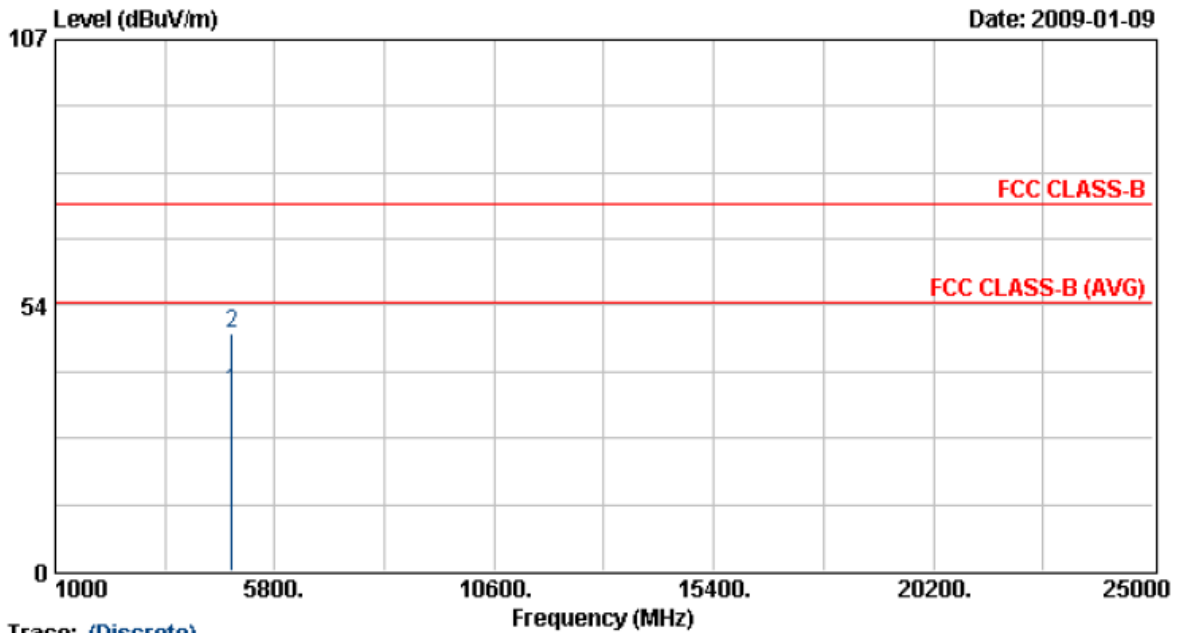

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4871.00	30.42	5.79	36.21	54.00	-17.79	Average	130	271
2	4871.00	42.17	5.79	47.96	74.00	-26.04	Peak	130	271

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6.5 Mbps

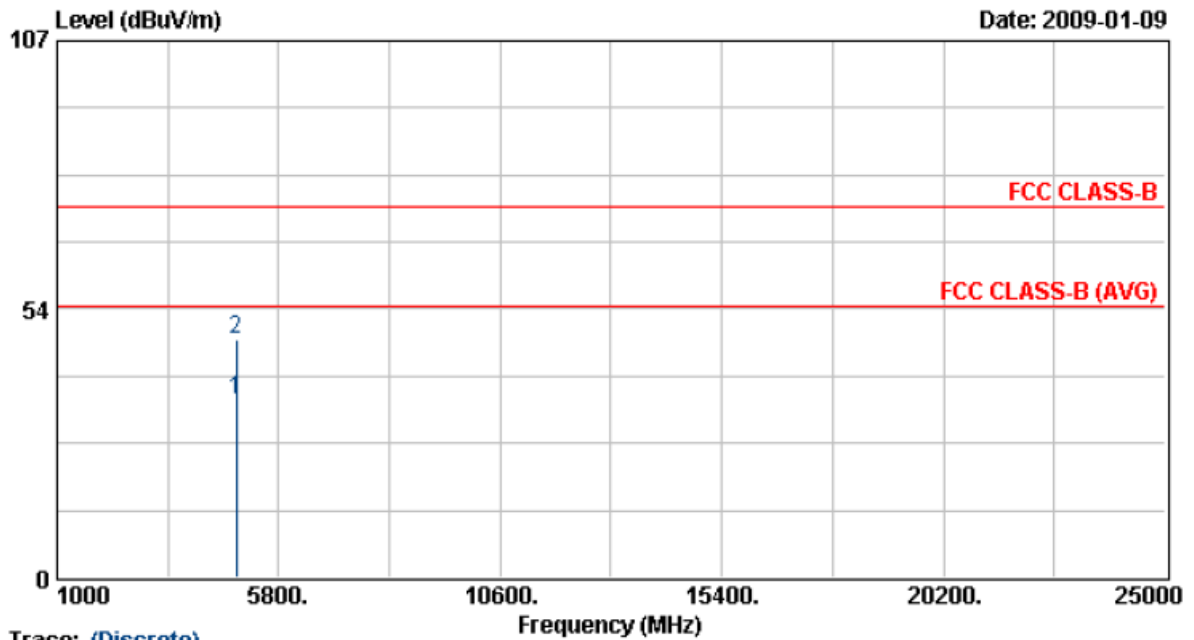

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.98	29.76	5.80	35.56	54.00	-18.44	Average	124	286
2	4873.98	41.55	5.80	47.35	74.00	-26.65	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 7	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6.5 Mbps

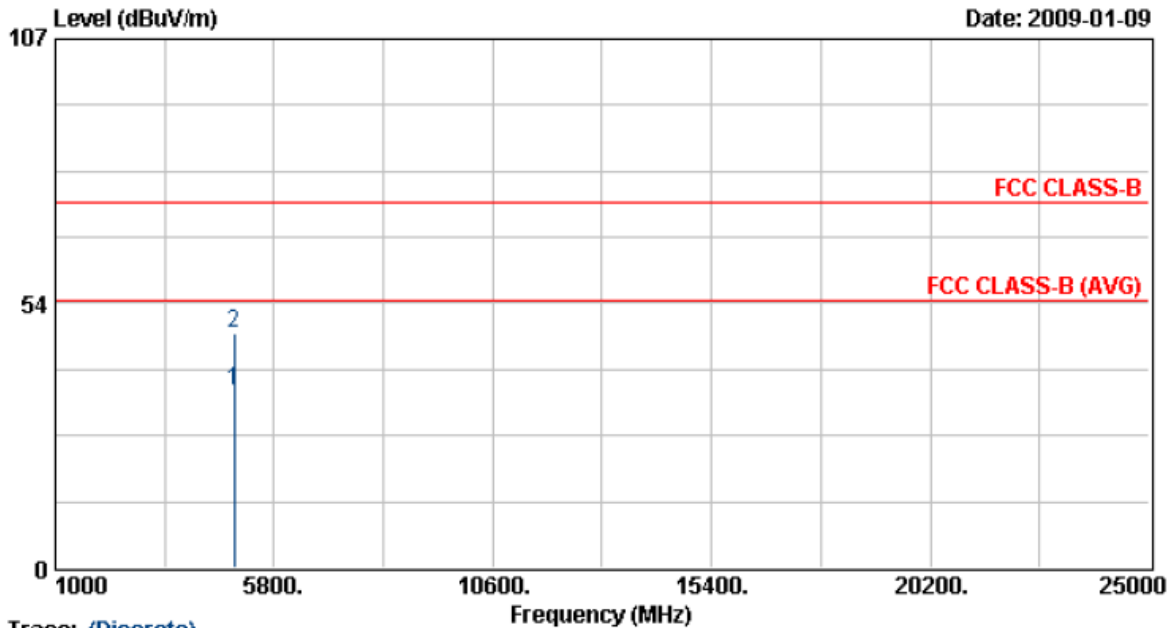

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV/m	dB		cm	Deg
1	4919.95	29.97	5.92	35.89	54.00	-18.11	Average	130	271
2	4919.95	41.56	5.92	47.48	74.00	-26.52	Peak	130	271


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.





Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 7	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 6.5 Mbps

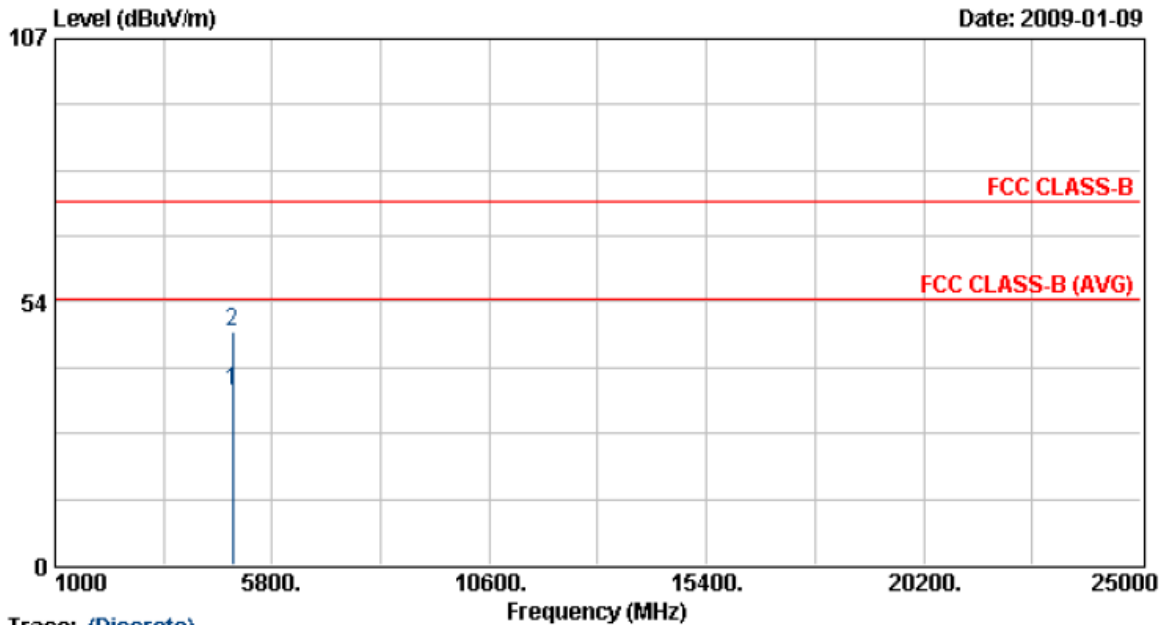

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.33	29.66	5.93	35.59	54.00	-18.41	Average	124	286
2	4924.33	41.46	5.93	47.39	74.00	-26.61	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 13.5 Mbps

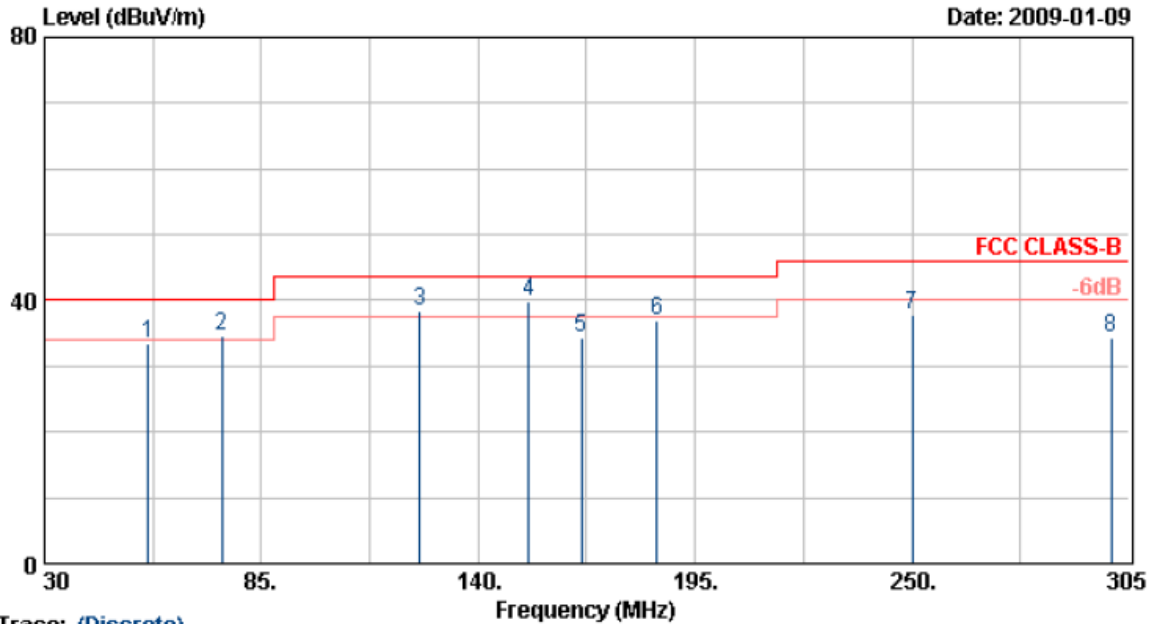

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	56.40	49.52	-16.10	33.42	40.00	-6.58	Peak	100	88
2	75.10	51.96	-17.32	34.64	40.00	-5.36	QP	100	90
3	125.15	51.60	-13.34	38.26	43.50	-5.24	QP	100	90
4	152.93	51.62	-11.90	39.72	43.50	-3.78	QP	100	90
5	166.13	47.32	-12.99	34.33	43.50	-9.17	Peak	100	87
6	185.38	46.50	-9.63	36.87	43.50	-6.63	Peak	100	102
7	250.00	50.77	-13.04	37.73	46.00	-8.27	Peak	100	102
8	300.60	43.79	-9.33	34.46	46.00	-11.54	Peak	100	77

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11MIMO mode at channel 3,6,9 are almost the same below 1GHz, so that the channel 3 was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 13.5 Mbps

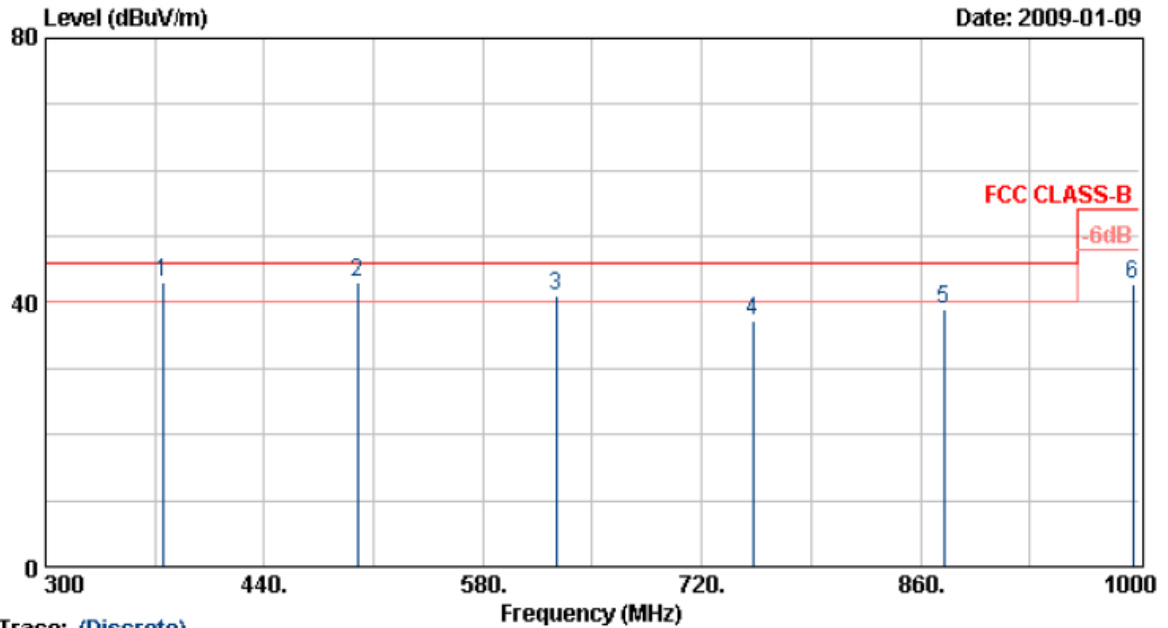

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	374.90	51.86	-8.87	42.98	46.00	-3.02	QP	100	108
2	499.90	47.79	-4.87	42.92	46.00	-3.08	QP	100	108
3	627.00	44.56	-3.57	40.99	46.00	-5.01	QP	100	100
4	752.90	36.90	0.38	37.28	46.00	-8.72	Peak	100	100
5	874.98	37.22	1.81	39.03	46.00	-6.97	Peak	100	99
6	995.80	38.00	4.78	42.78	54.00	-11.22	Peak	100	99

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11MIMO mode at channel 3,6,9 are almost the same below 1GHz, so that the channel 3 was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 13.5 Mbps

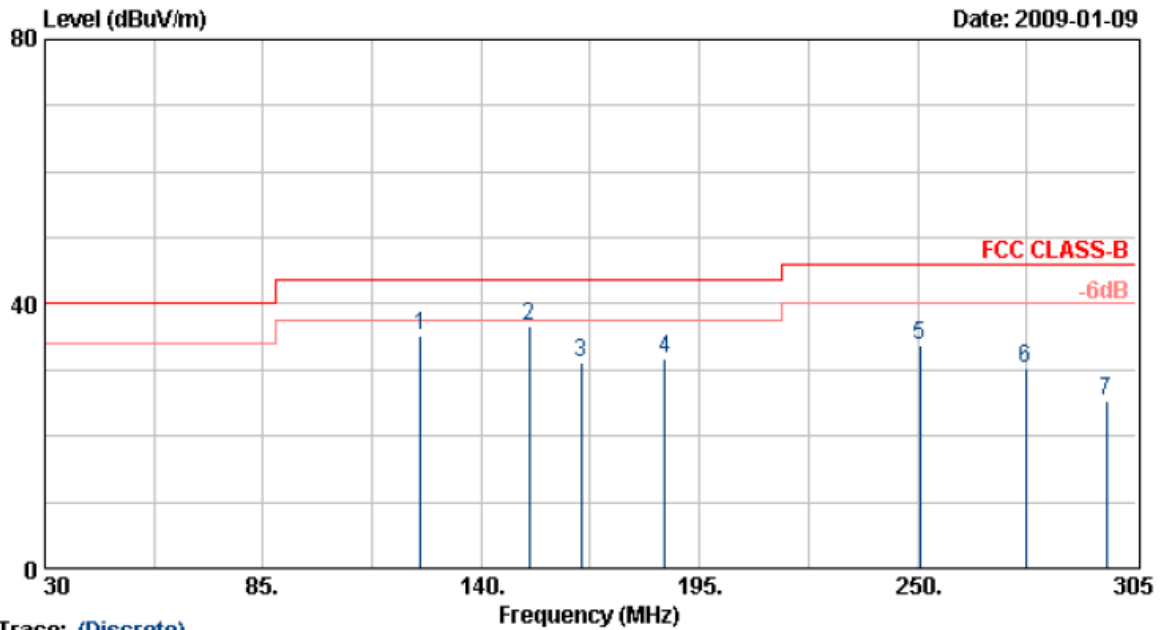

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	124.60	54.78	-19.46	35.32	43.50	-8.18	Peak	100	88
2	152.10	54.11	-17.55	36.56	43.50	-6.94	Peak	100	65
3	165.30	49.96	-18.88	31.08	43.50	-12.42	Peak	100	93
4	186.20	49.29	-17.53	31.76	43.50	-11.74	Peak	100	93
5	250.55	51.20	-17.50	33.70	46.00	-12.30	Peak	100	93
6	277.25	44.80	-14.48	30.32	46.00	-15.68	Peak	100	71
7	297.60	39.60	-14.15	25.45	46.00	-20.55	Peak	100	71

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11MIMO mode at channel 3,6,9 are almost the same below 1GHz, so that the channel 3 was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 13.5 Mbps

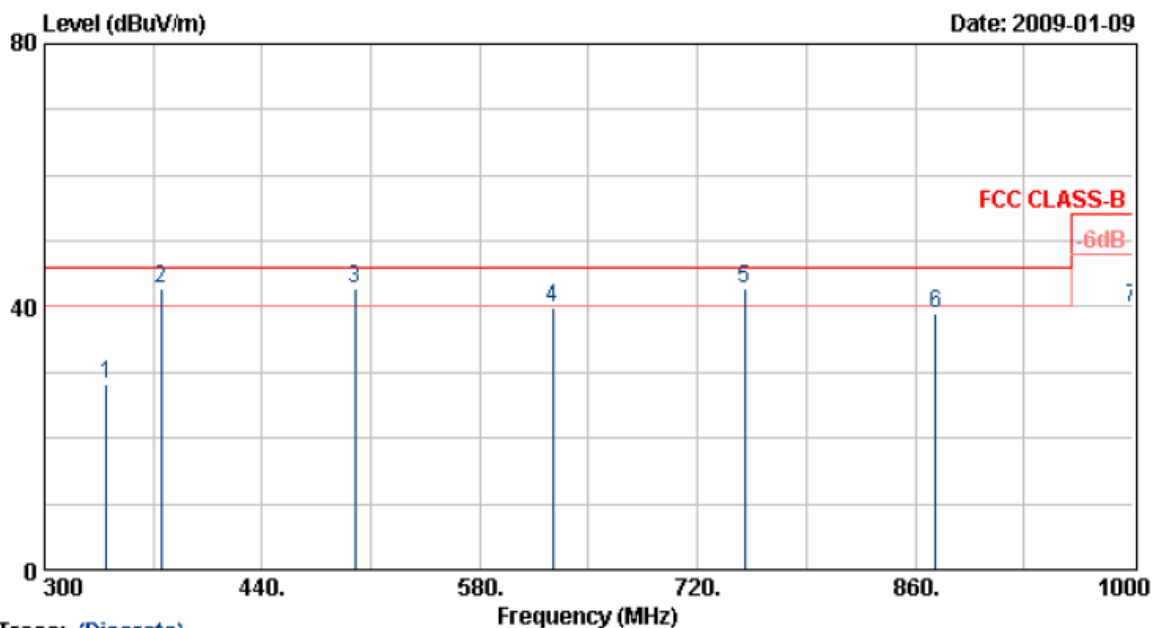

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	339.90	41.87	-13.56	28.31	46.00	-17.69	Peak	100	88
2	375.25	52.96	-10.29	42.67	46.00	-3.33	QP	100	88
3	499.98	46.99	-4.21	42.78	46.00	-3.22	QP	100	88
4	626.90	41.66	-1.84	39.82	46.00	-6.18	Peak	100	144
5	750.05	42.39	0.31	42.70	46.00	-3.30	QP	100	82
6	873.30	35.00	3.99	38.99	46.00	-7.01	Peak	100	82
7	999.93	36.66	3.32	39.98	54.00	-14.02	Peak	100	90

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11MIMO mode at channel 3,6,9 are almost the same below 1GHz, so that the channel 3 was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 13.5 Mbps

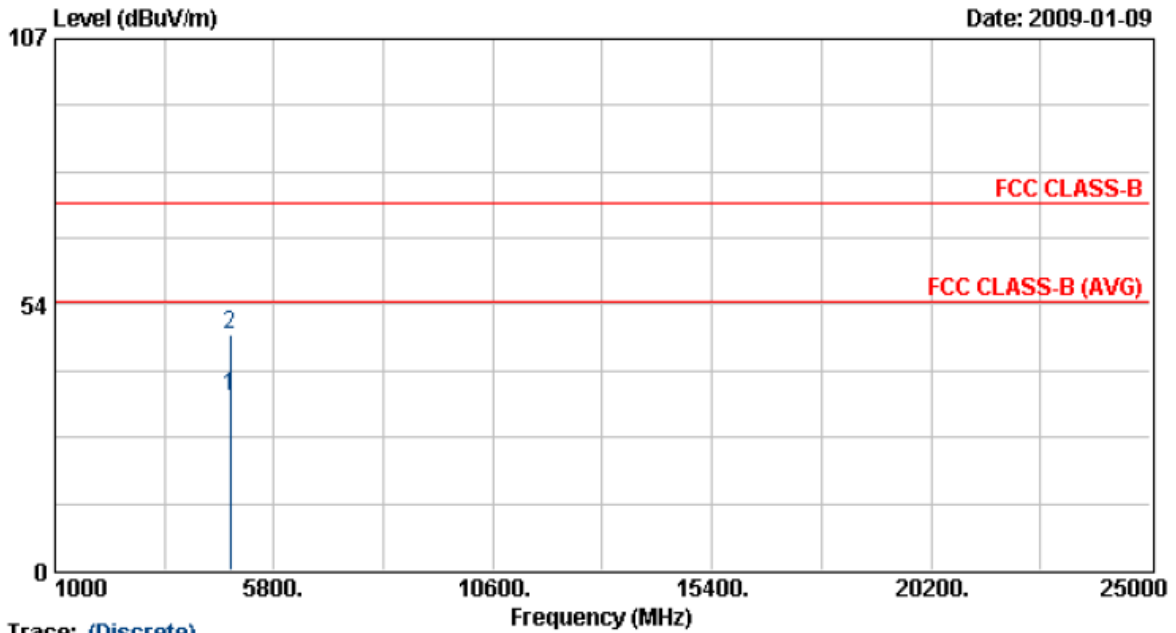

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4843.98	29.39	5.72	35.11	54.00	-18.89	Average	130	271
2	4843.98	41.59	5.72	47.31	74.00	-26.69	Peak	130	271

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 13.5 Mbps

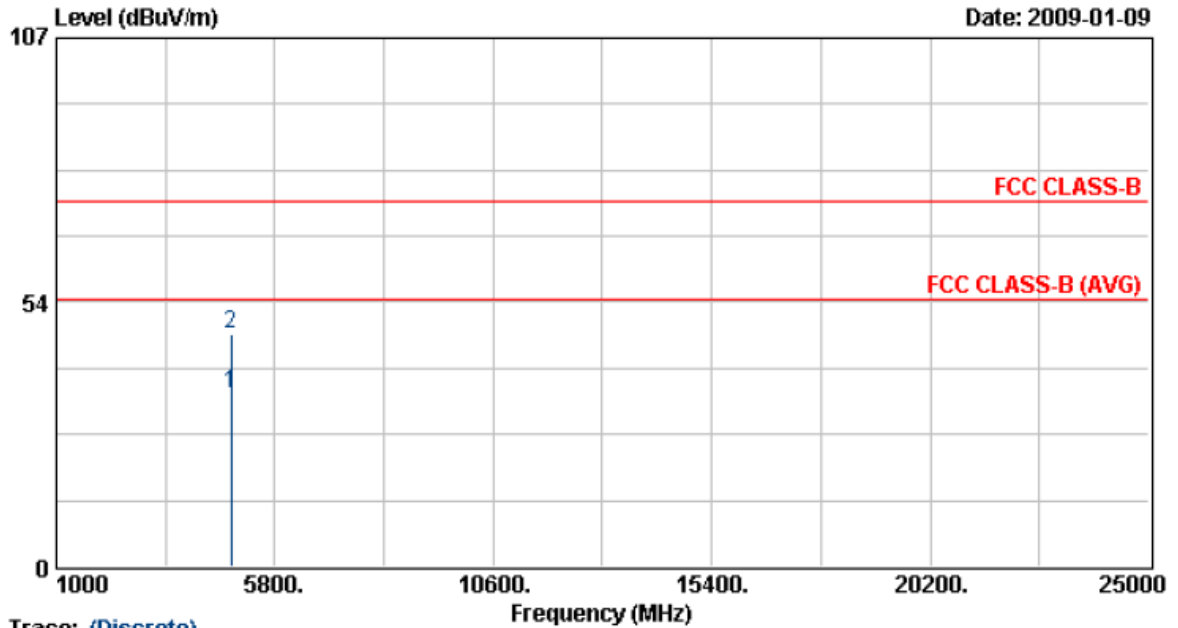

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV/m	dB		cm	Deg
1	4842.68	29.25	5.72	34.97	54.00	-19.03	Average	124	286
2	4842.68	41.27	5.72	46.99	74.00	-27.01	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 13.5 Mbps

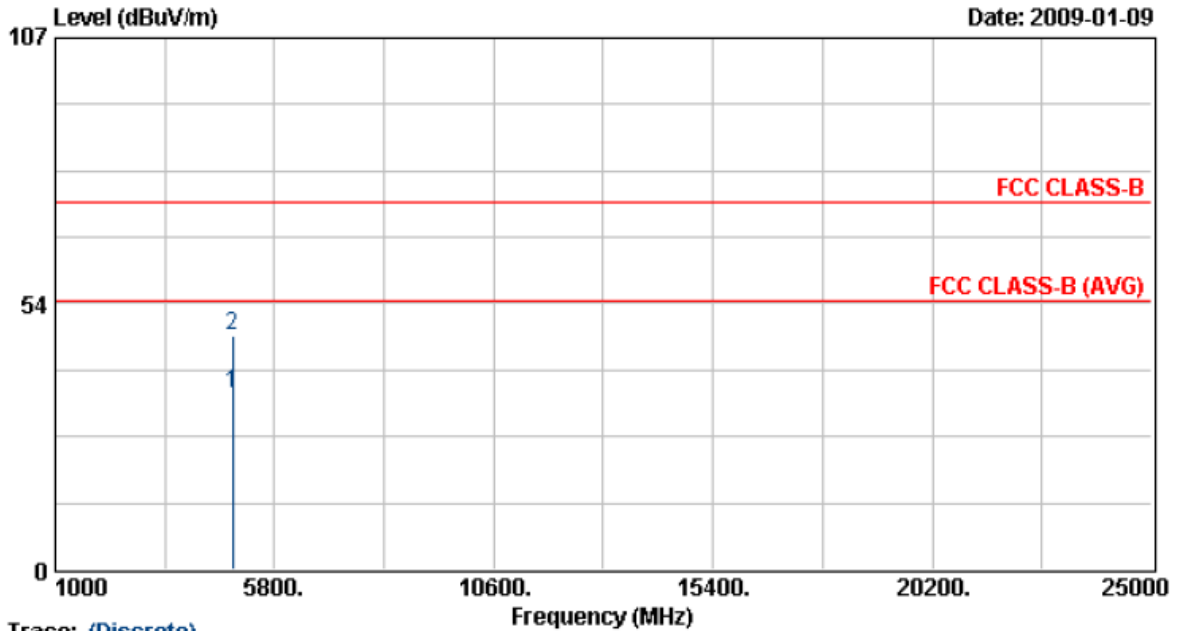

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.08	29.79	5.80	35.59	54.00	-18.41	Average	130	271
2	4874.08	41.29	5.80	47.09	74.00	-26.91	Peak	130	271


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.





Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 13.5 Mbps

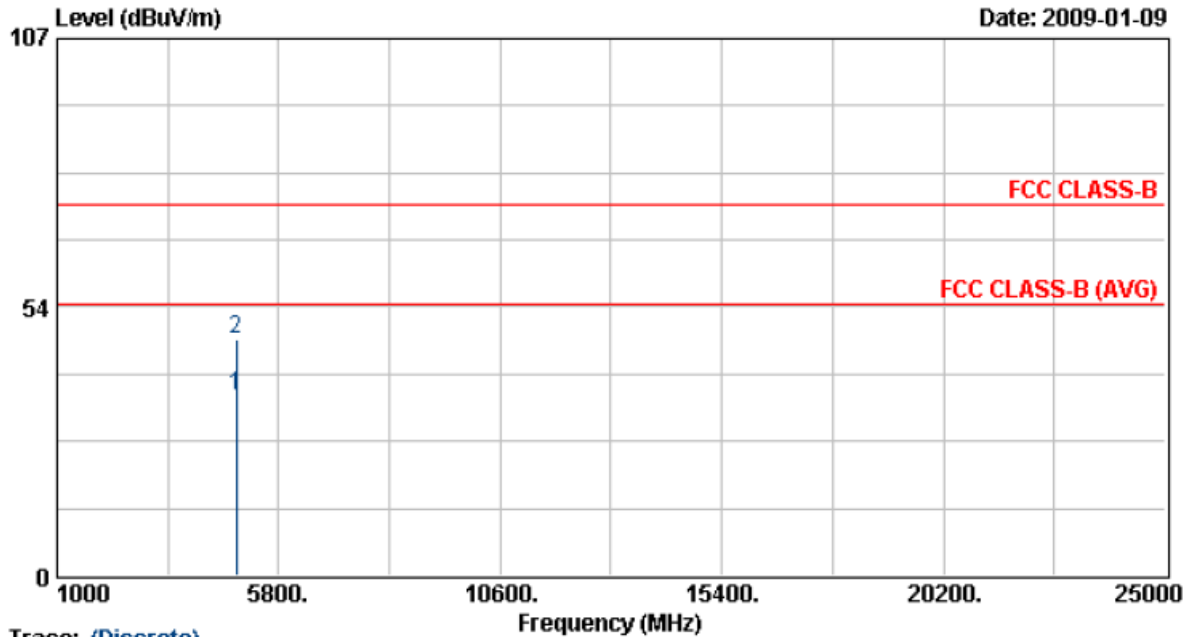

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.98	29.82	5.80	35.62	54.00	-18.38	Average	124	286
2	4873.98	41.19	5.80	46.99	74.00	-27.01	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 8	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 9	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 13.5 Mbps

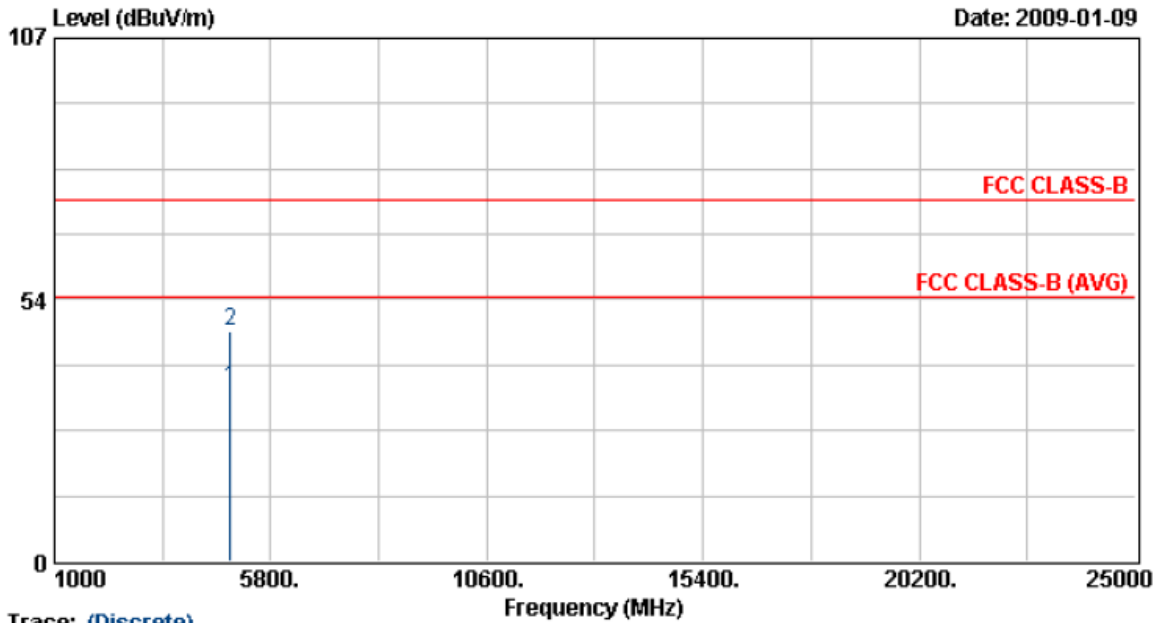

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4904.03	29.41	5.88	35.29	54.00	-18.71	Average	130	271
2	4904.03	41.27	5.88	47.15	74.00	-26.85	Peak	130	271

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 8	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 9	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1020 hPa
Memo	: Adapter: T012LF1209	Rate	: 13.5 Mbps

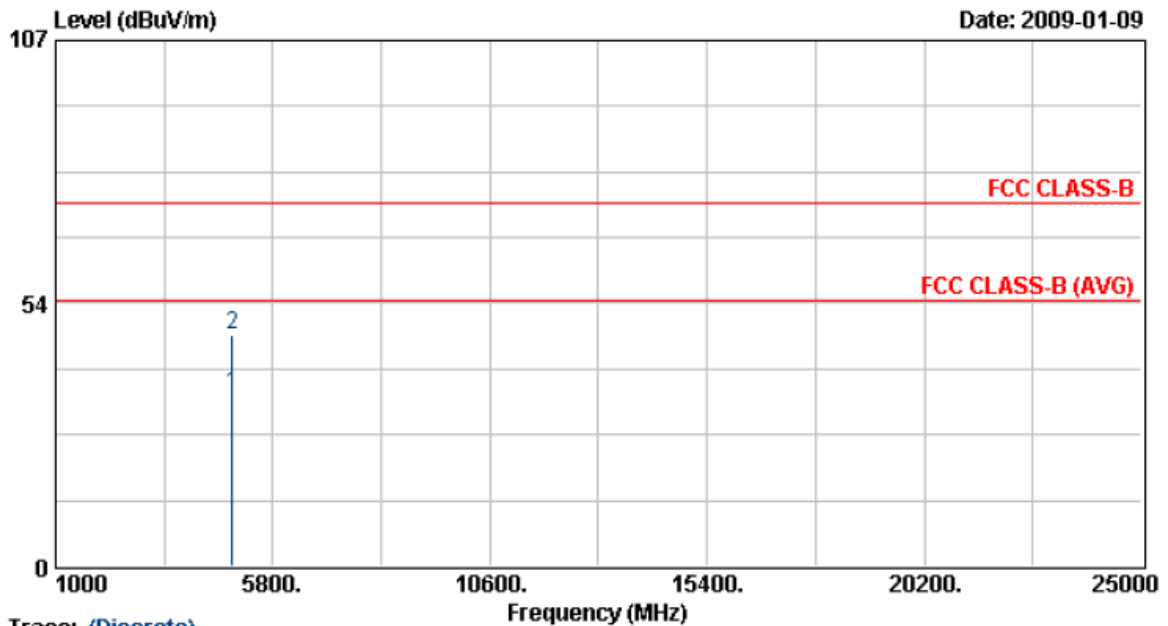

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4904.03	29.32	5.88	35.20	54.00	-18.80	Average	124	286
2	4904.03	41.26	5.88	47.14	74.00	-26.86	Peak	124	286

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 9	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Power from POE	Rate	: 6 Mbps

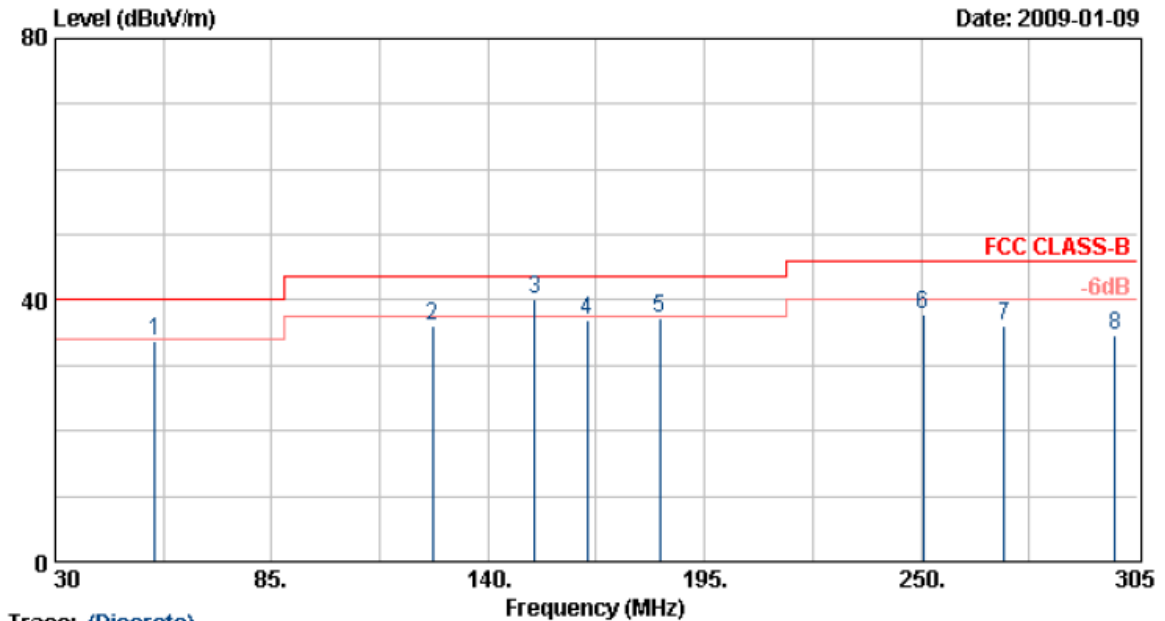

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV/m	dB		cm	Deg
1	55.30	49.65	-15.95	33.70	40.00	-6.30	Peak	100	100
2	125.98	49.58	-13.65	35.93	43.50	-7.57	Peak	100	92
3	151.80	52.22	-12.14	40.08	43.50	-3.42	QP	100	92
4	165.30	49.97	-13.12	36.85	43.50	-6.65	Peak	100	120
5	183.73	46.63	-9.47	37.16	43.50	-6.34	Peak	100	120
6	250.55	50.45	-12.68	37.76	46.00	-8.24	Peak	100	87
7	271.18	44.60	-8.39	36.21	46.00	-9.79	Peak	100	96
8	299.23	43.82	-9.25	34.57	46.00	-11.43	Peak	100	96

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 9	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Power from POE	Rate	: 6 Mbps

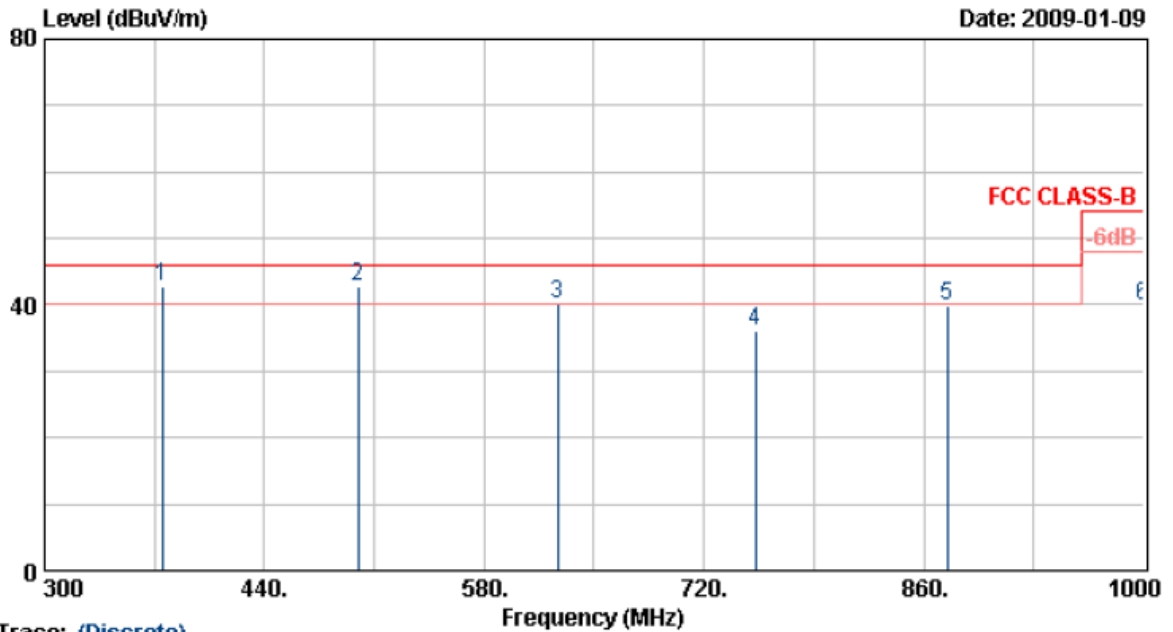

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	374.90	51.67	-8.87	42.80	46.00	-3.20	QP	100	77
2	499.98	47.65	-4.86	42.79	46.00	-3.21	QP	100	77
3	626.90	43.82	-3.58	40.24	46.00	-5.76	QP	100	97
4	752.90	35.68	0.38	36.06	46.00	-9.94	Peak	100	107
5	875.05	38.00	1.80	39.80	46.00	-6.20	Peak	100	107
6	999.99	38.54	1.42	39.96	54.00	-14.04	Peak	100	107

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 9	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Power from POE	Rate	: 6 Mbps

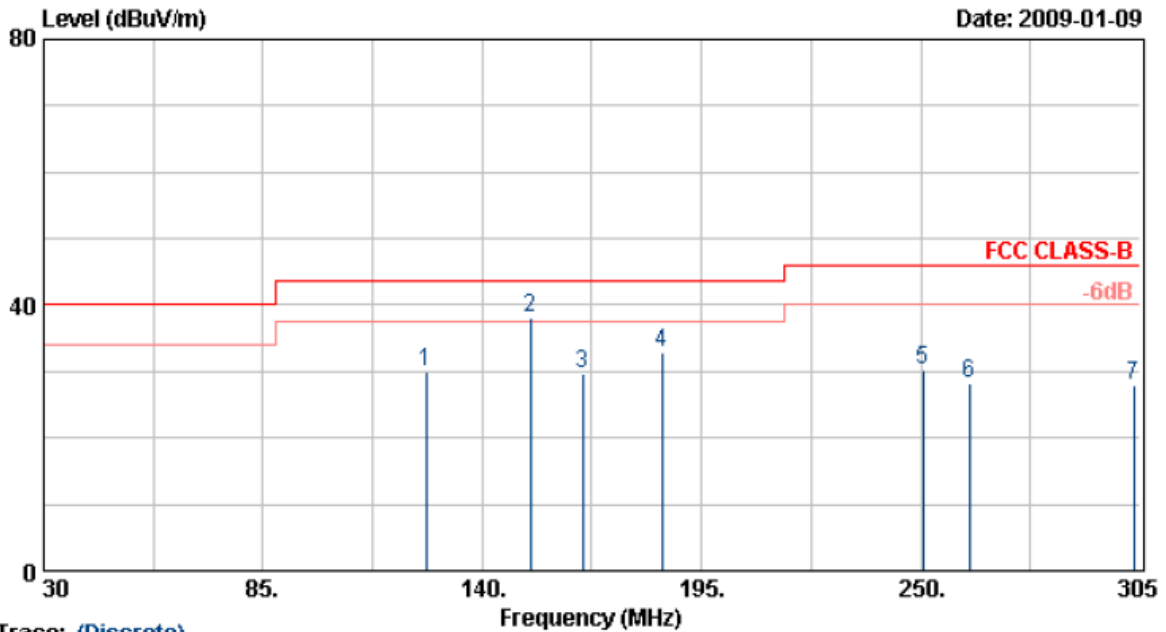

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	125.98	49.65	-19.62	30.04	43.50	-13.46	Peak	100	50
2	152.10	55.67	-17.55	38.12	43.50	-5.38	QP	100	76
3	165.30	48.46	-18.88	29.58	43.50	-13.92	Peak	100	99
4	185.10	50.65	-17.81	32.83	43.50	-10.67	Peak	100	112
5	250.55	47.79	-17.50	30.29	46.00	-15.71	Peak	100	112
6	262.10	43.47	-15.20	28.27	46.00	-17.73	Peak	100	124
7	303.35	41.88	-14.09	27.79	46.00	-18.21	Peak	100	124

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode 9	: Transmit / Receive	Temperature	: 30 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1020 hPa
Memo	: Power from POE	Rate	: 6 Mbps

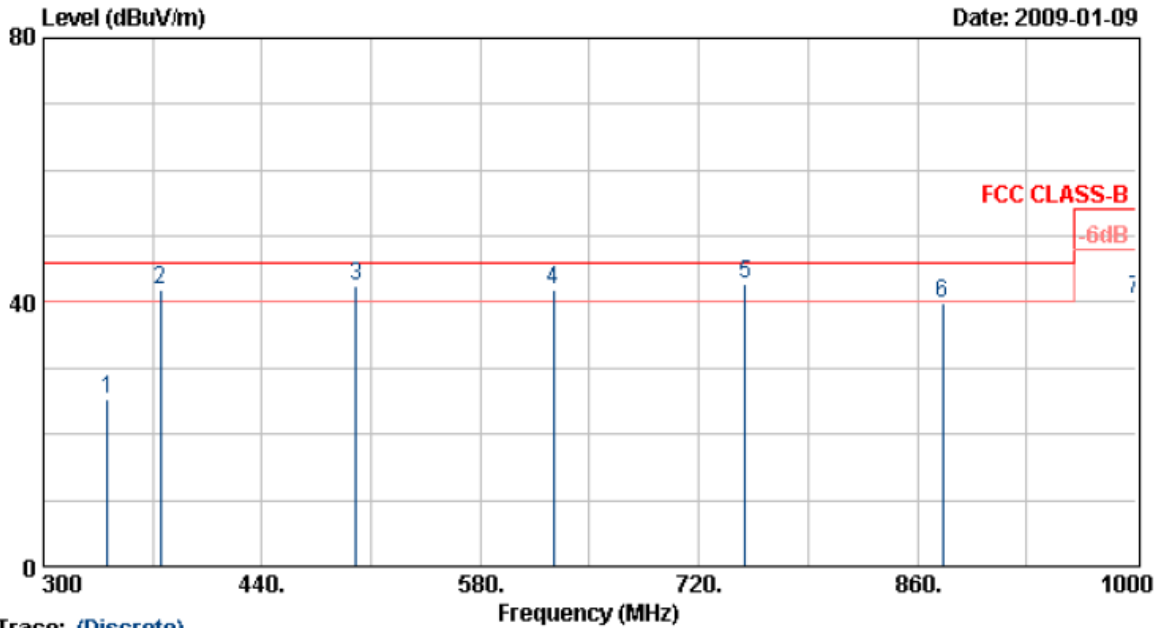

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	341.30	38.46	-13.02	25.44	46.00	-20.56	Peak	100	78
2	374.98	52.15	-10.16	41.99	46.00	-4.01	QP	100	49
3	500.00	46.79	-4.20	42.59	46.00	-3.41	QP	100	59
4	626.90	43.86	-1.84	42.02	46.00	-3.98	QP	100	59
5	749.99	42.55	0.32	42.87	46.00	-3.13	QP	100	98
6	876.10	35.88	3.87	39.75	46.00	-6.25	Peak	100	103
7	999.99	37.30	3.28	40.58	54.00	-13.42	Peak	100	80


Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.





Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode 9	: Transmit / Receive	Temperature	: 20 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1020 hPa
Memo	: Power from POE	Rate	: 11 Mbps

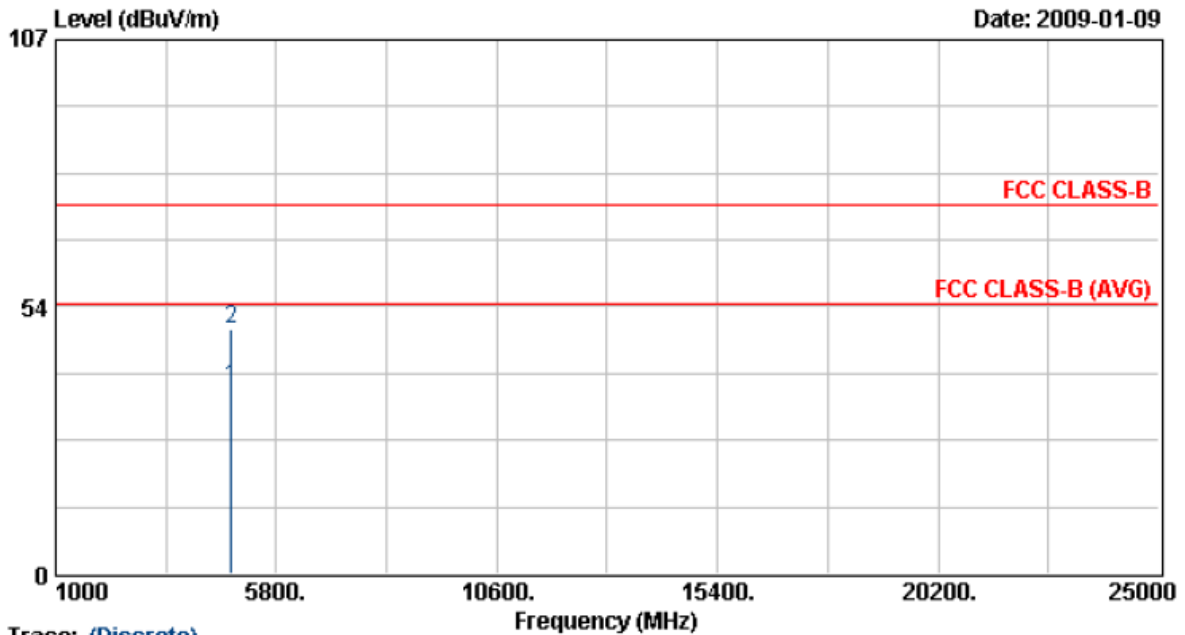

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.93	31.77	5.67	37.44	54.00	-16.56	Average	130	271
2	4823.93	43.36	5.67	49.03	74.00	-24.97	Peak	130	271

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.