




Appendix D. Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24.5°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	WLAN + GSM850 CH128 / Mode 2

Horizontal

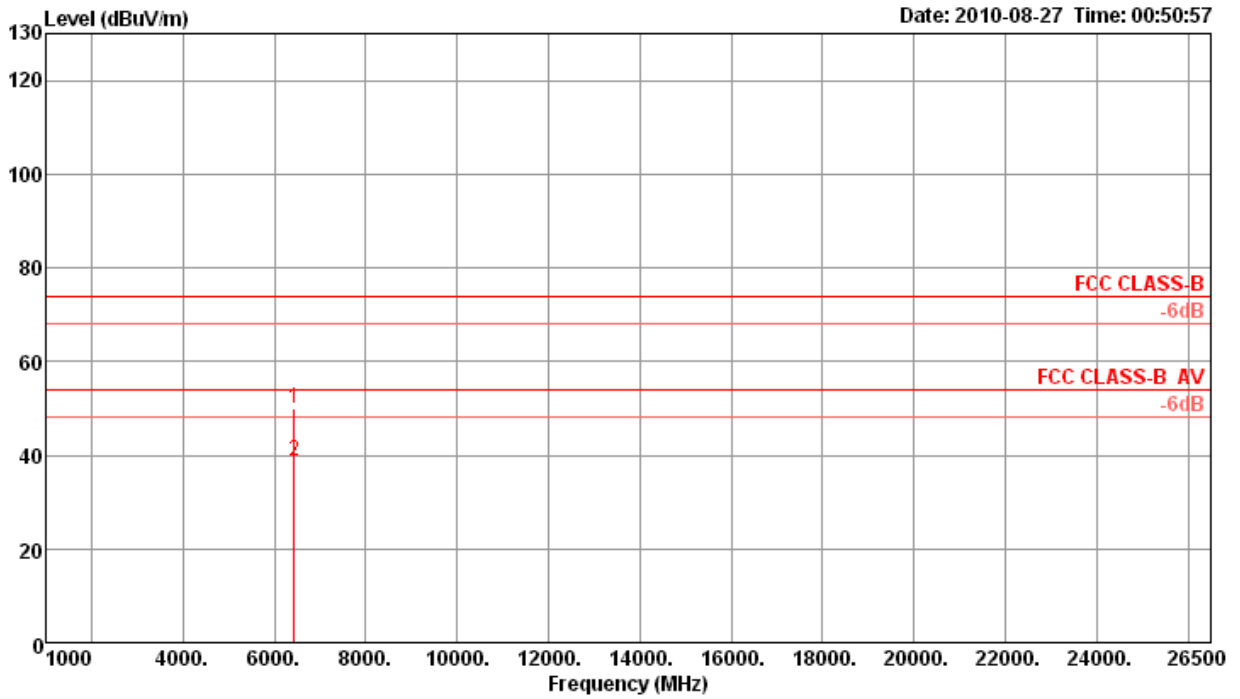

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	6431.69	50.00	74.00	-24.00	45.52	4.75	35.28	35.01	29	100	Peak	HORIZONTAL
2 a	6432.05	38.60	54.00	-15.40	34.12	4.75	35.28	35.01	29	100	Average	HORIZONTAL

Vertical

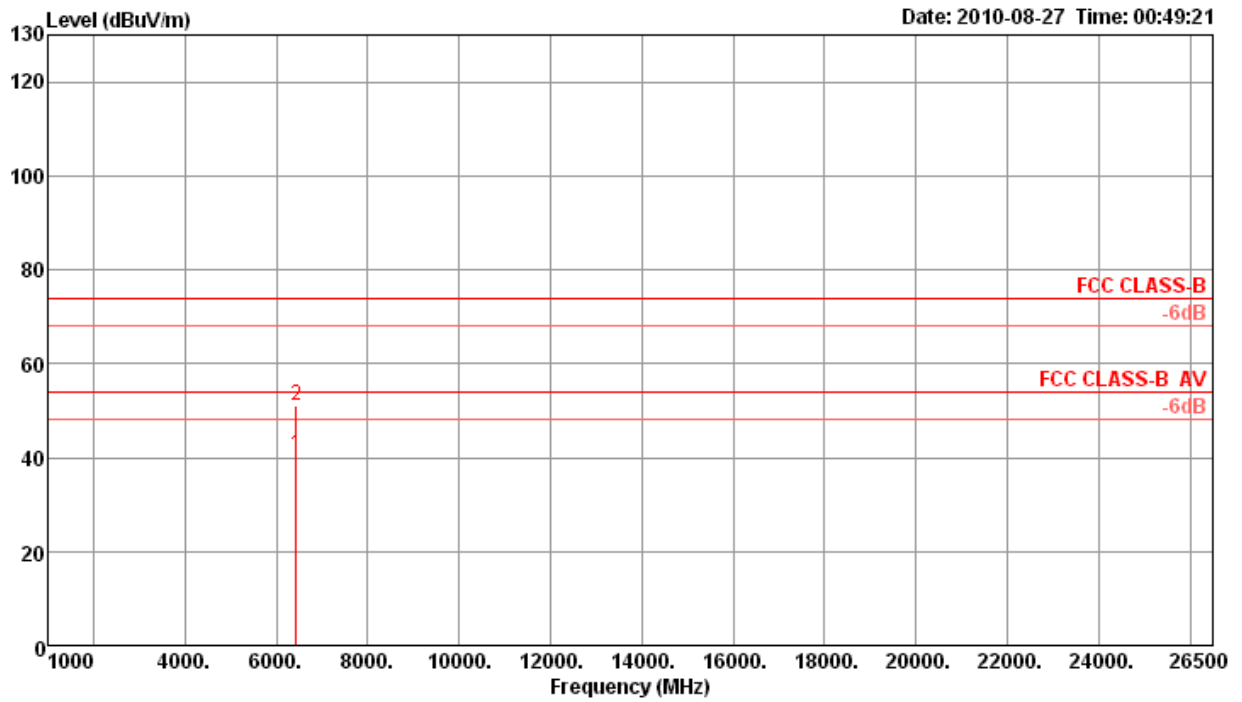

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	6431.98	40.40	54.00	-13.60	35.92	4.75	35.28	35.01	224	105	Average	VERTICAL
2 p	6432.18	51.19	74.00	-22.81	46.71	4.75	35.28	35.01	224	105	Peak	VERTICAL