


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


| | | | |
|---------------|---------|----------------|--------------|
| Temperature | 25°C | Humidity | 63% |
| Test Engineer | Johnson | Configurations | 2.4G + 5G TX |

Horizontal

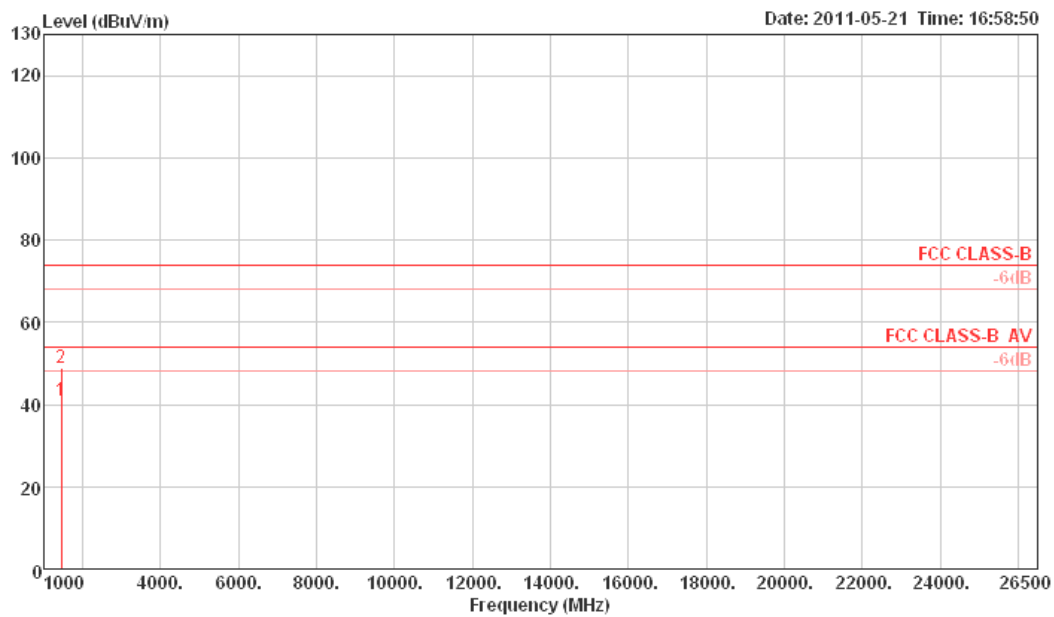

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|------------|
| | MHz | dBuV/m | dBuV/m | Limit | Level | Loss | Factor | Factor | Remark | Pol/Phase |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 1439.96 | 41.03 | 54.00 | -12.97 | 48.16 | 2.32 | 25.39 | 34.84 | Average | HORIZONTAL |
| 2 | 1439.96 | 48.94 | 74.00 | -25.06 | 56.07 | 2.32 | 25.39 | 34.84 | Peak | HORIZONTAL |

Vertical

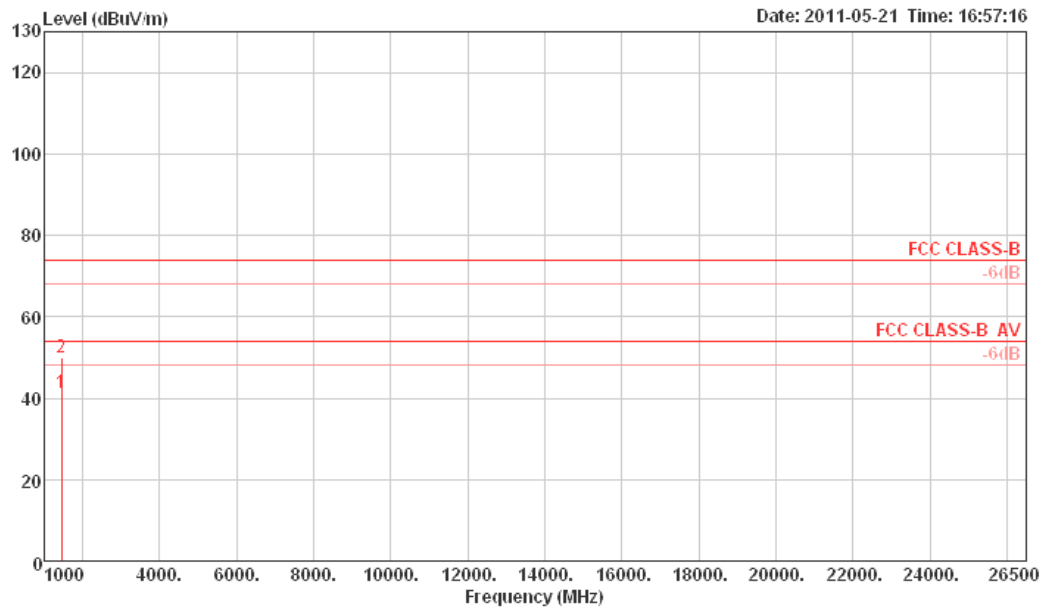

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-----------|
| | MHz | dBuV/m | Line | Limit | Level | Loss | Factor | Factor | Remark | Pol/Phase |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | |
| 1 | 1439.96 | 41.41 | 54.00 | -12.59 | 48.54 | 2.32 | 25.39 | 34.84 | Average | VERTICAL |
| 2 | 1440.20 | 49.82 | 74.00 | -24.18 | 56.95 | 2.32 | 25.39 | 34.84 | Peak | VERTICAL |