


## Appendix C. Co-location Report

## 1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	62%
Test Engineer	Roy	Configurations	WLAN + GSM850 CH128 / Mode 2

### Horizontal

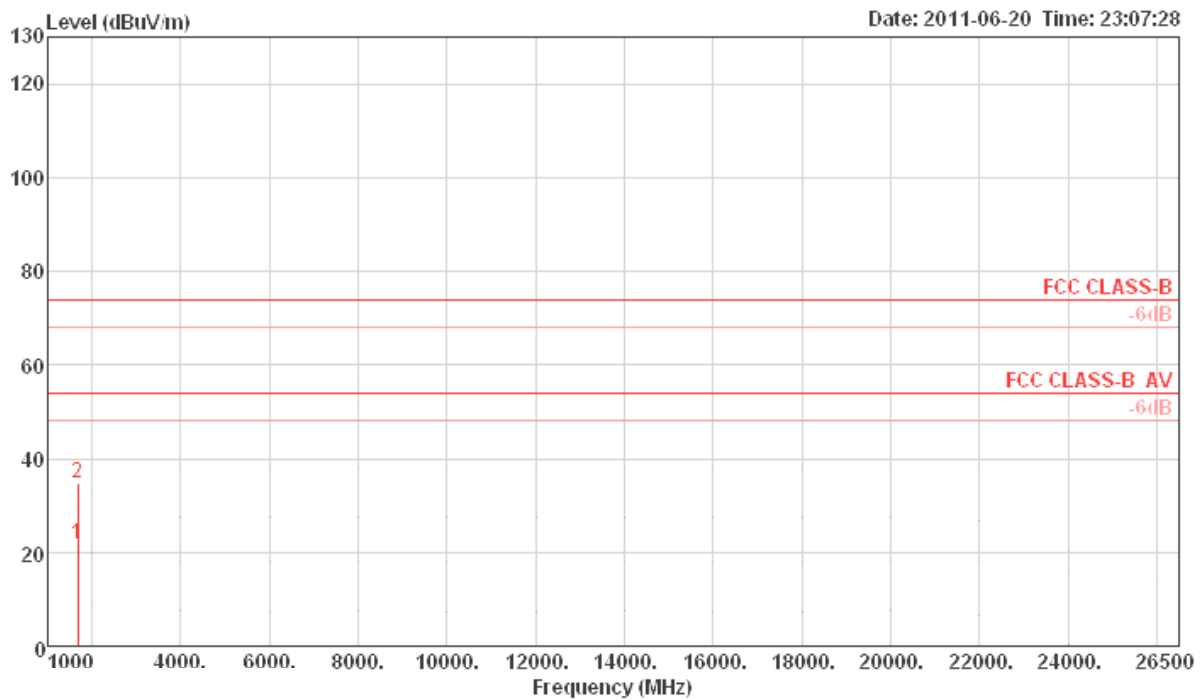

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	1671.92	21.55	54.00	-32.45	29.07	1.82	26.03	35.37	105	100 Average	HORIZONTAL
2	1672.37	34.85	74.00	-39.15	42.37	1.82	26.03	35.37	105	100 Peak	HORIZONTAL

# Vertical

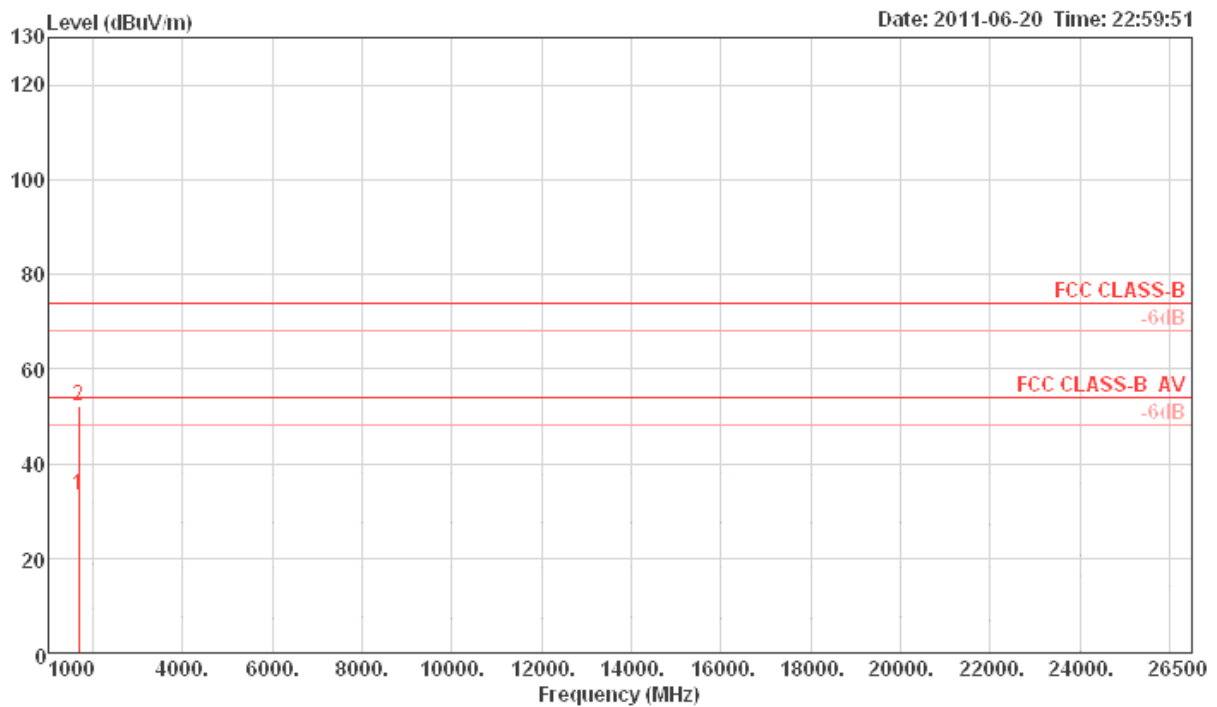

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	1672.89	33.25	54.00	-20.75	40.77	1.82	26.03	35.37	192	108 Average	VERTICAL
2	1672.89	52.27	74.00	-21.73	59.79	1.82	26.03	35.37	192	108 Peak	VERTICAL