


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	62%
Test Engineer	Timberland Lin	Configurations	WLAN TX + LTE Band 4

Horizontal

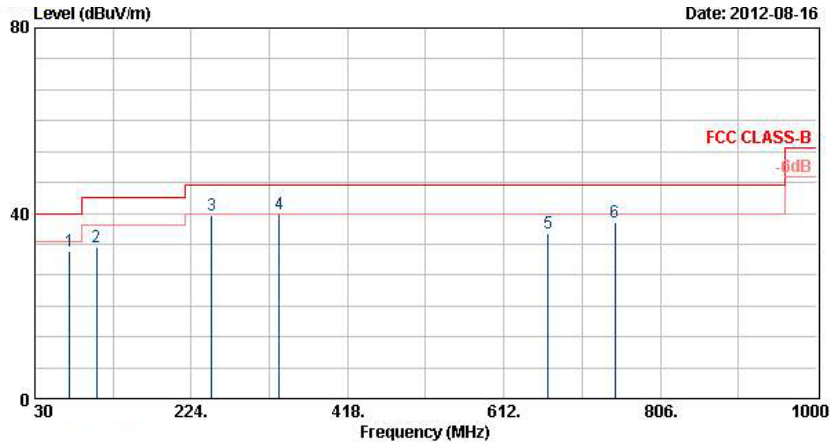


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB	dB	cm	deg	
1 @	72.93	31.70	-8.30	40.00	55.61	6.52	0.95	31.38	---	Peak
2 @	106.68	32.81	-10.69	43.50	51.38	11.68	1.14	31.38	---	Peak
3 @	249.78	39.68	-6.32	46.00	56.66	12.40	1.73	31.11	---	Peak
4 @	332.90	39.83	-6.17	46.00	55.03	13.75	1.99	30.95	201	69 Peak
5 @	666.80	35.54	-10.46	46.00	44.91	19.14	2.83	31.34	---	Peak
6 @	749.40	37.99	-8.01	46.00	45.98	19.80	3.05	30.84	---	Peak

Horizontal

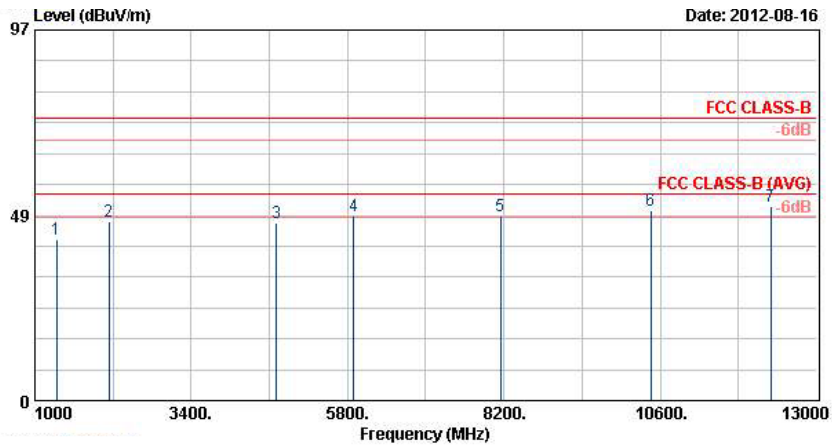


	Freq	Level	Level Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1332.00	42.15	-31.85	74.00	66.63	25.61	3.87	53.96	---	---	Peak
2	2132.50	46.83	-27.17	74.00	65.58	30.14	5.08	53.97	---	---	Peak
3	4708.00	46.40	-27.60	74.00	60.60	33.29	7.89	55.37	---	---	Peak
4	5894.00	48.19	-25.81	74.00	60.64	35.18	9.04	56.66	---	---	Peak
5	8148.00	48.32	-25.68	74.00	52.99	40.78	10.39	55.84	---	---	Peak
6	10454.00	49.82	-24.18	74.00	55.04	39.56	10.48	55.26	---	---	Peak
7 @	12300.00	50.85	-23.15	74.00	50.43	42.51	10.98	53.07	100	0	Peak

Vertical

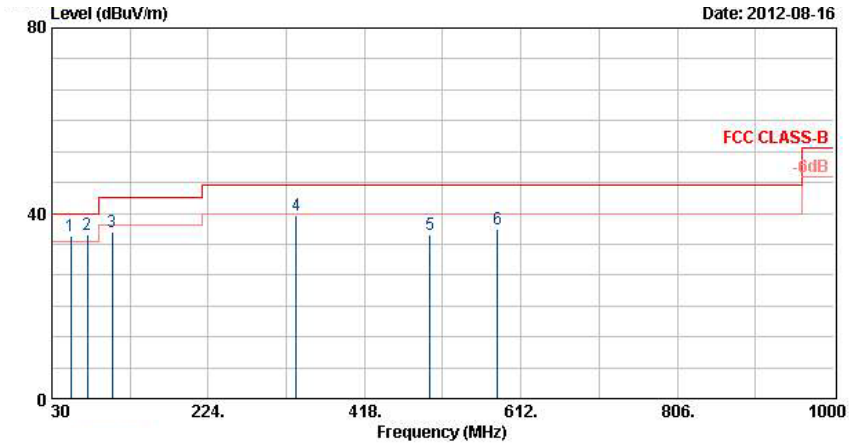

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	53.49	35.05	-4.95	40.00	58.34	7.50	0.82	31.61	---	---	Peak
2 @	74.28	35.31	-4.69	40.00	59.11	6.60	0.96	31.36	100	148	Peak
3 @	104.79	36.12	-7.38	43.50	54.88	11.60	1.13	31.49	---	---	Peak
4 @	332.90	39.68	-6.32	46.00	54.89	13.75	1.99	30.95	---	---	Peak
5 @	498.80	35.39	-10.61	46.00	47.26	17.60	2.47	31.94	---	---	Peak
6 @	582.80	36.53	-9.47	46.00	46.68	18.87	2.69	31.70	---	---	Peak

Vertical

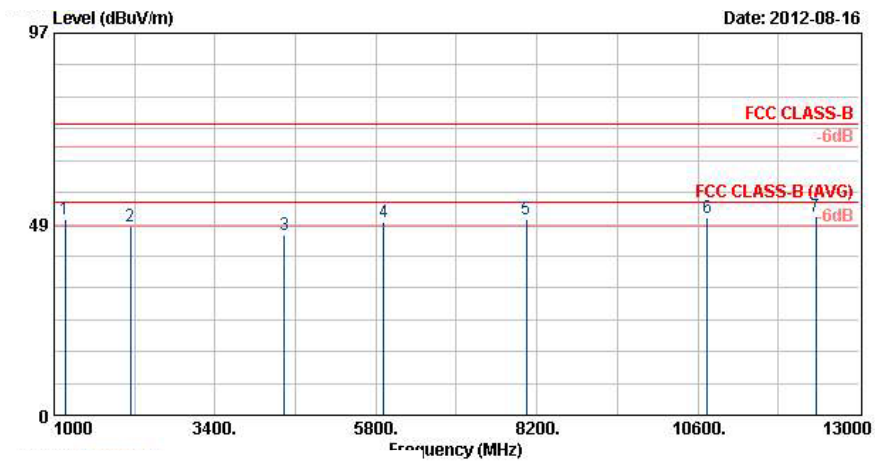

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos		
			dB	dBuV/m	dBuV	dB	dB	cm	deg		
1	1164.00	49.76	-24.24	74.00	75.22	24.96	3.62	54.03	---	---	Peak
2	2132.50	47.98	-26.02	74.00	66.73	30.14	5.08	53.97	---	---	Peak
3	4430.00	45.72	-28.28	74.00	60.68	32.33	7.70	54.99	---	---	Peak
4	5916.00	48.86	-25.14	74.00	61.27	35.20	9.06	56.67	---	---	Peak
5	8044.00	49.91	-24.09	74.00	54.23	40.94	10.46	55.73	---	---	Peak
6	10746.00	50.02	-23.98	74.00	54.05	40.13	10.75	54.91	---	---	Peak
7 @	12356.00	50.65	-23.35	74.00	50.20	42.48	10.96	52.99	100	0	Peak