


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	26°C	Humidity	60%
Test Engineer	Wen Chao	Configurations	2.4G + 5G

Horizontal

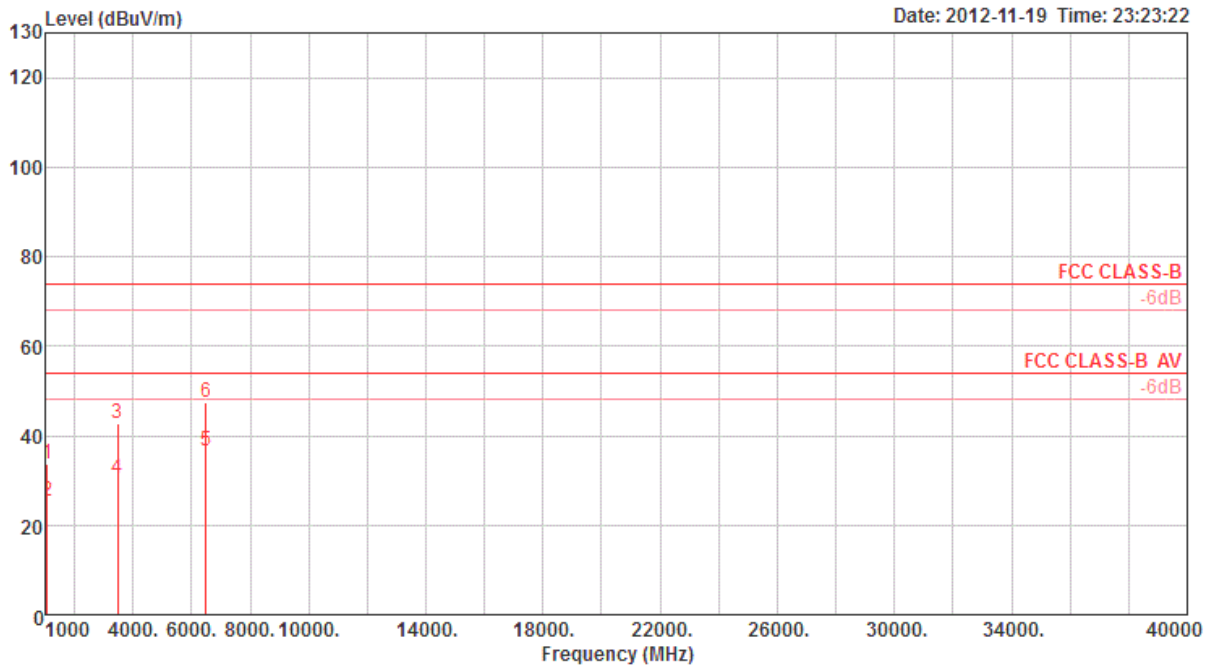

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	1059.97	33.56	74.00	-40.44	43.59	1.89	35.85	23.93	Peak	238	100	HORIZONTAL
2	1059.98	25.46	54.00	-28.54	35.49	1.89	35.85	23.93	Average	238	100	HORIZONTAL
3	3486.61	42.60	74.00	-31.40	43.48	3.57	34.71	30.26	Peak	203	100	HORIZONTAL
4	3486.63	30.50	54.00	-23.50	31.38	3.57	34.71	30.26	Average	203	100	HORIZONTAL
5 a	6498.56	36.64	54.00	-17.36	30.60	5.04	34.78	35.78	Average	176	100	HORIZONTAL
6 p	6498.64	47.54	74.00	-26.46	41.50	5.04	34.78	35.78	Peak	176	100	HORIZONTAL

Vertical

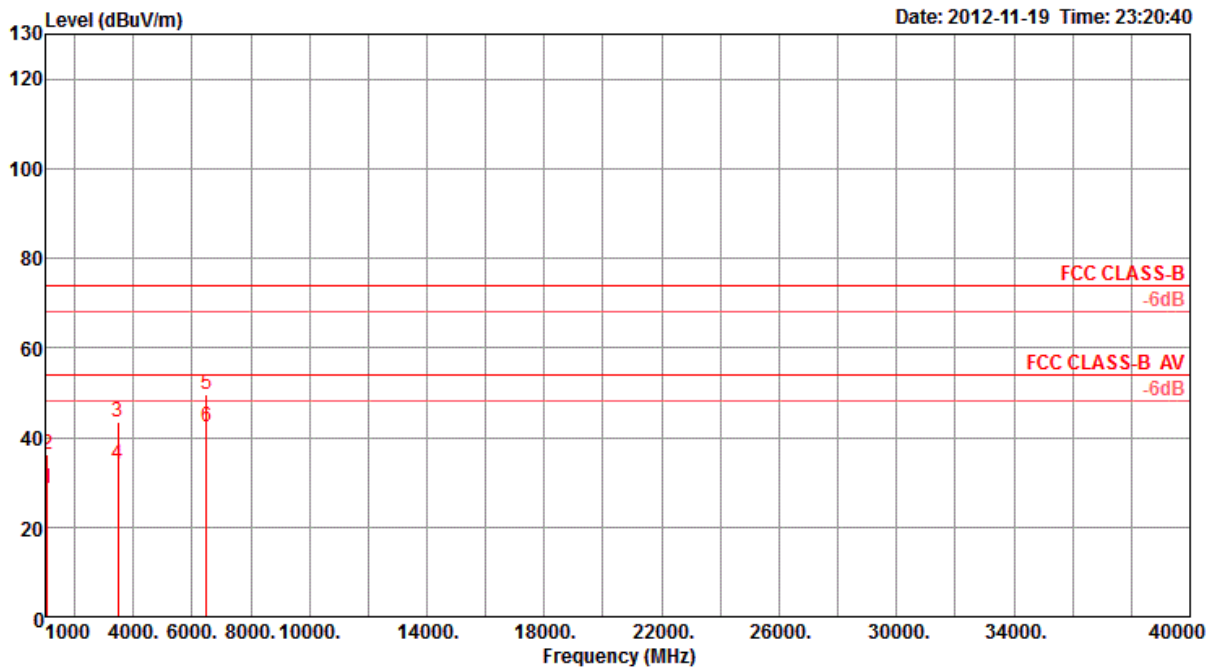

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	1059.93	28.45	54.00	-25.55	38.48	1.89	35.85	23.93	Average	145	100	VERTICAL
2	1060.07	36.13	74.00	-37.87	46.16	1.89	35.85	23.93	Peak	145	100	VERTICAL
3	3486.57	43.55	74.00	-30.45	44.43	3.57	34.71	30.26	Peak	241	100	VERTICAL
4	3486.66	34.20	54.00	-19.80	35.08	3.57	34.71	30.26	Average	241	100	VERTICAL
5 p	6498.53	49.50	74.00	-24.50	43.46	5.04	34.78	35.78	Peak	72	100	VERTICAL
6 a	6498.60	42.48	54.00	-11.52	36.44	5.04	34.78	35.78	Average	72	100	VERTICAL