



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	NETGEAR, Inc.
Applicant Address	350 East Plumeria Drive, San Jose, California 95134, USA
FCC ID	PY312400219
Manufacturer's company	Ambit Microsystems (Shanghai) Ltd.
Manufacturer Address	No. 1925, Nanle Road, Songjiang Export Processing Zone, Shanghai, China

Product Name	R6250 Smart WiFi Router
Brand Name	NETGEAR
Model Name	R6250
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Jan. 07, 2013
Final Test Date	Feb. 19, 2013
Submission Type	Original Equipment
Operating Mode	Master

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5150 ~ 5250MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009**,

47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r02 and KDB 662911 D01 v01r02.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details	3
3.2. Accessories	6
3.3. Table for Filed Antenna	7
3.4. Table for Carrier Frequencies	8
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	10
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	11
3.9. Test Configurations.....	12
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement	15
4.2. 26dB Bandwidth Measurement	21
4.3. Maximum Conducted Output Power Measurement.....	32
4.4. Power Spectral Density Measurement.....	36
4.5. Peak Excursion Measurement	42
4.6. Radiated Emissions Measurement.....	47
4.7. Band Edge Emissions Measurement.....	62
4.8. Frequency Stability Measurement.....	69
4.9. Antenna Requirements	71
5. LIST OF MEASURING EQUIPMENTS	72
6. TEST LOCATION	74
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. CO-LOCATION REPORT	C1 ~ C3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR322315AB	Rev. 01	Initial issue of report	Mar. 14, 2013



1. CERTIFICATE OF COMPLIANCE

Product Name : R6250 Smart WiFi Router
Brand Name : NETGEAR
Model Name : R6250
Applicant : NETGEAR, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 07, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read 'Sam Chen', is written over a horizontal line.

Sam Chen
SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.12 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.10 dB
4.4	15.407(a)	Power Spectral Density	Complies	1.40 dB
4.5	15.407(a)	Peak Excursion	Complies	3.20 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.40 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.02 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM) for 802.11n OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) for 802.11ac
Data Rate (Mbps)	see the below table for IEEE 802.11n see the below table for IEEE 802.11ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	IEEE 802.11n: MCS0 (20MHz): 17.76 MHz ; MCS0 (40MHz): 36.48 MHz IEEE 802.11ac: MCS0 (VHT 20MHz): 17.92 MHz ; MCS0 (VHT 40MHz): 36.80 MHz ; MCS0 (VHT 80MHz): 76.80 MHz
Maximum Conducted Output Power	IEEE 802.11n: MCS0 (20MHz): 15.96 dBm ; MCS0 (40MHz): 16.90 dBm IEEE 802.11ac: MCS0 (VHT 20MHz): 15.99 dBm ; MCS0 (VHT 40MHz): 16.87 dBm ; MCS0 (VHT 80MHz): 15.38 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3
The EUT supports beamforming mode for 802.11ac 20/40/80MHz.	

IEEE 802.11a

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	4
Channel Band Width (99%)	17.28 MHz
Maximum Conducted Output Power	14.88 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Three (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 802.11n spec

MCS	Spatial	Modulation	Coding	Data rate (Mbit/s)			
Index	Streams	Type	Rate	20 MHz channel		40 MHz channel	
				800 ns GI	400 ns GI	800 ns GI	400 ns GI
0	1	BPSK	1/2	6.5	7.2	13.5	15
1	1	QPSK	1/2	13	14.4	27	30
2	1	QPSK	3/4	19.5	21.7	40.5	45
3	1	16-QAM	1/2	26	28.9	54	60
4	1	16-QAM	3/4	39	43.3	81	90
5	1	64-QAM	2/3	52	57.8	108	120
6	1	64-QAM	3/4	58.5	65	121.5	135
7	1	64-QAM	5/6	65	72.2	135	150
8	2	BPSK	1/2	13	14.4	27	30
9	2	QPSK	1/2	26	28.9	54	60
10	2	QPSK	3/4	39	43.3	81	90
11	2	16-QAM	1/2	52	57.8	108	120
12	2	16-QAM	3/4	78	86.7	162	180
13	2	64-QAM	2/3	104	115.6	216	240
14	2	64-QAM	3/4	117	130	243	270
15	2	64-QAM	5/6	130	144.4	270	300
16	3	BPSK	1/2	19.5	21.7	40.5	45
17	3	QPSK	1/2	39	43.3	81	90
18	3	QPSK	3/4	58.5	65	121.5	135
19	3	16-QAM	1/2	78	86.7	162	180
20	3	16-QAM	3/4	117	130	243	270
21	3	64-QAM	2/3	156	173.3	324	360
22	3	64-QAM	3/4	175.5	195	364.5	405
23	3	64-QAM	5/6	195	216.7	405	450

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

IEEE 802. 11a, 11n and 11ac Spec.

Worst Modulation Used for Conformance Testing				
Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS	Worst Data Rate / MCS	Worst Modulation Mode
802.11a	3	6-54 Mbps	6Mbps	11A5.2G-20M
802.11n 20MHz	3	MCS 0-23	MCS 0	11N5.2G-20M
802.11n 40MHz	3	MCS 0-23	MCS 0	11N5.2G-40M
802.11ac 20MHz	3	MCS 0-9, Nss1-3	MCS 0-Nss1	11AC5.2G-20M
802.11ac 40MHz	3	MCS 0-9, Nss1-3	MCS 0-Nss1	11AC5.2G-40M
802.11ac 80MHz	3	MCS 0-9, Nss1-3	MCS 0-Nss1	11AC5.2G-80M
Note 1: IEEE 802.11 modulation consists of IEEE 802.11a.				
Note 2: IEEE 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 400ns.				
Note 3: IEEE 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160. Then EUT support VHT20, VHT40, VHT80. (VHT: Very High Throughput).				
Note 4: Modulation modes consist of 11A5.2G-20M, 11N5.2G-20M, 11N5.2G-40M, 11AC5.2G-20M, 11AC5.2G-40M, 11AC5.2G-80M.				
Note 5: 11A: IEEE 802.11a, 11N: IEEE 802.11n, 11AC: IEEE 802.11ac. 5.2G: 5.15-5.25 GHz band				
Note 6: 20M/40M/80M: Channel Bandwidth 20MHz/40MHz/80MHz				

3.2. Accessories

Power	Brand	Model	P/N	Rating
Adapter 1	NETGEAR	MU30-5120250-A1	332-10234-01	Input:100-240Vac, 50/60Hz, 0.8A Output:12Vdc, 2.5A
Adapter 2	NETGEAR	P030WF120B 11200-6LF	332-10200-02	Input:100-240Vac, 50/60Hz, 1.0A Output:12Vdc, 2.5A
Others				
RJ-45 Cable*1: Shielded, 1.3m				

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	NETGEAR	-	PCB Antenna	I-PEX	1.5	-
2	NETGEAR	-	PCB Antenna	I-PEX	1.3	-
3	NETGEAR	-	PCB Antenna	I-PEX	-	2.5
4	NETGEAR	-	PCB Antenna	I-PEX	-	2.1
5	NETGEAR	-	PCB Antenna	I-PEX	-	3.0

Note: The EUT has five antennas

<For 2.4GHz Band:>

For IEEE 802.11b mode (1TX/2RX)

Only Ant. 2 can be used as transmitting, but Ant. 1 and Ant. 2 could receive simultaneously.

For IEEE 802.11g/n mode (2TX/2RX)


Ant. 1 and Ant. 2 could transmit/receive simultaneously.

<For 5GHz Band:>

For IEEE 802.11a/n/ac mode (3TX/3RX):

Ant. 3, Ant. 4 and Ant. 5 could transmit/receive simultaneously.

According to the above antennas, there are three antennas will transit simultaneously (one is Horizontal and the others are Vertical)

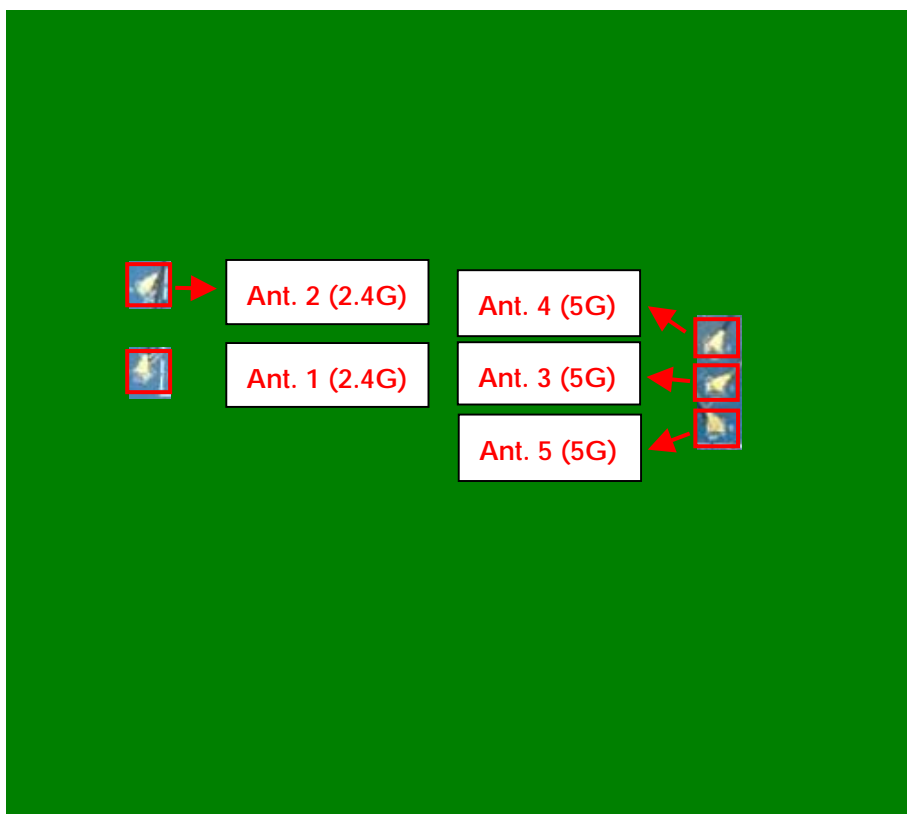

3.4. Table for Carrier Frequencies

For IEEE 802.11a, use Channel 36, 40, 44, 48.

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For both 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		Auto	-	-
Max. Conducted Output Power	11n 20MHz	Band 1	MCS0/ 6.5Mbps	36/40/48	3+4+5
	11n 40MHz	Band 1	MCS0/ 13.5Mbps	38/46	3+4+5
	11ac 20MHz	Band 1	MCS0/ 6.5Mbps	36/40/48	3+4+5
	11ac 40MHz	Band 1	MCS0/ 13.5Mbps	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0/ 29.3Mbps	42	3+4+5
	11a/BPSK	Band 1	6Mbps	36/40/48	3+4+5
Power Spectral Density	11n 20MHz	Band 1	MCS0/ 6.5Mbps	36/40/48	3+4+5
	11n 40MHz	Band 1	MCS0/ 13.5Mbps	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0/ 29.3Mbps	42	3+4+5
	11a/BPSK	Band 1	6Mbps	36/40/48	3+4+5

26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Peak Excursion	11n 20MHz	Band 1	MCS0/ 6.5Mbps	36/40/48	3+4+5
	11n 40MHz	Band 1	MCS0/ 13.5Mbps	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0/ 29.3Mbps	42	3+4+5
	11a/BPSK	Band 1	6Mbps	36/40/48	3+4+5
Radiated Emission Below 1GHz	Normal Link		Auto	-	-
Radiated Emission Above 1GHz	11n 20MHz	Band 1	MCS0/ 6.5Mbps	36/40/48	3+4+5
	11n 40MHz	Band 1	MCS0/ 13.5Mbps	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0/ 29.3Mbps	42	3+4+5
	11a/BPSK	Band 1	6Mbps	36/40/48	3+4+5
Band Edge Emission	11n 20MHz	Band 1	MCS0/ 6.5Mbps	36/40/48	3+4+5
	11n 40MHz	Band 1	MCS0/ 13.5Mbps	38/46	3+4+5
	11ac 20MHz	Band 1	MCS0/ 6.5Mbps	36/40/48	3+4+5
	11ac 40MHz	Band 1	MCS0/ 13.5Mbps	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0/ 29.3Mbps	42	3+4+5
	11a/BPSK	Band 1	6Mbps	36/40/48	3+4+5
Frequency Stability	Un-modulation		-	40	N/A

Beamforming mode is worse case than non-beamforming mode so that it is representative and recorded in the test report.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT + Power Adapter 1

Mode 2. EUT + Power Adapter 2

Due to Mode 1 generated the worst test result, so it was recorded in this report.

For Radiated Emission test:

Mode 1. EUT + Power Adapter 1

Mode 2. EUT + Power Adapter 2

Due to Mode 2 generated the worst test result, it was recorded in this report.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	QDS-BRCM1049LE
Mouse	Logitech M90	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A
Flash Disk	ADATA	C103	DoC
Notebook	DELL	E6220	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Test Software Version	Manual Tool Version:1.0.0.10		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0 20MHz	40	40	36

Power Parameters of IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Test Software Version	Manual Tool Version:1.0.0.10	
Frequency	5190 MHz	5230 MHz
MCS0 40MHz	43	43

Power Parameters of IEEE 802.11ac MCS0 VHT 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Test Software Version	Manual Tool Version:1.0.0.10		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0 VHT 20MHz	40	38	37

Power Parameters of IEEE 802.11ac MCS0 VHT 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Test Software Version	Manual Tool Version:1.0.0.10	
Frequency	5190 MHz	5230 MHz
MCS0 VHT 40MHz	43	43

Power Parameters of IEEE 802.11ac MCS0 VHT 80MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Test Software Version	Manual Tool Version:1.0.0.10	
Frequency	5210 MHz	
MCS0 VHT 80MHz	40	

Power Parameters of IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 (3TX)


Test Software Version	Manual Tool Version:1.0.0.10		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	34	32	36

During the test, "Manual Tool Version:1.0.0.10" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

3.9. Test Configurations


3.9.1. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz / Test Mode: Mode 2.

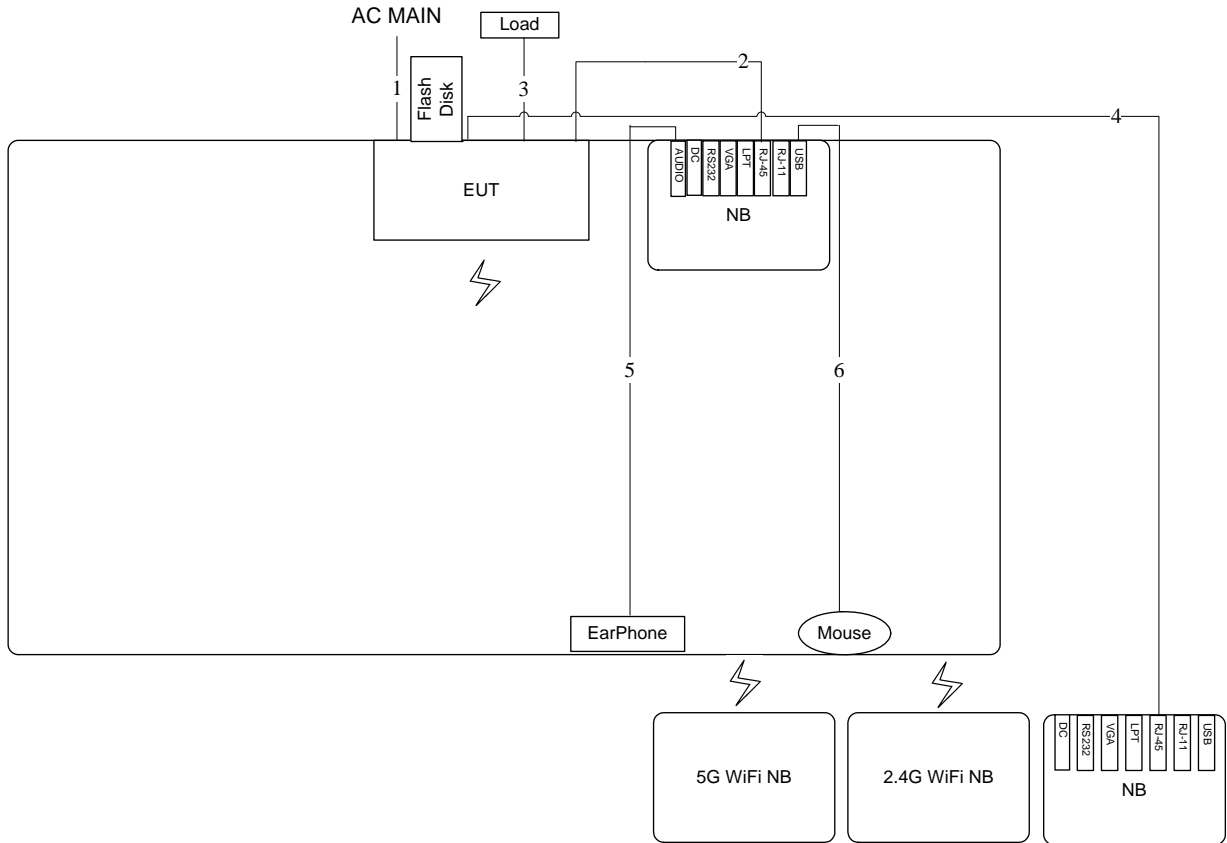

Item	Connection	Shield	Length
1	Power cable	No	1.8m
2	RJ-45 cable	Yes	1.5m
3	RJ-45 cable*3	No	1.5m
4	RJ-45 cable	No	10m
5	Audio cable	No	1.1m
6	USB cable	No	1.8m


Test Configuration: above 1GHz / Test Mode: Mode 2.

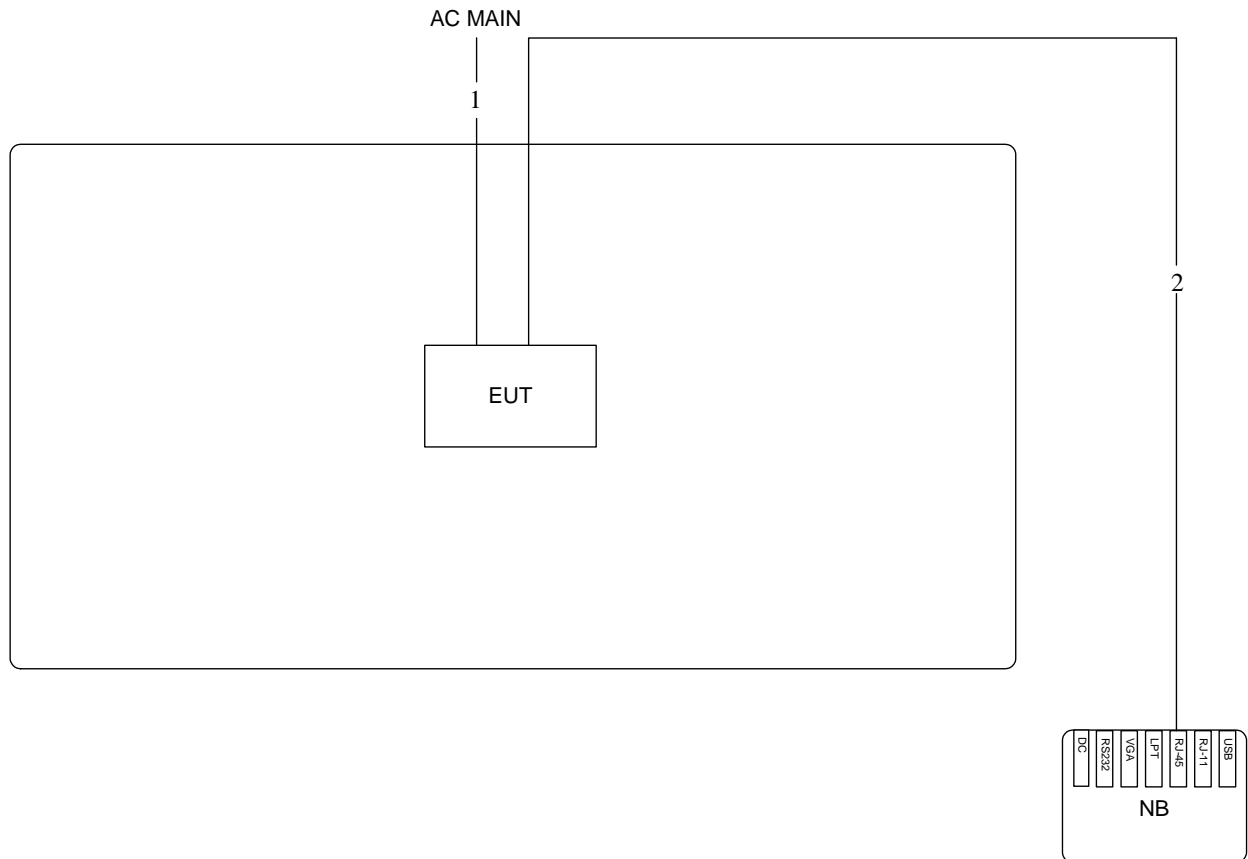

Item	Connection	Shield	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

3.9.2. AC Power Line Conduction Emissions Test Configuration

Test Mode: Mode 1.

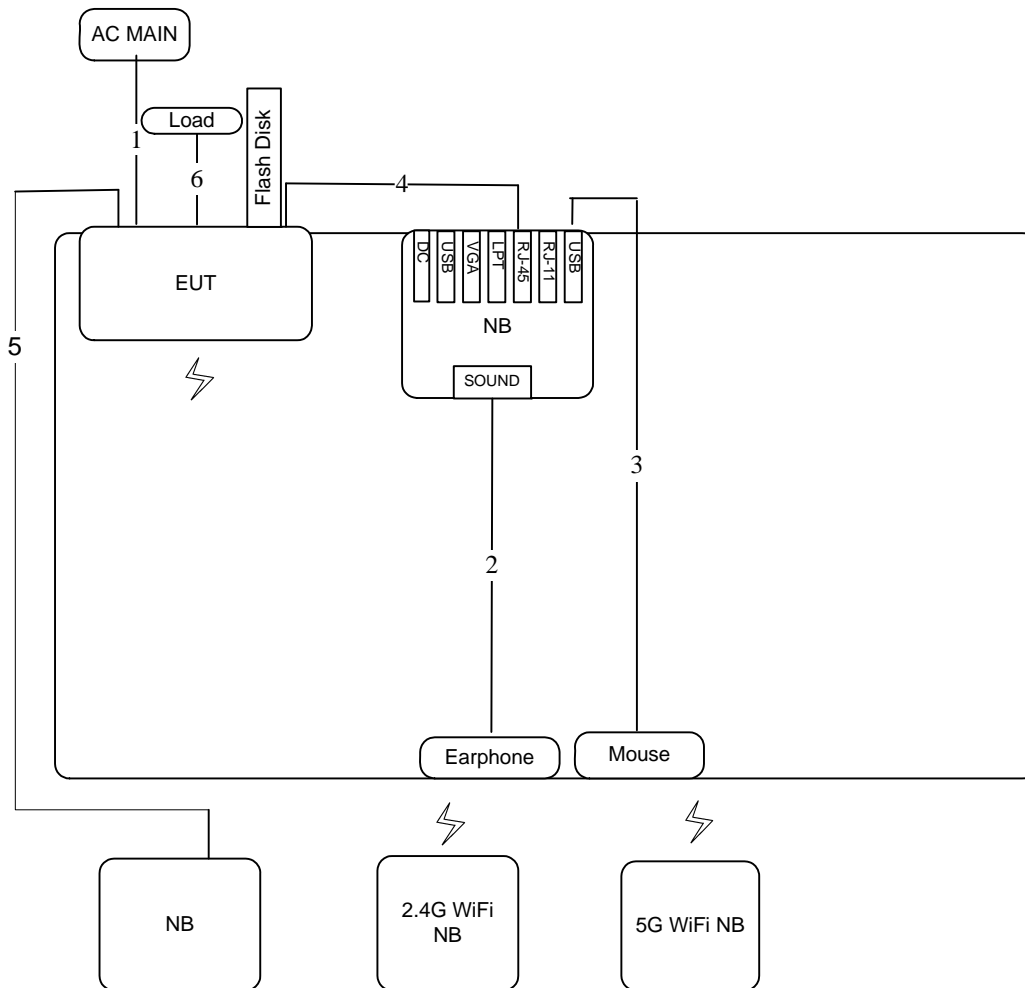

Item	Connection	Shield	Length
1	Power cable	No	1.8m
2	Audio cable	No	1.1m
3	USB cable	No	1.8m
4	RJ-45	Yes	1.5m
5	RJ-45	No	10m
6	RJ-45*3	No	1.5m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

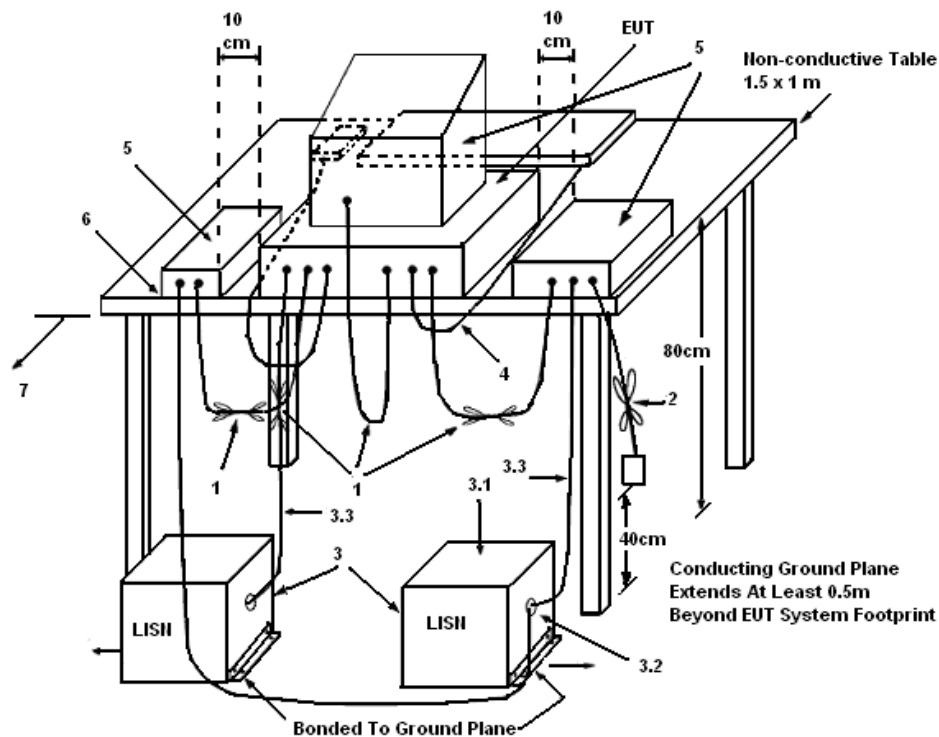

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	52.4%
Test Engineer	Yeh Hsieh	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1. EUT + Power Adapter 1

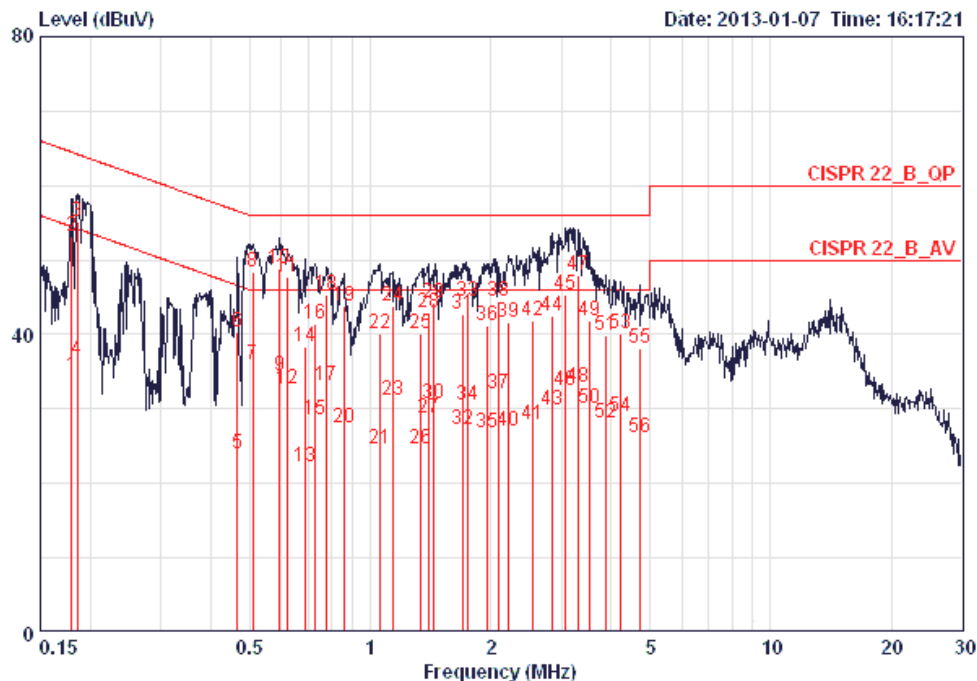


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.17961	34.35	-20.15	54.50	34.01	0.15	0.19	AVERAGE
2	0.17961	53.27	-11.23	64.50	52.93	0.15	0.19	QP
3	0.18541	55.23	-9.01	64.24	54.89	0.15	0.19	QP
4	0.18541	36.71	-17.53	54.24	36.37	0.15	0.19	AVERAGE
5	0.46614	24.08	-22.50	46.58	23.73	0.15	0.20	AVERAGE
6	0.46614	40.34	-16.24	56.58	39.99	0.15	0.20	QP
7	0.51007	35.97	-10.03	46.00	35.62	0.15	0.20	AVERAGE
8	0.51007	48.39	-7.61	56.00	48.04	0.15	0.20	QP
9	0.59478	34.40	-11.60	46.00	34.04	0.16	0.20	AVERAGE
10	0.59478	48.73	-7.27	56.00	48.37	0.16	0.20	QP
11	0.62054	47.70	-8.30	56.00	47.34	0.16	0.20	QP
12	0.62054	32.68	-13.32	46.00	32.32	0.16	0.20	AVERAGE
13	0.68626	22.30	-23.70	46.00	21.94	0.16	0.20	AVERAGE
14	0.68626	38.29	-17.71	56.00	37.93	0.16	0.20	QP
15	0.72744	28.55	-17.45	46.00	28.19	0.16	0.20	AVERAGE
16	0.72744	41.41	-14.59	56.00	41.05	0.16	0.20	QP
17	0.77931	33.19	-12.81	46.00	32.83	0.16	0.20	AVERAGE
18	0.77931	45.34	-10.66	56.00	44.98	0.16	0.20	QP
19	0.85730	43.86	-12.15	56.00	43.49	0.17	0.20	QP
20	0.85730	27.57	-18.44	46.00	27.20	0.17	0.20	AVERAGE
21	1.054	24.65	-21.35	46.00	24.28	0.17	0.20	AVERAGE
22	1.054	40.06	-15.94	56.00	39.69	0.17	0.20	QP
23	1.135	31.10	-14.90	46.00	30.72	0.17	0.21	AVERAGE
24	1.135	43.75	-12.25	56.00	43.37	0.17	0.21	QP
25	1.331	40.12	-15.88	56.00	39.73	0.18	0.21	QP



	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
26	0.86643	43.62	-12.38	56.00	43.33	0.09	0.20	QP
27	1.037	32.64	-13.36	46.00	32.35	0.09	0.20	AVERAGE
28	1.037	45.76	-10.24	56.00	45.47	0.09	0.20	QP
29	1.117	44.99	-11.01	56.00	44.69	0.09	0.20	QP
30	1.117	31.08	-14.92	46.00	30.78	0.09	0.20	AVERAGE
31	1.197	24.61	-21.39	46.00	24.31	0.09	0.21	AVERAGE
32	1.197	41.22	-14.78	56.00	40.92	0.09	0.21	QP
33	1.345	44.83	-11.17	56.00	44.52	0.10	0.21	QP
34	1.345	31.95	-14.05	46.00	31.64	0.10	0.21	AVERAGE
35	1.464	44.38	-11.62	56.00	44.06	0.10	0.22	QP
36	1.464	29.37	-16.63	46.00	29.05	0.10	0.22	AVERAGE
37	1.636	45.16	-10.84	56.00	44.84	0.10	0.22	QP
38	1.636	30.90	-15.10	46.00	30.58	0.10	0.22	AVERAGE
39	1.781	30.02	-15.98	46.00	29.69	0.11	0.23	AVERAGE
40	1.781	43.92	-12.08	56.00	43.59	0.11	0.23	QP
41	1.970	31.69	-14.31	46.00	31.35	0.11	0.23	AVERAGE
42	1.970	45.47	-10.53	56.00	45.13	0.11	0.23	QP
43	2.309	46.09	-9.91	56.00	45.74	0.11	0.24	QP
44	2.309	33.39	-12.61	46.00	33.04	0.11	0.24	AVERAGE
45	2.500	45.18	-10.82	56.00	44.82	0.12	0.24	QP
46	2.500	31.50	-14.50	46.00	31.14	0.12	0.24	AVERAGE
47	2.900	33.30	-12.70	46.00	32.93	0.12	0.25	AVERAGE
48	2.900	46.77	-9.23	56.00	46.40	0.12	0.25	QP
49	3.258	48.31	-7.69	56.00	47.92	0.12	0.26	QP
50	3.258	32.95	-13.05	46.00	32.56	0.12	0.26	AVERAGE
51	4.269	31.85	-14.15	46.00	31.41	0.13	0.31	AVERAGE
52	4.269	42.88	-13.12	56.00	42.44	0.13	0.31	QP
53	4.874	29.69	-16.31	46.00	29.23	0.15	0.32	AVERAGE
54	4.874	39.74	-16.26	56.00	39.28	0.15	0.32	QP

Temperature	22°C	Humidity	52.4%
Test Engineer	Yeh Hsieh	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1. EUT + Power Adapter 1

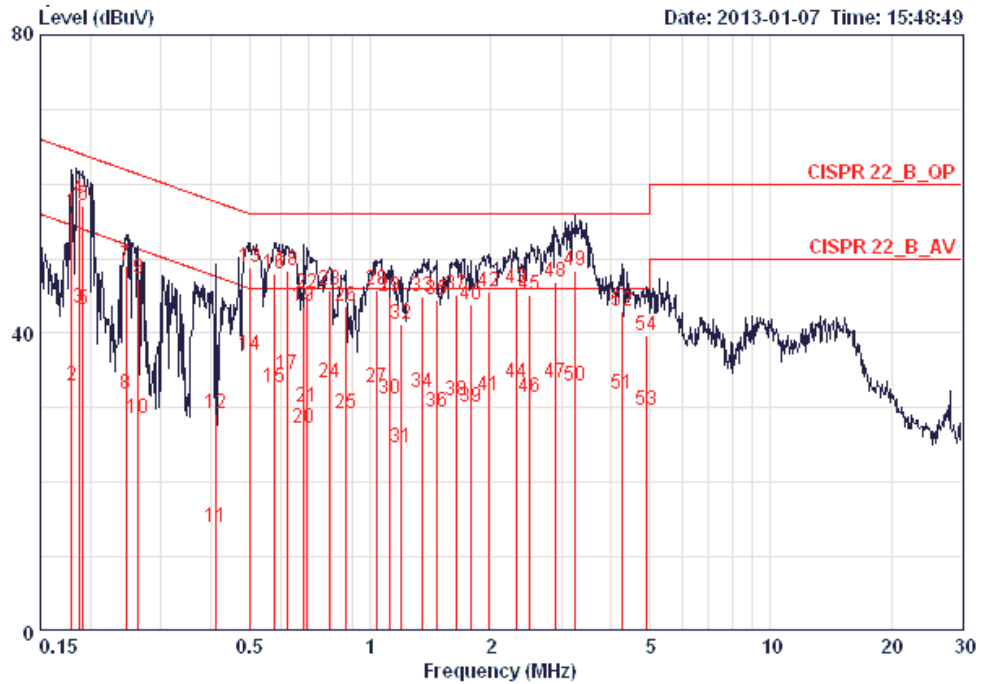

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17961	56.15	-8.35	64.50	55.88	0.08	0.19	QP
2	0.17961	32.88	-21.62	54.50	32.61	0.08	0.19	AVERAGE
3	0.18739	43.45	-10.71	54.15	43.17	0.08	0.20	AVERAGE
4	0.18739	58.04	-6.12	64.15	57.76	0.08	0.20	QP
5	0.19140	43.06	-10.92	53.98	42.78	0.08	0.20	AVERAGE
6	0.19140	57.19	-6.79	63.98	56.91	0.08	0.20	QP
7	0.24552	49.07	-12.84	61.91	48.79	0.08	0.20	QP
8	0.24552	31.75	-20.16	51.91	31.47	0.08	0.20	AVERAGE
9	0.26303	47.24	-14.10	61.34	46.96	0.08	0.20	QP
10	0.26303	28.63	-22.71	51.34	28.35	0.08	0.20	AVERAGE
11	0.41266	13.87	-33.72	47.59	13.59	0.08	0.20	AVERAGE
12	0.41266	29.28	-28.31	57.59	29.00	0.08	0.20	QP
13	0.49937	48.92	-7.09	56.01	48.64	0.08	0.20	QP
14	0.49937	37.08	-8.93	46.01	36.80	0.08	0.20	AVERAGE
15	0.57617	32.71	-13.29	46.00	32.43	0.08	0.20	AVERAGE
16	0.57617	47.94	-8.06	56.00	47.66	0.08	0.20	QP
17	0.62054	34.41	-11.59	46.00	34.13	0.08	0.20	AVERAGE
18	0.62054	48.33	-7.67	56.00	48.05	0.08	0.20	QP
19	0.68263	43.53	-12.47	56.00	43.25	0.08	0.20	QP
20	0.68263	27.35	-18.65	46.00	27.07	0.08	0.20	AVERAGE
21	0.69725	30.04	-15.97	46.00	29.75	0.09	0.20	AVERAGE
22	0.69725	45.40	-10.61	56.00	45.11	0.09	0.20	QP
23	0.79180	45.69	-10.31	56.00	45.40	0.09	0.20	QP
24	0.79180	33.28	-12.72	46.00	32.99	0.09	0.20	AVERAGE
25	0.86643	29.28	-16.72	46.00	28.99	0.09	0.20	AVERAGE



	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
26	1.331	24.54	-21.46	46.00	24.15	0.18	0.21	AVERAGE
27	1.396	28.72	-17.28	46.00	28.33	0.18	0.21	AVERAGE
28	1.396	42.98	-13.02	56.00	42.59	0.18	0.21	QP
29	1.441	44.17	-11.83	56.00	43.78	0.18	0.22	QP
30	1.441	30.81	-15.19	46.00	30.42	0.18	0.22	AVERAGE
31	1.707	42.66	-13.34	56.00	42.25	0.18	0.22	QP
32	1.707	27.16	-18.84	46.00	26.75	0.18	0.22	AVERAGE
33	1.753	44.41	-11.59	56.00	44.00	0.19	0.22	QP
34	1.753	30.48	-15.52	46.00	30.07	0.19	0.22	AVERAGE
35	1.959	26.84	-19.16	46.00	26.42	0.19	0.23	AVERAGE
36	1.959	41.26	-14.74	56.00	40.84	0.19	0.23	QP
37	2.088	32.01	-13.99	46.00	31.59	0.19	0.23	AVERAGE
38	2.088	44.41	-11.59	56.00	43.99	0.19	0.23	QP
39	2.213	41.60	-14.40	56.00	41.17	0.19	0.24	QP
40	2.213	26.99	-19.01	46.00	26.56	0.19	0.24	AVERAGE
41	2.554	27.84	-18.16	46.00	27.40	0.20	0.24	AVERAGE
42	2.554	41.93	-14.07	56.00	41.49	0.20	0.24	QP
43	2.854	29.89	-16.11	46.00	29.44	0.20	0.25	AVERAGE
44	2.854	42.43	-13.57	56.00	41.98	0.20	0.25	QP
45	3.074	45.29	-10.71	56.00	44.83	0.21	0.25	QP
46	3.074	32.37	-13.63	46.00	31.91	0.21	0.25	AVERAGE
47	3.293	47.98	-8.02	56.00	47.50	0.21	0.27	QP
48	3.293	32.95	-13.05	46.00	32.47	0.21	0.27	AVERAGE
49	3.528	41.90	-14.10	56.00	41.41	0.21	0.28	QP
50	3.528	30.03	-15.97	46.00	29.54	0.21	0.28	AVERAGE
51	3.860	39.86	-16.14	56.00	39.35	0.22	0.29	QP
52	3.860	28.15	-17.85	46.00	27.64	0.22	0.29	AVERAGE
53	4.202	40.19	-15.81	56.00	39.66	0.22	0.30	QP
54	4.202	28.90	-17.10	46.00	28.37	0.22	0.30	AVERAGE
55	4.696	38.12	-17.88	56.00	37.57	0.23	0.31	QP
56	4.696	26.17	-19.83	46.00	25.62	0.23	0.31	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. 26dB Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	Approximately 1% of the emission bandwidth
VB	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer.
3. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

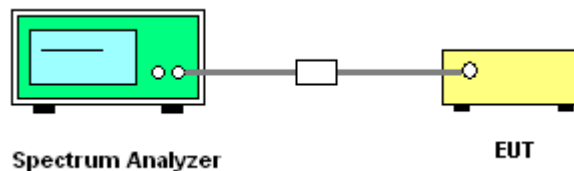

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n/ac

Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.32	17.76
40	5200 MHz	20.00	17.76
48	5240 MHz	20.32	17.76

Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.04	36.48
46	5230 MHz	39.04	36.48

Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.00	17.76
40	5200 MHz	20.32	17.76
48	5240 MHz	20.16	17.92

Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.04	36.80
46	5230 MHz	39.04	36.48

Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	80.00	76.80

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 (3TX)


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.16	17.12
40	5200 MHz	20.16	17.12
48	5240 MHz	20.32	17.28

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5180 MHz

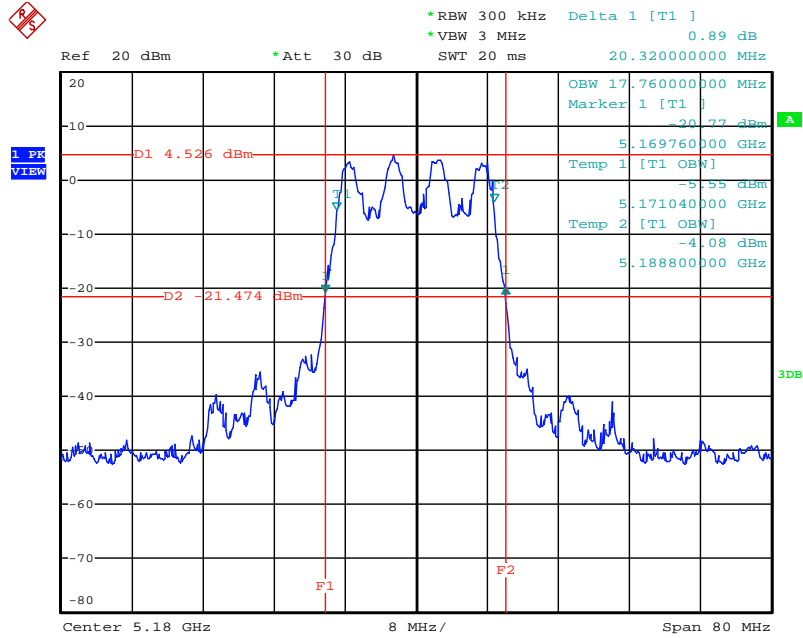


Date: 19.FEB.2013 13:16:32

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5200 MHz

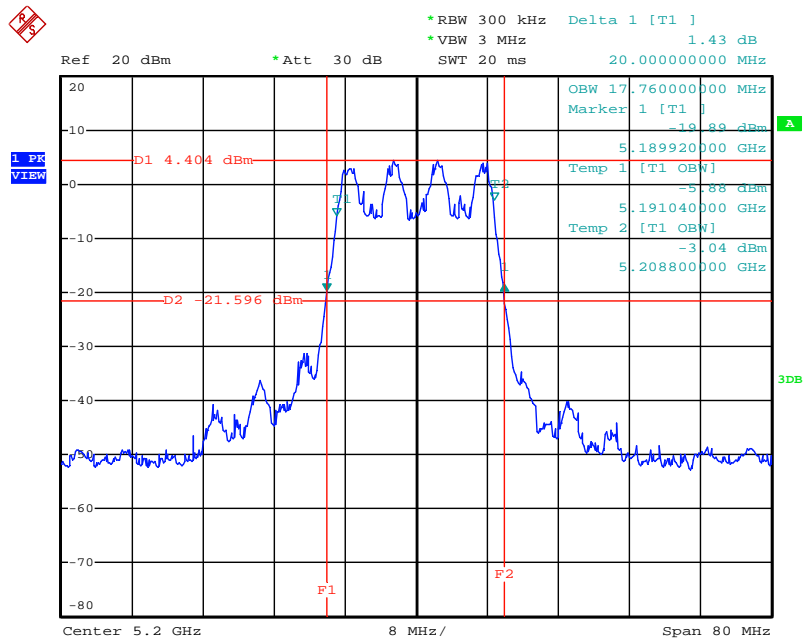


Date: 19.FEB.2013 13:16:10

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5240 MHz

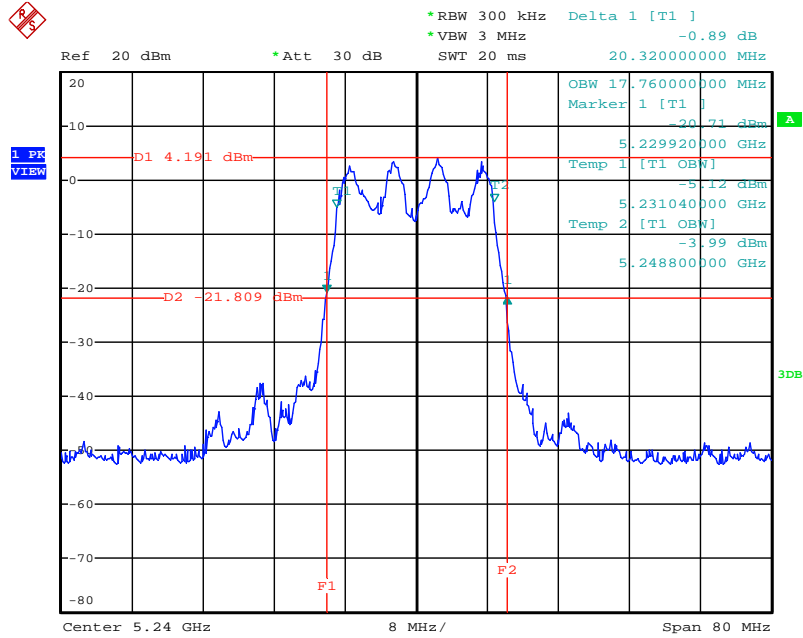


Date: 19.FEB.2013 13:15:40

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5190 MHz

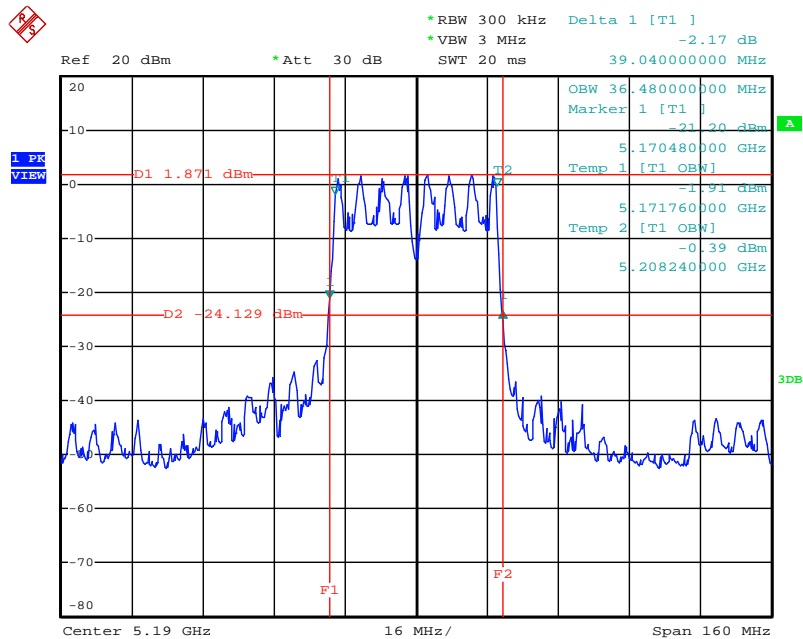


Date: 19.FEB.2013 13:17:22

26 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5230 MHz

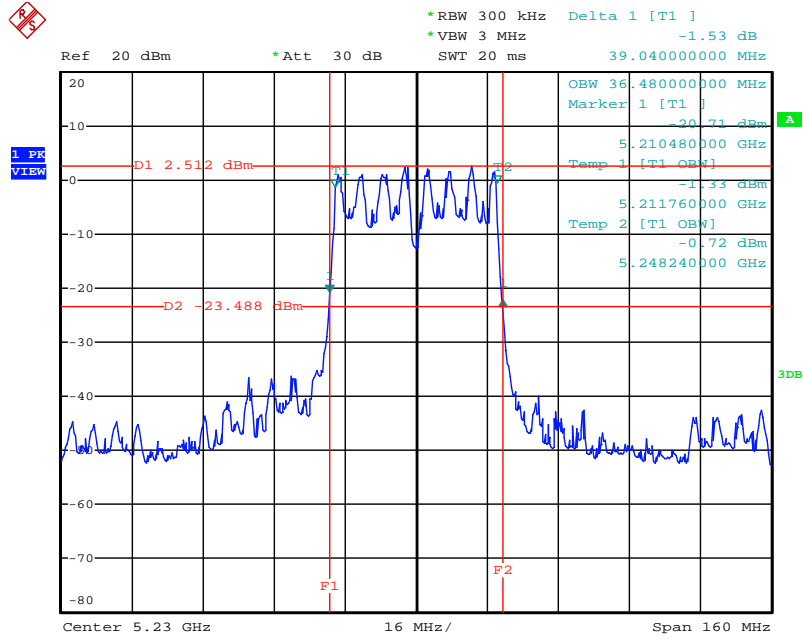


Date: 19.FEB.2013 13:17:46

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5180 MHz

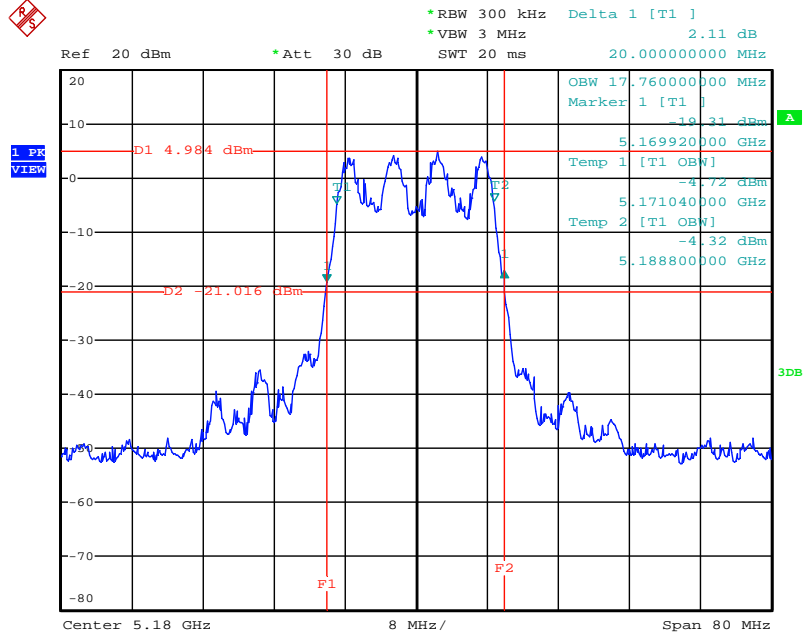


Date: 19.FEB.2013 13:14:02

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5200 MHz

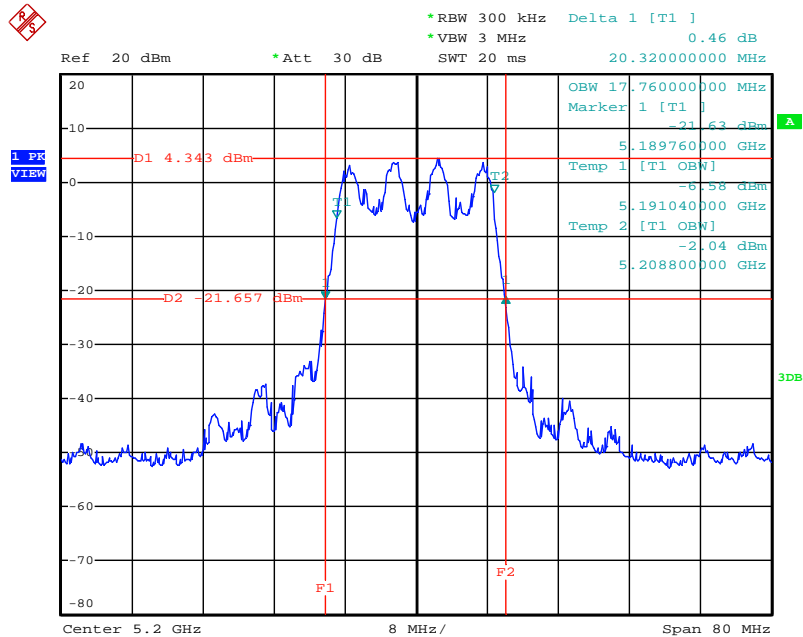


Date: 19.FEB.2013 13:14:36

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5240 MHz

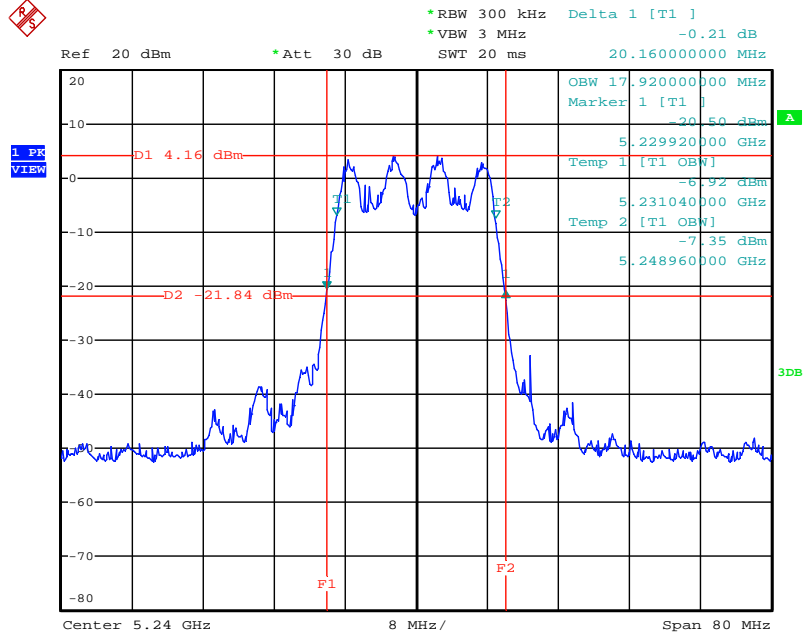


Date: 19.FEB.2013 13:15:02

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5190 MHz

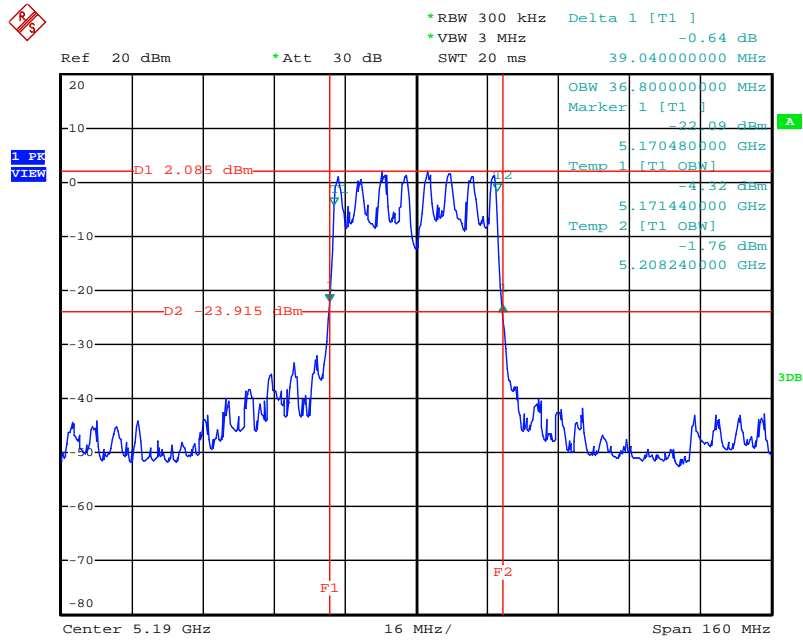


Date: 19.FEB.2013 13:12:52

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5230 MHz

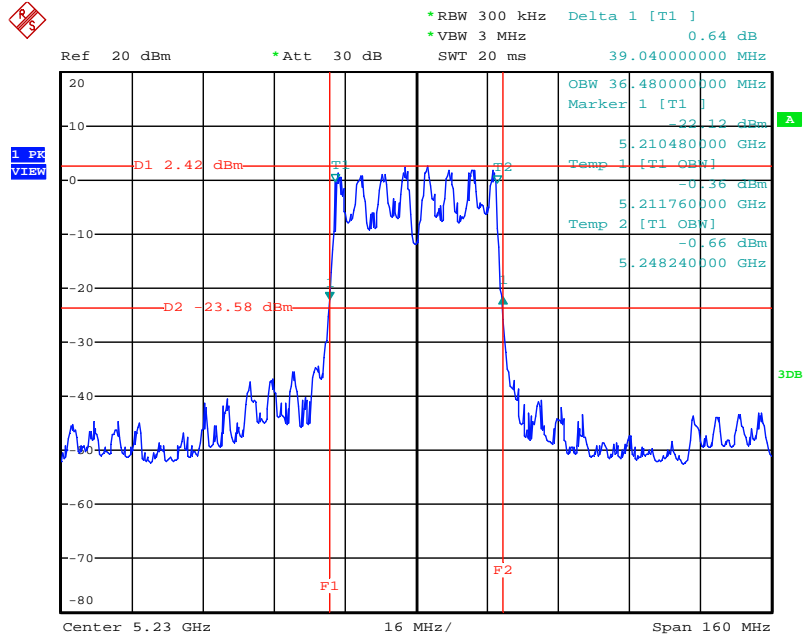


Date: 19.FEB.2013 13:13:27

26 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5210 MHz

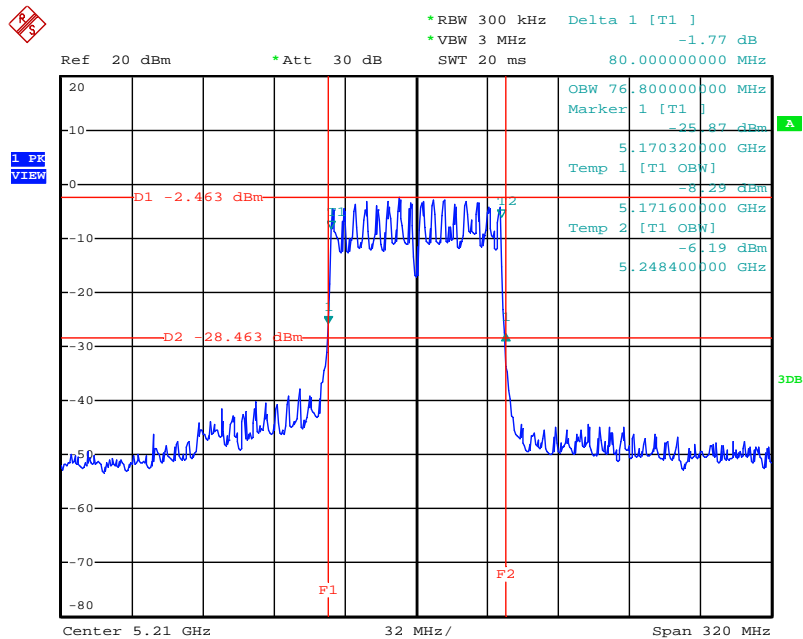


Date: 19.FEB.2013 13:11:38

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5180 MHz

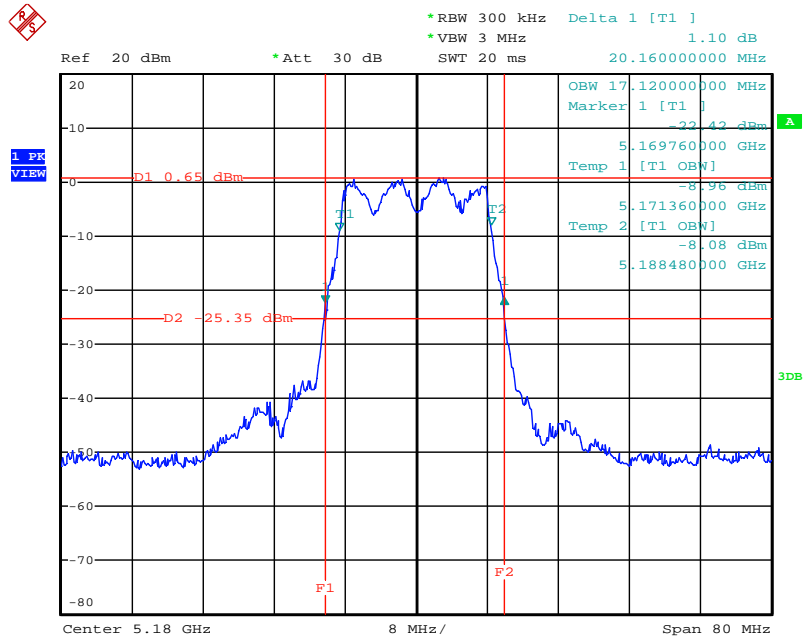


Date: 19.FEB.2013 13:18:26

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5200 MHz

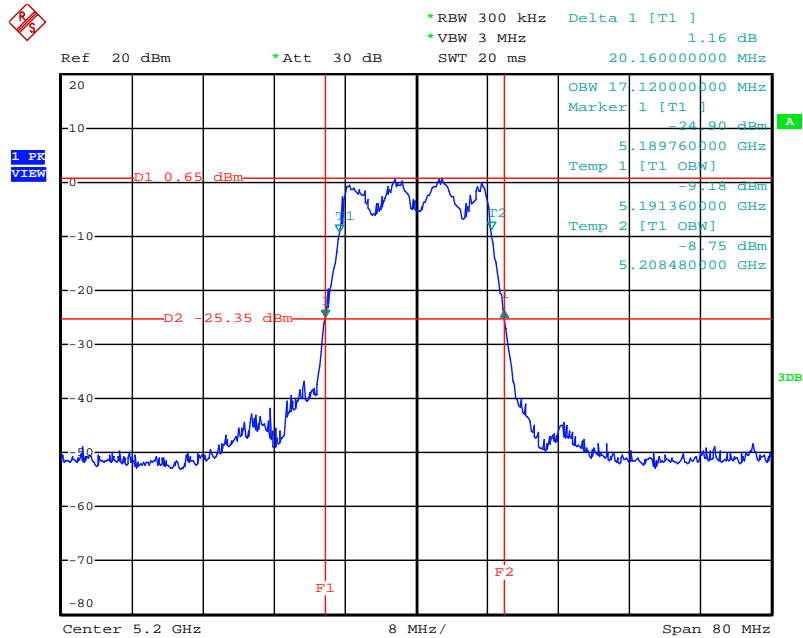

Date: 19.FEB.2013 13:18:52

26 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5240 MHz

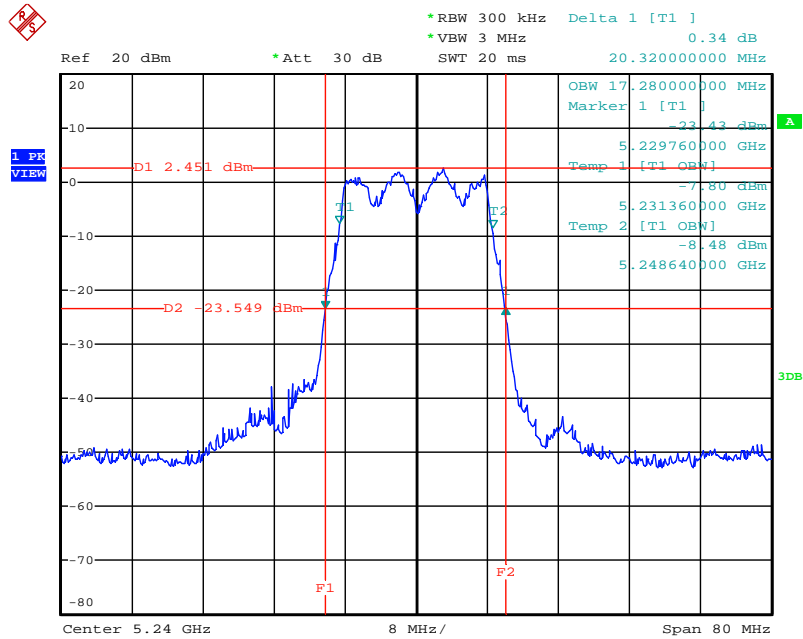

Date: 19.FEB.2013 13:19:20

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


The following table is the setting of the peak power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power =>(4) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n/ac
Test Date	Feb. 19, 2013		

Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Conducted Power (dBm)			Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant. 5			
36	5180 MHz	11.51	11.06	10.98	15.96	17.00	Complies
40	5200 MHz	11.52	11.02	10.76	15.88	17.00	Complies
48	5240 MHz	10.45	9.95	9.54	14.77	17.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Conducted Power (dBm)			Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant. 5			
38	5190 MHz	12.42	11.96	11.85	16.85	17.00	Complies
46	5230 MHz	12.59	11.91	11.86	16.90	17.00	Complies

Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Conducted Power (dBm)			Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant. 5			
36	5180 MHz	11.54	11.12	10.98	15.99	17.00	Complies
40	5200 MHz	11.02	10.62	10.29	15.42	17.00	Complies
48	5240 MHz	10.68	10.23	10.09	15.11	17.00	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 5.56\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Conducted Power (dBm)			Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant. 5			
38	5190 MHz	12.53	11.91	11.78	16.86	17.00	Complies
46	5230 MHz	12.45	11.92	11.89	16.87	17.00	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 5.56\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Conducted Power (dBm)			Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant. 5			
42	5210 MHz	11.02	10.56	10.21	15.38	17.00	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 5.56\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a
Test Date	Feb. 19, 2013		

Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Conducted Power (dBm)			Total Conducted Power (dBm)	Max. Limit (dBm)	Result
		Ant. 3	Ant. 4	Ant. 5			
36	5180 MHz	9.88	9.56	9.19	14.32	17.00	Complies
40	5200 MHz	9.21	9.04	8.62	13.73	17.00	Complies
48	5240 MHz	10.48	10.09	9.72	14.88	17.00	Complies

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15–5.25 GHz	4

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance with KDB 662911 in-Band Power Spectral Density (PSD) Measurements (1) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

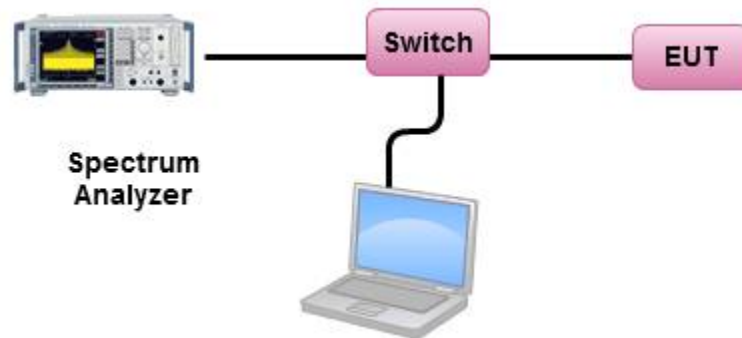

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n/ac

Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	2.53	4.00	Complies
40	5200 MHz	2.60	4.00	Complies
48	5240 MHz	1.75	4.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	0.48	4.00	Complies
46	5230 MHz	0.75	4.00	Complies

Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-3.78	4.00	Complies

Note: Directional gain=GANT+10log(NANT/Nss) =5.56dBi <6dBi, so the limit doesn't reduce.

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a


Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.30	4.00	Complies
40	5200 MHz	0.81	4.00	Complies
48	5240 MHz	1.98	4.00	Complies


Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
/ 5200 MHz

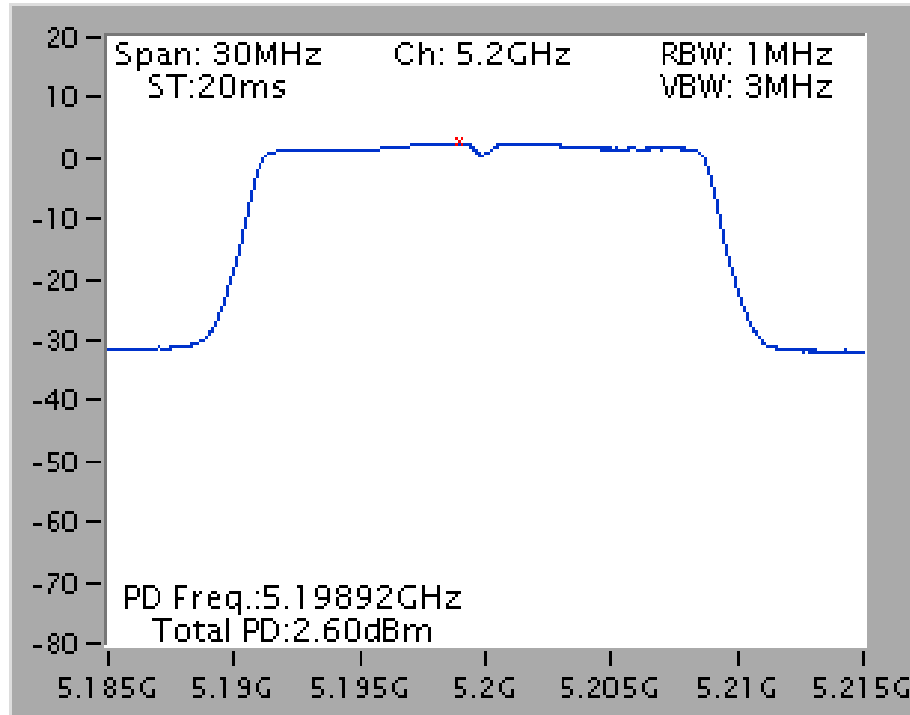


Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
/ 5230 MHz

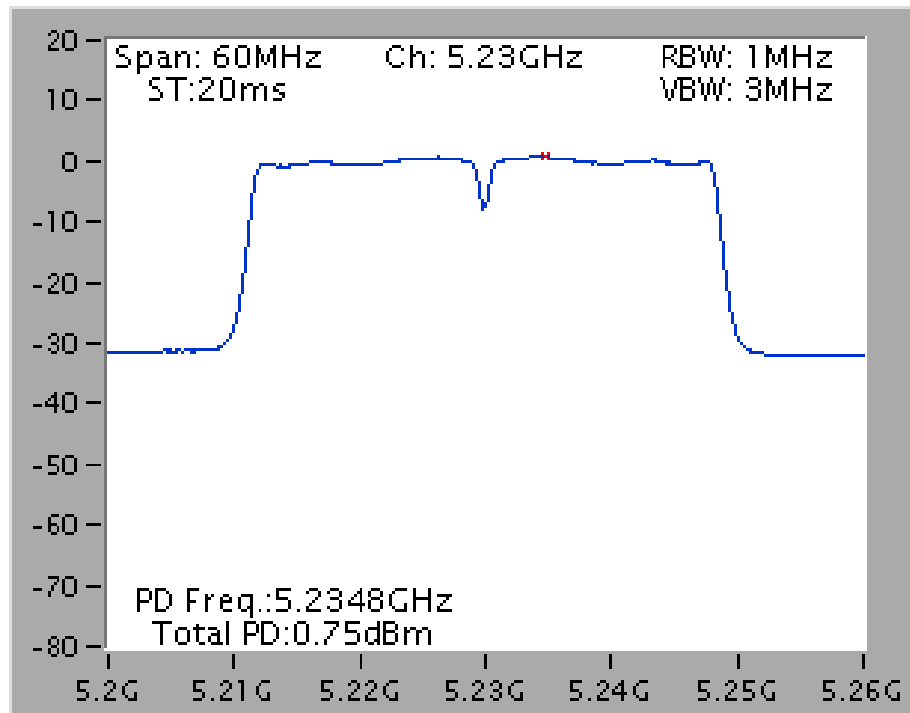

Power Density Plot on Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
/ 5210 MHz

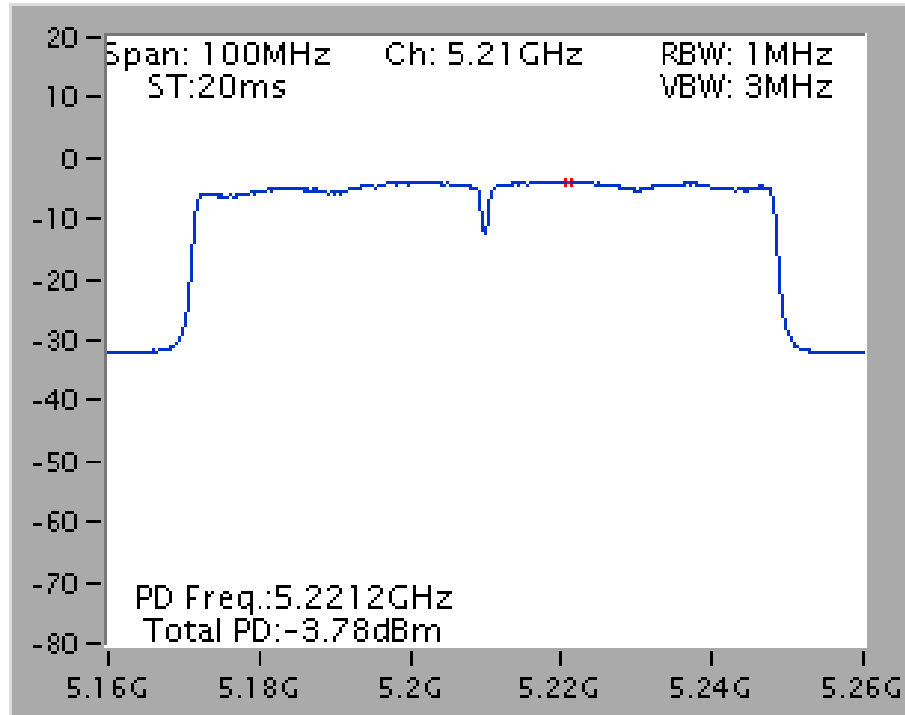

Power Density Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5240 MHz

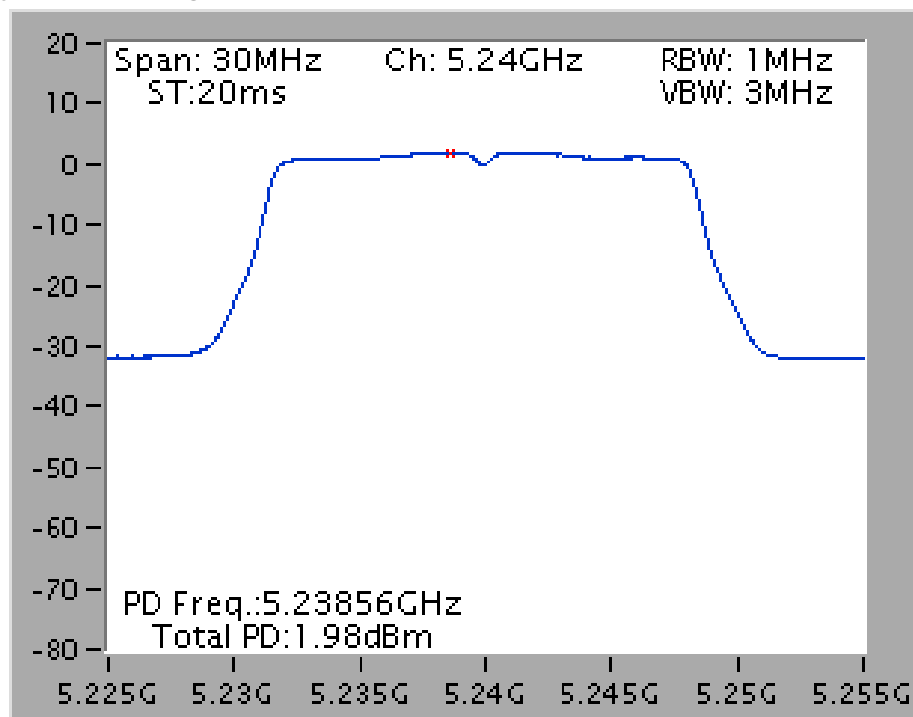

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz (Peak Trace) / 1MHz (Average Trace)
VB	3MHz (Peak Trace) / 3MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Peak : Trace :Max hold/Average: Trace Average Sweep Count 100
Sweep Time	AUTO

4.5.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW =1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	9.80	13	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
46	5230 MHz	8.73	13	Complies

Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
42	5210 MHz	8.78	13	Complies

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 (3TX)


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
48	5240 MHz	8.91	13	Complies

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
/ 5180 MHz

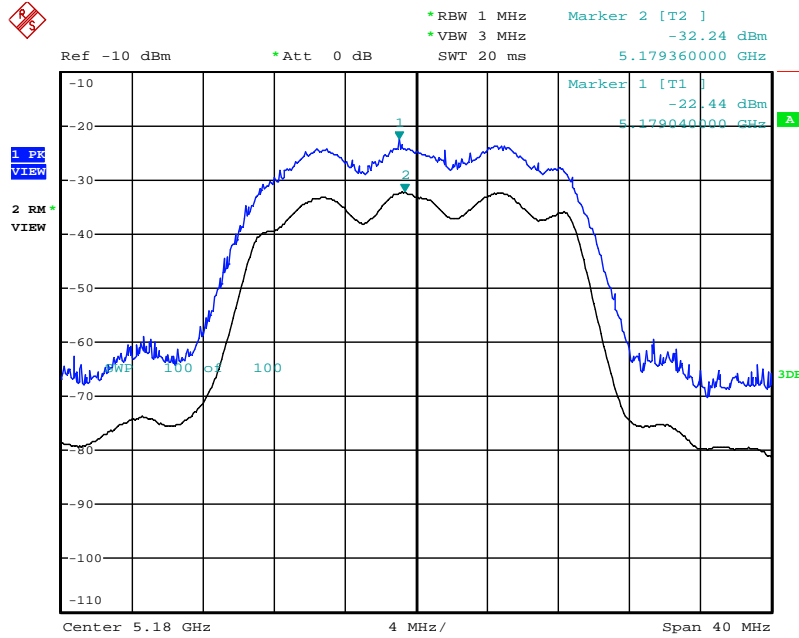


Date: 19.FEB.2013 13:56:19

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
/ 5230 MHz

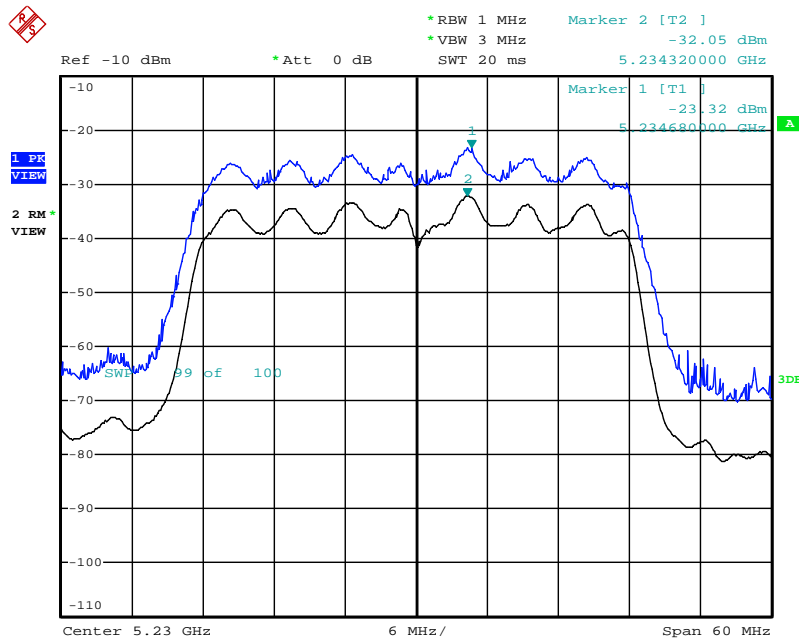


Date: 19.FEB.2013 13:57:06

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5210 MHz

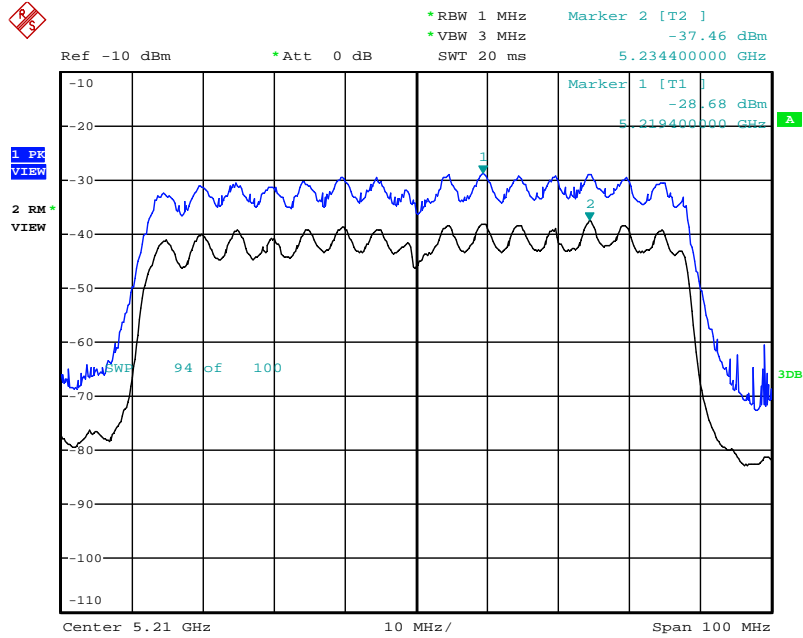

Date: 19.FEB.2013 13:58:00

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 3 + Ant. 4 + Ant. 5 (3TX) / 5240 MHz

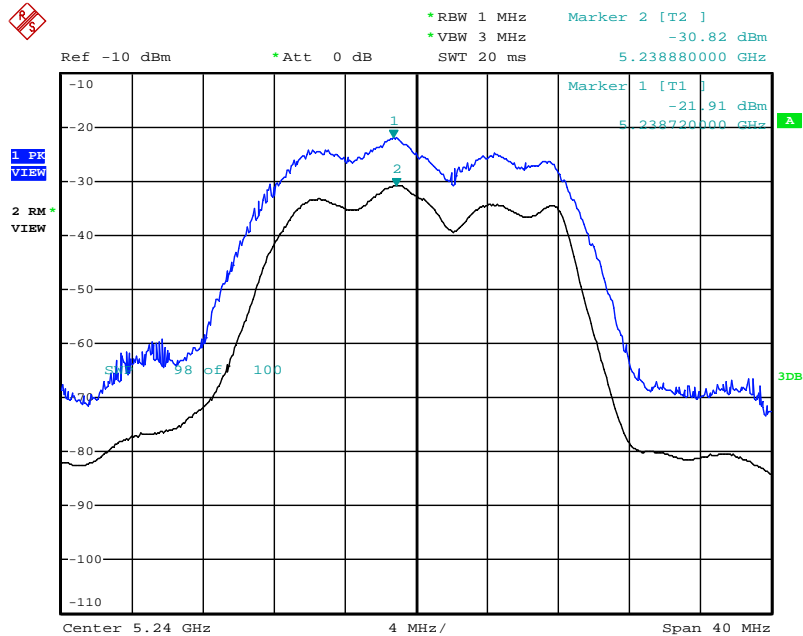

Date: 19.FEB.2013 13:55:19

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an -27dBm peak limit or average and peak limits of 15.209. For transmitters operating in the In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 1GHz

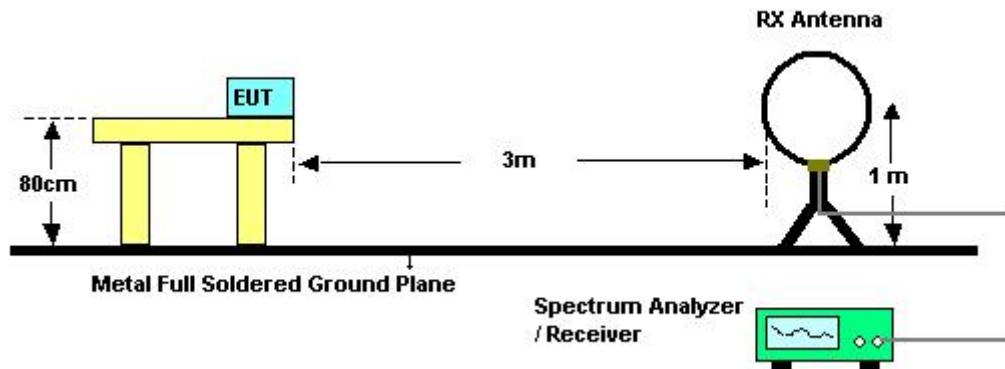

For radiated emissions above 1GHz

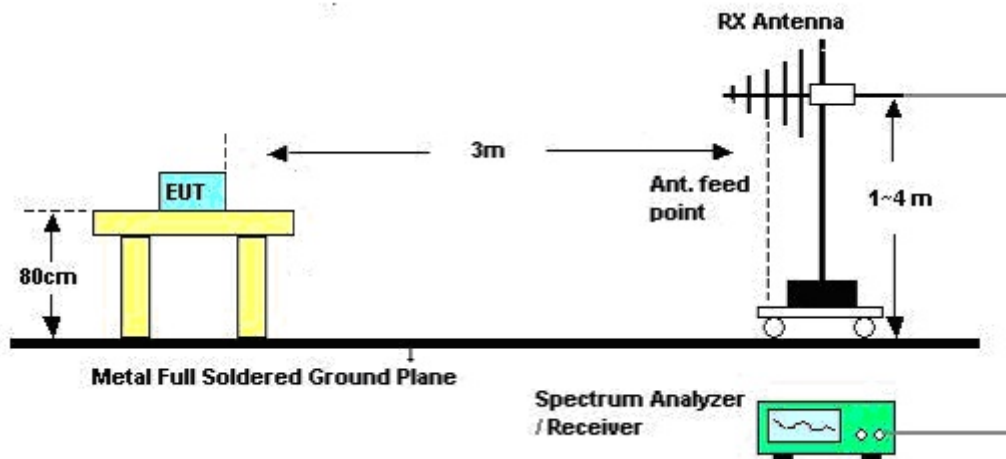

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	21°C	Humidity	56.4%
Test Engineer	Kenneth Huang	Configurations	Normal Link
Test Date	Jan. 23, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	21°C	Humidity	56.4%
Test Engineer	Kenneth Huang	Configurations	Normal Link
Test Mode	Mode 2. EUT + Power Adapter 2		

Horizontal

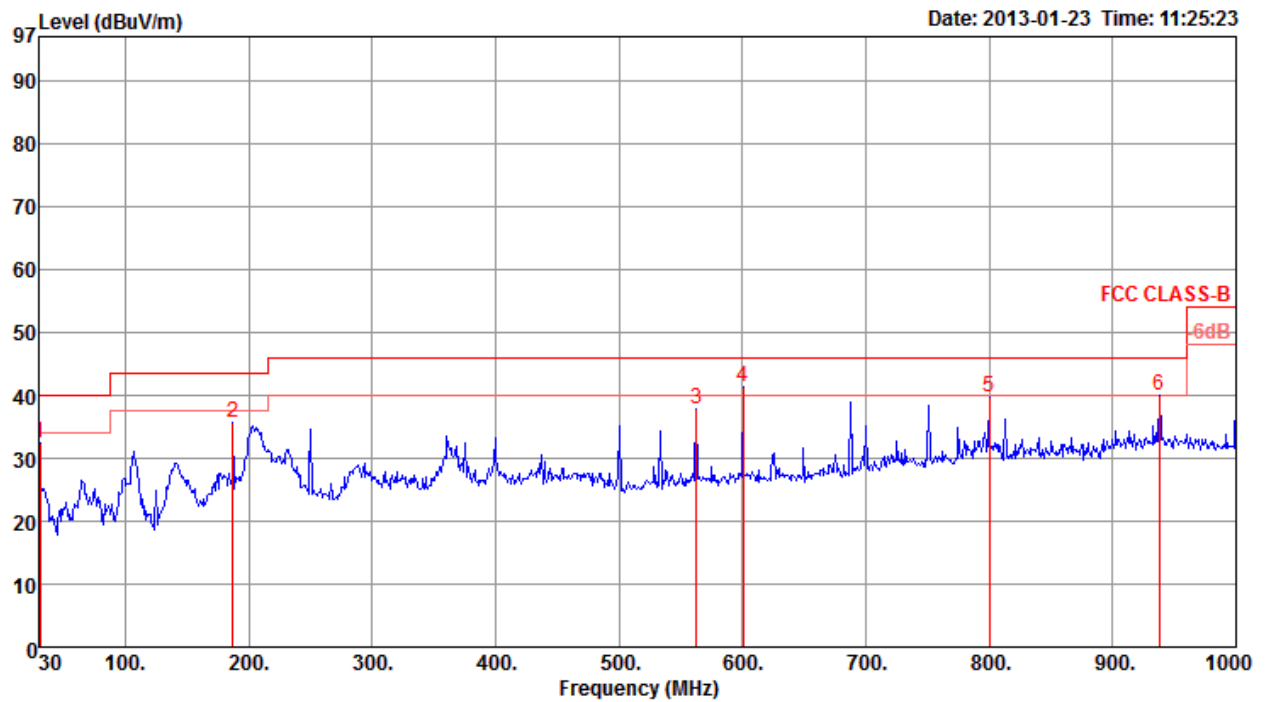

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	30.97	32.47	40.00	-7.53	40.30	0.85	27.98	19.30	Peak	0	400	HORIZONTAL
2	187.14	35.68	43.50	-7.82	51.14	2.04	27.33	9.83	Peak	0	400	HORIZONTAL
3	562.53	37.72	46.00	-8.28	43.02	3.59	27.81	18.92	Peak	0	400	HORIZONTAL
4 p	600.36	41.40	46.00	-4.60	45.97	3.73	27.60	19.30	Peak	0	400	HORIZONTAL
5	800.18	39.76	46.00	-6.24	41.49	4.36	26.89	20.80	Peak	0	400	HORIZONTAL
6	937.92	39.86	46.00	-6.14	39.85	4.79	26.59	21.81	Peak	0	400	HORIZONTAL

Vertical

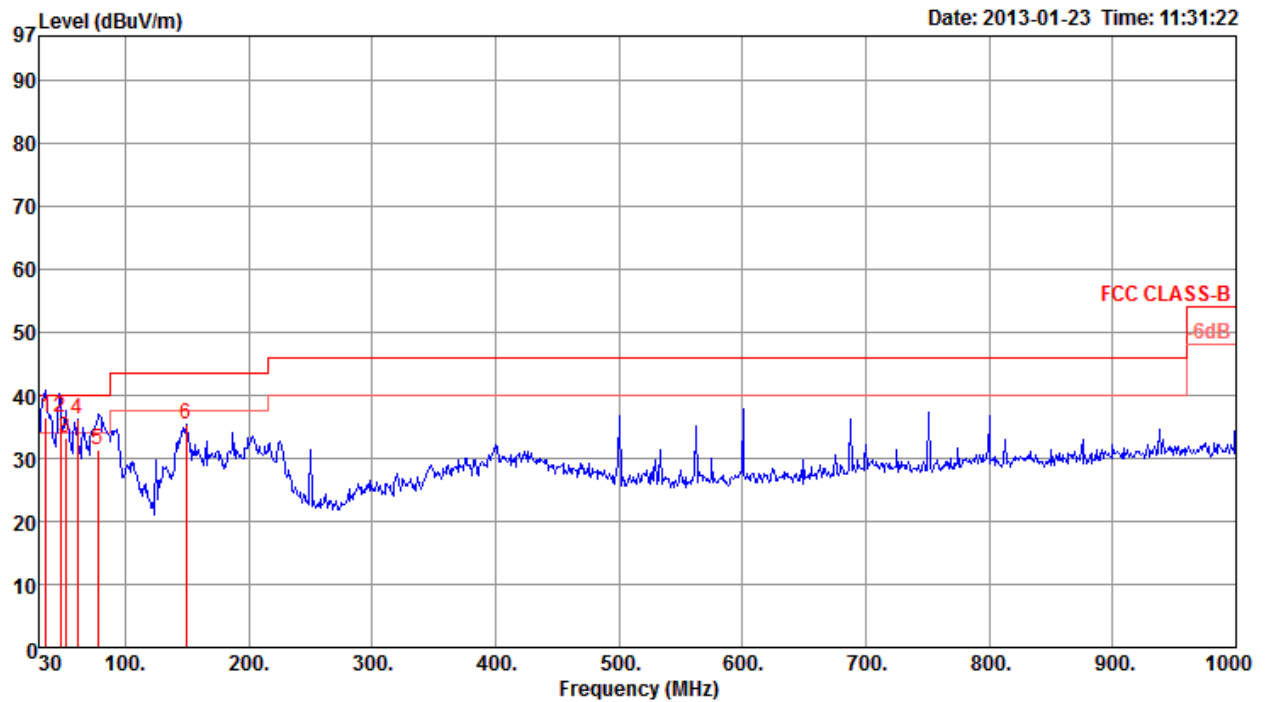

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	
1	36.13	36.60	40.00	-3.40	47.41	0.93	28.00	16.26	QP	101	100	VERTICAL
2	47.79	36.44	40.00	-3.56	53.60	1.02	27.93	9.75	QP	68	100	VERTICAL
3	51.34	33.18	40.00	-6.82	51.51	1.07	27.92	8.52	QP	112	100	VERTICAL
4	61.04	36.13	40.00	-3.87	56.04	1.18	27.98	6.89	Peak	0	100	VERTICAL
5	77.53	31.22	40.00	-8.78	50.50	1.32	27.91	7.31	QP	196	100	VERTICAL
6	149.31	35.48	43.50	-8.02	49.92	1.79	27.51	11.28	Peak	0	100	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 36 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 05, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15539.64	53.23	74.00	-20.77	44.76	6.13	37.65	35.31	Peak	100	245	HORIZONTAL
2	15540.01	41.34	54.00	-12.66	32.87	6.13	37.65	35.31	Average	100	245	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15539.89	53.72	74.00	-20.28	45.21	6.13	37.69	35.31	Peak	100	115	VERTICAL
2	15540.03	40.08	54.00	-13.92	31.57	6.13	37.69	35.31	Average	100	115	VERTICAL



Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 40 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 05, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15599.54	40.40	54.00	-13.60	32.01	6.13	37.60	35.34	Average	100	147	HORIZONTAL
2	15600.17	52.35	74.00	-21.65	43.96	6.13	37.60	35.34	Peak	100	147	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15600.26	39.62	54.00	-14.38	31.23	6.13	37.60	35.34	Average	100	218	VERTICAL
2	15600.41	52.13	74.00	-21.87	43.74	6.13	37.60	35.34	Peak	100	218	VERTICAL



Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 48 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 05, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15719.66	39.55	54.00	-14.45	31.32	6.14	37.48	35.39	Average	100	266	HORIZONTAL
2	15719.81	51.81	74.00	-22.19	43.58	6.14	37.48	35.39	Peak	100	266	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15720.27	51.69	74.00	-22.31	43.46	6.14	37.48	35.39	Peak	100	133	VERTICAL
2	15720.47	39.15	54.00	-14.85	30.92	6.14	37.48	35.39	Average	100	133	VERTICAL



Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 38 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 05, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15569.51	41.93	54.00	-12.07	33.50	6.13	37.63	35.33	Average	100	67	HORIZONTAL
2	15569.79	54.57	74.00	-19.43	46.14	6.13	37.63	35.33	Peak	100	67	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15570.19	39.97	54.00	-14.03	31.52	6.13	37.65	35.33	Average	100	222	VERTICAL
2	15570.36	52.98	74.00	-21.02	44.53	6.13	37.65	35.33	Peak	100	222	VERTICAL

Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 46 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 05, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15689.53	41.17	54.00	-12.83	32.89	6.14	37.51	35.37	Average	100	69	HORIZONTAL
2	15689.76	54.96	74.00	-19.04	46.68	6.14	37.51	35.37	Peak	100	69	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15690.14	52.10	74.00	-21.90	43.82	6.14	37.51	35.37	Peak	100	150	VERTICAL
2	15690.47	39.34	54.00	-14.66	31.06	6.14	37.51	35.37	Average	100	150	VERTICAL



Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0 VHT 80MHz Ch 42 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 05, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15629.71	39.02	54.00	-14.98	30.67	6.14	37.56	35.35	Average	100	217	HORIZONTAL
2	15630.10	52.21	74.00	-21.79	43.86	6.14	37.56	35.35	Peak	100	217	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15629.60	52.07	74.00	-21.93	43.72	6.14	37.56	35.35	Peak	100	284	VERTICAL
2	15630.28	39.11	54.00	-14.89	30.76	6.14	37.56	35.35	Average	100	284	VERTICAL

Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 36 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 05, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15539.69	52.95	74.00	-21.05	44.48	6.13	37.65	35.31	Peak	100	167	HORIZONTAL
2	15539.69	40.40	54.00	-13.60	31.93	6.13	37.65	35.31	Average	100	167	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15540.17	40.13	54.00	-13.87	31.62	6.13	37.69	35.31	Average	100	235	VERTICAL
2	15540.37	52.65	74.00	-21.35	44.14	6.13	37.69	35.31	Peak	100	235	VERTICAL

Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 40 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 05, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15600.00	52.57	74.00	-21.43	44.18	6.13	37.60	35.34	Peak	100	261	HORIZONTAL
2	15600.12	40.17	54.00	-13.83	31.78	6.13	37.60	35.34	Average	100	261	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15599.94	39.64	54.00	-14.36	31.25	6.13	37.60	35.34	Average	100	123	VERTICAL
2	15600.07	51.87	74.00	-22.13	43.48	6.13	37.60	35.34	Peak	100	123	VERTICAL

Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 48 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 05, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15719.66	39.86	54.00	-14.14	31.63	6.14	37.48	35.39	Average	100	301	HORIZONTAL
2	15720.12	52.34	74.00	-21.66	44.11	6.14	37.48	35.39	Peak	100	301	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	15719.89	39.37	54.00	-14.63	31.14	6.14	37.48	35.39	Average	100	248	VERTICAL
2	15720.32	51.78	74.00	-22.22	43.55	6.14	37.48	35.39	Peak	100	248	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an -27dBm peak limit or average and peak limits of 15.209. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for Peak

4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 20MHz Ch 36, 40, 48 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 04, 2013		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5097.00	53.98	54.00	-0.02	16.98	3.42	33.58	0.00 Average	100	82	VERTICAL
2	5102.00	63.77	74.00	-10.23	26.77	3.42	33.58	0.00 Peak	100	82	VERTICAL
3	5178.80	99.12			61.95	3.44	33.73	0.00 Average	100	82	VERTICAL
4	5179.40	109.75			72.58	3.44	33.73	0.00 Peak	100	82	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5119.00	49.91	54.00	-4.09	12.87	3.43	33.61	0.00 Average	100	39	HORIZONTAL
2	5119.00	60.13	74.00	-13.87	23.09	3.43	33.61	0.00 Peak	100	39	HORIZONTAL
3	5199.00	96.61			59.40	3.45	33.76	0.00 Average	100	39	HORIZONTAL
4	5199.00	106.78			69.57	3.45	33.76	0.00 Peak	100	39	HORIZONTAL
5	5355.00	63.36	74.00	-10.64	25.84	3.49	34.03	0.00 Peak	100	39	HORIZONTAL
6	5359.00	53.70	54.00	-0.30	16.18	3.49	34.03	0.00 Average	100	39	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5238.00	107.21			69.93	3.46	33.82	0.00 Peak	100	49	HORIZONTAL
2	5239.00	96.92			59.64	3.46	33.82	0.00 Average	100	49	HORIZONTAL
3	5398.00	53.97	54.00	-0.03	16.38	3.50	34.09	0.00 Average	100	49	HORIZONTAL
4	5399.00	64.72	74.00	-9.28	27.09	3.51	34.12	0.00 Peak	100	49	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5240 MHz.



Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11n MCS0 40MHz Ch 38, 46 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 04, 2013		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5146.00	66.93	74.00	-7.07	29.83	3.43	33.67	0.00	Peak	100	84	VERTICAL
2	5149.00	53.32	54.00	-0.68	16.22	3.43	33.67	0.00	Average	100	84	VERTICAL
3	5194.00	98.23			61.06	3.44	33.73	0.00	Average	100	84	VERTICAL
4	5194.00	109.11			71.94	3.44	33.73	0.00	Peak	100	84	VERTICAL
5	5356.00	52.73	54.00	-1.27	15.21	3.49	34.03	0.00	Average	100	84	VERTICAL
6	5356.00	63.84	74.00	-10.16	26.32	3.49	34.03	0.00	Peak	100	84	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5144.00	52.23	54.00	-1.77	15.13	3.43	33.67	0.00	Average	100	85	VERTICAL
2	5144.00	61.93	74.00	-12.07	24.83	3.43	33.67	0.00	Peak	100	85	VERTICAL
3	5224.00	99.10			61.85	3.46	33.79	0.00	Average	100	85	VERTICAL
4	5224.00	110.25			73.00	3.46	33.79	0.00	Peak	100	85	VERTICAL
5	5387.00	53.65	54.00	-0.35	16.06	3.50	34.09	0.00	Average	100	85	VERTICAL
6	5387.00	64.99	74.00	-9.01	27.40	3.50	34.09	0.00	Peak	100	85	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0 20MHz Ch 36, 40, 48 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 04, 2013		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5099.00	53.96	54.00	-0.04	16.96	3.42	33.58	0.00 Average	100	47	VERTICAL
2	5099.00	64.27	74.00	-9.73	27.27	3.42	33.58	0.00 Peak	100	47	VERTICAL
3	5179.00	101.03			63.86	3.44	33.73	0.00 Average	100	47	VERTICAL
4	5179.00	111.79			74.62	3.44	33.73	0.00 Peak	100	47	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5119.00	53.83	54.00	-0.17	16.79	3.43	33.61	0.00 Average	100	47	VERTICAL
2	5119.00	65.10	74.00	-8.90	28.06	3.43	33.61	0.00 Peak	100	47	VERTICAL
3	5199.00	100.68			63.47	3.45	33.76	0.00 Average	100	47	VERTICAL
4	5199.00	111.60			74.39	3.45	33.76	0.00 Peak	100	47	VERTICAL
5	5359.00	53.39	54.00	-0.61	15.87	3.49	34.03	0.00 Average	100	47	VERTICAL
6	5359.00	63.47	74.00	-10.53	25.95	3.49	34.03	0.00 Peak	100	47	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5239.00	98.35			61.07	3.46	33.82	0.00 Average	100	59	HORIZONTAL
2	5239.00	108.44			71.16	3.46	33.82	0.00 Peak	100	59	HORIZONTAL
3	5399.00	53.96	54.00	-0.04	16.33	3.51	34.12	0.00 Average	100	59	HORIZONTAL
4	5400.00	63.86	74.00	-10.14	26.23	3.51	34.12	0.00 Peak	100	59	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5240 MHz.

Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0 40MHz Ch 38, 46 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 04, 2013		

Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5149.40	53.93	54.00	-0.07	16.83	3.43	33.67	0.00 Average	100	44	VERTICAL
2	5150.00	68.93	74.00	-5.07	31.83	3.43	33.67	0.00 Peak	100	44	VERTICAL
3	5184.00	97.93			60.76	3.44	33.73	0.00 Average	100	44	VERTICAL
4	5184.60	109.24			72.07	3.44	33.73	0.00 Peak	100	44	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5147.00	51.96	54.00	-2.04	14.86	3.43	33.67	0.00 Average	100	84	VERTICAL
2	5147.00	61.79	74.00	-12.21	24.69	3.43	33.67	0.00 Peak	100	84	VERTICAL
3	5236.00	97.59			60.31	3.46	33.82	0.00 Average	100	84	VERTICAL
4	5236.00	108.77			71.49	3.46	33.82	0.00 Peak	100	84	VERTICAL
5	5394.00	53.93	54.00	-0.07	16.34	3.50	34.09	0.00 Average	100	84	VERTICAL
6	5397.00	65.40	74.00	-8.60	27.81	3.50	34.09	0.00 Peak	100	84	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0 80MHz Ch 42 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 04, 2013		

Channel 42

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	5143.40	53.98	54.00	-0.02	16.88	3.43	33.67	0.00	Average	100	59	VERTICAL
2	5149.40	67.36	74.00	-6.64	30.26	3.43	33.67	0.00	Peak	100	59	VERTICAL
3	5214.20	104.71			67.47	3.45	33.79	0.00	Peak	100	59	VERTICAL
4	5219.00	92.45			55.21	3.45	33.79	0.00	Average	100	59	VERTICAL

Item 3, 4 are the fundamental frequency at 5210MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	25.6°C	Humidity	56%
Test Engineer	Serway Li	Configurations	IEEE 802.11a Ch 36, 40, 48 / Ant. 3 + Ant. 4 + Ant. 5 (3TX)
Test Date	Feb. 04, 2013		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5099.00	53.94	54.00	-0.06	16.94	3.42	33.58	0.00 Average	100	68	VERTICAL
2	5099.00	63.67	74.00	-10.33	26.67	3.42	33.58	0.00 Peak	100	68	VERTICAL
3	5179.00	99.27			62.10	3.44	33.73	0.00 Average	100	68	VERTICAL
4	5179.00	109.61			72.44	3.44	33.73	0.00 Peak	100	68	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5118.00	62.58	74.00	-11.42	25.55	3.42	33.61	0.00 Peak	100	71	VERTICAL
2	5119.00	53.17	54.00	-0.83	16.13	3.43	33.61	0.00 Average	100	71	VERTICAL
3	5196.00	109.04			71.83	3.45	33.76	0.00 Peak	100	71	VERTICAL
4	5205.00	98.22			61.01	3.45	33.76	0.00 Average	100	71	VERTICAL
5	5356.00	53.85	54.00	-0.15	16.33	3.49	34.03	0.00 Average	100	71	VERTICAL
6	5356.00	64.38	74.00	-9.62	26.86	3.49	34.03	0.00 Peak	100	71	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5239.00	96.71			59.43	3.46	33.82	0.00 Average	100	43	HORIZONTAL
2	5244.00	106.82			69.54	3.46	33.82	0.00 Peak	100	43	HORIZONTAL
3	5399.00	53.72	54.00	-0.28	16.09	3.51	34.12	0.00 Average	100	43	HORIZONTAL
4	5399.00	63.06	74.00	-10.94	25.43	3.51	34.12	0.00 Peak	100	43	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual or $\pm 20\text{ppm}$ (IEEE 802.11nspecification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than $\pm 20\text{ppm}$ (IEEE 802.11nspecification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

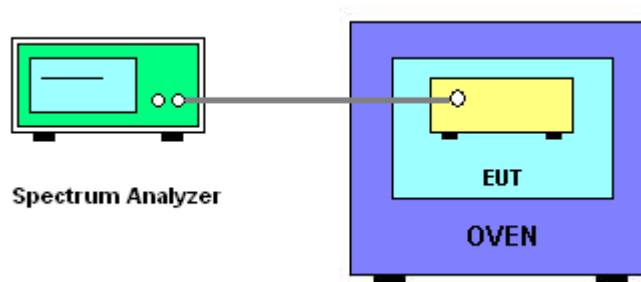

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.50	5199.9868
110.00	5199.9825
93.50	5199.9852
Max. Deviation (MHz)	0.017500
Max. Deviation (ppm)	3.37

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
-30	5199.9882
-20	5199.9860
-10	5199.9884
0	5199.9856
10	5199.9848
20	5199.9870
30	5199.9872
40	5199.9864
50	5199.9878
Max. Deviation (MHz)	0.015200
Max. Deviation (ppm)	2.92

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov.26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
Coupling Decoupling Network	TESEQ	ST08	24348	150kHz ~ 230MHz	Dec. 03, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz-30MHz	Dec. 4, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
forHorn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz-40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz-40GHz	Oct. 08, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085