


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	24.5°C	Humidity	60%
Test Engineer	Jim Huang	Configurations	Normal Link / EUT + Power Adapter 2

Horizontal

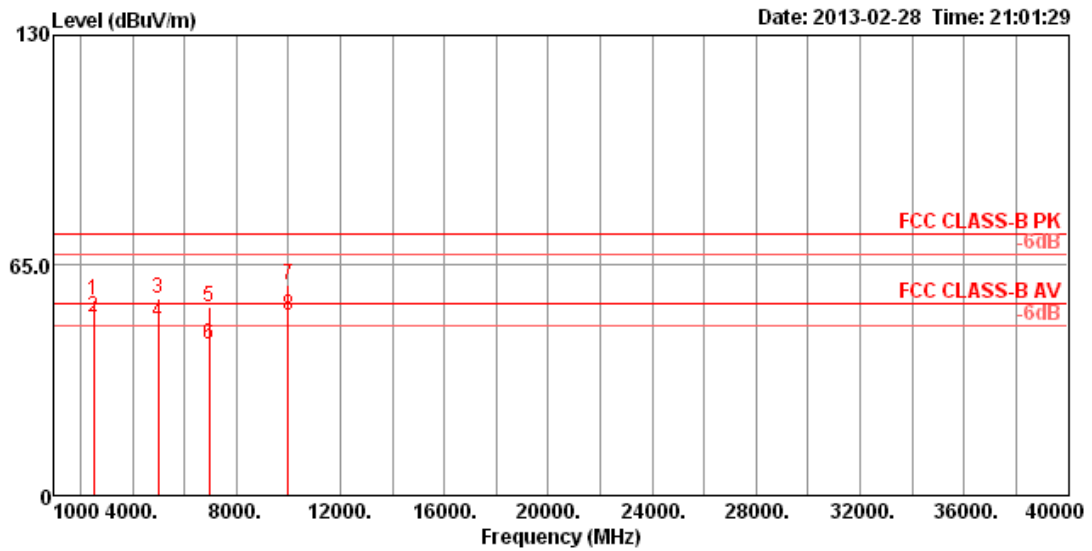

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2499.87	55.18	74.00	-18.82	59.21	3.74	27.90	35.67	150	24	HORIZONTAL	Peak
2 !	2500.04	50.25	54.00	-3.75	54.28	3.74	27.90	35.67	150	24	HORIZONTAL	Average
3	4999.95	55.58	74.00	-18.42	52.14	5.90	32.90	35.36	100	350	HORIZONTAL	Peak
4 !	5000.48	49.02	54.00	-4.98	45.58	5.90	32.90	35.36	100	350	HORIZONTAL	Average
5	6946.35	53.23	74.00	-20.77	45.31	6.90	36.52	35.50	100	358	HORIZONTAL	Peak
6	6946.59	42.58	54.00	-11.42	34.66	6.90	36.52	35.50	100	358	HORIZONTAL	Average
7 pk	10000.04	59.43	74.00	-14.57	47.64	8.16	38.50	34.87	100	308	HORIZONTAL	Peak
8 pp	10000.08	50.66	54.00	-3.34	38.87	8.16	38.50	34.87	100	308	HORIZONTAL	Average

Vertical

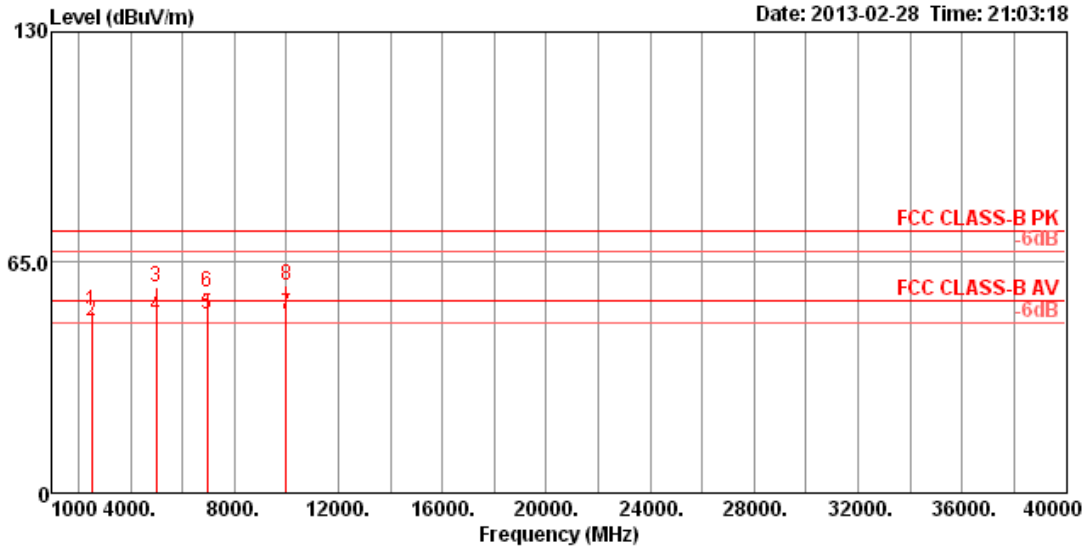

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2499.99	51.45	74.00	-22.55	55.48	3.74	27.90	35.67	111	80 VERTICAL	Peak
2 !	2500.04	48.40	54.00	-5.60	52.43	3.74	27.90	35.67	11	80 VERTICAL	Average
3	5000.14	58.05	74.00	-15.95	54.61	5.90	32.90	35.36	124	5 VERTICAL	Peak
4 !	5000.15	50.06	54.00	-3.94	46.62	5.90	32.90	35.36	124	5 VERTICAL	Average
5 !	6946.68	50.40	54.00	-3.60	42.48	6.90	36.52	35.50	106	10 VERTICAL	Average
6	6946.89	56.56	74.00	-17.44	48.64	6.90	36.52	35.50	106	10 VERTICAL	Peak
7 pp	10000.04	50.41	54.00	-3.59	38.62	8.16	38.50	34.87	104	17 VERTICAL	Average
8 pk	10000.04	58.76	74.00	-15.24	46.97	8.16	38.50	34.87	104	17 VERTICAL	Peak