



SPORTON International Inc.


No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

Project No: CB10409338

Maximum Permissible Exposure Report

| | |
|---------------------|--|
| Applicant's company | NETGEAR, Inc. |
| Applicant Address | 350 East Plumeria Drive, San Jose, California 95134, USA |
| FCC ID | PY312400219 |

| | |
|------------------|---|
| Product Name | R6250 Smart WiFi Router |
| Brand Name | NETGEAR |
| Model Name | R6250 |
| Ref. Standard(s) | 47 CFR FCC Part 2 Subpart J, section 2.1091 |
| Received Date | Jul. 16, 2015 |
| Final Test Date | Sep. 17, 2015 |
| Submission Type | Class II Change |

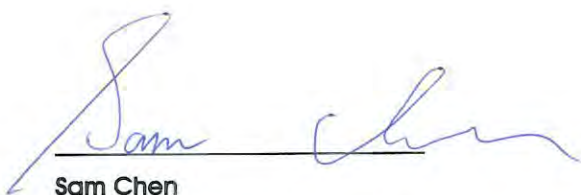

Sam Chen

SPORTON INTERNATIONAL INC.





Table of Contents

| | |
|--|----------|
| 1. GENERAL DESCRIPTION..... | 1 |
| 1.1. EUT General Information | 1 |
| 1.2. Table for Class II Change | 1 |
| 1.3. Testing Location..... | 1 |
| 2. MAXIMUM PERMISSIBLE EXPOSURE..... | 2 |
| 2.1. Limit of Maximum Permissible Exposure | 2 |
| 2.2. MPE Calculation Method | 2 |
| 2.3. Calculated Result and Limit..... | 3 |



History of This Test Report

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|-------------|---------|-------------------------|---------------|
| FA322315-05 | Rev. 01 | Initial issue of report | Sep. 30, 2015 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

1. GENERAL DESCRIPTION

1.1. EUT General Information

| RF General Information | | | |
|------------------------|--|--|---|
| Evaluation Mode | Frequency Range (MHz) | Operating Frequency (MHz) | Modulation Type |
| 2.4GHz WLAN | 2400-2483.5 | 2412-2462 | 802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) |
| 5GHz WLAN | 5150-5250 5250-5350 5470-5725 5725-5850 | 5180-5240 5260-5320 5500-5700 5745-5825 | 802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) |

1.2. Table for Class II Change

This product is an extension of original one reported under Sporton project number: 322315

Below is the table for the change of the product with respect to the original one.

| Modifications | Performance Checking |
|--|--|
| 1. Changing 5GHz Band 1 to "New Rules" from "Old Rules". | After evaluating, it's not necessary to re-test all test items for 5GHz Band 1 updating to "New Rules" due to the same power as original filing. |
| 2. Changing 5GHz Band 4 to "New Rules" from "Old Rules". | Maximum Permissible Exposure. |

Note: Maximum Permissible Exposure of 5GHz Band 1~3 and 2.4GHz Band are based on original test report

1.3. Testing Location

| Testing Location | | |
|-------------------------------------|--------|---|
| <input type="checkbox"/> | HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973 |
| <input checked="" type="checkbox"/> | JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085 |

2. MAXIMUM PERMISSIBLE EXPOSURE

2.1. Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|---|
| 0.3-3.0 | 614 | 1.63 | (100)* | 6 |
| 3.0-30 | 1842 / f | 4.89 / f | (900 / f)* | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | | | F/300 | 6 |
| 1500-100,000 | | | 5 | 6 |

(B) Limits for General Population / Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|---|
| 0.3-1.34 | 614 | 1.63 | (100)* | 30 |
| 1.34-30 | 824/f | 2.19/f | (180/f)* | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | | | F/1500 | 30 |
| 1500-100,000 | | | 1.0 | 30 |

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2. MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

2.3. Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For 5GHz Band 1~3:

Antenna Type : PCB Antenna

Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT40): 21.11 dBm

| Distance (cm) | Test Freq. (MHz) | Directional Gain (dBi) | Antenna Gain (numeric) | The maximum combined Average Output Power | | Power Density (S) (mW/cm ²) | Limit of Power Density (S) (mW/cm ²) | Test Result |
|---------------|------------------|------------------------|------------------------|---|----------|---|--|-------------|
| | | | | (dBm) | (mW) | | | |
| 20 | 5670 | 5.56 | 3.5975 | 21.1096 | 129.1087 | 0.092450 | 1 | Complies |

$$\text{Note: Directional Gain} = 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{K=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

For 5GHz Band 4:

Antenna Type : PCB Antenna

Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT40): 21.61 dBm

| Distance (cm) | Test Freq. (MHz) | Directional Gain (dBi) | Antenna Gain (numeric) | The maximum combined Average Output Power | | Power Density (S) (mW/cm ²) | Limit of Power Density (S) (mW/cm ²) | Test Result |
|---------------|------------------|------------------------|------------------------|---|----------|---|--|-------------|
| | | | | (dBm) | (mW) | | | |
| 20 | 5795 | 5.56 | 3.5975 | 21.6077 | 144.7988 | 0.103685 | 1 | Complies |

$$\text{Note: Directional Gain} = 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{K=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

For 2.4GHz Band:

Antenna Type : PCB Antenna

Conducted Power for IEEE 802.11g: 26.24 dBm

| Distance (cm) | Test Freq. (MHz) | Antenna Gain (dBi) | Antenna Gain (numeric) | The maximum combined (Average) Output Power | | Power Density (S) (mW/cm ²) | Limit of Power Density (S) (mW/cm ²) | Test Result |
|---------------|------------------|--------------------|------------------------|---|----------|---|--|-------------|
| | | | | (dBm) | (mW) | | | |
| 20 | 2437 | 1.50 | 1.4125 | 26.2432 | 421.0413 | 0.118379 | 1 | Complies |

Conclusion:

Both of the WLAN 2.4GHz Band and WLAN 5GHz Band can transmit simultaneously, the formula of calculated the MPE is:

$$\text{CPD1} / \text{LPD1} + \text{CPD2} / \text{LPD2} + \dots \text{etc.} < 1$$

CPD = Calculation power density

LPD = Limit of power density

Therefore, the worst-case situation is $0.118379 / 1 + 0.103685 / 1 = 0.222064$, which is less than "1". This confirmed that the device complies.