






REV	DESCRIPTION OF REVISION	ENG APPD	DATE
01	INITIAL DOCUMENT CREATION	R HU	02JAN2013

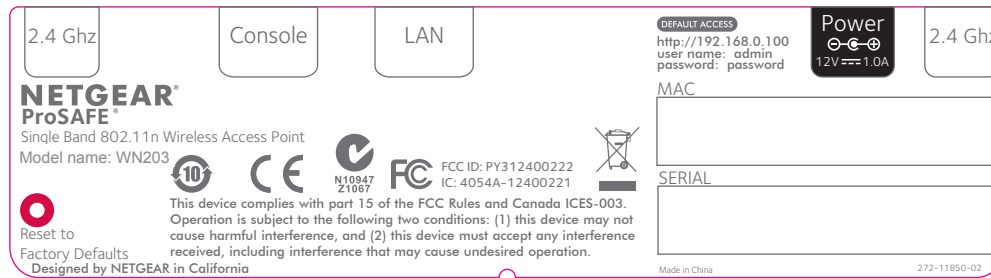


NOTE:

1. REFER TO NETGEAR SPEC. DOC-00093 FOR COLOR TOLERANCES.
2. INK COLOR IS SHOWN TO THE RIGHT.
3. DIE LINES ARE MAGENTA COLOR AND DO NOT PRINT.
4. WAN MAC, SERIAL NUMBERS, SSID, PASSPHRASE, and WPS PIN TO BE PRINTED BY THE ODM. SSID, PASSPHRASE, WNS PIN NEED TO BE LEFT-ALIGNED. THE FONT/SIZE OF THE PRINTS NEED TO BE "AJB.39.39" OR BETTER IN ODM'S PRINT-SETTINGS AT FACTORY .
5. See NTGR DOC-00112 for SN standard.
6. NTGR SN AND MAC ADDRESS BARCODE TO BE ENCODED CODE128 AND INCLUDE PRINTED CHARACTERS BELOW BARCODES. THE BARCODE SIZE MUST BE 28-30MM BY 5MM OR LARGER .
7. INSURE COUNTRY OF ORIGIN IS CORRECT.
  - A. IF COUNTRY OF ORIGIN IS PRE-PRINTED, UNHIDE THE APPROPRIATE COUNTRY OF ORIGIN LAYER AND INCLUDE COUNTRY OF ORIGIN ON LABEL.
  - B. IF COUNTRY OF ORIGIN IS POST-PRINTED USING A THERMAL PRINTER (OR EQUIVALENT), OMIT TEXT FROM ARTWORK (USE LAYERS).

-  Black
-  Pantone 200C
-  Pantone Cool Gray 7C
-  Netgear white 490-10001-01

AUTHOR:	R HU	TITLE:	AW, WN203, V1, PLBL	<b>NETGEAR</b>	
SHEET:	1 of 1	THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR WHEREWITH IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF NETGEAR, INC.		P/N:	AW-12370-02
				REV:	01

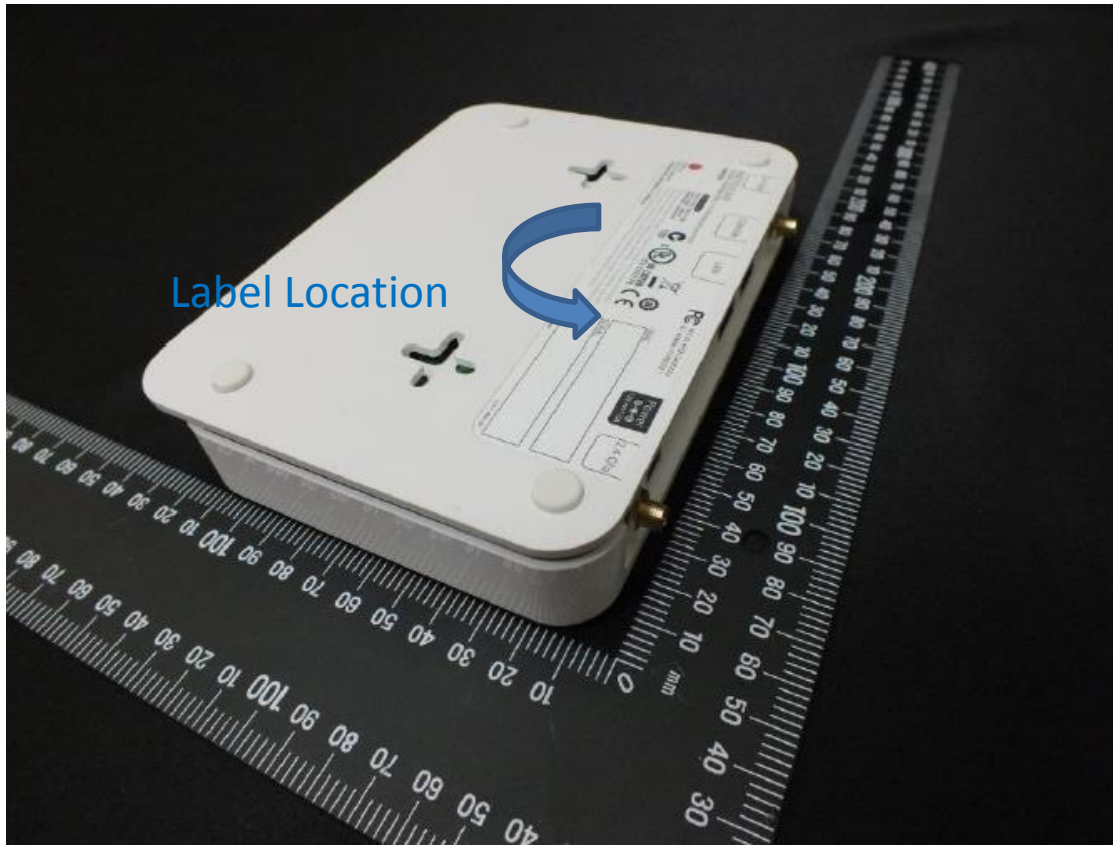

**FCC ID: PY312400222**