



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	NETGEAR, Inc.
Applicant Address	350 East Plumeria Drive, San Jose, California 95134, USA
FCC ID	PY312400223

Product Name	AC1750 WiFi Cable Modem Router
Brand Name	NETGEAR
Model No.	C6300
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jul. 17, 2013
Final Test Date	Oct. 16, 2013
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r01, KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.




Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes.....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	11
3.9. EUT Operation during Test	11
3.10. Duty Cycle.....	12
3.11. Test Configurations	14
4. TEST RESULT	17
4.1. AC Power Line Conducted Emissions Measurement.....	17
4.2. Maximum Conducted Output Power Measurement.....	21
4.3. Power Spectral Density Measurement	24
4.4. 6dB Spectrum Bandwidth Measurement	34
4.5. Radiated Emissions Measurement	39
4.6. Emissions Measurement	58
4.7. Antenna Requirements	76
5. LIST OF MEASURING EQUIPMENTS	77
6. MEASUREMENT UNCERTAINTY.....	79
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3

1. CERTIFICATE OF COMPLIANCE

Product Name : AC1750 WiFi Cable Modem Router
Brand Name : NETGEAR
Model No. : C6300
Applicant : NETGEAR, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 17, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

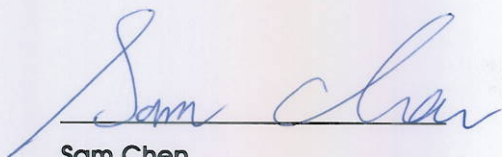

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.17 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.83 dB
4.3	15.247(e)	Power Spectral Density	Complies	2.69 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.38 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.12 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (HT20): 18.08 MHz ; MCS0 (HT40): 36.64 MHz
Maximum Conducted Output Power	MCS0 (HT20): 26.65 dBm ; MCS0 (HT40): 22.83 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11b/g

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 13.68 MHz ; 11g: 16.80 MHz
Maximum Conducted Output Power	11b: 29.17 dBm ; 11g: 26.80 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Note: This device contains transmitter module FCC ID: PY314100255.

Items	Description	
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming

Antenna and Band width

Antenna	Three (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS0-23
802.11n (HT40)	3	MCS0-23

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

3.2. Accessories


Power	Brand	Model	P/N	Rating
Adapter 1	NETGEAR	AD898F20	332-10613-01	Input:100-240V~50/60Hz, 1.0A Output:12V, 3.5A
Adapter 2	NETGEAR	2AAF042F NA	332-10618-01	Input:100-240V~50/60Hz, 1.5A Output:12.0V, 3.5A
Others				
RJ-45 Cable*1, Non-shielded, 1.5m				

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
					2.4GHz
1	NETGEAR	C6300	PIFA Antenna	I-PEX	3.1
2	NETGEAR	C6300	PIFA Antenna	I-PEX	2.2
3	NETGEAR	C6300	PIFA Antenna	I-PEX	2.8

Note: For IEEE 802.11b/g/n mode (3TX/3RX)

Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

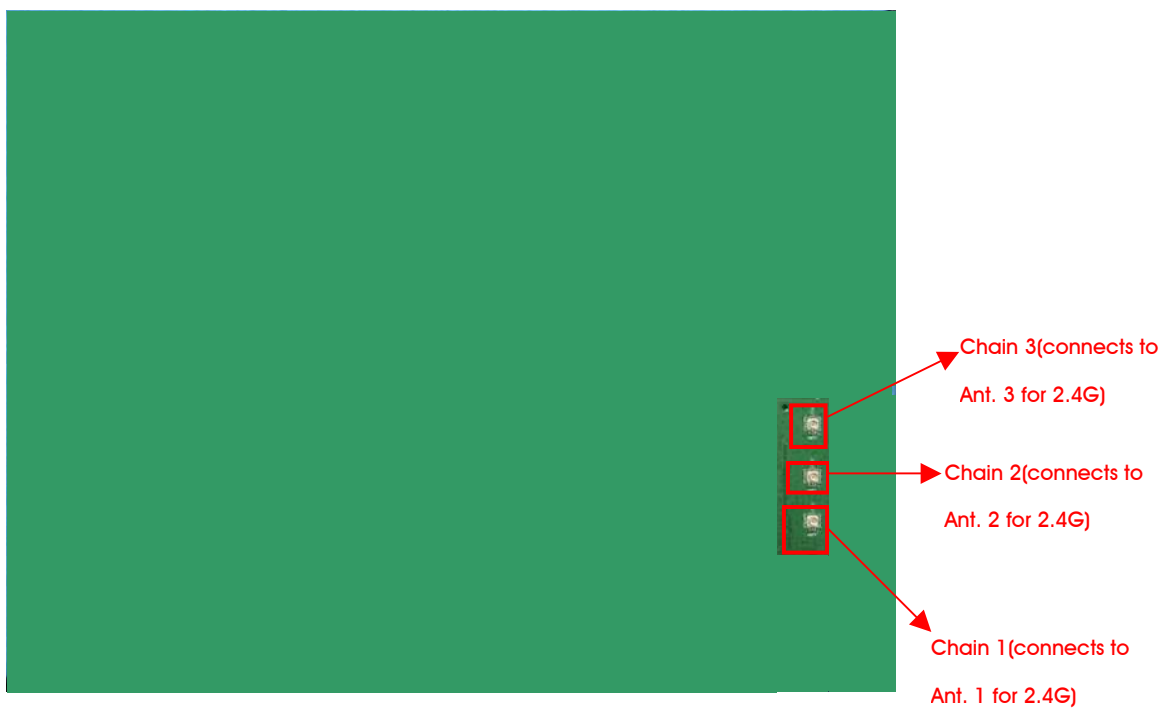

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Power Spectral Density	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
6dB Spectrum Bandwidth	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
Band Edge Emissions	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT + Adapter 1

Mode 2. EUT + Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission test below 1GHz:

Mode 1. EUT + Adapter 1

Mode 2. EUT + Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test above 1GHz:

Mode 1. CTX

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6400	DoC
Notebook*2	DELL	E6430	DoC
Notebook	ACER	TM3043WTMI	DoC
CMTS (Terminal System)	CASA	C2200	N/A
Switch Router	FOXCONN	U12C205	N/A
Flash Disk	Silicon	I-Series	DoC
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	DoC

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook*2	DELL	E6430	DoC
Notebook	DELL	E6220	DoC
Notebook	ACER	TM3043WTMI	DoC
Mouse	Logitech	M-U0026	DoC
Earphone	E-BOOKI	E-EPC040	N/A
Flash Disk	Silicon	D33B01	DoC
CMTS (Terminal System)	CASA	C2200	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n MCS0 HT20

Test Software Version	ART2-GUI Version : 2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 HT20	13.5	20	14.5

Power Parameters of IEEE 802.11n MCS0 HT40

Test Software Version	ART2-GUI Version : 2.3		
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 HT40	11	16.5	11

Power Parameters of IEEE 802.11b/g


Test Software Version	ART2-GUI Version : 2.3		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	20.5	23	17.5
IEEE 802.11g	14.5	20	15.5

3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.10. Duty Cycle

IEEE 802.11n MCS0 HT20

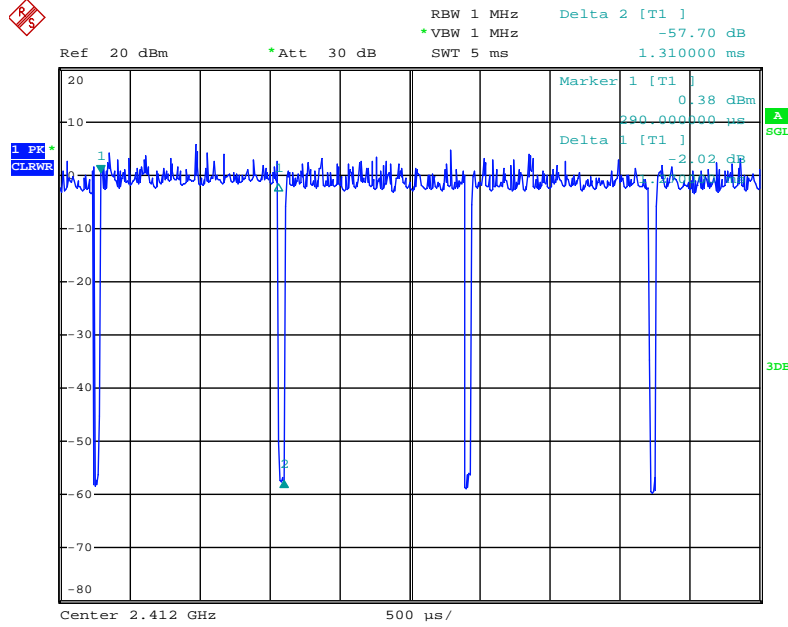


Date: 16.OCT.2013 11:34:41

IEEE 802.11n MCS0 HT40

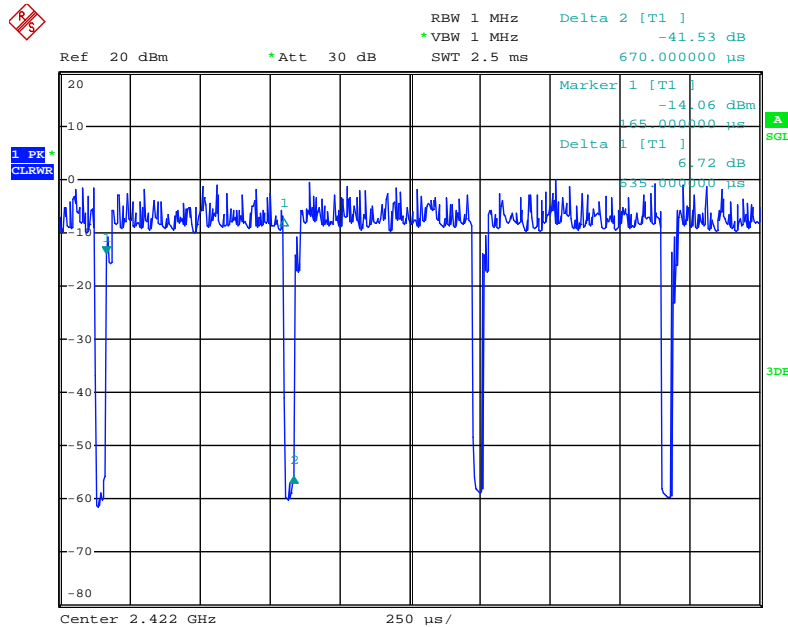


Date: 16.OCT.2013 11:35:13

IEEE 802.11b

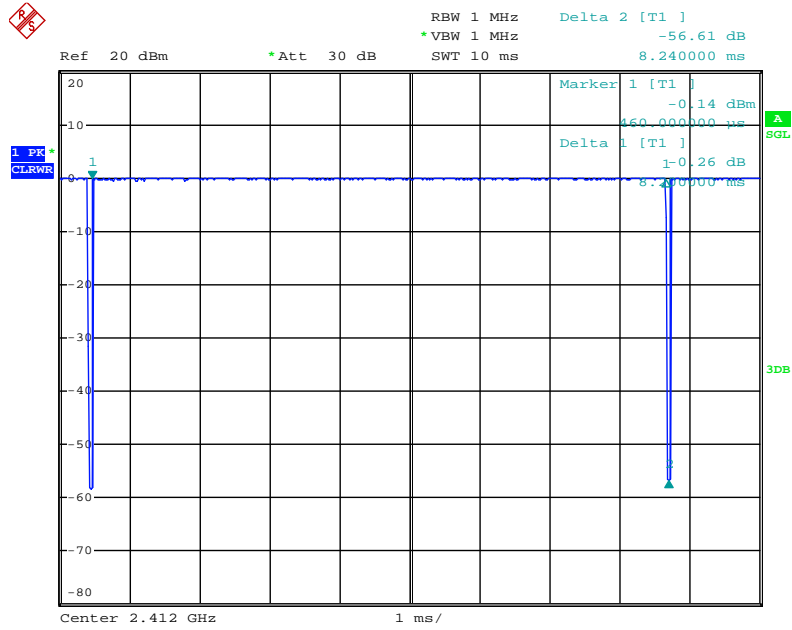

Date: 16.OCT.2013 11:32:35


IEEE 802.11g

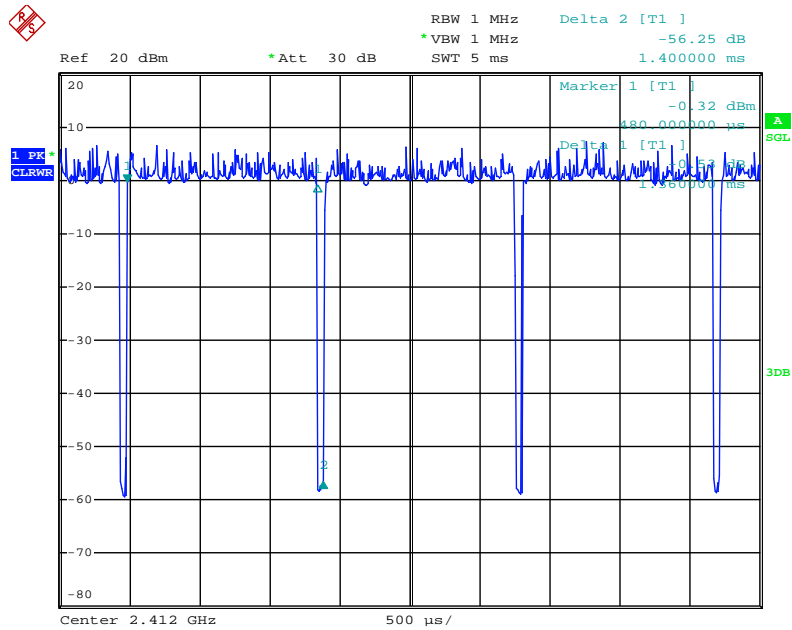

Date: 16.OCT.2013 11:33:46

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

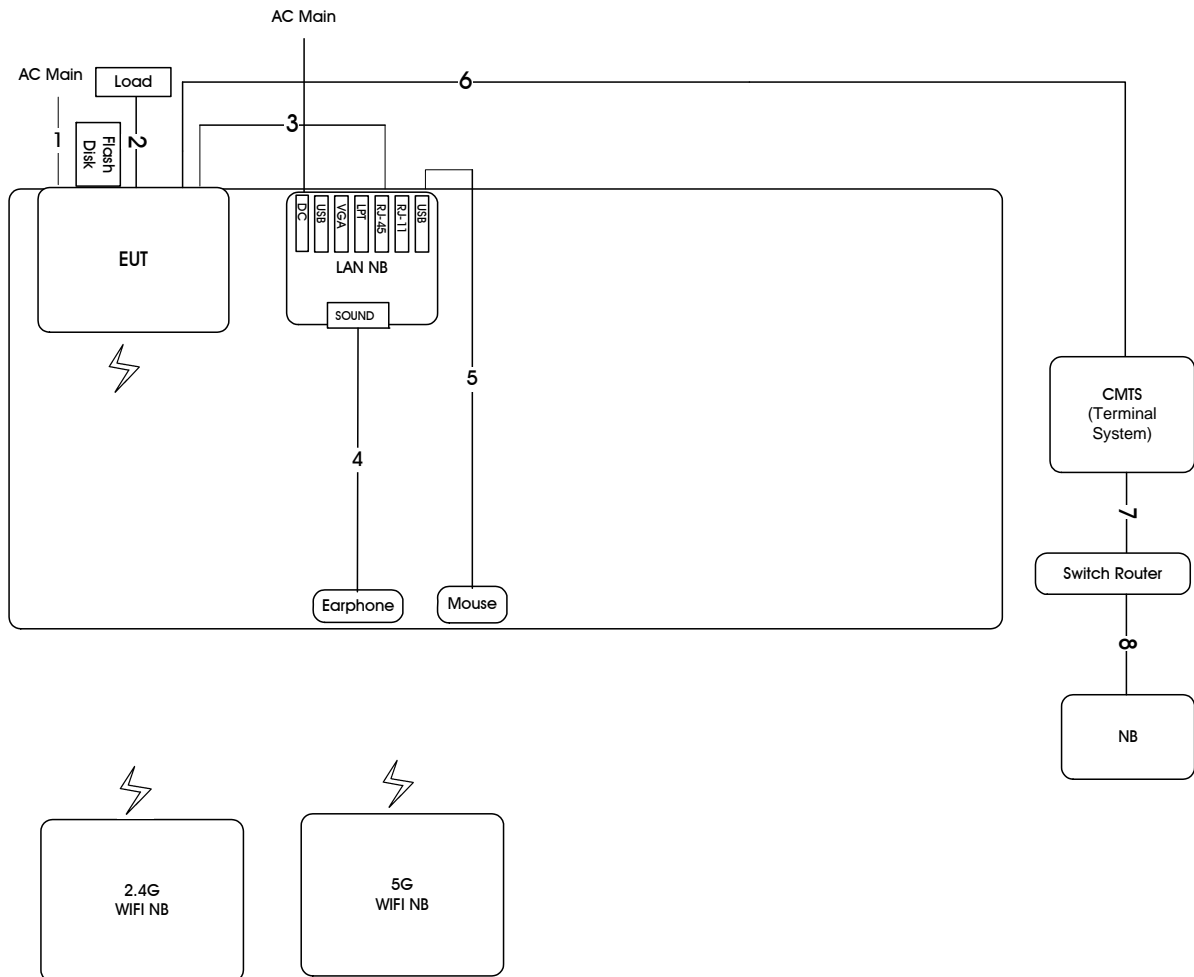

Item	Connection	Shield	Length(m)	Remark
1	AC power cable	No	1.8m	-
2	RJ-45 cable	No	1m	Load
3	RJ-45 cable	No	1.5m	-
4	Audio cable	No	1.3m	-
5	USB cable	Yes	1.8m	-
6	Coaxial cable	Yes	5m	-
7	RJ-45 cable	No	1m	-
8	RJ-45 cable	No	1m	-


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

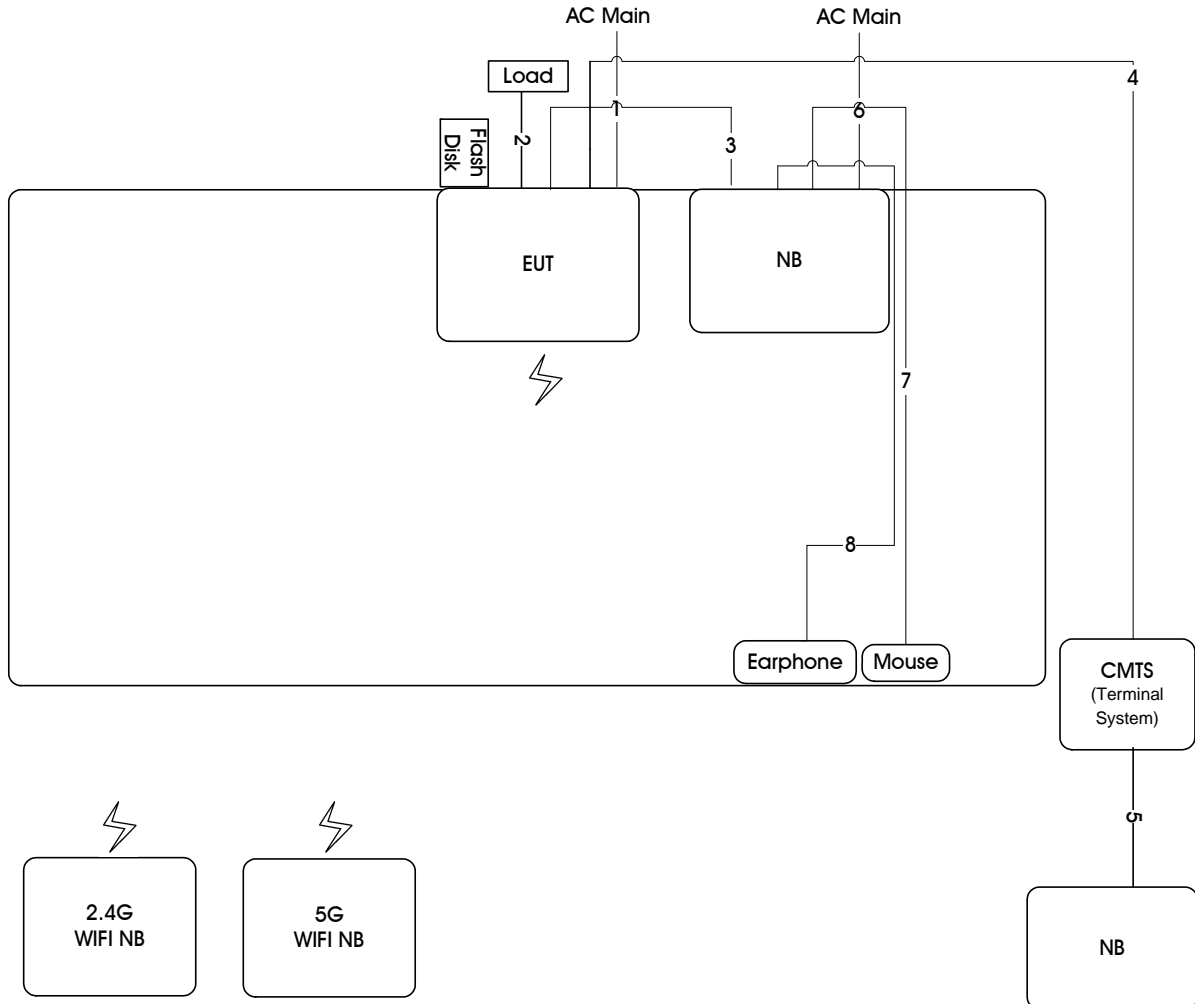

Item	Connection	Shield	Length(m)	Remark
1	AC power cable	No	1.8m	-
2	RJ-45 cable*3	No	1.5m	Load
3	RJ-45 cable	No	1.5m	-
4	Coaxial cable	Yes	5m	-
5	RJ-45 cable	No	1.5m	-
6	AC power cable	No	1.8m	-
7	USB cable	Yes	1.8m	-
8	Audio cable	No	1.1m	-

Test Configuration: above 1GHz

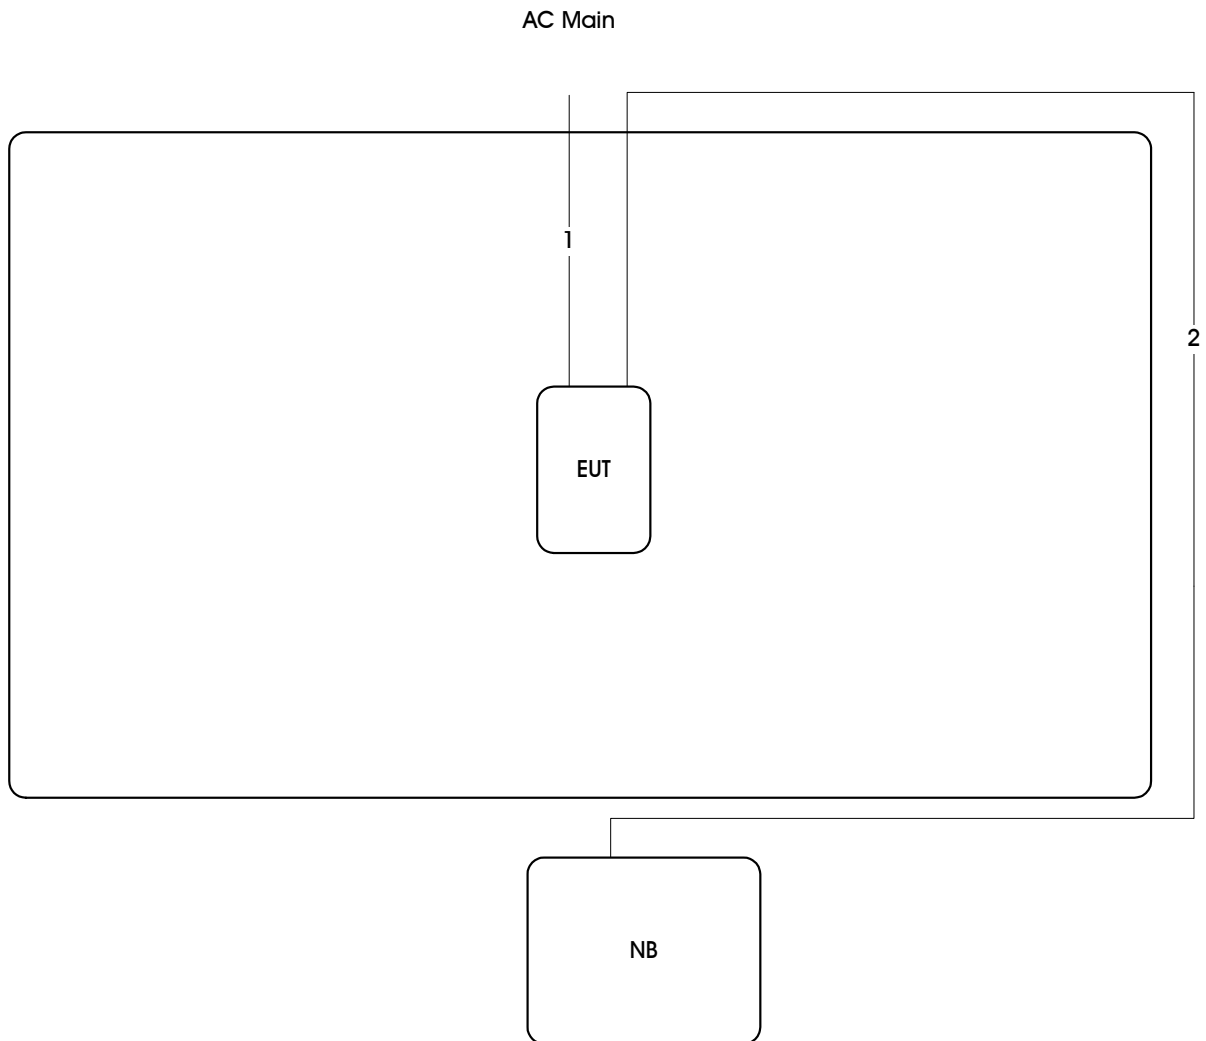

Item	Connection	Shield	Length(m)	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

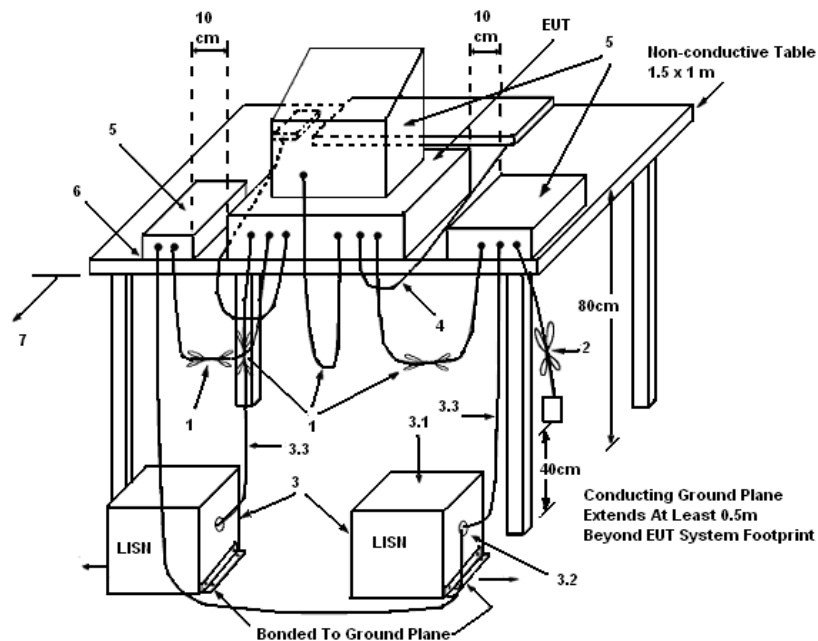

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

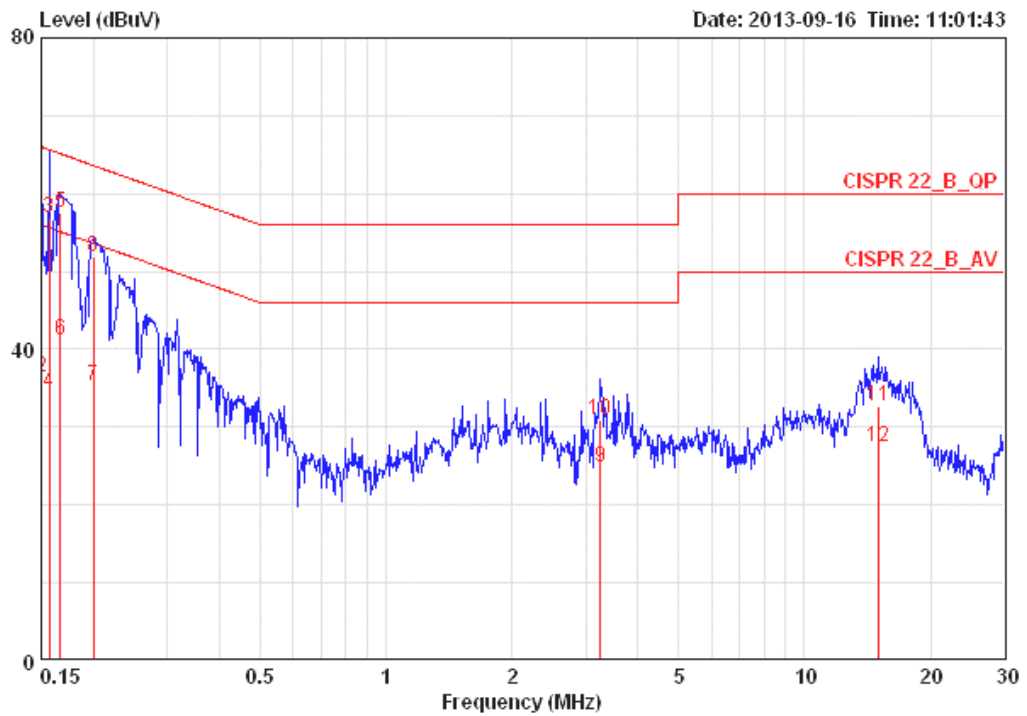

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	59.83	-6.17	66.00	59.50	0.15	0.18	LINE	QP
2	0.15000	36.37	-19.63	56.00	36.04	0.15	0.18	LINE	AVERAGE
3	0.15650	56.82	-8.83	65.65	56.49	0.15	0.18	LINE	QP
4	0.15650	34.50	-21.15	55.65	34.17	0.15	0.18	LINE	AVERAGE
5	0.16677	57.55	-7.57	65.12	57.21	0.15	0.19	LINE	QP
6	0.16677	41.26	-13.86	55.12	40.92	0.15	0.19	LINE	AVERAGE
7	0.19969	35.24	-18.38	53.62	34.89	0.15	0.20	LINE	AVERAGE
8	0.19969	51.97	-11.65	63.62	51.62	0.15	0.20	LINE	QP
9	3.258	24.93	-21.07	46.00	24.42	0.25	0.26	LINE	AVERAGE
10	3.258	30.93	-25.07	56.00	30.42	0.25	0.26	LINE	QP
11	14.986	32.63	-27.37	60.00	31.74	0.48	0.41	LINE	QP
12	14.986	27.41	-22.59	50.00	26.52	0.48	0.41	LINE	AVERAGE

Temperature	24°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

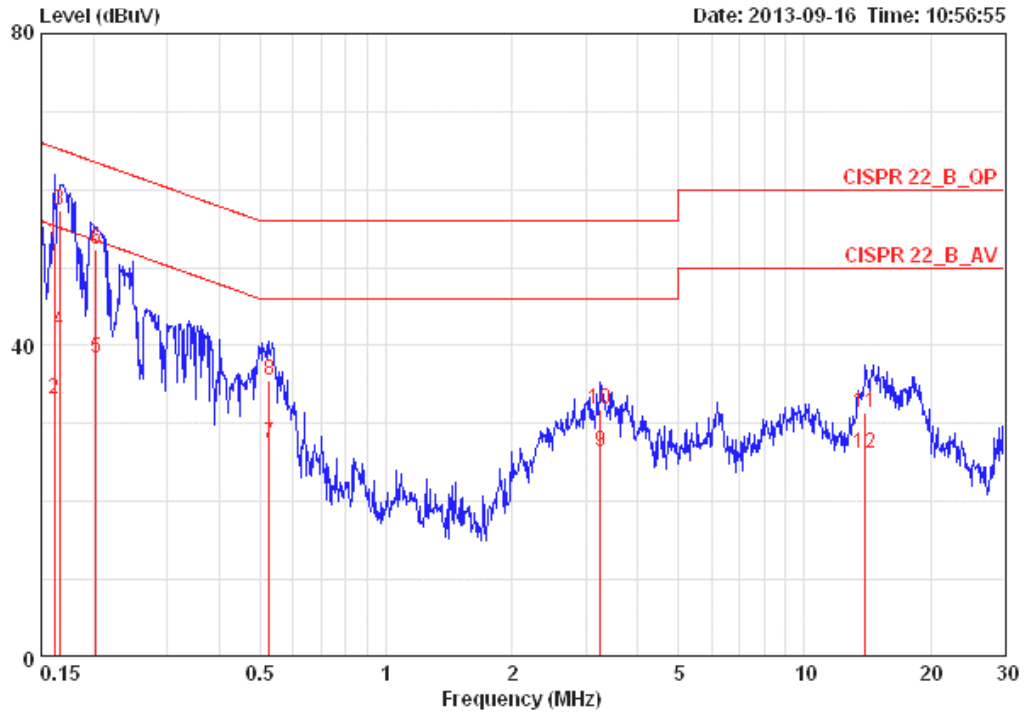

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.16155	53.20	-12.18	65.38	52.95	0.07	0.18	NEUTRAL	QP
2	0.16155	33.09	-22.29	55.38	32.84	0.07	0.18	NEUTRAL	AVERAGE
3	0.16589	57.39	-7.78	65.16	57.13	0.07	0.19	NEUTRAL	QP
4	0.16589	41.85	-13.32	55.16	41.59	0.07	0.19	NEUTRAL	AVERAGE
5	0.20258	38.46	-15.04	53.50	38.19	0.07	0.20	NEUTRAL	AVERAGE
6	0.20258	52.21	-11.29	63.50	51.94	0.07	0.20	NEUTRAL	QP
7	0.52655	27.47	-18.53	46.00	27.20	0.07	0.20	NEUTRAL	AVERAGE
8	0.52655	35.46	-20.54	56.00	35.19	0.07	0.20	NEUTRAL	QP
9	3.258	26.34	-19.66	46.00	25.95	0.12	0.26	NEUTRAL	AVERAGE
10	3.258	31.92	-24.08	56.00	31.53	0.12	0.26	NEUTRAL	QP
11	13.989	31.28	-28.72	60.00	30.54	0.34	0.40	NEUTRAL	QP
12	13.989	26.10	-23.90	50.00	25.36	0.34	0.40	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 9.2.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

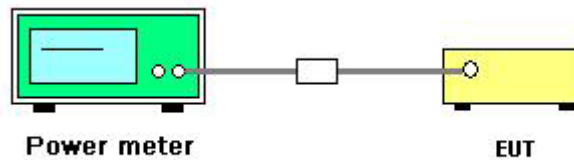

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n
Test Date	Oct. 16, 2013		

Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	15.57	14.48	15.62	20.03	30.00	Complies
6	2437 MHz	21.38	21.98	22.22	26.65	30.00	Complies
11	2462 MHz	15.81	16.41	16.57	21.05	30.00	Complies

Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	13.04	12.26	13.12	17.59	30.00	Complies
6	2437 MHz	17.88	18.13	18.16	22.83	30.00	Complies
9	2452 MHz	12.44	12.51	12.61	17.29	30.00	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11b/g
Test Date	Oct. 16, 2013		

Configuration IEEE 802.11b / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	21.83	21.37	22.45	26.68	30.00	Complies
6	2437 MHz	23.81	24.64	24.68	29.17	30.00	Complies
11	2462 MHz	18.41	19.32	19.45	23.86	30.00	Complies

Configuration IEEE 802.11g / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	16.46	15.92	16.75	21.16	30.00	Complies
6	2437 MHz	21.45	22.25	22.32	26.80	30.00	Complies
11	2462 MHz	16.72	17.42	17.55	22.02	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

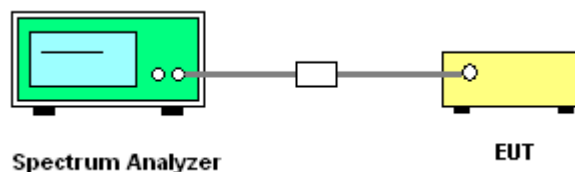

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-10.32	-10.68	-10.20	-5.62	8.00	Complies
6	2437 MHz	-4.65	-4.35	-3.93	0.47	8.00	Complies
11	2462 MHz	-10.01	-9.19	-9.14	-4.66	8.00	Complies

Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
3	2422 MHz	-15.21	-16.23	-15.71	-10.93	8.00	Complies
6	2437 MHz	-10.62	-10.59	-10.64	-5.85	8.00	Complies
9	2452 MHz	-16.77	-16.12	-15.62	-11.37	8.00	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-2.23	-2.52	-1.81	2.59	8.00	Complies
6	2437 MHz	-0.12	0.64	1.02	5.31	8.00	Complies
11	2462 MHz	-5.17	-5.00	-4.89	-0.25	8.00	Complies


Configuration IEEE 802.11g / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
1	2412 MHz	-8.82	-9.37	-8.26	-4.02	8.00	Complies
6	2437 MHz	-4.43	-4.09	-3.90	0.64	8.00	Complies
11	2462 MHz	-8.71	-8.52	-8.48	-3.80	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

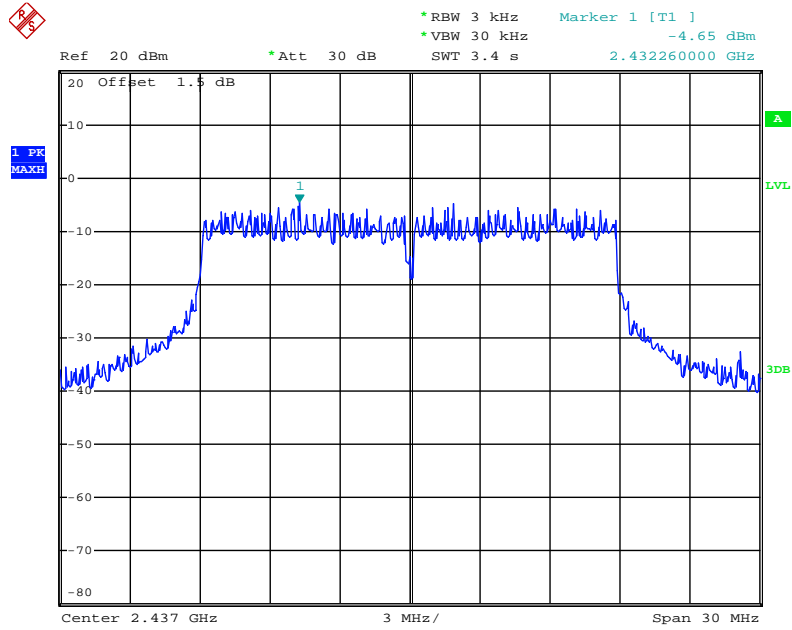


Date: 16.OCT.2013 12:40:33

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2

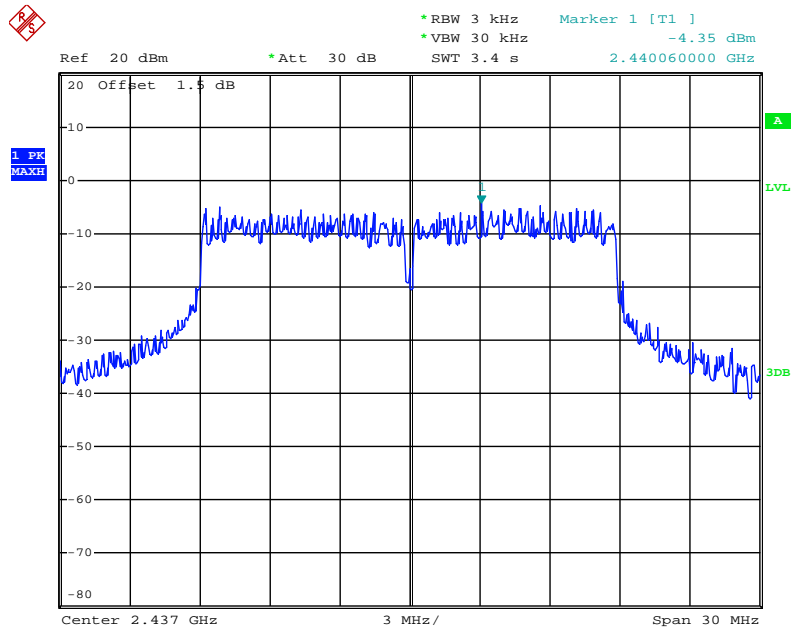


Date: 16.OCT.2013 12:41:05

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3

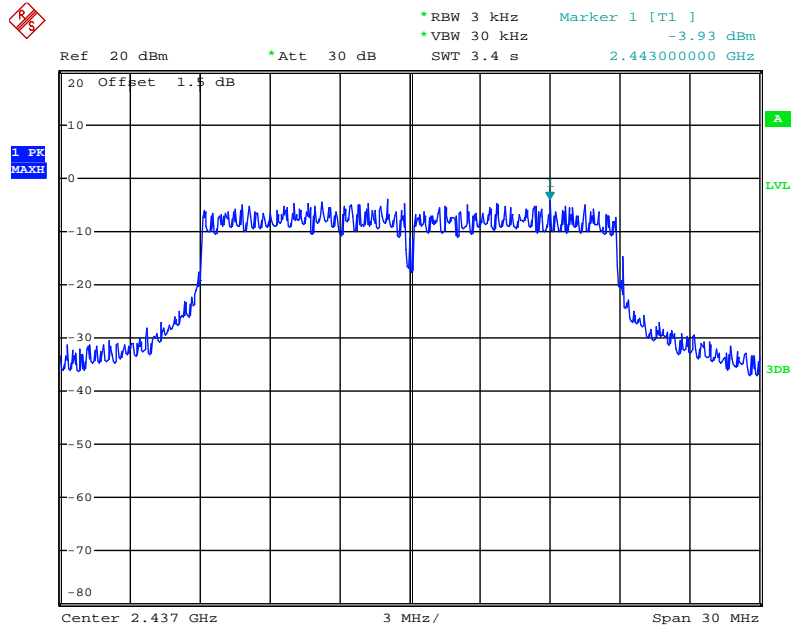


Date: 16.OCT.2013 12:42:04

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1

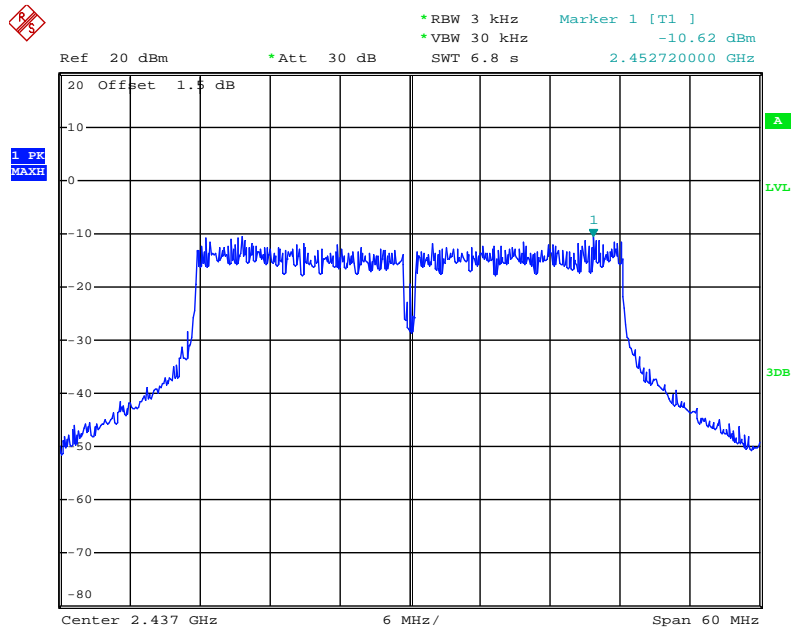


Date: 16.OCT.2013 12:50:25

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

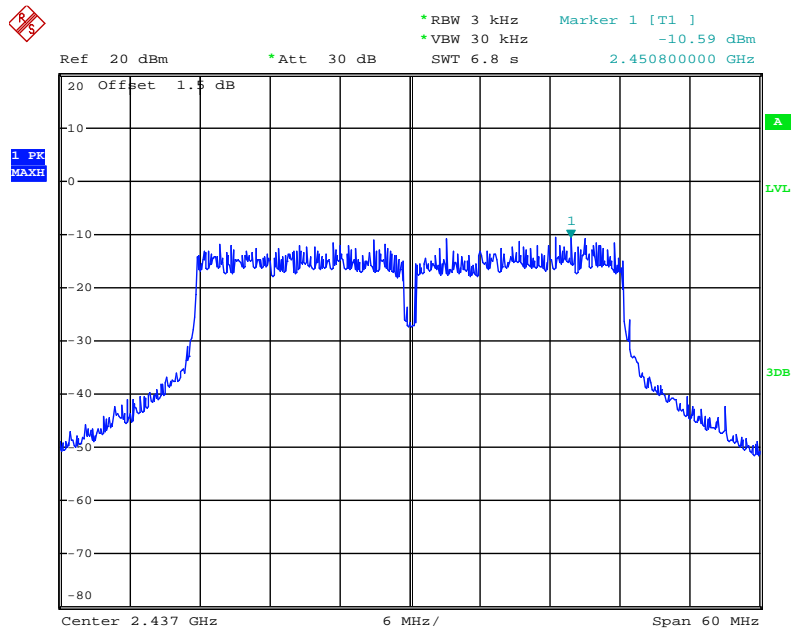


Date: 16.OCT.2013 12:51:55

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3

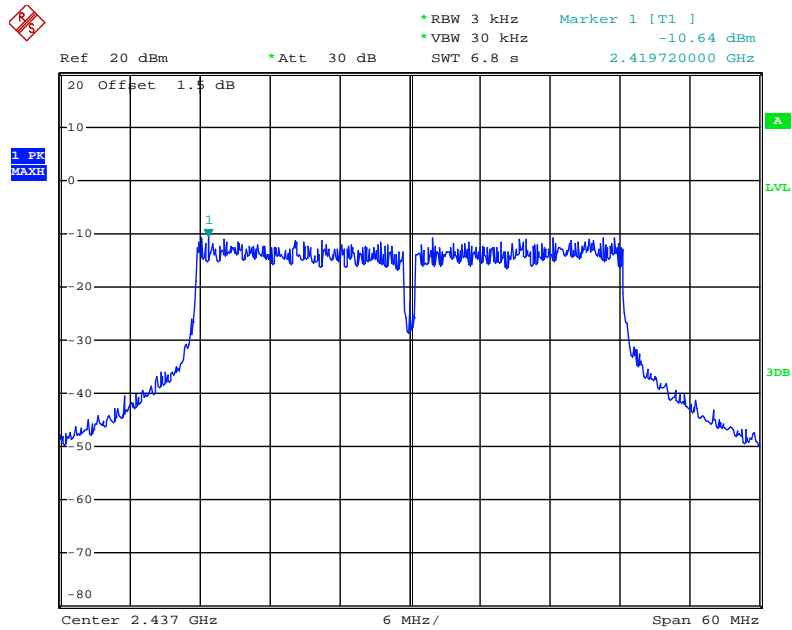


Date: 16.OCT.2013 12:52:44

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

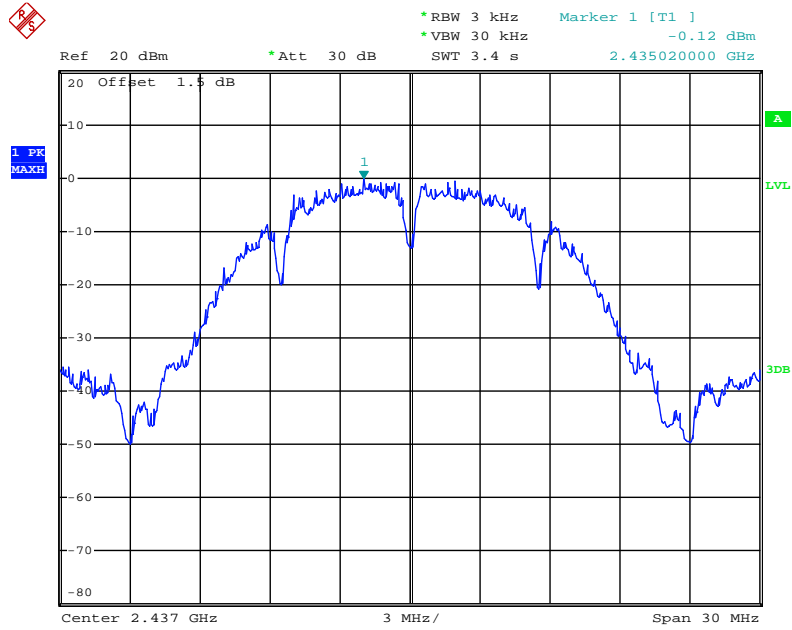


Date: 16.OCT.2013 12:23:11

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2

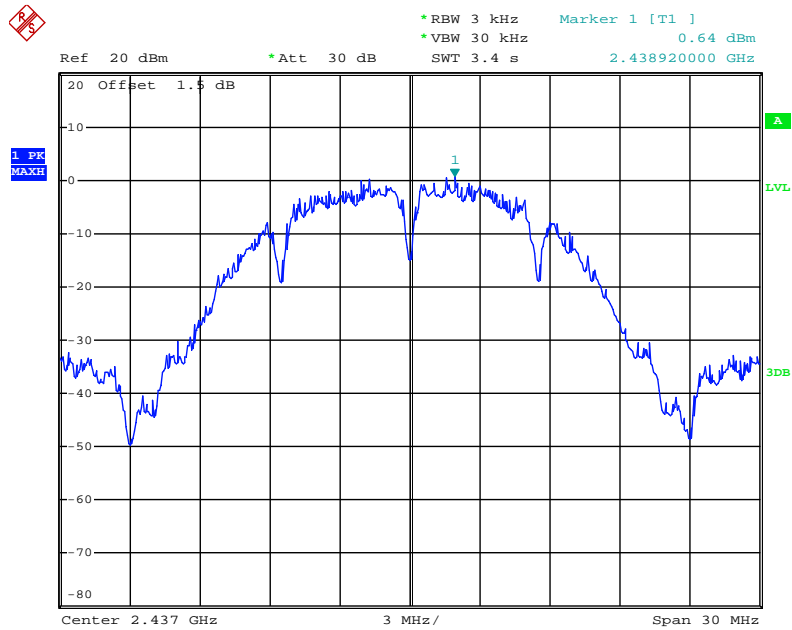


Date: 16.OCT.2013 12:22:43

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3

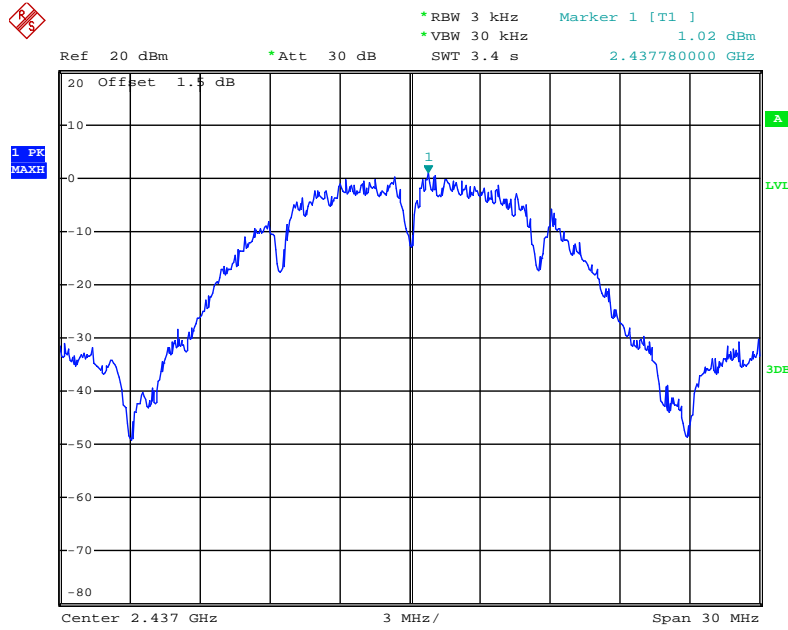


Date: 16.OCT.2013 12:21:53

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

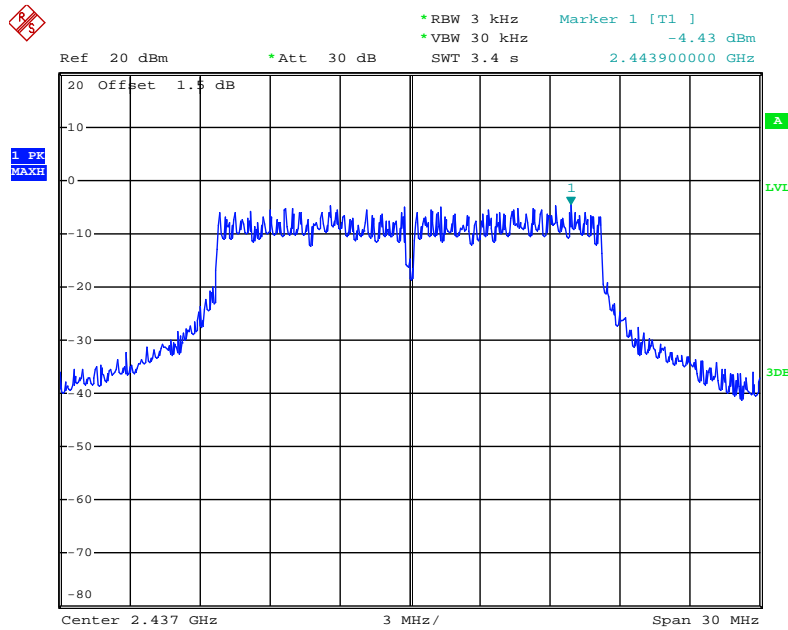


Date: 16.OCT.2013 12:30:01

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

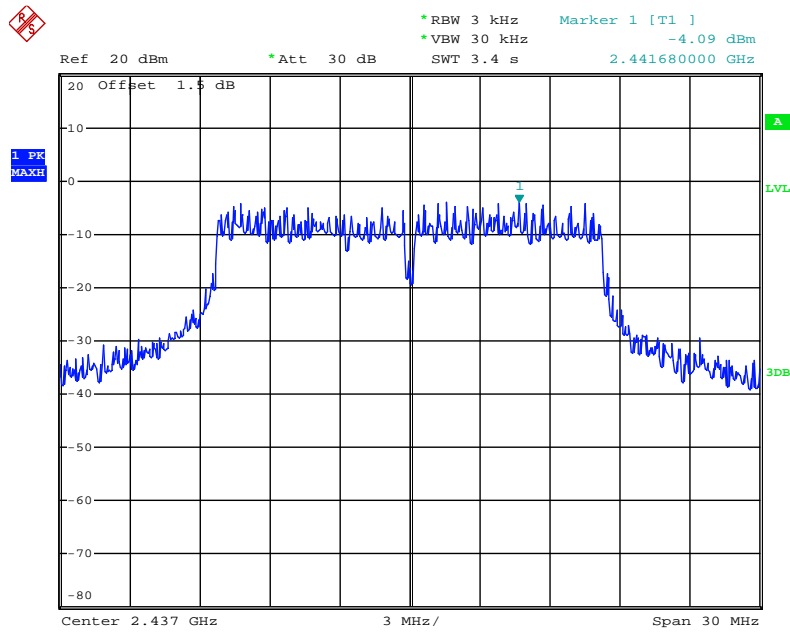

Date: 16.OCT.2013 12:31:46

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

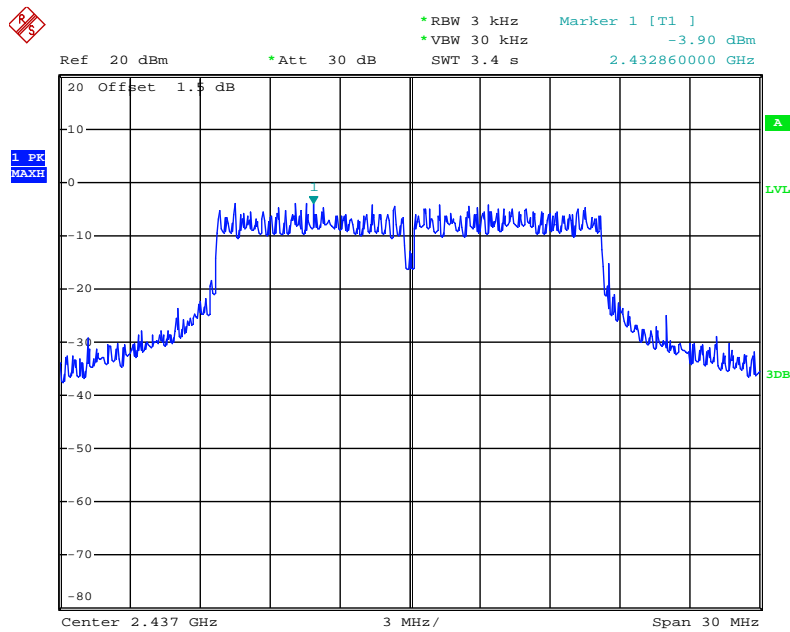

Date: 16.OCT.2013 12:32:17

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.0 DTS 6-dB signal bandwidth option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.76	17.92	500	Complies
6	2437 MHz	16.32	18.08	500	Complies
11	2462 MHz	15.36	17.84	500	Complies

Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.68	36.16	500	Complies
6	2437 MHz	34.56	36.64	500	Complies
9	2452 MHz	32.96	36.00	500	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	6.56	11.20	500	Complies
6	2437 MHz	6.56	12.96	500	Complies
11	2462 MHz	8.56	13.68	500	Complies


Configuration IEEE 802.11g / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	13.84	16.16	500	Complies
6	2437 MHz	14.56	16.80	500	Complies
11	2462 MHz	13.20	16.48	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2462 MHz / Chain 1 + Chain 2 + Chain 3

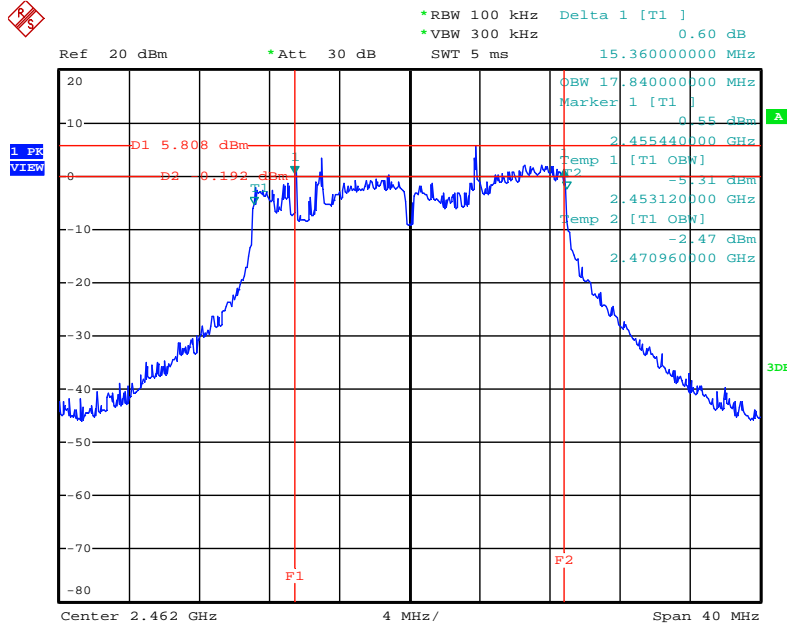


Date: 16.OCT.2013 12:13:46

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3

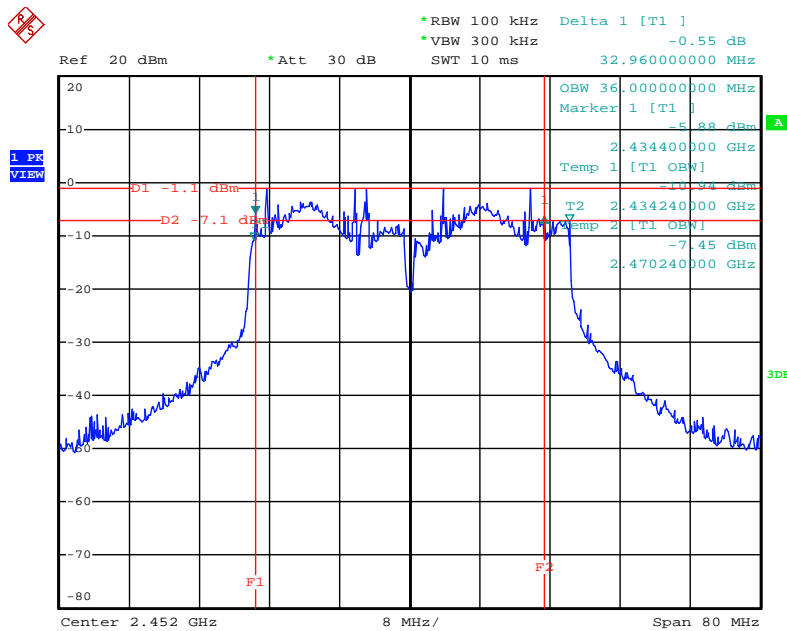


Date: 16.OCT.2013 12:14:46

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3

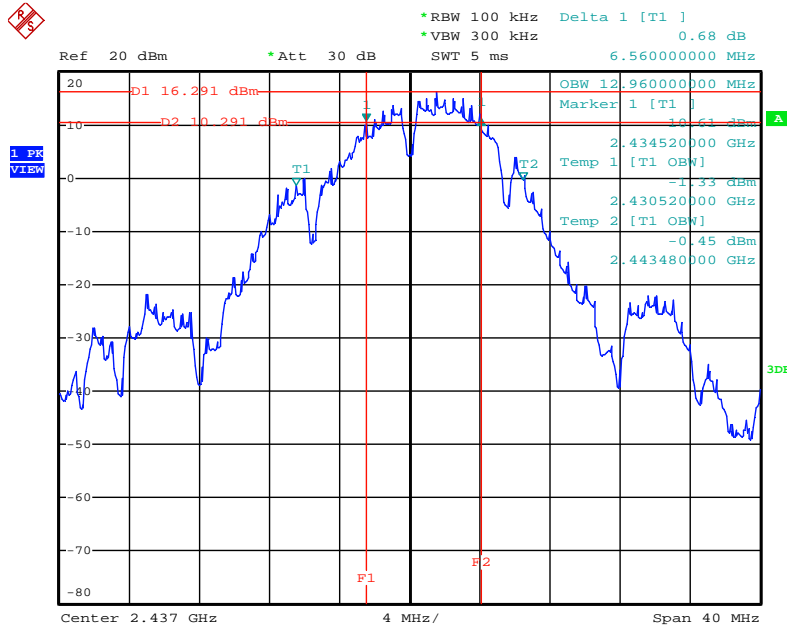

Date: 16.OCT.2013 12:09:48

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz / Chain 1 + Chain 2 + Chain 3

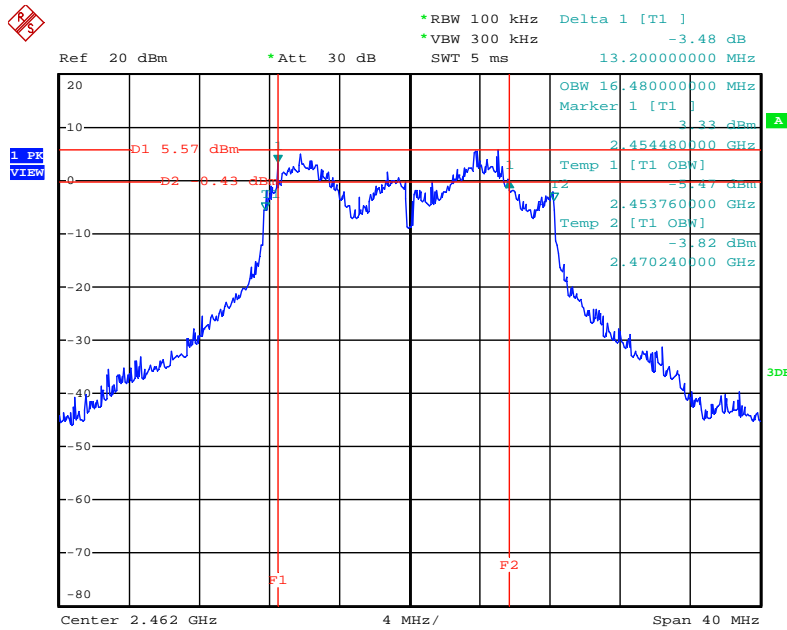

Date: 16.OCT.2013 12:10:43

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1GHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

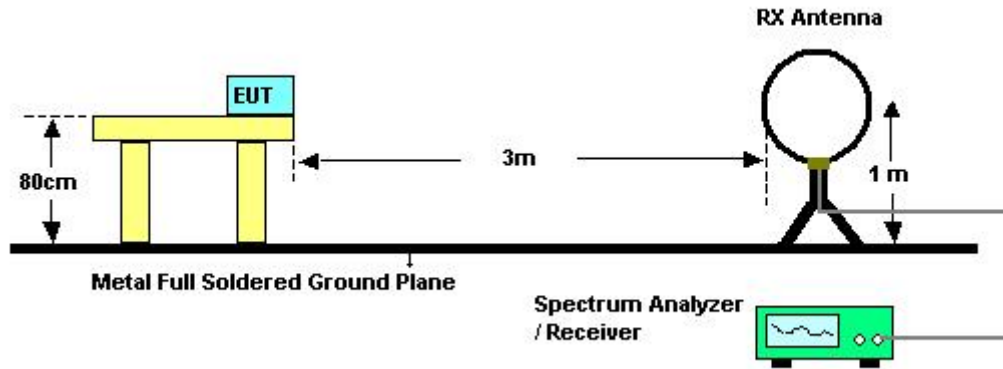

For Radiated Emissions: 30MHz~1GHz

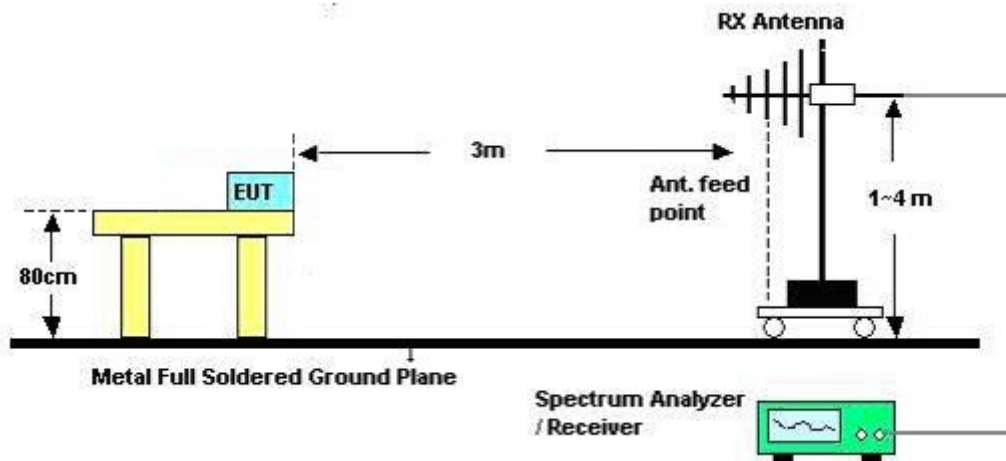

For Radiated Emissions: Above 1GHz

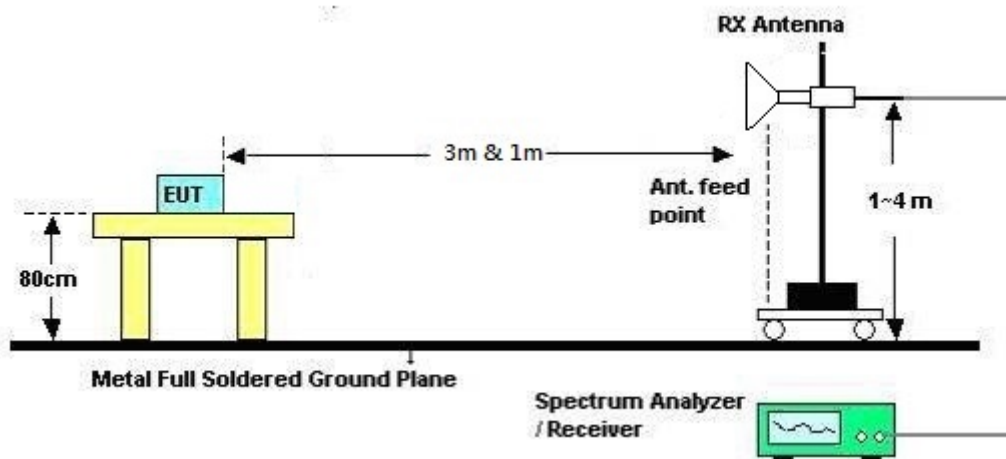

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	Normal Link
Test Date	Sep. 26, 2013	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	Normal Link
Test Mode	Mode 1		

Horizontal

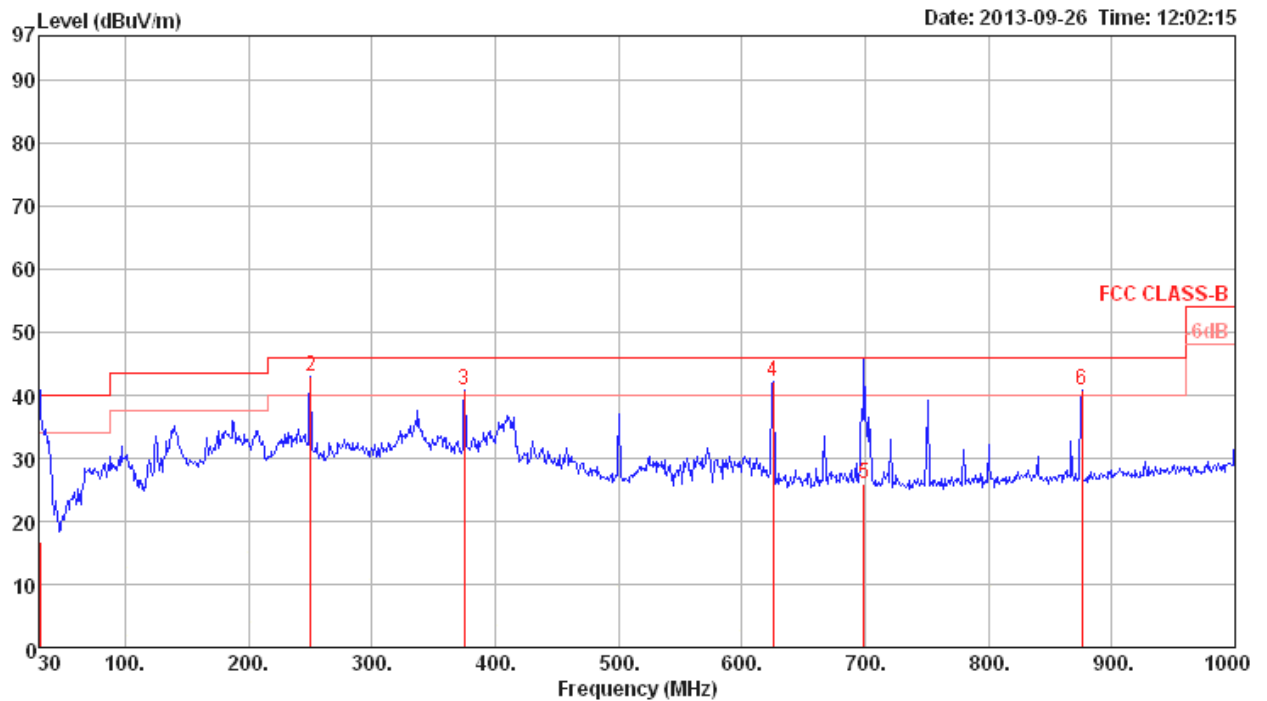

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.97	16.65	40.00	-23.35	25.60	0.63	18.22	27.80	100	46	HORIZONTAL
2	250.19	42.99	46.00	-3.01	55.44	1.78	12.77	27.00	139	76	HORIZONTAL
3	375.32	40.88	46.00	-5.12	50.71	2.20	15.40	27.43	100	0	HORIZONTAL
4	625.58	42.20	46.00	-3.80	48.52	2.90	18.85	28.07	100	0	HORIZONTAL
5	699.30	25.85	46.00	-20.15	31.66	3.10	19.09	28.00	100	112	HORIZONTAL
6	875.84	40.78	46.00	-5.22	44.42	3.46	20.35	27.45	100	0	HORIZONTAL

Vertical

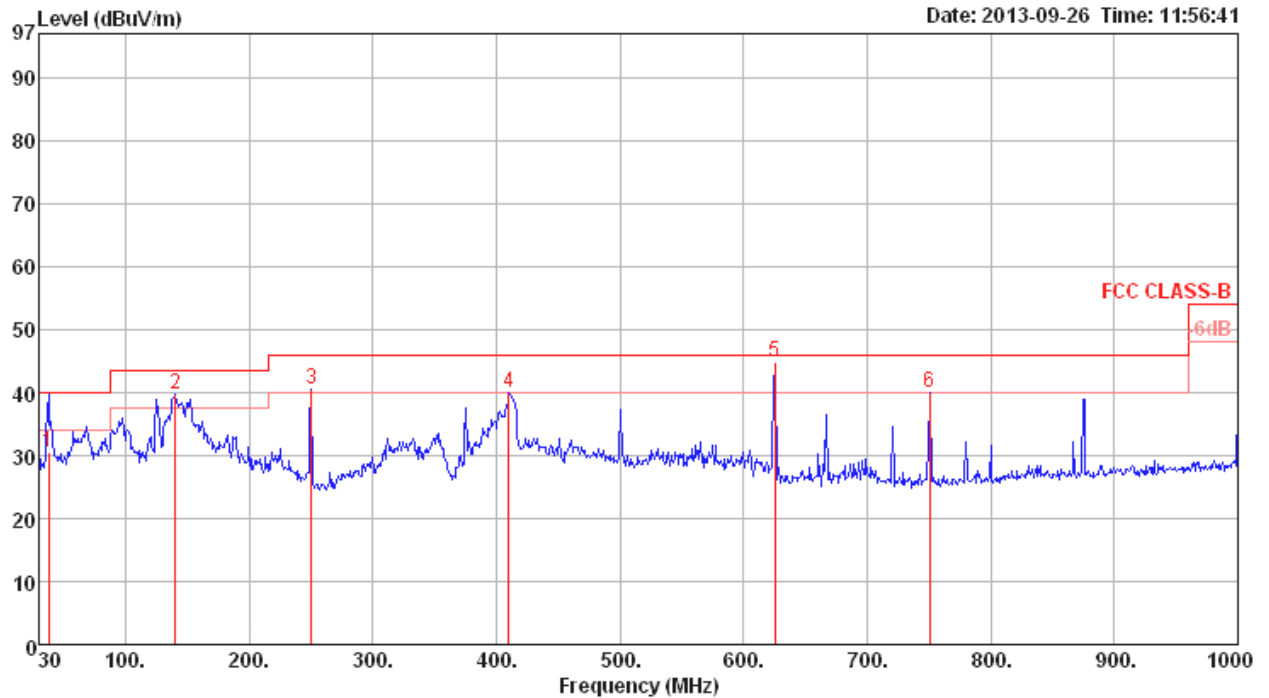

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	37.76	30.63	40.00	-9.37	43.45	0.68	14.30	27.80	100	300	VERTICAL
2	140.58	39.73	43.50	-3.77	53.39	1.43	12.30	27.39	400	0	VERTICAL
3	250.19	40.54	46.00	-5.46	52.99	1.78	12.77	27.00	400	0	VERTICAL
4	410.24	39.92	46.00	-6.08	49.00	2.34	16.23	27.65	400	0	VERTICAL
5	625.58	44.88	46.00	-1.12	51.20	2.90	18.85	28.07	100	258	VERTICAL
6	750.71	39.92	46.00	-6.08	45.09	3.20	19.43	27.80	400	0	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4816.16	48.89	74.00	-25.11	44.88	5.85	33.36	35.20	Peak	100	271	HORIZONTAL
2	4816.40	35.39	54.00	-18.61	31.38	5.85	33.36	35.20	Average	100	271	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4815.92	38.41	54.00	-15.59	34.40	5.85	33.36	35.20	Average	100	353	VERTICAL
2	4816.40	52.97	74.00	-21.03	48.96	5.85	33.36	35.20	Peak	100	353	VERTICAL



Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4867.28	55.56	74.00	-18.44	51.41	5.90	33.45	35.20	Peak	141	0 HORIZONTAL
2	4867.36	42.17	54.00	-11.83	38.02	5.90	33.45	35.20	Average	141	0 HORIZONTAL
3	7303.20	56.21	74.00	-17.79	48.02	7.13	36.48	35.42	Peak	141	247 HORIZONTAL
4	7314.48	42.36	54.00	-11.64	34.15	7.13	36.51	35.43	Average	141	247 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4867.22	48.48	54.00	-5.52	44.33	5.90	33.45	35.20	Average	100	0 VERTICAL
2	4869.68	62.76	74.00	-11.24	58.59	5.92	33.45	35.20	Peak	100	0 VERTICAL
3	7314.60	38.98	54.00	-15.02	30.77	7.13	36.51	35.43	Average	108	258 VERTICAL
4	7314.96	53.66	74.00	-20.34	45.45	7.13	36.51	35.43	Peak	108	258 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4920.20	35.34	54.00	-18.66	31.03	5.97	33.54	35.20	Average	100	340 HORIZONTAL
2	4920.64	48.15	74.00	-25.85	43.84	5.97	33.54	35.20	Peak	100	340 HORIZONTAL
3	7381.24	36.42	54.00	-17.58	28.10	7.16	36.61	35.45	Average	100	0 HORIZONTAL
4	7381.88	49.62	74.00	-24.38	41.30	7.16	36.61	35.45	Peak	100	0 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4919.30	53.07	74.00	-20.93	48.76	5.97	33.54	35.20	Peak	100	91 VERTICAL
2	4920.90	38.11	54.00	-15.89	33.80	5.97	33.54	35.20	Average	100	91 VERTICAL
3	7386.96	49.62	74.00	-24.38	41.30	7.17	36.61	35.46	Peak	100	360 VERTICAL
4	7389.52	36.45	54.00	-17.55	28.13	7.17	36.61	35.46	Average	100	360 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 16, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4842.00	44.84	74.00	-29.16	40.74	5.88	33.42	35.20	Peak	100	360 HORIZONTAL
2	4860.88	32.39	54.00	-21.61	28.24	5.90	33.45	35.20	Average	100	360 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4838.20	33.53	54.00	-20.47	29.43	5.88	33.42	35.20	Average	100	5 VERTICAL
2	4858.40	46.58	74.00	-27.42	42.43	5.90	33.45	35.20	Peak	100	5 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 16, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4867.60	35.72	54.00	-18.28	31.55	5.92	33.45	35.20 Average	100	264	HORIZONTAL
2	4870.88	48.91	74.00	-25.09	44.71	5.92	33.48	35.20 Peak	100	264	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4867.60	54.70	74.00	-19.30	50.53	5.92	33.45	35.20 Peak	100	4	VERTICAL
2	4867.92	39.14	54.00	-14.86	34.97	5.92	33.45	35.20 Average	100	4	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 16, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4896.80	33.04	54.00	-20.96	28.80	5.93	33.51	35.20	Average	100	360 HORIZONTAL
2	4899.68	46.10	74.00	-27.90	41.86	5.93	33.51	35.20	Peak	100	360 HORIZONTAL
3	7354.96	36.36	54.00	-17.64	28.08	7.16	36.56	35.44	Average	100	0 HORIZONTAL
4	7366.64	48.54	74.00	-25.46	40.24	7.16	36.59	35.45	Peak	100	0 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4899.60	33.29	54.00	-20.71	29.05	5.93	33.51	35.20	Average	100	0 VERTICAL
2	4910.40	45.22	74.00	-28.78	40.93	5.95	33.54	35.20	Peak	100	0 VERTICAL
3	7357.28	36.11	54.00	-17.89	27.83	7.16	36.56	35.44	Average	100	360 VERTICAL
4	7365.44	49.21	74.00	-24.79	40.91	7.16	36.59	35.45	Peak	100	360 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4820.96	47.52	54.00	-6.48	43.46	5.87	33.39	35.20	Average	100	278	HORIZONTAL
2	4821.00	52.47	74.00	-21.53	48.41	5.87	33.39	35.20	Peak	100	278	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4820.96	55.95	74.00	-18.05	51.89	5.87	33.39	35.20	Peak	110	347	VERTICAL
2	4820.97	52.95	54.00	-1.05	48.89	5.87	33.39	35.20	Average	110	347	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.84	52.57	74.00	-21.43	48.37	5.92	33.48	35.20	Peak	100	68 HORIZONTAL
2	4873.97	47.93	54.00	-6.07	43.73	5.92	33.48	35.20	Average	100	68 HORIZONTAL
3	7313.62	56.51	74.00	-17.49	48.30	7.13	36.51	35.43	Peak	140	253 HORIZONTAL
4	7314.20	49.94	54.00	-4.06	41.73	7.13	36.51	35.43	Average	140	253 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.97	49.76	54.00	-4.24	45.56	5.92	33.48	35.20	Average	100	262 VERTICAL
2	4874.13	53.82	74.00	-20.18	49.62	5.92	33.48	35.20	Peak	100	262 VERTICAL
3	7311.71	47.75	54.00	-6.25	39.54	7.13	36.51	35.43	Average	157	252 VERTICAL
4	7312.02	55.39	74.00	-18.61	47.18	7.13	36.51	35.43	Peak	157	252 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.96	52.91	54.00	-1.09	48.56	5.97	33.58	35.20 Average	100	10	HORIZONTAL
2	4923.98	55.74	74.00	-18.26	51.39	5.97	33.58	35.20 Peak	110	10	HORIZONTAL
3	7383.10	39.51	54.00	-14.49	31.19	7.16	36.61	35.45 Average	136	249	HORIZONTAL
4	7386.88	51.05	74.00	-22.95	42.73	7.17	36.61	35.46 Peak	136	249	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.96	53.62	54.00	-0.38	49.27	5.97	33.58	35.20 Average	100	91	VERTICAL
2	4924.06	56.82	74.00	-17.18	52.47	5.97	33.58	35.20 Peak	100	91	VERTICAL
3	7385.00	36.97	54.00	-17.03	28.65	7.17	36.61	35.46 Average	100	259	VERTICAL
4	7388.74	50.39	74.00	-23.61	42.07	7.17	36.61	35.46 Peak	100	259	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4819.92	50.18	74.00	-23.82	46.12	5.87	33.39	35.20	Peak	100	268 HORIZONTAL
2	4821.44	36.18	54.00	-17.82	32.12	5.87	33.39	35.20	Average	100	268 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4820.52	55.85	74.00	-18.15	51.79	5.87	33.39	35.20	Peak	120	6 VERTICAL
2	4821.72	40.62	54.00	-13.38	36.56	5.87	33.39	35.20	Average	120	6 VERTICAL



Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4869.76	41.05	54.00	-12.95	36.88	5.92	33.45	35.20	Average	128	275 HORIZONTAL
2	4869.80	56.08	74.00	-17.92	51.91	5.92	33.45	35.20	Peak	128	275 HORIZONTAL
3	7311.44	55.27	74.00	-18.73	47.06	7.13	36.51	35.43	Peak	169	246 HORIZONTAL
4	7311.68	41.74	54.00	-12.26	33.53	7.13	36.51	35.43	Average	169	246 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4870.12	60.14	74.00	-13.86	55.97	5.92	33.45	35.20	Peak	142	4 VERTICAL
2	4879.60	46.38	54.00	-7.62	42.18	5.92	33.48	35.20	Average	142	4 VERTICAL
3	7310.04	48.80	54.00	-5.20	40.59	7.13	36.51	35.43	Average	102	258 VERTICAL
4	7310.88	63.01	74.00	-10.99	54.80	7.13	36.51	35.43	Peak	102	258 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.28	36.24	54.00	-17.76	31.89	5.97	33.58	35.20	Average	102	335	HORIZONTAL
2	4922.36	49.20	74.00	-24.80	44.85	5.97	33.58	35.20	Peak	102	335	HORIZONTAL
3	7391.08	36.61	54.00	-17.39	28.29	7.17	36.61	35.46	Average	100	360	HORIZONTAL
4	7393.68	49.03	74.00	-24.97	40.68	7.17	36.64	35.46	Peak	100	360	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4922.40	39.16	54.00	-14.84	34.81	5.97	33.58	35.20	Average	138	8	VERTICAL
2	4923.76	52.77	74.00	-21.23	48.42	5.97	33.58	35.20	Peak	138	8	VERTICAL
3	7378.20	49.18	74.00	-24.82	40.86	7.16	36.61	35.45	Peak	100	0	VERTICAL
4	7384.00	36.60	54.00	-17.40	28.28	7.17	36.61	35.46	Average	100	0	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure
2. The radiated emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test date	Oct. 15, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.80	69.89	74.00	-4.11	37.75	4.09	28.05	0.00	Peak	115	126	HORIZONTAL
2	2390.00	53.02	54.00	-0.98	20.88	4.09	28.05	0.00	Average	115	126	HORIZONTAL
3	2418.80	115.52			83.28	4.11	28.13	0.00	Peak	115	126	HORIZONTAL
4	2419.20	103.60			71.36	4.11	28.13	0.00	Average	115	126	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2352.80	51.30	54.00	-2.70	19.26	4.07	27.97	0.00	Average	108	302	HORIZONTAL
2	2386.40	65.87	74.00	-8.13	33.73	4.09	28.05	0.00	Peak	108	302	HORIZONTAL
3	2434.60	109.63			77.33	4.12	28.18	0.00	Average	108	302	HORIZONTAL
4	2435.40	122.17			89.87	4.12	28.18	0.00	Peak	108	302	HORIZONTAL
5	2486.70	67.12	74.00	-6.88	34.66	4.16	28.30	0.00	Peak	108	302	HORIZONTAL
6	2500.00	52.63	54.00	-1.37	20.16	4.17	28.30	0.00	Average	108	302	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2371.60	49.20	54.00	-4.80	17.11	4.08	28.01	0.00	Average	132	297	HORIZONTAL
2	2372.80	62.56	74.00	-11.44	30.47	4.08	28.01	0.00	Peak	132	297	HORIZONTAL
3	2468.00	106.17			73.81	4.14	28.22	0.00	Average	132	297	HORIZONTAL
4	2468.40	118.92			86.52	4.14	28.26	0.00	Peak	132	297	HORIZONTAL
5	2483.50	53.52	54.00	-0.48	21.10	4.16	28.26	0.00	Average	132	297	HORIZONTAL
6	2484.30	73.22	74.00	-0.78	40.80	4.16	28.26	0.00	Peak	132	297	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
Test date	Oct. 16, 2013		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.60	71.91	74.00	-2.09	39.77	4.09	28.05	0.00	137	124	HORIZONTAL
2	2390.00	53.69	54.00	-0.31	21.55	4.09	28.05	0.00	137	124	HORIZONTAL
3	2408.00	108.30			76.10	4.11	28.09	0.00	137	124	HORIZONTAL
4	2409.20	95.19			62.99	4.11	28.09	0.00	137	124	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2388.40	72.90	74.00	-1.10	40.76	4.09	28.05	0.00	114	121	HORIZONTAL
2	2389.60	53.60	54.00	-0.40	21.46	4.09	28.05	0.00	114	121	HORIZONTAL
3	2419.80	102.66			70.41	4.12	28.13	0.00	114	121	HORIZONTAL
4	2419.80	115.78			83.53	4.12	28.13	0.00	114	121	HORIZONTAL
5	2487.50	71.34	74.00	-2.66	38.87	4.17	28.30	0.00	114	121	HORIZONTAL
6	2488.30	51.21	54.00	-2.79	18.74	4.17	28.30	0.00	114	121	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2468.40	110.91			78.51	4.14	28.26	0.00	131	294	HORIZONTAL
2	2469.20	97.85			65.45	4.14	28.26	0.00	131	294	HORIZONTAL
3	2483.50	53.18	54.00	-0.82	20.76	4.16	28.26	0.00	131	294	HORIZONTAL
4	2483.90	73.83	74.00	-0.17	41.41	4.16	28.26	0.00	131	294	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2013		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2384.00	52.63	54.00	-1.37	20.50	4.08	28.05	0.00	Average	110	128	HORIZONTAL
2	2386.80	66.01	74.00	-7.99	33.87	4.09	28.05	0.00	Peak	110	128	HORIZONTAL
3	2413.60	116.58			84.38	4.11	28.09	0.00	Average	110	128	HORIZONTAL
4	2414.80	120.52			88.32	4.11	28.09	0.00	Peak	110	128	HORIZONTAL
5	2499.90	63.30	74.00	-10.70	30.83	4.17	28.30	0.00	Peak	110	128	HORIZONTAL
6	2500.00	49.63	54.00	-4.37	17.16	4.17	28.30	0.00	Average	110	128	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2352.80	53.51	54.00	-0.49	21.47	4.07	27.97	0.00	Average	109	122	HORIZONTAL
2	2352.80	64.16	74.00	-9.84	32.12	4.07	27.97	0.00	Peak	109	122	HORIZONTAL
3	2434.60	114.70			82.40	4.12	28.18	0.00	Average	109	122	HORIZONTAL
4	2434.60	118.94			86.64	4.12	28.18	0.00	Peak	109	122	HORIZONTAL
5	2484.70	52.70	54.00	-1.30	20.28	4.16	28.26	0.00	Average	109	122	HORIZONTAL
6	2485.10	63.70	74.00	-10.30	31.24	4.16	28.30	0.00	Peak	109	122	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2374.80	64.97	74.00	-9.03	32.88	4.08	28.01	0.00	Peak	111	125	HORIZONTAL
2	2377.20	53.88	54.00	-0.12	21.79	4.08	28.01	0.00	Average	111	125	HORIZONTAL
3	2460.40	114.82			82.46	4.14	28.22	0.00	Average	111	125	HORIZONTAL
4	2460.40	118.54			86.18	4.14	28.22	0.00	Peak	111	125	HORIZONTAL
5	2483.50	51.52	54.00	-2.48	19.10	4.16	28.26	0.00	Average	111	125	HORIZONTAL
6	2483.50	64.29	74.00	-9.71	31.87	4.16	28.26	0.00	Peak	111	125	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2462 MHz.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Oct. 15, 2013		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2390.00	53.85	54.00	-0.15	21.71	4.09	28.05	0.00	Average	110	134	HORIZONTAL
2	2390.00	67.97	74.00	-6.03	35.83	4.09	28.05	0.00	Peak	110	134	HORIZONTAL
3	2410.00	104.23			72.03	4.11	28.09	0.00	Average	110	134	HORIZONTAL
4	2410.40	116.32			84.12	4.11	28.09	0.00	Peak	110	134	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.80	68.25	74.00	-5.75	36.11	4.09	28.05	0.00	Peak	108	125	HORIZONTAL
2	2389.20	53.53	54.00	-0.47	21.39	4.09	28.05	0.00	Average	108	125	HORIZONTAL
3	2438.20	110.46			78.15	4.13	28.18	0.00	Average	108	125	HORIZONTAL
4	2438.20	122.25			89.94	4.13	28.18	0.00	Peak	108	125	HORIZONTAL
5	2483.50	53.70	54.00	-0.30	21.28	4.16	28.26	0.00	Average	108	125	HORIZONTAL
6	2483.50	68.01	74.00	-5.99	35.59	4.16	28.26	0.00	Peak	108	125	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2380.40	50.16	54.00	-3.84	18.07	4.08	28.01	0.00	Average	133	303	HORIZONTAL
2	2382.40	61.37	74.00	-12.63	29.28	4.08	28.01	0.00	Peak	133	303	HORIZONTAL
3	2468.00	105.80			73.44	4.14	28.22	0.00	Average	133	303	HORIZONTAL
4	2468.00	118.14			85.78	4.14	28.22	0.00	Peak	133	303	HORIZONTAL
5	2483.50	53.33	54.00	-0.67	20.91	4.16	28.26	0.00	Average	133	303	HORIZONTAL
6	2483.50	73.32	74.00	-0.68	40.90	4.16	28.26	0.00	Peak	133	303	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

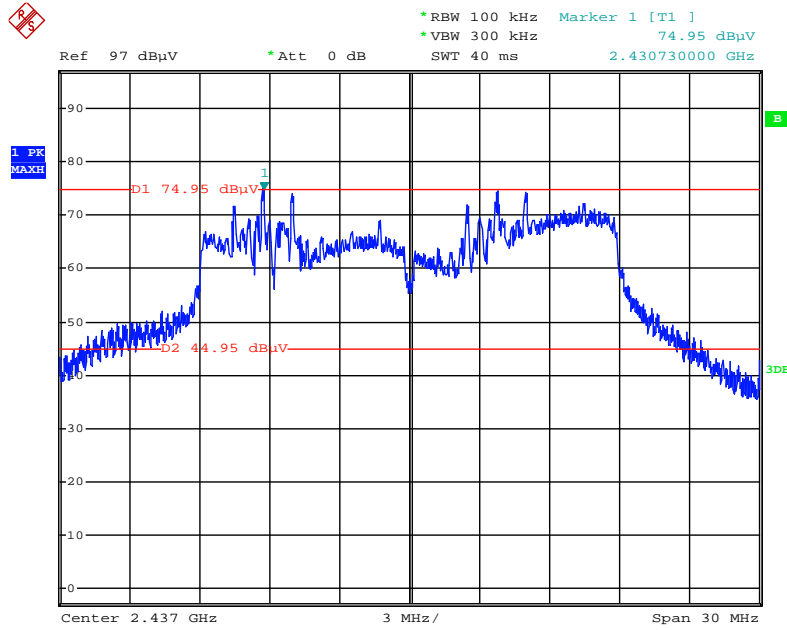


Date: 16.OCT.2013 15:04:11

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

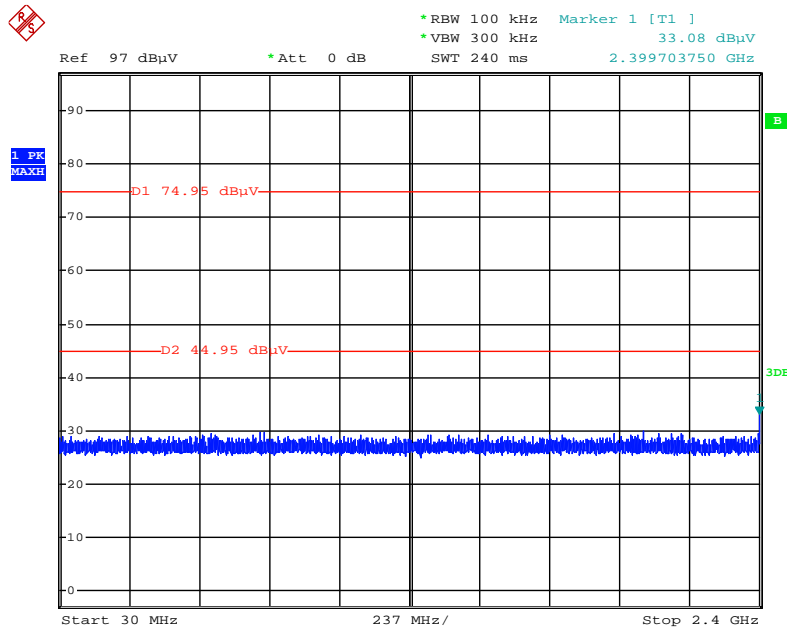


Date: 16.OCT.2013 15:08:45

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

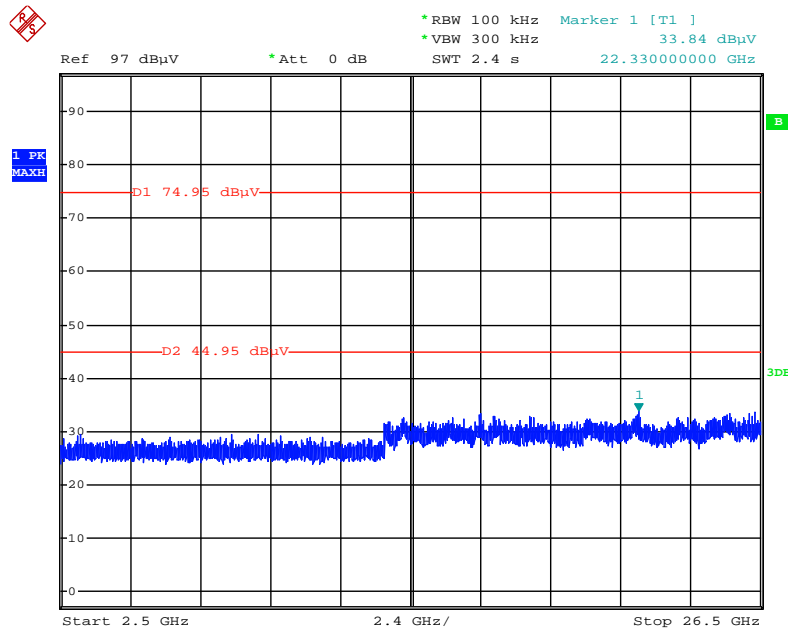


Date: 16.OCT.2013 15:09:32

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

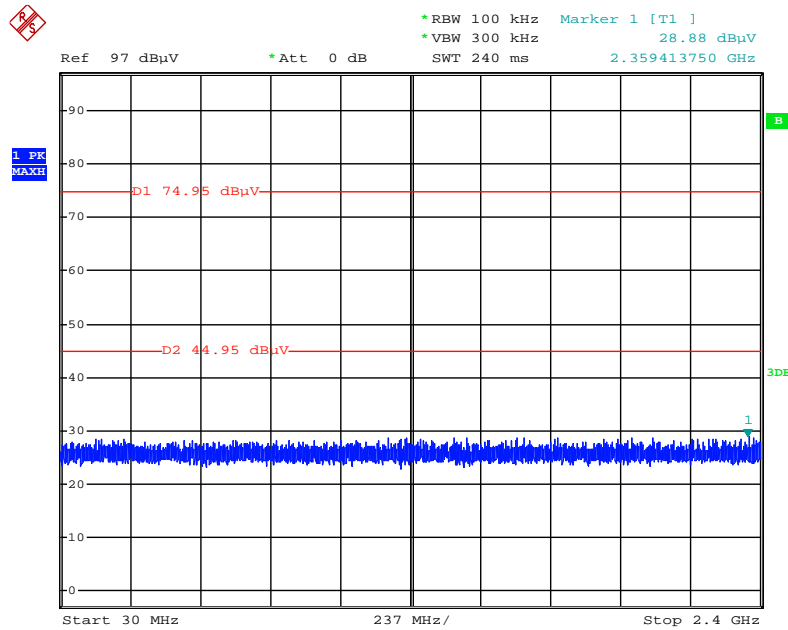


Date: 16.OCT.2013 15:10:36

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

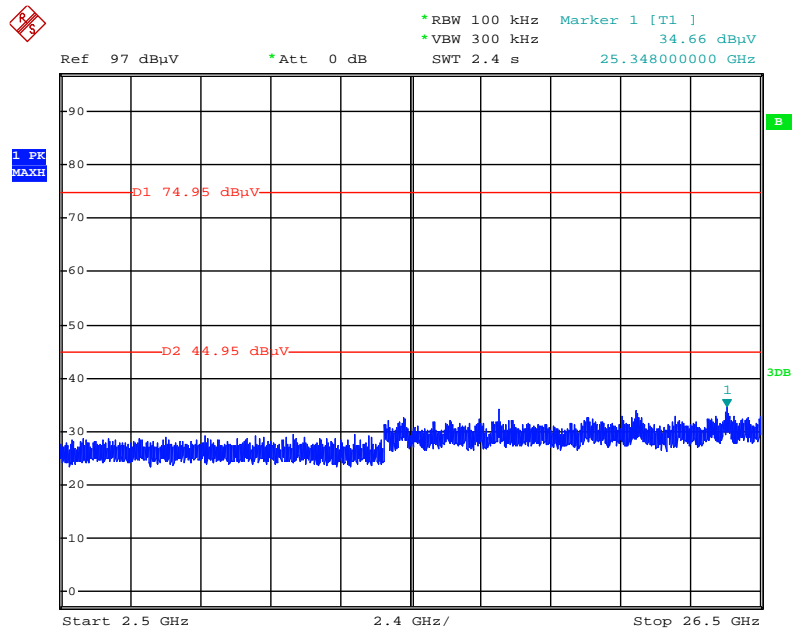


Date: 16.OCT.2013 15:11:13

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

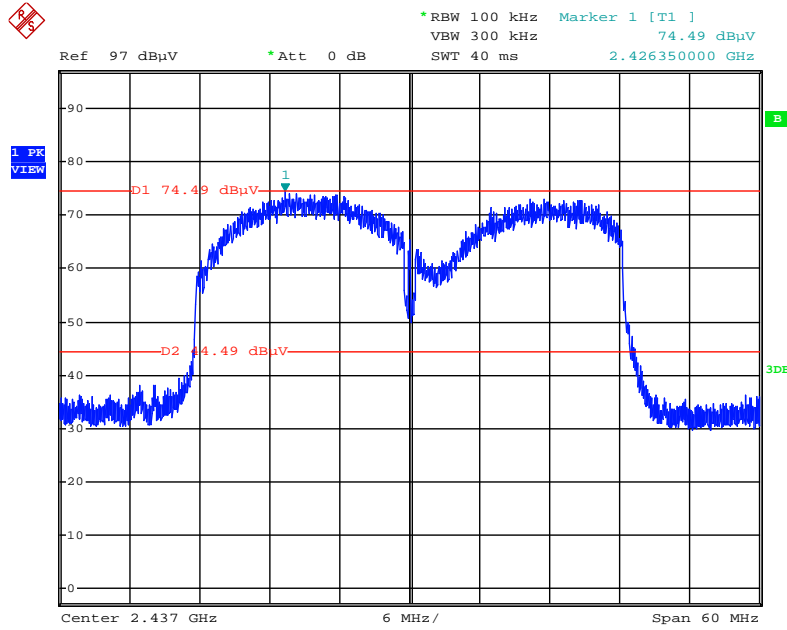


Date: 16.OCT.2013 05:35:17

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

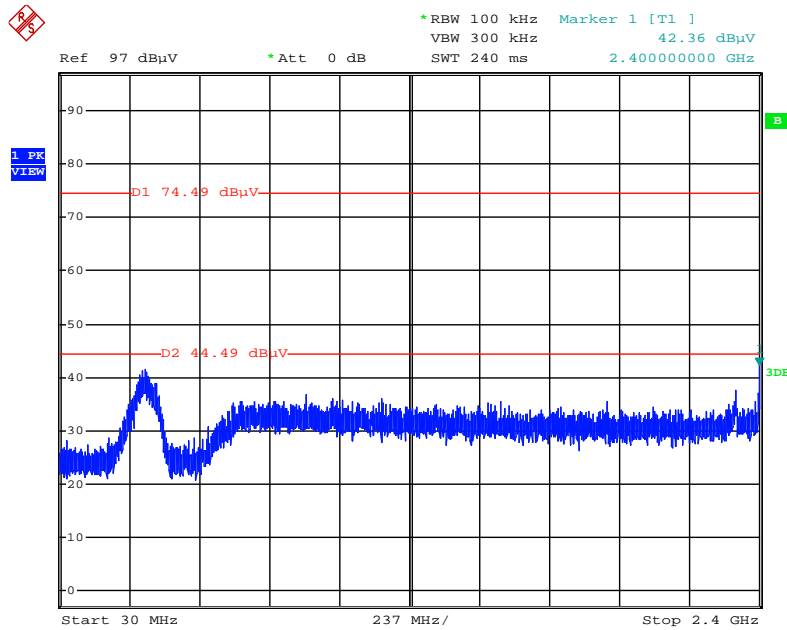


Date: 16.OCT.2013 05:36:31

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

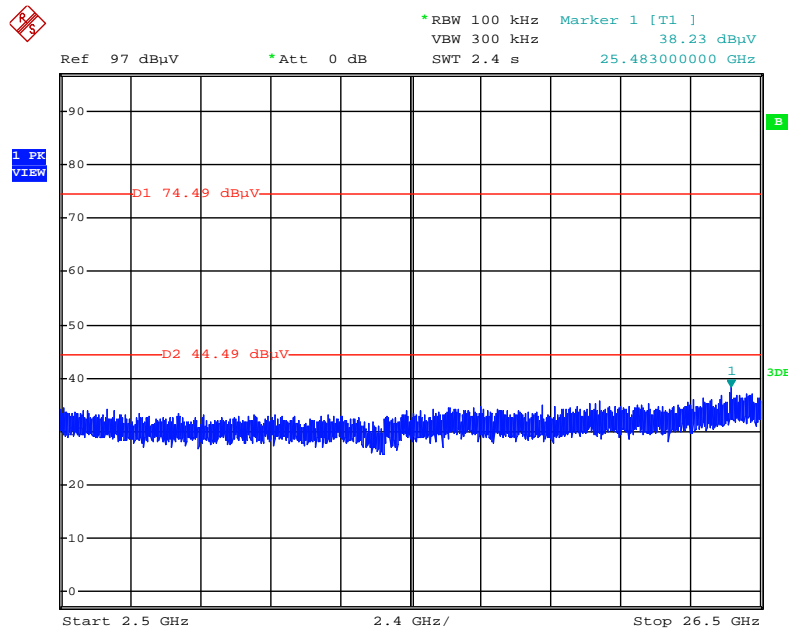


Date: 16.OCT.2013 05:37:07

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

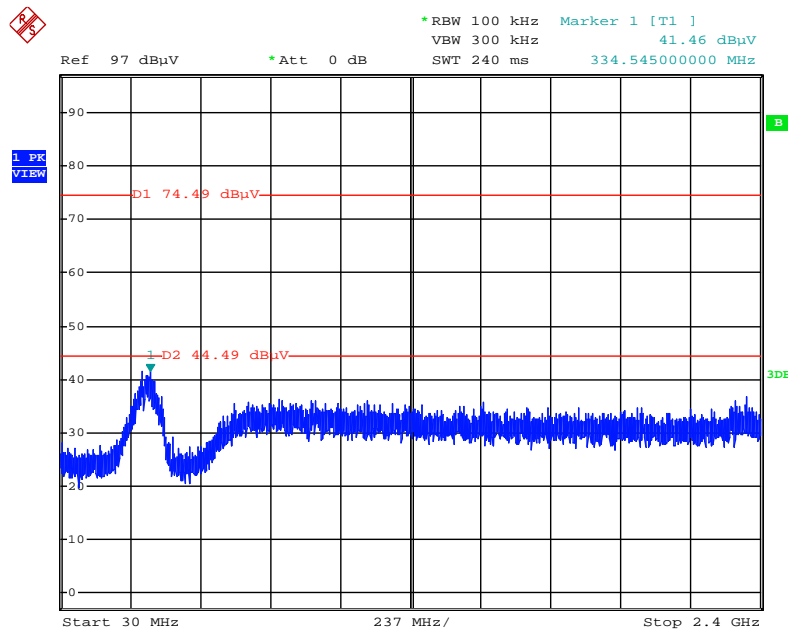


Date: 16.OCT.2013 05:38:21

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

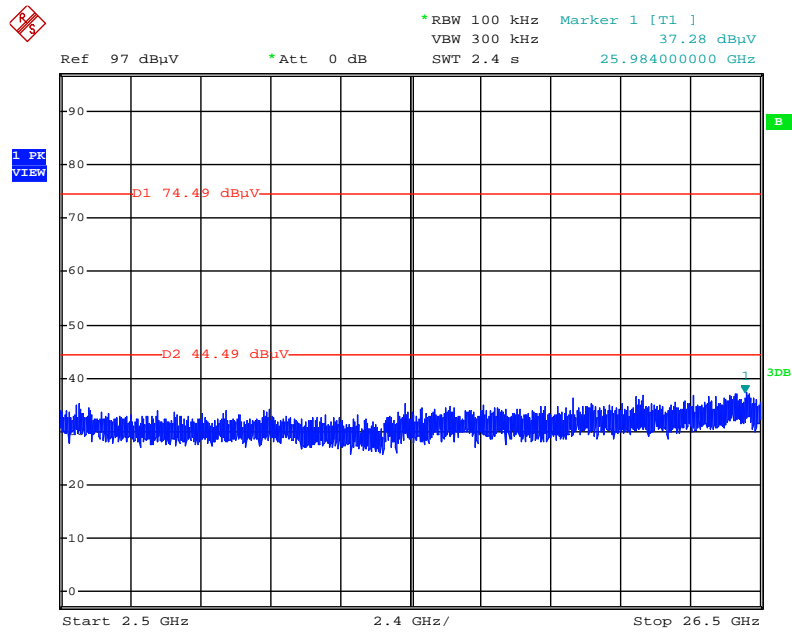


Date: 16.OCT.2013 05:37:53

Plot on Configuration IEEE 802.11b / Reference Level

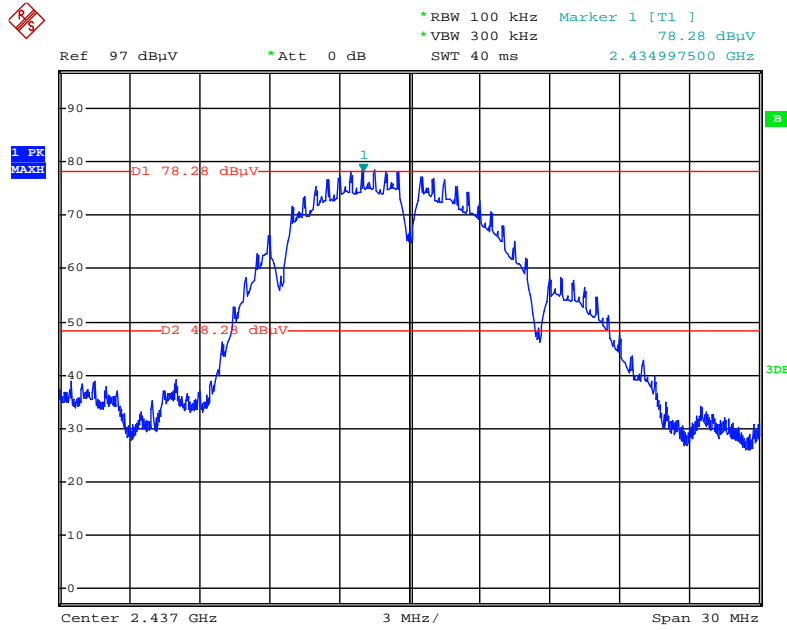


Date: 16.OCT.2013 14:34:16

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

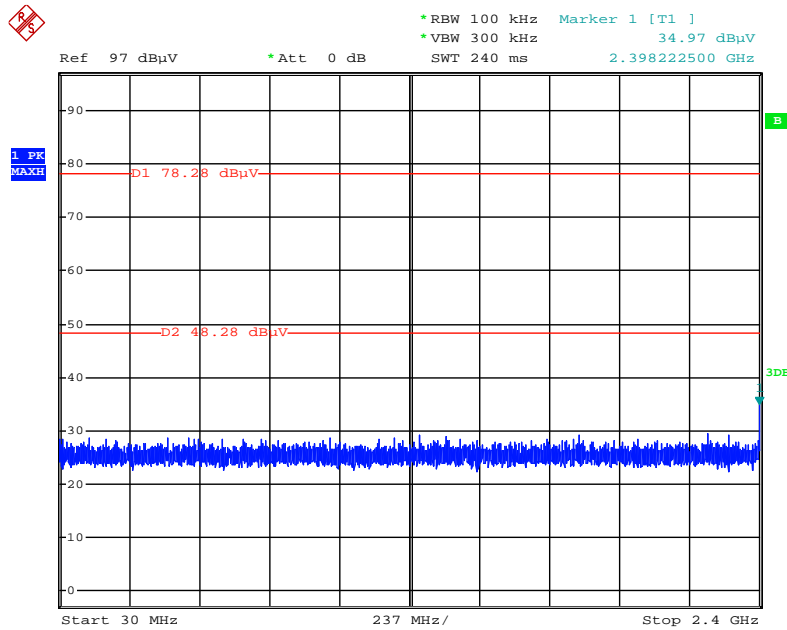


Date: 16.OCT.2013 14:49:10

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

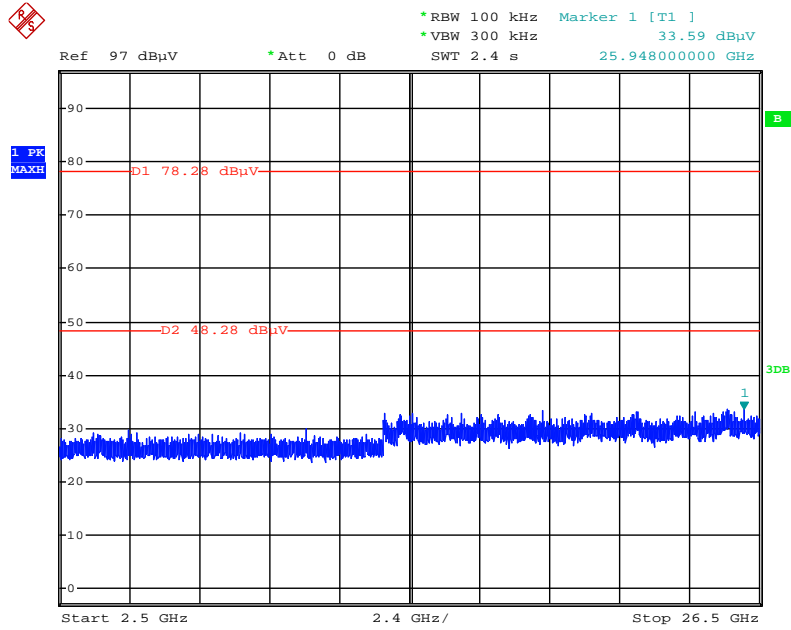


Date: 16.OCT.2013 14:49:53

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

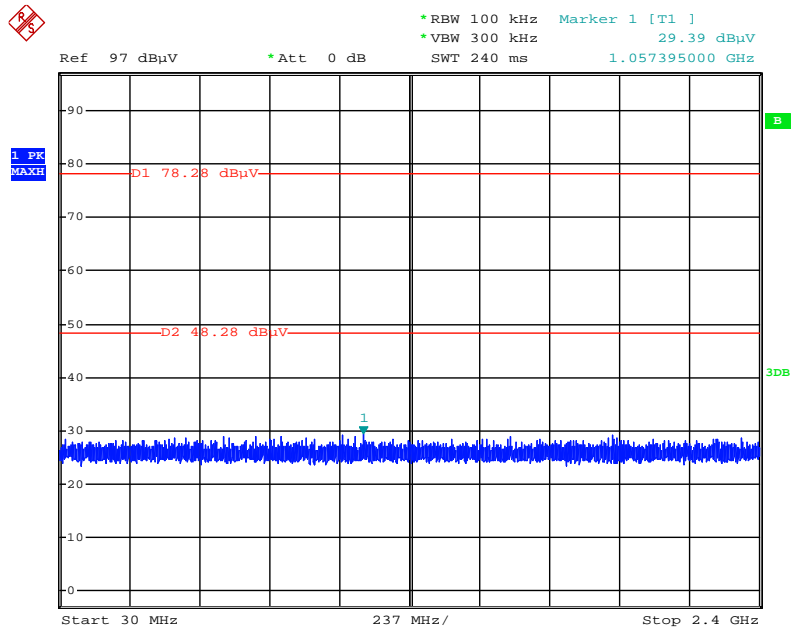


Date: 16.OCT.2013 14:46:46

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

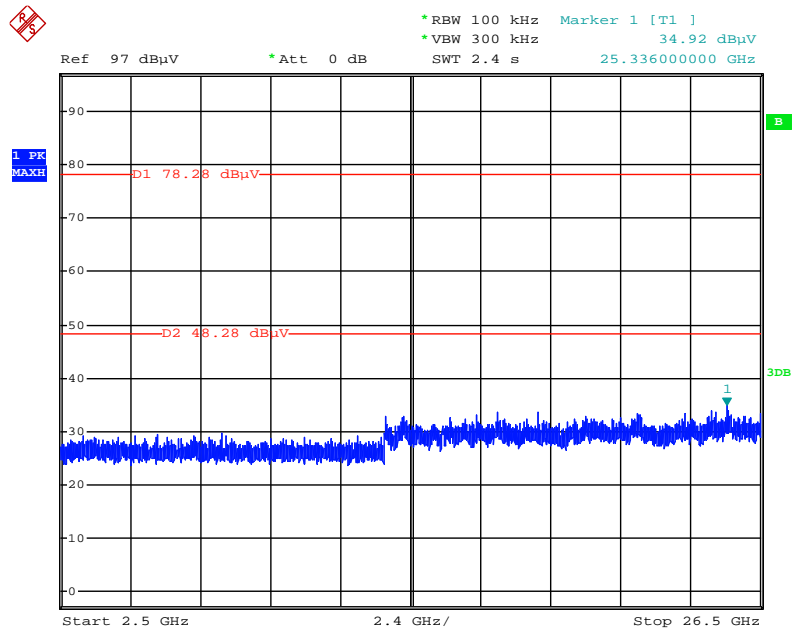


Date: 16.OCT.2013 14:47:42

Plot on Configuration IEEE 802.11g / Reference Level

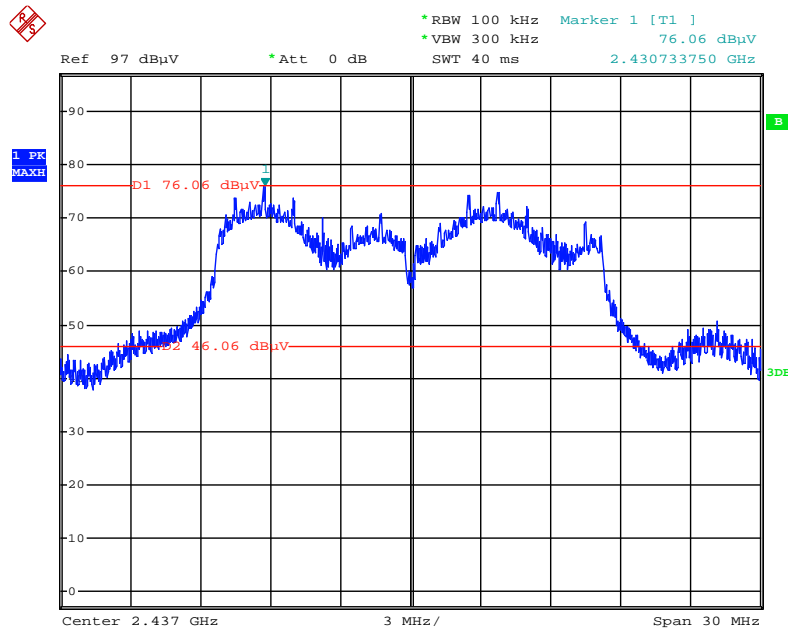


Date: 16.OCT.2013 14:53:58

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

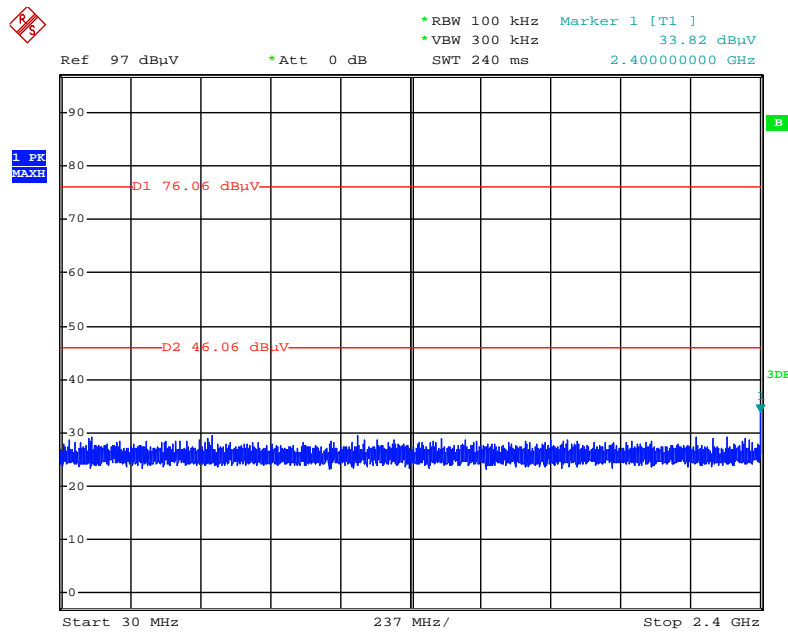


Date: 16.OCT.2013 14:55:32

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

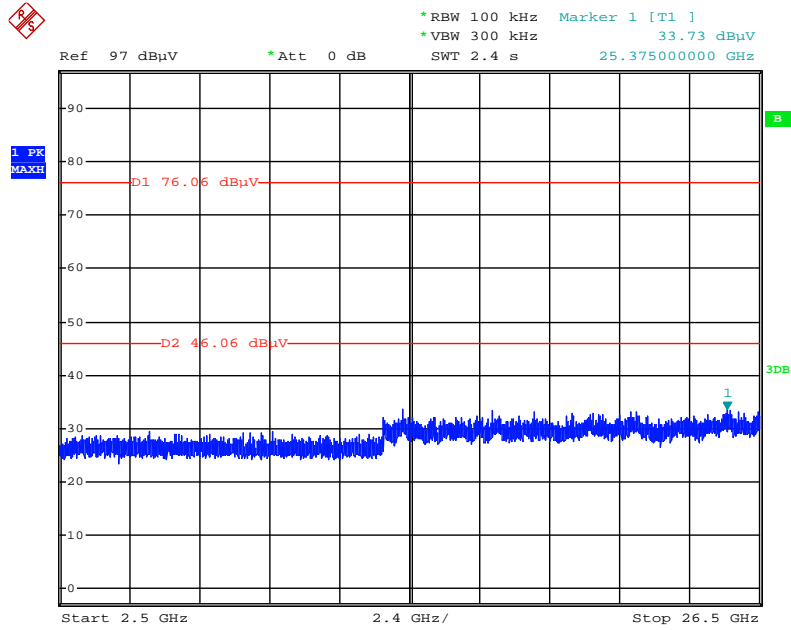


Date: 16.OCT.2013 14:56:48

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

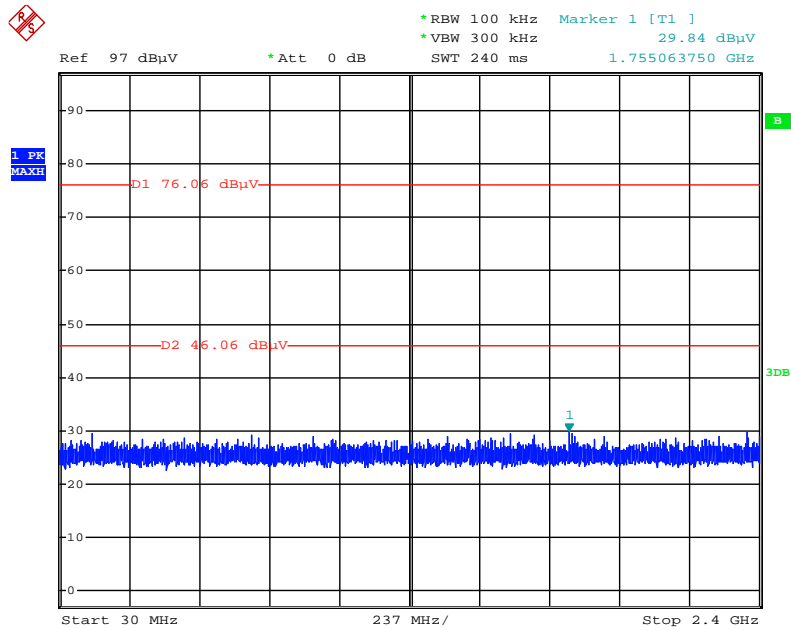

Date: 16.OCT.2013 14:58:26

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

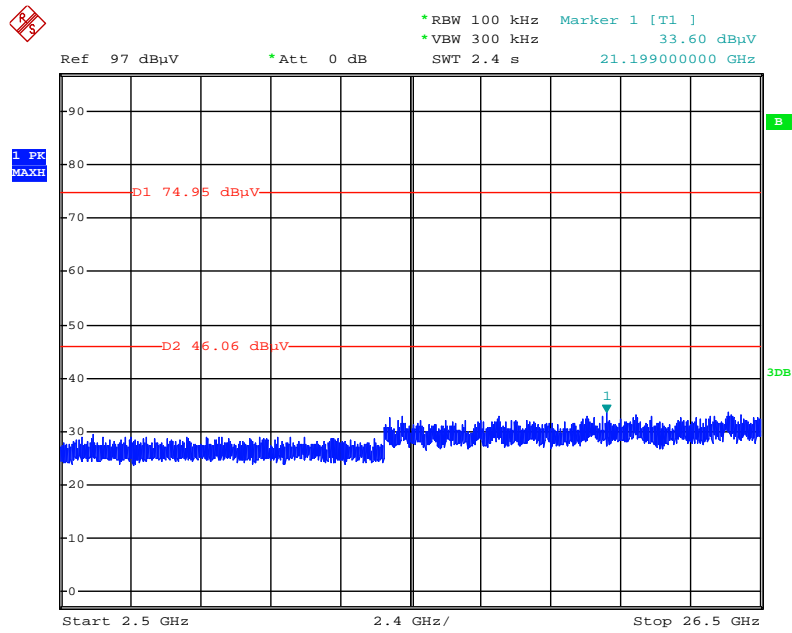

Date: 16.OCT.2013 15:15:31

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Jul. 17, 2013	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Oct. 24, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Nov. 26, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30MHz - 1GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1GHz ~ 26.5GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1GHz ~ 26.5GHz	Nov. 18, 2012	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-3	N/A	1GHz – 40GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1GHz – 40GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSP40	100304	9kHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1GHz – 26.5GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1GHz – 26.5GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1GHz – 26.5GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1GHz – 26.5GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1GHz – 26.5GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

*Calibration Interval of instruments listed above is two year.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch				
Receiver VSWR 1=	-0.080	dB	U-shaped	0.060
AMN/LISN VSWR 2=				
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	±0.038	dB	K=2	0.019
Attenuator	±0.047	dB	K=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726