


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	26°C	Humidity	60%
Test Engineer	David Tseng	Configurations	EUT with Adapter 1

Horizontal

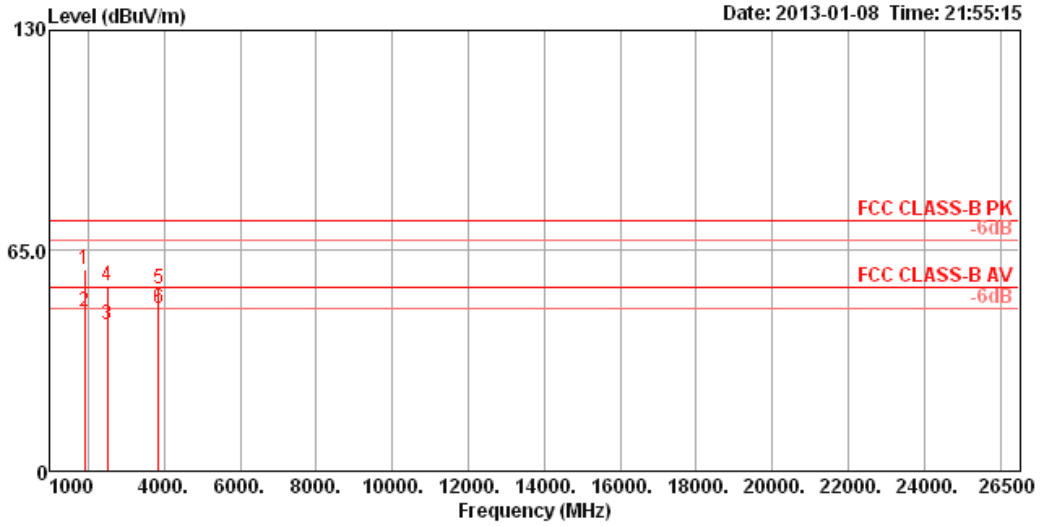

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 pk	1899.99	59.62	74.00	-14.38	65.26	3.33	27.06	36.03	103	11 HORIZONTAL	Peak
2	1900.00	47.21	54.00	-6.79	52.85	3.33	27.06	36.03	103	11 HORIZONTAL	Average
3	2499.95	43.07	54.00	-10.93	47.10	3.74	27.90	35.67	194	44 HORIZONTAL	Average
4	2499.95	54.63	74.00	-19.37	58.66	3.74	27.90	35.67	194	44 HORIZONTAL	Peak
5	3849.72	53.55	74.00	-20.45	52.92	4.85	31.46	35.68	100	57 HORIZONTAL	Peak
6 pp	3849.96	48.21	54.00	-5.79	47.58	4.85	31.46	35.68	100	57 HORIZONTAL	Average

Vertical

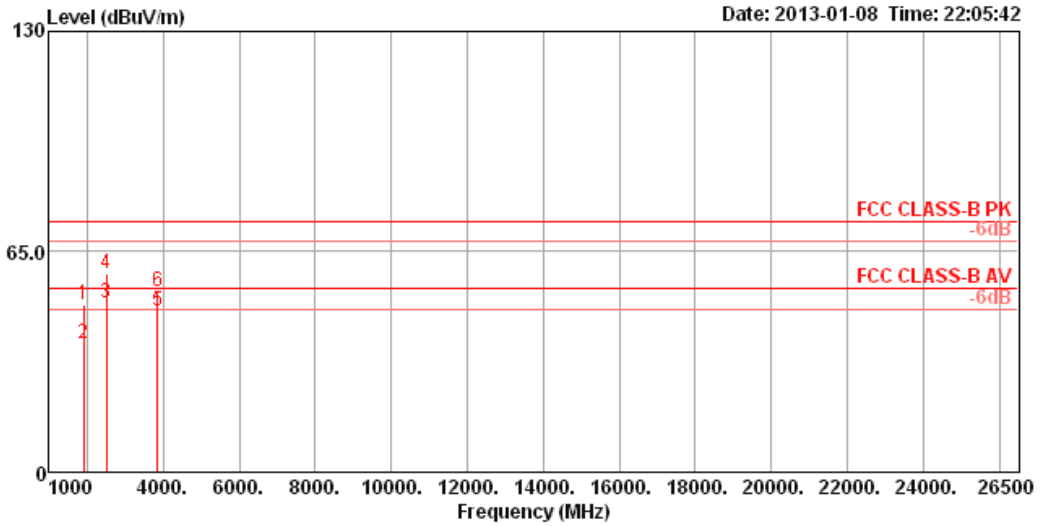

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1899.81	49.47	74.00	-24.53	55.11	3.33	27.06	36.03	100	33	VERTICAL	Peak
2	1900.02	38.03	54.00	-15.97	43.67	3.33	27.06	36.03	100	33	VERTICAL	Average
3	2499.93	50.01	54.00	-3.99	54.04	3.74	27.90	35.67	144	360	VERTICAL	Average
4	2500.29	58.47	74.00	-15.53	62.50	3.74	27.90	35.67	144	360	VERTICAL	Peak
5	3850.00	47.72	54.00	-6.28	47.09	4.85	31.46	35.68	101	7	VERTICAL	Average
6	3850.17	53.39	74.00	-20.61	52.76	4.85	31.46	35.68	101	7	VERTICAL	Peak