



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	NETGEAR, Inc.
Applicant Address	350 East Plumeria Drive, San Jose, California 95134, USA
FCC ID	PY313200227

Product Name	R6300 Smart WiFi Router, AC1450 Smart WiFi Router
Brand Name	NETGEAR
Model No.	R6300v2, AC1450
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Jun. 29, 2015
Final Test Date	Sep. 17, 2015
Submission Type	Original Equipment

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	9
3.7. Table for Multiple Listing.....	10
3.8. Table for Class II Change .....	10
3.9. Table for Supporting Units .....	10
3.10. Table for Parameters of Test Software Setting .....	11
3.11. EUT Operation during Test .....	12
3.12. Duty Cycle .....	13
3.13. Test Configurations .....	14
<b>4. TEST RESULT</b> .....	<b>16</b>
4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	16
4.2. 6dB Spectrum Bandwidth Measurement .....	27
4.3. Maximum Conducted Output Power Measurement.....	35
4.4. Power Spectral Density Measurement .....	39
4.5. Radiated Emissions Measurement .....	48
4.6. Band Edge Emissions Measurement .....	66
4.7. Frequency Stability Measurement .....	75
4.8. Antenna Requirements .....	79
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>80</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>81</b>
<b>APPENDIX A. TEST PHOTOS</b> .....	<b>A1 ~ A2</b>





## 1. VERIFICATION OF COMPLIANCE

Product Name : R6300 Smart WIFI Router, AC1450 Smart WIFI Router  
Brand Name : NETGEAR  
Model No. : R6300v2, AC1450  
Applicant : NETGEAR, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jun. 29, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.2	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	6.84 dB
4.4	15.407(a)	Power Spectral Density	Complies	23.72 dB
4.5	15.407(b)	Radiated Emissions	Complies	10.79 dB
4.6	15.407(b)	Band Edge Emissions	Complies	0.03 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	<p><b>&lt;For Non-Beamforming Mode&gt;</b></p> <p>IEEE 802.11a: 16.93 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 17.89 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.76 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 76.12 MHz</p> <p><b>&lt;For Beamforming Mode&gt;</b></p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 17.80 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.76 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 76.12 MHz</p>
Maximum Conducted Output Power	<p><b>&lt;For Non-Beamforming Mode&gt;</b></p> <p>IEEE 802.11a: 21.62 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 22.70 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 23.16 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 21.67 dBm</p> <p><b>&lt;For Beamforming Mode&gt;</b></p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 22.40 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 22.74 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 21.67 dBm</p>
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input checked="" type="checkbox"/> With beamforming for 802.11ac in 5GHz	<input type="checkbox"/> Without beamforming
Operating Mode	<input type="checkbox"/> Outdoor access point	
	<input checked="" type="checkbox"/> Indoor access point	
	<input type="checkbox"/> Fixed point-to-point access points	
	<input type="checkbox"/> Mobile and portable client devices	

### Antenna and Band width

Antenna	Three (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

### IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:  
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

## 3.2. Accessories

Power	Brand	Model	P/N	Rating
Adapter 1	NETGEAR	P030WF120B 11200-6LF	332-10200-02	Input: 100-120VAC, 47/63Hz, 0.9A Output: 12VDC, 2.5A
Adapter 2	NETGEAR	SAS030F1 NA 30.0W	332-10451-01	Input: 100-240VAC, 50/60Hz, 1.0A Output: 12VDC, 2.5A
<b>Others</b>				
RJ-45 Cable*1, Shielded, 1.5m				

### 3.3. Table for Filed Antenna

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	NETGEAR	401-10006-01	PCB Antenna	I-PEX	1.3	-
2	NETGEAR	401-10006-01	PCB Antenna	I-PEX	1.5	-
3	NETGEAR	401-10006-01	PCB Antenna	I-PEX	2.3	-
4	NETGEAR	401-10007-01	PCB Antenna	I-PEX	-	3.0
5	NETGEAR	401-10007-01	PCB Antenna	I-PEX	-	2.1
6	NETGEAR	401-10007-01	PCB Antenna	I-PEX	-	2.5

Note: The EUT has six antennas

<For 2.4GHz Band:>

**For IEEE 802.11b/g/n mode (3TX/3RX)**

Chain 1, Chain 2 and Chain 3 can be used as transmitting/receiving antenna.


Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

<For 5GHz Band:>

**For IEEE 802.11a/n/ac mode (3TX/3RX):**

Chain 4, Chain 5 and Chain 6 can be used as transmitting/receiving antenna.

Chain 4, Chain 5 and Chain 6 could transmit/receive simultaneously.

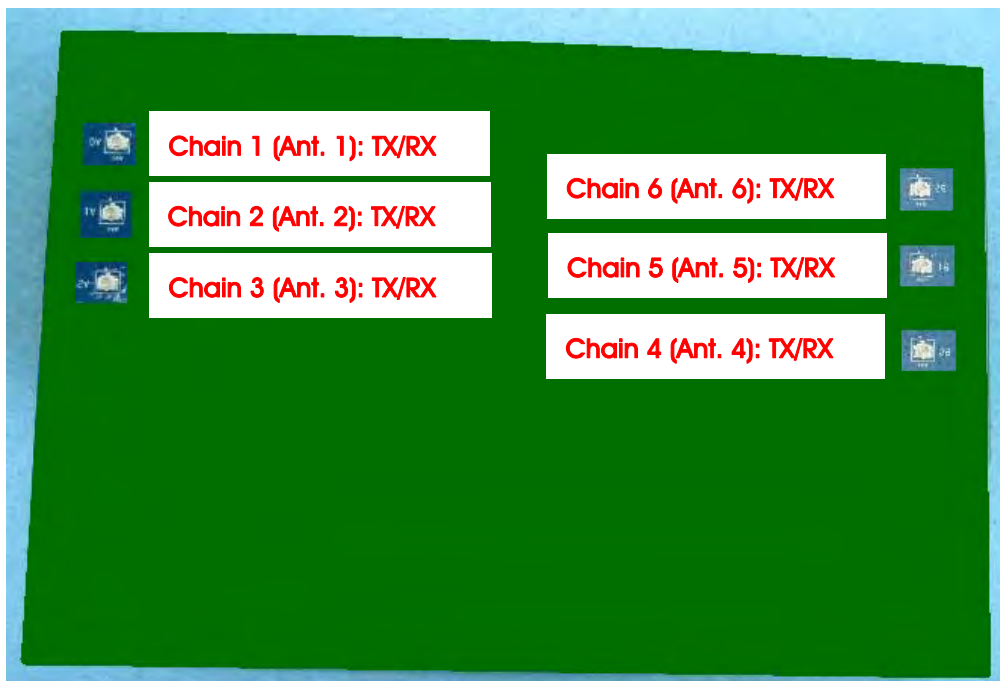



### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain	
Max. Conducted Output Power	<b>&lt;For Non-Beamforming Mode&gt;</b>				
	11a/BPSK	Band 4	6Mbps	149/157/165	4+5+6
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	4+5+6
	11ac VHT40	Band 4	MCS0/Nss1	151/159	4+5+6
	11ac VHT80	Band 4	MCS0/Nss1	155	4+5+6
	<b>&lt;For Beamforming Mode&gt;</b>				
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	4+5+6
	11ac VHT40	Band 4	MCS0/Nss1	151/159	4+5+6
	11ac VHT80	Band 4	MCS0/Nss1	155	4+5+6
	Power Spectral Density	<b>&lt;For Non-Beamforming Mode&gt;</b>			
11a/BPSK		Band 4	6Mbps	149/157/165	4+5+6
11ac VHT20		Band 4	MCS0/Nss1	149/157/165	4+5+6
11ac VHT40		Band 4	MCS0/Nss1	151/159	4+5+6
11ac VHT80		Band 4	MCS0/Nss1	155	4+5+6
<b>&lt;For Beamforming Mode&gt;</b>					
11ac VHT20		Band 4	MCS0/Nss1	149/157/165	4+5+6
11ac VHT40		Band 4	MCS0/Nss1	151/159	4+5+6
11ac VHT80		Band 4	MCS0/Nss1	155	4+5+6
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement		<b>&lt;For Non-Beamforming Mode&gt;</b>			
	11a/BPSK	Band 4	6Mbps	149/157/165	4+5+6
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	4+5+6
	11ac VHT40	Band 4	MCS0/Nss1	151/159	4+5+6
	11ac VHT80	Band 4	MCS0/Nss1	155	4+5+6
	<b>&lt;For Beamforming Mode&gt;</b>				
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	4+5+6
	11ac VHT40	Band 4	MCS0/Nss1	151/159	4+5+6
	11ac VHT80	Band 4	MCS0/Nss1	155	4+5+6

6dB Spectrum Bandwidth Measurement	<b>&lt;For Non-Beamforming Mode&gt;</b>				
	11a/BPSK	Band 4	6Mbps	149/157/165	4+5+6
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	4+5+6
	11ac VHT40	Band 4	MCS0/Nss1	151/159	4+5+6
	11ac VHT80	Band 4	MCS0/Nss1	155	4+5+6
	<b>&lt;For Beamforming Mode&gt;</b>				
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	4+5+6
	11ac VHT40	Band 4	MCS0/Nss1	151/159	4+5+6
	11ac VHT80	Band 4	MCS0/Nss1	155	4+5+6
	Radiated Emission Above 1GHz	<b>&lt;For Non-Beamforming Mode&gt;</b>			
11a/BPSK		Band 4	6Mbps	149/157/165	4+5+6
11ac VHT20		Band 4	MCS0/Nss1	149/157/165	4+5+6
11ac VHT40		Band 4	MCS0/Nss1	151/159	4+5+6
11ac VHT80		Band 4	MCS0/Nss1	155	4+5+6
<b>&lt;For Beamforming Mode&gt;</b>					
11ac VHT20		Band 4	MCS0/Nss1	149/157/165	4+5+6
11ac VHT40		Band 4	MCS0/Nss1	151/159	4+5+6
11ac VHT80		Band 4	MCS0/Nss1	155	4+5+6
Band Edge Emission		<b>&lt;For Non-Beamforming Mode&gt;</b>			
	11a/BPSK	Band 4	6Mbps	149/157/165	4+5+6
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	4+5+6
	11ac VHT40	Band 4	MCS0/Nss1	151/159	4+5+6
	11ac VHT80	Band 4	MCS0/Nss1	155	4+5+6
	<b>&lt;For Beamforming Mode&gt;</b>				
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	4+5+6
	11ac VHT40	Band 4	MCS0/Nss1	151/159	4+5+6
	11ac VHT80	Band 4	MCS0/Nss1	155	4+5+6
	Frequency Stability	20 MHz	Band 4	-	157
40 MHz		Band 4	-	151	6
80 MHz		Band 4	-	155	6

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40

Note 2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11ac in 5GHz, Beamforming mode and non-beamforming mode has been test and record in this test report.

Note 3: The polarity of Ant. 6 is different from Ant. 4 and Ant. 5.  
 (Ant. 6 is horizontal polarity, Ant. 4 and Ant. 5 are vertical polarity.)  
 Therefore, it only uses Ant. 4 and Ant. 5 to evaluate directional gain.

The following test modes were performed for all tests:

**For Radiated Emission test**

Test Mode: EUT standing

**For Co-location MPE:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA330853-05) test is added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Multiple Listing

The product name and model names in the following table are all refer to the identical product.

Product Name	Model Name	Description
R6300 Smart WiFi Router	R6300v2	All the models are identical, the different model names served as marketing strategy.
AC1450 Smart WiFi Router	AC1450	

### 3.8. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR330853

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Changing 5GHz Band 1 to "New Rules" from "Old Rules".	After evaluating, it's not necessary to re-test all test items for 5GHz Band 1 updating to "New Rules" due to the same power as original filing.
2. Changing 5GHz Band 4 to "New Rules" from "Old Rules".	1. 26dB Spectrum Bandwidth and 99% Occupied Bandwidth 2. 6dB Spectrum Bandwidth 3. Maximum Conducted Output Power 4. Power Spectral Density 5. Radiated Emissions(Above 1GHz) 6. Band Edge Emissions 7. Frequency Stability
Note: There is no change in hardware or in existing RF relevant portion.	

### 3.9. Table for Supporting Units

For Test Site No: 03CH01-CB

<For Non-Beamforming Mode>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

<For Beamforming Mode>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Notebook	DELL	E4300	DoC
WLAN ac Dongle	Netgear	A6200	PY31220200

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

### 3.10. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Non-Beamforming Mode>

Test Software Version	Mtool 2.0.0.7		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5745 MHz	5785 MHz	5825 MHz
802.11a	59	60	57
802.11ac MCS0/Nss1 VHT20	64	63	60
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5755 MHz		5795 MHz
	64		66
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5775 MHz		
	61		

<For Beamforming Mode>

Test Software Version	Mtool 2.0.0.7		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5745 MHz	5785 MHz	5825 MHz
802.11ac MCS0/Nss1 VHT20	63	60	56
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5755 MHz		5795 MHz
	64		63
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5775 MHz		
	61		

### 3.11. EUT Operation during Test

#### <For Non-Beamforming Mode>

The EUT was programmed to be in continuously transmitting mode.

#### <For Beamforming Mode>

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN ac Dongle and transmit duty cycle no less 98%

### 3.12. Duty Cycle

<For Non-Beamforming Mode>

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	2.056	2.080	98.81%	0.05	0.01
802.11ac MCS0/Nss1 VHT20	1.920	1.949	98.51%	0.07	0.01
802.11ac MCS0/Nss1 VHT40	0.936	0.980	95.56%	0.20	1.07
802.11ac MCS0/Nss1 VHT80	0.459	0.487	94.34%	0.25	2.18

<For Beamforming Mode>


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	3.860	3.960	97.47%	0.11	0.26
802.11ac MCS0/Nss1 VHT40	0.932	1.040	89.62%	0.48	1.07
802.11ac MCS0/Nss1 VHT80	5.080	5.420	93.73%	0.28	0.20



### 3.13. Test Configurations


#### 3.13.1. Radiation Emissions Test Configuration

<For Non-Beamforming Mode>

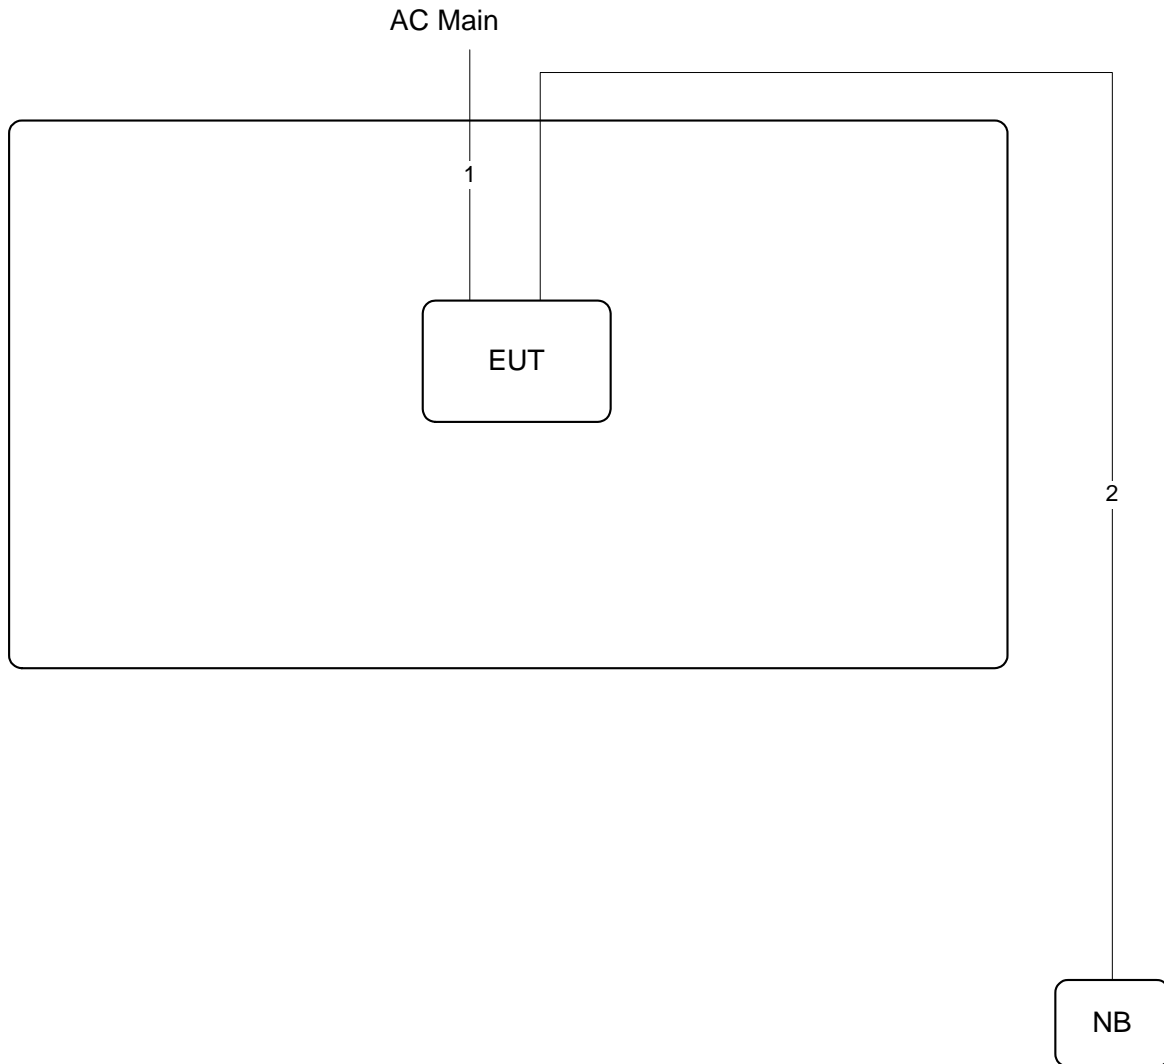

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

<For Beamforming Mode>

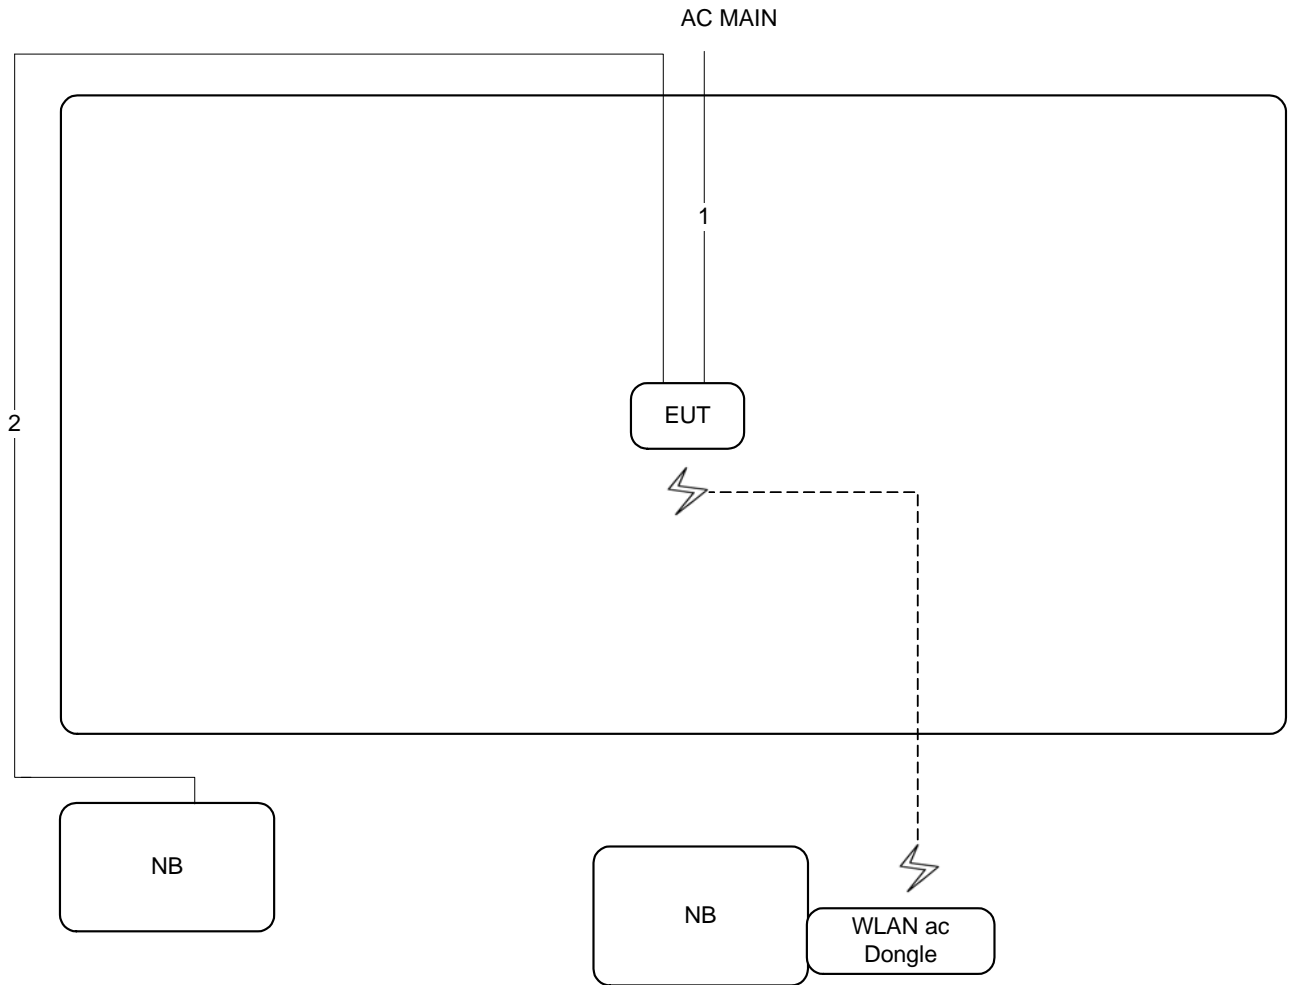

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

## 4. TEST RESULT

### 4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

#### 4.1.1. Limit

No restriction limits.

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

#### 4.1.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 4.1.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.1.5. Test Deviation

There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


#### 4.1.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

<For Non-Beamforming Mode>

Temperature	25°C	Humidity	60%
Test Engineer	Roki Liu		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745 MHz	19.83	16.93
	5785 MHz	19.74	16.93
	5825 MHz	19.83	16.93
802.11ac MCS0/Nss1 VHT20	5745 MHz	20.61	17.89
	5785 MHz	20.52	17.89
	5825 MHz	20.43	17.89
802.11ac MCS0/Nss1 VHT40	5755 MHz	40.58	36.76
	5795 MHz	40.58	36.76
802.11ac MCS0/Nss1 VHT80	5775 MHz	83.48	76.12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5745 MHz

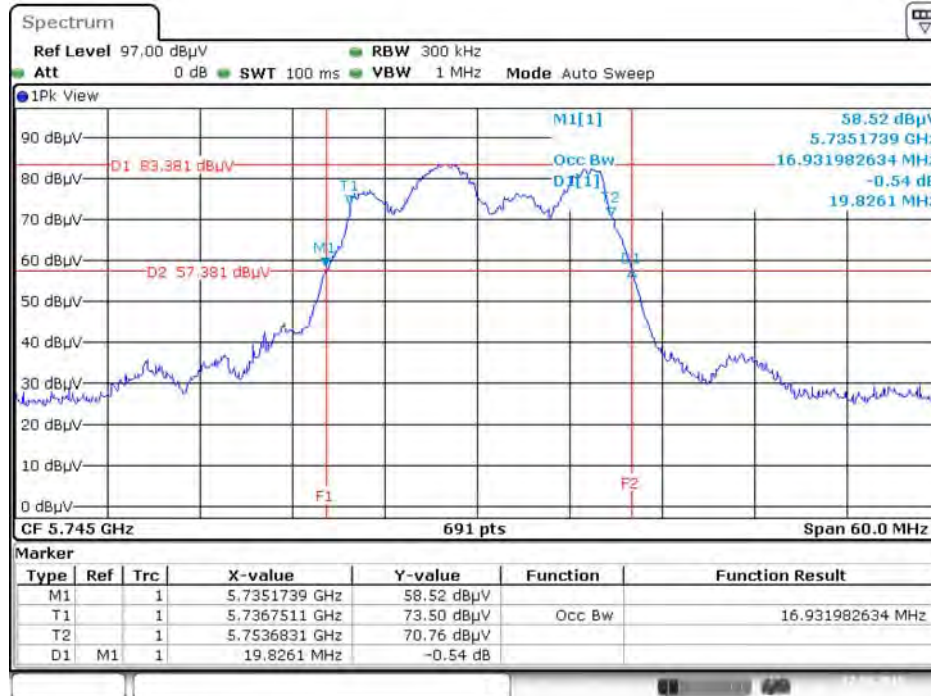


Date: 17 SEP. 2015 16:50:22

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5785 MHz

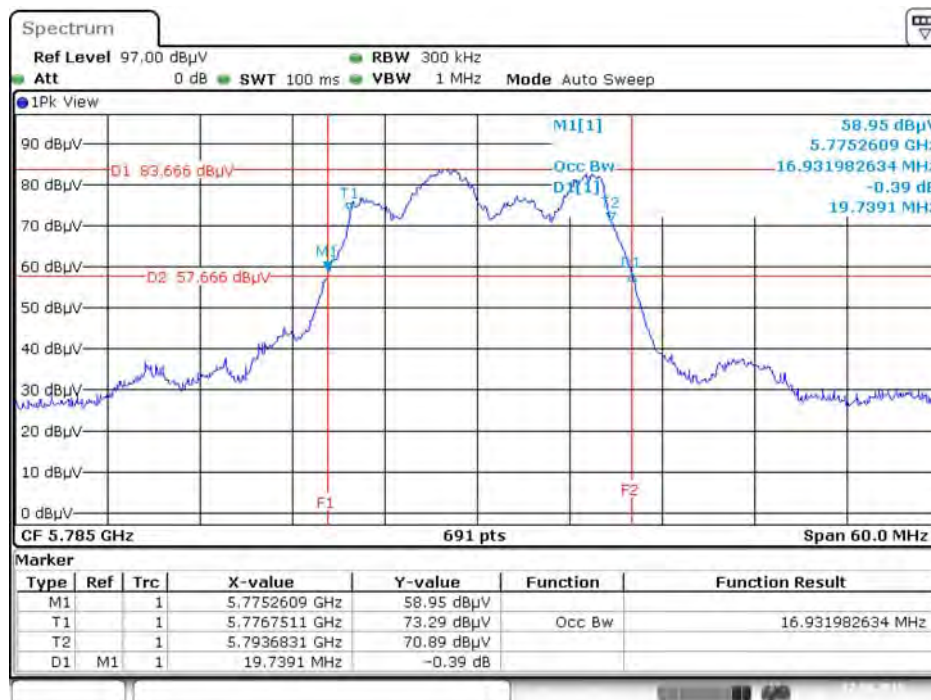


Date: 17 SEP. 2015 16:50:58

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5825 MHz

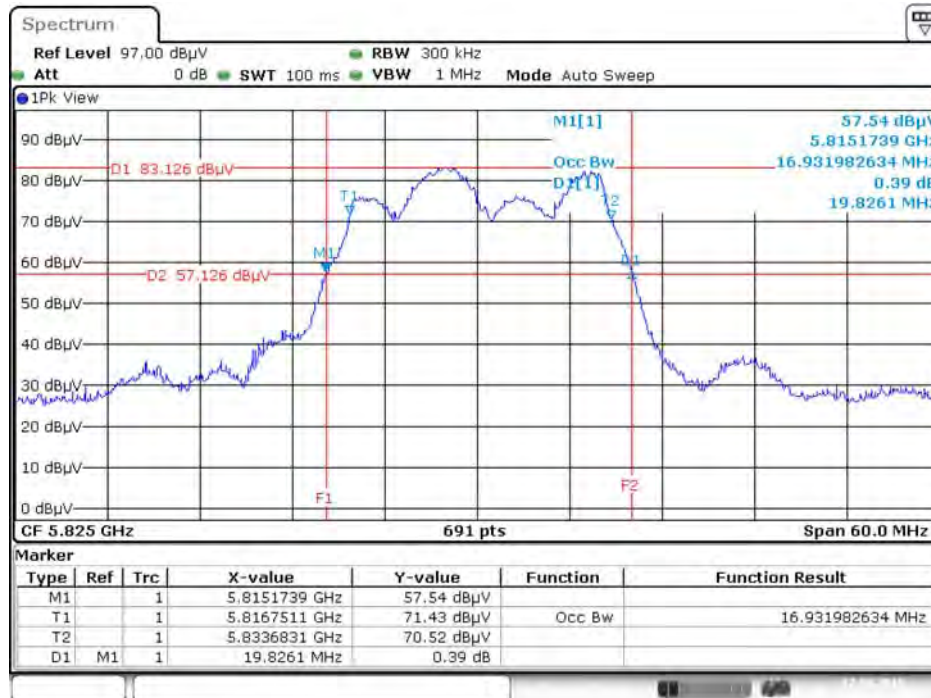


Date: 17 SEP. 2015 16:51:44

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5745 MHz

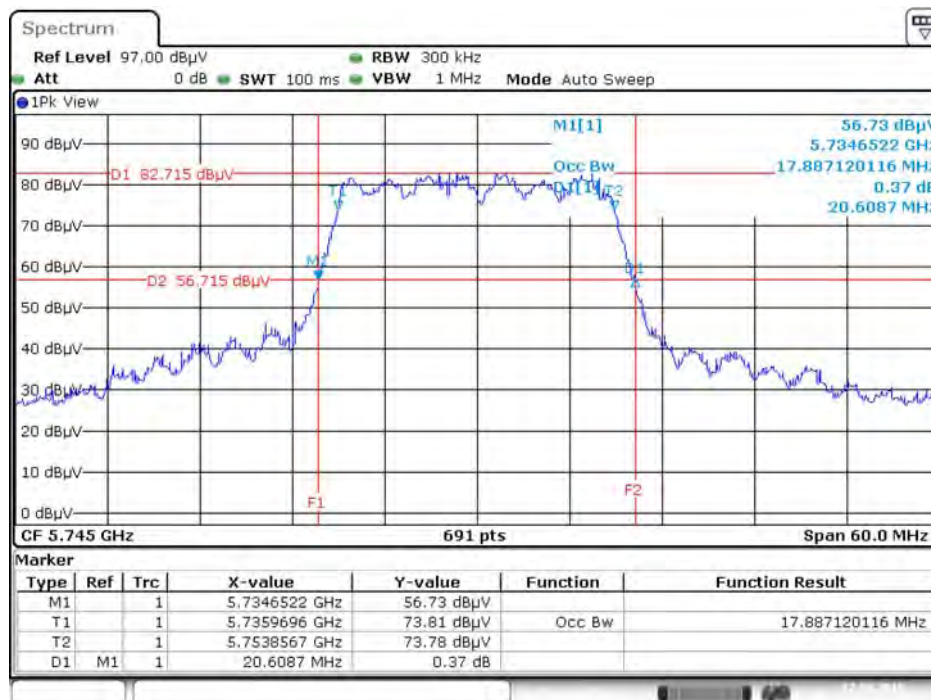


Date: 17 SEP. 2015 16:52:52

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5785 MHz

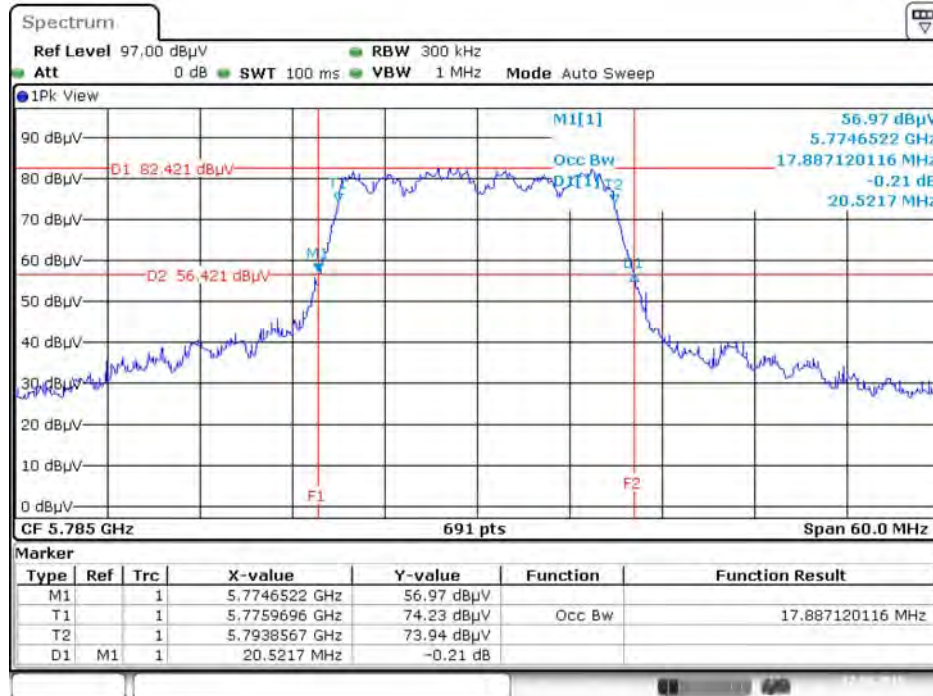


Date: 17 SEP. 2015 16:53:31

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5825 MHz

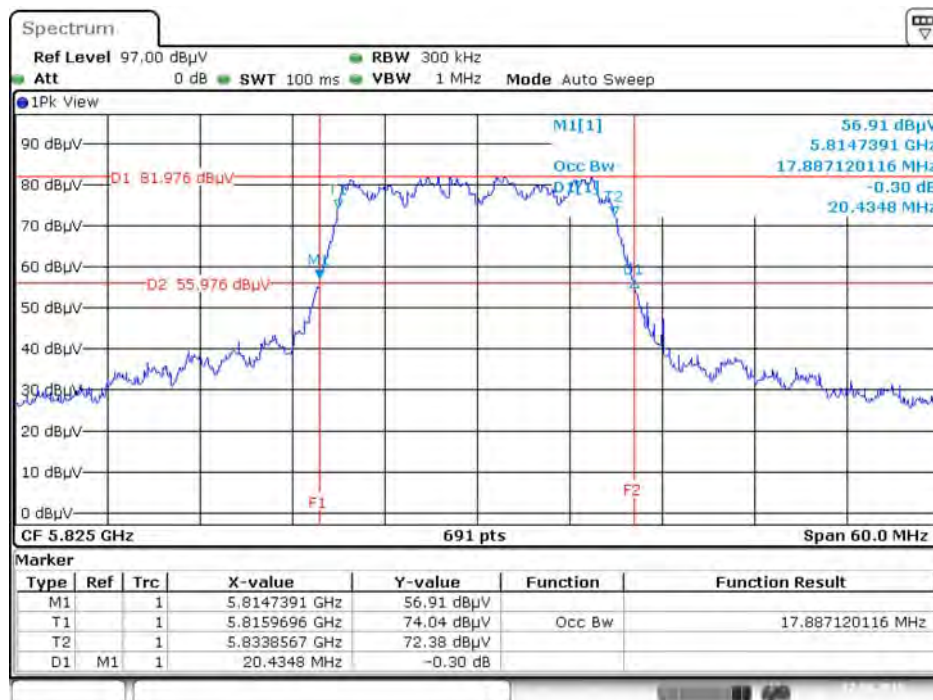


Date: 17 SEP. 2015 16:54:16

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 / 5755 MHz**

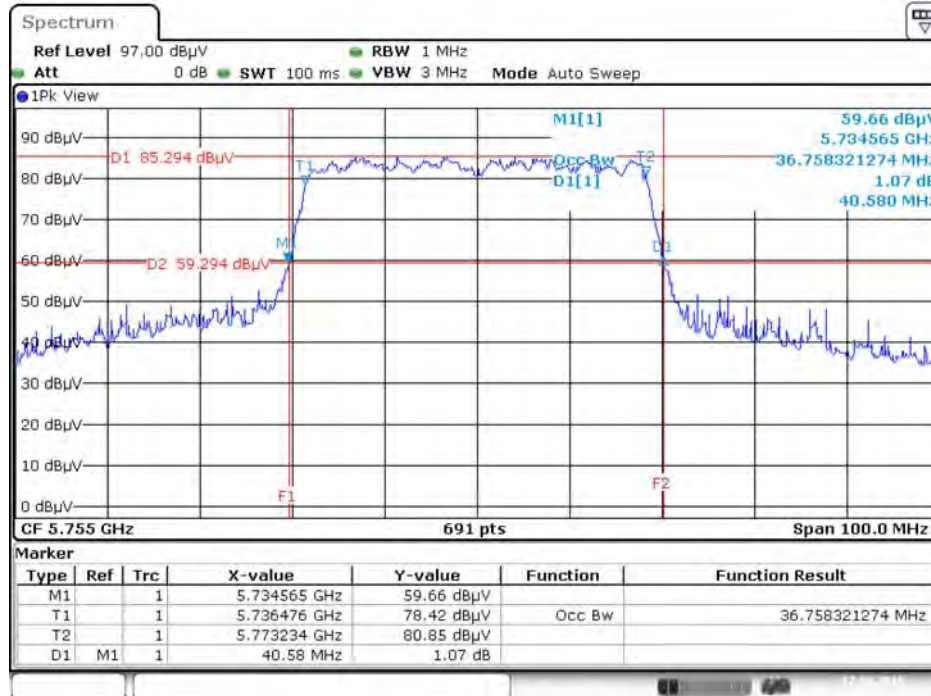

Date: 17 SEP. 2015 17:39:12


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 / 5795 MHz**

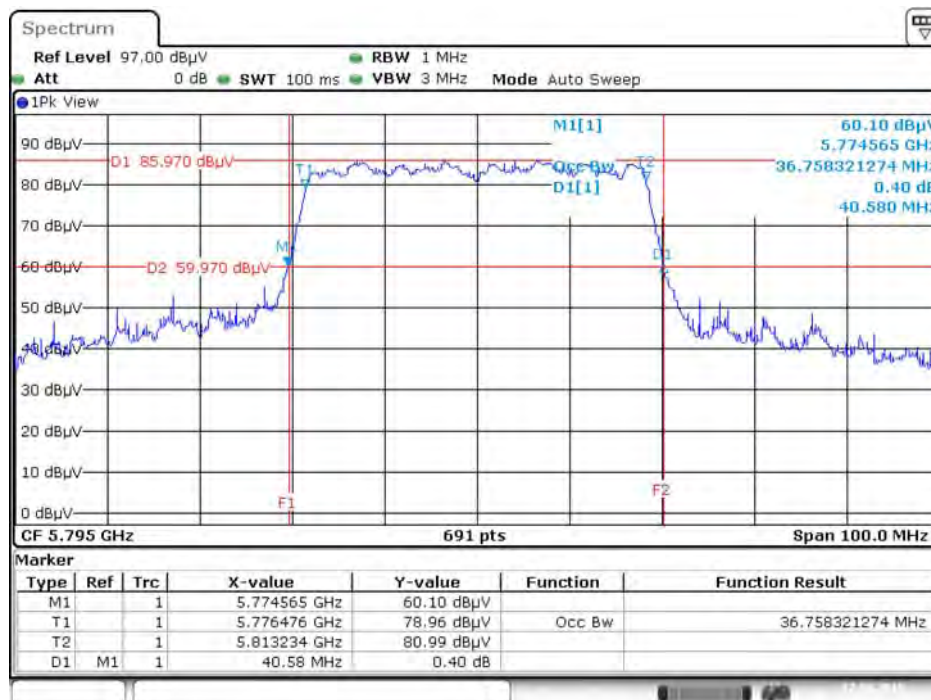

Date: 17 SEP. 2015 17:39:35



**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6 / 5775 MHz**

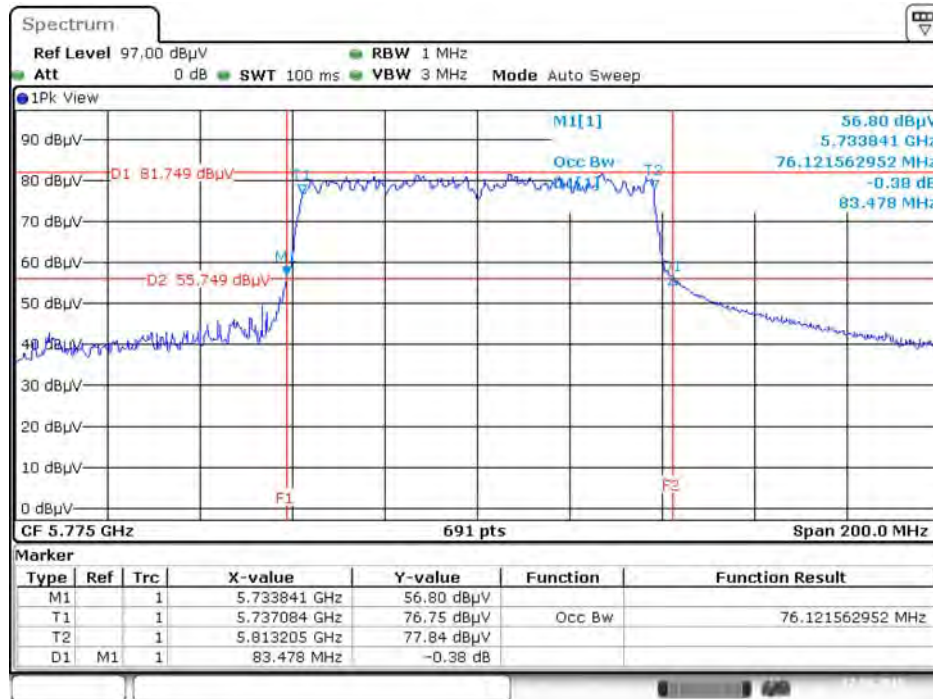


Date: 17 SEP. 2015 17:42:38

**<For Beamforming Mode>**

<b>Temperature</b>	25°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Roki Liu		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11ac MCS0/Nss1 VHT20	5745 MHz	20.43	17.80
	5785 MHz	20.35	17.80
	5825 MHz	20.35	17.80
802.11ac MCS0/Nss1 VHT40	5755 MHz	40.29	36.76
	5795 MHz	40.44	36.76
802.11ac MCS0/Nss1 VHT80	5775 MHz	84.35	76.12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5745 MHz

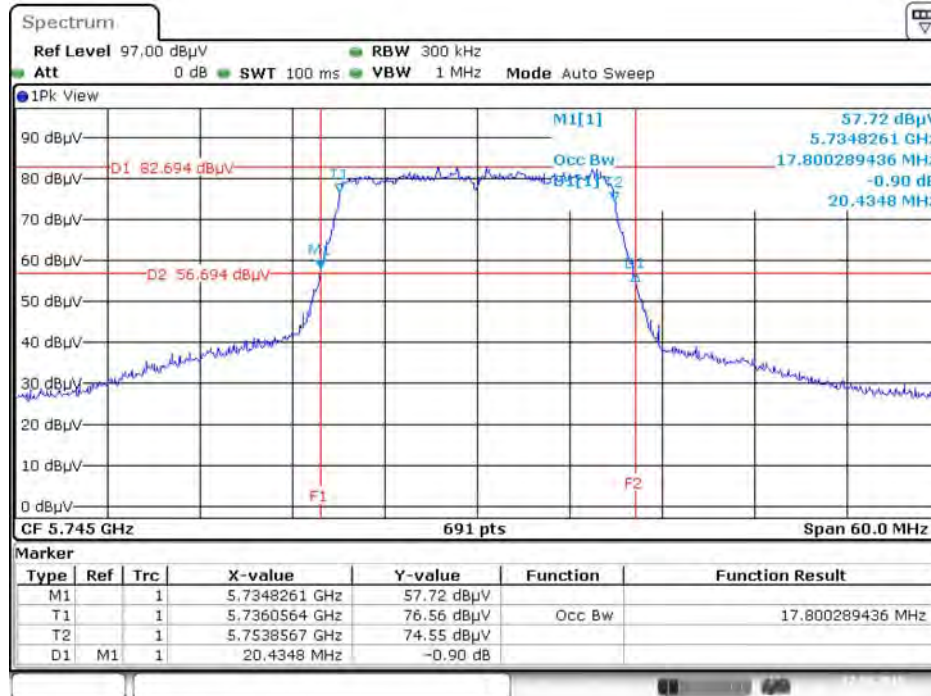


Date: 17 SEP. 2015 17:36:25

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5785 MHz

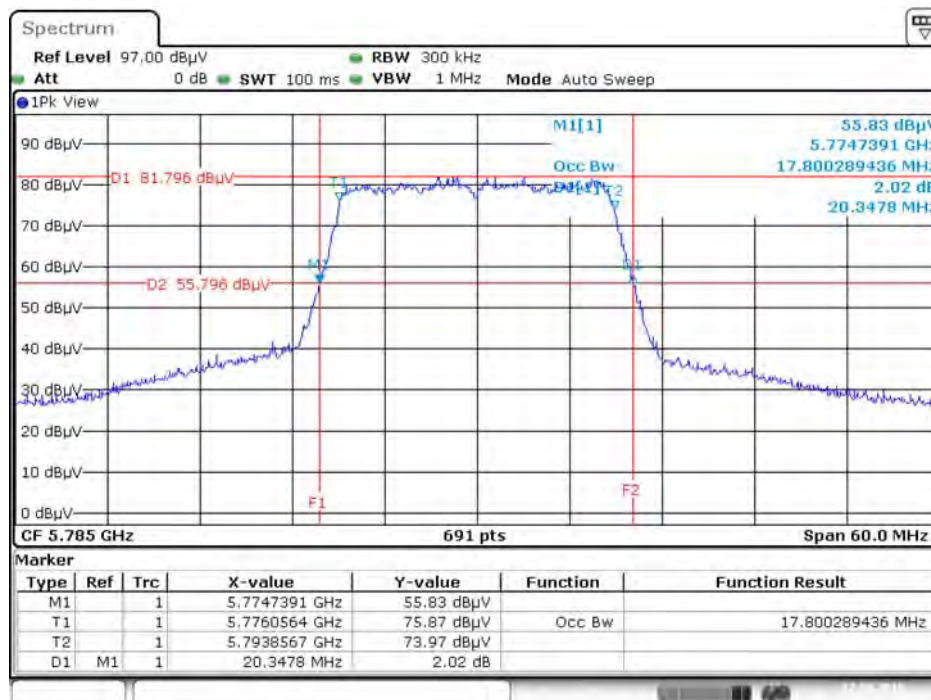


Date: 17 SEP. 2015 17:36:51


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5825 MHz

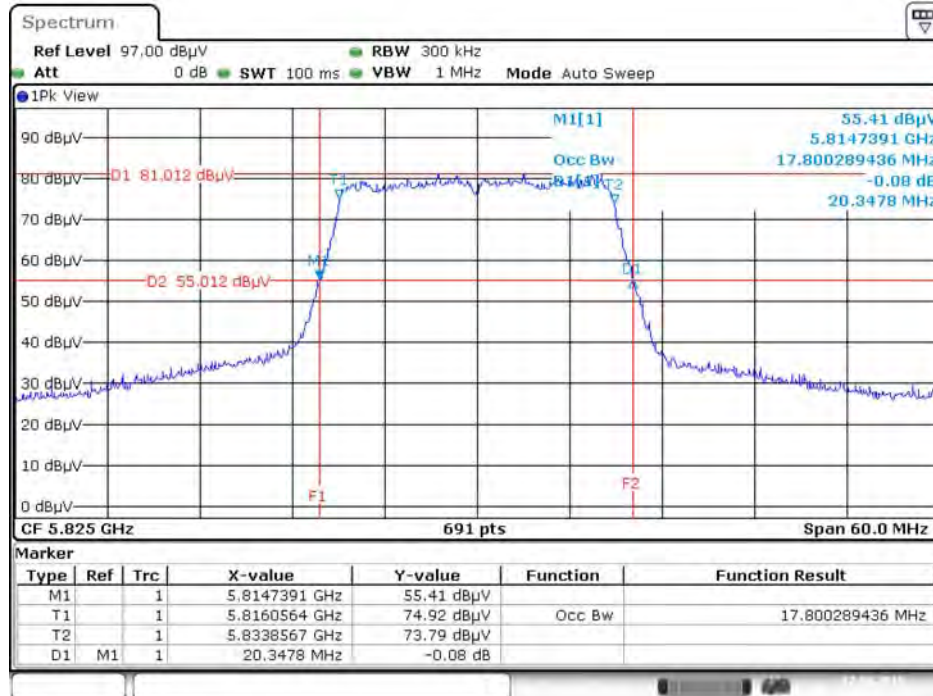

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 / 5755 MHz

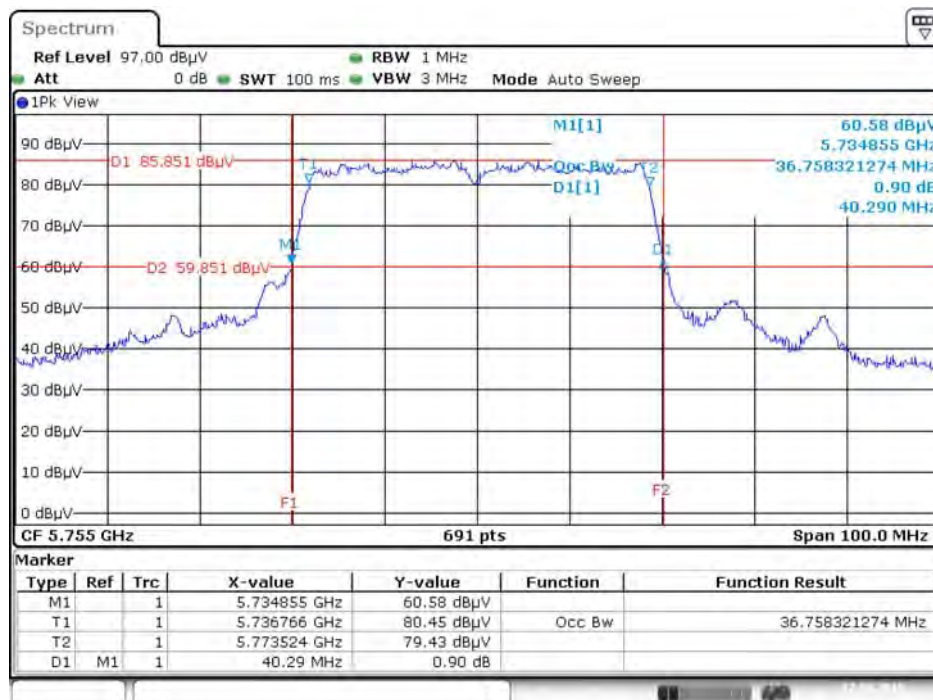


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 / 5795 MHz**

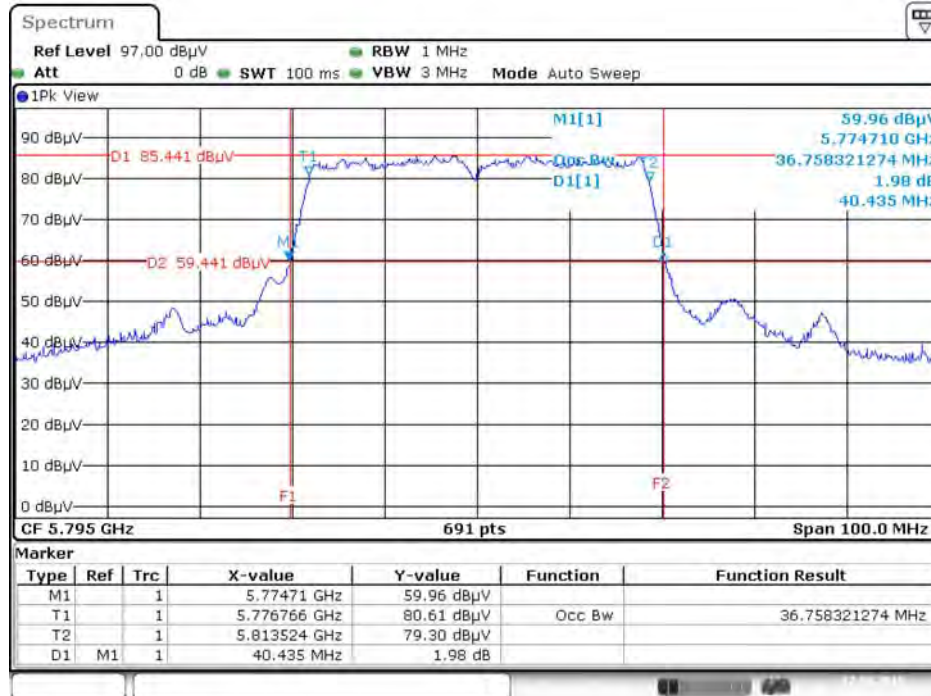

Date: 17 SEP. 2015 17:41:17

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6 / 5775 MHz**

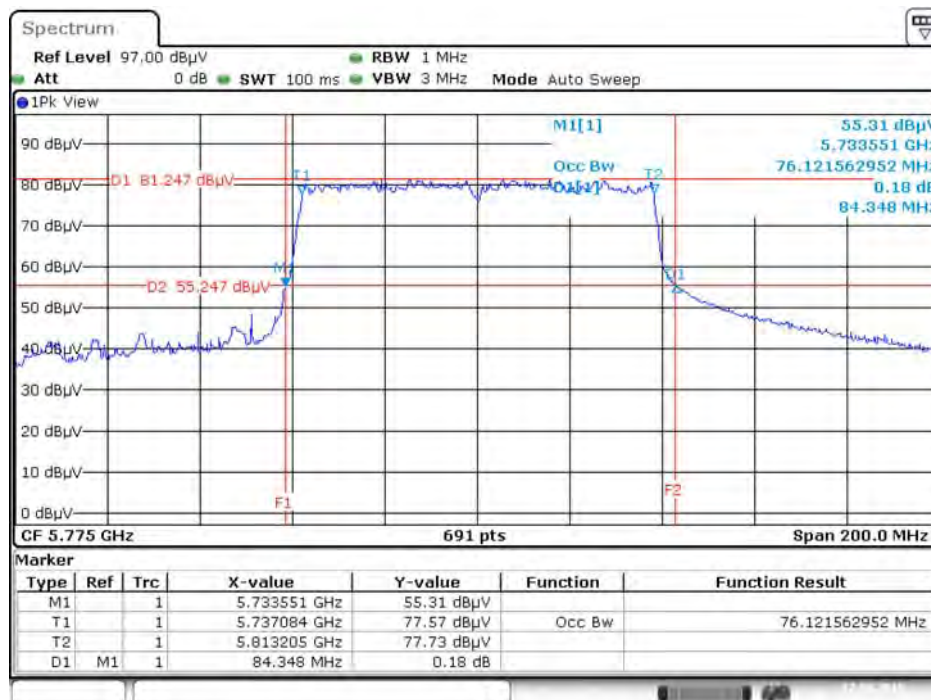

Date: 17 SEP. 2015 17:43:20

## 4.2. 6dB Spectrum Bandwidth Measurement

### 4.2.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

### 4.2.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 6dB Spectrum Bandwidth

<For Non-Beamforming Mode>

<b>Temperature</b>	25°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Roki Liu		


Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	12.12	500	Complies
	5785 MHz	12.06	500	Complies
	5825 MHz	11.94	500	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	16.93	500	Complies
	5785 MHz	16.64	500	Complies
	5825 MHz	16.35	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	36.29	500	Complies
	5795 MHz	35.71	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	75.36	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.




6 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5825 MHz

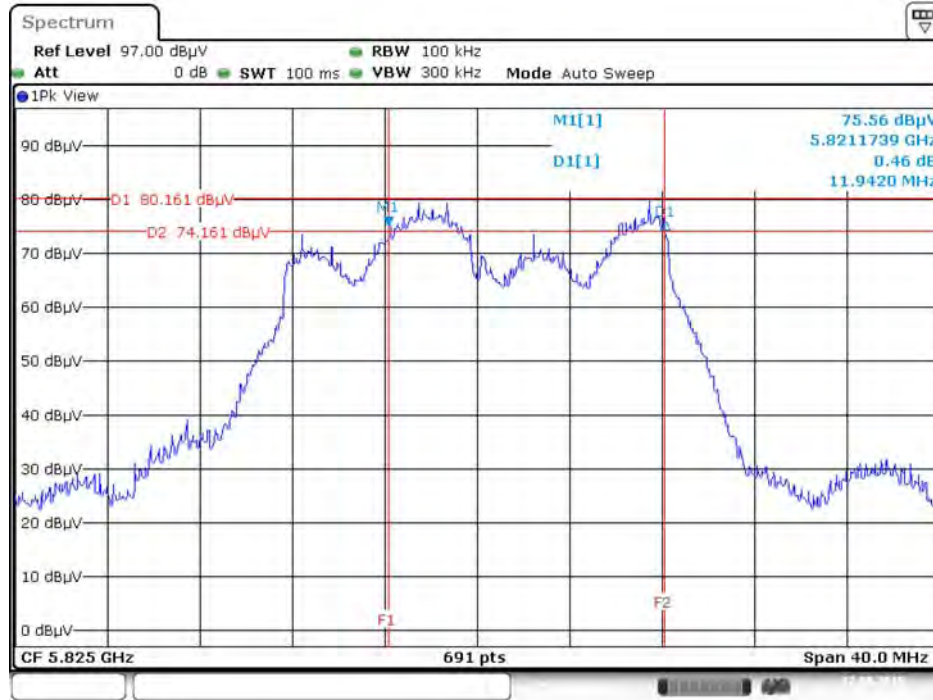


Date: 17. SEP. 2015 17:47:08

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Ns1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5825MHz

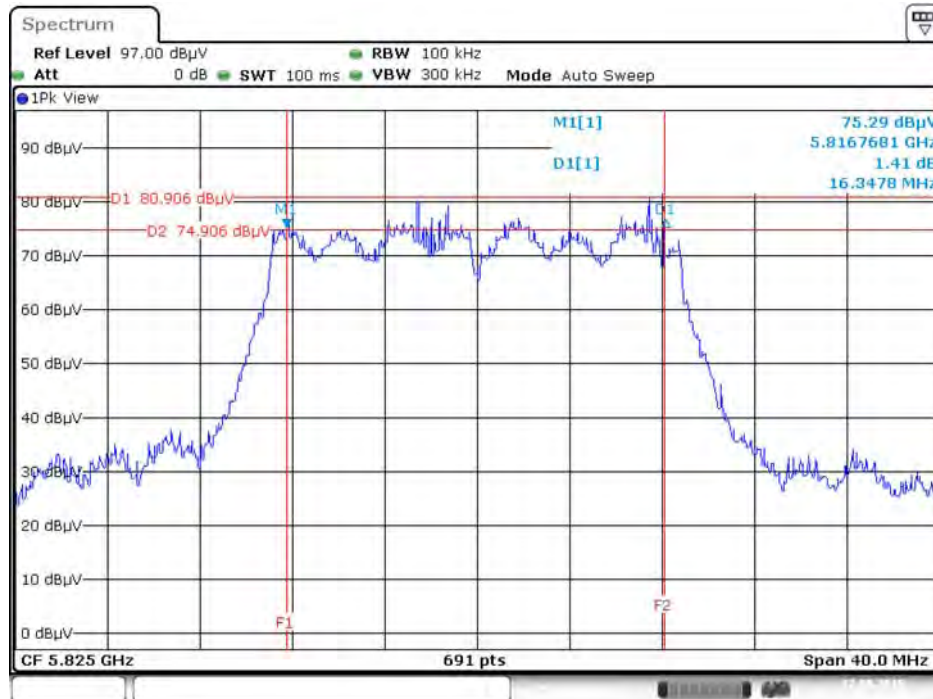


Date: 17. SEP. 2015 17:49:18

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 / 5795MHz**

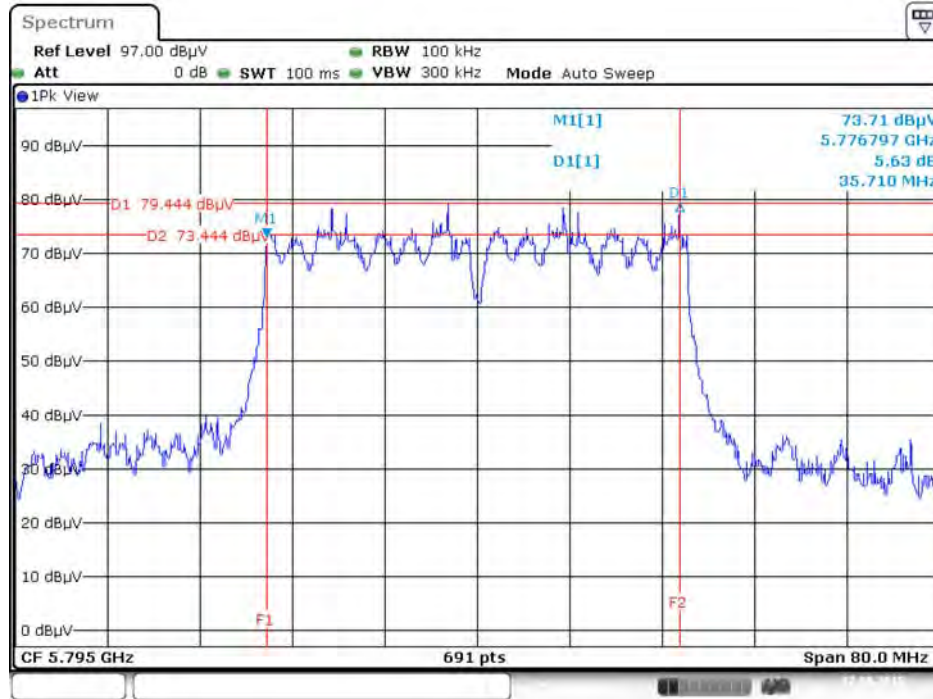

Date: 17 SEP. 2015 17:53:40

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6 / 5775 MHz**

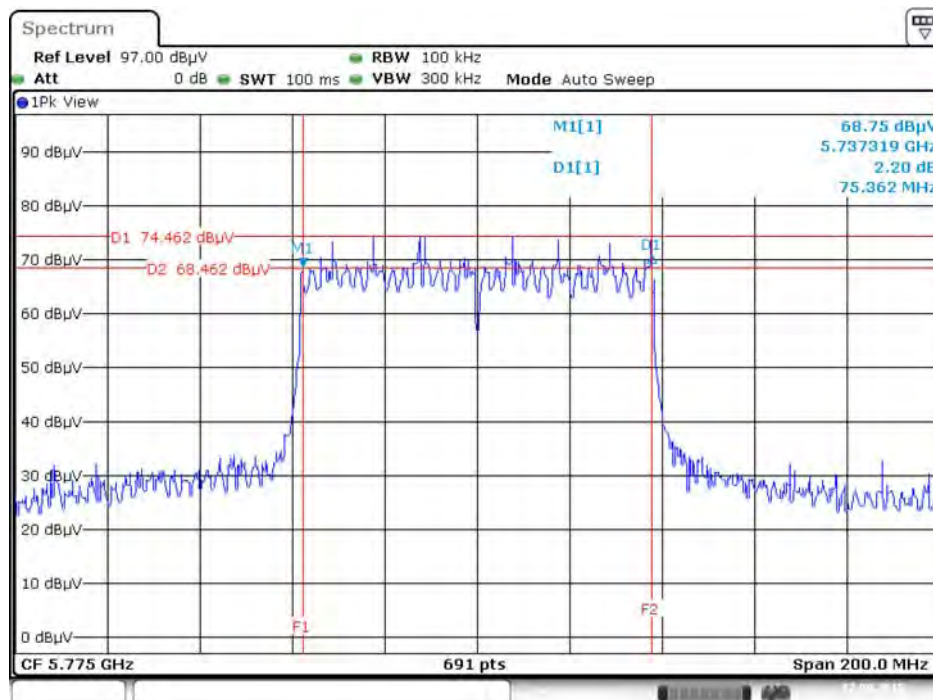

Date: 17 SEP. 2015 17:56:17

**<For Beamforming Mode>**


<b>Temperature</b>	25°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Roki Liu		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/Nss1 VHT20	5745 MHz	15.77	500	Complies
	5785 MHz	16.70	500	Complies
	5825 MHz	15.71	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	35.01	500	Complies
	5795 MHz	35.71	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	71.59	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5825 MHz**

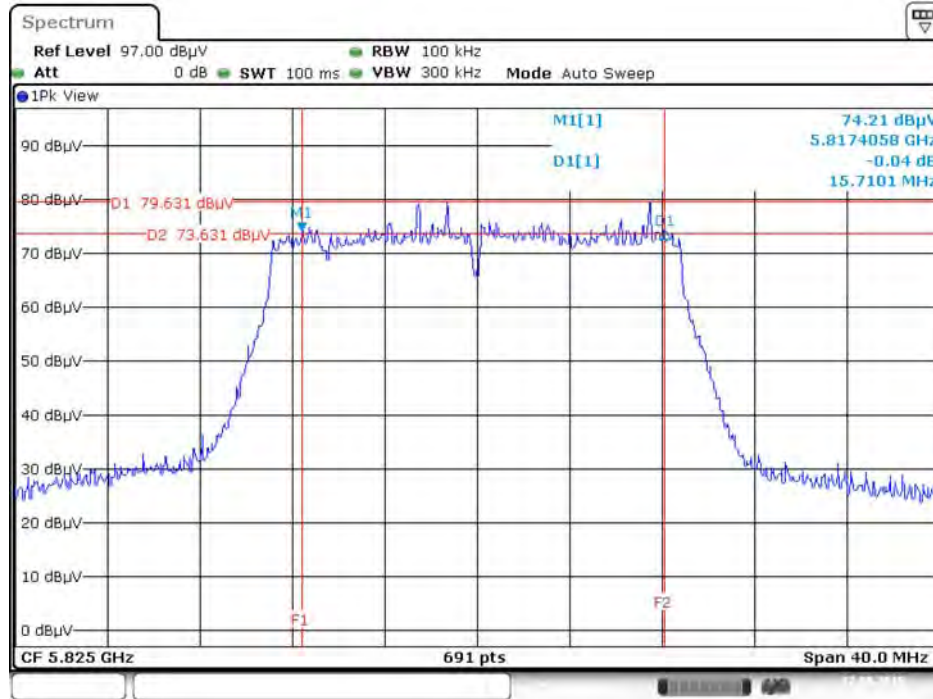


Date: 17 SEP. 2015 17:51:14

**6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 / 5755MHz**

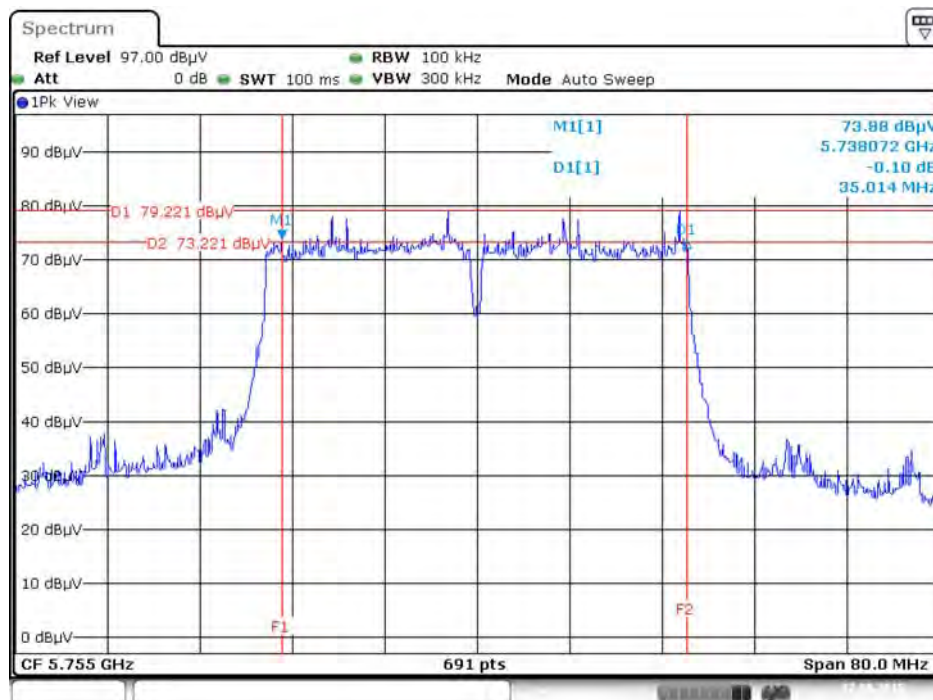

Date: 17 SEP. 2015 17:54:29

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6 / 5775 MHz

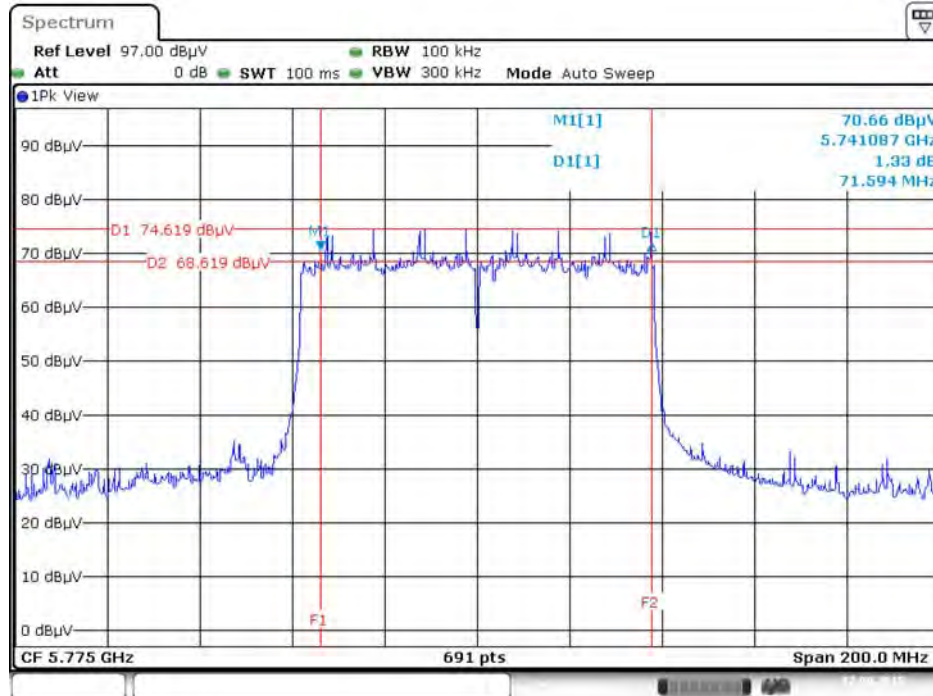

Date: 17.SEP.2015 17:57:11

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

Frequency Band	Limit
<input type="checkbox"/> 5.15~5.25 GHz	
Operating Mode	
<input type="checkbox"/> Outdoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p>
<input type="checkbox"/> Indoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>
<input type="checkbox"/> Fixed point-to-point access points	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.</p>
<input type="checkbox"/> Mobile and portable client devices	<p>The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>

☒	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.
---	----------------	--

### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

### 4.3.4. Test Setup Layout



### 4.3.5. Test Deviation

There is no deviation with the original standard.

### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

<For Non-Beamforming Mode>

Temperature	25°C	Humidity	60%
Test Engineer	Roki Liu	Test Date	Sep. 17, 2015

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
802.11a	5745 MHz	16.53	16.24	16.85	21.32	30.00	Complies
	5785 MHz	16.92	16.47	17.12	21.62	30.00	Complies
	5825 MHz	15.92	15.62	16.41	20.77	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	17.88	17.68	18.21	22.70	30.00	Complies
	5785 MHz	17.68	17.39	17.92	22.44	30.00	Complies
	5825 MHz	16.85	16.42	17.10	21.57	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	17.97	17.79	18.15	22.74	30.00	Complies
	5795 MHz	18.31	18.15	18.69	23.16	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	16.58	16.69	17.38	21.67	30.00	Complies



## &lt;For Beamforming Mode&gt;

Temperature	25°C	Humidity	60%
Test Engineer	Roki Liu	Test Date	Sep. 17, 2015

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
802.11ac MCS0/Nss1 VHT20	5745 MHz	17.58	17.38	17.92	22.40	30.00	Complies
	5785 MHz	16.82	16.61	17.19	21.65	30.00	Complies
	5825 MHz	15.76	15.52	16.24	20.62	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	17.97	17.79	18.15	22.74	30.00	Complies
	5795 MHz	17.67	17.58	17.98	22.52	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	16.58	16.69	17.38	21.67	30.00	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left(\sum_{K=1}^{N_{ANT}}g_{j,k}\right)^2}{N_{ANT}}\right] = 5.56\text{dBi} < 6\text{dBi}$ , so the limit doesn't reduce.

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
<input type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz
<input checked="" type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

#### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.
5. For 5.725~5.85 GHz, the measured result of PSD level must add  $10\log(500\text{kHz}/\text{RBW})$  and the final result should  $\leq 30$  dBm.

#### 4.4.4. Test Setup Layout

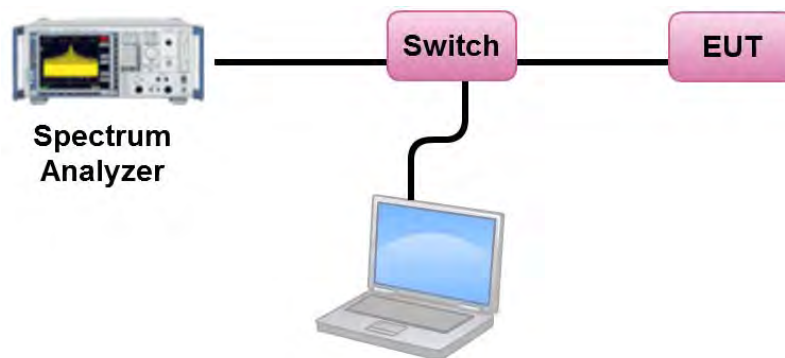

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

<For Non-Beamforming Mode>

Temperature	25°C	Humidity	60%
Test Engineer	Roki Liu	Test Data	Sep. 17, 2015

##### Configuration IEEE 802.11a

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	8.17	-3.01	5.16	30.00	Complies
157	5785 MHz	8.37	-3.01	5.36	30.00	Complies
165	5825 MHz	7.44	-3.01	4.43	30.00	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left(\sum_{K=1}^{N_{ANT}}g_{j,k}\right)^2}{N_{ANT}}\right] = 5.56\text{dBi}$ , so the limit doesn't reduce.

##### Configuration 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	9.22	-3.01	6.21	30.00	Complies
157	5785 MHz	8.95	-3.01	5.94	30.00	Complies
165	5825 MHz	8.21	-3.01	5.20	30.00	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left(\sum_{K=1}^{N_{ANT}}g_{j,k}\right)^2}{N_{ANT}}\right] = 5.56\text{dBi}$ , so the limit doesn't reduce.

##### Configuration 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	6.40	-3.01	3.39	30.00	Complies
159	5795 MHz	6.86	-3.01	3.85	30.00	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left(\sum_{K=1}^{N_{ANT}}g_{j,k}\right)^2}{N_{ANT}}\right] = 5.56\text{dBi}$ , so the limit doesn't reduce.

## Configuration 802.11ac MCS0/Nss1 VHT80


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	2.25	-3.01	-0.76	30.00	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 5.56\text{dBi}$ , so the limit doesn't reduce.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


## Power Density Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5785 MHz

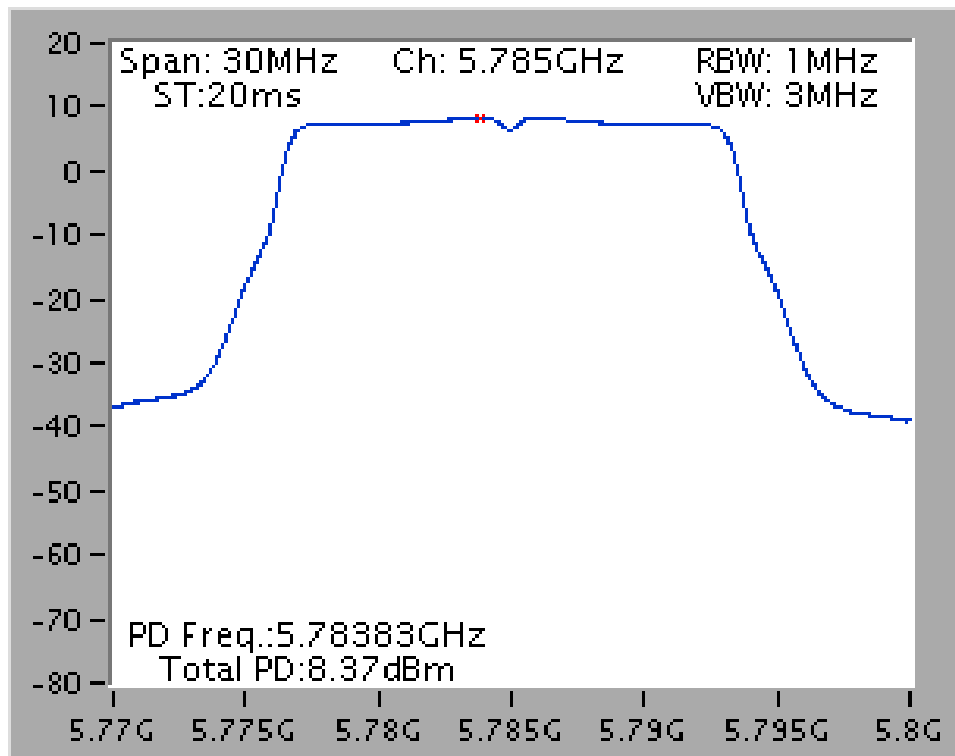


## Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5745 MHz

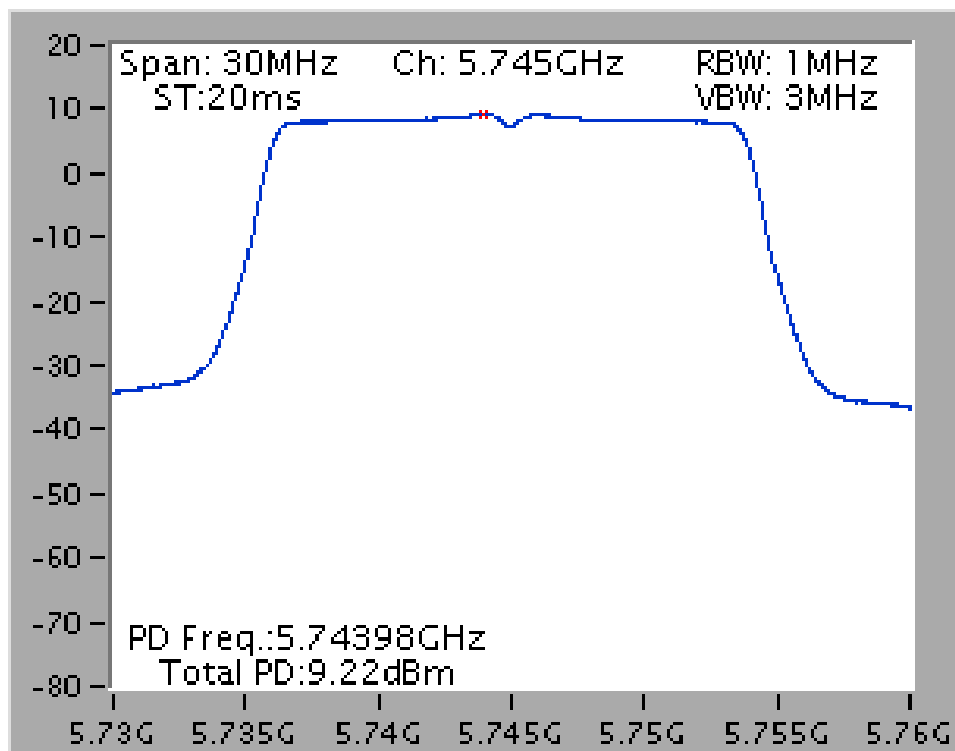

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 /  
5795 MHz

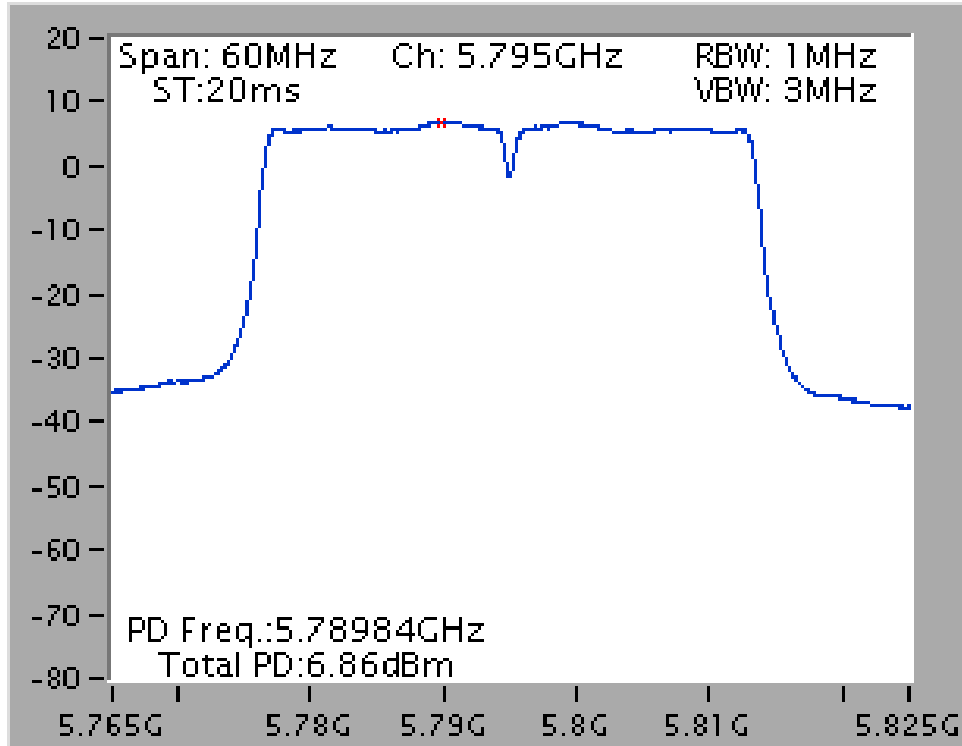

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6 /  
5775 MHz

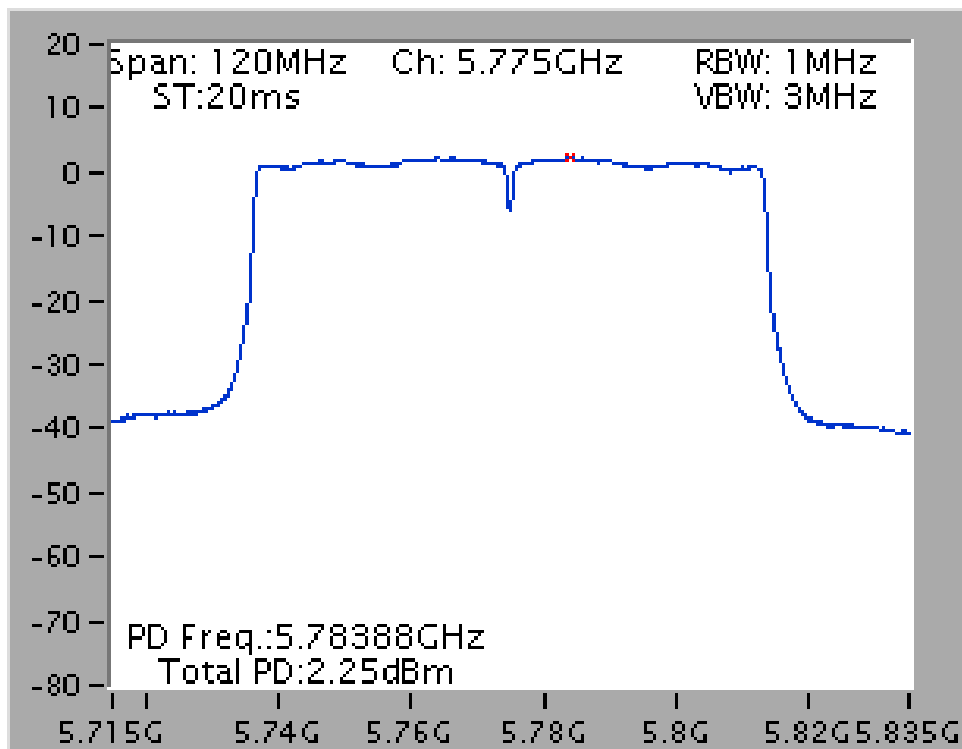

## &lt;For Beamforming Mode&gt;

Temperature	25°C	Humidity	60%
Test Engineer	Roki Liu	Test Data	Sep. 17, 2015

## Configuration 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	9.29	-3.01	6.28	30.00	Complies
157	5785 MHz	8.43	-3.01	5.42	30.00	Complies
165	5825 MHz	7.46	-3.01	4.45	30.00	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left(\sum_{K=1}^{N_{ANT}}g_{j,k}\right)^2}{N_{ANT}}\right] = 5.56\text{dBi}$ , so the limit doesn't reduce.

## Configuration 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	6.59	-3.01	3.58	30.00	Complies
159	5795 MHz	6.40	-3.01	3.39	30.00	Complies

Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left(\sum_{K=1}^{N_{ANT}}g_{j,k}\right)^2}{N_{ANT}}\right] = 5.56\text{dBi}$ , so the limit doesn't reduce.

## Configuration 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	2.51	-3.01	-0.50	30.00	Complies


Note:  $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left(\sum_{K=1}^{N_{ANT}}g_{j,k}\right)^2}{N_{ANT}}\right] = 5.56\text{dBi}$ , so the limit doesn't reduce.

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.




Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 /  
5745 MHz

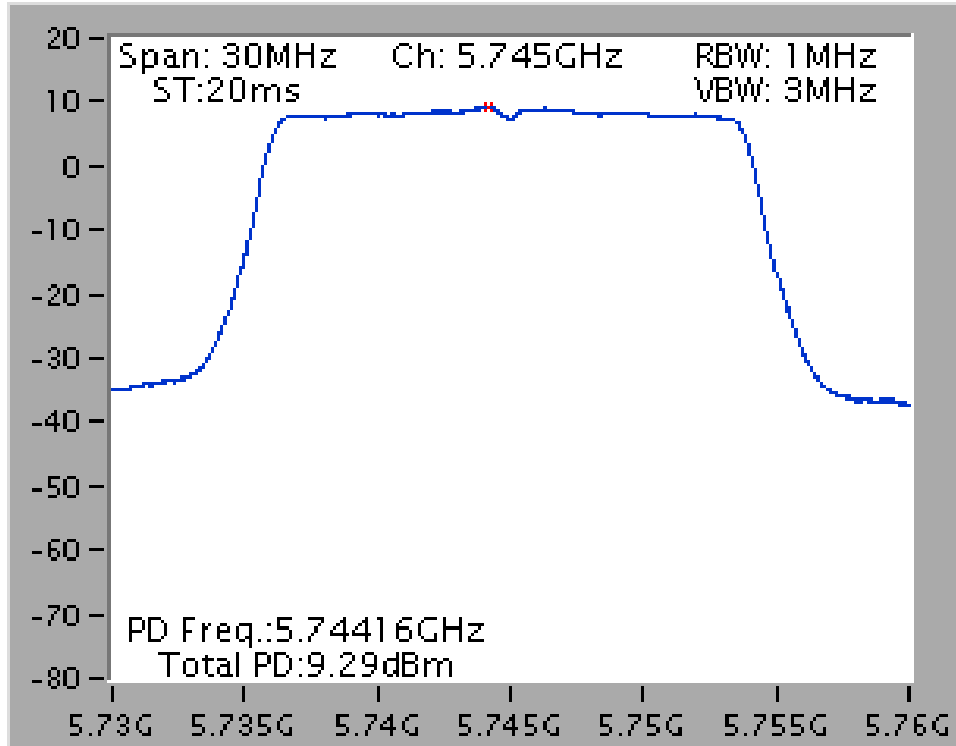

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 /  
5755 MHz

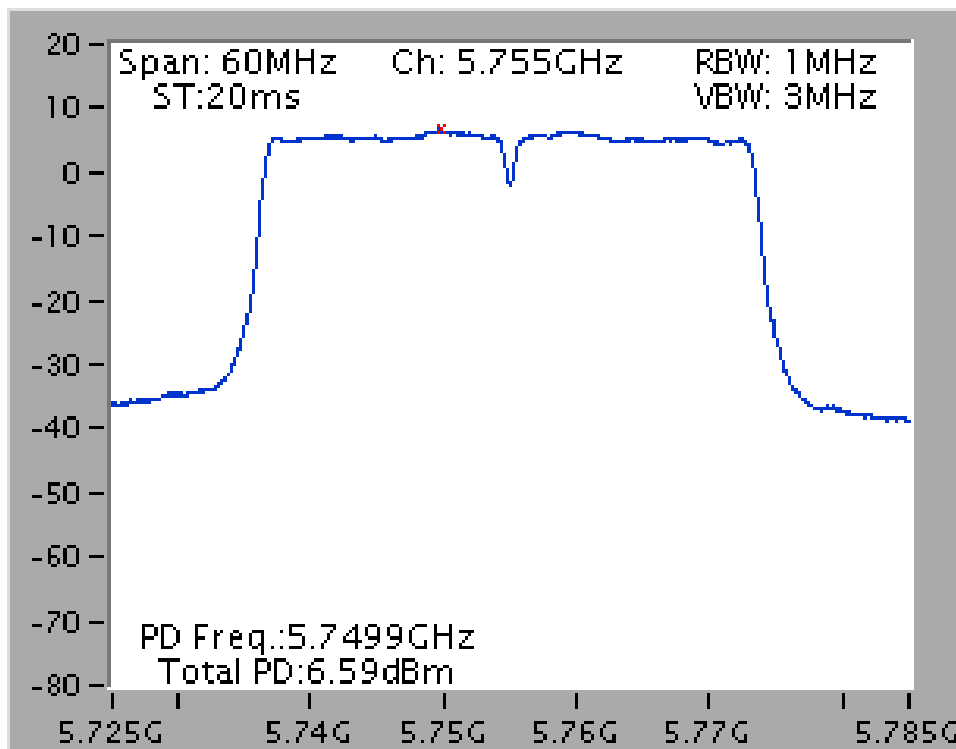

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6 /  
5775 MHz

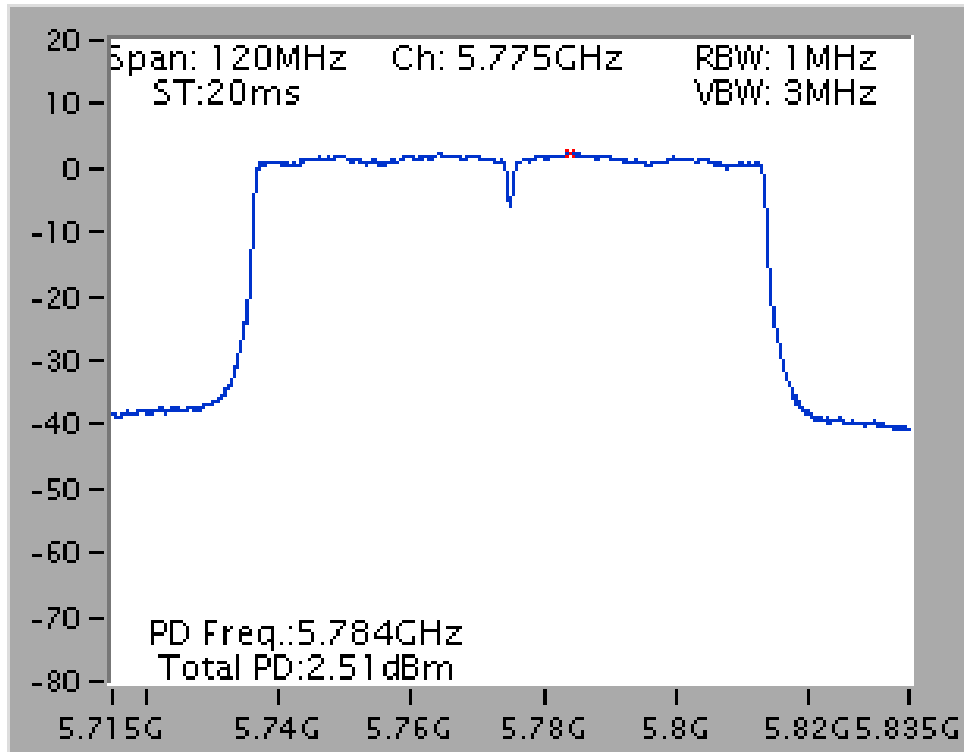

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

### 4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

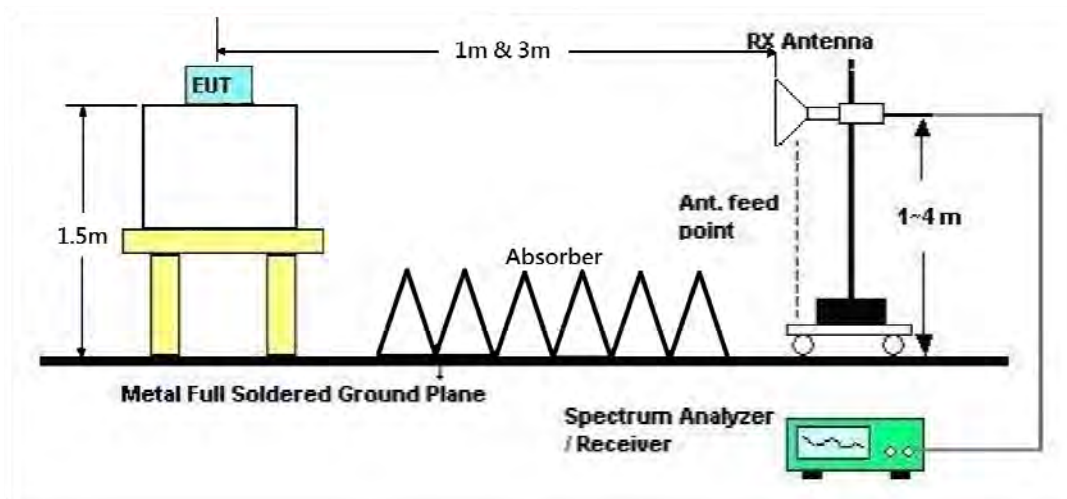

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

#### 4.5.7. Results for Radiated Emissions (1GHz~40GHz)

<For Non-Beamforming Mode>

<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11a CH 149 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11484.79	55.22	74.00	-18.78	41.70	9.24	39.08	34.80	Peak	150	357	HORIZONTAL
2	11495.21	42.15	54.00	-11.85	28.63	9.24	39.08	34.80	Average	150	357	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11488.03	42.84	54.00	-11.16	29.32	9.24	39.08	34.80	Average	150	207	VERTICAL
2	11519.06	55.68	74.00	-18.32	42.13	9.25	39.11	34.81	Peak	150	207	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11a CH 157 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11563.52	42.31	54.00	-11.69	28.73	9.26	39.13	34.81	Average	150	251	HORIZONTAL
2	11602.88	55.43	74.00	-18.57	41.83	9.27	39.16	34.83	Peak	150	251	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11565.25	42.75	54.00	-11.25	29.17	9.26	39.13	34.81	Average	150	209	VERTICAL
2	11593.97	55.33	74.00	-18.67	41.73	9.27	39.15	34.82	Peak	150	209	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11a CH 165 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11654.49	42.84	54.00	-11.16	29.21	9.28	39.19	34.84	Average	150	185	HORIZONTAL
2	11655.53	55.63	74.00	-18.37	42.00	9.28	39.19	34.84	Peak	150	185	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11656.77	55.61	74.00	-18.39	41.98	9.28	39.19	34.84	Peak	150	115	VERTICAL
2	11657.87	42.94	54.00	-11.06	29.31	9.28	39.19	34.84	Average	150	115	VERTICAL





<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11486.29	41.86	54.00	-12.14	28.34	9.24	39.08	34.80	Average	150	188	HORIZONTAL
2	11496.89	55.25	74.00	-18.75	41.73	9.24	39.08	34.80	Peak	150	188	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11490.58	41.82	54.00	-12.18	28.30	9.24	39.08	34.80	Average	150	231	VERTICAL
2	11492.40	54.29	74.00	-19.71	40.77	9.24	39.08	34.80	Peak	150	231	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11563.23	42.33	54.00	-11.67	28.75	9.26	39.13	34.81	Average	150	248	HORIZONTAL
2	11566.50	55.20	74.00	-18.80	41.61	9.26	39.14	34.81	Peak	150	248	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11565.63	42.21	54.00	-11.79	28.62	9.26	39.14	34.81	Average	150	276	VERTICAL
2	11570.49	55.25	74.00	-18.75	41.67	9.26	39.14	34.82	Peak	150	276	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11644.50	56.34	74.00	-17.66	42.71	9.28	39.18	34.83	Peak	150	127	HORIZONTAL
2	11648.32	42.77	54.00	-11.23	29.15	9.28	39.18	34.84	Average	150	127	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11654.69	43.02	54.00	-10.98	29.39	9.28	39.19	34.84	Average	150	196	VERTICAL
2	11658.31	55.67	74.00	-18.33	42.04	9.28	39.19	34.84	Peak	150	196	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11513.73	42.25	54.00	-11.75	28.70	9.25	39.10	34.80	Average	150	290 HORIZONTAL
2	11514.23	55.52	74.00	-18.48	41.97	9.25	39.10	34.80	Peak	150	290 HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11503.52	42.14	54.00	-11.86	28.59	9.25	39.10	34.80	Average	150	208 VERTICAL
2	11519.72	55.99	74.00	-18.01	42.44	9.25	39.11	34.81	Peak	150	208 VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11580.07	54.99	74.00	-19.01	41.41	9.26	39.14	34.82	Peak	150	249	HORIZONTAL
2	11593.13	42.16	54.00	-11.84	28.56	9.27	39.15	34.82	Average	150	249	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11585.60	42.21	54.00	-11.79	28.61	9.27	39.15	34.82	Average	150	274	VERTICAL
2	11597.06	56.13	74.00	-17.87	42.54	9.27	39.15	34.83	Peak	150	274	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11540.33	55.08	74.00	-18.92	41.51	9.26	39.12	34.81 Peak	150	185	HORIZONTAL
2	11559.41	42.28	54.00	-11.72	28.70	9.26	39.13	34.81 Average	150	185	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11540.33	55.10	74.00	-18.90	41.53	9.26	39.12	34.81 Peak	150	111	VERTICAL
2	11545.92	42.32	54.00	-11.68	28.75	9.26	39.12	34.81 Average	150	111	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<For Beamforming Mode>

<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11484.52	54.89	74.00	-19.11	41.37	9.24	39.08	34.80	Peak	165	184	HORIZONTAL
2	11489.92	42.64	54.00	-11.36	29.12	9.24	39.08	34.80	Average	165	184	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11487.96	54.99	74.00	-19.01	41.47	9.24	39.08	34.80	Peak	165	286	VERTICAL
2	11495.64	42.68	54.00	-11.32	29.16	9.24	39.08	34.80	Average	165	286	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11573.84	55.54	74.00	-18.46	41.96	9.26	39.14	34.82	Peak	165	235 HORIZONTAL
2	11578.72	43.07	54.00	-10.93	29.49	9.26	39.14	34.82	Average	165	235 HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11572.64	43.21	54.00	-10.79	29.63	9.26	39.14	34.82	Average	165	222 VERTICAL
2	11573.96	56.10	74.00	-17.90	42.52	9.26	39.14	34.82	Peak	165	222 VERTICAL





<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11640.12	56.19	74.00	-17.81	42.56	9.28	39.18	34.83	Peak	165	179	HORIZONTAL
2	11659.36	42.81	54.00	-11.19	29.18	9.28	39.19	34.84	Average	165	179	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11644.56	56.38	74.00	-17.62	42.75	9.28	39.18	34.83	Peak	165	115	VERTICAL
2	11648.88	42.91	54.00	-11.09	29.29	9.28	39.18	34.84	Average	165	115	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11504.48	55.36	74.00	-18.64	41.81	9.25	39.10	34.80	Peak	165	275	HORIZONTAL
2	11518.16	42.82	54.00	-11.18	29.26	9.25	39.11	34.80	Average	165	275	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11508.44	42.71	54.00	-11.29	29.16	9.25	39.10	34.80	Average	165	259	VERTICAL
2	11511.76	55.22	74.00	-18.78	41.67	9.25	39.10	34.80	Peak	165	259	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11582.68	43.15	54.00	-10.85	29.55	9.27	39.15	34.82	Average	165	240	HORIZONTAL
2	11599.88	55.59	74.00	-18.41	41.99	9.27	39.16	34.83	Peak	165	240	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11581.40	43.00	54.00	-11.00	29.42	9.26	39.14	34.82	Average	165	189	VERTICAL
2	11597.72	55.97	74.00	-18.03	42.38	9.27	39.15	34.83	Peak	165	189	VERTICAL



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11541.40	55.46	74.00	-18.54	41.89	9.26	39.12	34.81	Peak	165	85	HORIZONTAL
2	11556.72	42.86	54.00	-11.14	29.28	9.26	39.13	34.81	Average	165	85	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11541.40	55.46	74.00	-18.54	41.89	9.26	39.12	34.81	Peak	165	85	HORIZONTAL
2	11556.72	42.86	54.00	-11.14	29.28	9.26	39.13	34.81	Average	165	85	HORIZONTAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

<For Non-Beamforming Mode>

<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11a CH 149, 157, 165 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 09, 2015		

##### Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5666.60	67.90	68.20	-0.30	61.87	6.43	34.63	35.03 Peak	170	264	VERTICAL
2	5725.00	65.27	78.20	-12.93	59.21	6.45	34.64	35.03 Peak	170	264	VERTICAL
3	5745.80	113.47			107.41	6.45	34.65	35.04 Peak	170	264	VERTICAL
4	5746.60	104.15			98.09	6.45	34.65	35.04 Average	170	264	VERTICAL
5	5858.00	62.28	78.20	-15.92	56.18	6.50	34.67	35.07 Peak	170	264	VERTICAL
6	5907.40	67.48	68.20	-0.72	61.35	6.52	34.68	35.07 Peak	170	264	VERTICAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

##### Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5706.60	66.80	68.20	-1.40	60.75	6.44	34.64	35.03 Peak	178	271	VERTICAL
2	5725.00	59.02	78.20	-19.18	52.96	6.45	34.64	35.03 Peak	178	271	VERTICAL
3	5786.60	103.96			97.88	6.47	34.66	35.05 Average	178	271	VERTICAL
4	5786.60	113.72			107.64	6.47	34.66	35.05 Peak	178	271	VERTICAL
5	5857.80	67.71	78.20	-10.49	61.61	6.50	34.67	35.07 Peak	178	271	VERTICAL
6	5866.60	68.07	68.20	-0.13	61.97	6.50	34.67	35.07 Peak	178	271	VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

##### Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5664.20	62.41	68.20	-5.79	56.39	6.42	34.63	35.03 Peak	158	271	VERTICAL
2	5721.80	57.88	78.20	-20.32	51.82	6.45	34.64	35.03 Peak	158	271	VERTICAL
3	5825.80	103.95			97.86	6.48	34.67	35.06 Average	158	271	VERTICAL
4	5825.80	113.31			107.22	6.48	34.67	35.06 Peak	158	271	VERTICAL
5	5858.80	60.49	78.20	-17.71	54.39	6.50	34.67	35.07 Peak	158	271	VERTICAL
6	5907.40	68.08	68.20	-0.12	61.95	6.52	34.68	35.07 Peak	158	271	VERTICAL

Item 3, 4 are the fundamental frequency at 5825 MHz.

<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Channel 149**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5657.01	67.42	68.20	-0.78	61.40	6.42	34.63	35.03	Peak	175	73 VERTICAL
2	5721.27	70.37	78.20	-7.83	64.31	6.45	34.64	35.03	Peak	175	73 VERTICAL
3	5746.74	103.06			97.00	6.45	34.65	35.04	Average	175	73 VERTICAL
4	5751.37	114.01			107.95	6.45	34.65	35.04	Peak	175	73 VERTICAL
5	5856.95	63.39	78.20	-14.81	57.28	6.50	34.67	35.06	Peak	175	73 VERTICAL
6	5911.14	68.02	68.20	-0.18	61.90	6.52	34.68	35.08	Peak	175	73 VERTICAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5697.01	67.68	68.20	-0.52	61.64	6.43	34.64	35.03	Peak	185	85 VERTICAL
2	5720.95	60.28	78.20	-17.92	54.22	6.45	34.64	35.03	Peak	185	85 VERTICAL
3	5786.74	102.90			96.82	6.47	34.66	35.05	Average	185	85 VERTICAL
4	5786.74	113.22			107.14	6.47	34.66	35.05	Peak	185	85 VERTICAL
5	5857.53	67.66	78.20	-10.54	61.55	6.50	34.67	35.06	Peak	185	85 VERTICAL
6	5866.62	68.13	68.20	-0.07	62.03	6.50	34.67	35.07	Peak	185	85 VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5663.49	62.60	68.20	-5.60	56.58	6.42	34.63	35.03	Peak	190	73 VERTICAL
2	5723.26	60.05	78.20	-18.15	53.99	6.45	34.64	35.03	Peak	190	73 VERTICAL
3	5826.74	102.44			96.35	6.48	34.67	35.06	Average	190	73 VERTICAL
4	5826.74	112.65			106.56	6.48	34.67	35.06	Peak	190	73 VERTICAL
5	5851.74	62.32	78.20	-15.88	56.22	6.49	34.67	35.06	Peak	190	73 VERTICAL
6	5906.62	68.04	68.20	-0.16	61.91	6.52	34.68	35.07	Peak	190	73 VERTICAL

Item 3, 4 are the fundamental frequency at 5825 MHz.



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

### Channel 151

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5714.48	68.04	68.20	-0.16	61.99	6.44	34.64	35.03	Peak	188	74 VERTICAL
2	5722.00	72.58	78.20	-5.62	66.52	6.45	34.64	35.03	Peak	188	74 VERTICAL
3	5751.53	101.85			95.78	6.46	34.65	35.04	Average	188	74 VERTICAL
4	5751.53	111.50			105.43	6.46	34.65	35.04	Peak	188	74 VERTICAL
5	5851.74	67.08	78.20	-11.12	60.98	6.49	34.67	35.06	Peak	188	74 VERTICAL
6	5911.30	66.71	68.20	-1.49	60.59	6.52	34.68	35.08	Peak	188	74 VERTICAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

### Channel 159

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5711.64	66.30	68.20	-1.90	60.25	6.44	34.64	35.03	Peak	176	80 VERTICAL
2	5721.53	66.26	78.20	-11.94	60.20	6.45	34.64	35.03	Peak	176	80 VERTICAL
3	5801.37	102.63			96.55	6.47	34.66	35.05	Average	176	80 VERTICAL
4	5801.95	112.23			106.15	6.47	34.66	35.05	Peak	176	80 VERTICAL
5	5858.68	65.23	78.20	-12.97	59.13	6.50	34.67	35.07	Peak	176	80 VERTICAL
6	5876.62	67.91	68.20	-0.29	61.80	6.50	34.68	35.07	Peak	176	80 VERTICAL

Item 3, 4 are the fundamental frequency at 5795 MHz.



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Channel 155**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5711.90	68.17	68.20	-0.03	62.12	6.44	34.64	35.03	Peak	188	80	VERTICAL
2	5722.32	73.01	78.20	-5.19	66.95	6.45	34.64	35.03	Peak	188	80	VERTICAL
3	5761.69	98.15			92.09	6.46	34.65	35.05	Average	188	80	VERTICAL
4	5761.69	107.45			101.39	6.46	34.65	35.05	Peak	188	80	VERTICAL
5	5852.89	66.95	78.20	-11.25	60.85	6.49	34.67	35.06	Peak	188	80	VERTICAL
6	5860.67	67.33	68.20	-0.87	61.23	6.50	34.67	35.07	Peak	188	80	VERTICAL

Item 3, 4 are the fundamental frequency at 5775 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## &lt;For Beamforming Mode&gt;

Temperature	23.7°C	Humidity	68%
Test Engineer	Gary Chu / Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Chain 4 + Chain 5 + Chain 6
Test Date	Jul. 10, 2015		

## Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5673.00	67.47	68.20	-0.73	61.44	6.43	34.63	35.03	Peak	176	272	VERTICAL
2	5723.40	73.72	78.20	-4.48	67.66	6.45	34.64	35.03	Peak	176	272	VERTICAL
3	5750.60	113.99			107.93	6.45	34.65	35.04	Peak	176	272	VERTICAL
4	5753.00	104.03			97.96	6.46	34.65	35.04	Average	176	272	VERTICAL
5	5858.00	60.28	78.20	-17.92	54.18	6.50	34.67	35.07	Peak	176	272	VERTICAL
6	5906.60	68.02	68.20	-0.18	61.89	6.52	34.68	35.07	Peak	176	272	VERTICAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

## Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5702.60	66.85	68.20	-1.35	60.80	6.44	34.64	35.03	Peak	175	264	VERTICAL
2	5721.80	58.64	78.20	-19.56	52.58	6.45	34.64	35.03	Peak	175	264	VERTICAL
3	5782.60	102.65			96.58	6.46	34.66	35.05	Average	175	264	VERTICAL
4	5782.60	112.94			106.87	6.46	34.66	35.05	Peak	175	264	VERTICAL
5	5857.20	68.54	78.20	-9.66	62.43	6.50	34.67	35.06	Peak	175	264	VERTICAL
6	5864.20	68.05	68.20	-0.15	61.95	6.50	34.67	35.07	Peak	175	264	VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

## Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5708.20	60.33	68.20	-7.87	54.28	6.44	34.64	35.03	Peak	170	269	VERTICAL
2	5721.00	58.79	78.20	-19.41	52.73	6.45	34.64	35.03	Peak	170	269	VERTICAL
3	5827.40	101.59			95.50	6.48	34.67	35.06	Average	170	269	VERTICAL
4	5830.60	111.80			105.71	6.48	34.67	35.06	Peak	170	269	VERTICAL
5	5850.00	59.60	78.20	-18.60	53.50	6.49	34.67	35.06	Peak	170	269	VERTICAL
6	5913.00	68.07	68.20	-0.13	61.95	6.52	34.68	35.08	Peak	170	269	VERTICAL

Item 3, 4 are the fundamental frequency at 5825 MHz.



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Channel 151**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5715.00	67.90	68.20	-0.30	61.85	6.44	34.64	35.03	Peak	170	272	VERTICAL
2	5724.60	70.56	78.20	-7.64	64.50	6.45	34.64	35.03	Peak	170	272	VERTICAL
3	5756.60	111.79			105.73	6.46	34.65	35.05	Peak	170	272	VERTICAL
4	5757.40	102.68			96.62	6.46	34.65	35.05	Average	170	272	VERTICAL
5	5850.00	65.60	78.20	-12.60	59.50	6.49	34.67	35.06	Peak	170	272	VERTICAL
6	5907.80	67.81	68.20	-0.39	61.68	6.52	34.68	35.07	Peak	170	272	VERTICAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

**Channel 159**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5700.60	66.94	68.20	-1.26	60.89	6.44	34.64	35.03	Peak	187	265	VERTICAL
2	5725.00	63.51	78.20	-14.69	57.45	6.45	34.64	35.03	Peak	187	265	VERTICAL
3	5777.40	102.86			96.79	6.46	34.66	35.05	Average	187	265	VERTICAL
4	5781.40	112.78			106.71	6.46	34.66	35.05	Peak	187	265	VERTICAL
5	5858.20	68.45	78.20	-9.75	62.35	6.50	34.67	35.07	Peak	187	265	VERTICAL
6	5860.60	67.95	68.20	-0.25	61.85	6.50	34.67	35.07	Peak	187	265	VERTICAL

Item 3, 4 are the fundamental frequency at 5795 MHz.



<b>Temperature</b>	23.7°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Gary Chu / Akina Chiu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 4 + Chain 5 + Chain 6
<b>Test Date</b>	Jul. 10, 2015		

**Channel 155**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5707.00	67.88	68.20	-0.32	61.83	6.44	34.64	35.03	Peak	170	267	VERTICAL
2	5717.40	67.85	78.20	-10.35	61.80	6.44	34.64	35.03	Peak	170	267	VERTICAL
3	5763.00	99.38			93.32	6.46	34.65	35.05	Average	170	267	VERTICAL
4	5787.00	111.46			105.38	6.47	34.66	35.05	Peak	170	267	VERTICAL
5	5850.00	64.53	78.20	-13.67	58.43	6.49	34.67	35.06	Peak	170	267	VERTICAL
6	5938.20	64.38	68.20	-3.82	58.25	6.52	34.69	35.08	Peak	170	267	VERTICAL

Item 3, 4 are the fundamental frequency at 5775 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.7. Frequency Stability Measurement

### 4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is  $-20^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.7.4. Test Setup Layout

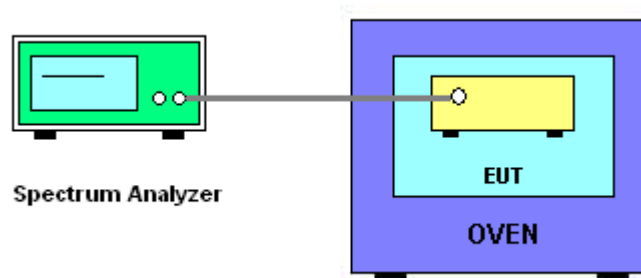

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.7.7. Test Result of Frequency Stability

<b>Temperature</b>	25°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Roki Liu	<b>Test Date</b>	Sep. 17, 2015

Mode: 20 MHz / Chain 6

##### Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5744.9345	5744.9343	5744.9341	5744.9339
110.00	5744.9353	5744.9357	5744.9358	5744.9361
93.50	5744.9362	5744.9364	5744.9366	5744.9368
Max. Deviation (MHz)	0.0655	0.0657	0.0659	0.0661
Max. Deviation (ppm)	11.40	11.44	11.47	11.51
Result	Complies			

##### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5744.9365	5744.9367	5744.9369	5744.9371
-10	5744.9362	5744.9363	5744.9365	5744.9369
0	5744.9358	5744.9362	5744.9363	5744.9367
10	5744.9355	5744.9359	5744.9360	5744.9364
20	5744.9353	5744.9357	5744.9358	5744.9361
30	5744.9351	5744.9354	5744.9356	5744.9358
40	5744.9349	5744.9352	5744.9354	5744.9356
50	5744.9347	5744.9349	5744.9352	5744.9355
Max. Deviation (MHz)	0.0653	0.0651	0.0648	0.0645
Max. Deviation (ppm)	11.37	11.33	11.28	11.23
Result	Complies			

Mode: 40 MHz / Chain 6

## Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5794.9351	5794.9348	5794.9346	5794.9348
110.00	5794.9358	5794.9362	5794.9363	5794.9365
93.50	5794.9367	5794.9369	5794.9374	5794.9376
Max. Deviation (MHz)	0.0649	0.0652	0.0654	0.0652
Max. Deviation (ppm)	11.20	11.25	11.29	11.25
Result	Complies			

## Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5794.9368	5794.9371	5794.9373	5794.9375
-10	5794.9365	5794.9367	5794.9369	5794.9372
0	5794.9361	5794.9366	5794.9368	5794.9370
10	5794.9358	5794.9363	5794.9365	5794.9368
20	5794.9356	5794.9361	5794.9363	5794.9366
30	5794.9354	5794.9358	5794.9361	5794.9363
40	5794.9353	5794.9356	5794.9358	5794.9360
50	5794.9351	5794.9353	5794.9355	5794.9358
Max. Deviation (MHz)	0.0649	0.0647	0.0645	0.0642
Max. Deviation (ppm)	11.20	11.16	11.13	11.08
Result	Complies			



Mode: 80 MHz / Chain 6

## Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5774.9352	5774.9349	5774.9347	5774.9349
110.00	5774.9359	5774.9363	5774.9364	5774.9366
93.50	5774.9368	5774.9371	5774.9375	5774.9377
Max. Deviation (MHz)	0.0648	0.0651	0.0653	0.0651
Max. Deviation (ppm)	11.22	11.27	11.31	11.27
Result	Complies			

## Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5774.9369	5774.9373	5774.9375	5774.9377
-10	5774.9366	5774.9369	5774.9371	5774.9374
0	5774.9363	5774.9368	5774.9369	5774.9372
10	5774.9361	5774.9365	5774.9367	5774.9369
20	5774.9359	5774.9363	5774.9365	5774.9367
30	5774.9357	5774.9360	5774.9363	5774.9365
40	5774.9355	5774.9358	5774.9361	5774.9363
50	5774.9353	5774.9356	5774.9358	5774.9361
Max. Deviation (MHz)	0.0647	0.0644	0.0642	0.0639
Max. Deviation (ppm)	11.20	11.15	11.12	11.06
Result	Complies			

## 4.8. Antenna Requirements

### 4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%